



RF TEST REPORT

Product Name: Frost-free refrigerator

Model Name: HRM260P9TSE, HRM260P9T*E, (*) maybe A-Z

FCC ID: 2A4A3FRIDGE-780W

Issued For : Hisense Ronshen (Guangdong) Refrigerator Co.,Ltd
No.8 Ronggang Road Ronggui Shunde Foshan Guangdong
P.R.China

Issued By : Shenzhen LGT Test Service Co., Ltd.
Room 205, Building 13, Zone B, Zhenxiong Industrial Park,
No.177, Renmin West Road, Jinsha, Kengzi Street, Pingshan
District, Shenzhen, Guangdong, China

Report Number: LGT25C081RF03

Sample Received Date: April 14, 2025

Date of Test: April 14, 2025 ~ July 14, 2025

Date of Issue: July 15, 2025

The test report is effective only with both signature and specialized stamp. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report only apply to the tested sample.



TEST REPORT CERTIFICATION

Applicant: Hisense Ronshen (Guangdong) Refrigerator Co.,Ltd
Address: No.8 Ronggang Road Ronggui Shunde Foshan Guangdong P.R.China
Manufacturer: Hisense Ronshen (Guangdong) Refrigerator Co.,Ltd
Address: No.8 Ronggang Road Ronggui Shunde Foshan Guangdong P.R.China
Product Name: Frost-free refrigerator
Trademark: Hisense
Model Name: HRM260P9TSE, HRM260P9T*E, (*) maybe A-Z
Sample Status: Normal
Serial Number: LGT2503124-1

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC Part 15.247, Subpart C ANSI C63.10-2013	PASS

Prepared by:

Zane Shan

Zane Shan
Engineer

Approved by:

Vita Li

Vita Li
Technical Director





Table of Contents	Page
1. SUMMARY OF TEST RESULTS	6
1.1 TEST FACTORY	7
1.2 MEASUREMENT UNCERTAINTY	7
2. GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF THE EUT	8
2.2 DESCRIPTION OF THE TEST MODES	10
2.3 TEST SOFTWARE AND POWER LEVEL	11
2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	11
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	12
3. EMC EMISSION TEST	14
3.1 CONDUCTED EMISSION MEASUREMENT	14
3.2 RADIATED EMISSION MEASUREMENT	18
4. CONDUCTED SPURIOUS & BAND EDGE EMISSION	30
4.1 LIMIT	30
4.2 TEST PROCEDURE	30
4.3 DEVIATION FROM STANDARD	30
4.4 TEST SETUP	30
4.5 EUT OPERATION CONDITIONS	30
4.6 TEST RESULTS	30
5. POWER SPECTRAL DENSITY TEST	31
5.1 LIMIT	31
5.2 TEST PROCEDURE	31
5.3 DEVIATION FROM STANDARD	31
5.4 TEST SETUP	31
5.5 EUT OPERATION CONDITIONS	31
5.6 TEST RESULTS	31
6. BANDWIDTH TEST	32
6.1 LIMIT	32
6.2 TEST PROCEDURE	32
6.3 DEVIATION FROM STANDARD	32
6.4 TEST SETUP	32
6.5 EUT OPERATION CONDITIONS	32
6.6 TEST RESULTS	32



7. PEAK OUTPUT POWER TEST	33
7.1 LIMIT	33
7.2 TEST PROCEDURE	33
7.3 DEVIATION FROM STANDARD	33
7.4 TEST SETUP	33
7.5 EUT OPERATION CONDITIONS	33
7.6 TEST RESULTS	33
8. ANTENNA REQUIREMENT	34
8.1 STANDARD REQUIREMENT	34
8.2 EUT ANTENNA	34
APPENDIX I - TEST RESULTS	35
DUTY CYCLE	35
MAXIMUM PEAK CONDUCTED OUTPUT POWER	44
OCCUPIED CHANNEL BANDWIDTH	45
MAXIMUM POWER SPECTRAL DENSITY LEVEL	54
BAND EDGE	67
CONDUCTED RF SPURIOUS EMISSION	79
-6DB BANDWIDTH	96
APPENDIX II - MEASUREMENT PHOTOS	105



Revision History

Rev.	Issue Date	Contents
00	May 22, 2025	Initial Issue



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

KDB 662911 D01 v02r01

KDB 558074 D01 15.247 Meas Guidance v05r02.

FCC Part 15.247, Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	--
15.247 (a)(2)	6dB&99% Bandwidth	PASS	--
15.247 (b)(3)	Output Power	PASS	--
15.209	Radiated Spurious Emission	PASS	--
15.247 (d)	Conducted Spurious & Band Edge Emission	PASS	--
15.247 (e)	Power Spectral Density	PASS	--
15.205	Restricted Band Edge Emission	PASS	--
Part 15.247(d)/ Part 15.209(a)	Band Edge Emission	PASS	--
15.203	Antenna Requirement	PASS	--

NOTE:

(1) 'N/A' denotes test is not applicable in this Test Report.

(2) All tests are according to ANSI C63.10-2013.



1.1 TEST FACTORY

Company Name:	Shenzhen LGT Test Service Co., Ltd.
Address:	Room 205, Building 13, Zone B, Zhenxiong Industrial Park, No.177, Renmin West Road, Jinsha, Kengzi Street, Pingshan District, Shenzhen, Guangdong, China
Accreditation Certificate:	A2LA Certificate No.: 6727.01
	FCC Registration No.: 746540
	CAB ID: CN0136

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	Occupied Channel Bandwidth	$\pm 0.46 \%$
2	RF Output Power, Conducted	$\pm 0.71\text{dB}$
3	Power Spectral Density, Conducted	$\pm 1.57 \text{ dB}$
4	Unwanted Emission, Conducted	$\pm 0.63\text{dB}$
5	Conducted emission	$\pm 2.80\text{dB}$
6	All Emissions, Radiated (0.009-30MHz)	$\pm 2.16\text{dB}$
7	All Emissions, Radiated (30MHz-1GHz)	$\pm 4.61\text{dB}$
8	All Emissions, Radiated (1GHz-18GHz)	$\pm 5.49\text{dB}$
9	Temperature	$\pm 0.5^{\circ}\text{C}$
10	Humidity	$\pm 2\%$
11	Duty Cycle	$\pm 2.3\%$

Note: The measurement uncertainty is not included in the test result.



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name:	Frost-free refrigerator	
Trademark:	Hisense	
Model Name:	HRM260P9TSE	
Serials Model Name:	HRM260P9T*E, (*) maybe A-Z	
Model Difference:	Only difference in model name.	
Product Description:	Operation Frequency:	802.11b/g/n(20MHz): 2412~2462 MHz 802.11n (40MHz):2422~2452MHz
	Modulation Type:	802.11b(DSSS):CCK,DQPSK,DBPSK 802.11g(OFDM):BPSK,QPSK,16-QAM,64-QAM 802.11n(OFDM):BPSK,QPSK,16-QAM,64-QAM
	Number of Channel:	802.11b/g/n: 11CH 802.11n: 7CH
	Antenna Designation:	Metal Antenna
	Antenna Gain(dBi):	ANT 1: 2.1 ANT 2: 2.1 For MIMO mode: Directional gain=5.11 dBi
Channel List:	Please refer to the Note 3.	
Rating:	Input: AC 110-115V/60Hz, 3A	
Hardware Version:	N/A	
Software Version:	N/A	
Connecting I/O Port(s):	Please refer to the Note 1.	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User Manual.
2. The antenna information refers to the manufacturer provide report, applicable only to the tested sample identified in the report. Due to the incorrect antenna information, a series of problems such as the accuracy of the test results will be borne by the customer.



3.

Operation Frequency of channel			
802.11b/g/n(20MHz)		Channel List for 802.11n(40MHz)	
Channel	Frequency	Channel	Frequency
01	2412	03	2422
02	2417	04	2427
03	2422	05	2432
04	2427	06	2437
05	2432	07	2442
06	2437	08	2447
07	2442	09	2452
08	2447		
09	2452		
10	2457		
11	2462		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Carrier Frequency Channel

2.4GHz Test Frequency:

For 802.11b/g/n(HT20)		For 802.11n(HT40)	
Channel	Freq.(MHz)	Channel	Freq.(MHz)
01	2412	03	2422
06	2437	06	2437
11	2462	09	2452



2.2 DESCRIPTION OF THE TEST MODES

Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Worst Mode	Description	Data Rate
Mode 1	TX IEEE 802.11b CH1	1 Mbps
Mode 2	TX IEEE 802.11b CH6	1 Mbps
Mode 3	TX IEEE 802.11 b CH11	1 Mbps
Mode 4	TX IEEE 802.11g CH1	6 Mbps
Mode 5	TX IEEE 802.11g CH6	6 Mbps
Mode 6	TX IEEE 802.11g CH11	6 Mbps
Mode 7	TX IEEE 802.11n HT20 CH1	MCS 0
Mode 8	TX IEEE 802.11n HT20 CH6	MCS 0
Mode 9	TX IEEE 802.11n HT20 CH11	MCS 0
Mode 10	TX IEEE 802.11n HT40 CH3	MCS 0
Mode 11	TX IEEE 802.11n HT40 CH6	MCS 0
Mode 12	TX IEEE 802.11n HT40 CH9	MCS 0

Note:

(1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.

AC Conducted Emission

Test Case	
AC Conducted Emission	Mode13: Keeping TX + WLAN Link



2.3 TEST SOFTWARE AND POWER LEVEL

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.

Test software Version	Test program: 2.4G WIFI		
CMD Command	Mode Or Modulation type	SISO Power setting	MIMO Power setting
	b	10	-
	g	8	-
	n20	8	5
	n40	8	5

2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.

Accessories Equipment

Description	Manufacturer	Model	S/N	Rating

Auxiliary Equipment

Description	Manufacturer	Model	S/N	Rating
Laptop	Lenovo	T470s	N/A	N/A

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (2) “YES” is means “with core”; “NO” is means “without core”.



2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Conducted Emission					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
EMI Test Receiver	R&S	ESU8	100372	2025.03.06	2026.03.05
LISN	COM-POWER	LI-115	02032	2025.03.05	2026.03.04
LISN	SCHWARZBECK	NNLK 8122	00160	2025.03.05	2026.03.04
Transient Limiter	CYBERTEK	EM5010A	E2250100049	2025.03.05	2026.03.04
Coaxial cables (9kHz-30MHz)	Juncoax	JMR600-NMNM-2M	N.A	2025.03.06	2026.03.05
Temperature & Humidity	JINGCHUANG	BT-3	N.A	2025.03.10	2026.03.09
Testing Software	EMC-I_V1.4.0.3_SKET				

Radiated Test equipment					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
EMI Test Receiver	R&S	ESU8	100372	2025.03.06	2026.03.05
Active loop Antenna	ETS	6502	00049544	2025.03.11	2028.03.10
Spectrum Analyzer	Keysight	N9010B	MY60242508	2025.03.05	2026.03.04
Trilog Broadband Antenna (30M-1G)	SCHWARZBECK	VULB 9168	2705	2024.05.17	2027.05.16
Horn Antenna(1-18G)	SCHWARZBECK	3115	10SL0060	2025.03.10	2028.03.09
Horn Antenna(18-40G)	SCHWARZBECK	BBHA 9170	685	2023.10.23	2026.10.22
Pre-amplifier(30M-1G)	EMtrace	RP01A	02019	2025.03.06	2026.03.05
Pre-amplifier(1-26.5G)	Agilent	8449B	3008A4722	2025.03.06	2026.03.05
Pre-amplifier(18-40G)	SCHWARZBECK	BBV 9721	9721-019	2024.10.21	2025.10.20
Coaxial cables (9kHz-1GHz)	Juncoax	JMR600 -NMNM-8M	N.A	2025.03.06	2026.03.05
Coaxial cables (1GHz-18GHz)	TaiHe	UCD460B -NMSM-1M9	N.A	2025.03.06	2026.03.05
Coaxial cables (18GHz-40GHz)	Junkosha Inc.	MWX241 -05000KMSKMS	N.A	2025.03.08	2026.03.07
Temperature& Humidity test chamber	AISRY	LX-1000L	171200018	2024.08.05	2025.08.04
Antenna Tower	SAEMC	BK-4AT-BS-D	SK2021093008	N.A	N.A
Temperature & Humidity	JINGCHUANG	BT-3	N.A	2025.03.10	2026.03.09
Testing Software	EMC-I_V1.4.0.3_SKET				

RF Conducted Test equipment					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
Signal Analyzer	Keysight	N9010B	MY60242508	2025.03.05	2026.03.04
Signal Analyzer	Keysight	N9020A	MY50530994	2025.03.05	2026.03.04
Signal Analyzer	R&S	FSV40-N	102245	2025.02.17	2026.02.16
Power Sensor	R&S	NRP8S	149.0006K02 -104963-Ae	2025.03.06	2026.03.05
RF Automatic Test system	MW	MW100-RFCB	MW220324LG -33	2025.03.06	2026.03.05
MXG Vector Signal Generator	Keysight	N5182B	MY59100717	2025.03.05	2026.03.04
Temperature&	AISRY	LX-1000L	171200018	2024.08.05	2025.08.04



Humidity test chamber					
Attenuator	eastsheep	90db	N.A	2025.03.06	2026.03.05
Temperature & Humidity	JINGCHUANG	BT-3	N.A	2025.03.10	2026.03.09
Digital multimeter	MASTECH	MS8261	MBGBC83053	2025.03.05	2026.03.04
DC source	Jiuyuan	QJ6010E	N.A	2025.03.09	2026.03.08
Testing Software	MTS8310_V2.0.0.0_MW				



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION LIMITS

The radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table.

FREQUENCY (MHz)	Conducted Emissionlimit (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of “ * ” marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.1.2 TEST PROCEDURE

- The EUT is 0.1 m from the horizontal ground plane and 0.4 m from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments are powered from additional LISN(s). The LISN provides 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN is at least 80 cm from the nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 TEST SETUP

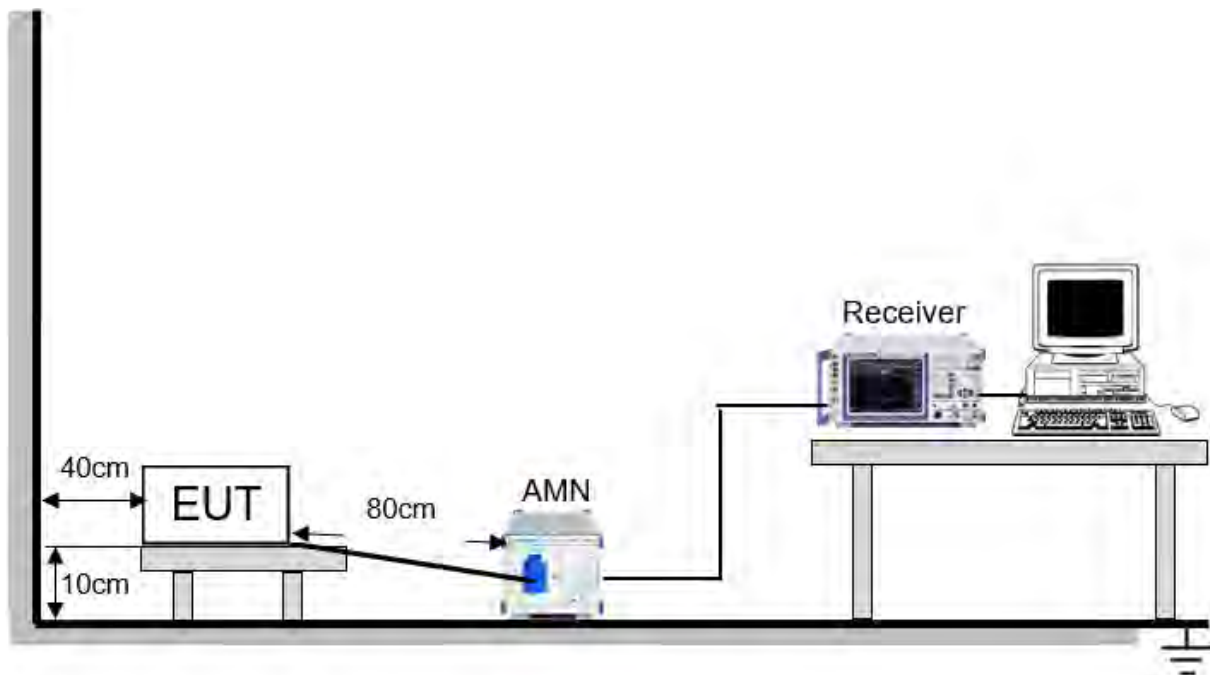


3.1.4 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



3.1.5 TEST RESULT


Project: LGT25C081	Test Engineer: LiuH
EUT: Frost-free refrigerator	Temperature: 23.4°C
M/N: HRM260P9TSE	Humidity: 40%RH
Test Voltage: AC 110V/60Hz	Test Data: 2025-05-12
Test Mode: TX 802.11b 2412	
Note:	

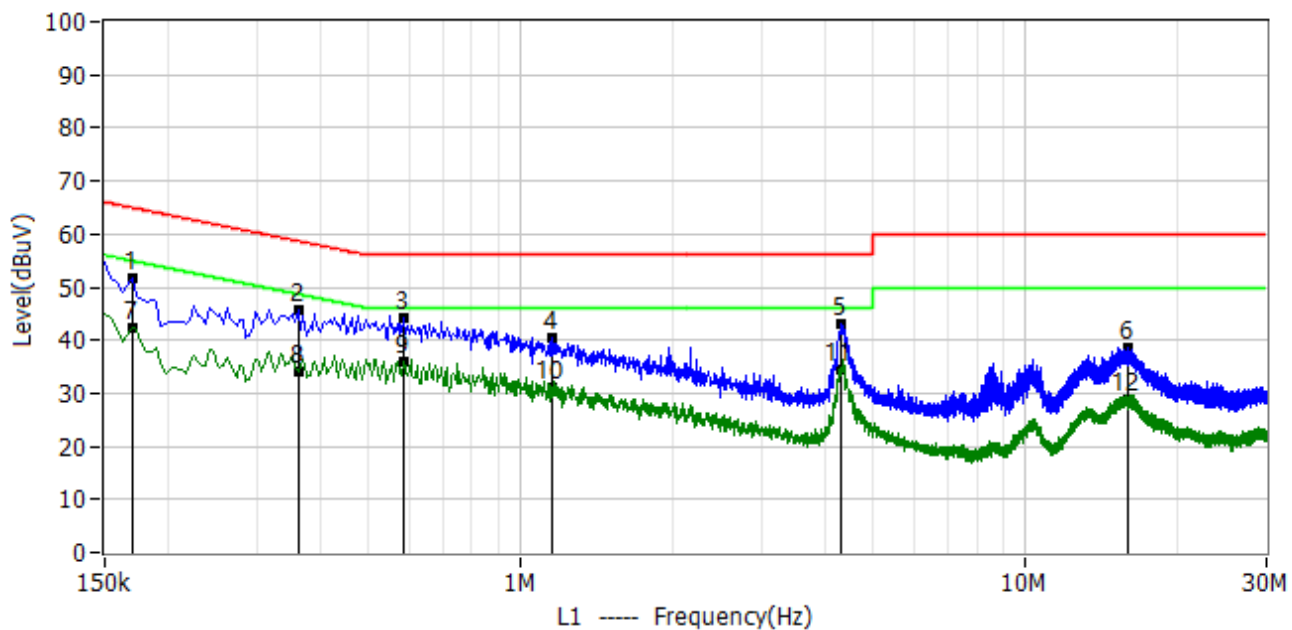

No.	Frequency MHz	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Margin dB	Detector	Polar
1*	0.170	40.92	10.63	51.55	64.96	-13.41	QP	L1
2*	0.362	34.95	10.90	45.85	58.68	-12.83	QP	L1
3*	0.586	33.34	10.95	44.29	56.00	-11.71	QP	L1
4*	1.150	29.62	10.96	40.58	56.00	-15.42	QP	L1
5*	4.318	31.82	11.26	43.08	56.00	-12.92	QP	L1
6*	15.910	26.81	11.74	38.55	60.00	-21.45	QP	L1
7*	0.170	31.87	10.63	42.50	55.00	-12.50	AV	L1
8*	0.362	23.30	10.90	34.20	48.70	-14.50	AV	L1
9*	0.586	25.05	10.95	36.00	46.00	-10.00	AV	L1
10*	1.150	19.94	10.96	30.90	46.00	-15.10	AV	L1
11*	4.318	23.04	11.26	34.30	46.00	-11.70	AV	L1
12*	15.910	17.16	11.74	28.90	50.00	-21.10	AV	L1



Project: LGT25C081	Test Engineer: LiuH
EUT: Frost-free refrigerator	Temperature: 23.4°C
M/N: HRM260P9TSE	Humidity: 40%RH
Test Voltage: AC 110V/60Hz	Test Data: 2025-05-12
Test Mode: TX 802.11b 2412	
Note:	

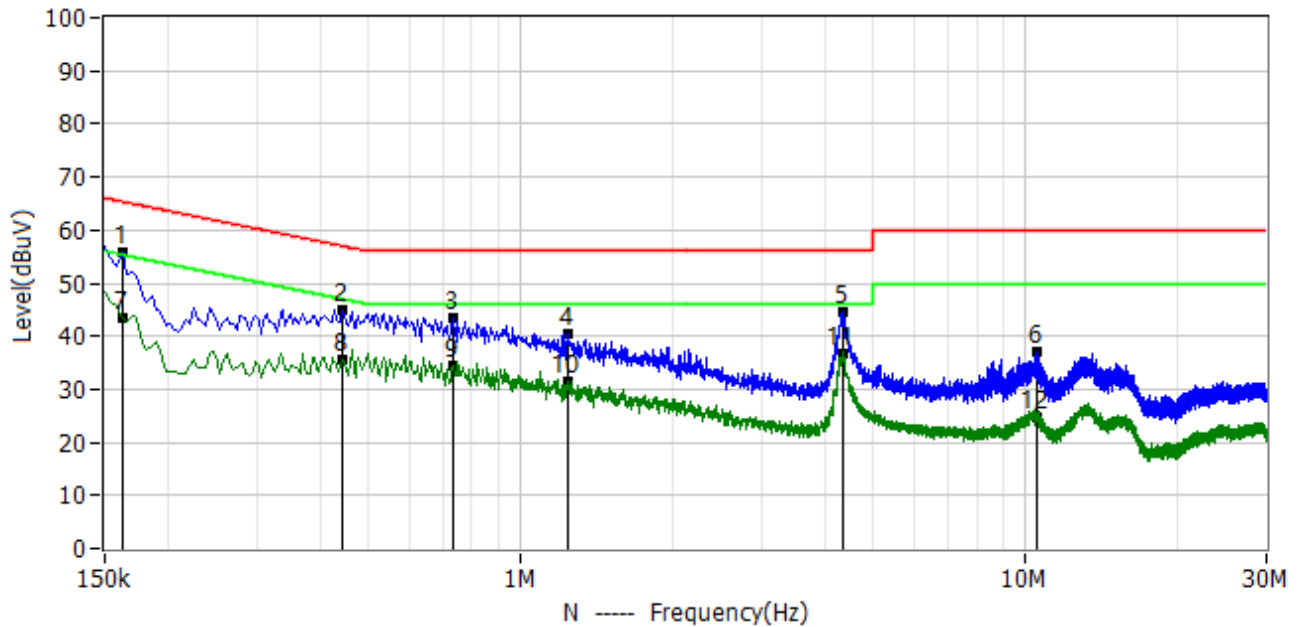

No.	Frequency MHz	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Margin dB	Detector	Polar
1*	0.162	45.22	10.66	55.88	65.36	-9.48	QP	N
2*	0.442	34.10	10.83	44.93	57.02	-12.09	QP	N
3*	0.734	32.73	10.84	43.57	56.00	-12.43	QP	N
4*	1.238	29.66	10.95	40.61	56.00	-15.39	QP	N
5*	4.358	33.23	11.29	44.52	56.00	-11.48	QP	N
6*	10.526	25.68	11.52	37.20	60.00	-22.80	QP	N
7*	0.162	32.74	10.66	43.40	55.40	-12.00	AV	N
8*	0.442	24.67	10.83	35.50	47.00	-11.50	AV	N
9*	0.734	23.76	10.84	34.60	46.00	-11.40	AV	N
10*	1.238	20.55	10.95	31.50	46.00	-14.50	AV	N
11*	4.358	25.51	11.29	36.80	46.00	-9.20	AV	N
12*	10.526	13.08	11.52	24.60	50.00	-25.40	AV	N



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS

In any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the Restricted band specified on Part15.205(a)&209(a) and RSS-247 (5.5) limit in the table and according to ANSI C63.10-2013 below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (0.009MHz - 1000MHz)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (1000MHz-25GHz)

FREQUENCY (MHz)	(dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

LIMITS OF RESTRICTED FREQUENCY BANDS

FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (GHz)
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			



For Radiated Emission

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/QP/AV
Start Frequency	9 KHz/150KHz(Peak/QP/AV)
Stop Frequency	150KHz/30MHz(Peak/QP/AV)
RB / VB (emission in restricted band)	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz); 200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/QP
Start Frequency	30 MHz(Peak/QP)
Stop Frequency	1000 MHz (Peak/QP)
RB / VB (emission in restricted band)	120 KHz / 300 KHz

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	10th carrier hamonic(Peak/AV)
RB / VB (emission in restricted band)	1 MHz / 3 MHz(Peak) 1 MHz/1/T MHz(AVG)

For Restricted band

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	Lower Band Edge: 2310 to 2430 MHz Upper Band Edge: 2445 to 2500 MHz
RB / VB	1 MHz / 3 MHz(Peak) 1 MHz/1/T MHz(AVG)



Receiver Parameter	Setting
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE


- The measuring distance at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- The EUT was placed on the top of a rotating table 0.1 m above the ground at a 3 m anechoic chamber test site. The table was rotated 360 degree to determine the position of the highest radiation.
- The height of the equipment shall be 0.1 m; the height of the test antenna shall vary between 1 m to 4 m. Horizontal and vertical polarization of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and QuasiPeak detector mode will be re-measured.
- If the Peak Mode measured value is compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and no additional QP Mode measurement was performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

3.2.3 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

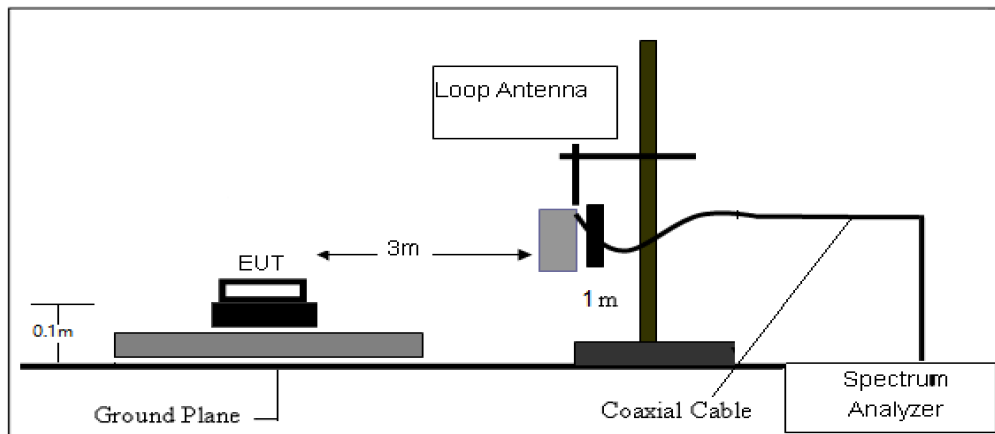

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

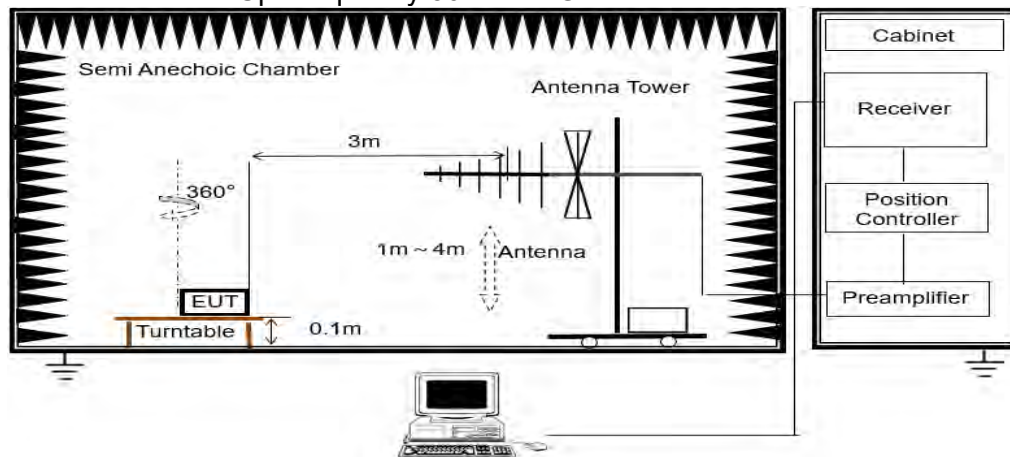

(C) Radiated Emission Test-Up Frequency Above 1GHz

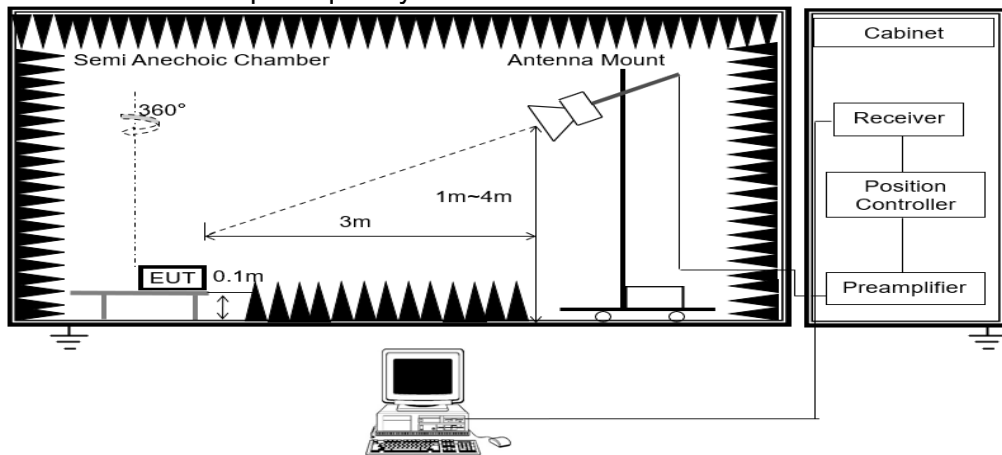

3.2.4 EUT OPERATING CONDITIONS

Please refer to section 3.1.4 of this report.



3.2.5 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where

FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

For example

Frequency	FS	RA	AF	CL	AG	Factor
(MHz)	(dBμV/m)	(dBμV/m)	(dB)	(dB)	(dB)	(dB)
300	40	58.1	12.2	1.6	31.9	-18.1

$$\text{Factor} = \text{AF} + \text{CL} - \text{AG}$$



3.2.6 TEST RESULT

Results of Radiated Emissions (9 KHz~30MHz)

No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Remark
1*	-	-	-	-	-	-	-	See Note

Note:

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);


Limit line = specific limits (dBuV) + distance extrapolation factor.




Results of Radiated Emissions (30MHz~1000MHz)

Note:1. All mode has been tested, only shown the worst case data,
2. The peak value is less than the AV limit, so no AV data is displayed.

Project: LGT25C081	Test Engineer: LiuH
EUT: Frost-free refrigerator	Temperature: 25.1°C
M/N: HRM260P9TSE	Humidity: 50%RH
Test Voltage: AC 110V/60Hz	Test Data: 2025-05-12
Test Mode: TX 802.11b 2412(ANT2)	
Note:	

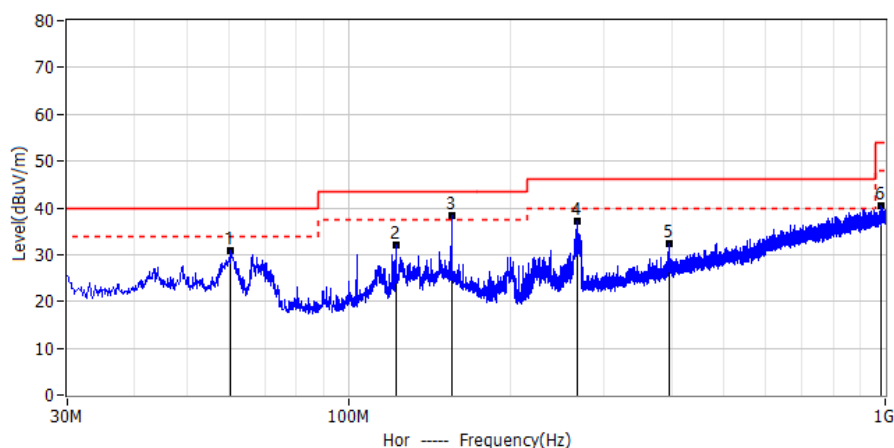

No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	60.313	11.12	19.66	30.78	40.00	-9.22	QP	Hor
2*	122.514	12.51	19.61	32.12	43.50	-11.38	QP	Hor
3*	155.858	16.23	22.08	38.31	43.50	-5.19	QP	Hor
4*	267.286	16.57	20.51	37.08	46.00	-8.92	QP	Hor
5*	395.205	7.05	25.19	32.24	46.00	-13.76	QP	Hor
6*	985.086	4.97	35.51	40.48	54.00	-13.52	QP	Hor

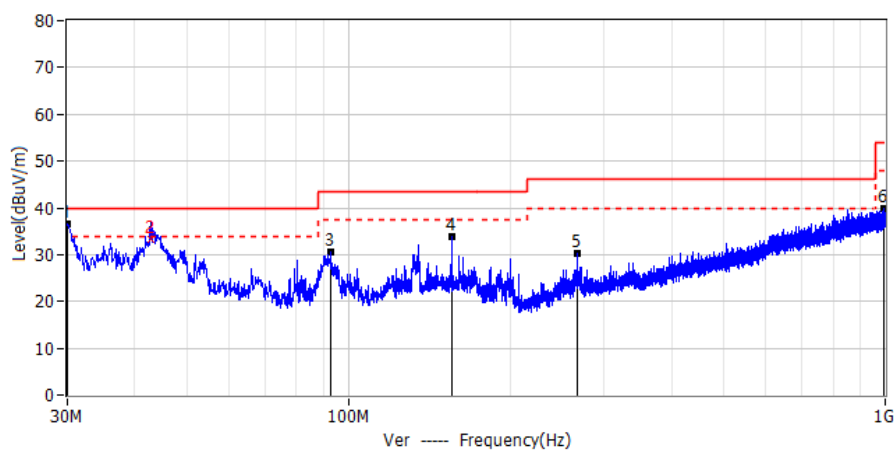


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	30.000	16.97	19.49	36.46	40.00	-3.54	QP	Ver
2	42.841	12.14	21.00	33.14	40.00	-6.86	QP	Ver
3*	92.686	13.91	16.75	30.66	43.50	-12.84	QP	Ver
4*	155.736	11.90	22.03	33.93	43.50	-9.57	QP	Ver
5*	267.650	9.60	20.52	30.12	46.00	-15.88	QP	Ver
6*	992.240	4.81	35.04	39.85	54.00	-14.15	QP	Ver




Results of Radiated Emissions (Above 1000MHz)

Project: LGT25C081	Test Engineer: LiuH
EUT: Frost-free refrigerator	Temperature: 25°C
M/N: HRM260P9TSE	Humidity: 55%RH
Test Voltage: AC 110V/60Hz	Test Data: 2025-05-17
Test Mode: 802.11b 2412(ANT2)	
Note:	

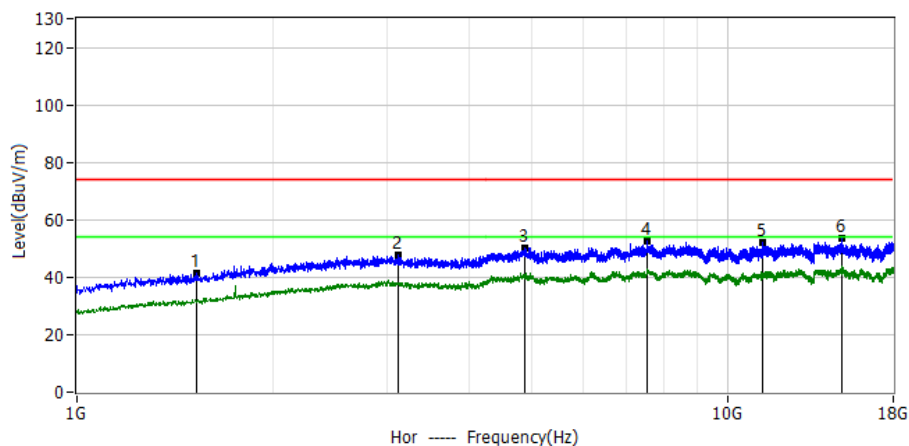


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1529.1000	61.63	-20.15	41.48	74.00	-32.52	PK	Hor
2*	3122.9000	55.73	-8.17	47.56	74.00	-26.44	PK	Hor
3*	4871.7000	56.14	-5.90	50.24	74.00	-23.76	PK	Hor
4*	7513.1000	59.46	-7.02	52.44	74.00	-21.56	PK	Hor
5*	11348.7000	56.91	-5.04	51.87	74.00	-22.13	PK	Hor
6*	15018.6000	57.21	-3.78	53.43	74.00	-20.57	PK	Hor

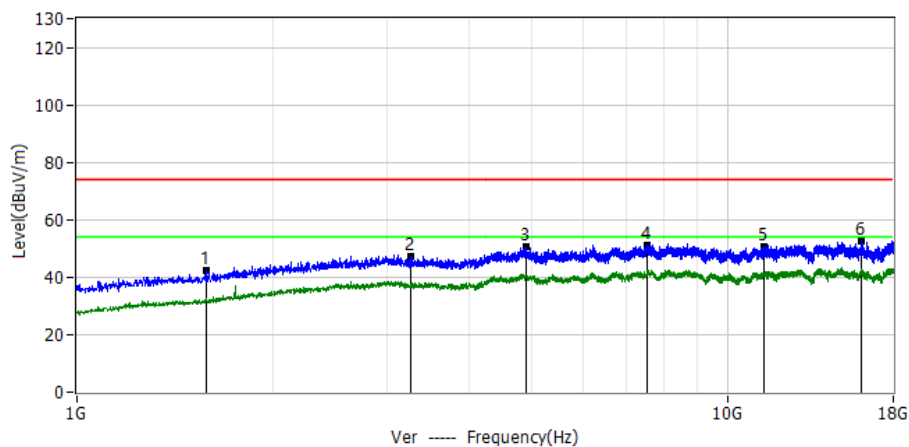


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1578.0000	61.95	-19.72	42.23	74.00	-31.77	PK	Ver
2*	3252.5000	55.53	-8.21	47.32	74.00	-26.68	PK	Ver
3*	4916.4000	56.54	-5.94	50.60	74.00	-23.40	PK	Ver
4*	7528.0000	58.39	-7.05	51.34	74.00	-22.66	PK	Ver
5*	11389.1000	55.64	-5.03	50.61	74.00	-23.39	PK	Ver
6*	16057.7000	56.22	-3.75	52.47	74.00	-21.53	PK	Ver



Project: LGT25C081	Test Engineer: LiuH
EUT: Frost-free refrigerator	Temperature: 25°C
M/N: HRM260P9TSE	Humidity: 55%RH
Test Voltage: AC 110V/60Hz	Test Data: 2025-05-17
Test Mode: 802.11b 2437(ANT2)	
Note:	

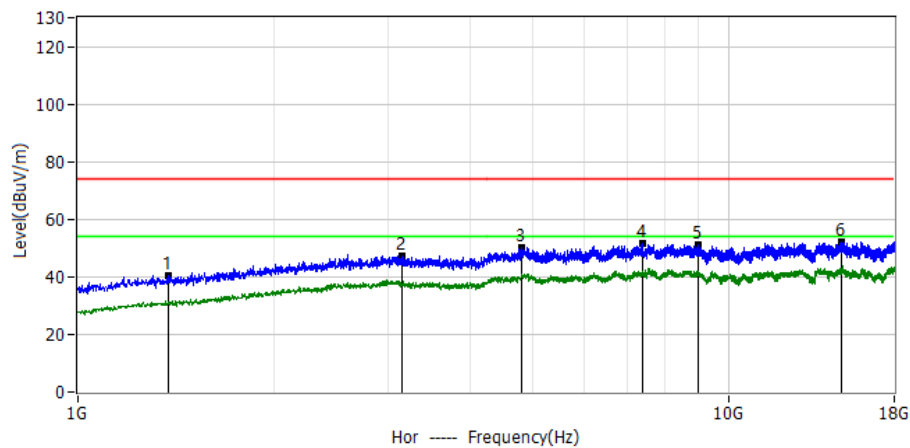


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1374.0000	61.82	-21.40	40.42	74.00	-33.58	PK	Hor
2*	3150.5000	55.59	-8.18	47.41	74.00	-26.59	PK	Hor
3*	4820.7000	56.21	-5.86	50.35	74.00	-23.65	PK	Hor
4*	7372.9000	58.67	-7.02	51.65	74.00	-22.35	PK	Hor
5*	8983.6000	57.98	-7.02	50.96	74.00	-23.04	PK	Hor
6*	14908.1000	56.35	-4.26	52.09	74.00	-21.91	PK	Hor

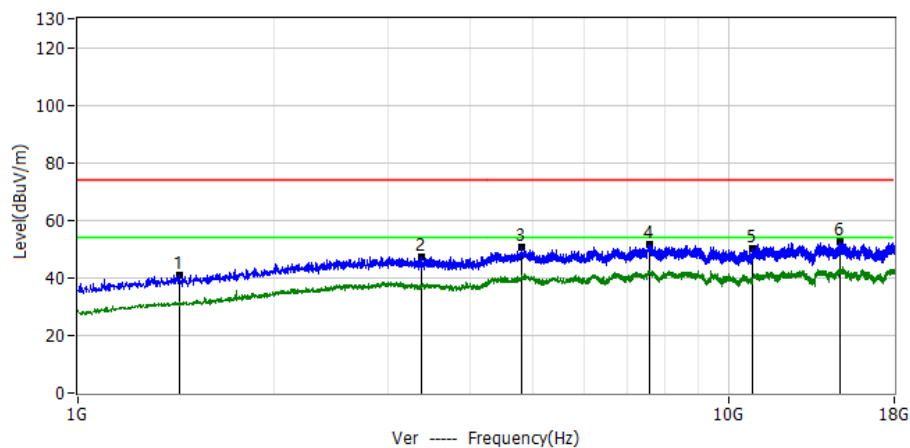


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1429.2000	62.04	-20.93	41.11	74.00	-32.89	PK	Ver
2*	3367.2000	55.39	-8.26	47.13	74.00	-26.87	PK	Ver
3*	4818.6000	56.27	-5.86	50.41	74.00	-23.59	PK	Ver
4*	7576.9000	58.66	-7.14	51.52	74.00	-22.48	PK	Ver
5*	10919.5000	55.56	-5.28	50.28	74.00	-23.72	PK	Ver
6*	14818.9000	57.47	-4.72	52.75	74.00	-21.25	PK	Ver



Project: LGT25C081	Test Engineer: LiuH
EUT: Frost-free refrigerator	Temperature: 25°C
M/N: HRM260P9TSE	Humidity: 55%RH
Test Voltage: AC 110V/60Hz	Test Data: 2025-05-17
Test Mode: 802.11b 2462(ANT2)	
Note:	

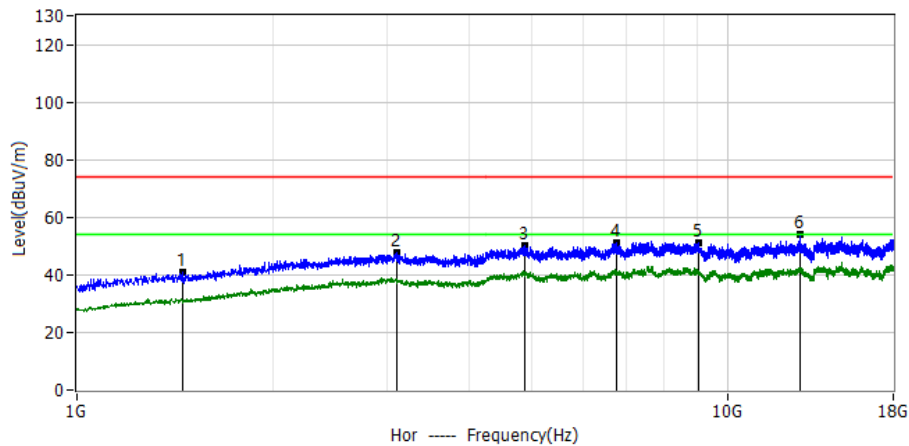

No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1450.5000	61.57	-20.77	40.80	74.00	-33.20	PK	Hor
2*	3103.7000	55.70	-8.16	47.54	74.00	-26.46	PK	Hor
3*	4880.2000	55.90	-5.91	49.99	74.00	-24.01	PK	Hor
4*	6750.2000	58.51	-7.29	51.22	74.00	-22.78	PK	Hor
5*	9038.9000	58.07	-7.01	51.06	74.00	-22.94	PK	Hor
6*	12910.6000	58.82	-4.88	53.94	74.00	-20.06	PK	Hor

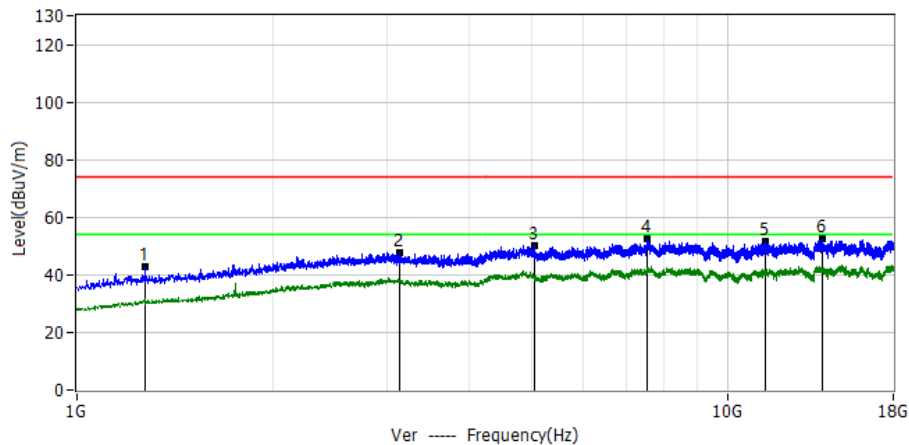

No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1272.0000	65.39	-22.42	42.97	74.00	-31.03	PK	Ver
2*	3129.2000	56.08	-8.17	47.91	74.00	-26.09	PK	Ver
3*	5043.9000	56.28	-6.18	50.10	74.00	-23.90	PK	Ver
4*	7538.6000	59.71	-7.07	52.64	74.00	-21.36	PK	Ver
5*	11416.7000	56.53	-5.03	51.50	74.00	-22.50	PK	Ver
6*	13977.4000	56.67	-3.99	52.68	74.00	-21.32	PK	Ver

Remark:


In frequency ranges 18~25GHz no any other harmonic emissions detected which are tested to compliance with the limit. No recording in the test report. No any other emissions level which are attenuated less than 20dB below the limit. No recording in the test report.




3.2.7 TEST RESULTS(Band edge Requirements)

Note:1. All mode has been tested, only shown the worst case data,
2. The peak value is less than the AV limit, so no AV data is displayed.

Project: LGT25C081	Test Engineer: LiuH
EUT: Frost-free refrigerator	Temperature: 25°C
M/N: HRM260P9TSE	Humidity: 55%RH
Test Voltage: AC 110V/60Hz	Test Data: 2025-05-17
Test Mode: 802.11b 2412(ANT2)	
Note:	

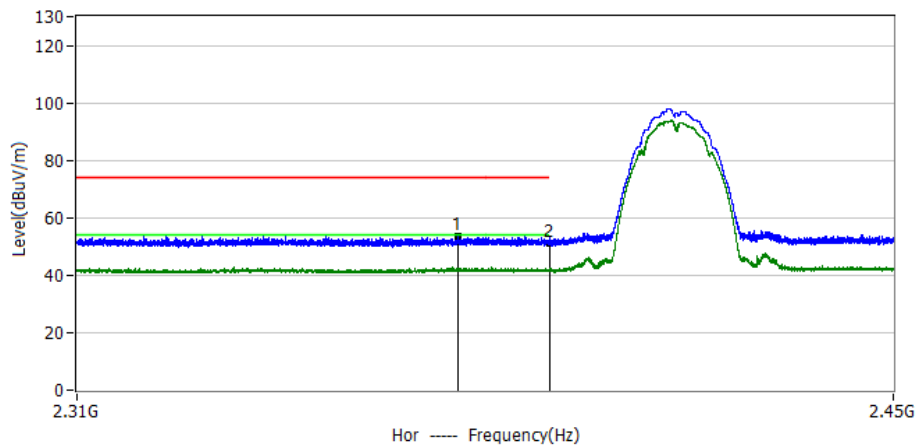


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2374.3000	17.39	36.37	53.76	74.00	-20.24	PK	Hor
2*	2390.0000	14.64	36.46	51.10	74.00	-22.90	PK	Hor

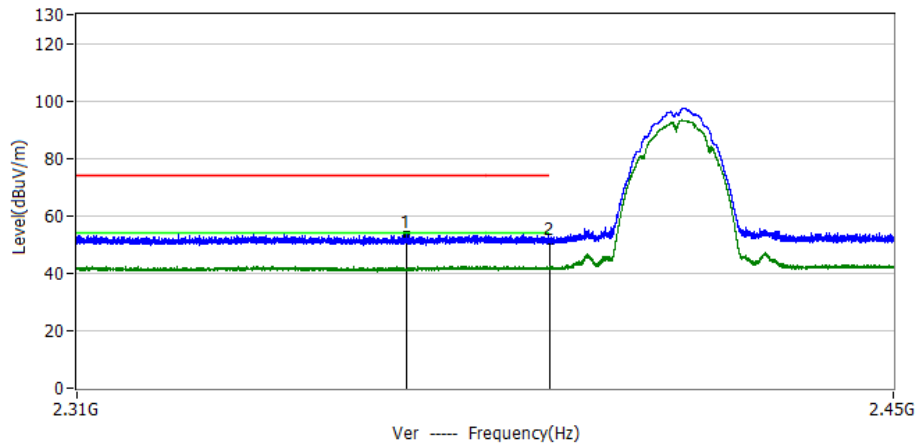


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2365.6000	17.21	36.32	53.53	74.00	-20.47	PK	Ver
2*	2390.0000	14.54	36.46	51.00	74.00	-23.00	PK	Ver



Project: LGT25C081	Test Engineer: LiuH
EUT: Frost-free refrigerator	Temperature: 25°C
M/N: HRM260P9TSE	Humidity: 55%RH
Test Voltage: AC 110V/60Hz	Test Data: 2025-05-17
Test Mode: 802.11b 2462(ANT2)	
Note:	

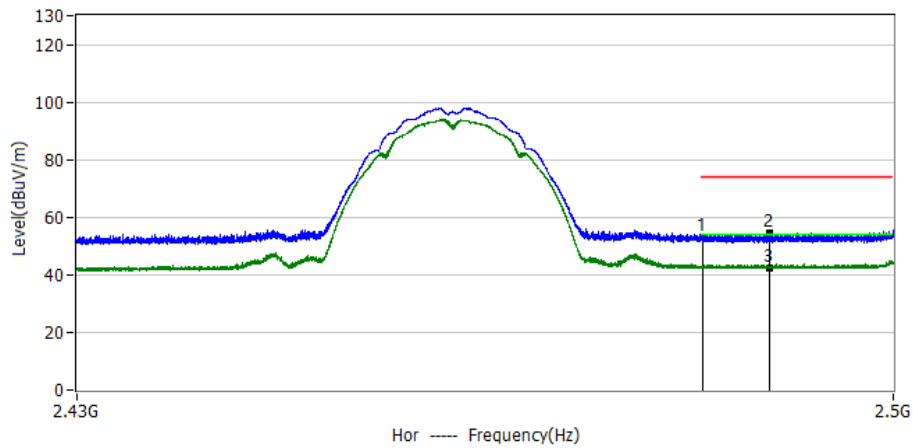

No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2483.5000	15.70	37.20	52.90	74.00	-21.10	PK	Hor
2*	2489.2000	17.25	37.26	54.51	74.00	-19.49	PK	Hor
3*	2489.2000	5.14	37.26	42.40	54.00	-11.60	AV	Hor

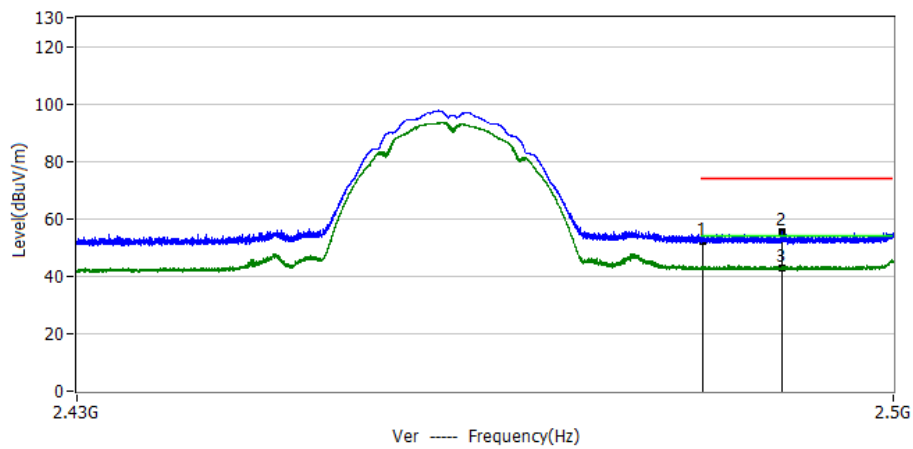

No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2483.5000	15.00	37.20	52.20	74.00	-21.80	PK	Ver
2*	2490.3000	18.14	37.28	55.42	74.00	-18.58	PK	Ver
3*	2490.3000	5.42	37.28	42.70	54.00	-11.30	AV	Ver



4. CONDUCTED SPURIOUS & BAND EDGE EMISSION

4.1 LIMIT

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

4.2 TEST PROCEDURE

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	30 MHz to 10th carrier harmonic
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

For Band edge

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	Lower Band Edge: 2300 to 2432 MHz Upper Band Edge: 2442 to 2500 MHz
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

4.3 DEVIATION FROM STANDARD

No deviation.

4.4 TEST SETUP



The EUT is connected to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

4.5 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.

4.6 TEST RESULTS

For the measurement records, refer to the appendix I.



5. POWER SPECTRAL DENSITY TEST

5.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(e)	Power Spectral Density	≤ 8 dBm (RBW ≥ 3 KHz)	2400-2483.5	PASS

5.2 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the $100 \text{ kHz} \geq \text{RBW} \geq 3 \text{ kHz}$.
4. Set the $\text{VBW} \geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP



5.5 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.

5.6 TEST RESULTS

For the measurement records, refer to the appendix I.



6. BANDWIDTH TEST

6.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

6.2 TEST PROCEDURE

Connect the UUT to the spectrum analyser and use the following settings:


Center Frequency	The centre frequency of the channel under test
Detector	Peak
RBW	For 6 dB Bandwidth: 100KHz For 99% Bandwidth: 1% to 5% of the occupied bandwidth
VBW	For 6 dB Bandwidth: $\geq 3 \times \text{RBW}$ For 99% Bandwidth: approximately $3 \times \text{RBW}$
Trace	Max hold
Sweep	Auto

Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB and 99% relative to the maximum level measured in the fundamental emission.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP

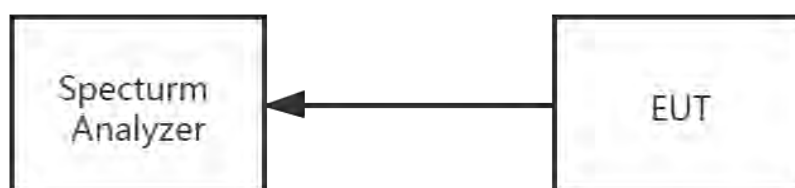

6.5 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.

6.6 TEST RESULTS

For the measurement records, refer to the appendix I.



7. PEAK OUTPUT POWER TEST

7.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Output Power	1 watt or 30dBm	2400-2483.5	PASS

7.2 TEST PROCEDURE

One of the following procedures may be used to determine the maximum peak conducted output power of a DTS EUT.

RBW $\geq$ DTS bandwidth

The following procedure shall be used when an instrument with a resolution bandwidth that is greater than the DTS bandwidth is available to perform the measurement:

- Set the RBW $\geq$ DTS bandwidth.
- Set VBW $\geq$ [3 $\times$ RBW].
- Set span $\geq$ [3 $\times$ RBW].
- Sweep time = auto couple.
- Detector = peak.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use peak marker function to determine the peak amplitude level.

Integrated band power method:

The following procedure can be used when the maximum available RBW of the instrument is less than the

DTS bandwidth:

- Set the RBW = 1 MHz.
- Set the VBW $\geq$ [3 $\times$ RBW].
- Set the span $\geq$ [1.5 $\times$ DTS bandwidth].
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some instruments, this may require a manual override to select the peak detector). If the instrument does not have a band power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the DTS channel bandwidth.


PKPM1 Peak power meter method:

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP



7.5 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.

7.6 TEST RESULTS

For the measurement records, refer to the appendix I.



8. ANTENNA REQUIREMENT

8.1 STANDARD REQUIREMENT

15.203&RSS Gen requirement: For intentional device, according to 15.203&RSS Gen: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

8.2 EUT ANTENNA


The EUT antenna is Metal Antenna. It comply with the standard requirement.





APPENDIX I - TEST RESULTS


Duty Cycle


Condition	Mode	Frequency (MHz)	Antenna	On Time (ms)	Period (ms)	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	b	2412	Ant1	0.937	0.984	95.22	0.21	1.07
NVNT	b	2437	Ant1	0.937	0.983	95.32	0.21	1.07
NVNT	b	2462	Ant1	0.937	0.984	95.22	0.21	1.07
NVNT	b	2412	Ant2	0.937	0.984	95.22	0.21	1.07
NVNT	b	2437	Ant2	0.937	0.984	95.22	0.21	1.07
NVNT	b	2462	Ant2	0.937	0.984	95.22	0.21	1.07
NVNT	g	2412	Ant1	1.393	1.446	96.33	0.16	0.72
NVNT	g	2437	Ant1	1.392	1.446	96.27	0.17	0.72
NVNT	g	2462	Ant1	1.392	1.446	96.27	0.17	0.72
NVNT	g	2412	Ant2	1.393	1.446	96.33	0.16	0.72
NVNT	g	2437	Ant2	1.393	1.446	96.33	0.16	0.72
NVNT	g	2462	Ant2	1.392	1.446	96.27	0.17	0.72
NVNT	n20	2412	Ant1	1.288	1.342	95.98	0.18	0.78
NVNT	n20	2437	Ant1	1.288	1.341	96.05	0.18	0.78
NVNT	n20	2462	Ant1	1.288	1.342	95.98	0.18	0.78
NVNT	n20	2412	Ant2	1.288	1.342	95.98	0.18	0.78
NVNT	n20	2437	Ant2	1.288	1.342	95.98	0.18	0.78
NVNT	n20	2462	Ant2	1.288	1.342	95.98	0.18	0.78
NVNT	n40	2422	Ant1	0.636	0.689	92.31	0.35	1.57
NVNT	n40	2437	Ant1	0.636	0.689	92.31	0.35	1.57
NVNT	n40	2452	Ant1	0.636	0.689	92.31	0.35	1.57
NVNT	n40	2422	Ant2	0.636	0.689	92.31	0.35	1.57
NVNT	n40	2437	Ant2	0.636	0.689	92.31	0.35	1.57
NVNT	n40	2452	Ant2	0.636	0.689	92.31	0.35	1.57

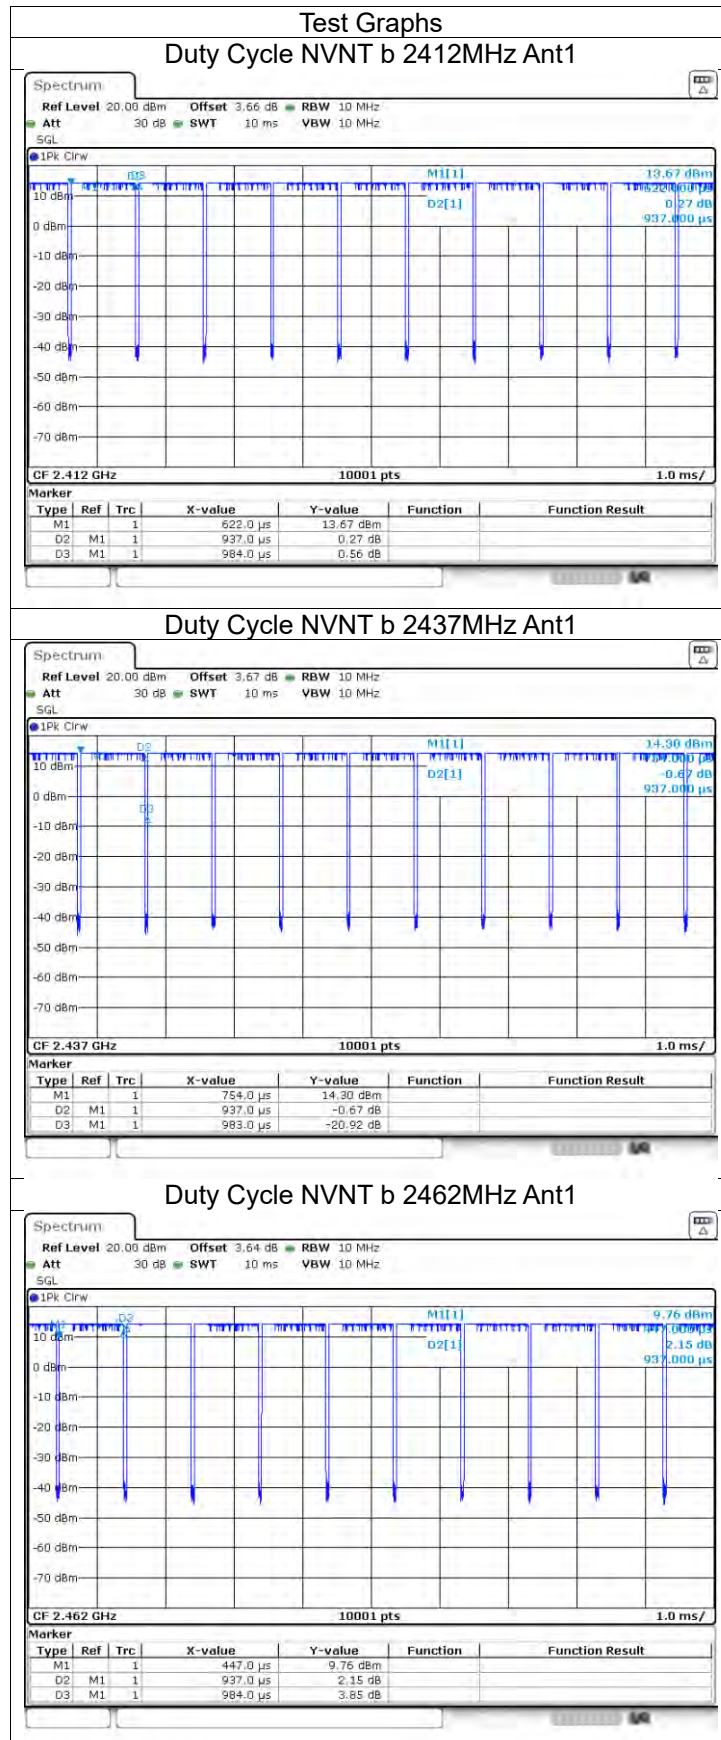


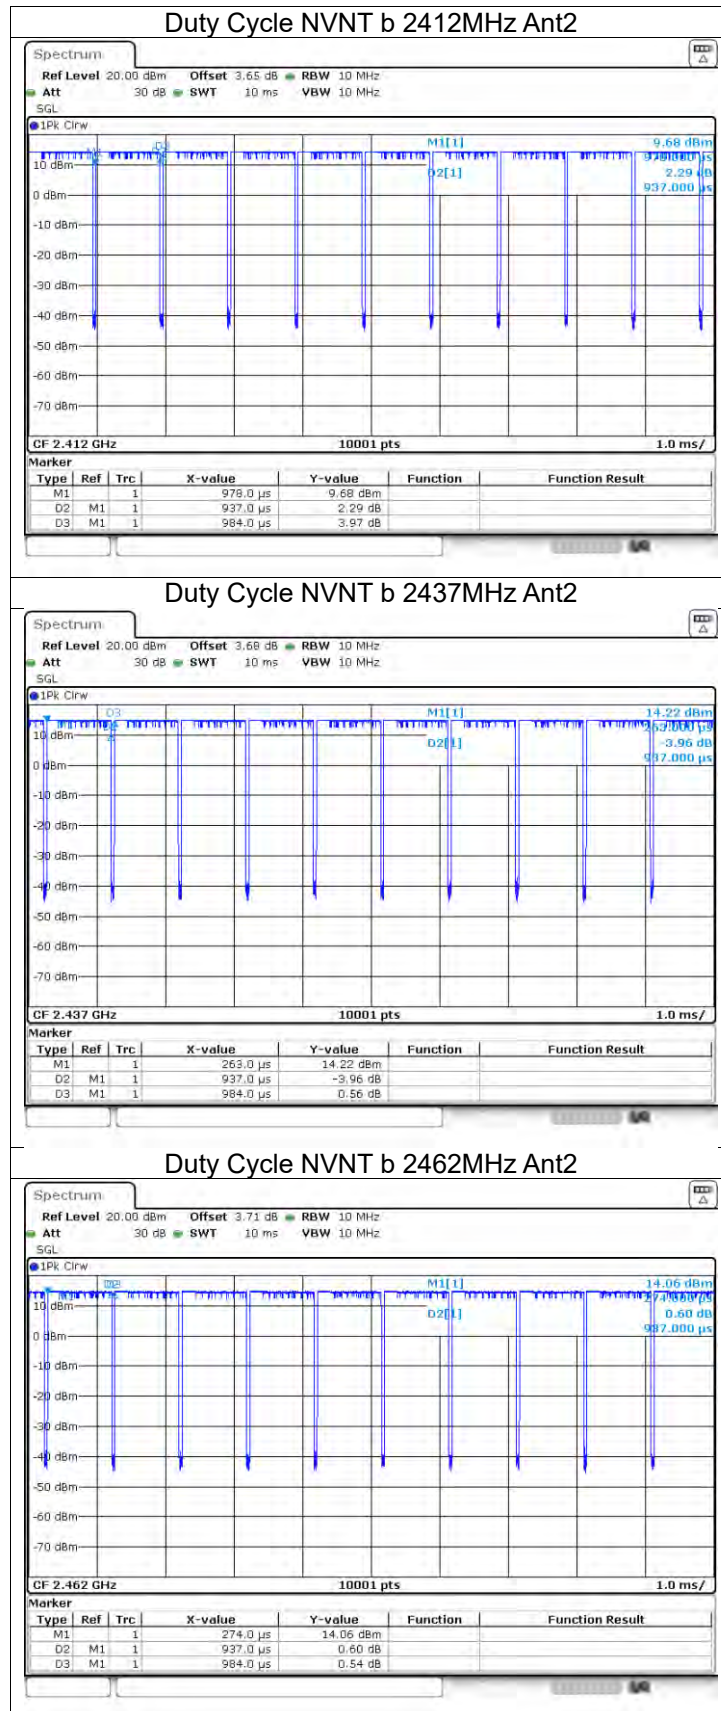


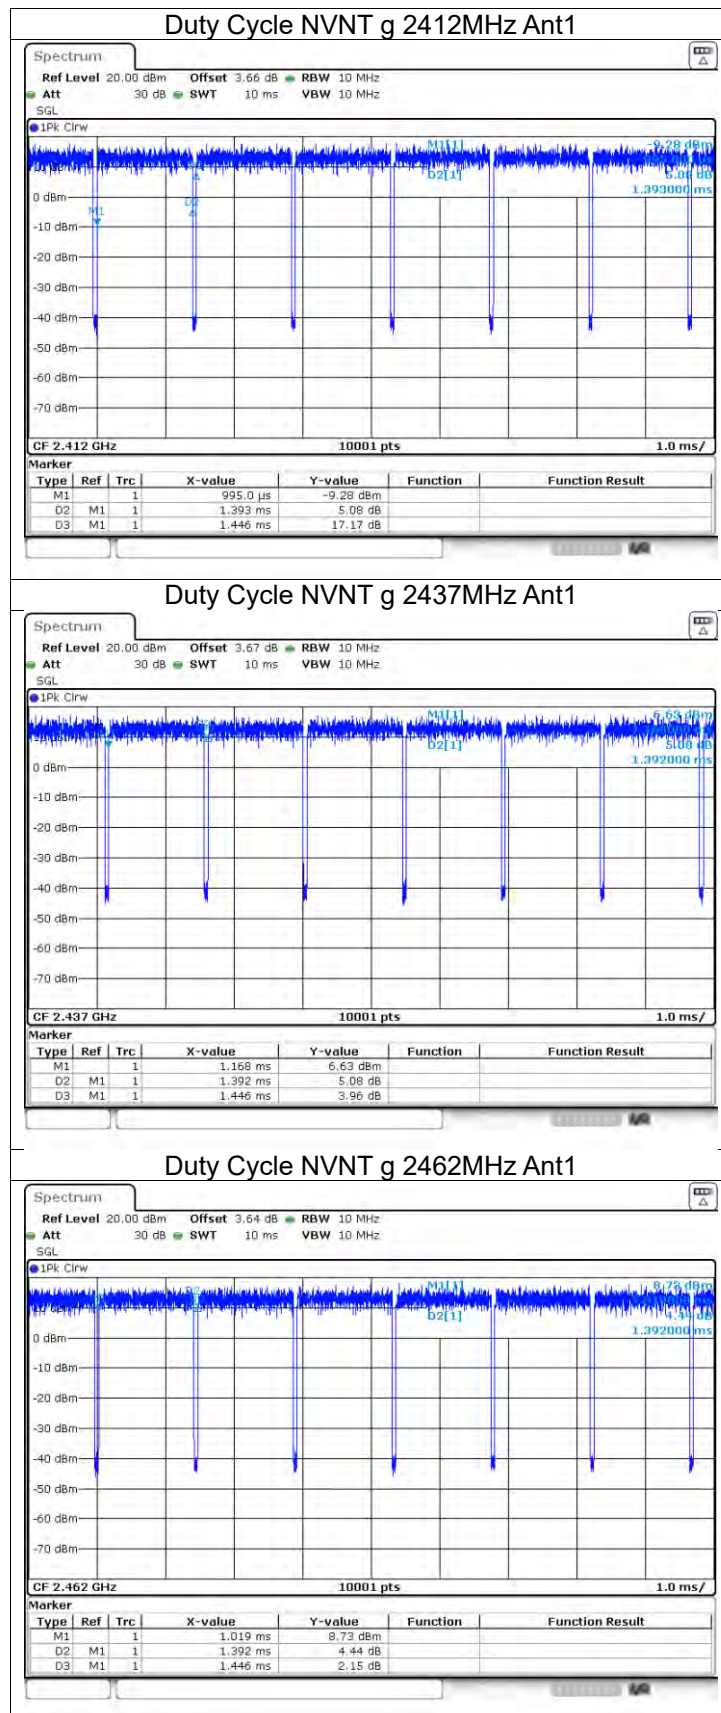

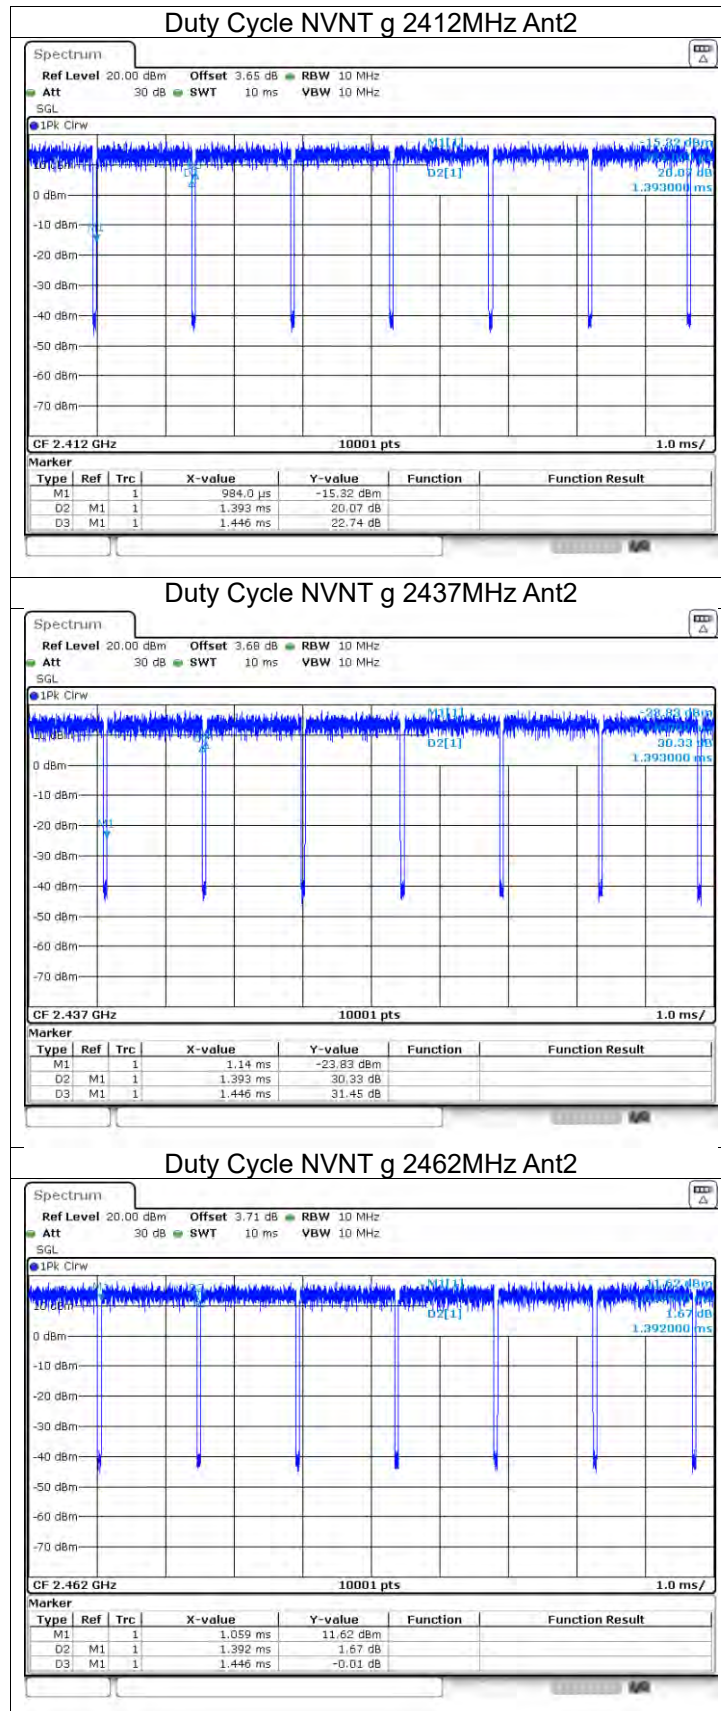

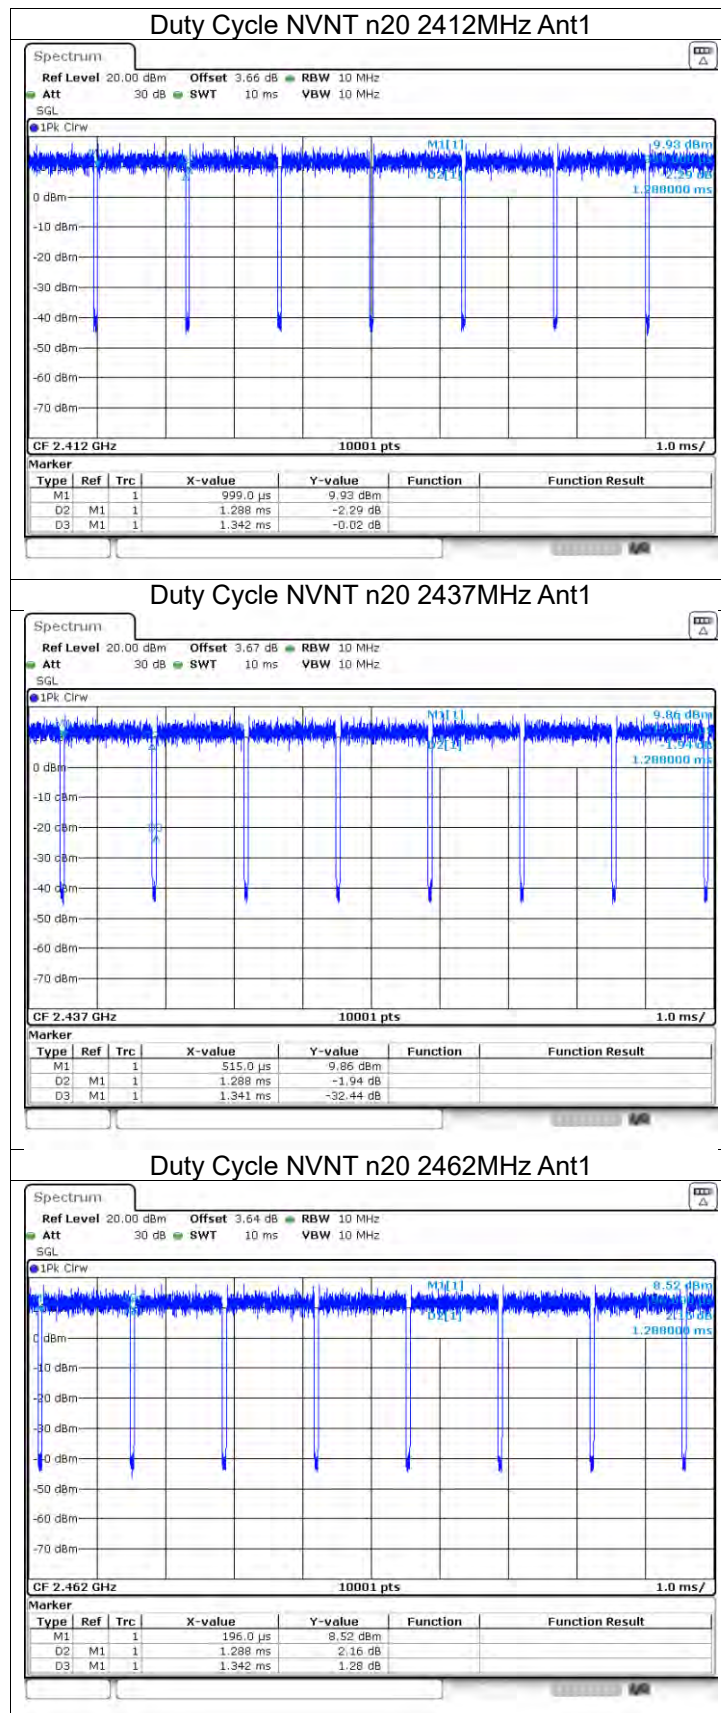


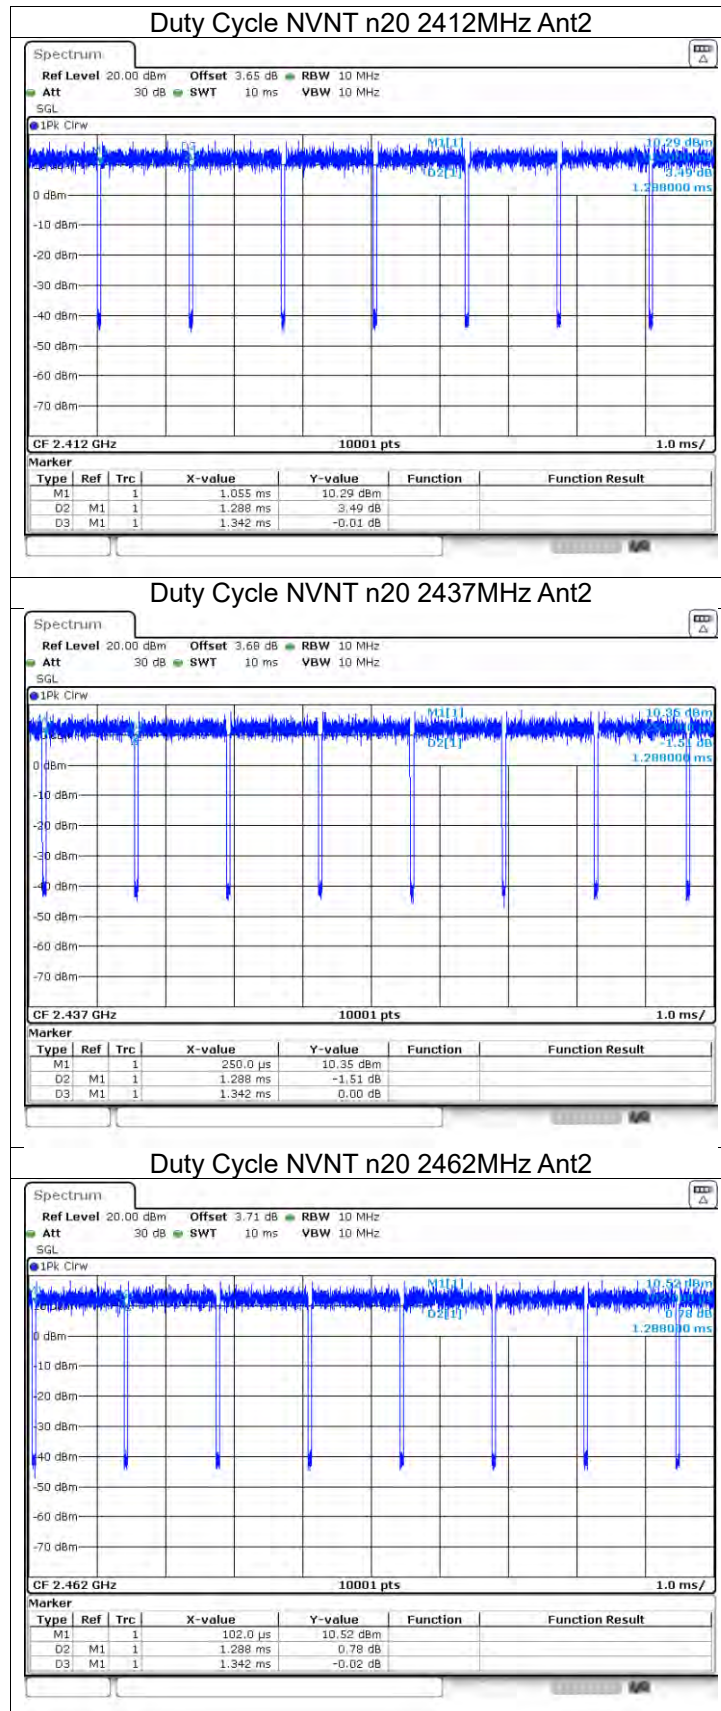

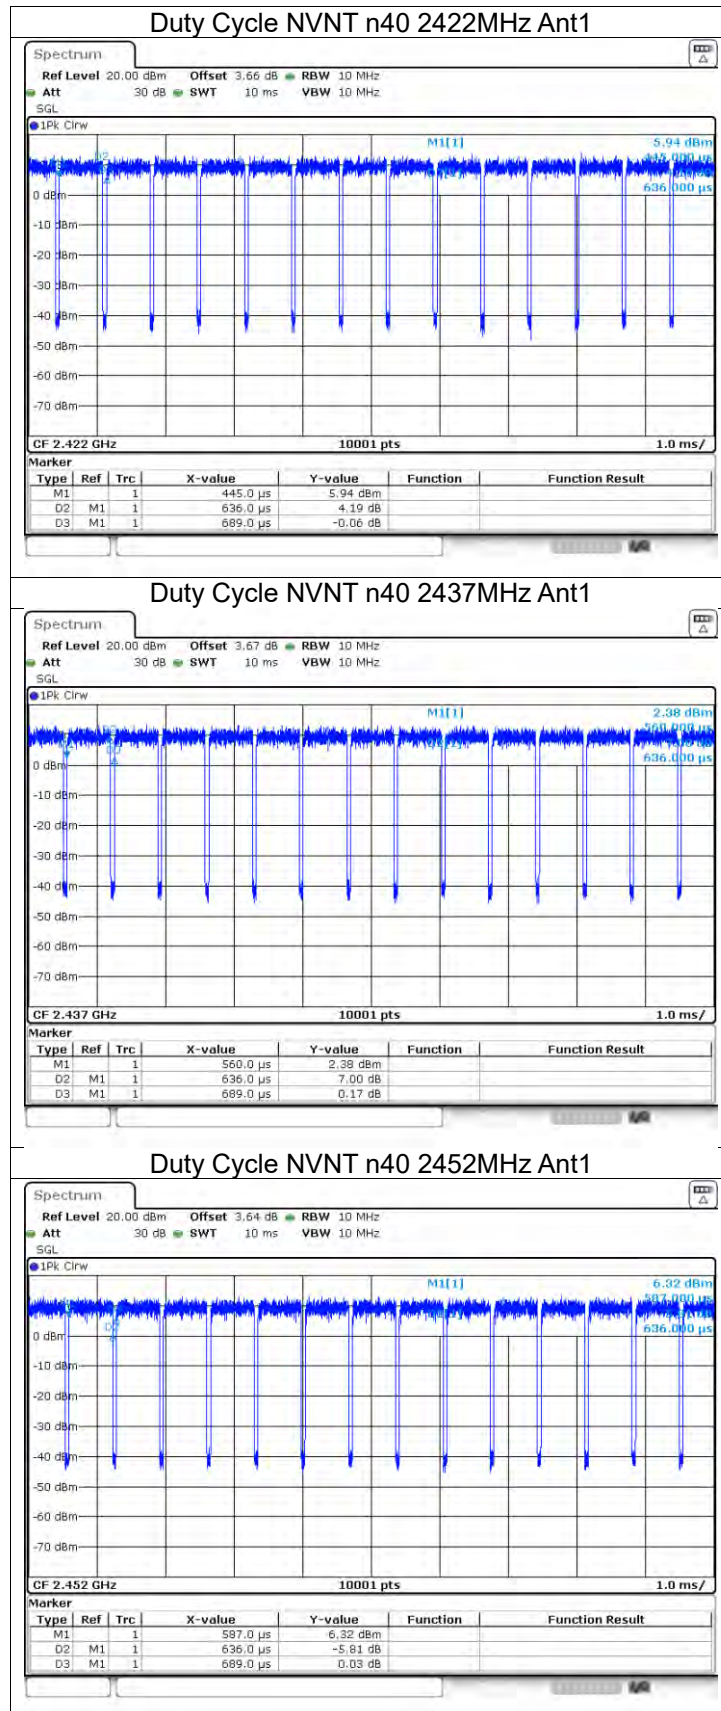





Duty Cycle NVNT n40 2422MHz Ant2

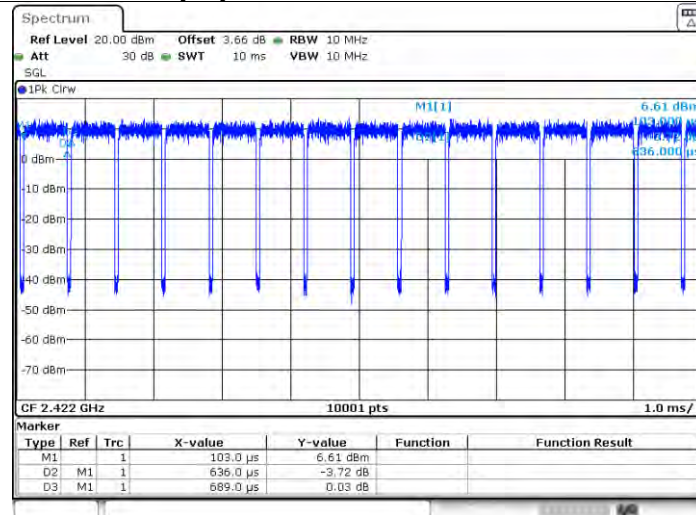

Duty Cycle NVNT n40 2437MHz Ant2

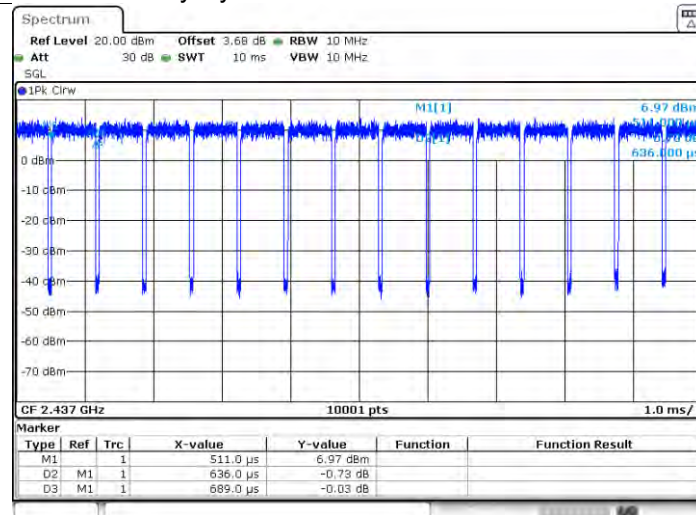

Duty Cycle NVNT n40 2452MHz Ant2

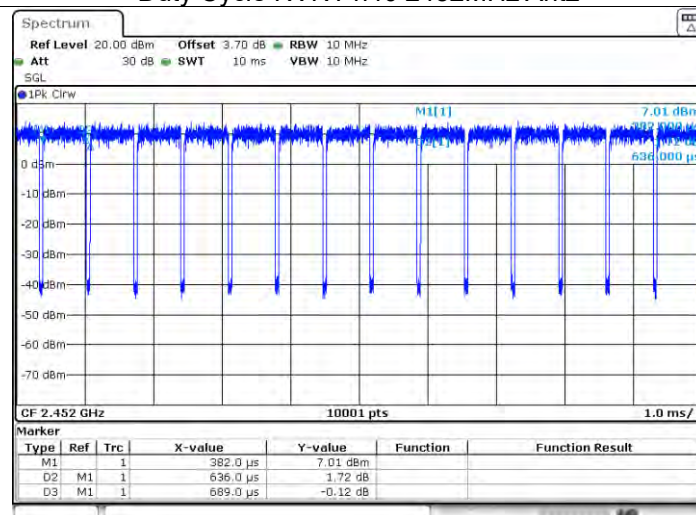




Maximum Peak Conducted Output Power


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	b	2412	Ant1	18.13	30	Pass
NVNT	b	2437	Ant1	18.28	30	Pass
NVNT	b	2462	Ant1	18.05	30	Pass
NVNT	b	2412	Ant2	18.17	30	Pass
NVNT	b	2437	Ant2	18.71	30	Pass
NVNT	b	2462	Ant2	18.6	30	Pass
NVNT	g	2412	Ant1	17.45	30	Pass
NVNT	g	2437	Ant1	17.11	30	Pass
NVNT	g	2462	Ant1	17.33	30	Pass
NVNT	g	2412	Ant2	17.6	30	Pass
NVNT	g	2437	Ant2	17.74	30	Pass
NVNT	g	2462	Ant2	17.84	30	Pass
NVNT	n20	2412	Ant1	16.41	30	Pass
NVNT	n20	2437	Ant1	16.37	30	Pass
NVNT	n20	2462	Ant1	16.41	30	Pass
NVNT	n20	2412	Ant2	16.54	30	Pass
NVNT	n20	2437	Ant2	16.92	30	Pass
NVNT	n20	2462	Ant2	16.96	30	Pass
NVNT	n20	2412	Ant1	13.44	30	Pass
NVNT	n20	2412	Ant2	14.05	30	Pass
NVNT	n20	2412	MIMO	16.77	30	Pass
NVNT	n20	2437	Ant1	13.37	30	Pass
NVNT	n20	2437	Ant2	14.3	30	Pass
NVNT	n20	2437	MIMO	16.87	30	Pass
NVNT	n20	2462	Ant1	13.41	30	Pass
NVNT	n20	2462	Ant2	14.45	30	Pass
NVNT	n20	2462	MIMO	16.97	30	Pass
NVNT	n40	2422	Ant1	16.3	30	Pass
NVNT	n40	2437	Ant1	16.19	30	Pass
NVNT	n40	2452	Ant1	16.13	30	Pass
NVNT	n40	2422	Ant2	16.6	30	Pass
NVNT	n40	2437	Ant2	16.76	30	Pass
NVNT	n40	2452	Ant2	16.86	30	Pass
NVNT	n40	2422	Ant1	13	30	Pass
NVNT	n40	2422	Ant2	13.82	30	Pass
NVNT	n40	2422	MIMO	16.44	30	Pass
NVNT	n40	2437	Ant1	13.21	30	Pass
NVNT	n40	2437	Ant2	14.09	30	Pass
NVNT	n40	2437	MIMO	16.68	30	Pass
NVNT	n40	2452	Ant1	13.31	30	Pass
NVNT	n40	2452	Ant2	14.1	30	Pass
NVNT	n40	2452	MIMO	16.73	30	Pass





Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	b	2412	Ant1	13.25
NVNT	b	2437	Ant1	13.274
NVNT	b	2462	Ant1	13.229
NVNT	b	2412	Ant2	13.226
NVNT	b	2437	Ant2	13.226
NVNT	b	2462	Ant2	13.286
NVNT	g	2412	Ant1	16.435
NVNT	g	2437	Ant1	16.456
NVNT	g	2462	Ant1	16.462
NVNT	g	2412	Ant2	16.438
NVNT	g	2437	Ant2	16.444
NVNT	g	2462	Ant2	16.444
NVNT	n20	2412	Ant1	17.542
NVNT	n20	2437	Ant1	17.551
NVNT	n20	2462	Ant1	17.551
NVNT	n20	2412	Ant2	17.548
NVNT	n20	2437	Ant2	17.554
NVNT	n20	2462	Ant2	17.551
NVNT	n40	2422	Ant1	36.026
NVNT	n40	2437	Ant1	35.954
NVNT	n40	2452	Ant1	36.014
NVNT	n40	2422	Ant2	36.032
NVNT	n40	2437	Ant2	35.948
NVNT	n40	2452	Ant2	36.002

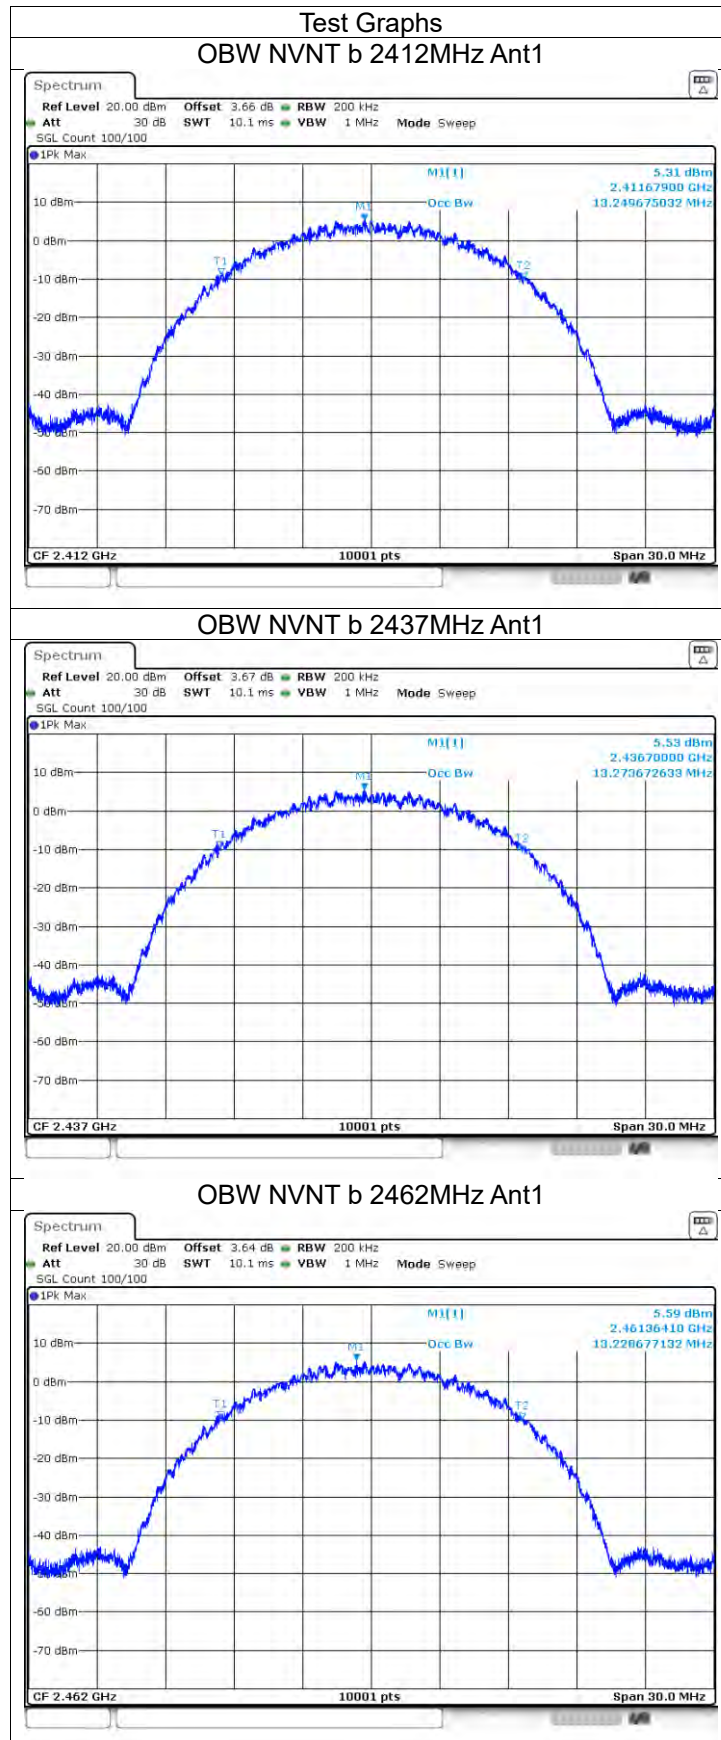


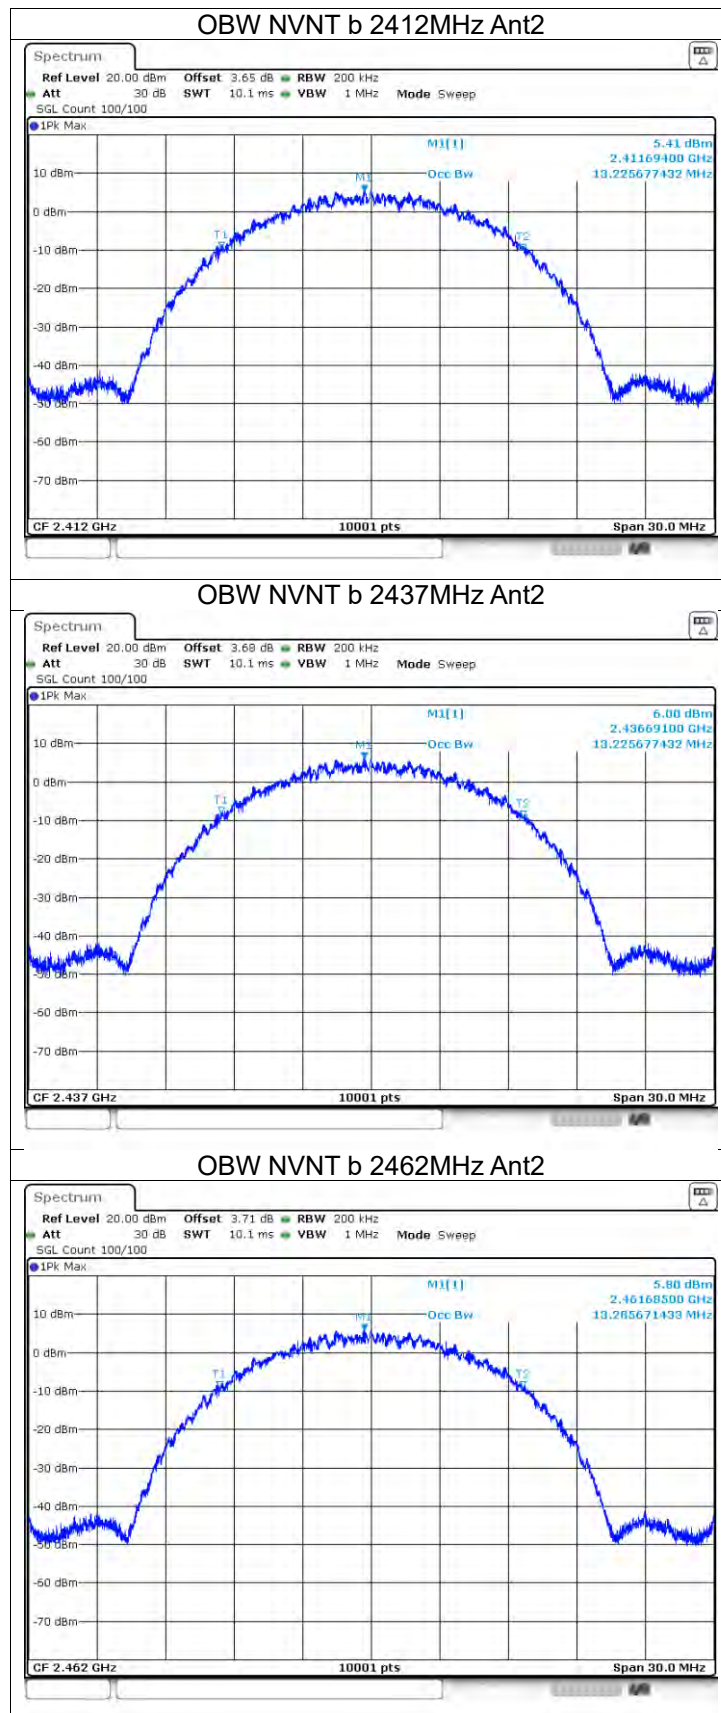

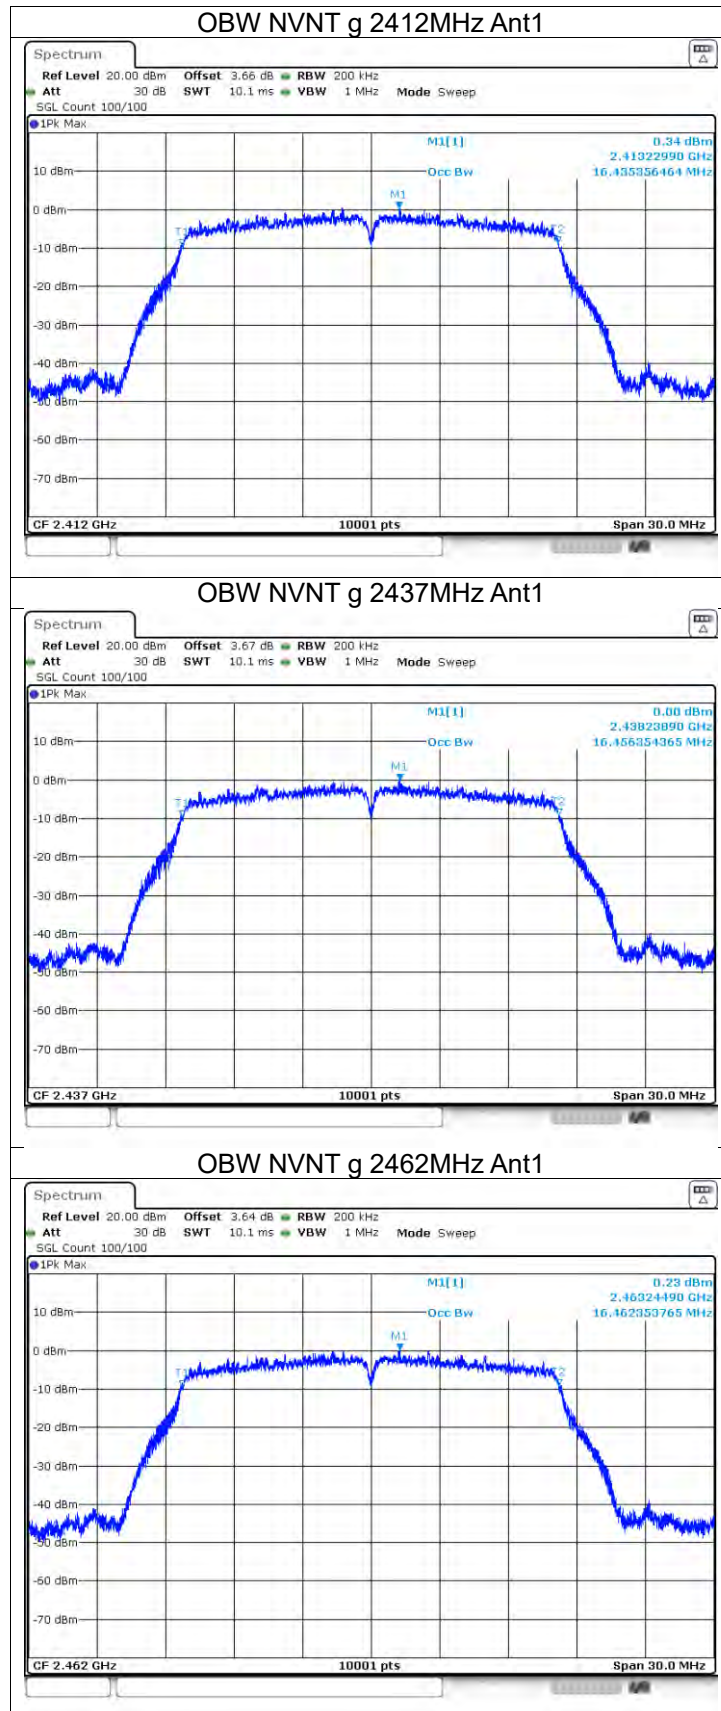

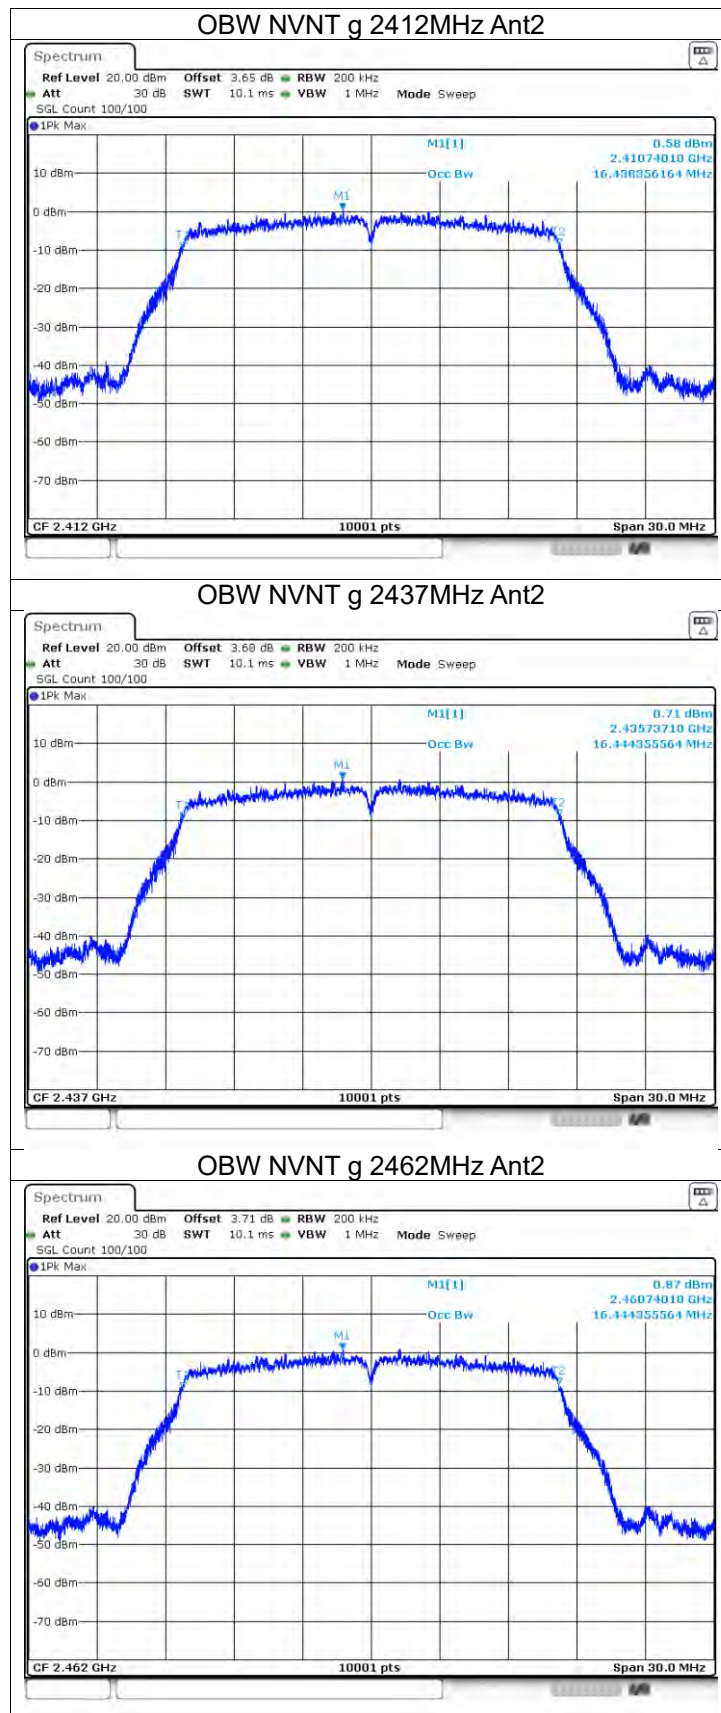


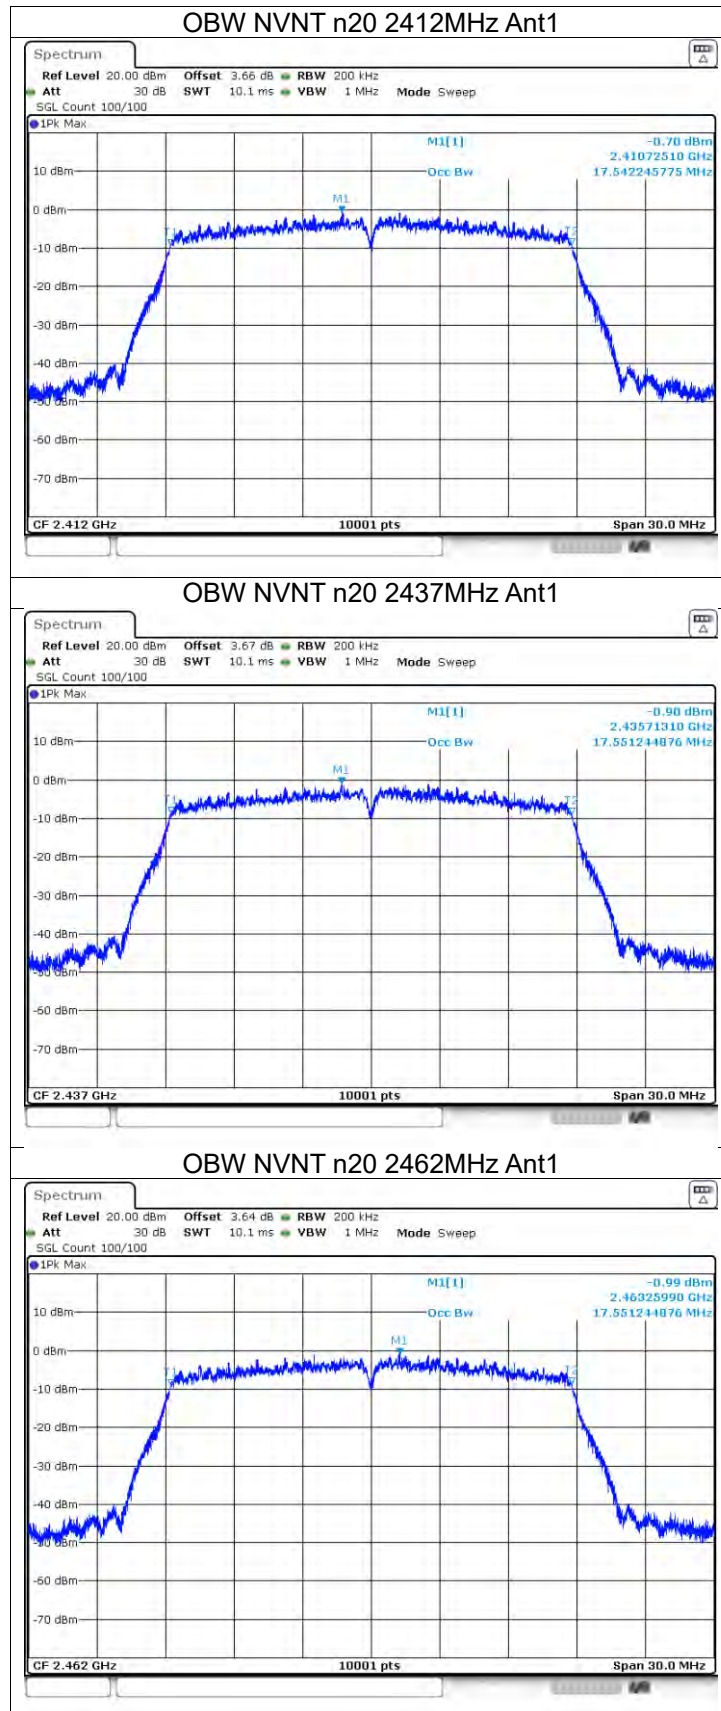

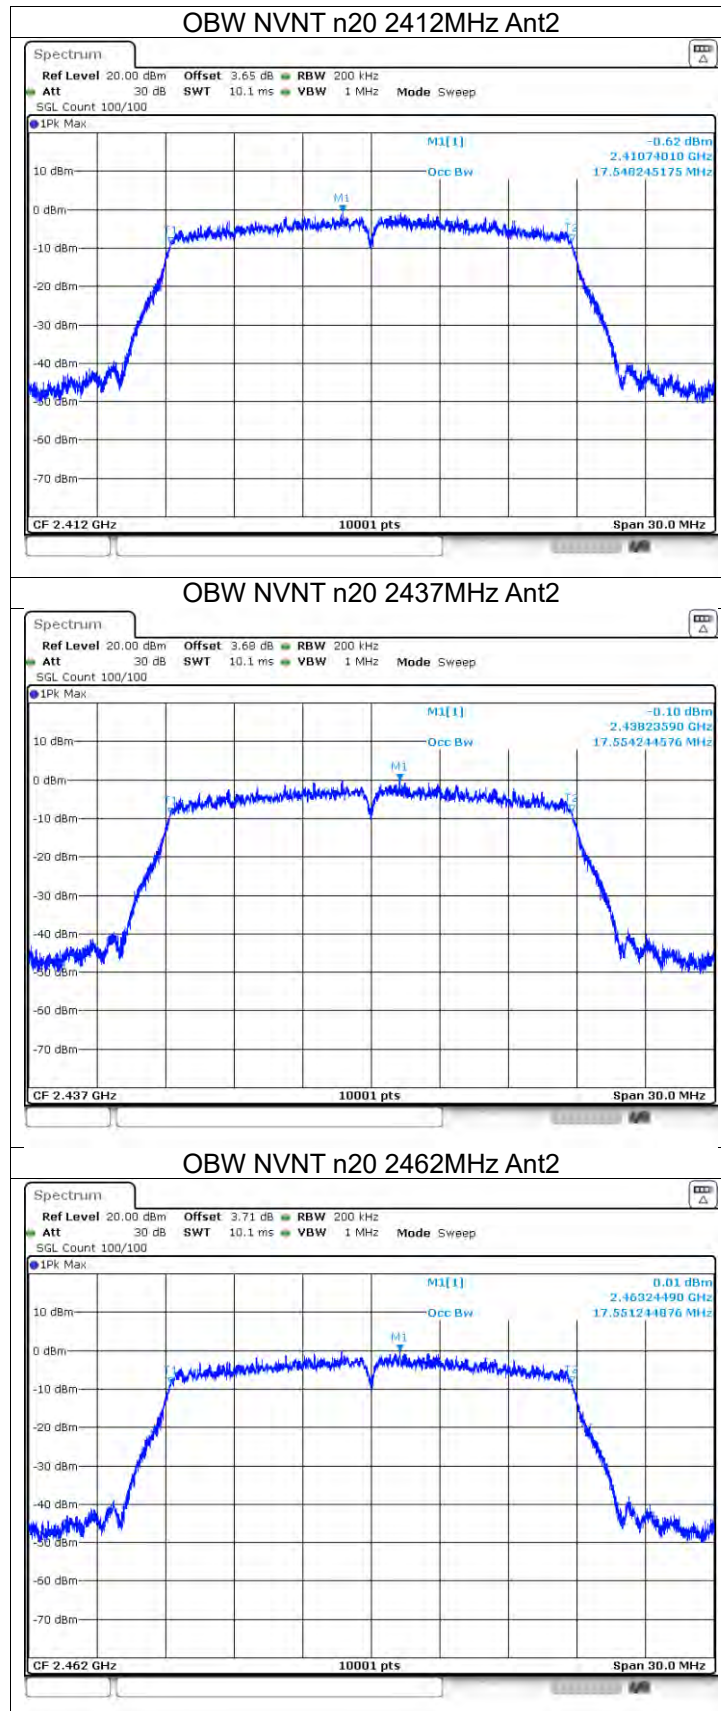





OBW NVNT n40 2422MHz Ant1

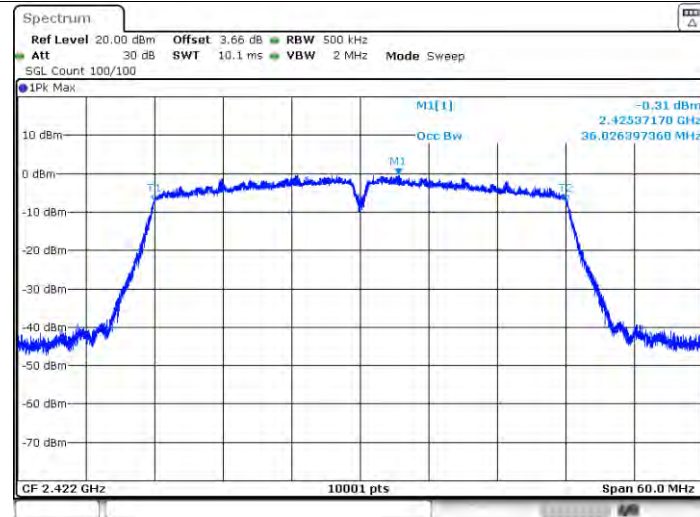


OBW NVNT n40 2437MHz Ant1

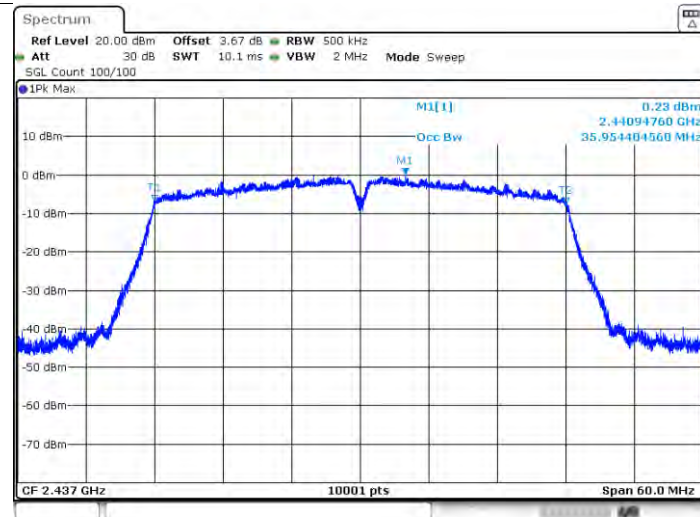

OBW NVNT n40 2452MHz Ant1

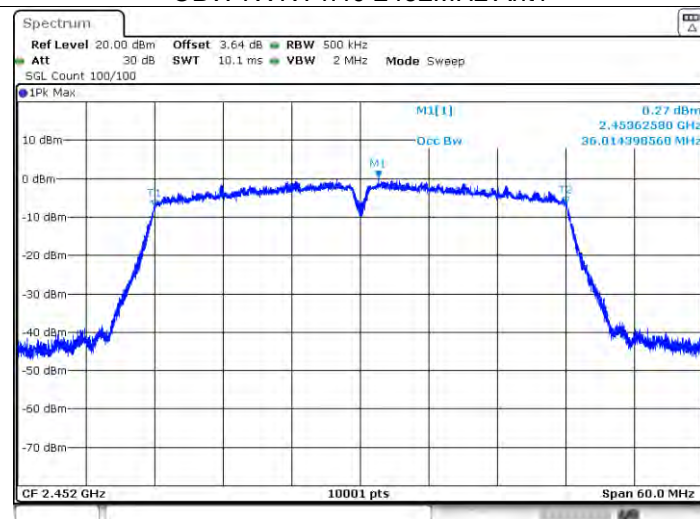


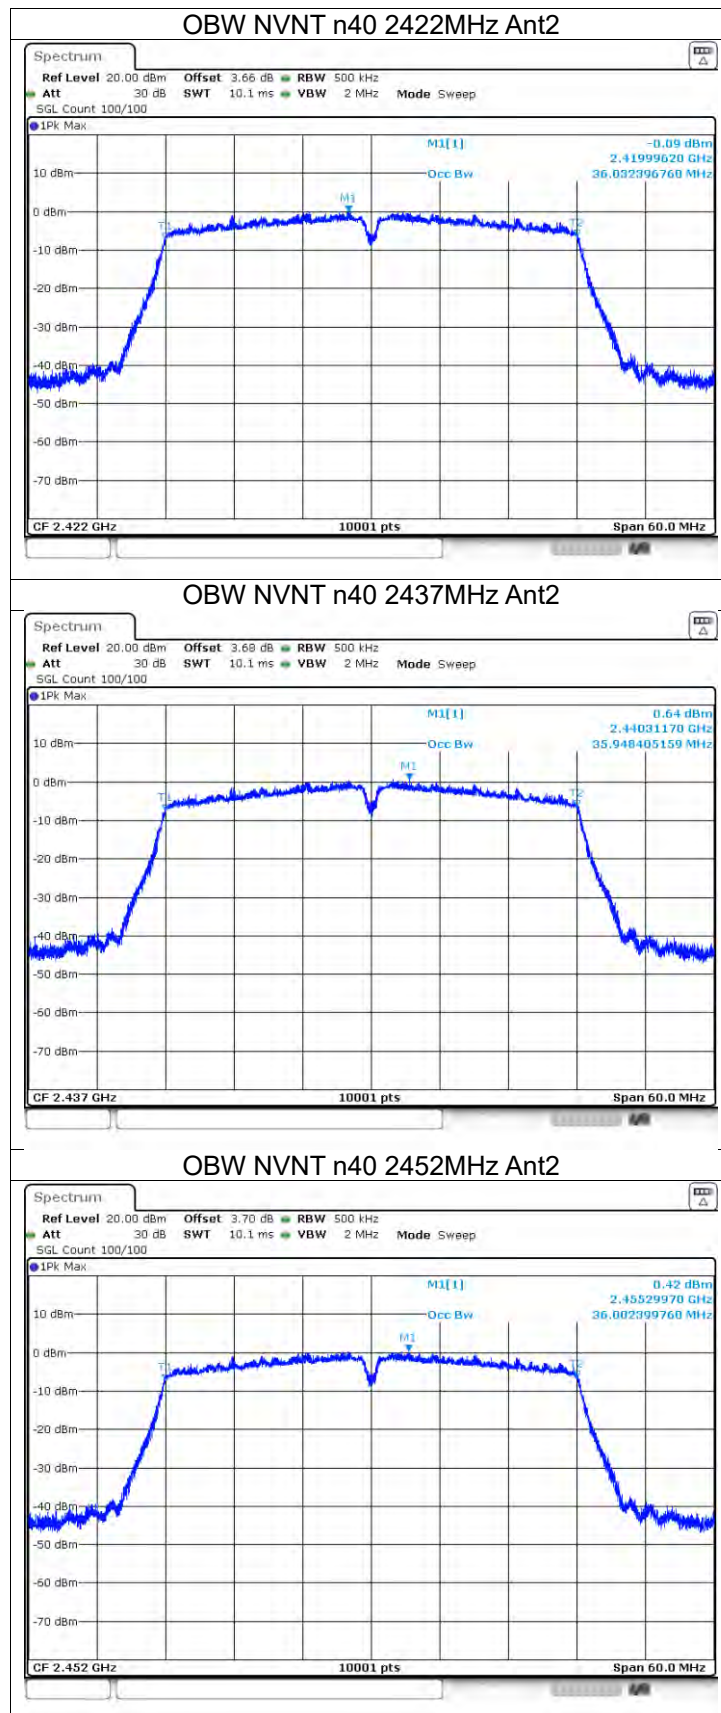






Maximum Power Spectral Density Level


Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	b	2412	Ant1	-10.36	8	Pass
NVNT	b	2437	Ant1	-10.28	8	Pass
NVNT	b	2462	Ant1	-10.35	8	Pass
NVNT	b	2412	Ant2	-10.29	8	Pass
NVNT	b	2437	Ant2	-9.78	8	Pass
NVNT	b	2462	Ant2	-9.94	8	Pass
NVNT	g	2412	Ant1	-17.18	8	Pass
NVNT	g	2437	Ant1	-16.15	8	Pass
NVNT	g	2462	Ant1	-17.4	8	Pass
NVNT	g	2412	Ant2	-16.36	8	Pass
NVNT	g	2437	Ant2	-16.51	8	Pass
NVNT	g	2462	Ant2	-16.01	8	Pass
NVNT	n20	2412	Ant1	-17.35	8	Pass
NVNT	n20	2437	Ant1	-18.35	8	Pass
NVNT	n20	2462	Ant1	-16.46	8	Pass
NVNT	n20	2412	Ant2	-17.87	8	Pass
NVNT	n20	2437	Ant2	-17.09	8	Pass
NVNT	n20	2462	Ant2	-17.76	8	Pass
NVNT	n20	2412	Ant1	-21.26	8	Pass
NVNT	n20	2412	Ant2	-19.55	8	Pass
NVNT	n20	2412	MIMO	-17.31	8	Pass
NVNT	n20	2437	Ant1	-21.45	8	Pass
NVNT	n20	2437	Ant2	-20.13	8	Pass
NVNT	n20	2437	MIMO	-17.73	8	Pass
NVNT	n20	2462	Ant1	-19.83	8	Pass
NVNT	n20	2462	Ant2	-19.46	8	Pass
NVNT	n20	2462	MIMO	-16.63	8	Pass
NVNT	n40	2422	Ant1	-20.16	8	Pass
NVNT	n40	2437	Ant1	-19.21	8	Pass
NVNT	n40	2452	Ant1	-20	8	Pass
NVNT	n40	2422	Ant2	-20.07	8	Pass
NVNT	n40	2437	Ant2	-19.56	8	Pass
NVNT	n40	2452	Ant2	-19.41	8	Pass
NVNT	n40	2422	Ant1	-22.65	8	Pass
NVNT	n40	2422	Ant2	-23.4	8	Pass
NVNT	n40	2422	MIMO	-20	8	Pass
NVNT	n40	2437	Ant1	-23.48	8	Pass
NVNT	n40	2437	Ant2	-23.25	8	Pass
NVNT	n40	2437	MIMO	-20.35	8	Pass
NVNT	n40	2452	Ant1	-23.6	8	Pass
NVNT	n40	2452	Ant2	-22.59	8	Pass
NVNT	n40	2452	MIMO	-20.06	8	Pass

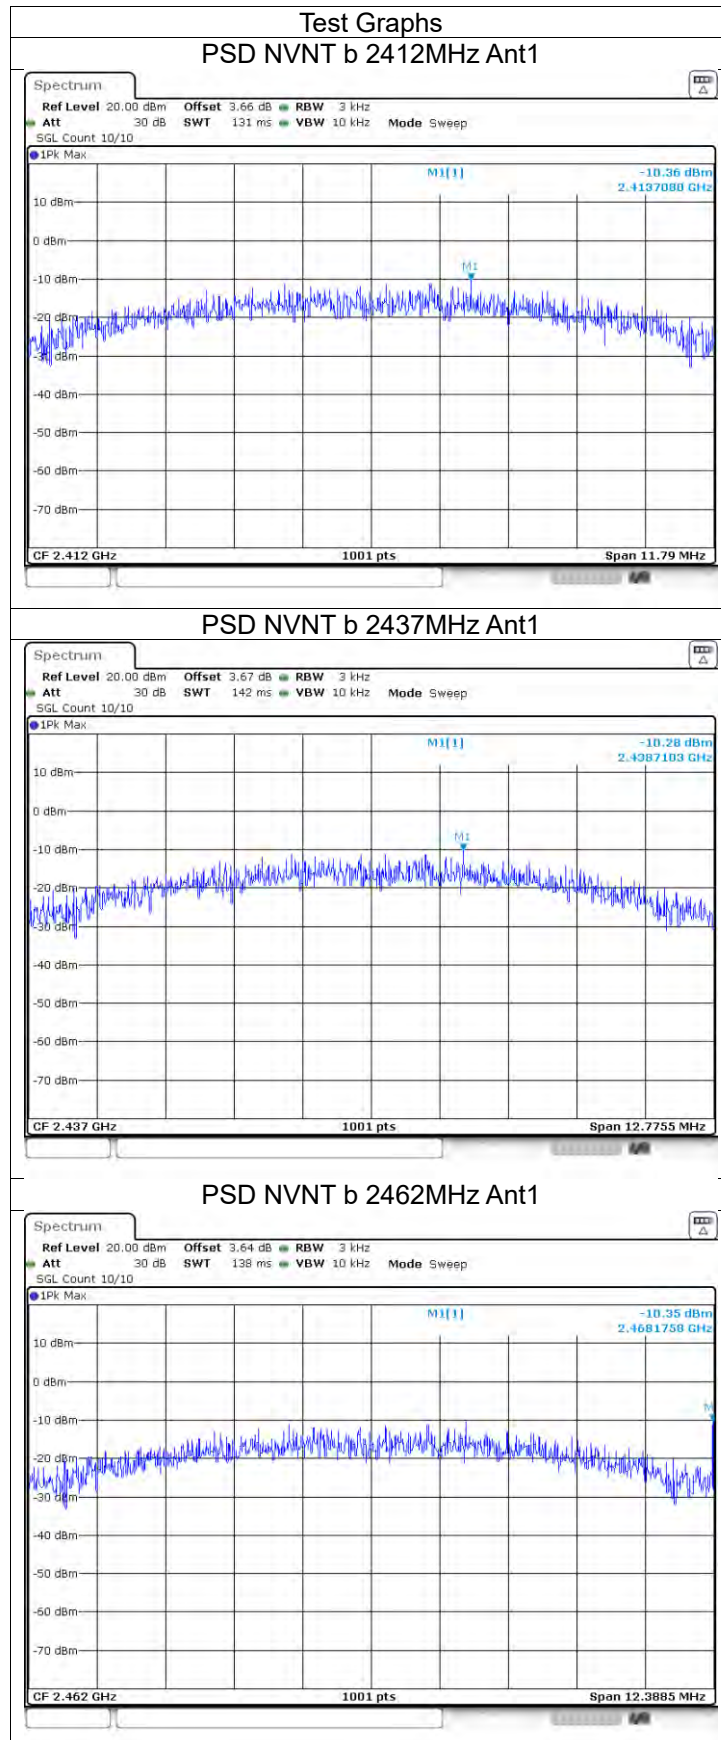


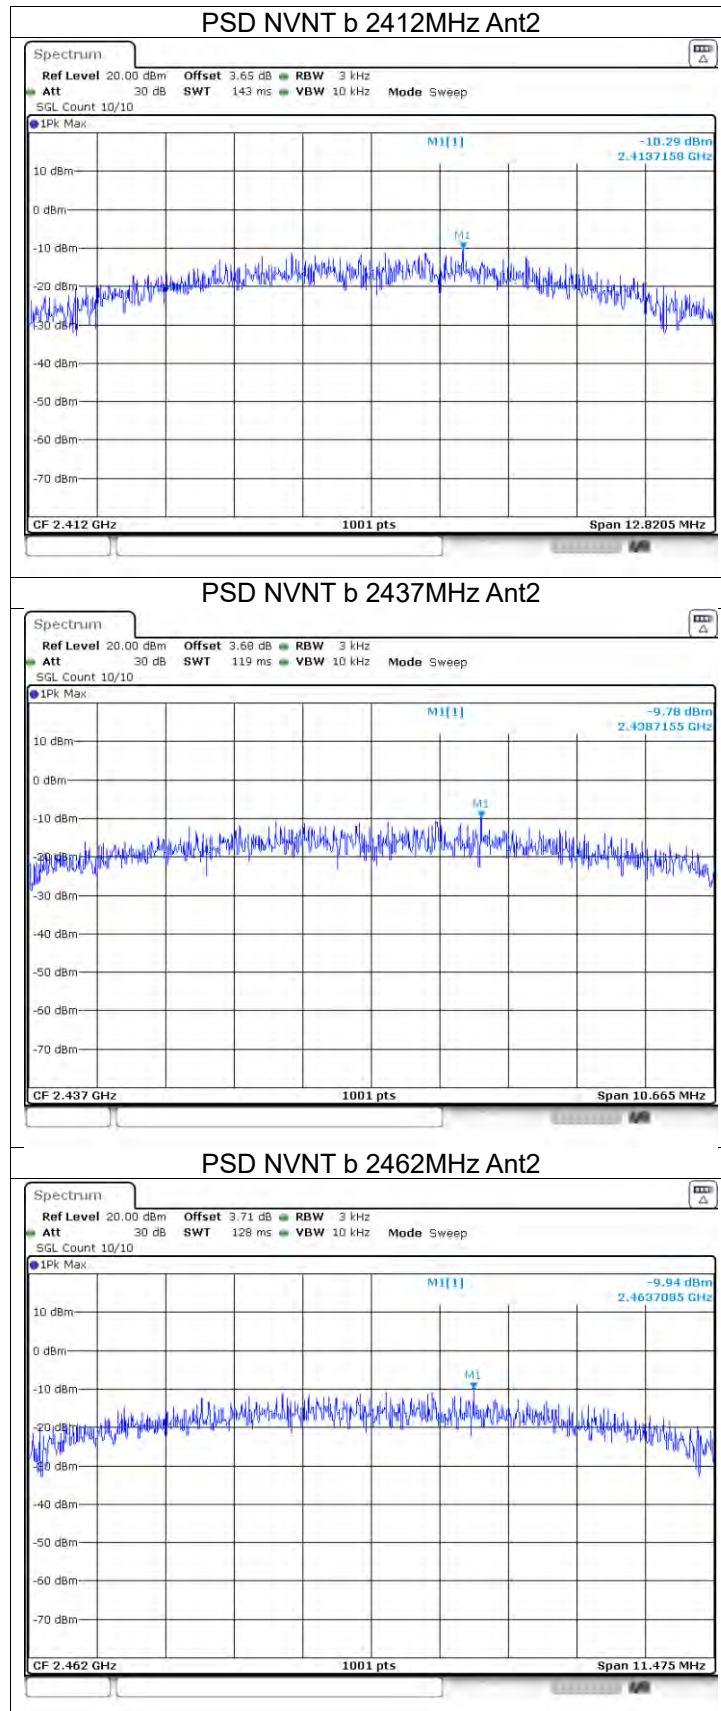


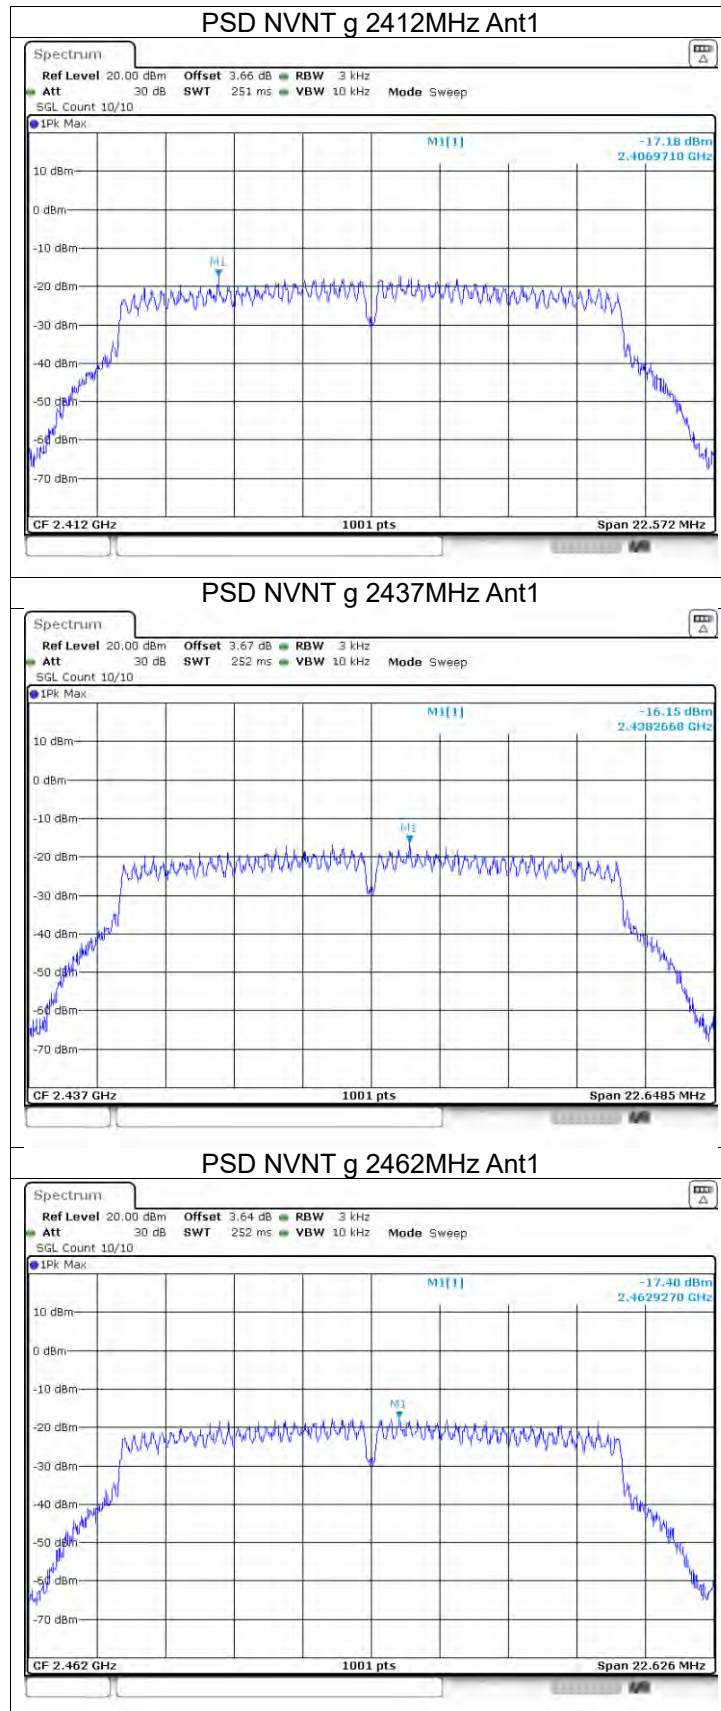


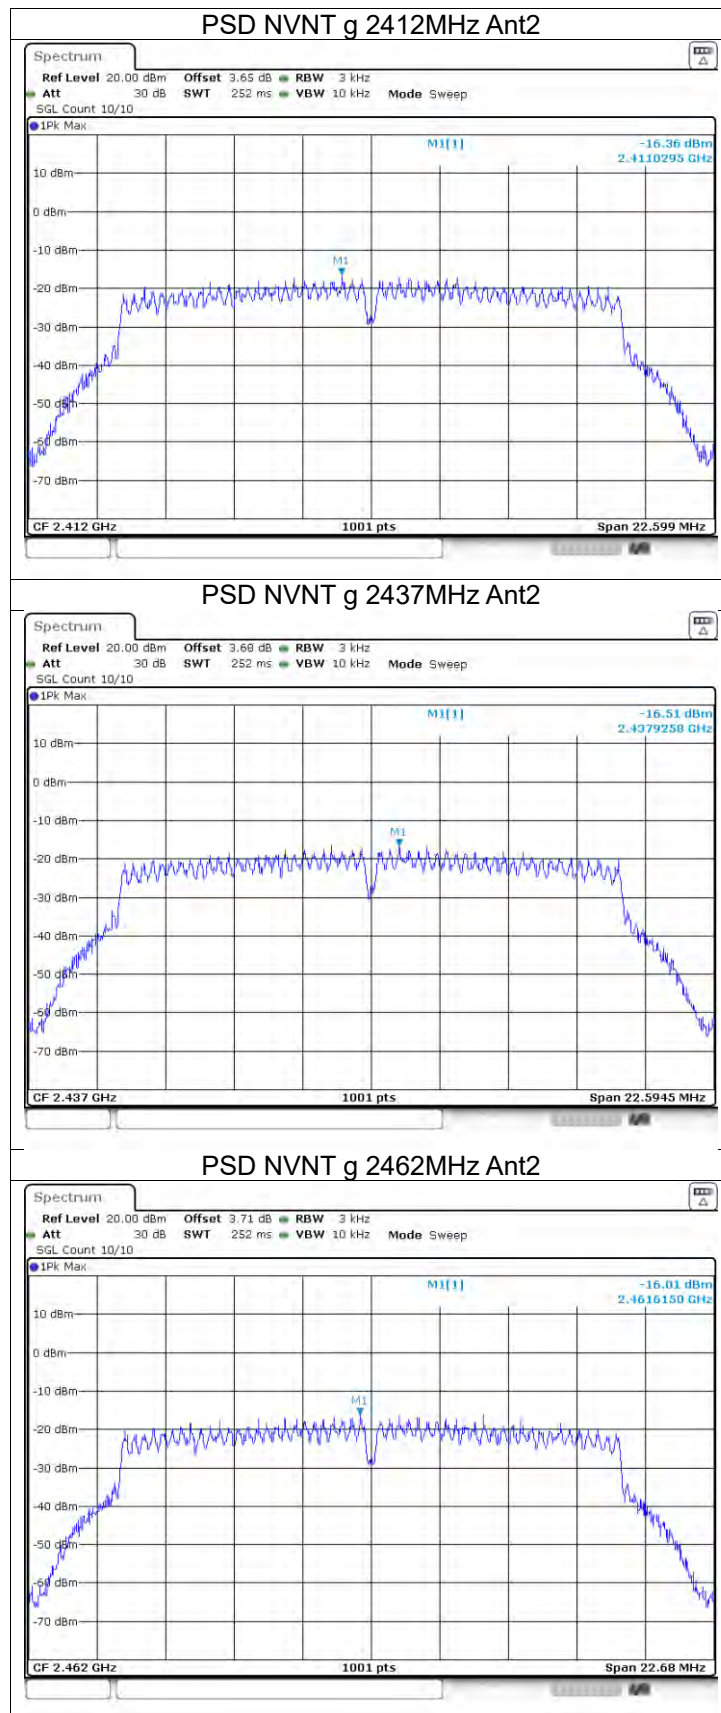


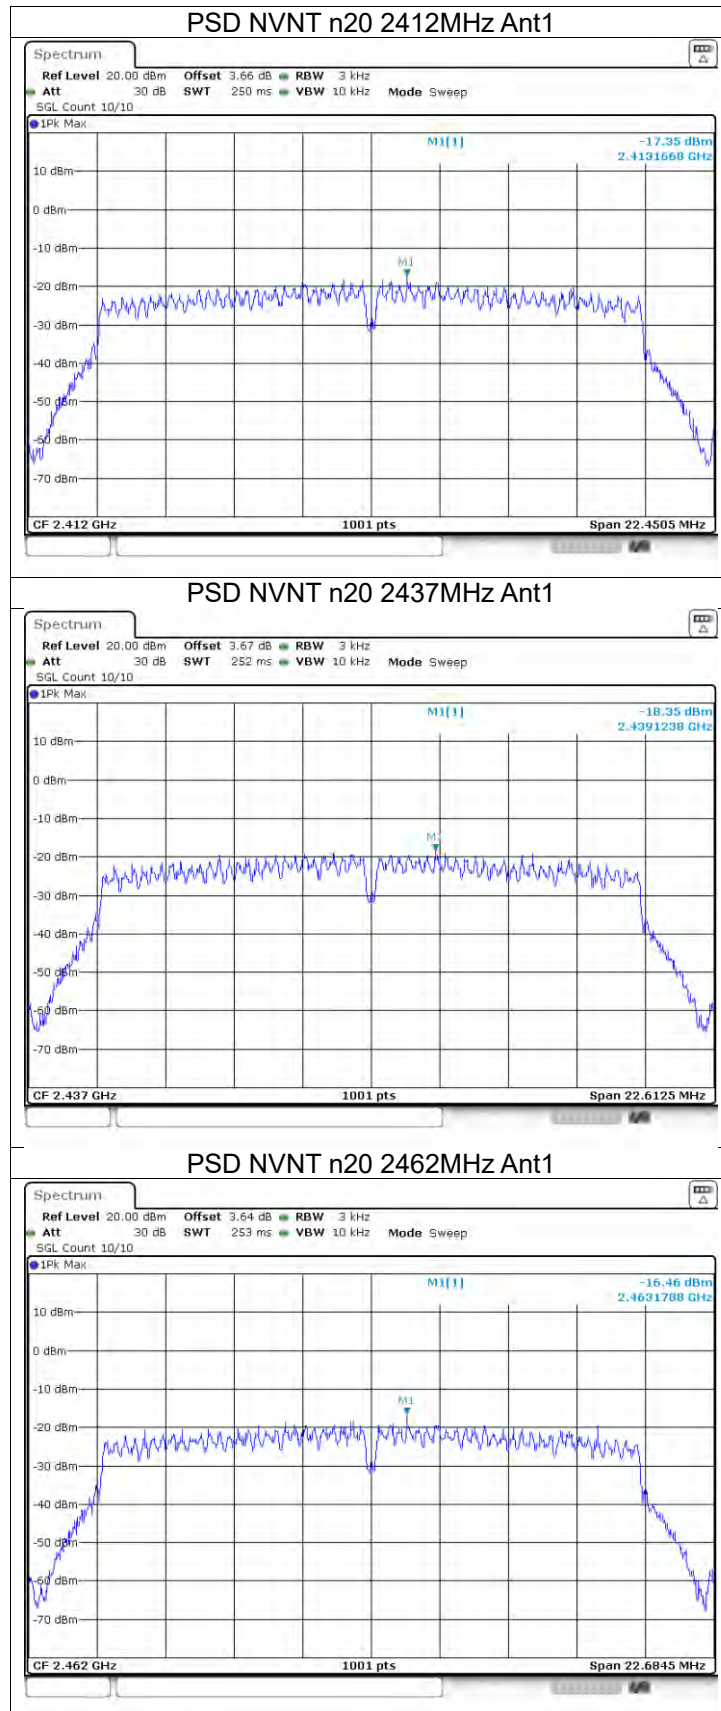


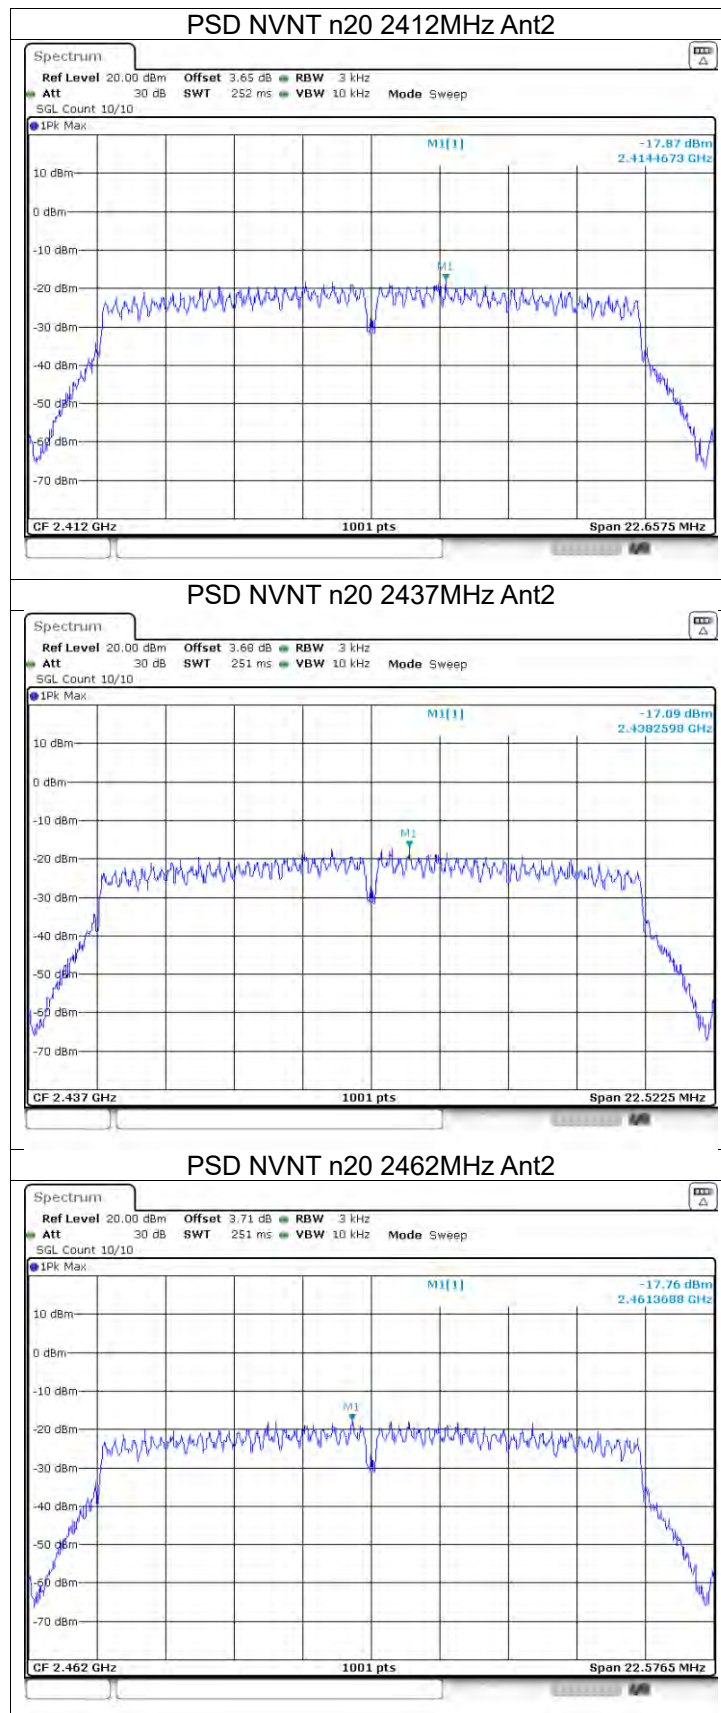


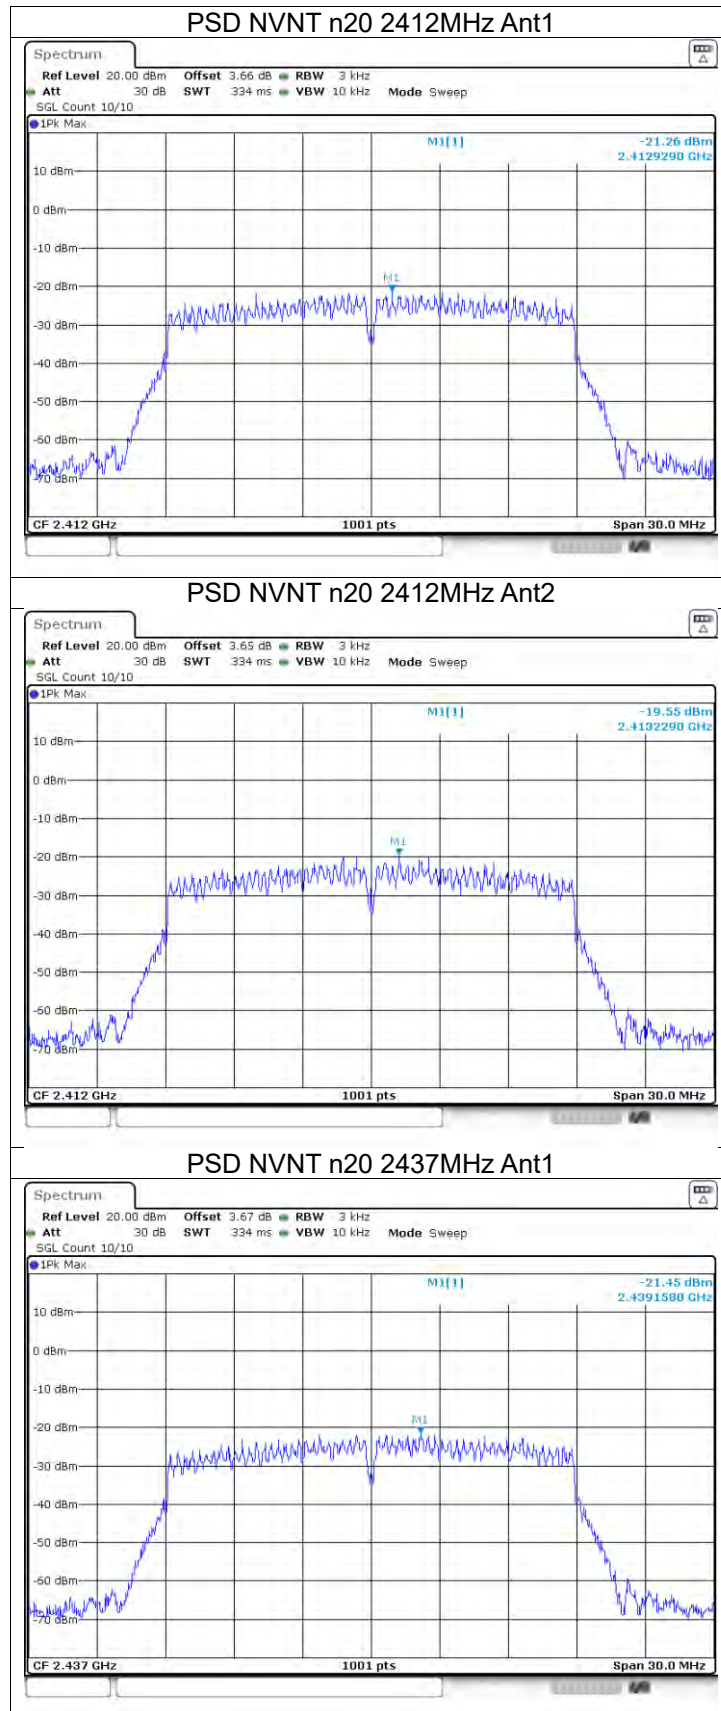


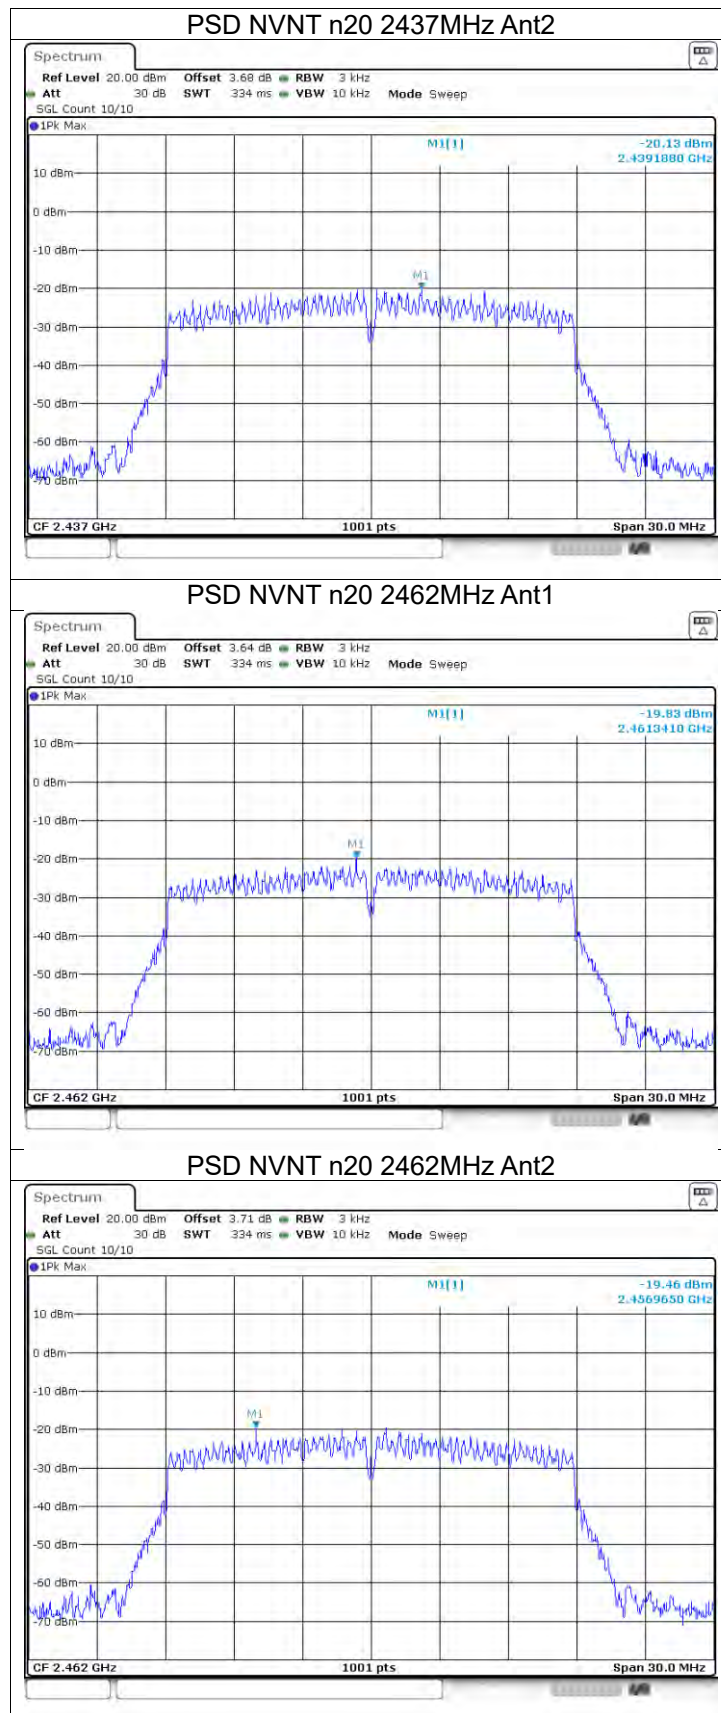

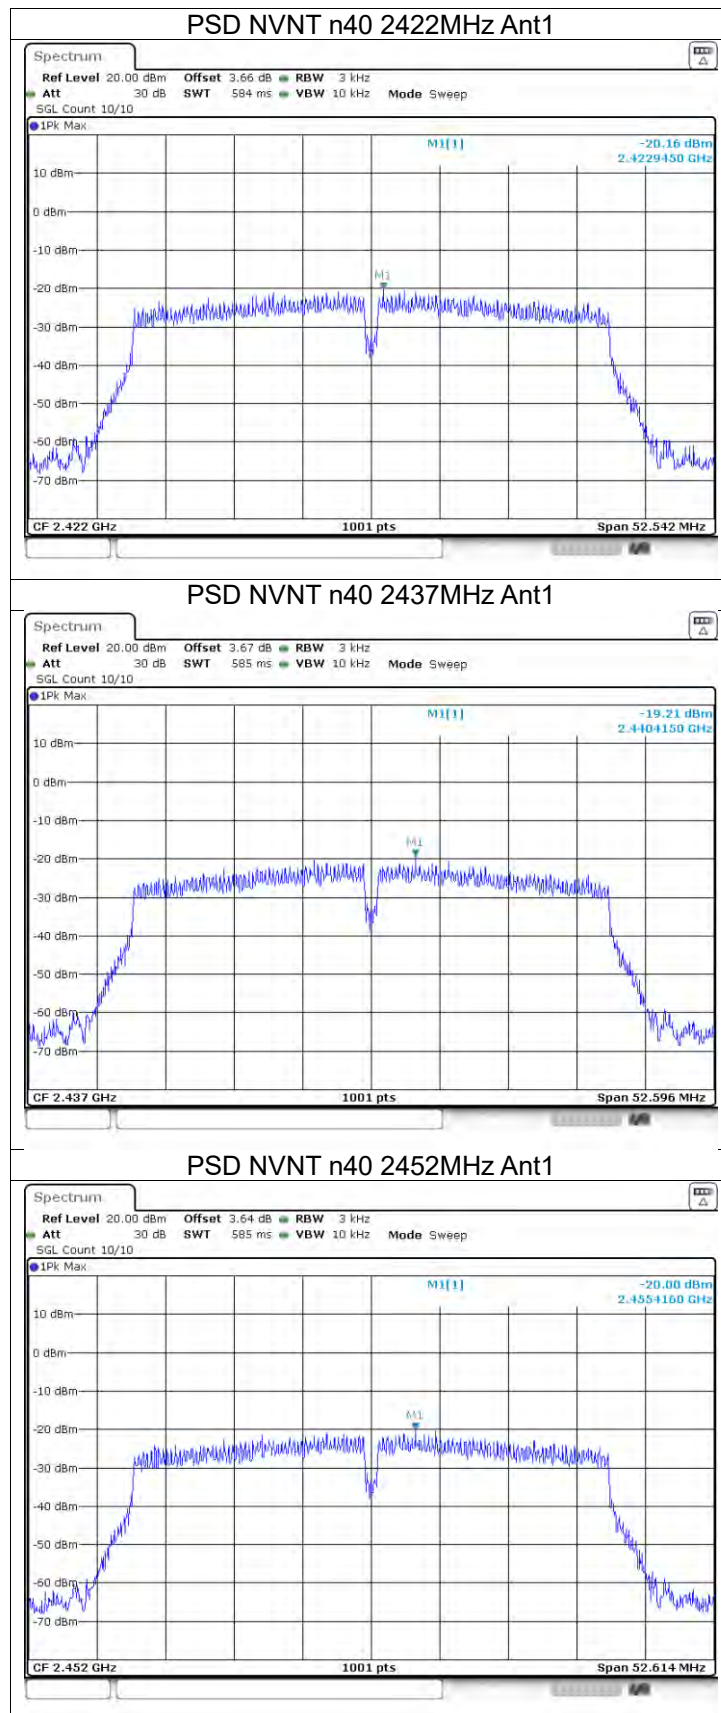

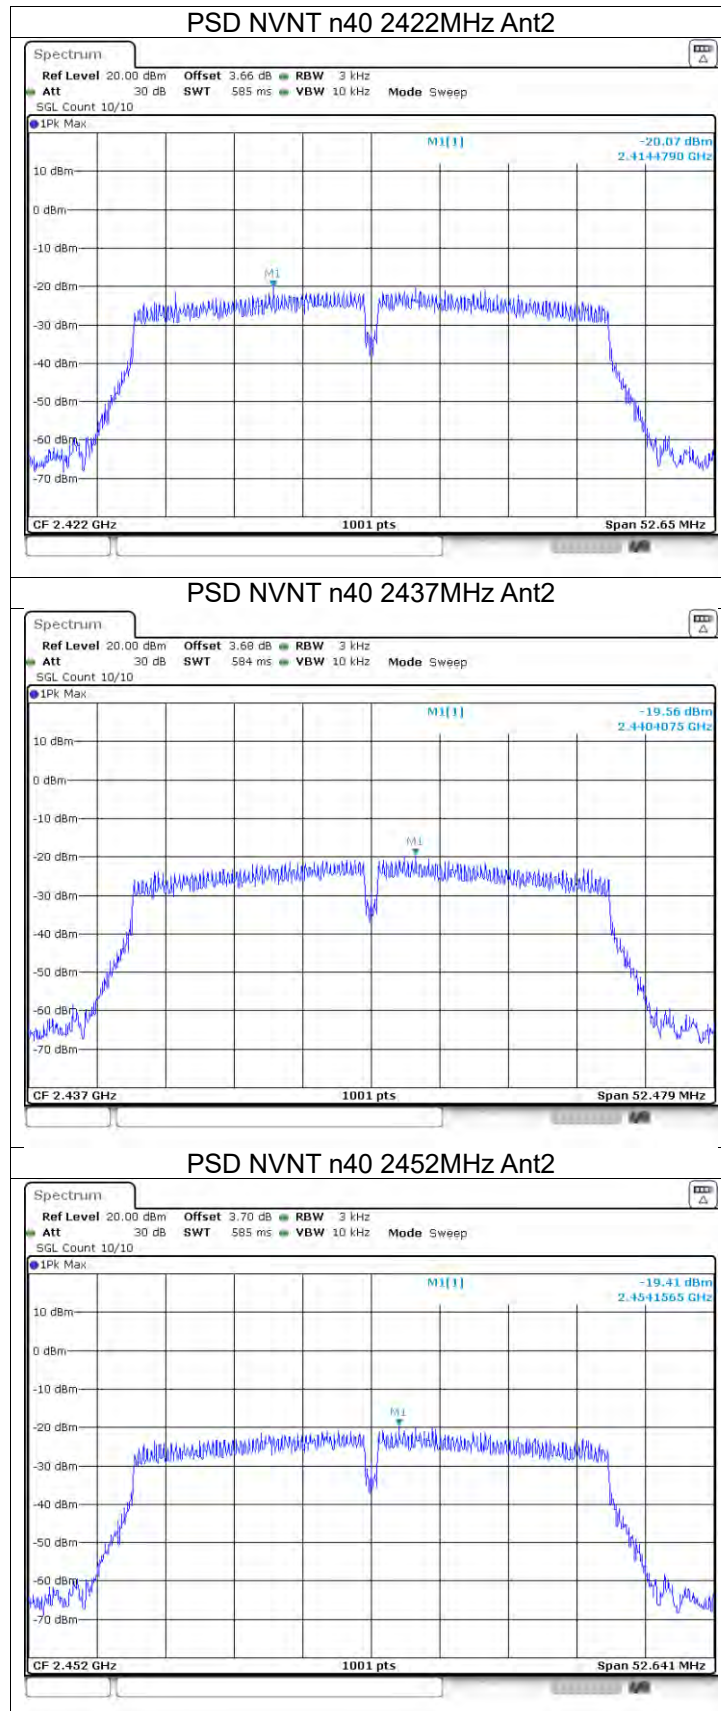

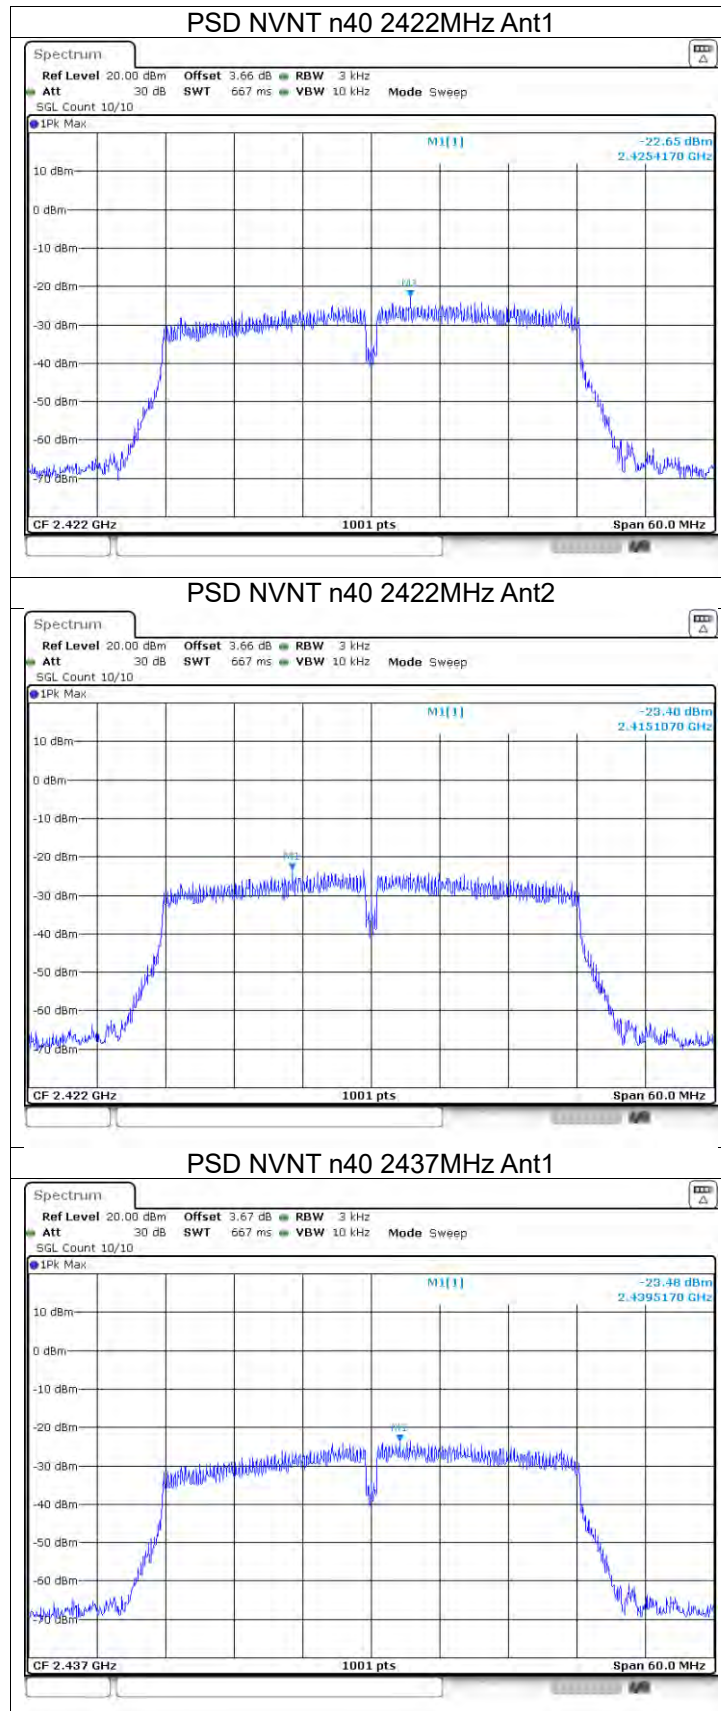


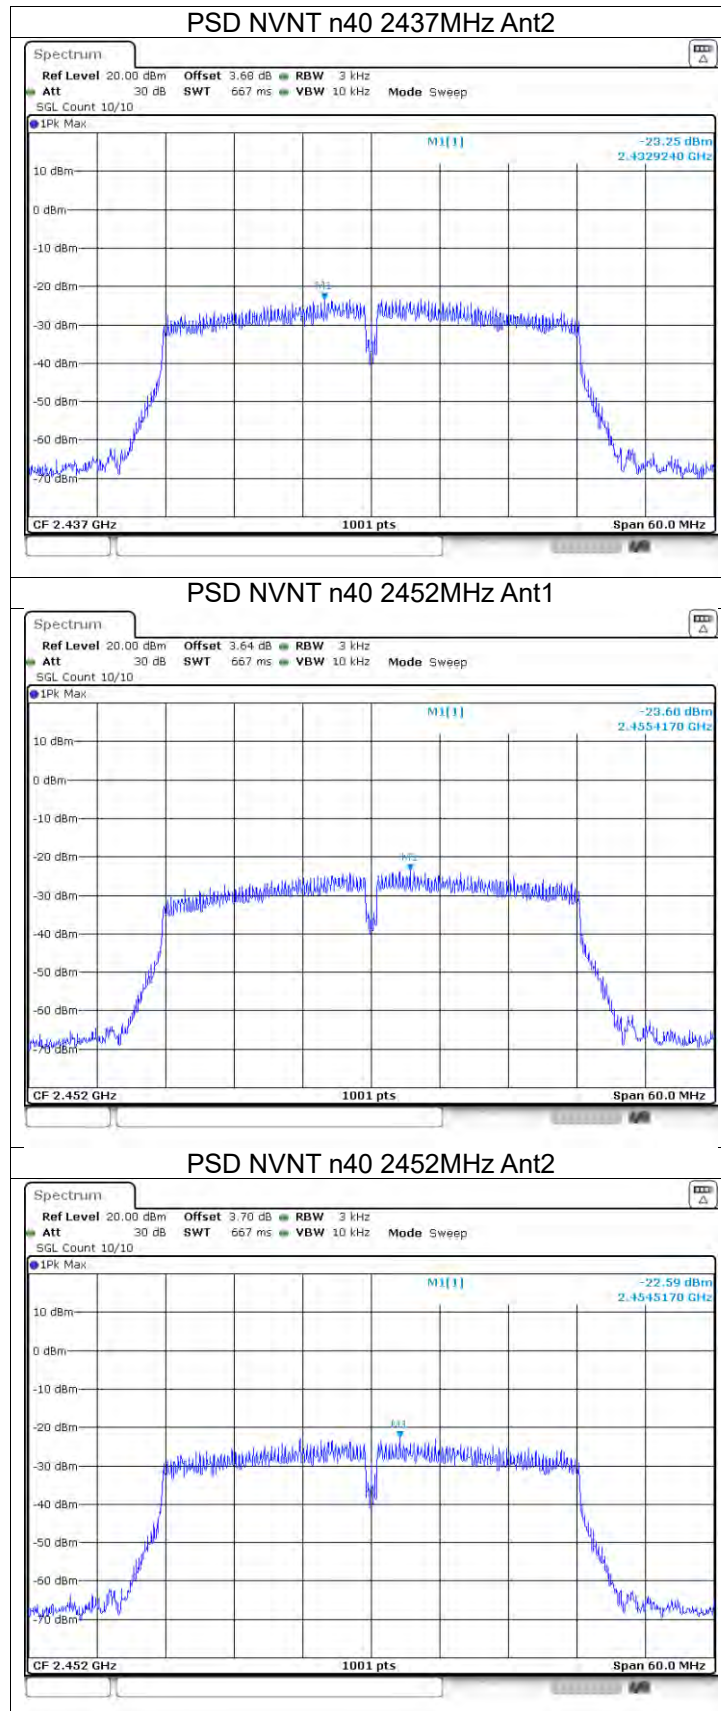




Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	Ant1	-50.6	-20	Pass
NVNT	b	2462	Ant1	-53.53	-20	Pass
NVNT	b	2412	Ant2	-49.38	-20	Pass
NVNT	b	2462	Ant2	-52.37	-20	Pass
NVNT	g	2412	Ant1	-43.04	-20	Pass
NVNT	g	2462	Ant1	-47.84	-20	Pass
NVNT	g	2412	Ant2	-43.85	-20	Pass
NVNT	g	2462	Ant2	-48.5	-20	Pass
NVNT	n20	2412	Ant1	-42.94	-20	Pass
NVNT	n20	2462	Ant1	-47	-20	Pass
NVNT	n20	2412	Ant2	-43.87	-20	Pass
NVNT	n20	2462	Ant2	-47.46	-20	Pass
NVNT	n40	2422	Ant1	-41.52	-20	Pass
NVNT	n40	2452	Ant1	-43.48	-20	Pass
NVNT	n40	2422	Ant2	-40.13	-20	Pass
NVNT	n40	2452	Ant2	-46.64	-20	Pass

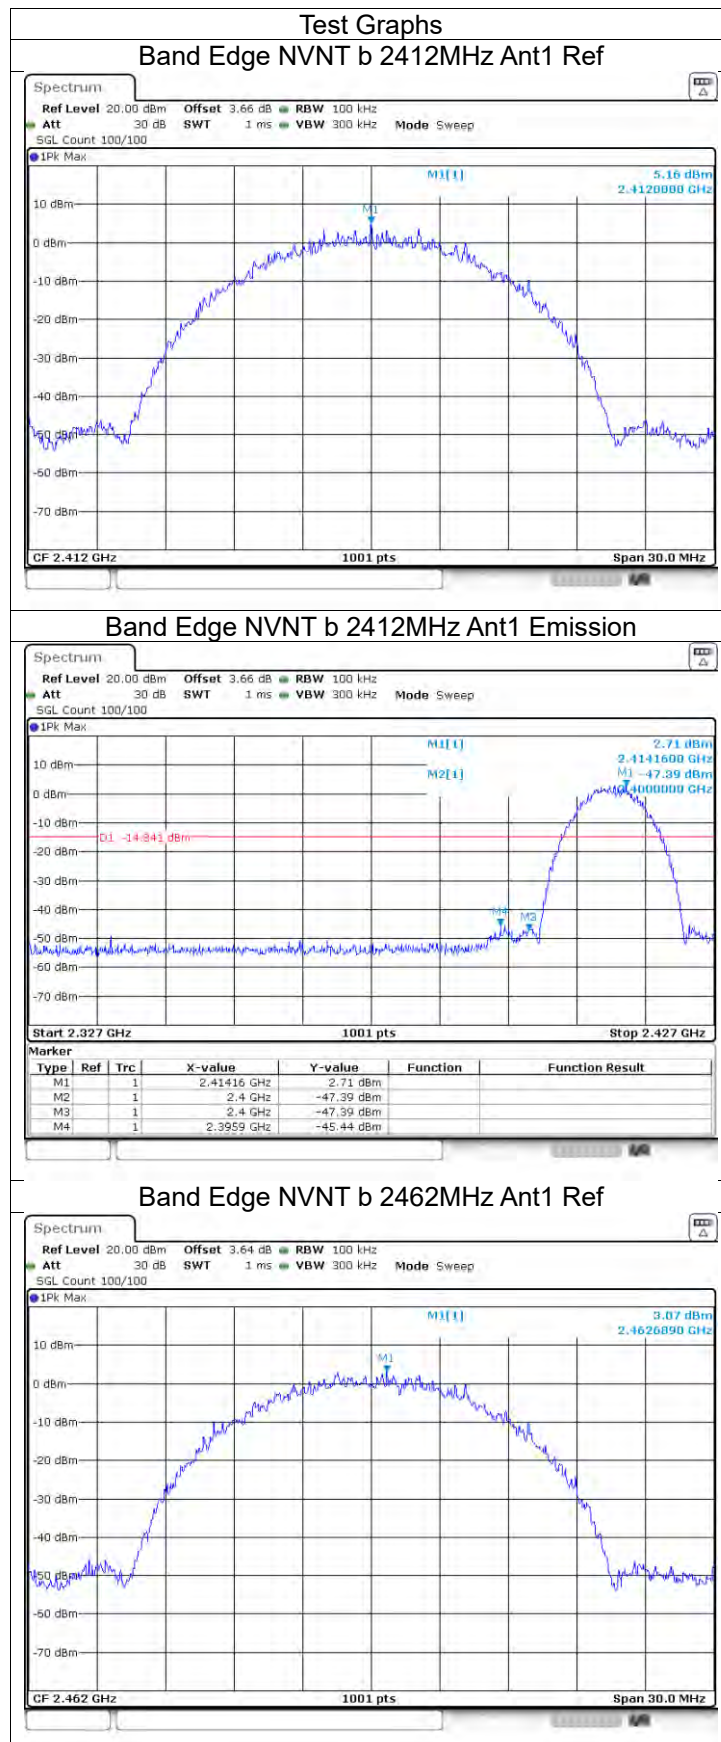





Band Edge NVNT b 2462MHz Ant1 Emission

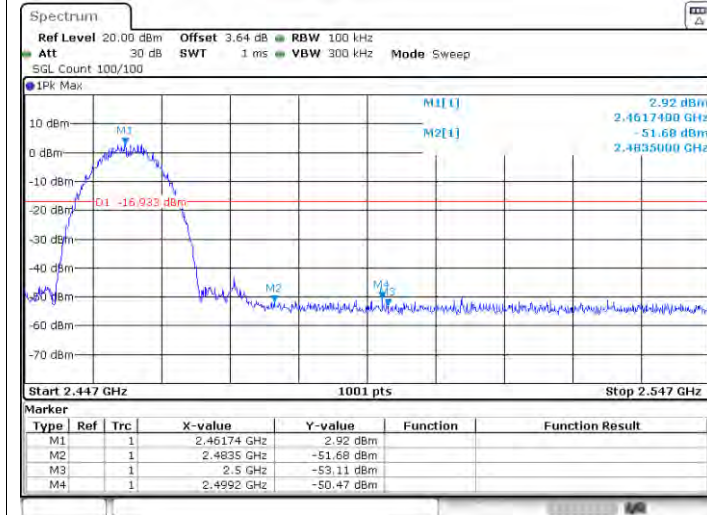


Band Edge NVNT b 2412MHz Ant2 Ref

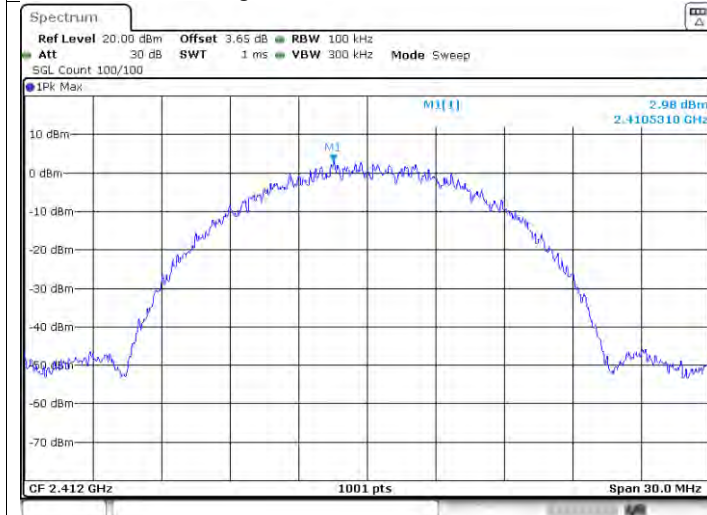


Band Edge NVNT b 2412MHz Ant2 Emission

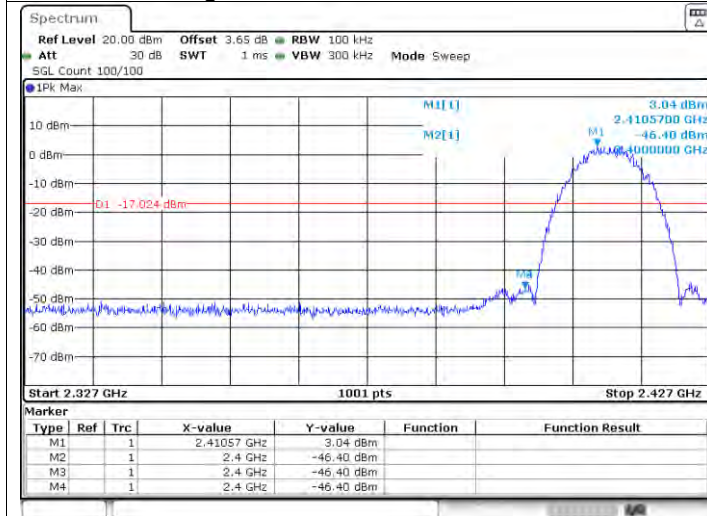

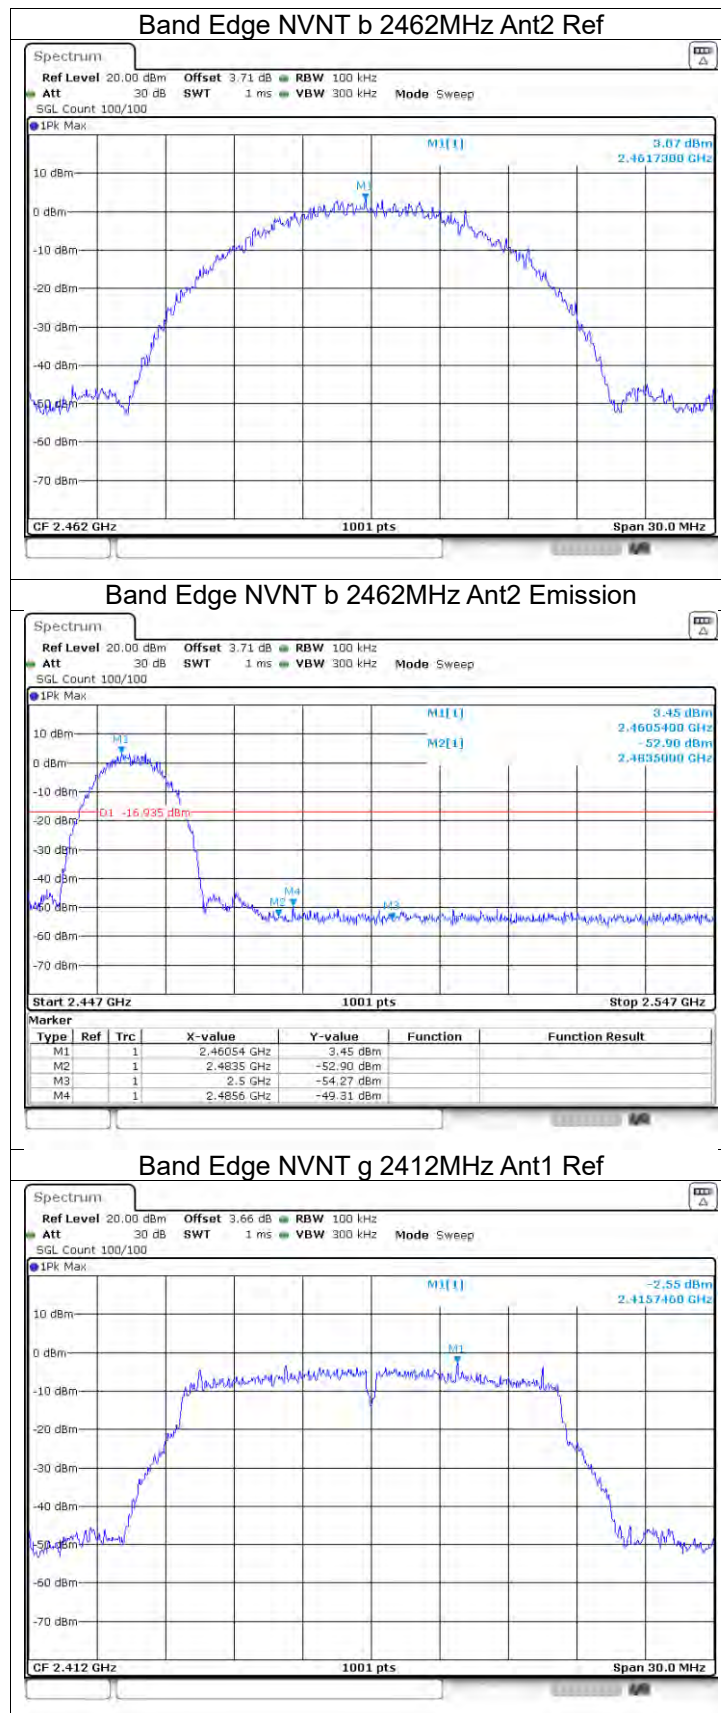





Band Edge NVNT g 2412MHz Ant1 Emission

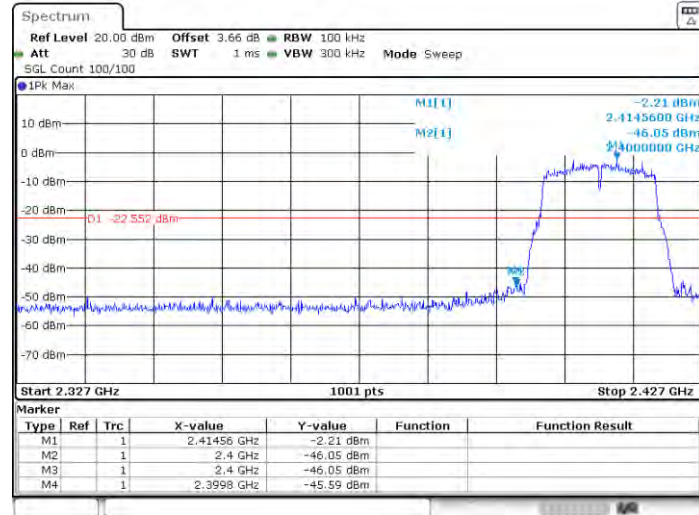



Band Edge NVNT g 2462MHz Ant1 Ref

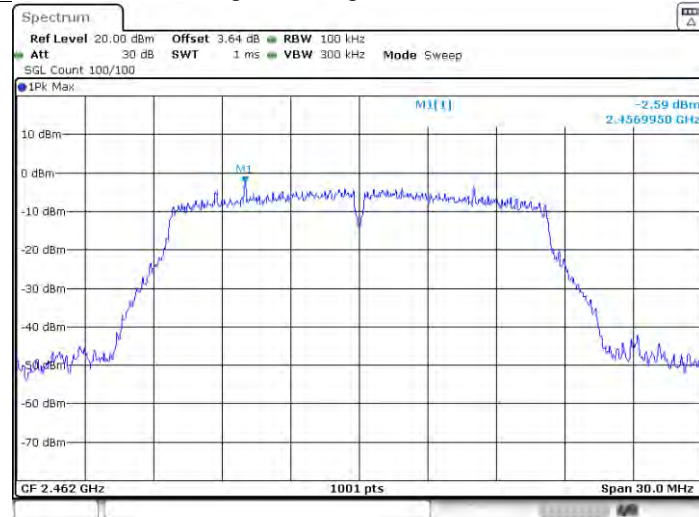



Band Edge NVNT g 2462MHz Ant1 Emission

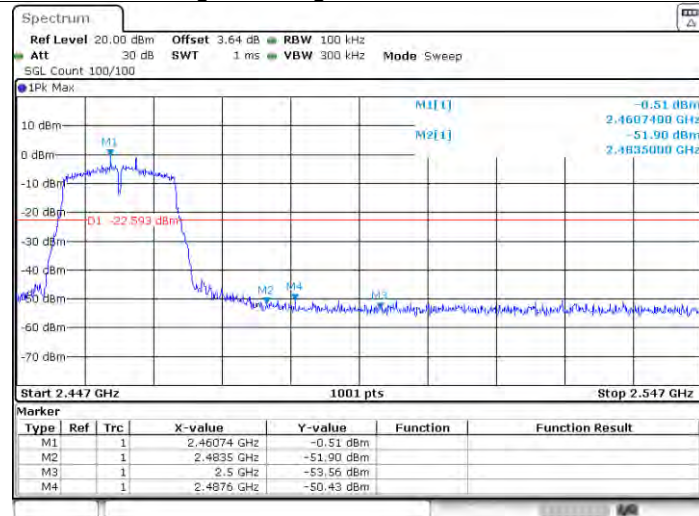


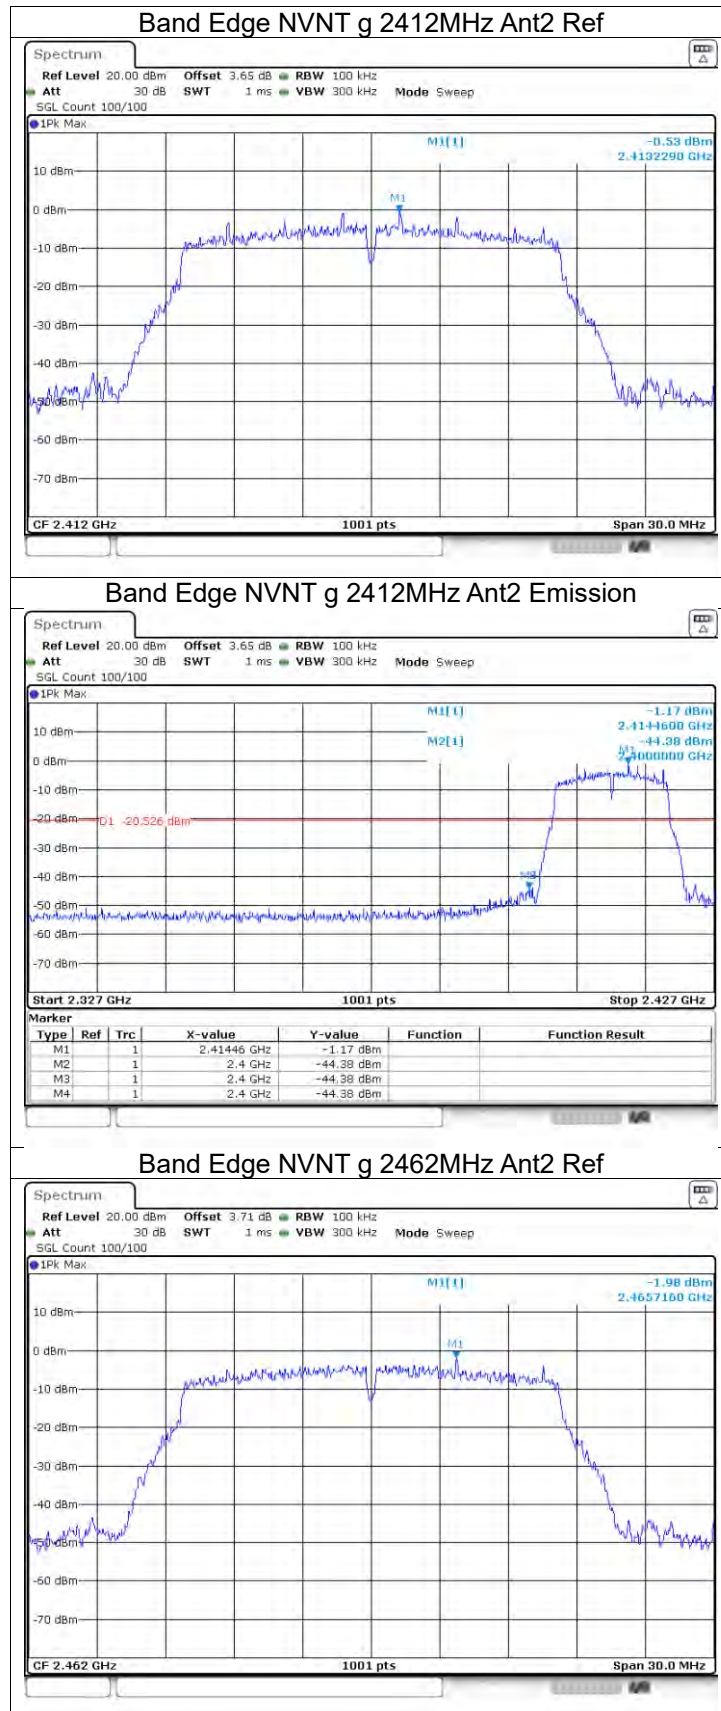

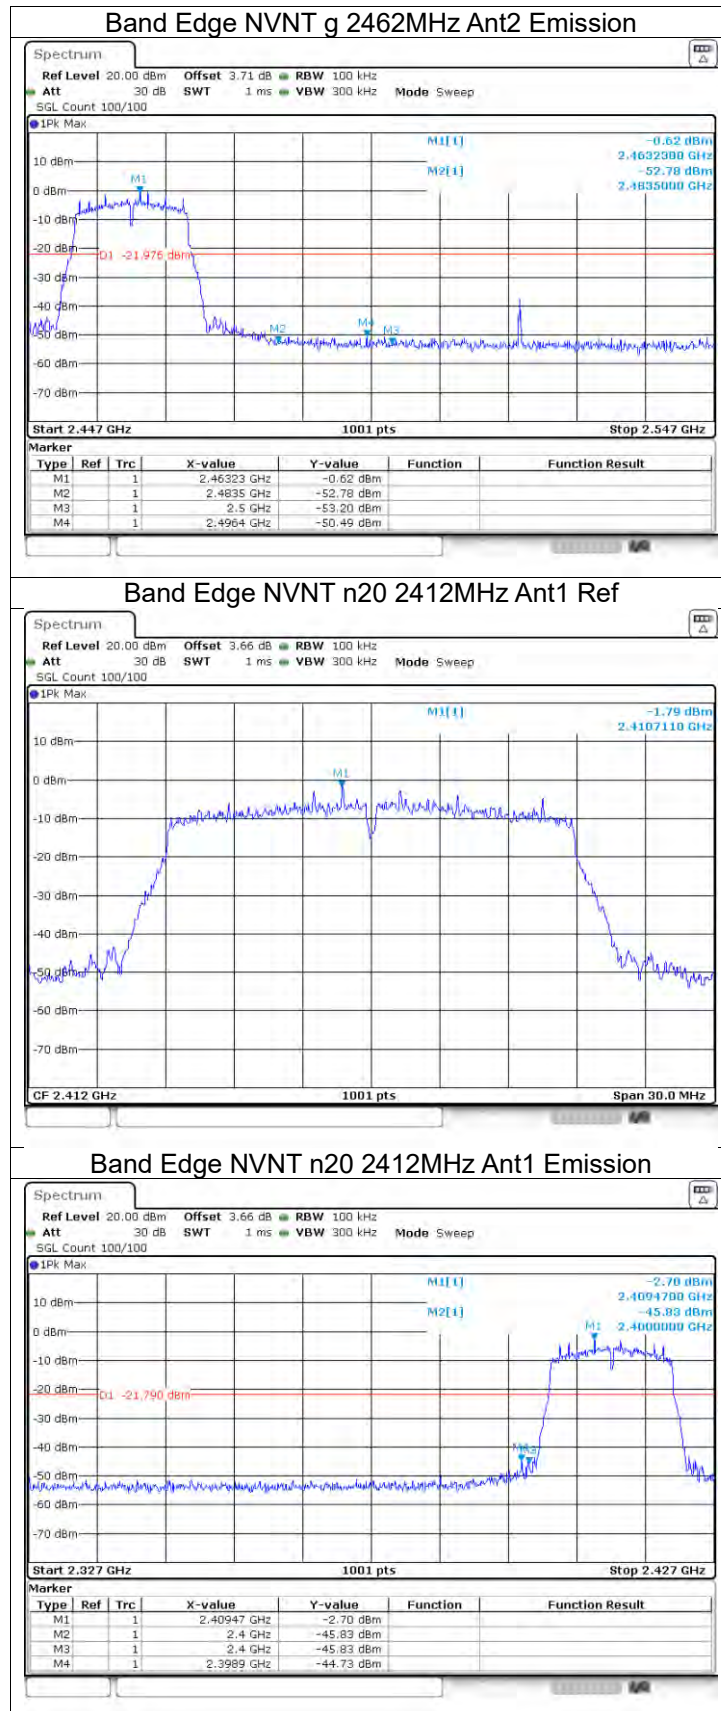

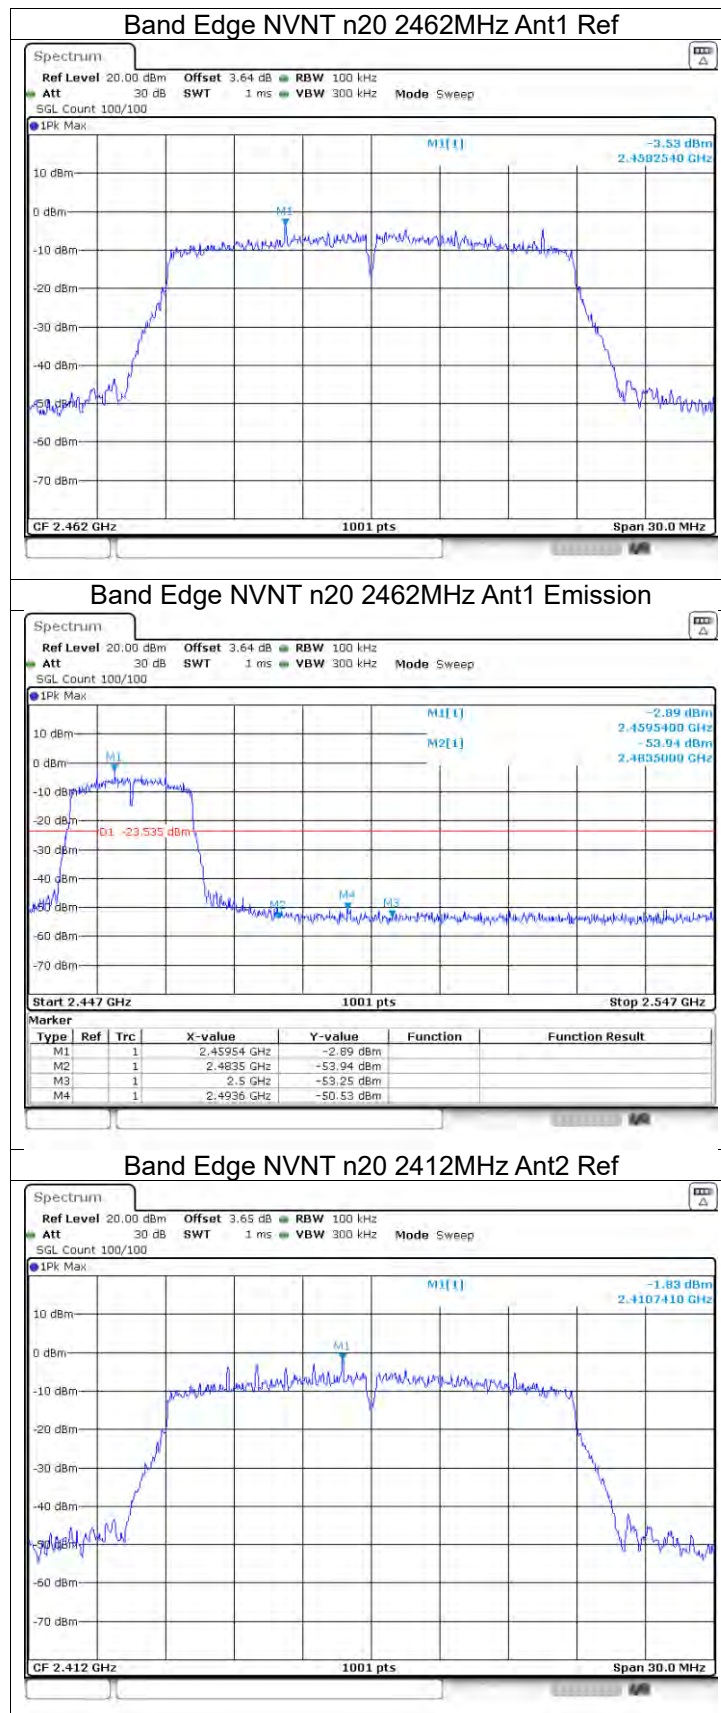


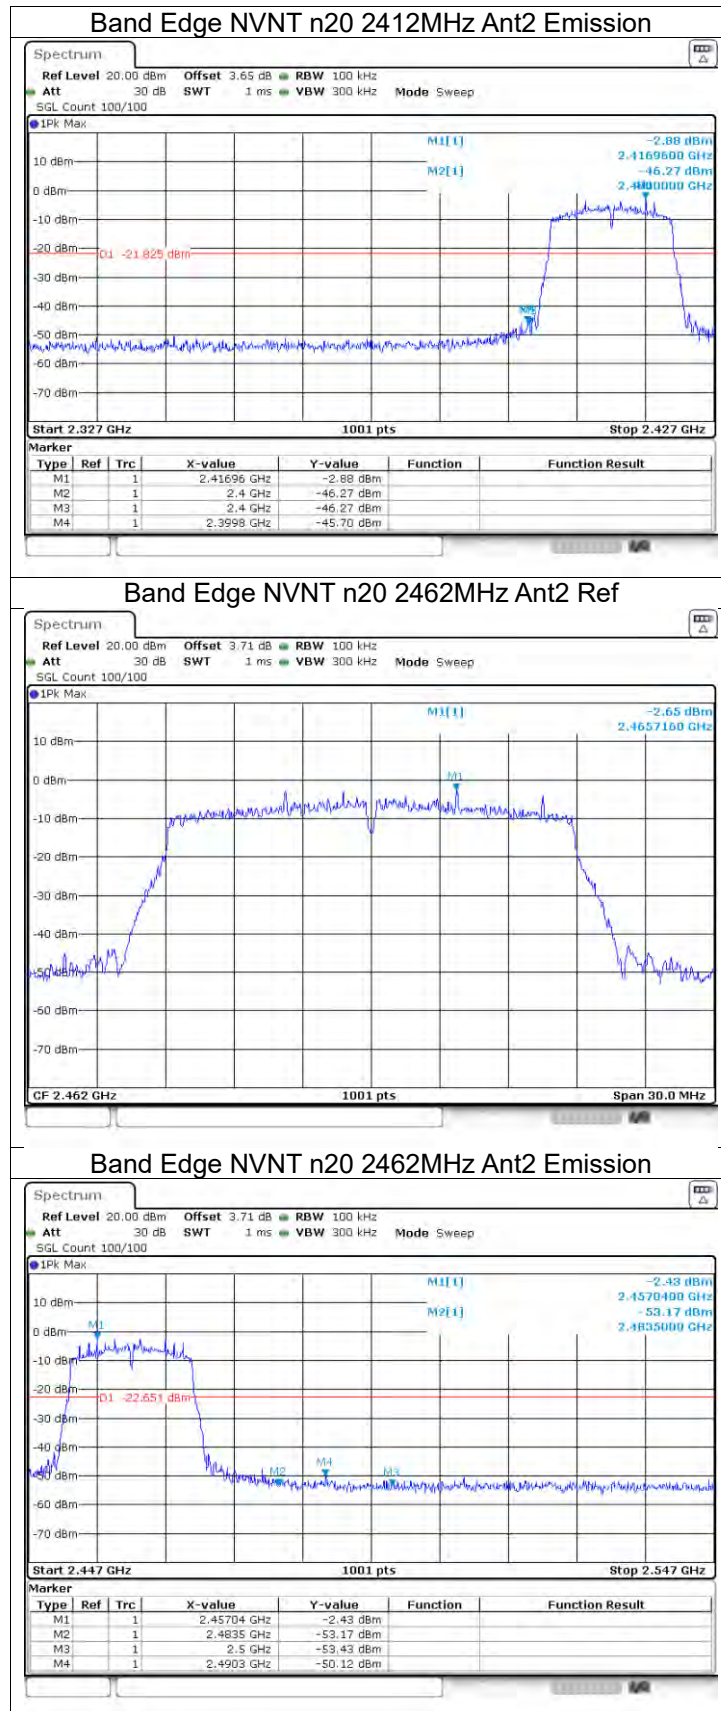

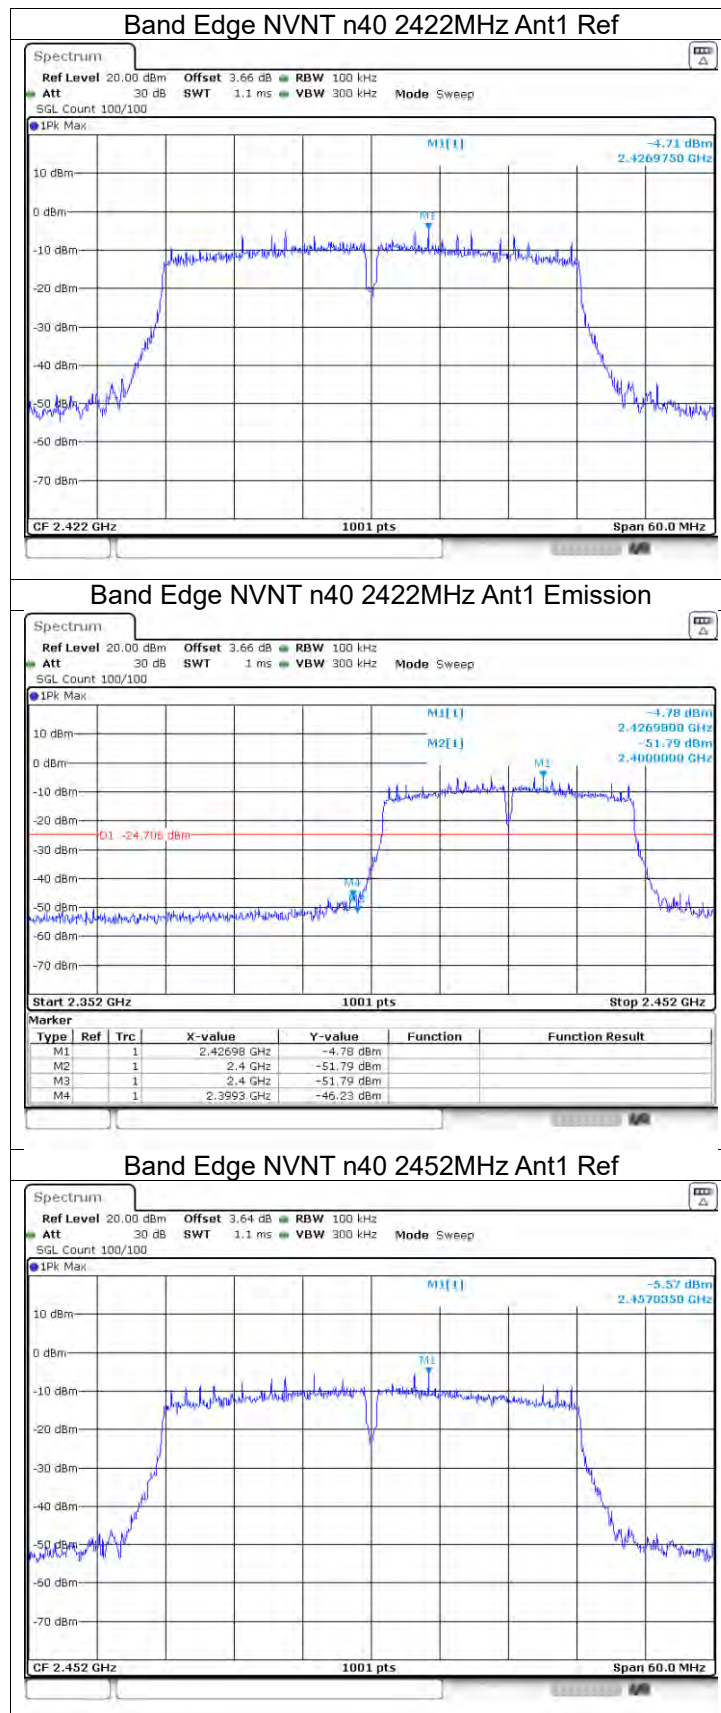





Band Edge NVNT n40 2452MHz Ant1 Emission

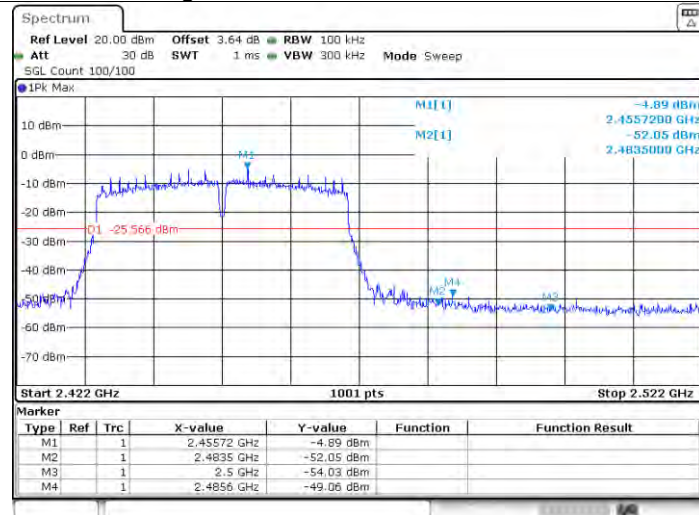


Band Edge NVNT n40 2422MHz Ant2 Ref

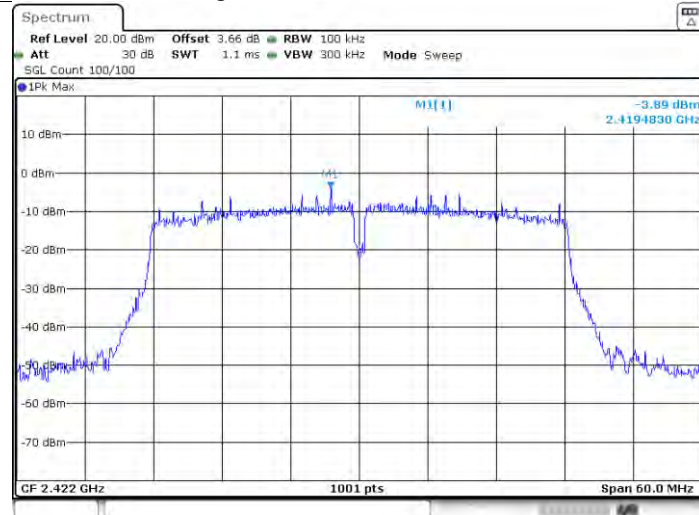

Band Edge NVNT n40 2422MHz Ant2 Emission

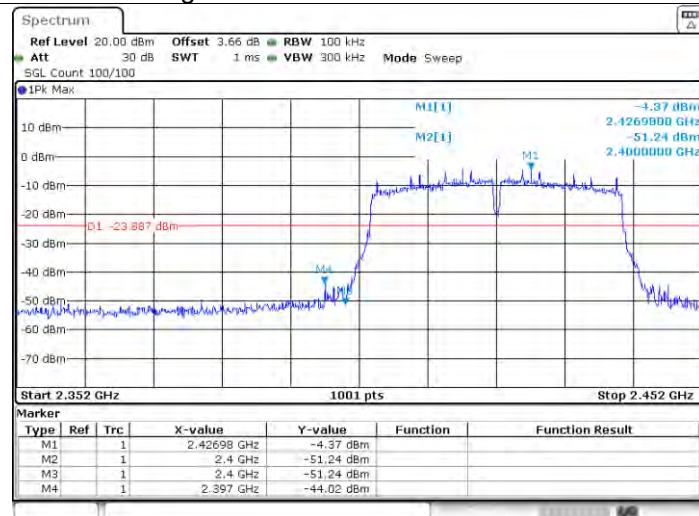

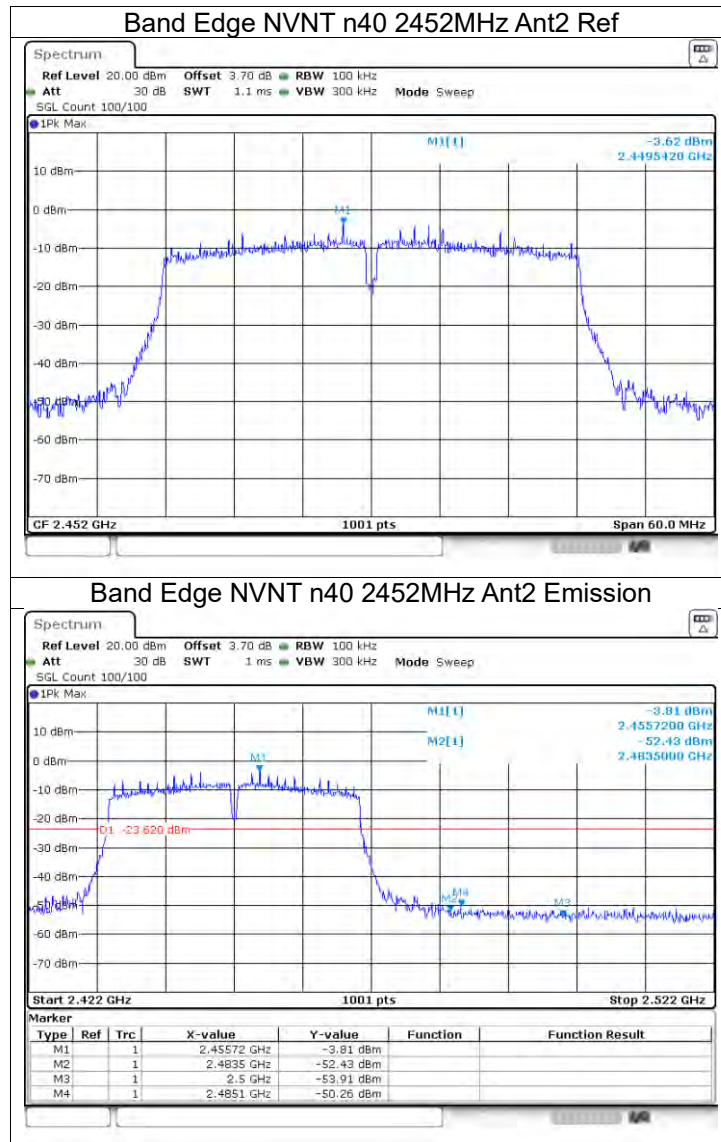




Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	Ant1	-34.87	-20	Pass
NVNT	b	2437	Ant1	-35.17	-20	Pass
NVNT	b	2462	Ant1	-34.28	-20	Pass
NVNT	b	2412	Ant2	-30.07	-20	Pass
NVNT	b	2437	Ant2	-31.03	-20	Pass
NVNT	b	2462	Ant2	-30.19	-20	Pass
NVNT	g	2412	Ant1	-29.78	-20	Pass
NVNT	g	2437	Ant1	-29.41	-20	Pass
NVNT	g	2462	Ant1	-27.02	-20	Pass
NVNT	g	2412	Ant2	-25.19	-20	Pass
NVNT	g	2437	Ant2	-26.37	-20	Pass
NVNT	g	2462	Ant2	-25.47	-20	Pass
NVNT	n20	2412	Ant1	-28.29	-20	Pass
NVNT	n20	2437	Ant1	-26.76	-20	Pass
NVNT	n20	2462	Ant1	-29.82	-20	Pass
NVNT	n20	2412	Ant2	-24	-20	Pass
NVNT	n20	2437	Ant2	-26.19	-20	Pass
NVNT	n20	2462	Ant2	-24.22	-20	Pass
NVNT	n40	2422	Ant1	-27.39	-20	Pass
NVNT	n40	2437	Ant1	-27.36	-20	Pass
NVNT	n40	2452	Ant1	-27.02	-20	Pass
NVNT	n40	2422	Ant2	-23.1	-20	Pass
NVNT	n40	2437	Ant2	-22.92	-20	Pass
NVNT	n40	2452	Ant2	-23.1	-20	Pass




Test Graphs


Tx. Spurious NVNT b 2412MHz Ant1 Ref

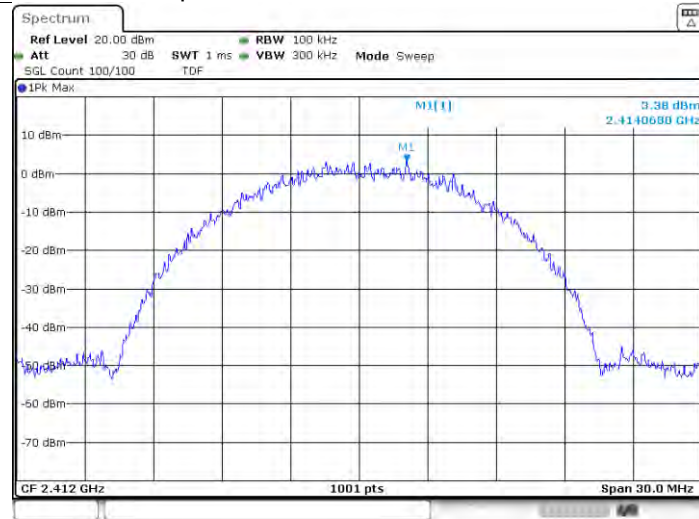

Tx. Spurious NVNT b 2412MHz Ant1 Emission

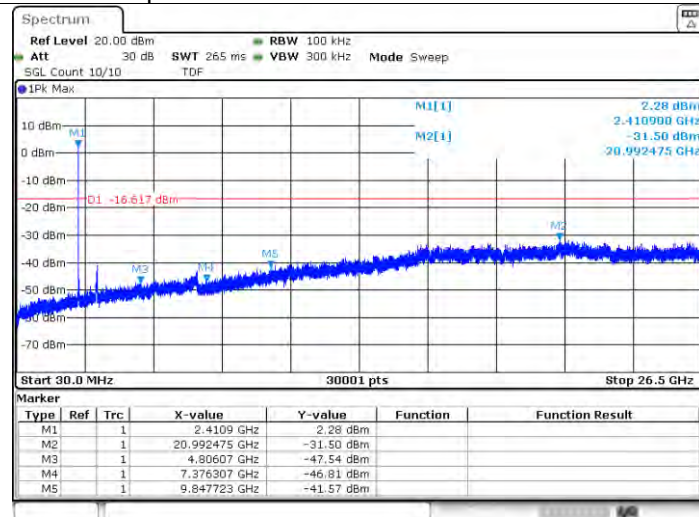


Tx. Spurious NVNT b 2437MHz Ant1 Ref

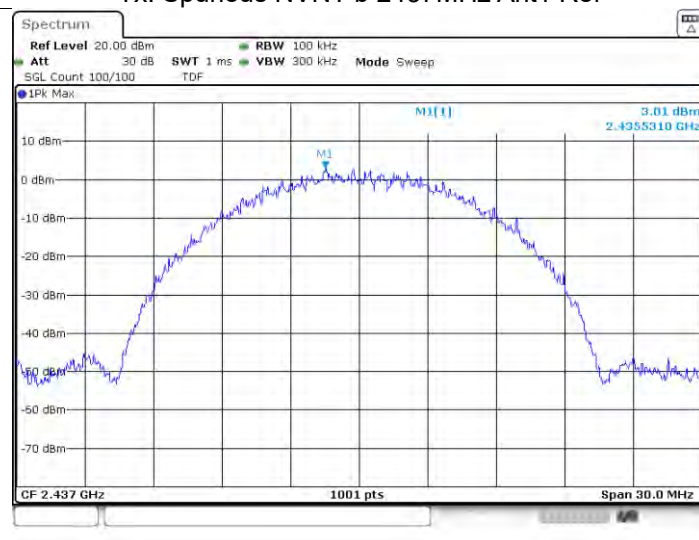





Tx. Spurious NVNT b 2437MHz Ant1 Emission

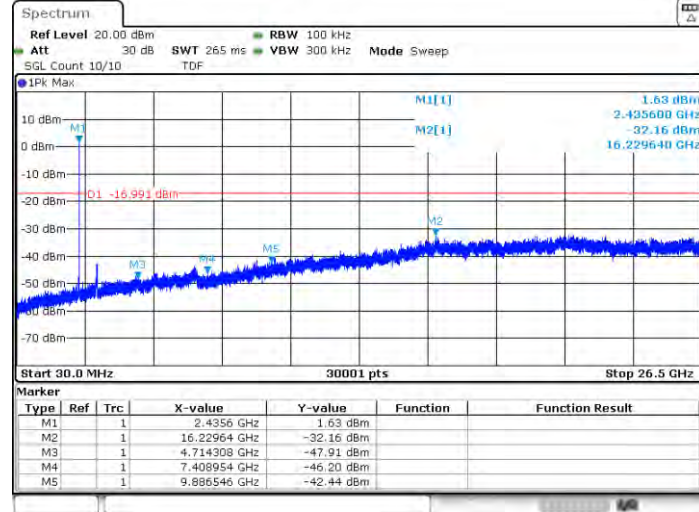

Tx. Spurious NVNT b 2462MHz Ant1 Ref

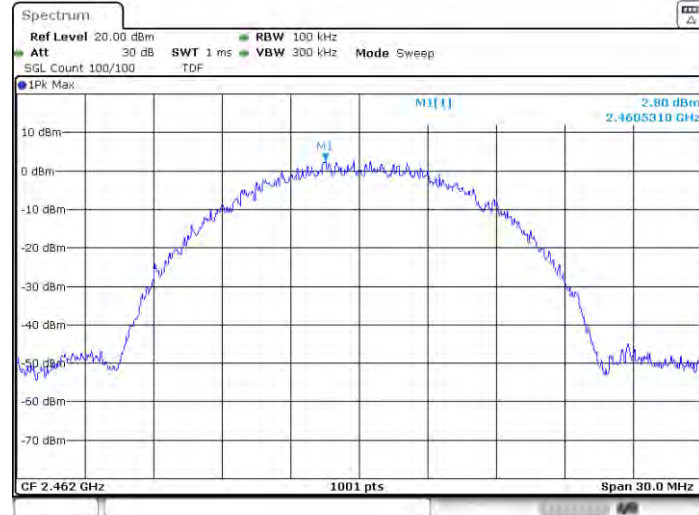


Tx. Spurious NVNT b 2462MHz Ant1 Emission

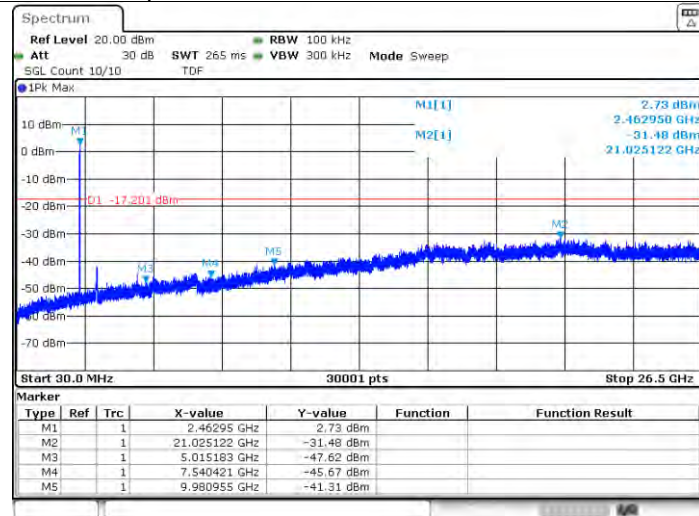





Tx. Spurious NVNT b 2412MHz Ant2 Ref

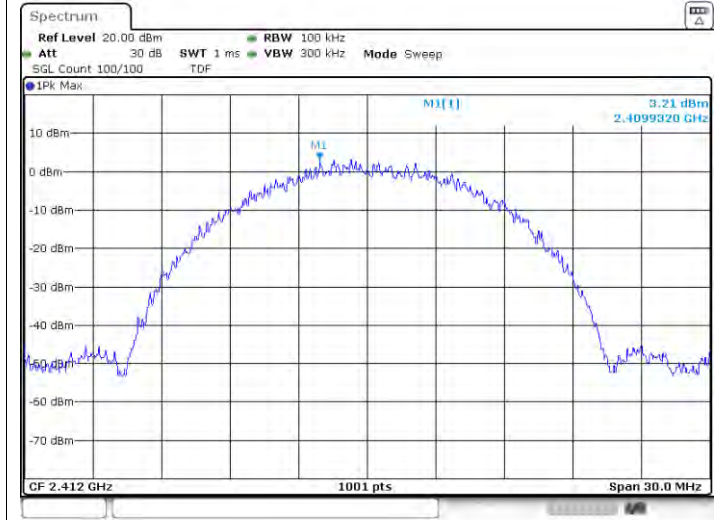

Tx. Spurious NVNT b 2412MHz Ant2 Emission

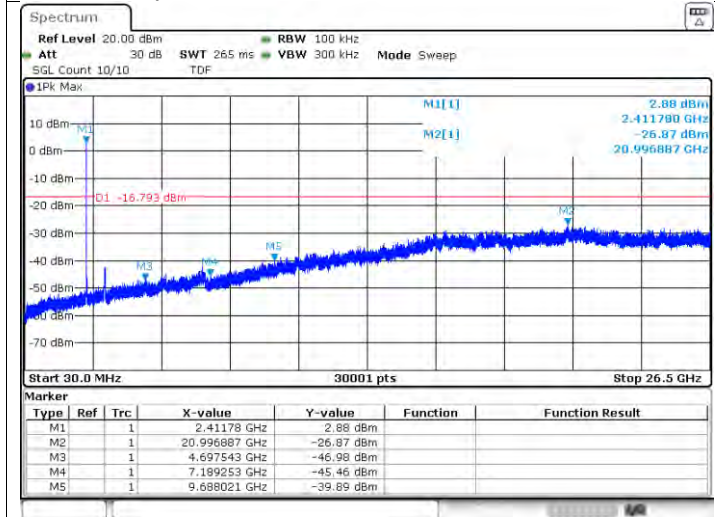


Tx. Spurious NVNT b 2437MHz Ant2 Ref

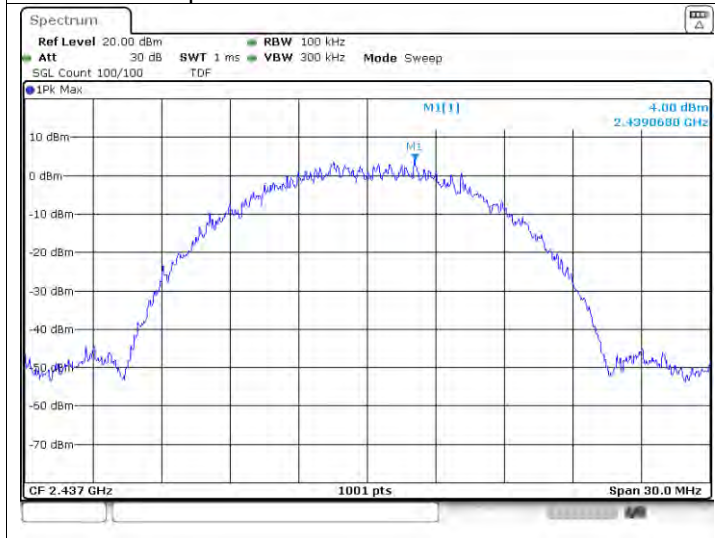





Tx. Spurious NVNT b 2437MHz Ant2 Emission

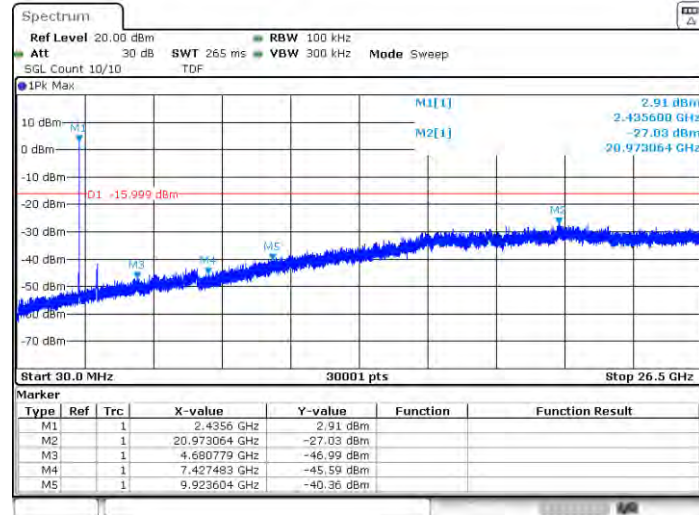

Tx. Spurious NVNT b 2462MHz Ant2 Ref

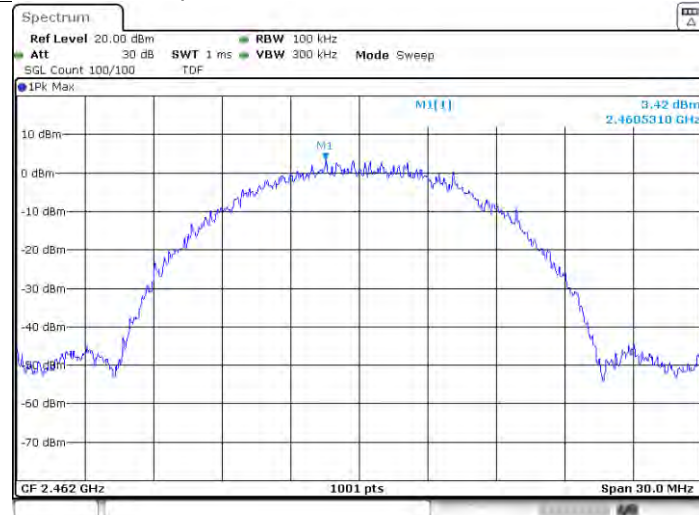


Tx. Spurious NVNT b 2462MHz Ant2 Emission

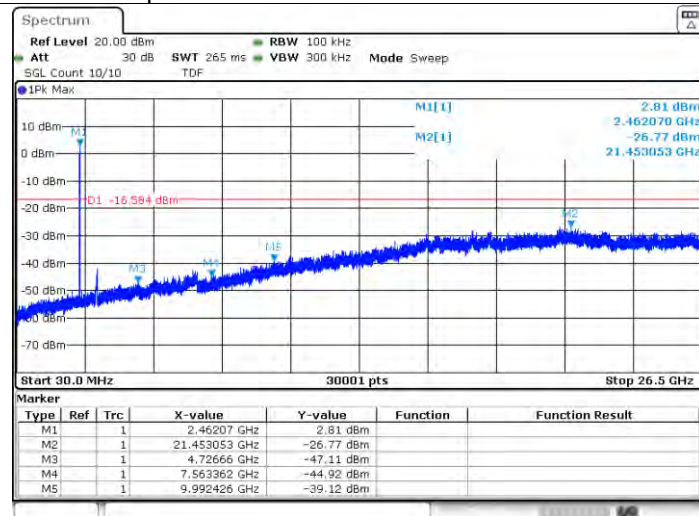





Tx. Spurious NVNT g 2412MHz Ant1 Ref

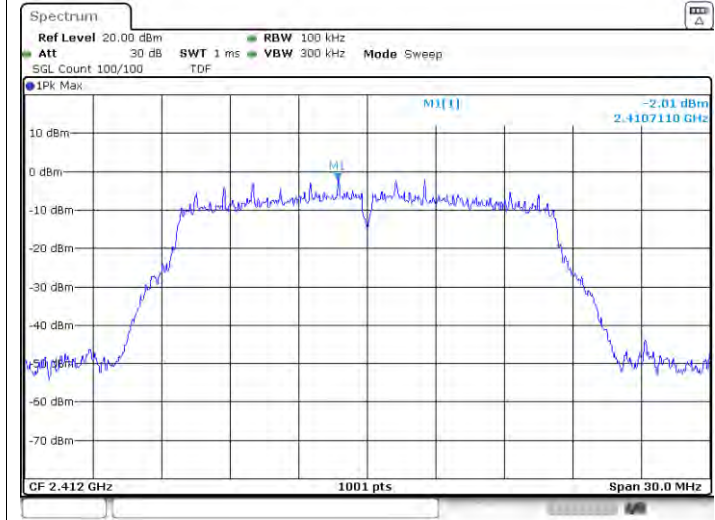

Tx. Spurious NVNT g 2412MHz Ant1 Emission

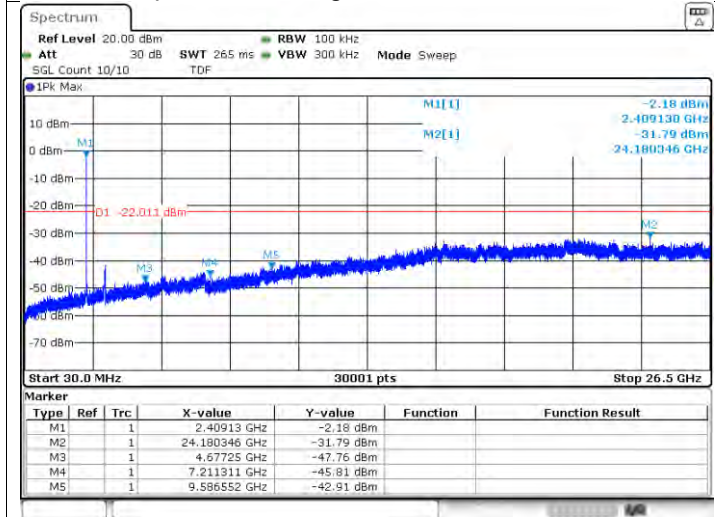


Tx. Spurious NVNT g 2437MHz Ant1 Ref

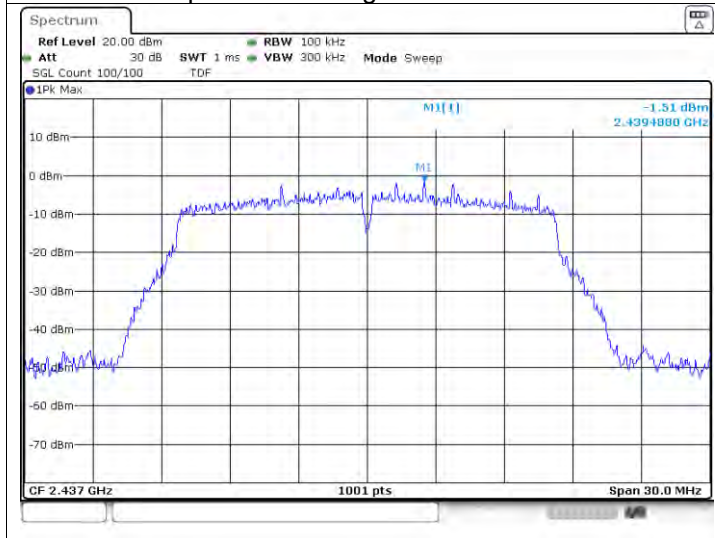





Tx. Spurious NVNT g 2437MHz Ant1 Emission

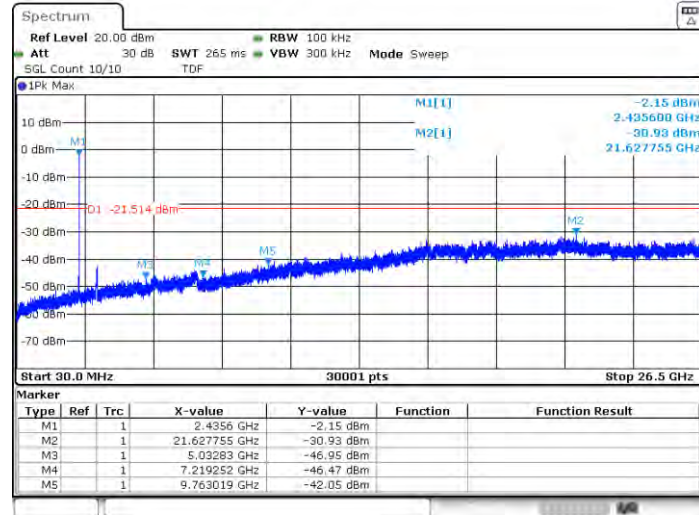

Tx. Spurious NVNT g 2462MHz Ant1 Ref

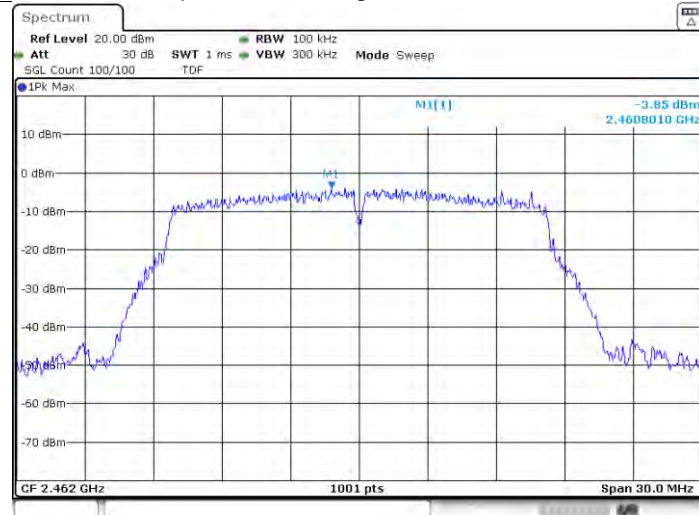


Tx. Spurious NVNT g 2462MHz Ant1 Emission

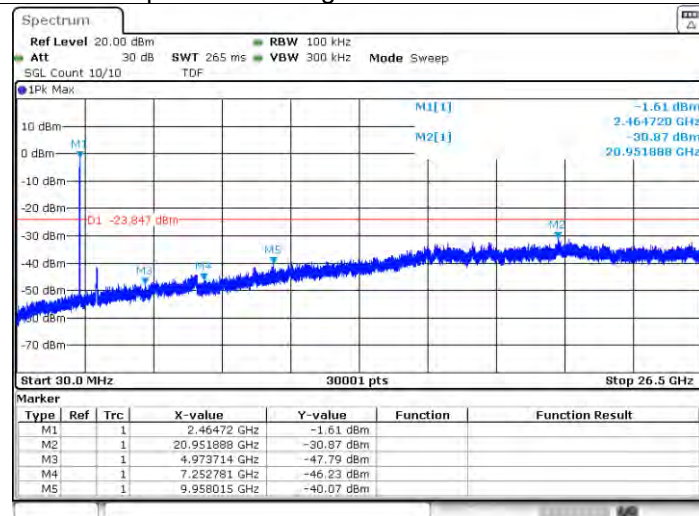





Tx. Spurious NVNT g 2412MHz Ant2 Ref

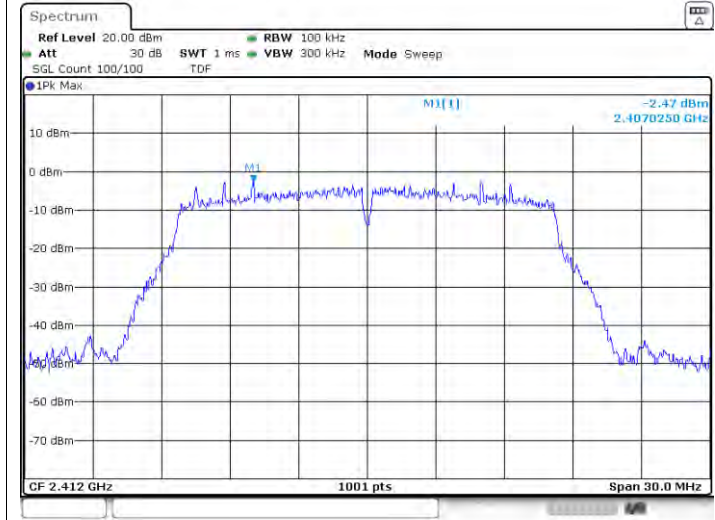

Tx. Spurious NVNT g 2412MHz Ant2 Emission

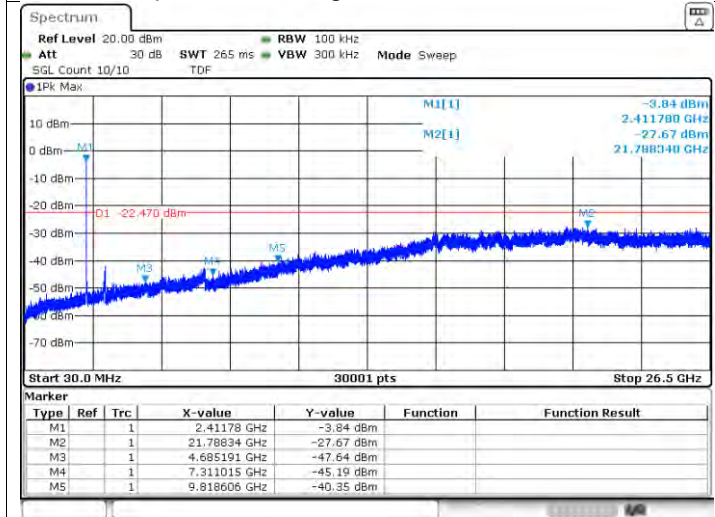


Tx. Spurious NVNT g 2437MHz Ant2 Ref

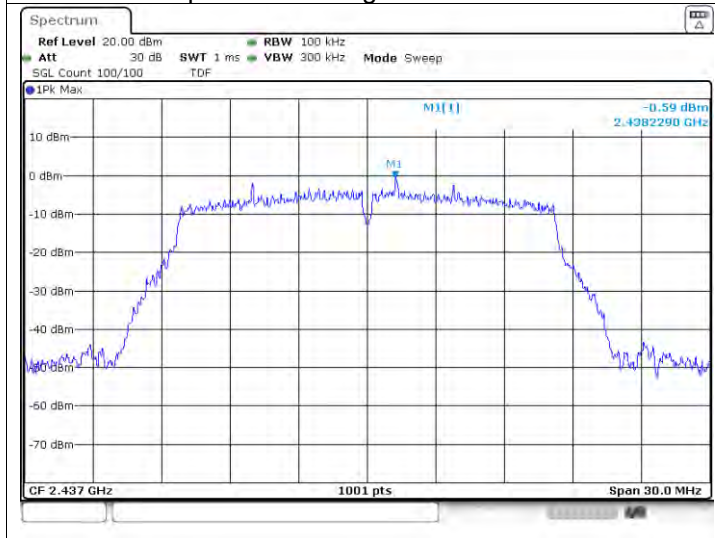





Tx. Spurious NVNT g 2437MHz Ant2 Emission

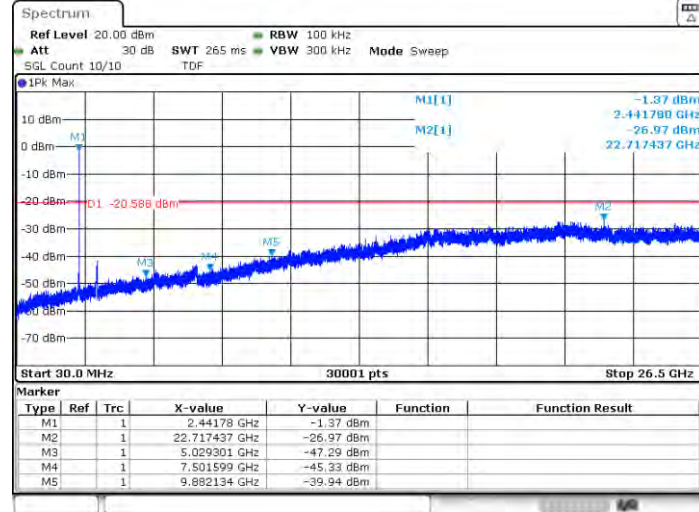

Tx. Spurious NVNT g 2462MHz Ant2 Ref

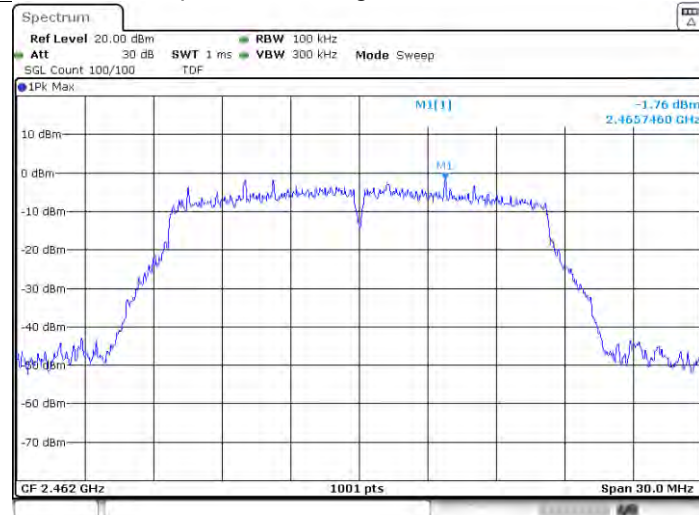


Tx. Spurious NVNT g 2462MHz Ant2 Emission

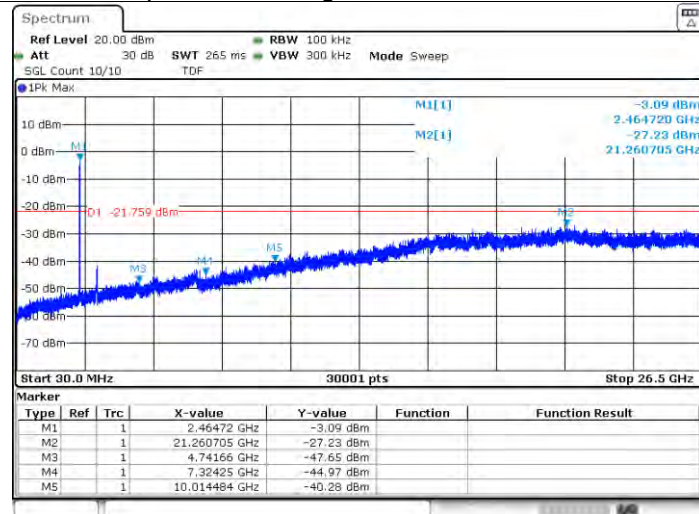





Tx. Spurious NVNT n20 2412MHz Ant1 Ref

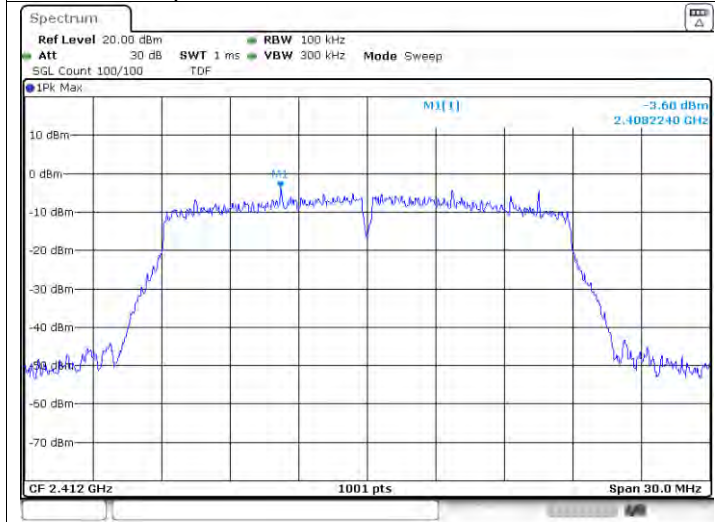

Tx. Spurious NVNT n20 2412MHz Ant1 Emission

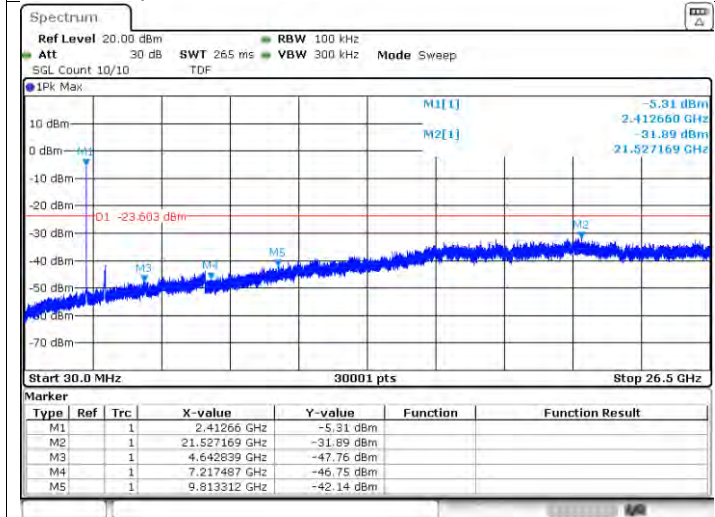


Tx. Spurious NVNT n20 2437MHz Ant1 Ref

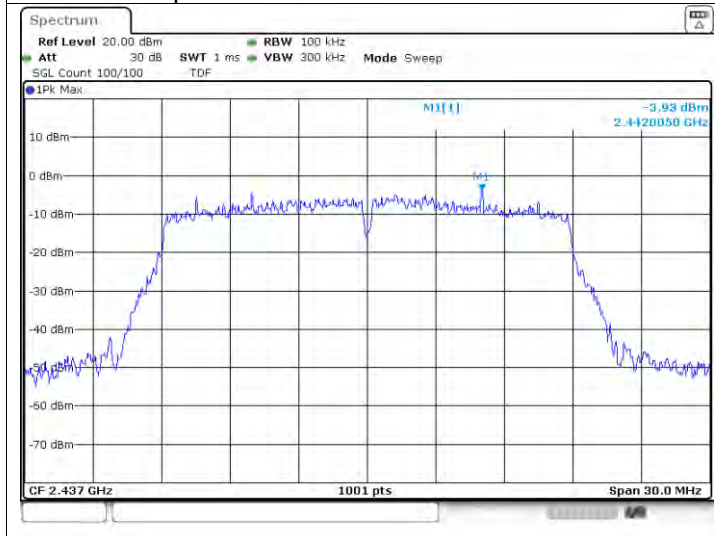





Tx. Spurious NVNT n20 2437MHz Ant1 Emission

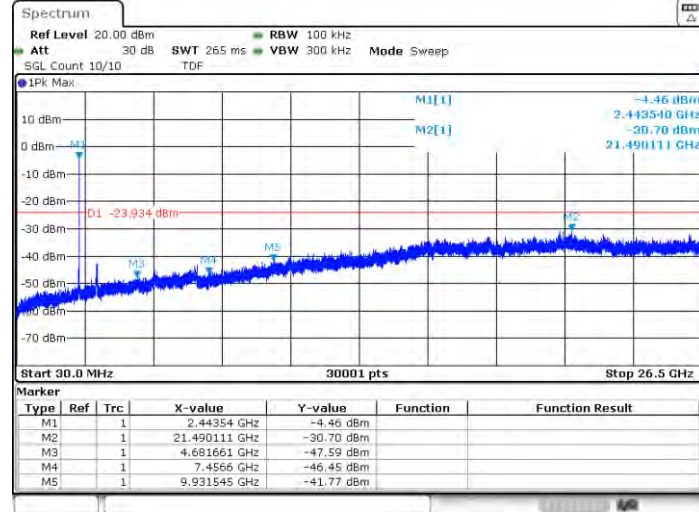

Tx. Spurious NVNT n20 2462MHz Ant1 Ref

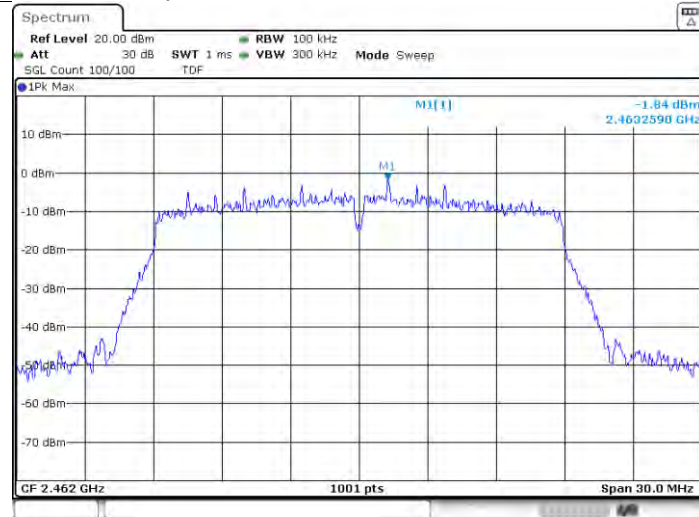

Tx. Spurious NVNT n20 2462MHz Ant1 Emission

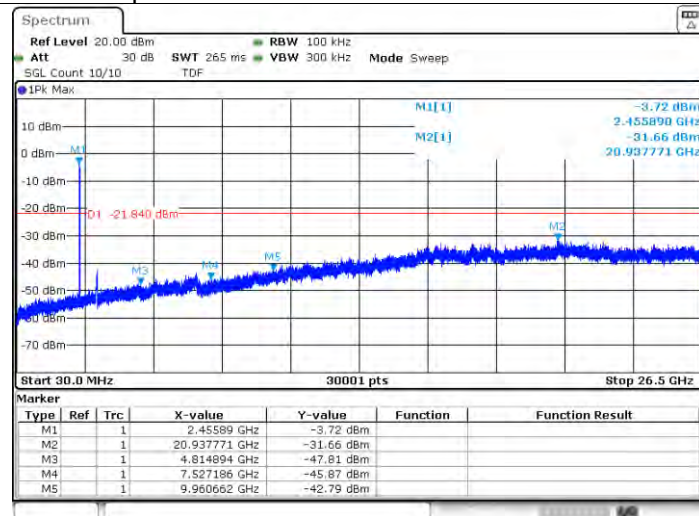





Tx. Spurious NVNT n20 2412MHz Ant2 Ref



Tx. Spurious NVNT n20 2412MHz Ant2 Emission

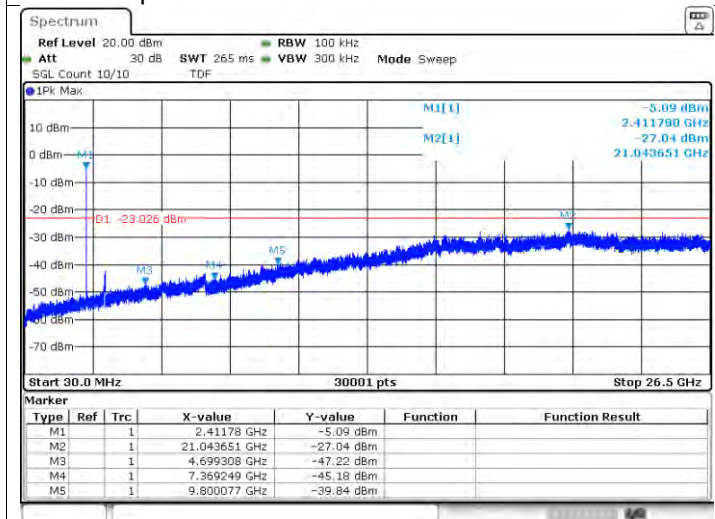


Tx. Spurious NVNT n20 2437MHz Ant2 Ref

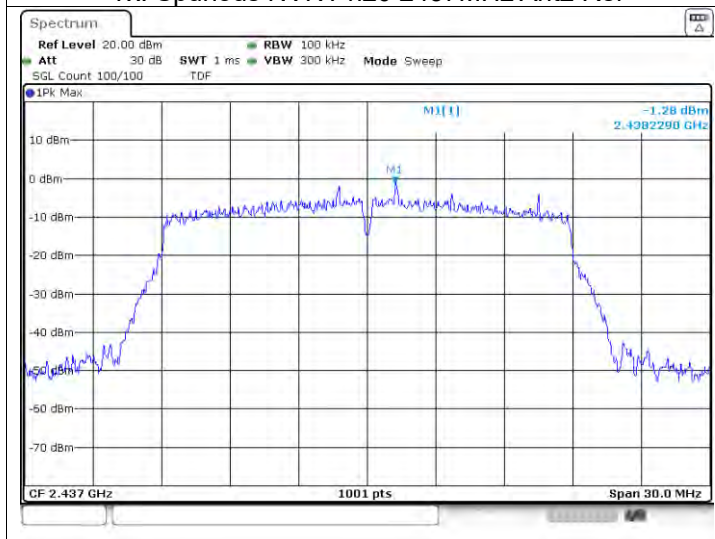





Tx. Spurious NVNT n20 2437MHz Ant2 Emission

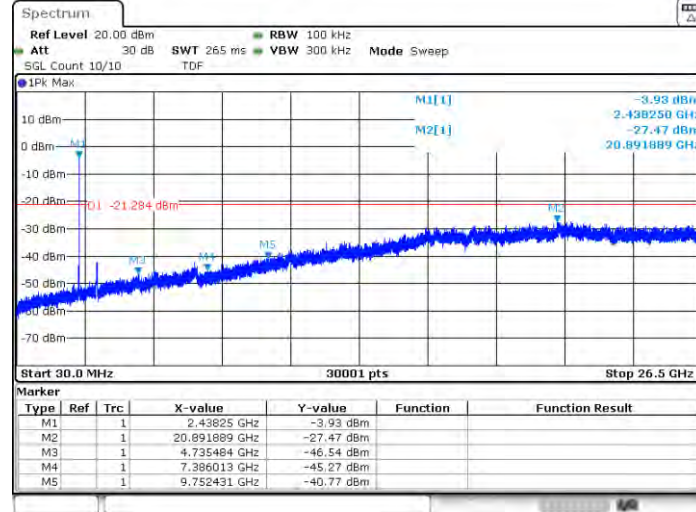

Tx. Spurious NVNT n20 2462MHz Ant2 Ref

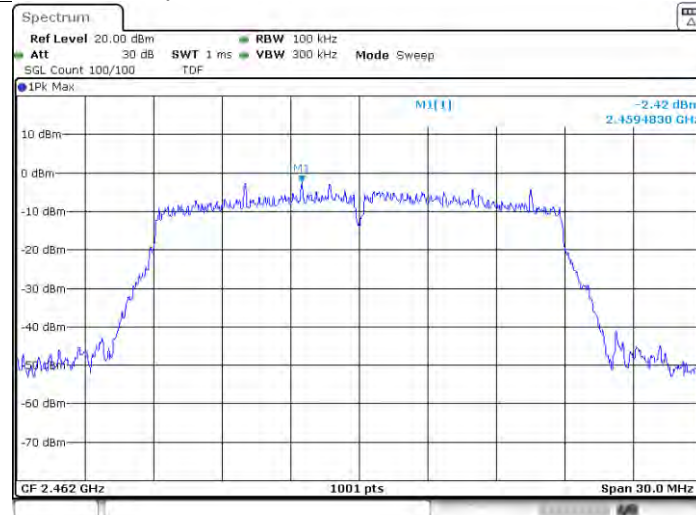


Tx. Spurious NVNT n20 2462MHz Ant2 Emission

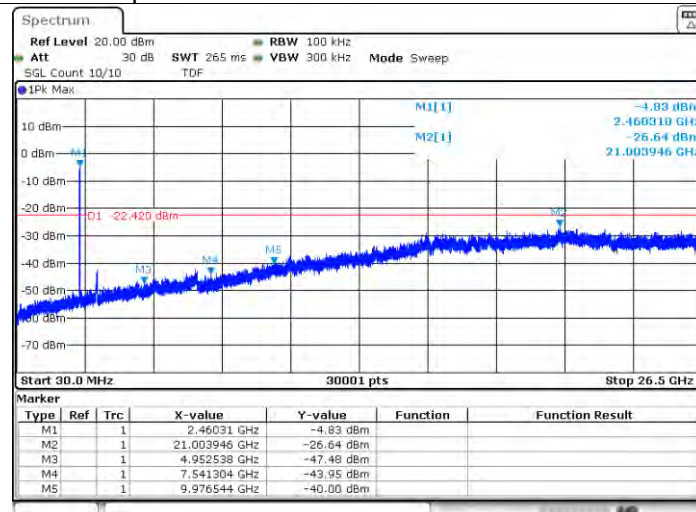





Tx. Spurious NVNT n40 2422MHz Ant1 Ref

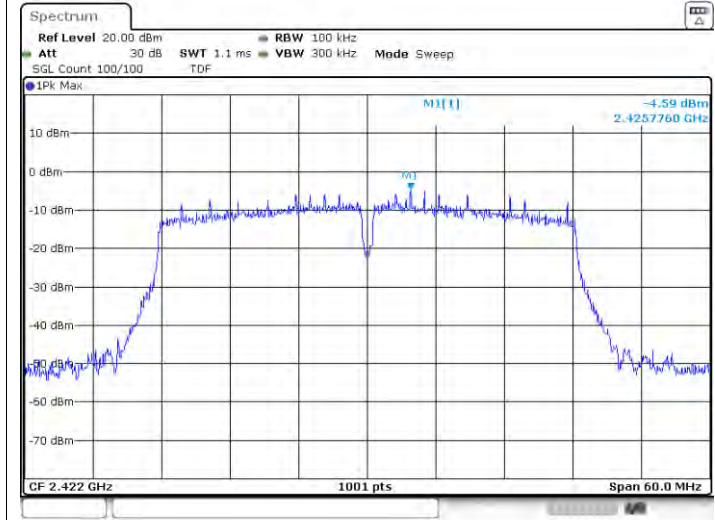

Tx. Spurious NVNT n40 2422MHz Ant1 Emission

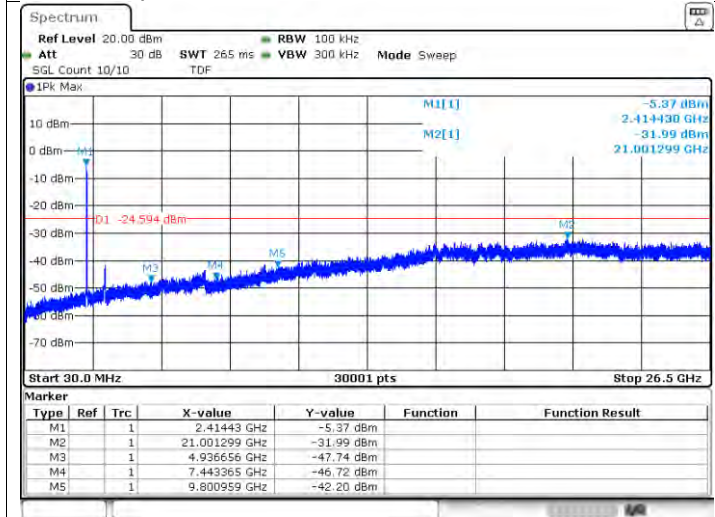


Tx. Spurious NVNT n40 2437MHz Ant1 Ref

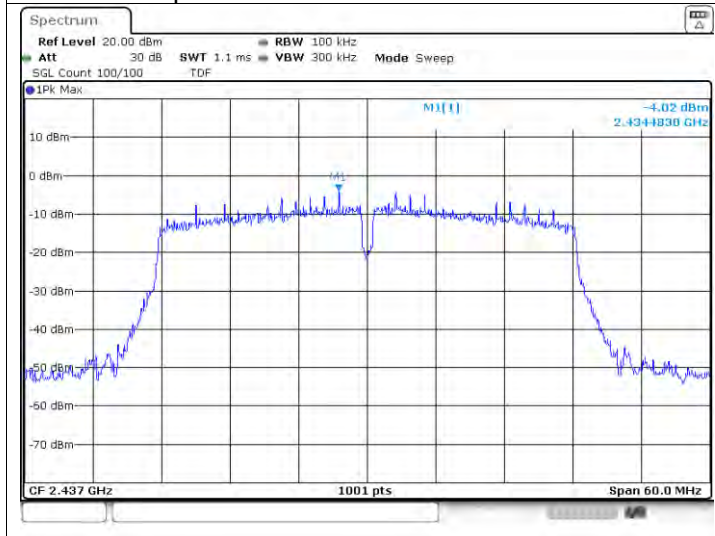





Tx. Spurious NVNT n40 2437MHz Ant1 Emission

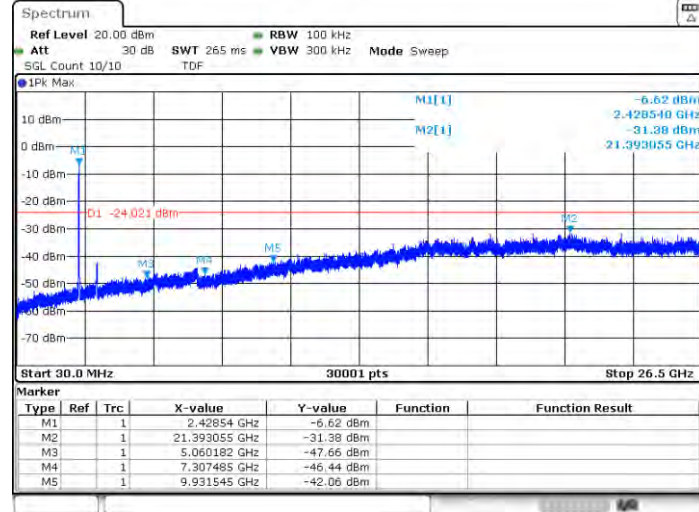

Tx. Spurious NVNT n40 2452MHz Ant1 Ref

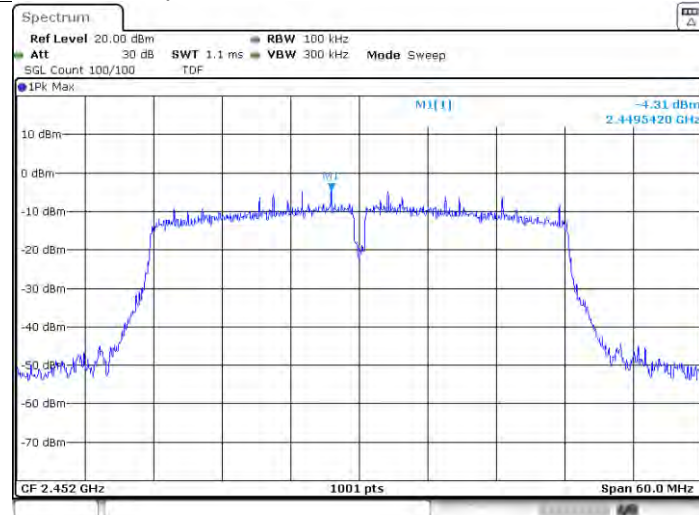

Tx. Spurious NVNT n40 2452MHz Ant1 Emission

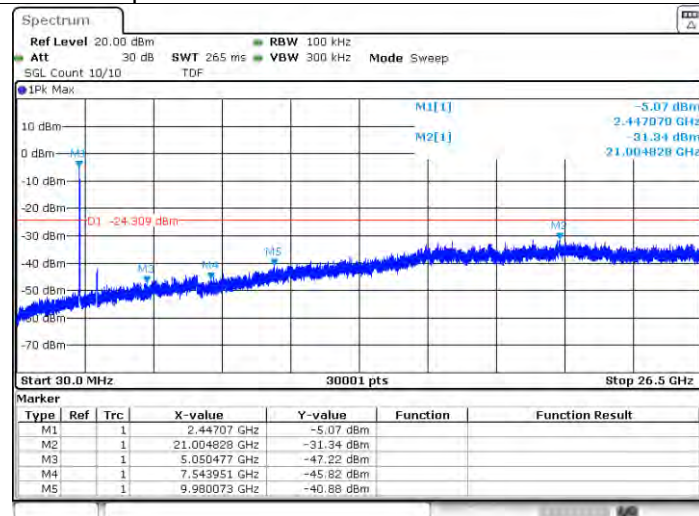





Tx. Spurious NVNT n40 2422MHz Ant2 Ref



Tx. Spurious NVNT n40 2422MHz Ant2 Emission

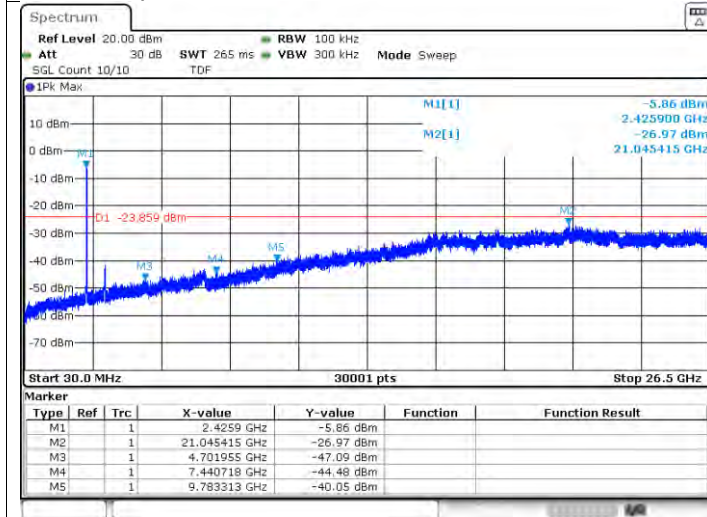


Tx. Spurious NVNT n40 2437MHz Ant2 Ref

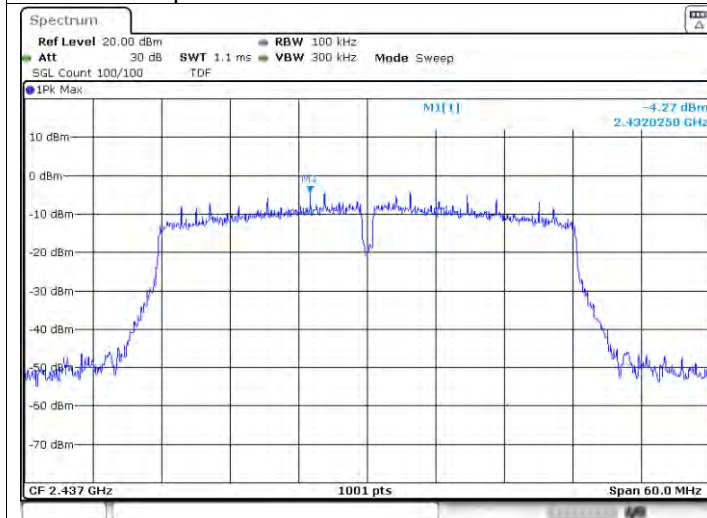





Tx. Spurious NVNT n40 2437MHz Ant2 Emission

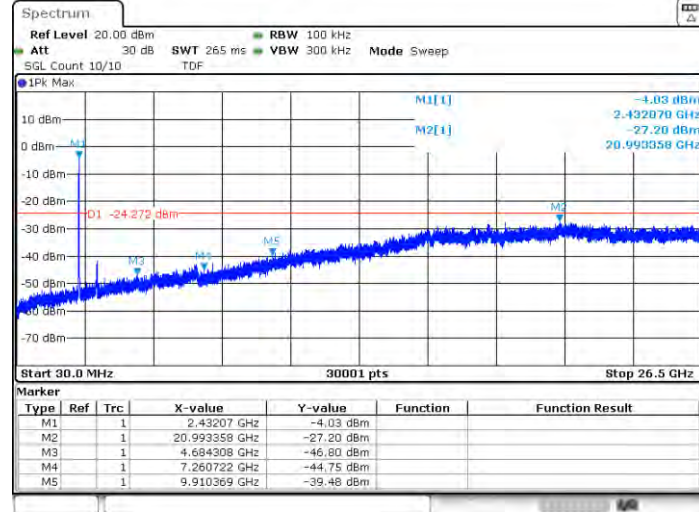

Tx. Spurious NVNT n40 2452MHz Ant2 Ref

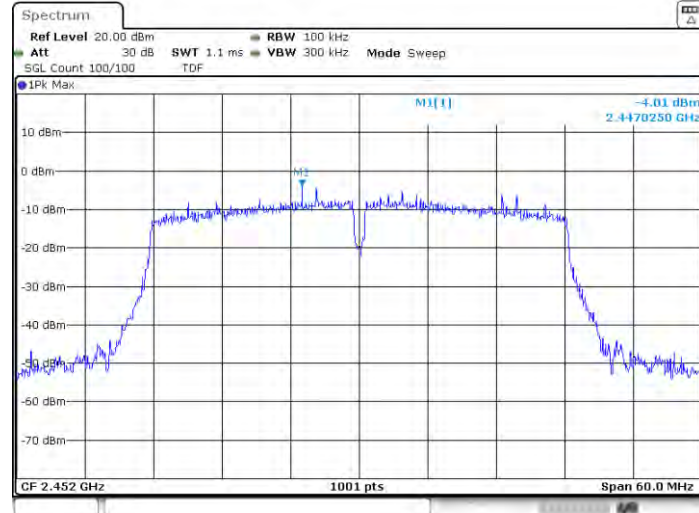

Tx. Spurious NVNT n40 2452MHz Ant2 Emission

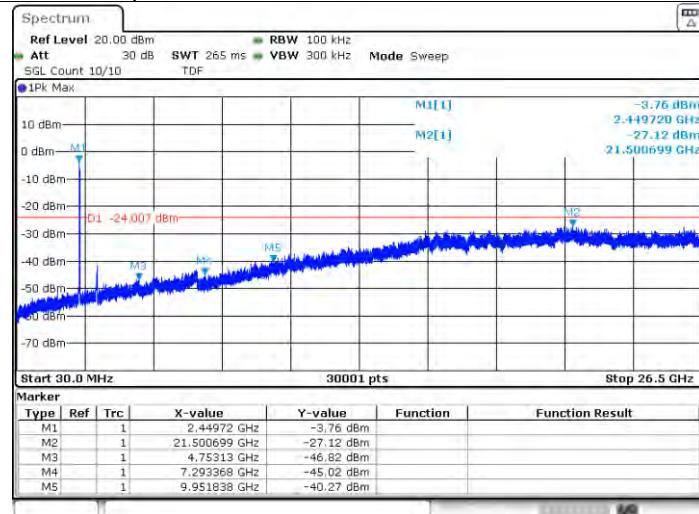



-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	b	2412	Ant1	8.539	0.5	Pass
NVNT	b	2437	Ant1	7.52	0.5	Pass
NVNT	b	2462	Ant1	8.02	0.5	Pass
NVNT	b	2412	Ant2	7.578	0.5	Pass
NVNT	b	2437	Ant2	7.039	0.5	Pass
NVNT	b	2462	Ant2	8.016	0.5	Pass
NVNT	g	2412	Ant1	15.627	0.5	Pass
NVNT	g	2437	Ant1	16.348	0.5	Pass
NVNT	g	2462	Ant1	16.445	0.5	Pass
NVNT	g	2412	Ant2	16.376	0.5	Pass
NVNT	g	2437	Ant2	16.325	0.5	Pass
NVNT	g	2462	Ant2	15.679	0.5	Pass
NVNT	n20	2412	Ant1	17.566	0.5	Pass
NVNT	n20	2437	Ant1	17.61	0.5	Pass
NVNT	n20	2462	Ant1	17.654	0.5	Pass
NVNT	n20	2412	Ant2	17.59	0.5	Pass
NVNT	n20	2437	Ant2	17.549	0.5	Pass
NVNT	n20	2462	Ant2	16.355	0.5	Pass
NVNT	n40	2422	Ant1	35.279	0.5	Pass
NVNT	n40	2437	Ant1	35.077	0.5	Pass
NVNT	n40	2452	Ant1	35.013	0.5	Pass
NVNT	n40	2422	Ant2	35.621	0.5	Pass
NVNT	n40	2437	Ant2	35.029	0.5	Pass
NVNT	n40	2452	Ant2	36.316	0.5	Pass



Test Graphs

-6dB Bandwidth NVNT b 2412MHz Ant1









-6dB Bandwidth NVNT b 2437MHz Ant1






-6dB Bandwidth NVNT b 2462MHz Ant1



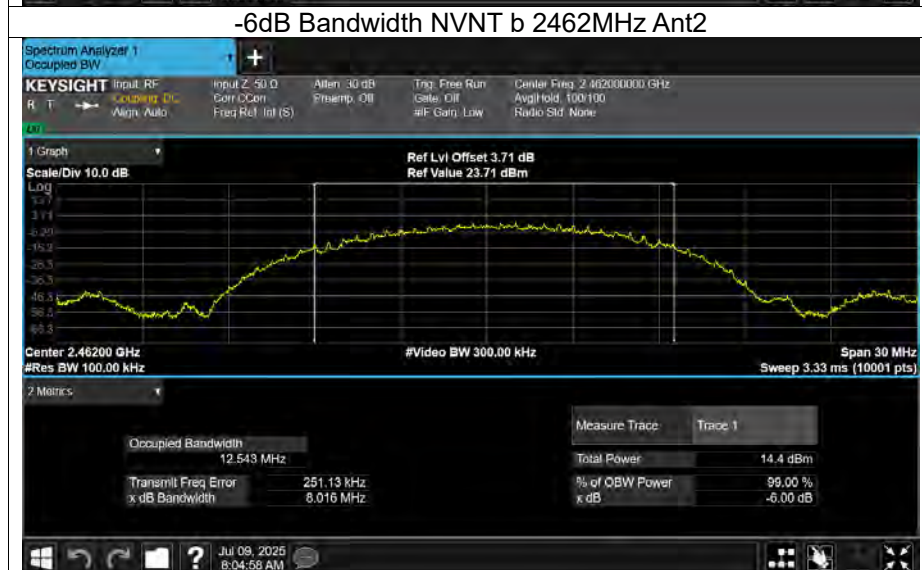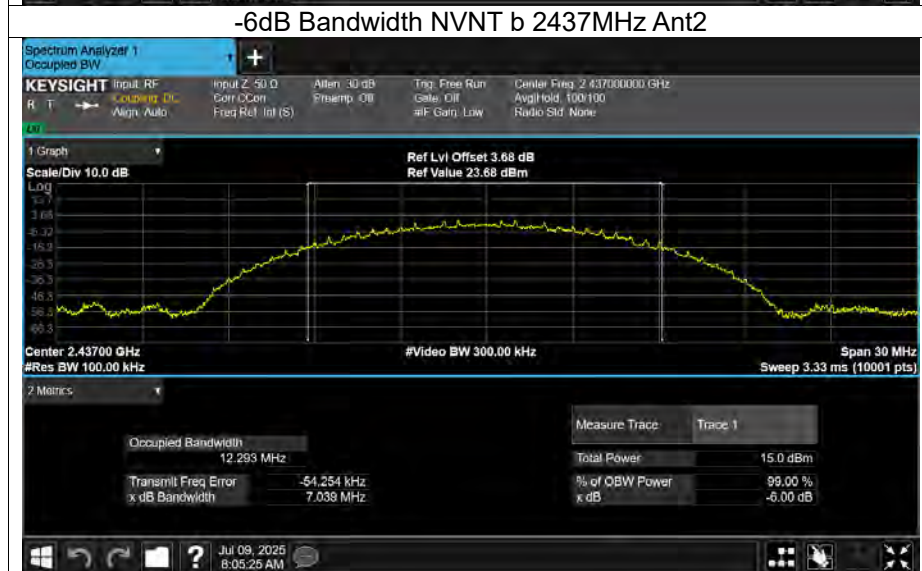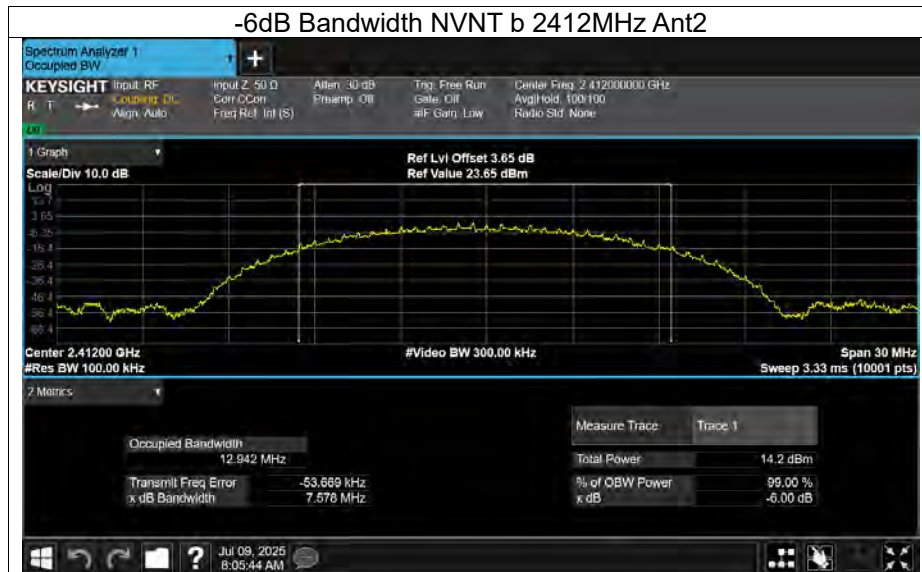

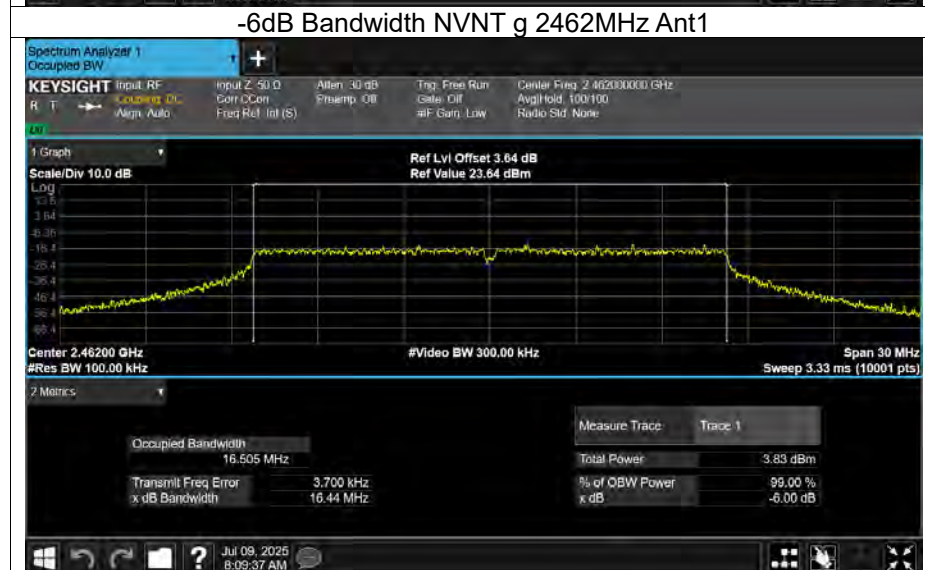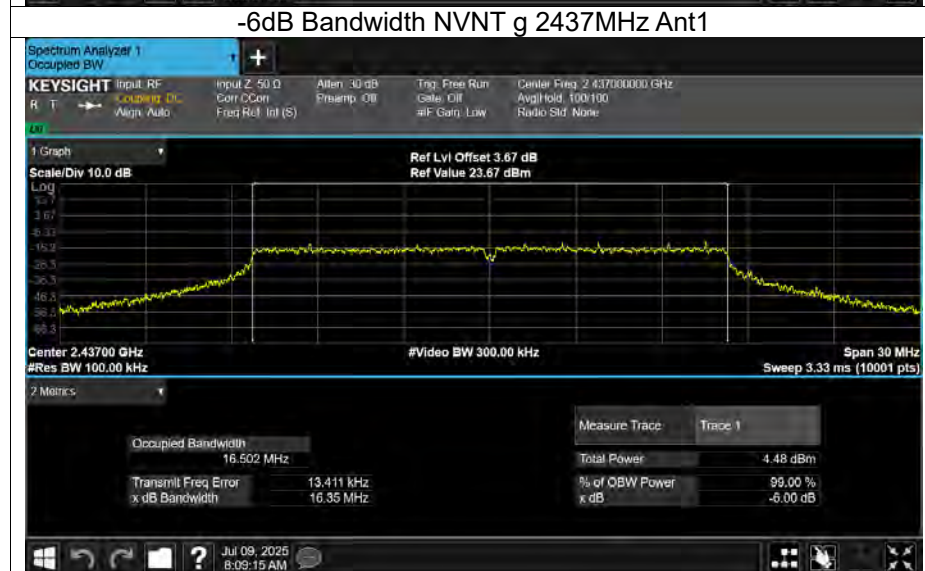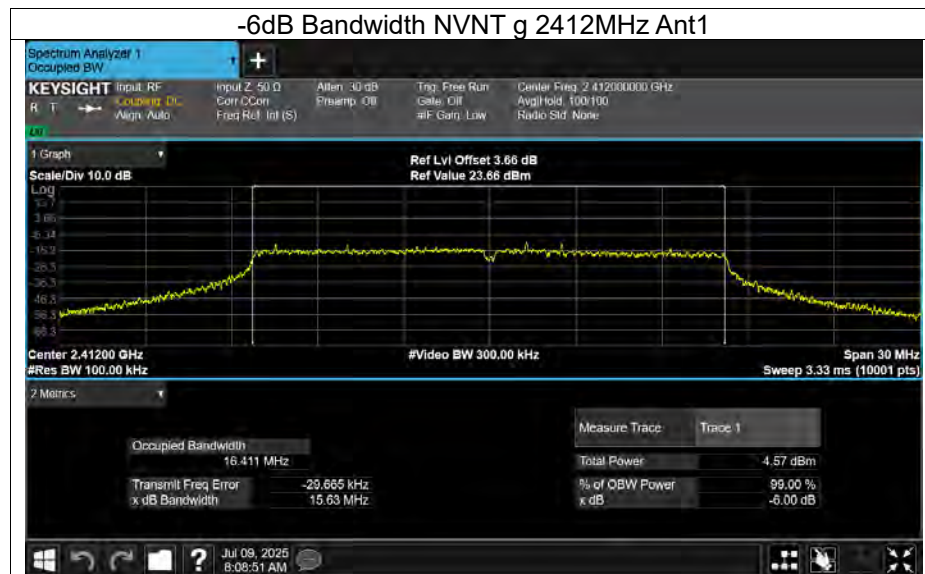

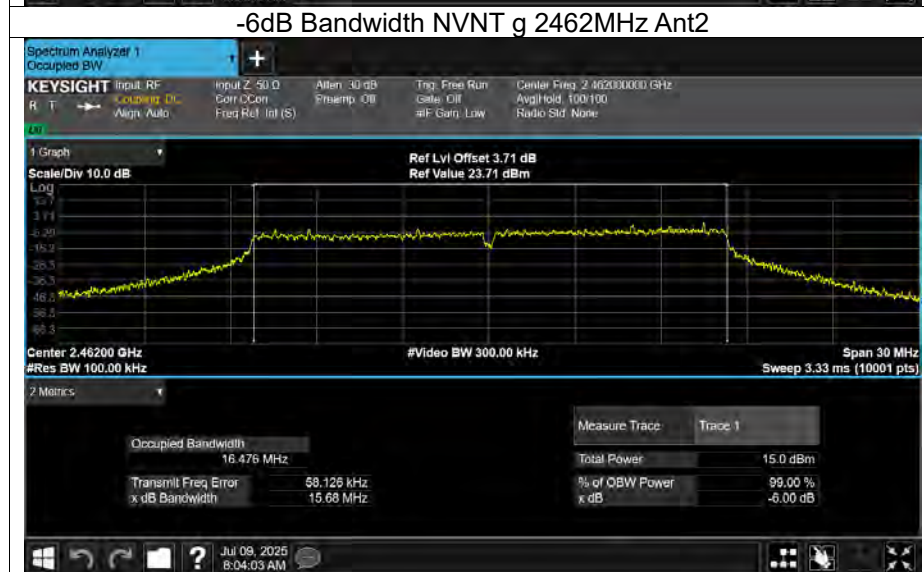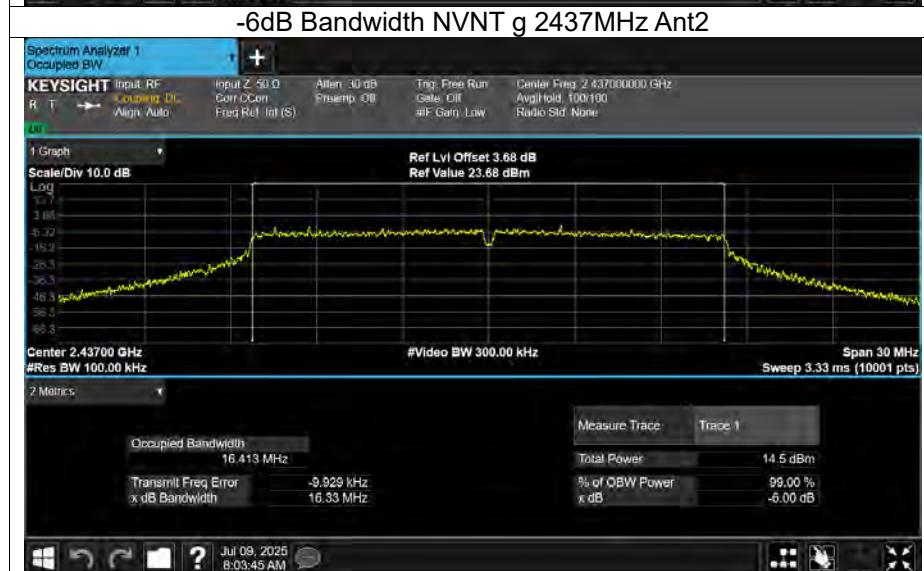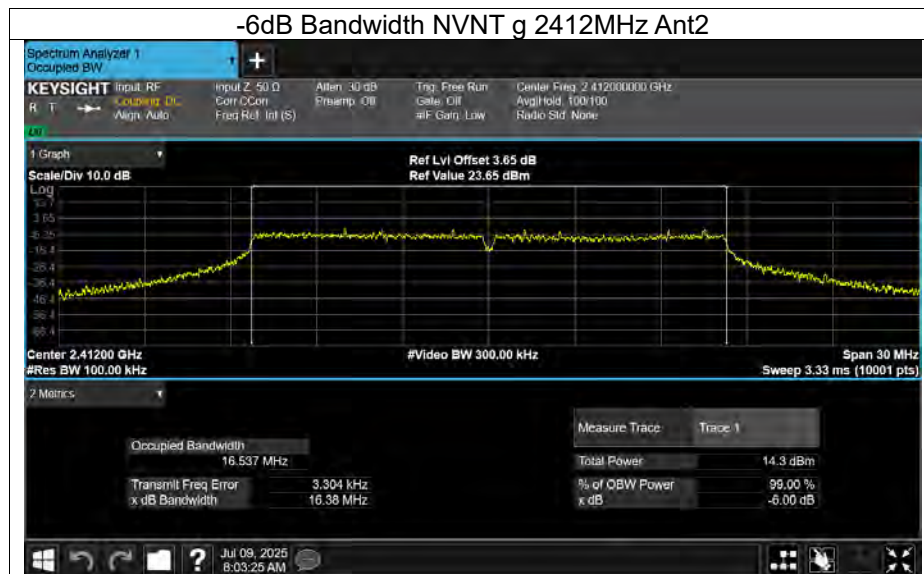





-6dB Bandwidth NVNT n40 2422MHz Ant1



-6dB Bandwidth NVNT n40 2437MHz Ant1



-6dB Bandwidth NVNT n40 2452MHz Ant1






-6dB Bandwidth NVNT n40 2422MHz Ant2



-6dB Bandwidth NVNT n40 2437MHz Ant2



-6dB Bandwidth NVNT n40 2452MHz Ant2

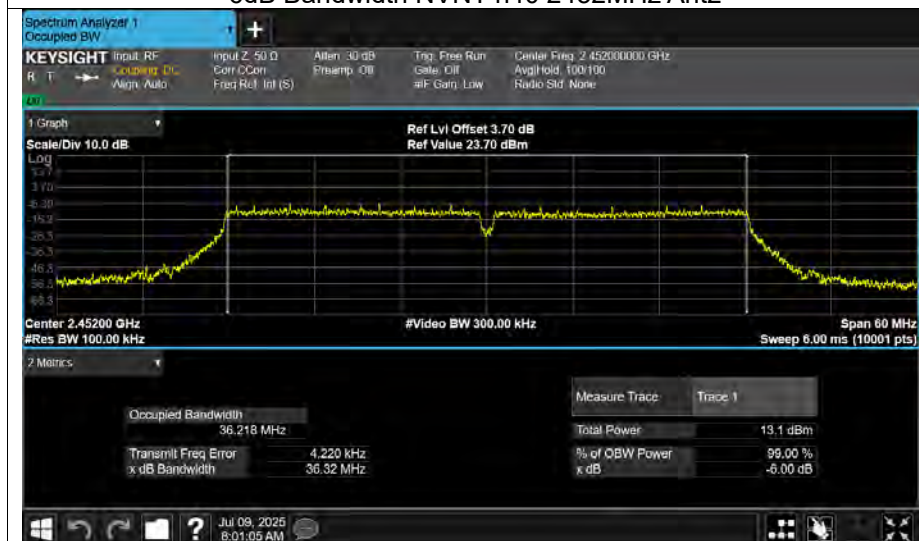



APPENDIX II - MEASUREMENT PHOTOS

Note: Please see the attached RF_Test Setup photos for FCC ID&IC.

※※※※※END OF THE REPORT※※※※※