

TEST REPORT

Applicant Name : Shenzhen Ipetmon Creative Technology Co., Ltd.
Address : 101, No.93 Boguang Second Road, Shangcun Community,
Gongming Street, Guangming District, Shenzhen, China
Report Number : 2504U29636E-RF-00C
FCC ID: 2A4A7-PTM-201

Test Standard (s)

FCC PART 15.407

Sample Description

Product Type: Automatic Pet Feeder
Model No.: PTM-201, PTM-801
Trade Mark: N/A
Date Received: 2025-06-13
Date of Test: 2025-06-22 to 2025-07-02
Report Date: 2025-07-05


Test Result:	The EUT complied with the standards above.
--------------	--

Prepared and Checked By:



Matt Liang
EMC Engineer

Approved By:



Bob Liao
EMC Engineer

Note: This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA, or any agency of the Federal Government. The information marked “#” is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included but no need marked.
This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Shenzhen Accurate Technology Co., Ltd.

Floor 1, KuMaKe Building, Dongzhou Community, Guangming Street, Guangming District, Shenzhen, Guangdong, China.

Tel: +86 755-26503290

Web: www.atc-lab.com

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	4
GENERAL INFORMATION.....	5
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
OBJECTIVE	6
TEST METHODOLOGY	6
TEST FACILITY	6
MEASUREMENT UNCERTAINTY	6
SYSTEM TEST CONFIGURATION	7
DESCRIPTION OF TEST CONFIGURATION.....	7
EUT EXERCISE SOFTWARE AND POWER LEVEL #	7
DUTY CYCLE.....	7
SUPPORT EQUIPMENT LIST AND DETAILS	8
EXTERNAL I/O CABLE.....	8
BLOCK DIAGRAM OF TEST SETUP	8
SUMMARY OF TEST RESULTS	10
TEST EQUIPMENT LIST	11
FCC §15.203-ANTENNA REQUIREMENT	13
APPLICABLE STANDARD.....	13
ANTENNA CONNECTOR CONSTRUCTION	13
FCC §15.407 (B) (8) §15.207 (A)-CONDUCTED EMISSIONS	14
APPLICABLE STANDARD.....	14
EUT SETUP	14
EMI TEST RECEIVER SETUP	14
TEST PROCEDURE	14
CALCULATION	15
TEST DATA	15
FCC §15.205 & §15.209 & §15.407(B) (1), (4), (8), (9), (10)-UNDESIRABLE EMISSION.....	18
APPLICABLE STANDARD.....	18
EUT SETUP	18
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	20
TEST PROCEDURE	20
CALCULATION	21
TEST DATA	21
FCC §15.407(a)(e)-BANDWIDTH	119
APPLICABLE STANDARD.....	119
TEST PROCEDURE	119
TEST DATA	120
FCC §15.407(a) (1) (3)-CONDUCTED TRANSMITTER OUTPUT POWER	121
APPLICABLE STANDARD.....	121
TEST PROCEDURE	121
TEST DATA	121
FCC §15.407(a) (1) (3)-POWER SPECTRAL DENSITY	122
APPLICABLE STANDARD.....	122
TEST PROCEDURE	123
TEST DATA	123

APPENDIX (RF TEST RESULTS) 124

 EMISSION BANDWIDTH..... 124

 99% OCCUPIED BANDWIDTH 129

 MAXIMUM CONDUCTED OUTPUT POWER 134

 POWER SPECTRAL DENSITY 136

 DUTY CYCLE..... 141

EXHIBIT A-EUT PHOTOGRAPHS 144

EXHIBIT B-TEST SETUP PHOTOGRAPHS 145

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
Rev.00	2504U29636E-RF-00C	Original Report	2025-07-05

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	Automatic Pet Feeder
Tested Model	PTM-201
Multiple Model	PTM-801
Model Difference [#]	The difference between models is model name. Please refer to DOS letter for details. The applicant provided model “PTM-201” for testing.
Voltage Range [#]	DC 5V from adapter 3 x Alkaline D Battery (not included) for backup
Adapter Information [#]	Model: TPA-418G050100UU01 Input: 100-240V~, 50/60Hz 0.3A Output: 5.0V ---1.0A 5.0W

Frequency Range	5G Wi-Fi: 5150-5250MHz; 5725-5850MHz
Mode	802.11a/n20/n40
Maximum Conducted Average Output Power	5150-5250MHz: 10.67dBm
	5725-5850MHz: 13.25dBm
Modulation Technique	OFDM
Antenna Specification [#]	5150-5250MHz: 1.97dBi 5725-5850MHz: -0.76dBi (It is provided by the applicant.)
Sample Serial Number	34RU-1 (For CE&RE Test), 34RF-1 (For RF Conducted Test) (Assigned by ATC, Shenzhen)
Sample/EUT Status	Good condition
Note: The device is belong a client device.	

Objective

This type approval report is in accordance with Part 2-Subpart J, Part 15-Subparts A and E of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart E, section 15.203, 15.205, 15.207, 15.209 and 15.407 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2020, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices. And KDB789033D02 General U-NII Test Procedures New Rules v02r01.

Unless otherwise stated there are no any additions to, deviations, or exclusions from the method.

Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the Floor 1, KuMaKe Building, Dongzhou Community, Guangming Street, Guangming District, Shenzhen, Guangdong, China.

Accredited by American Association for Laboratory Accreditation (A2LA).The Certificate Number is 4297.01.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		5 %
RF Frequency		0.064×10^{-7}
RF output power, conducted		0.3 dB
Unwanted Emission, conducted		1.2 dB
AC Power Lines Conducted Emissions		2.7 dB
Emissions, Radiated	9kHz - 30MHz	2.1 dB
	30MHz - 1GHz	4.3 dB
	1GHz - 18GHz	4.9 dB
	18GHz - 26.5GHz	5.2 dB
	26.5GHz - 40GHz	4.6 dB
Temperature		1 °C
Humidity		7 %
Supply voltages		0.4 %

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

For 5150-5250MHz, 6 channels are provided to testing:

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
36	5180	38	5190	40	5200	44	5220
46	5230	48	5240	/	/	/	/

For 802.11a/n20, Channel 36, 40 and 48 were tested.
For 802.11n40, Channel 38, 46 were tested.

For 5725-5850MHz, 7 channels are provided to testing:

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
149	5745	151	5755	153	5765	157	5785
159	5795	161	5805	165	5825	/	/

For 802.11a/n20, Channel 149, 157 and 165 were tested.
For 802.11n40, Channel 151 and 159 were tested.

EUT Exercise Software and Power Level #

Exercise Software:	AmebaD_mptool_2V1			
For 5150-5250MHz:				
Mode	Data Rate	Power Level		
		Lowest Channel	Middle Channel	Highest Channel
802.11 a	6Mbps	100	100	100
802.11 n20	MCS0	100	100	100
802.11 n40	MCS0	100	/	100
For 5725-5850MHz:				
Mode	Data Rate	Power Level		
		Lowest Channel	Middle Channel	Highest Channel
802.11 a	6Mbps	100	100	100
802.11 n20	MCS0	100	100	100
802.11 n40	MCS0	100	/	100

Note 1: The information in the above table is provided by the applicant.
Note 2: The worse-case data rates are determined to be as above for each mode based upon investigations by measuring the output power and PSD across all data rates, bandwidths and modulations.

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Duty Cycle

Test result: Please refer to Appendix.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
/	/	/	/

External I/O Cable


Cable Description	Shielding Type	Length (m)	From Port	To
DC Cable	NO	1.5	Adapter	EUT

Block Diagram of Test Setup


For Conducted Emission:

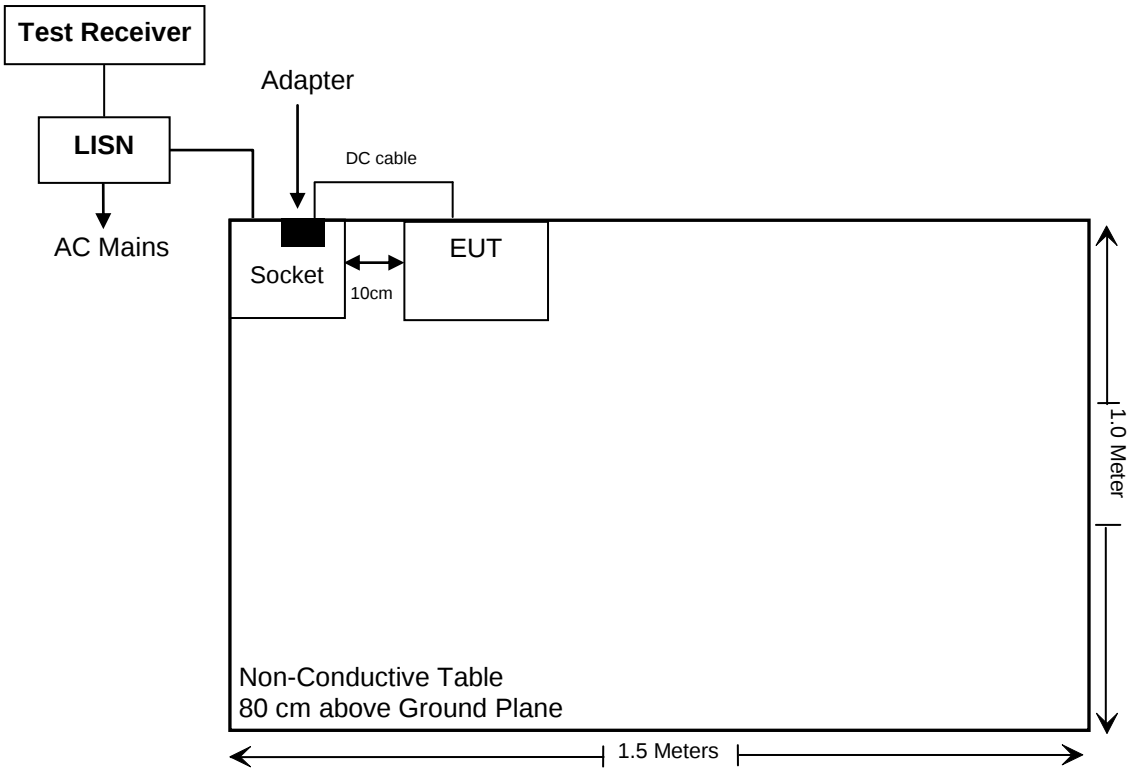

For Radiated Emission Below 1GHz:

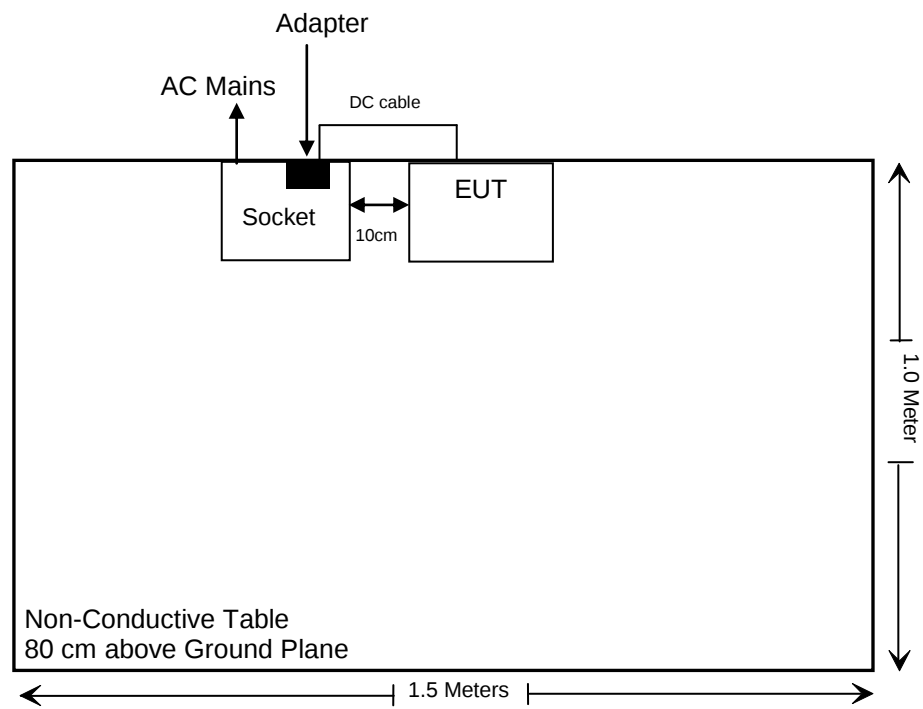

For Radiated Emission Above 1GHz:

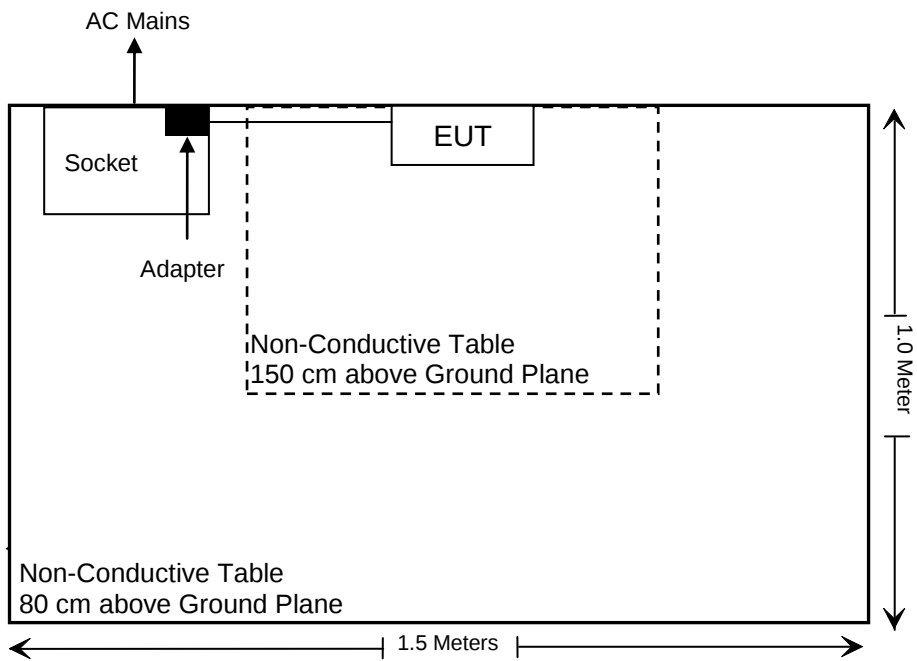

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.407(b)(8), §15.207(a)	Conducted Emissions	Compliance
§15.205, §15.209, §15.407(b)(1),(4),(8),(9),(10)	Undesirable Emission & Restricted Bands	Compliance
§15.407(a)(12),(e)	Bandwidth	Compliance
§15.407(a)(1),(3)	Conducted Transmitter Output Power	Compliance
§15.407(a)(1),(3)	Power Spectral Density	Compliance
§15.407(h) (1), (2)	Transmit Power Control (TPC) & Dynamic Frequency Selection (DFS)	Not Applicable

- Note 1: Not Applicable: the EUT not operating within frequency range of 5250-5350MHz & 5470-5725MHz.
- Note 2: For AC line conducted emissions, the maximum output power mode and channel was tested.
- Note 3: For Radiated Spurious Emissions 9kHz~1GHz/18GHz~40GHz, the maximum output power mode and channel was tested.
- Note 4: This device is installed vertically in Y-axes orientation. It was provided by applicant. The Y-axes orientation was tested and recorded in the report.
- Note 5: The cable loss is 0.5dB, which was added into the all RF test results.

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	100784	2024/11/08	2025/11/07
Rohde & Schwarz	L.I.S.N.	ENV216	101314	2024/11/08	2025/11/07
Anritsu Corp	50 Coaxial Switch	MP59B	6100237248	2024/10/08	2025/10/07
Rohde & Schwarz	Pulse Limiter	ESH3-Z2	100312	2024/10/08	2025/10/07
Unknown	RF Coaxial Cable	No.17	N0350	2024/10/08	2025/10/07
Test Software: e3 191218 (V9)					
Radiated Spurious Emission Test(Below 1GHz)					
Rohde & Schwarz	Test Receiver	ESR	102725	2024/11/08	2025/11/07
SONOMA INSTRUMENT	Amplifier	310N	186131	2025/03/26	2026/03/25
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2024/08/08	2027/08/07
Unknown	RF Coaxial Cable	No.12	N040	2024/10/08	2025/10/07
Unknown	RF Coaxial Cable	No.13	N300	2024/10/08	2025/10/07
Unknown	RF Coaxial Cable	No.14	N800	2024/10/08	2025/10/07
BACL	LOOP ANTENNA	1313-1A	3110711	2024/01/16	2027/01/15
Test Software: e3 191218 (V9)					
Radiated Spurious Emission Test(Above 1GHz)					
Rohde & Schwarz	Spectrum Analyzer	FSV40	101949	2024/10/08	2025/10/07
Decentest	Filter Switch Unit	DT7220FSU	DQ77927	2024/10/08	2025/10/07
Decentest	Multiplex Switch Test Control Set	DT7220CSU	DQ77924	2024/10/08	2025/10/07
A.H. Systems, inc.	Preamplifier	PAM-0118	226	2025/03/20	2026/03/19
Schwarzbeck	Horn Antenna	BBHA9120D	837	2023/02/22	2026/02/21
Unknown	RF Coaxial Cable	No.10	N050	2024/10/08	2025/10/07
Unknown	RF Coaxial Cable	No.11	N1000	2024/10/08	2025/10/07
Unknown	RF Coaxial Cable	No.19	N500	2024/10/08	2025/10/07
Schwarzbeck	HORN ANTENNA	BBHA9170	9170-359	2023/12/12	2026/12/11
BACL	Amplifier	BACL-1313-A1840	4012521	2024/07/05	2025/07/04
Unknown	RF Coaxial Cable	No.15	N600	2024/10/08	2025/10/07
Unknown	RF Coaxial Cable	No.16	N650	2024/10/08	2025/10/07
Test Software: e3 191218 (V9)					

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted test					
Rohde & Schwarz	Spectrum Analyzer	FSV-40	101948	2024/10/08	2025/10/07
Anritsu	Microwave Peak Power Sensor	MA24418A	12619	2025/03/26	2026/03/25
WEINSCHEL	10dB Attenuator	5324	AU 3842	2024/10/08	2025/10/07
Test Software: JDAutoTestSystem V1.0.0					

*** Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.203-ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.407 (a), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has one internal antenna arrangement, which were permanently attached to the EUT, fulfill the requirement of this section. Please refer to the EUT photos.

Frequency Range	Antenna gain
5150-5250MHz	1.97dBi
5725-5850MHz	-0.76dBi


Result: Compliance.

FCC §15.407 (B) (8) §15.207 (A)-CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207, §15.407(b) (8)

EUT Setup

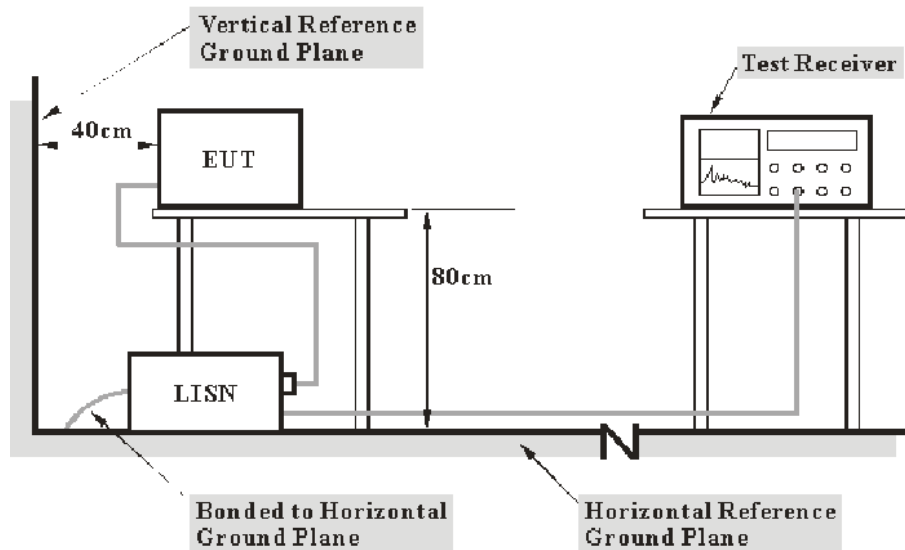

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2020 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Calculation

The Factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Limiter Attenuation. The basic equation is as follows:

Factor = LISN VDF + Cable Loss + 10dB Attenuation(Limiter)

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

Over Limit = Level - Limit

Level = Read Level + Factor

Test Data


Environmental Conditions

Temperature:	24.2 °C
Relative Humidity:	53 %
ATM Pressure:	99.7 kPa
Test Engineer:	Jason Fan
Test Date:	2025-06-25
EUT Operation Mode:	5G WIFI Transmitting

Test Result: Compliance, please refer to the below data.

Note: The maximum output power mode and channel: 802.11n40 5755MHz was tested.


AC 120V/60Hz, Line:

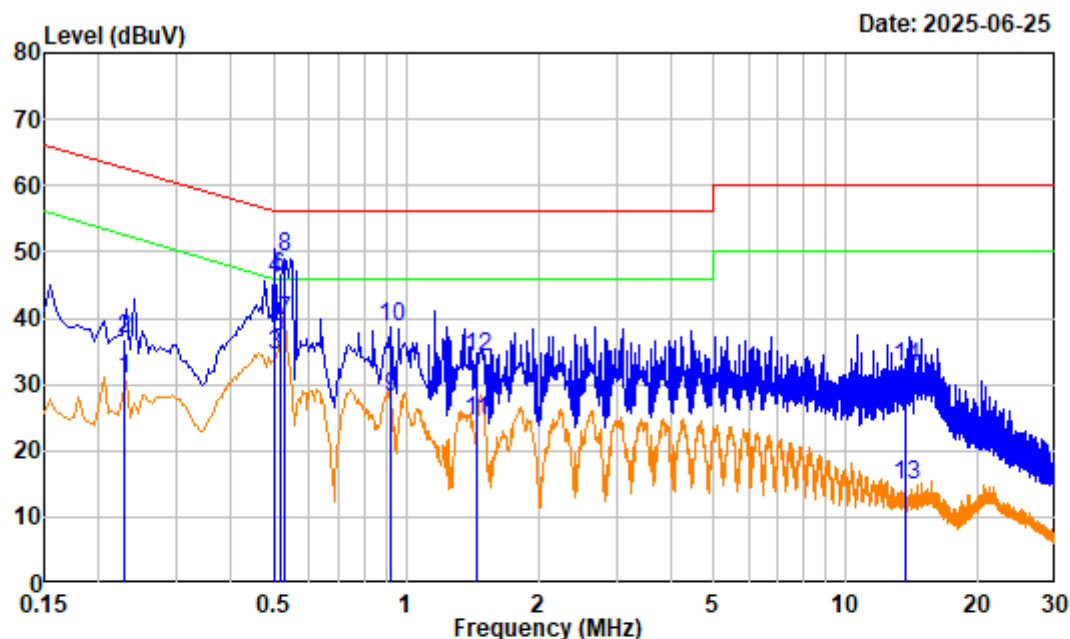

Site : Shielding Room
 Condition : Line
 Project No. : 2504U29636E-RF Tester: Jason Fan
 Test Mode : 5G WIFI Transmitting
 Note : Adapter
 Receiver Setting: IF B/W 9kHz PK/AV

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.228	20.29	10.55	30.84	52.53	-21.69	Average
2	0.228	20.29	16.54	36.83	62.53	-25.70	QP
3	0.500	20.12	14.20	34.32	46.00	-11.68	Average
4	0.500	20.12	25.69	45.81	56.00	-10.19	QP
5	0.515	20.15	16.84	36.99	46.00	-9.01	Average
6	0.515	20.15	26.11	46.26	56.00	-9.74	QP
7	0.530	20.19	19.42	39.61	46.00	-6.39	Average
8	0.530	20.19	29.01	49.20	56.00	-6.80	QP
9	0.920	20.66	7.45	28.11	46.00	-17.89	Average
10	0.920	20.66	17.89	38.55	56.00	-17.45	QP
11	1.443	20.71	3.76	24.47	46.00	-21.53	Average
12	1.443	20.71	13.42	34.13	56.00	-21.87	QP
13	13.653	19.81	-4.97	14.84	50.00	-35.16	Average
14	13.653	19.81	12.88	32.69	60.00	-27.31	QP

AC 120V/60Hz, Neutral:

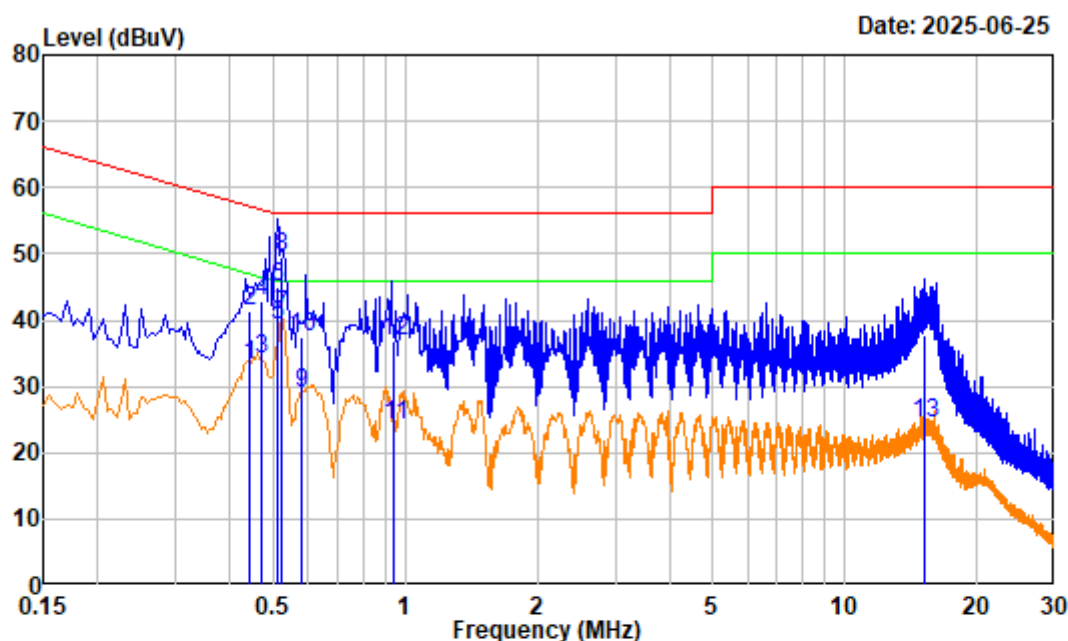

Site : Shielding Room
 Condition : neutral
 Project No. : 2504U29636E-RF Tester: Jason Fan
 Test Mode : 5G WIFI Transmitting
 Note : Adapter
 Receiver Setting: IF B/W 9kHz PK/AV

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.442	20.33	12.97	33.30	47.02	-13.72	Average
2	0.442	20.33	21.13	41.46	57.02	-15.56	QP
3	0.472	20.38	13.77	34.15	46.47	-12.32	Average
4	0.472	20.38	22.57	42.95	56.47	-13.52	QP
5	0.510	20.44	18.70	39.14	46.00	-6.86	Average
6	0.510	20.44	24.40	44.84	56.00	-11.16	QP
7	0.525	20.46	20.17	40.63	46.00	-5.37	Average
8	0.525	20.46	29.10	49.56	56.00	-6.44	QP
9	0.578	20.54	8.41	28.95	46.00	-17.05	Average
10	0.578	20.54	16.93	37.47	56.00	-18.53	QP
11	0.943	20.71	3.42	24.13	46.00	-21.87	Average
12	0.943	20.71	16.01	36.72	56.00	-19.28	QP
13	15.235	20.05	4.40	24.45	50.00	-25.55	Average
14	15.235	20.05	17.54	37.59	60.00	-22.41	QP

FCC §15.205 & §15.209 & §15.407(B) (1), (4), (8), (9), (10)-UNDESIRABLE EMISSION

Applicable Standard

FCC §15.407 (b) (1), (4), (8), (9), (10); §15.209; §15.205;


(b) Undesirable emission limits. Except as shown in paragraph (b) (7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:



- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
- (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.

EUT Setup

9kHz - 30MHz:

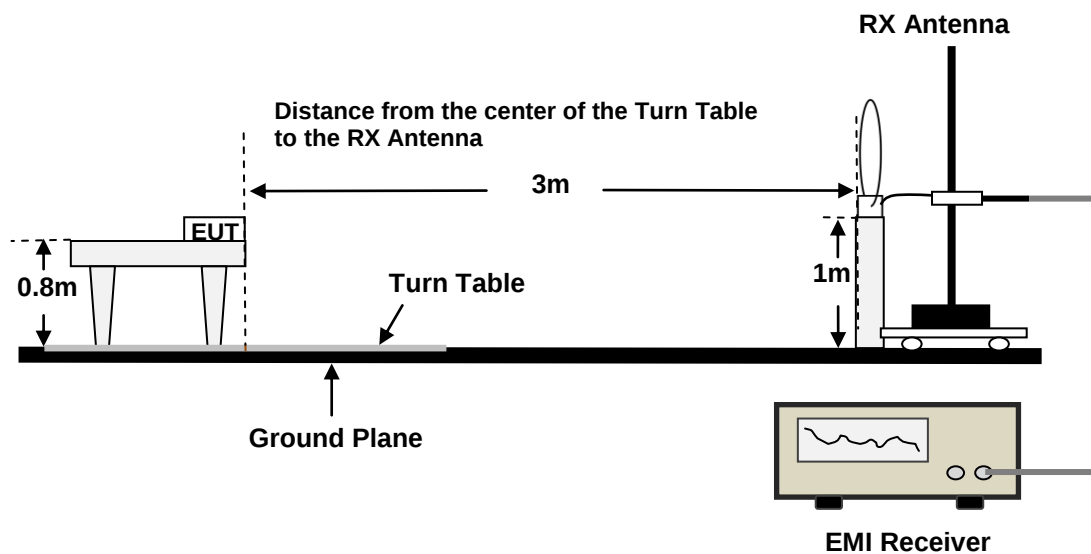

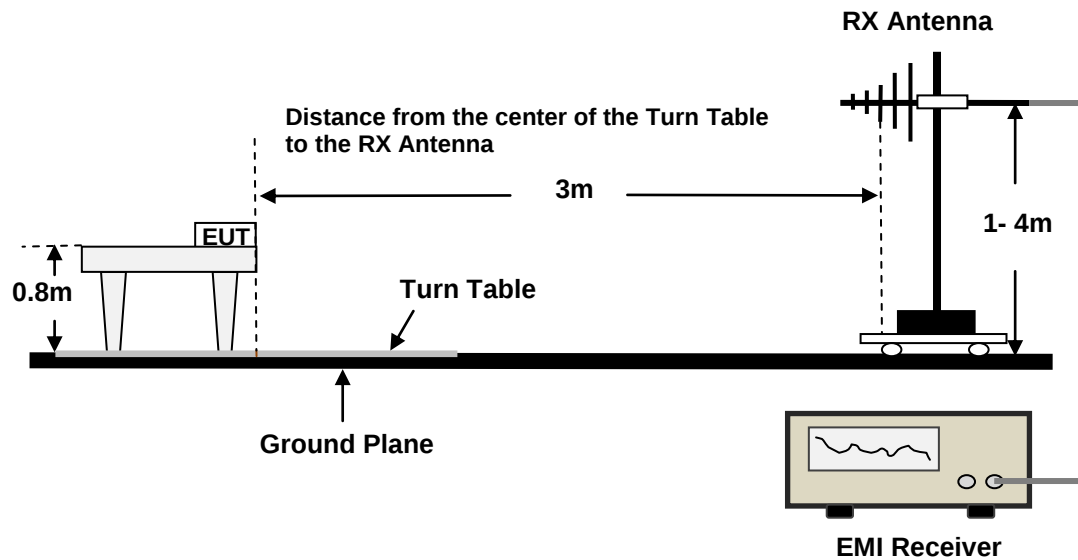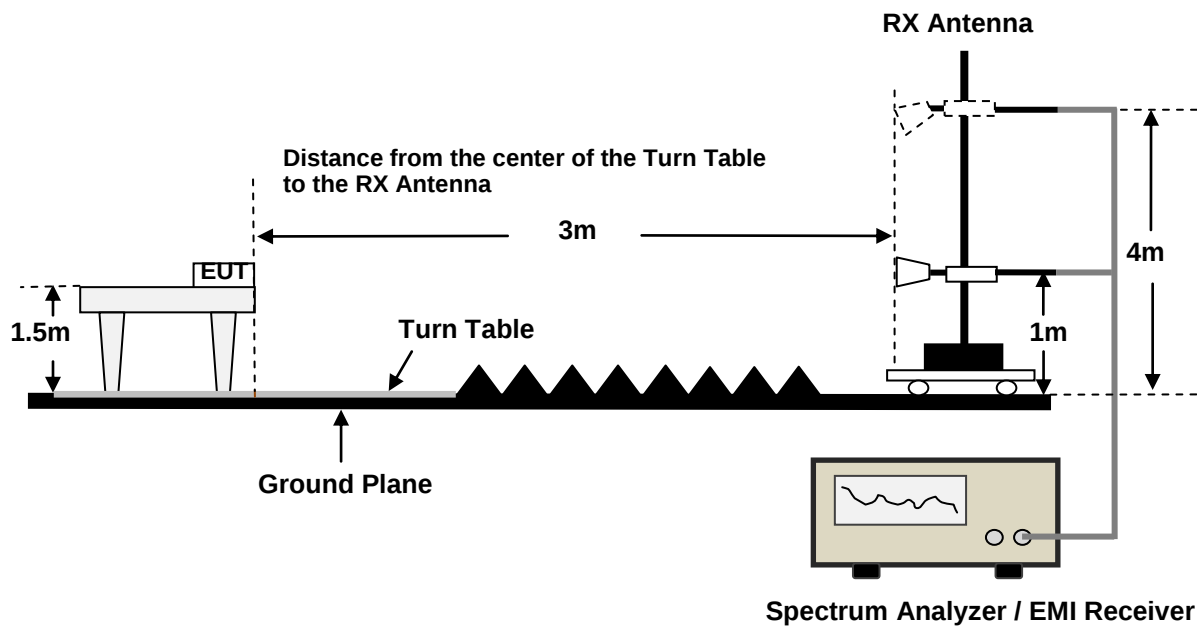30MHz - 1GHz:**Above 1GHz:**

The radiated emission performed in the 3 meters, using the setup accordance with the ANSI C63.10-2020. The specification used was the FCC 15.209, FCC 15.407 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9kHz to 40GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

9kHz - 1000MHz:

Frequency Range	Measurement	RBW	Video B/W	IF B/W	Detector
9kHz - 150kHz	PK	0.3kHz	1kHz	/	PK
	QP/AV	/	/	200Hz	QP/AV
150kHz - 30MHz	PK	10kHz	30kHz	/	PK
	QP/AV	/	/	9kHz	QP/AV
30MHz - 1000MHz	PK	100kHz	300kHz	/	PK
	QP	/	/	120kHz	QP

1GHz -40GHz:

Pre-scan:

Measurement	Detector	Duty cycle	RBW	Video B/W
PK	Peak	Any	1MHz	3MHz
Ave.	Peak	>98%	1MHz	3kHz
		<98%	1MHz	≥1/T, no less than 3kHz

Final measurement for emission identified during the pre-scan:

Measurement	Detector	Duty cycle	RBW	Video B/W
PK	Peak	Any	1MHz	3MHz
Ave.	Peak	>98%	1MHz	10Hz
		<98%	1MHz	≥1/T

Note 1: T is minimum transmission duration

Note 2: The 1GHz-6.6GHz testing use the notch filter and the 6.6GHz-18GHz testing use high-pass filter.

Note 3: The band edge testing use 10dB attenuator.

Note 4: The filters and attenuators are all integrated within the filter switch unit.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

According to ANSI C63.10-2020, 9.2: For field strength measurements made at other than the distance specified by the limit, extrapolate the measured field strength to the field strength at the distance specified by the limit using an inverse distance correction factor (20 dB/decade of distance).

$$E_{SpecLimit} = E_{Meas} + 20 \log \left(\frac{D_{Meas}}{D_{SpecLimit}} \right)$$

where

$E_{SpecLimit}$	is the field strength of the emission at the distance specified by the limit, in dBuV/m
E_{Meas}	is the field strength of the emission at the measurement distance, in dBuV/m
D_{Meas}	is the measurement distance, in m
$D_{SpecLimit}$	is the distance specified by the limit, in m

Note 1: If the maximized peak measured value is under the QP/Average limit by more than 6dB, then it is unnecessary to perform an QP/Average measurement.

Note 2: For above 1GHz, the test result of peak was 20dB below to the limit of peak, which can be compliant to the average limit, so just peak value was recorded.

Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

Factor = Antenna Factor + Cable Loss - Amplifier Gain

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an over limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

Over Limit/Margin = Level / Corrected Amplitude – Limit
Level / Corrected Amplitude = Read Level + Factor

Test Data

9kHz-1GHz

Environmental Conditions


Temperature:	24.3 °C
Relative Humidity:	55 %
ATM Pressure:	99.7 kPa
Test Engineer:	Colin Lin
Test Date:	2025-06-22
EUT Operation Mode:	5G WIFI Transmitting

Test Result: Compliance, please refer to the below data.

Note 1: The Loop Antenna were tested in parallel, perpendicular, and ground-parallel. The worst orientation was parallel and the data was recorded in report.


Note 2: The maximum output power mode and channel: 802.11n40 5755MHz was tested.

9kHz~30MHz:

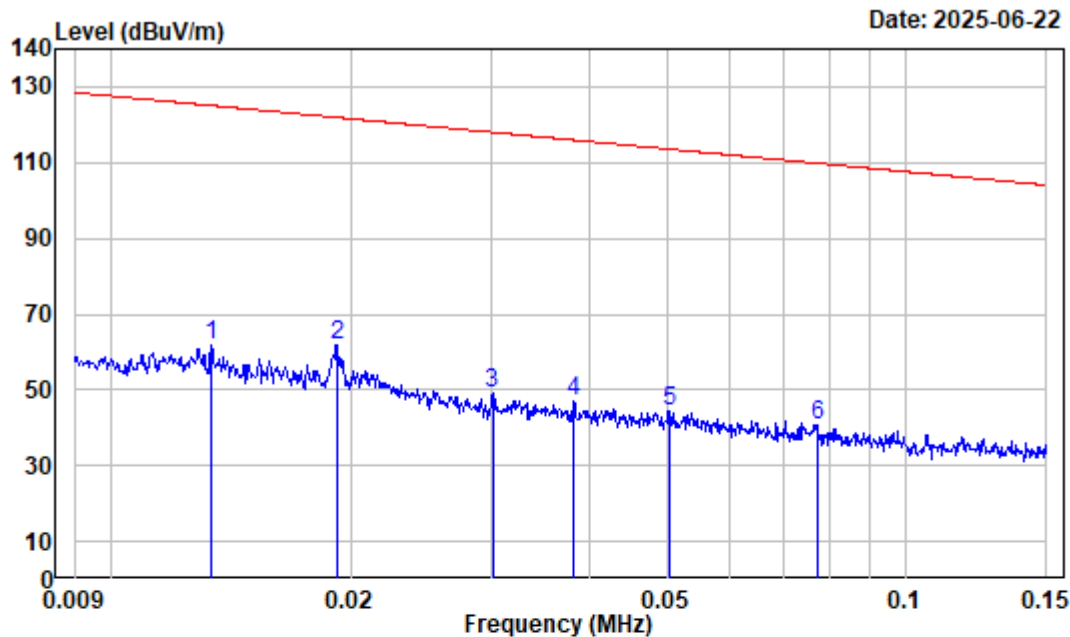

Site : Chamber
Condition : 3m
Job No. : 2504U29636E-RF
Polarization : Parallel Tester: Colin Lin
Test Mode : 5G WIFI Transmitting
Receiver Setting: RBW:300Hz VBW:1kHz


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.013	34.32	27.43	61.75	125.07	-63.32	Peak
2	0.019	31.72	30.00	61.72	121.92	-60.20	Peak
3	0.030	26.90	22.20	49.10	118.01	-68.91	Peak
4	0.038	25.26	21.91	47.17	115.96	-68.79	Peak
5	0.050	22.77	21.76	44.53	113.54	-69.01	Peak
6	0.077	18.95	21.80	40.75	109.85	-69.10	Peak

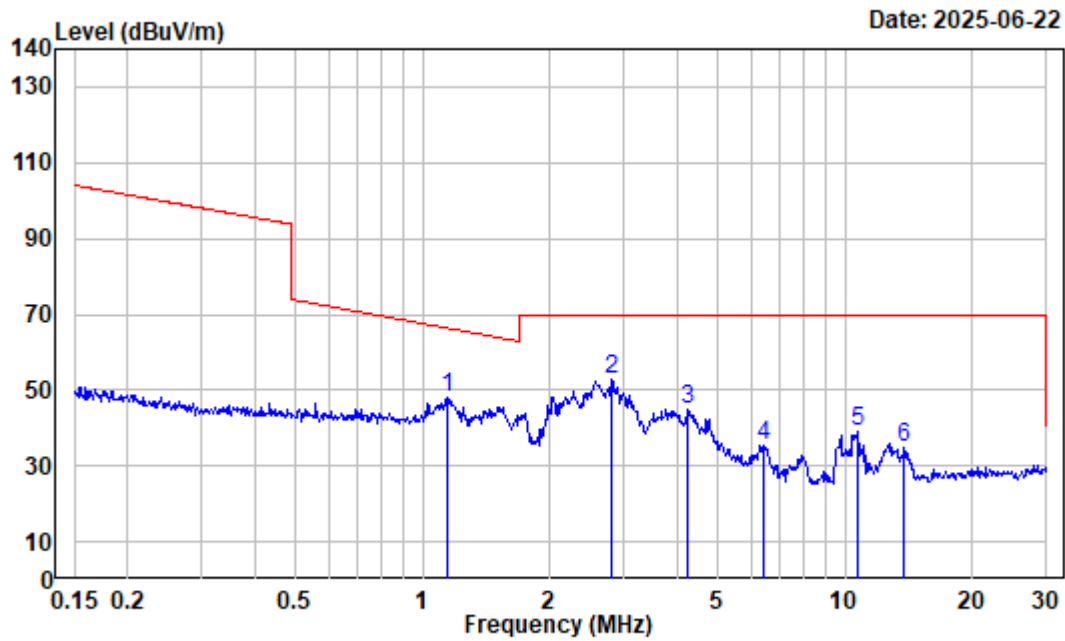

Site : Chamber
Condition : 3m
Job No. : 2504U29636E-RF
Polarization : Parallel Tester: Colin Lin
Test Mode : 5G WIFI Transmitting
Receiver Setting: RBW:10kHz VBW:30kHz


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	1.141	-2.37	50.46	48.09	66.30	-18.21	Peak
2	2.794	-5.79	58.47	52.68	69.54	-16.86	Peak
3	4.224	-6.32	51.36	45.04	69.54	-24.50	Peak
4	6.420	-6.16	41.76	35.60	69.54	-33.94	Peak
5	10.733	-5.26	44.29	39.03	69.54	-30.51	Peak
6	13.841	-4.40	39.39	34.99	69.54	-34.55	Peak

30MHz~1GHz:

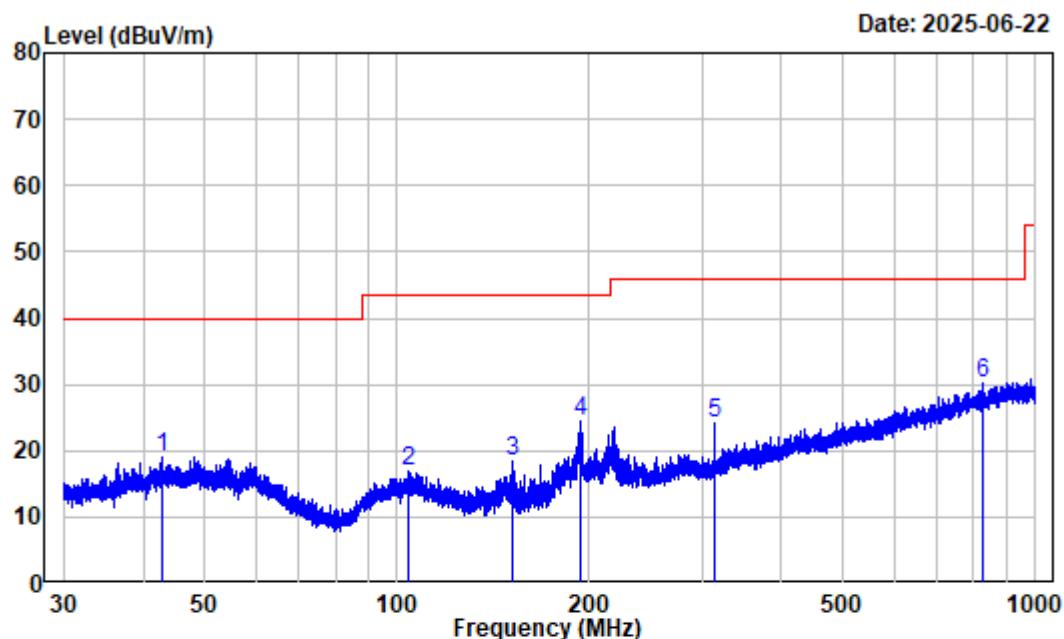

Site : Chamber
Condition : 3m HORIZONTAL
Job No. : 2504U29636E-RF Tester: Colin Lin
Test Mode : 5G WIFI Transmitting
Receiver Setting: RBW:100kHz VBW:300kHz

	Freq	Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	42.881	-10.62	29.53	18.91	40.00	-21.09	Peak
2	104.353	-11.65	28.61	16.96	43.50	-26.54	Peak
3	151.133	-15.24	33.51	18.27	43.50	-25.23	Peak
4	193.095	-10.48	34.80	24.32	43.50	-19.18	Peak
5	314.928	-9.33	33.42	24.09	46.00	-21.91	Peak
6	826.406	-0.15	30.19	30.04	46.00	-15.96	Peak

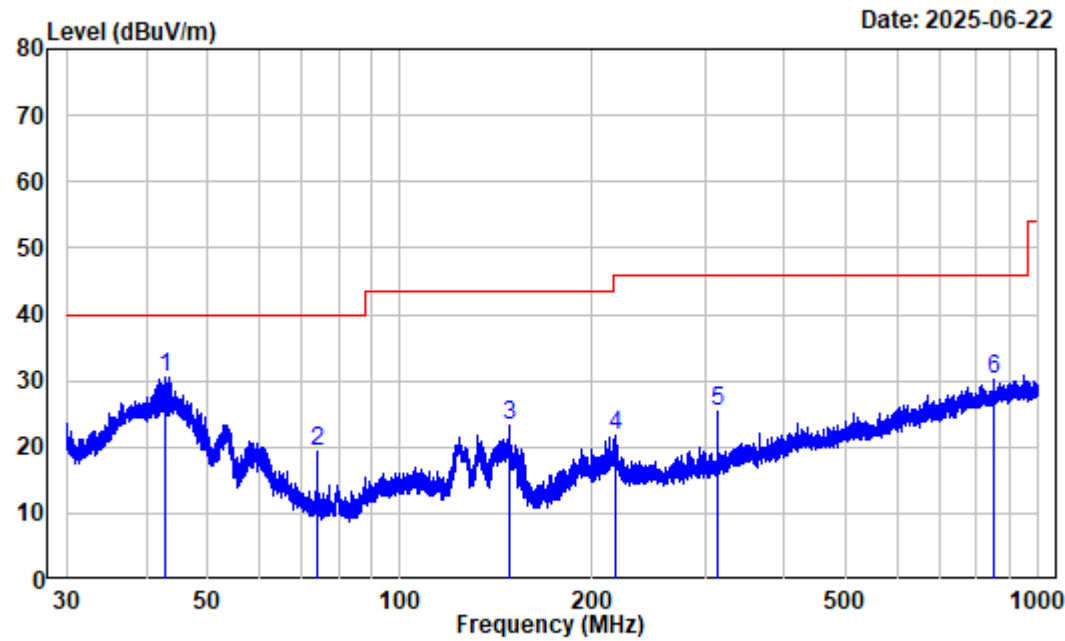

Site : Chamber

Condition : 3m VERTICAL

Job No. : 2504U29636E-RF Tester: Colin Lin

Test Mode : 5G WIFI Transmitting

Receiver Setting: RBW:100kHz VBW:300kHz

	Freq Factor		Read	Limit	Over	Remark
	MHz	dB/m	Level	Level	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	42.975	-10.59	41.20	30.61	40.00	-9.39 Peak
2	74.265	-16.26	35.52	19.26	40.00	-20.74 Peak
3	148.376	-15.36	38.54	23.18	43.50	-20.32 Peak
4	216.878	-11.10	32.83	21.73	46.00	-24.27 Peak
5	314.928	-9.33	34.55	25.22	46.00	-20.78 Peak
6	849.172	0.13	30.02	30.15	46.00	-15.85 Peak

1GHz-40GHz

Environmental Conditions


Temperature:	23.2 to 23.8 °C
Relative Humidity:	53 to 55 %
ATM Pressure:	99.7 to 100.1 kPa
Test Engineer:	Kevin Lv
Test Date:	2025-06-27 to 2025-07-02
EUT Operation Mode:	Transmitting

Test Result: Compliance, please refer to the below data.

Note: For 18GHz-40GHz, the maximum output power mode and channel: 802.11n40 5755MHz was tested.

For band1:


802.11A Low Channel 1GHz-6.6GHz_HORIZONTAL

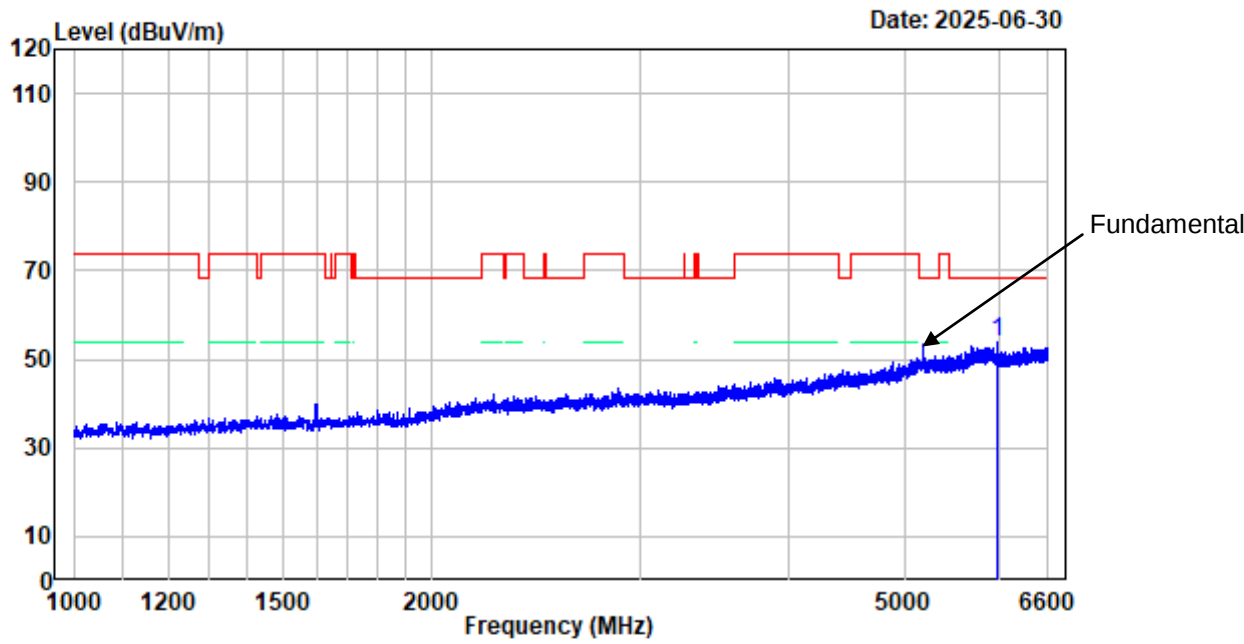

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504U29636E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A Low Channel 5180MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5974.200	-4.87	58.69	53.82	68.20	-14.38 Peak


802.11A Low Channel 1GHz-6.6GHz_VERTICAL

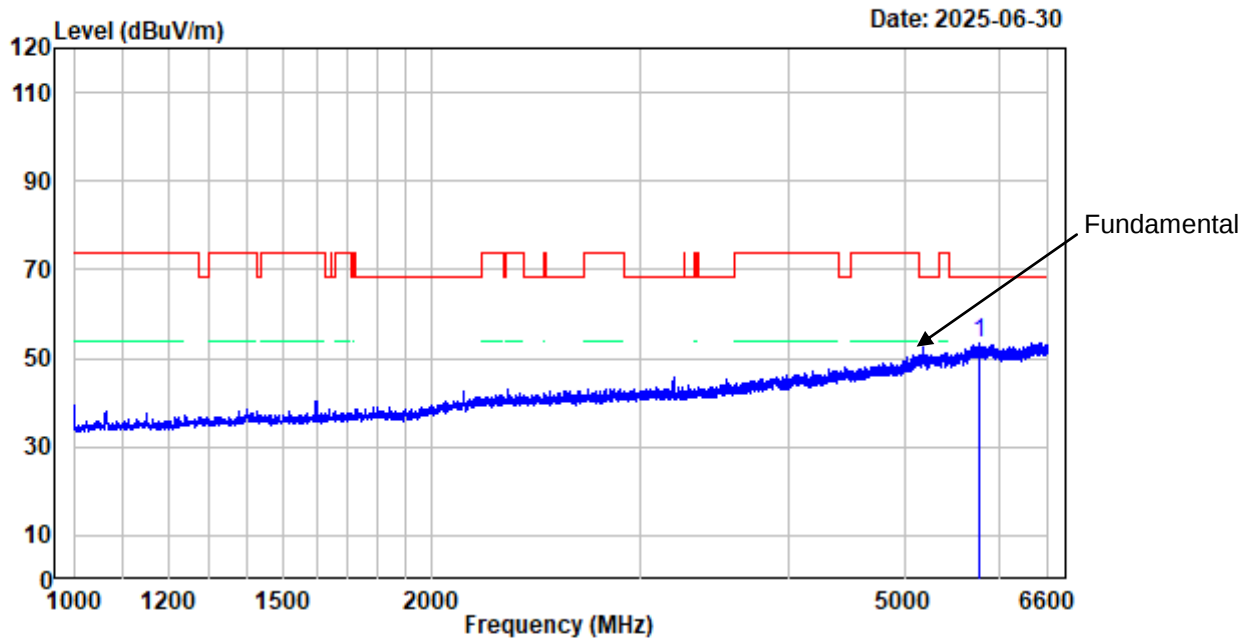

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504U29636E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A Low Channel 5180MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5776.100	-4.57	58.20	53.63	68.20	-14.57 Peak


802.11A Low Channel 6.6GHz-18GHz_HORIZONTAL

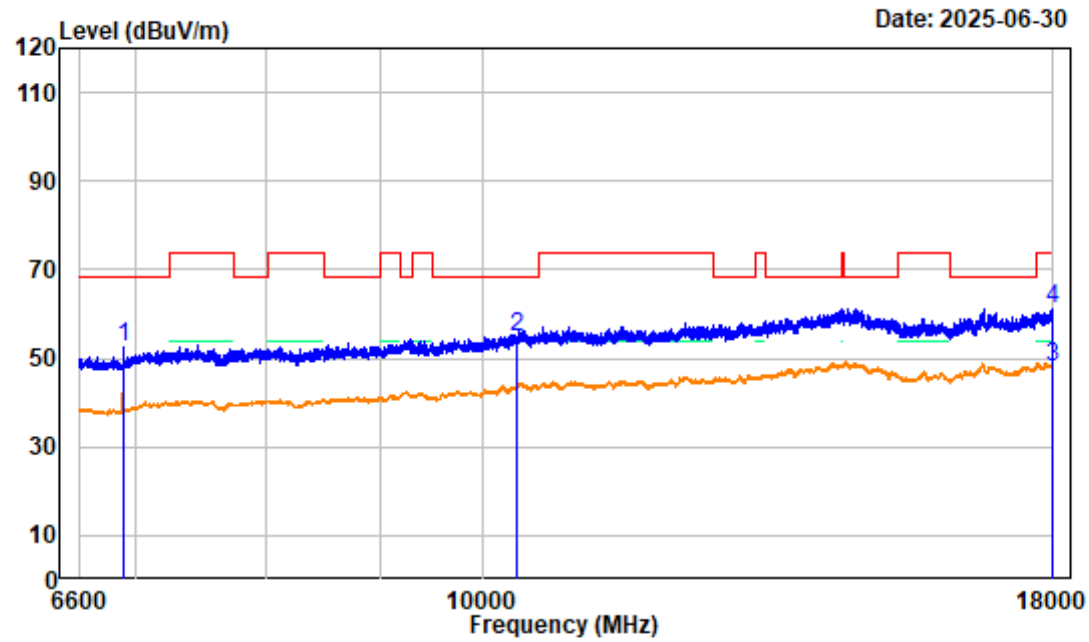

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504U29636E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A Low Channel 5180MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6906.375	-2.86	55.26	52.40	68.20	-15.80	Peak
2 10360.000	3.84	51.12	54.96	68.20	-13.24	peak
3 17974.350	8.26	39.64	47.90	54.00	-6.10	Average
4 17974.350	8.26	52.66	60.92	74.00	-13.08	Peak

802.11A Low Channel 6.6GHz-18GHz_VERTICAL

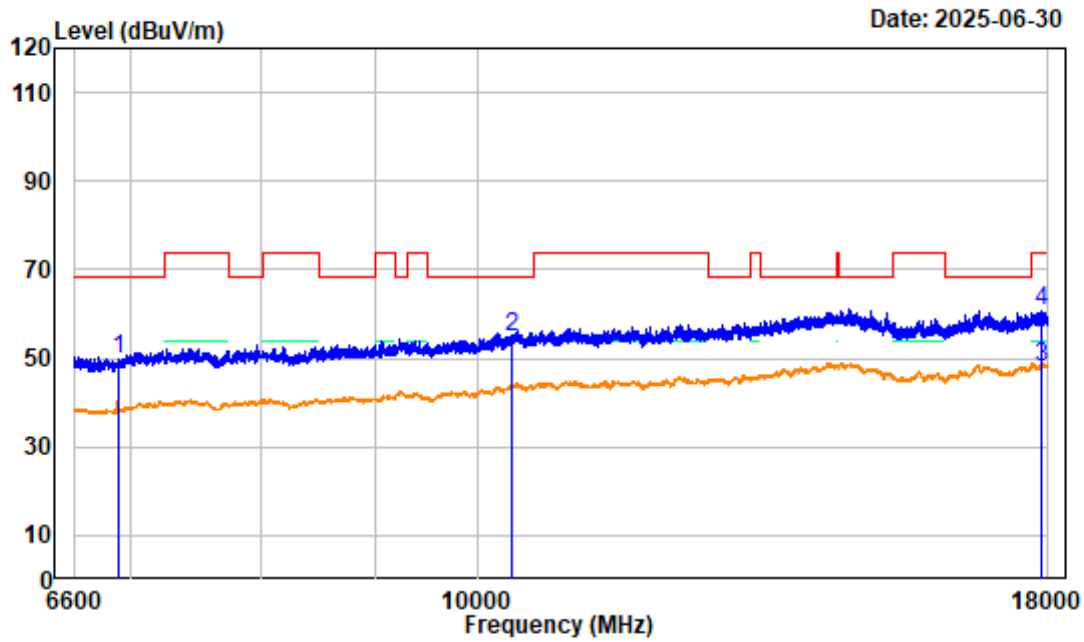

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U29636E-RF


Test Mode : TransmittingTester:Kevin Lv

Note : 802.11A Low Channel 5180MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6906.375	-2.86	52.84	49.98	68.20	-18.22 Peak
2	10360.580	3.85	50.78	54.63	68.20	-13.57 Peak
3	17868.900	8.23	39.67	47.90	54.00	-6.10 Average
4	17868.900	8.23	52.23	60.46	74.00	-13.54 Peak

802.11A Low Channel Bandedge_HORIZONTAL

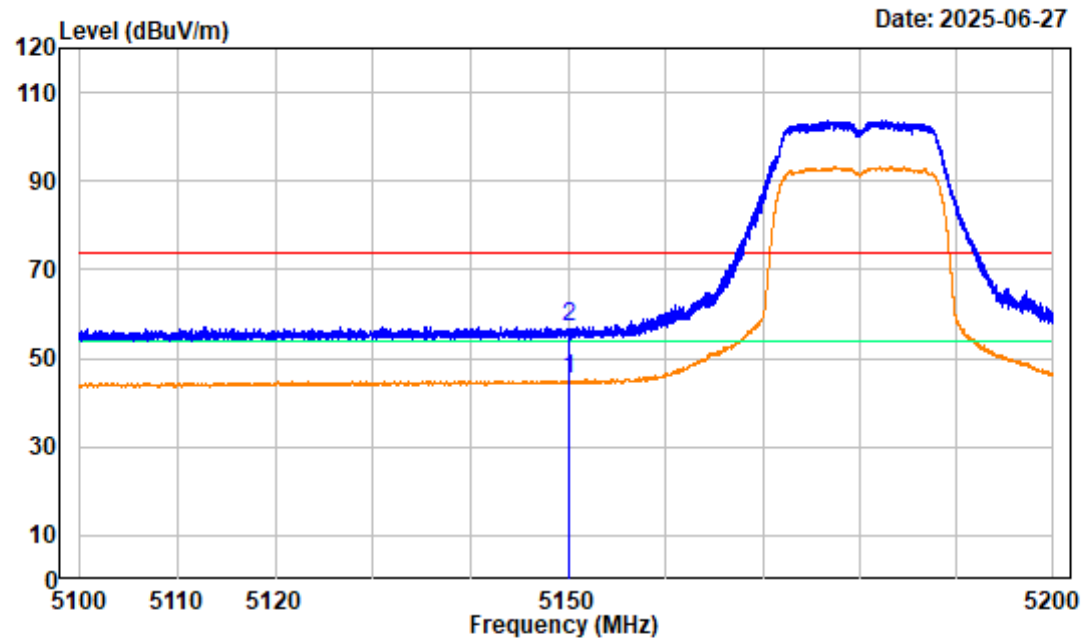

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U29636E-RF


Test Mode : TransmittingTester:Kevin Lv

Note : 802.11A Low Channel 5180MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-5.99	51.06	45.07	54.00	-8.93 Average
2	5150.000	-5.99	63.10	57.11	74.00	-16.89 peak

802.11A Low Channel Bandedge_VERTICAL

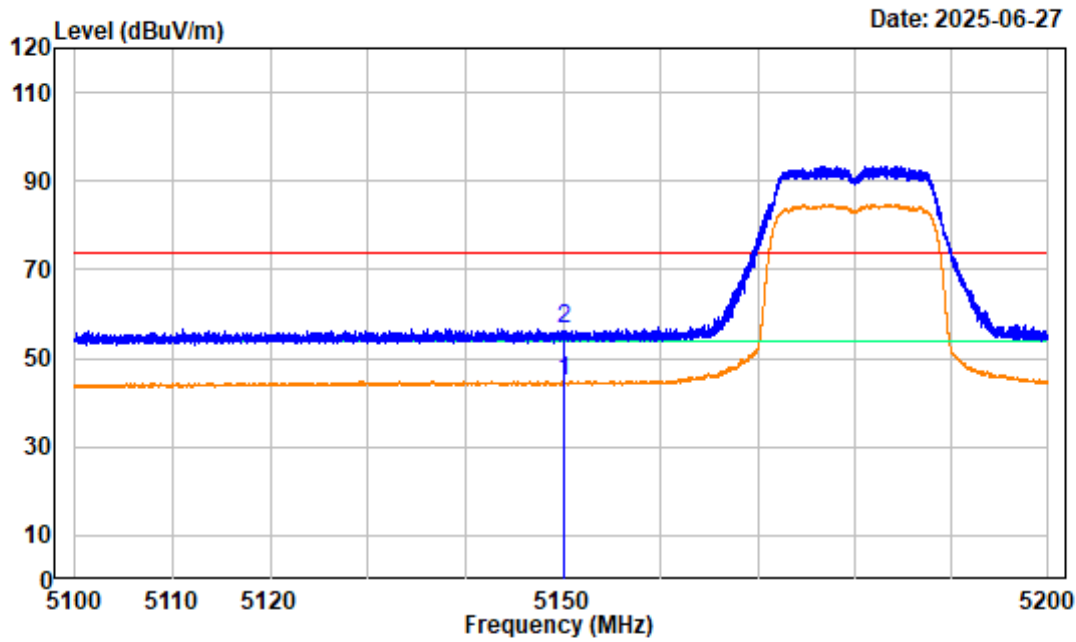

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U29636E-RF


Test Mode : TransmittingTester:Kevin Lv

Note : 802.11A Low Channel 5180MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-5.99	50.97	44.98	54.00	-9.02 average
2	5150.000	-5.99	62.54	56.55	74.00	-17.45 peak


802.11A Middle Channel 1GHz-6.6GHz_HORIZONTAL

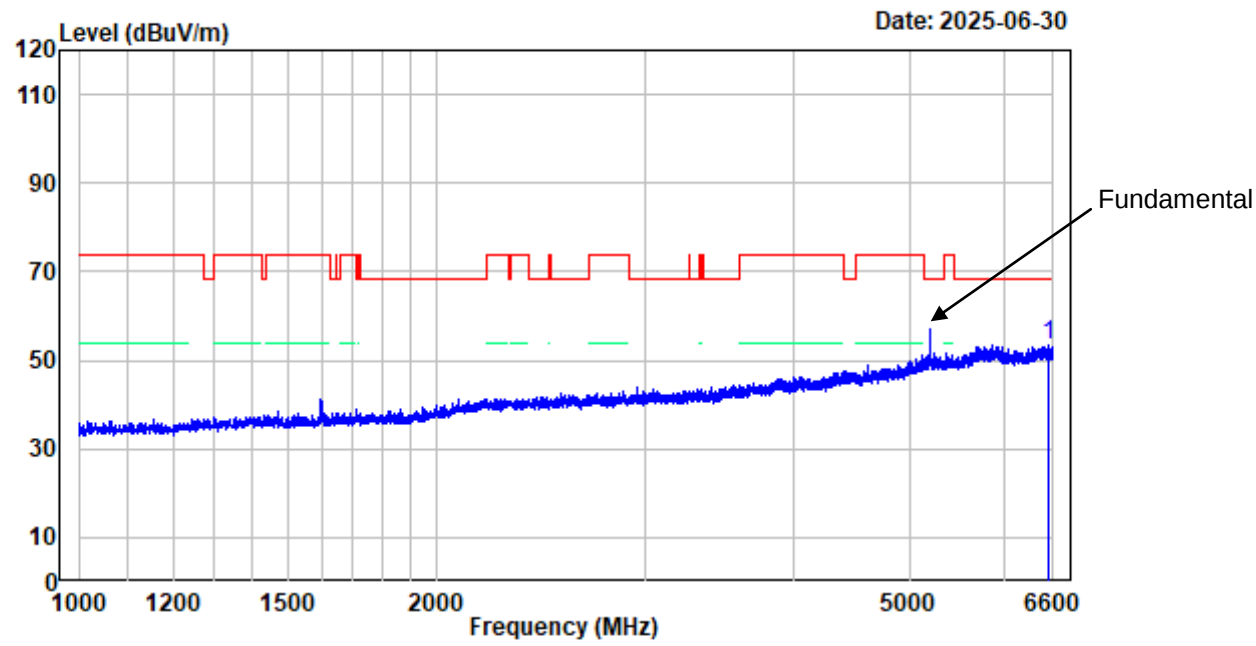

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504U29636E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A Middle Channel 5200MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6546.100	-3.73	57.23	53.50	68.20	-14.70 Peak


802.11A Middle Channel 1GHz-6.6GHz_VERTICAL

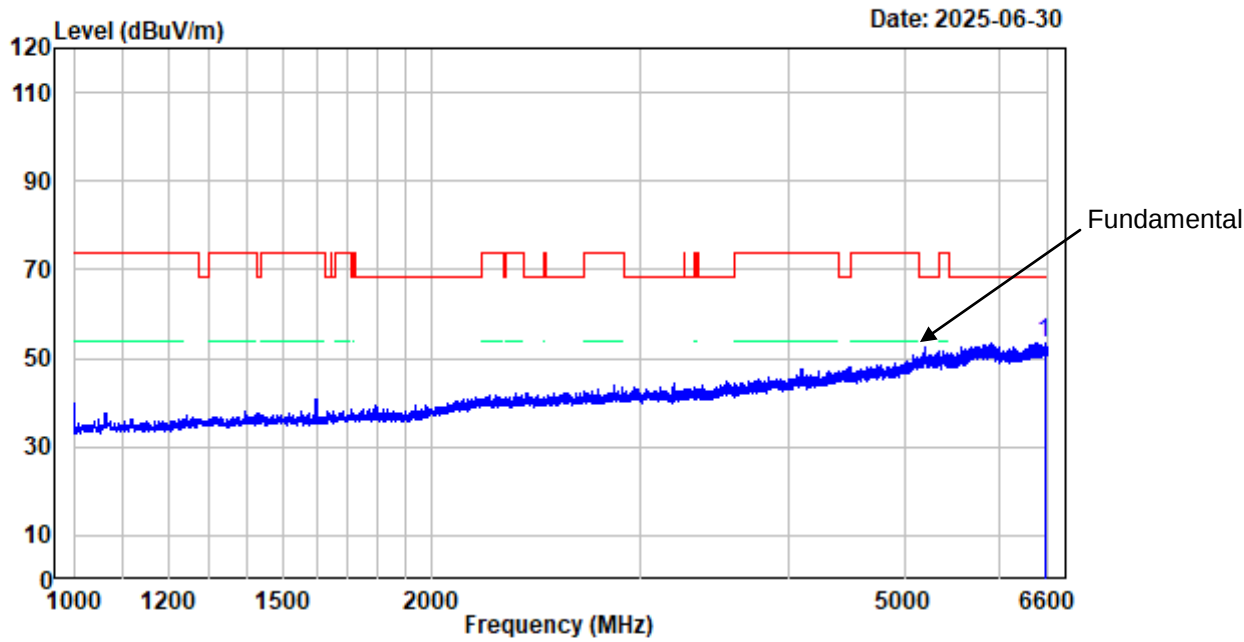

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504U29636E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A Middle Channel 5200MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6555.200	-3.70	57.32	53.62	68.20	-14.58 Peak


802.11A Middle Channel 6.6GHz-18GHz_HORIZONTAL

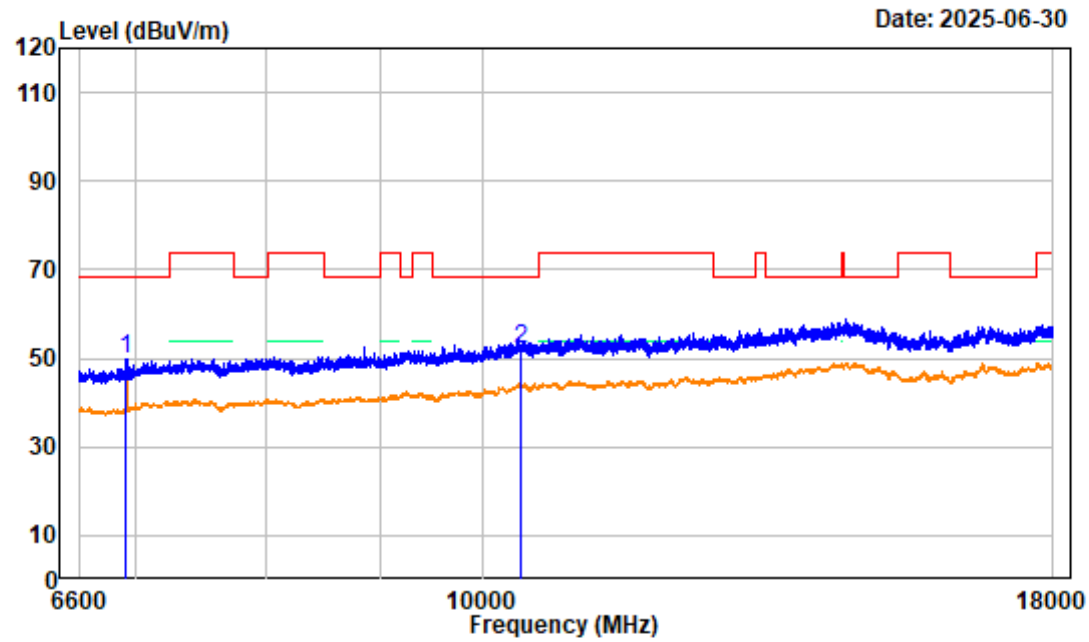

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504U29636E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A Middle Channel 5200MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6932.025	-2.60	52.43	49.83	68.20	-18.37 Peak
2	10400.470	4.10	48.20	52.30	68.20	-15.90 Peak


802.11A Middle Channel 6.6GHz-18GHz_VERTICAL

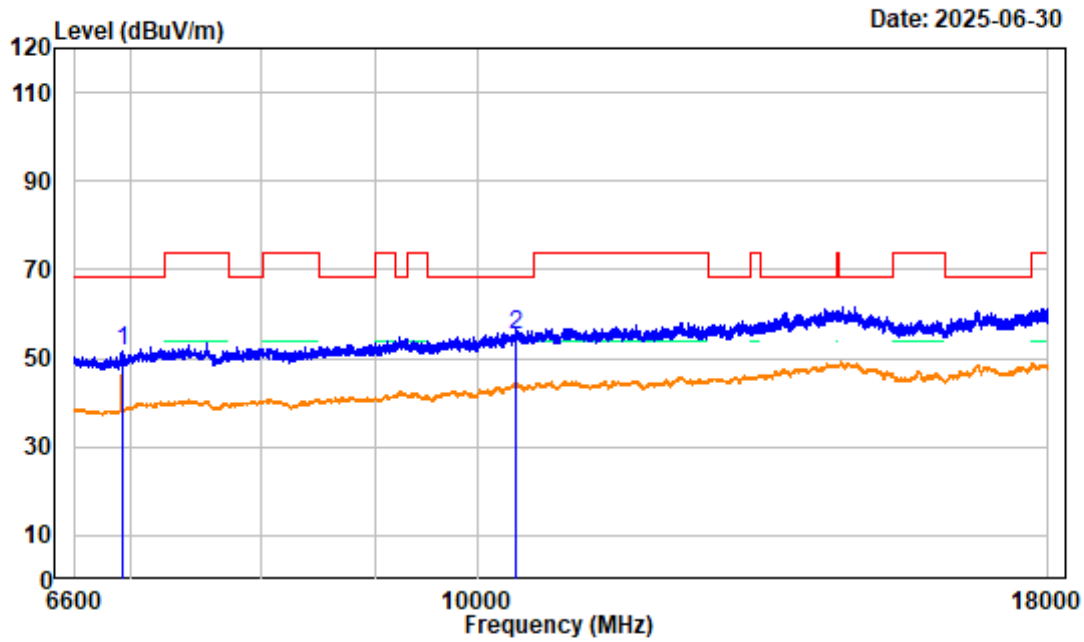

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504U29636E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A Middle Channel 5200MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6933.450	-2.58	53.98	51.40	68.20	-16.80 Peak
2	10400.470	4.10	50.92	55.02	68.20	-13.18 Peak


802.11A High Channel 1GHz-6.6GHz_HORIZONTAL

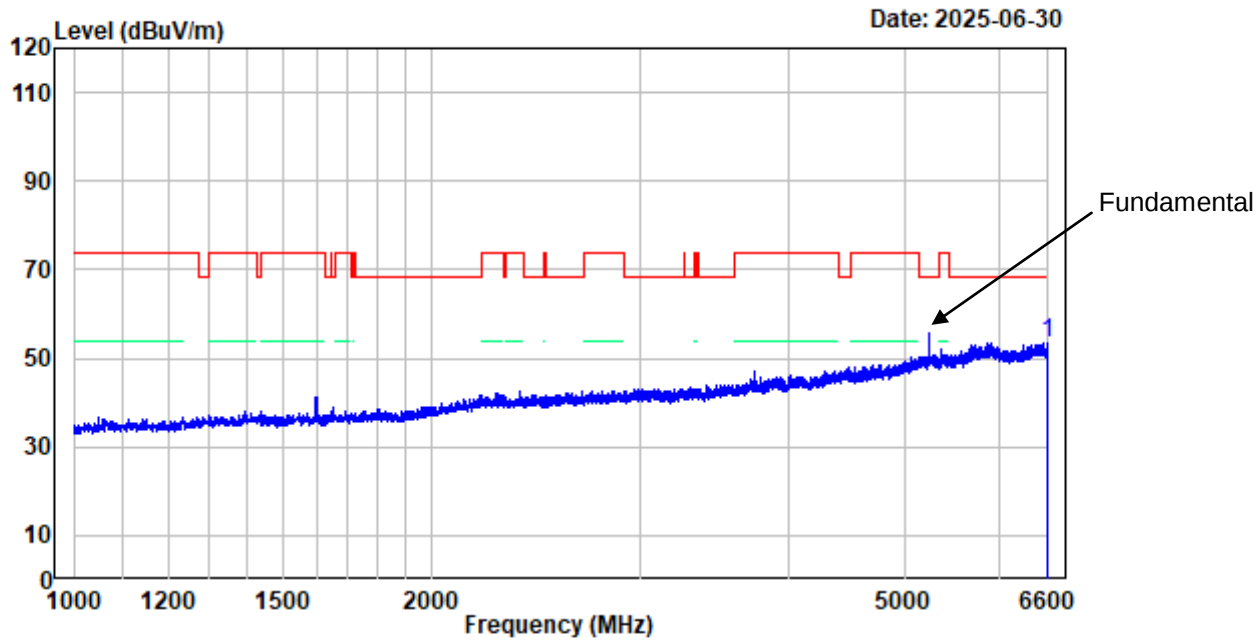

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504U29636E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A High Channel 5240MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6581.100	-3.61	57.18	53.57	68.20	-14.63 Peak

802.11A High Channel 1GHz-6.6GHz_VERTICAL

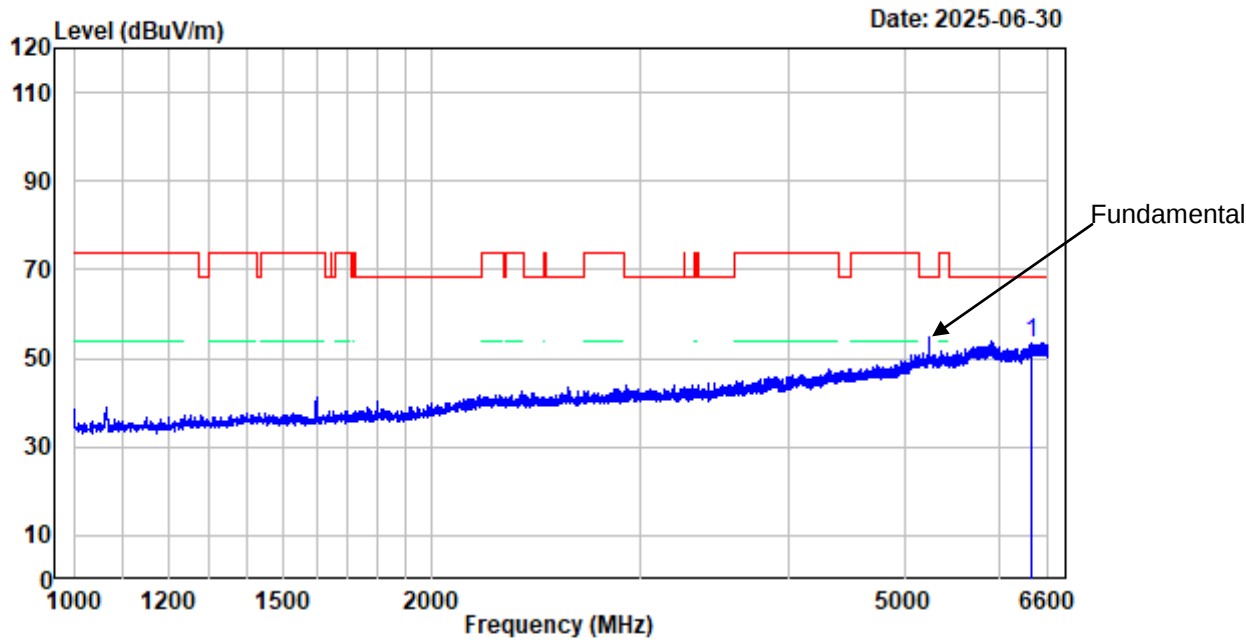

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U29636E-RF


Test Mode : TransmittingTester:Kevin Lv

Note : 802.11A High Channel 5240MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6395.600	-3.74	57.16	53.42	68.20	-14.78 Peak


802.11A High Channel 6.6GHz-18GHz_HORIZONTAL

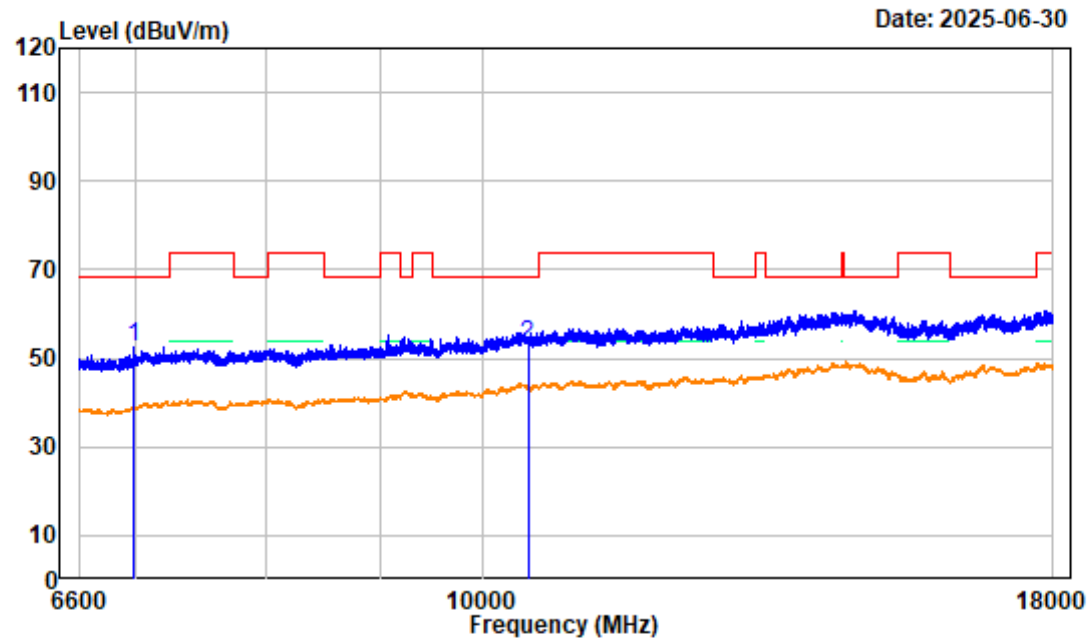

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504U29636E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A High Channel 5240MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6986.175	-2.41	54.85	52.44	68.20	-15.76 Peak
2	10480.280	3.92	49.13	53.05	68.20	-15.15 Peak


802.11A High Channel 6.6GHz-18GHz_VERTICAL

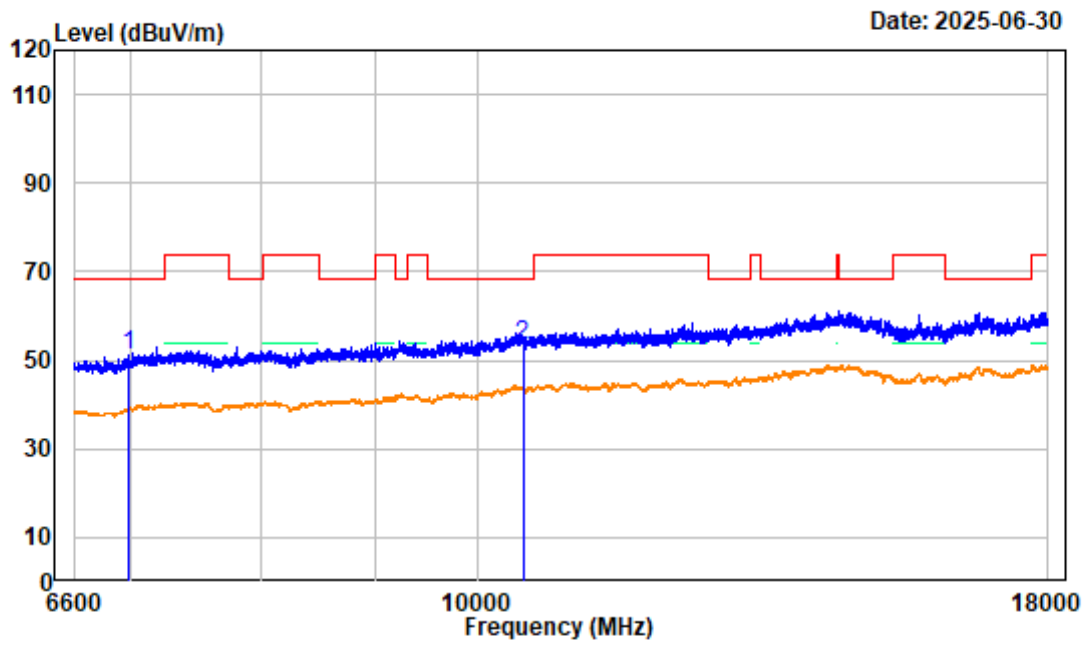

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504U29636E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A High Channel 5240MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6986.175	-2.41	53.45	51.04	68.20	-17.16	Peak
2 10480.280	3.92	49.63	53.55	68.20	-14.65	Peak

802.11A High Channel Bandedge_HORIZONTAL

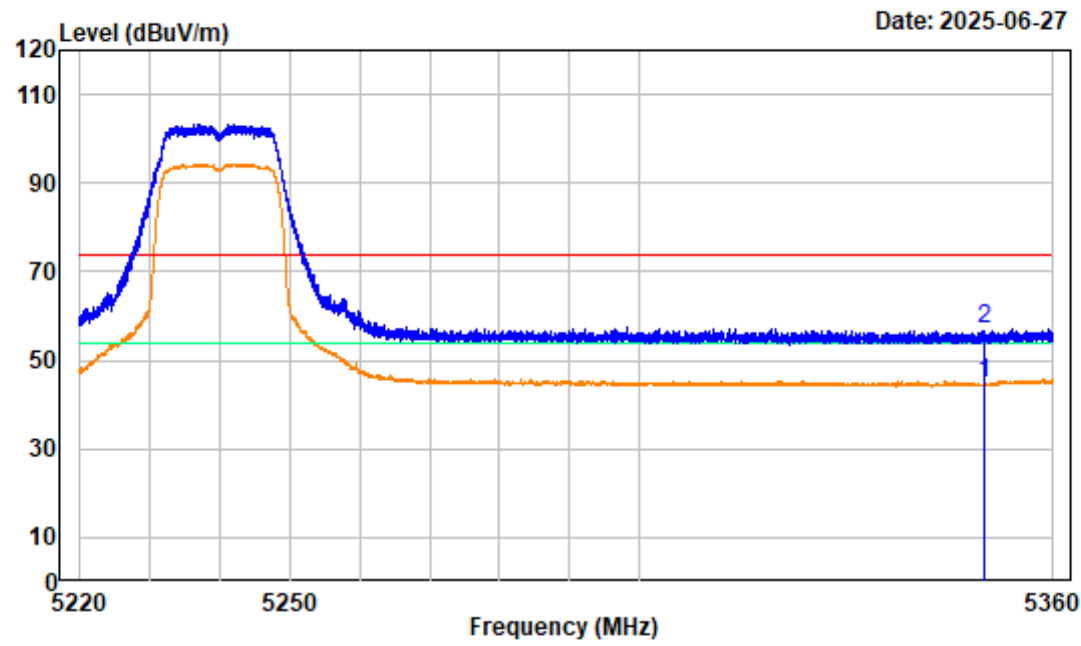

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U29636E-RF


Test Mode : TransmittingTester:Kevin Lv

Note : 802.11A High Channel 5240MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.81	50.69	44.88	54.00	-9.12 average
2	5350.000	-5.81	62.89	57.08	74.00	-16.92 peak


802.11A High Channel Bandedge_VERTICAL

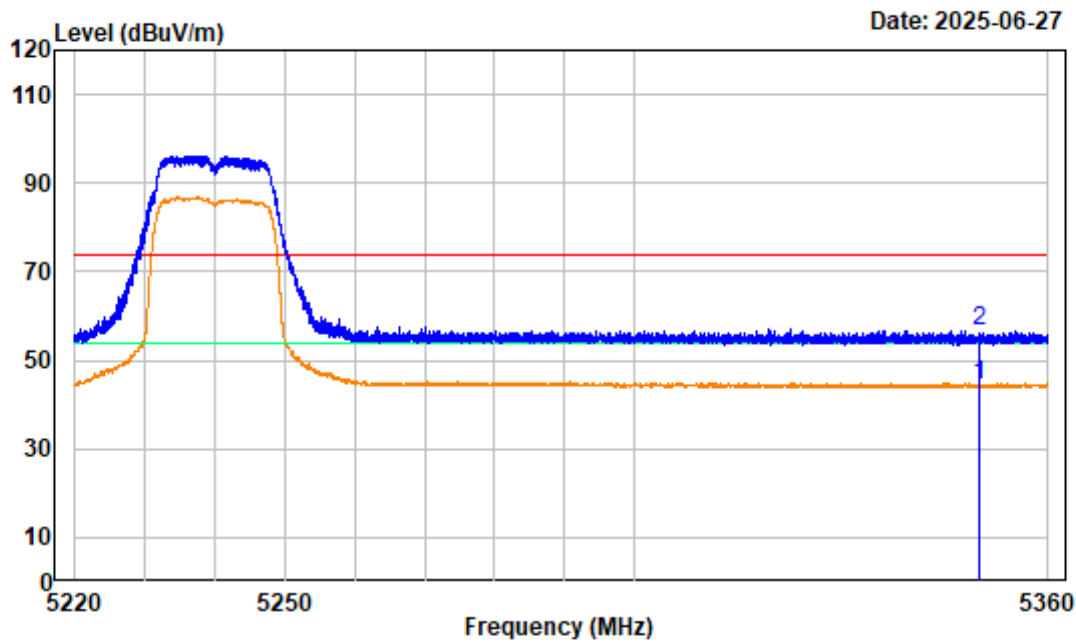

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504U29636E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A High Channel 5240MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.81	50.37	44.56	54.00	-9.44 average
2	5350.000	-5.81	62.47	56.66	74.00	-17.34 peak


802.11N20 Low Channel 1GHz-6.6GHz_HORIZONTAL

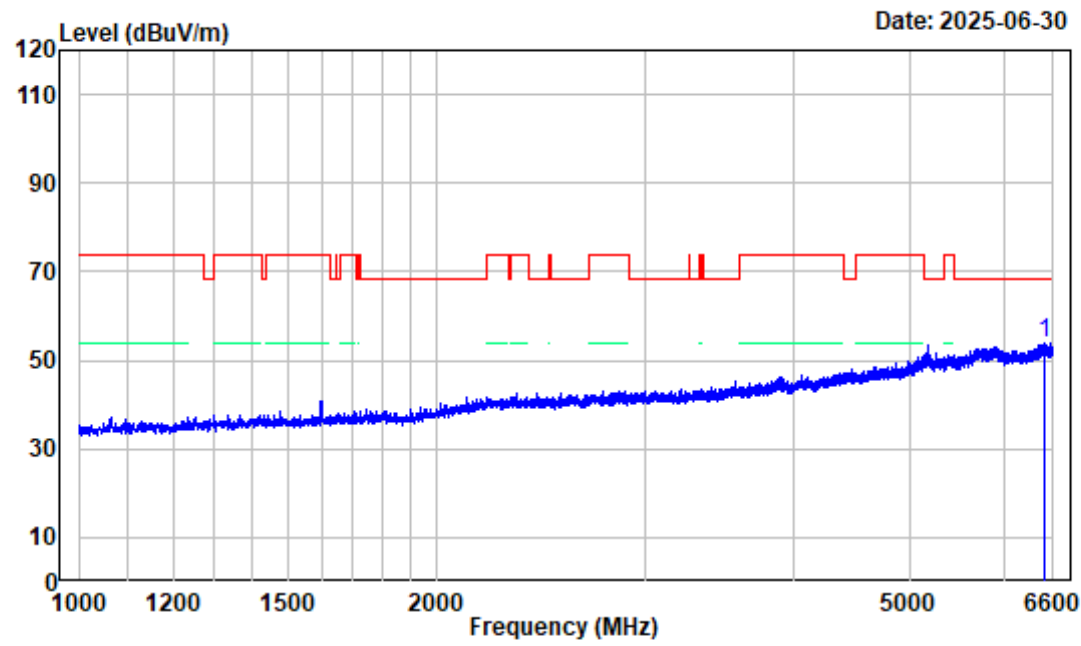

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504U29636E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11N20 Low Channel 5180MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6501.300	-3.82	57.59	53.77	68.20	-14.43 Peak

802.11N20 Low Channel 1GHz-6.6GHz_VERTICAL

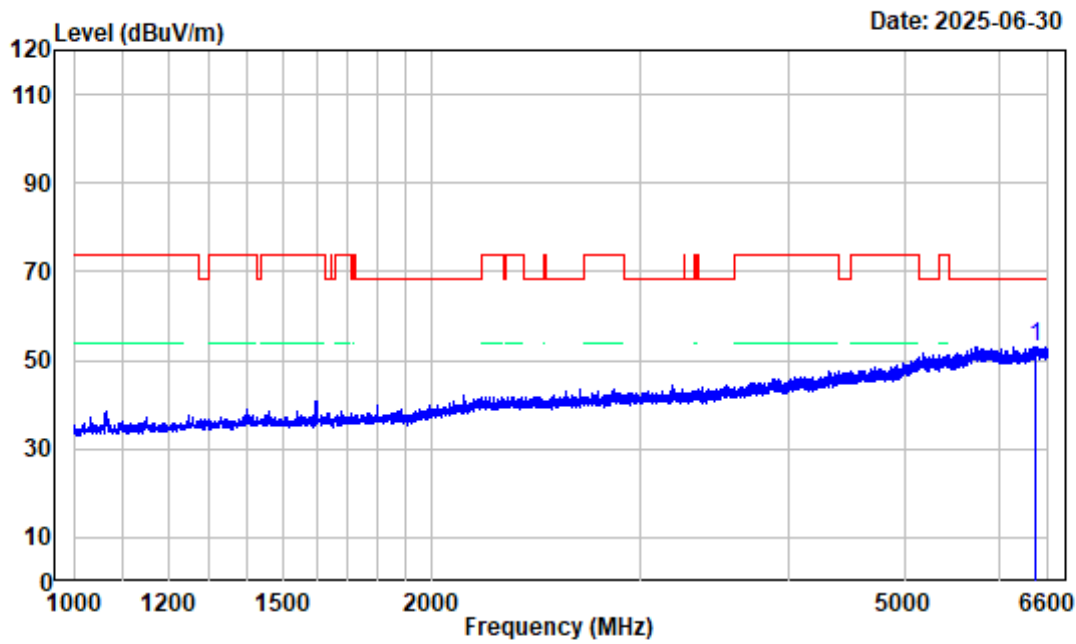

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U29636E-RF


Test Mode : TransmittingTester:Kevin Lv

Note : 802.11N20 Low Channel 5180MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6438.300	-3.63	56.83	53.20	68.20	-15.00 Peak

802.11N20 Low Channel 6.6GHz-18GHZ_HORIZONTAL

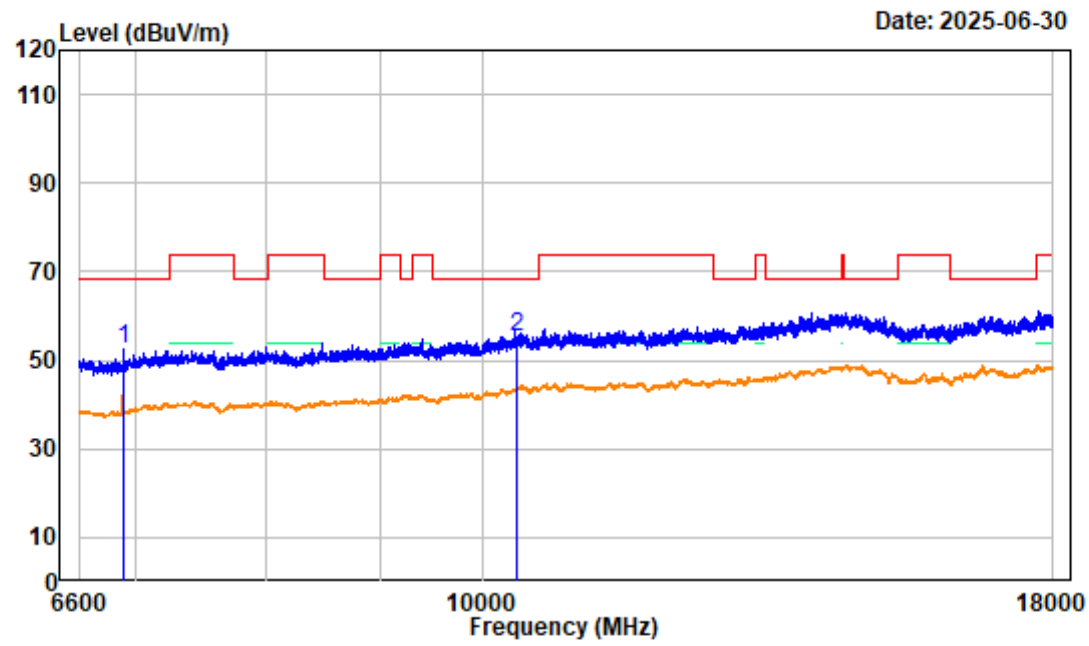

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U29636E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11N20 Low Channel 5180MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6906.375	-2.86	55.38	52.52	68.20	-15.68 Peak
2	10360.580	3.85	51.34	55.19	68.20	-13.01 Peak


802.11N20 Low Channel 6.6GHz-18GHZ_VERTICAL

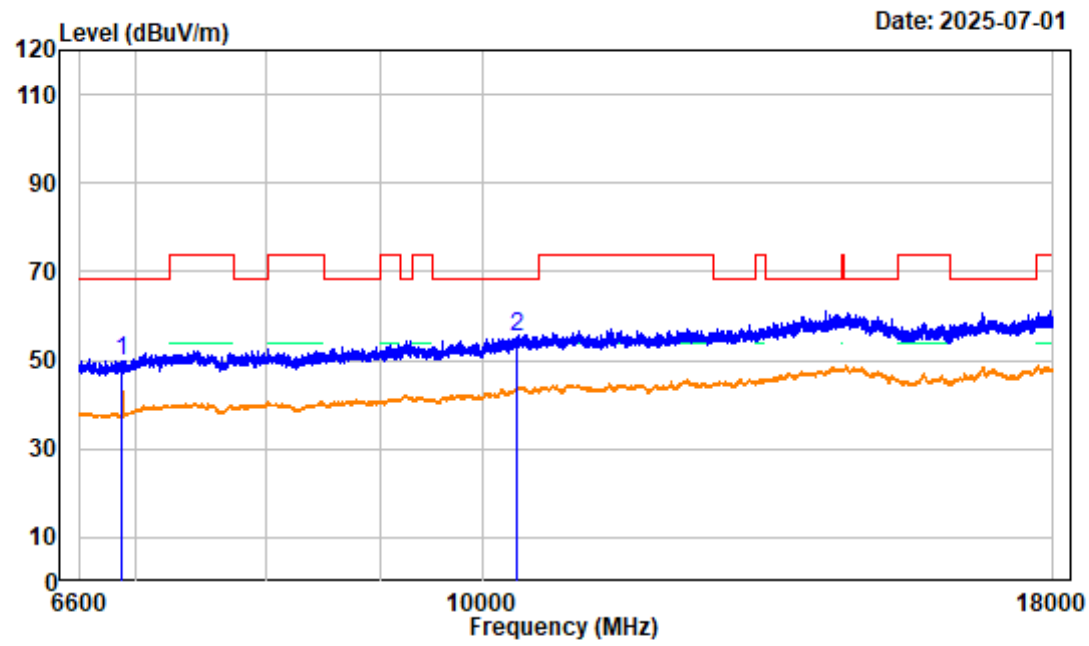

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504U29636E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11N20 Low Channel 5180MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6894.975	-2.94	52.60	49.66	68.20	-18.54 Peak
2	10360.580	3.85	51.55	55.40	68.20	-12.80 Peak


802.11N20 Low Channel Bandedge_HORIZONTAL

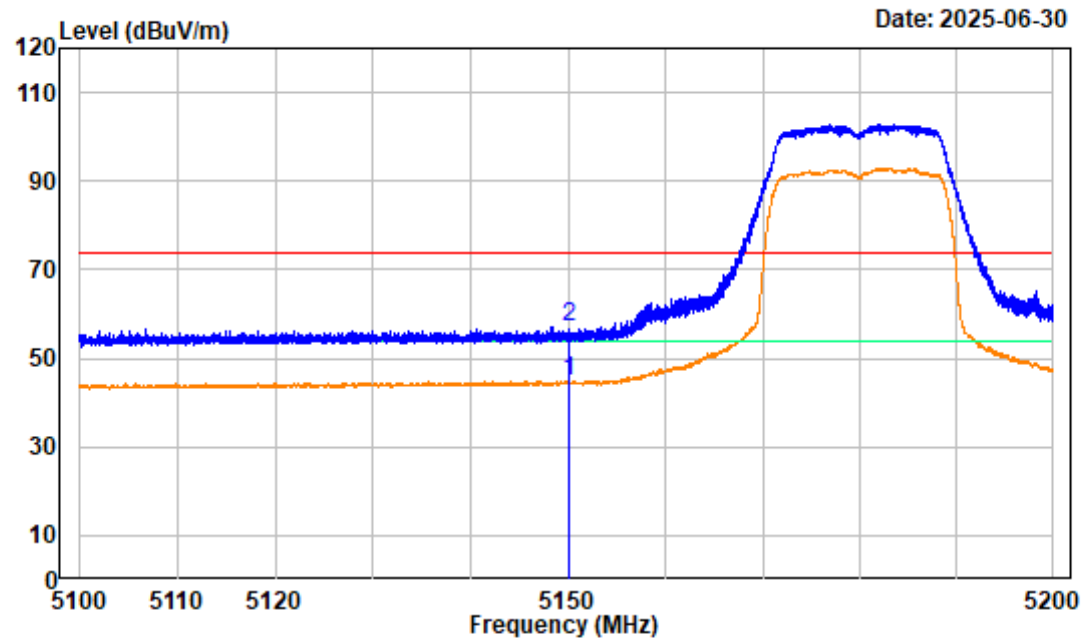

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504U29636E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11N20 Low Channel 5180MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-5.99	50.93	44.94	54.00	-9.06 average
2	5150.000	-5.99	62.93	56.94	74.00	-17.06 peak


802.11N20 Low Channel Bandedge_VERTICAL

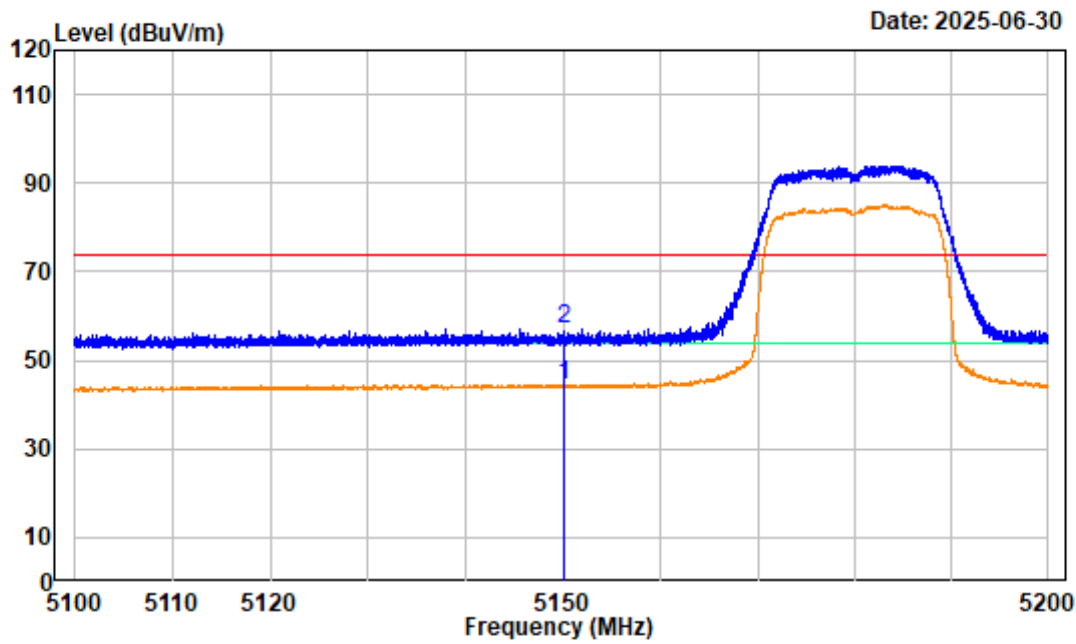

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504U29636E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11N20 Low Channel 5180MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-5.99	50.36	44.37	54.00	-9.63 average
2	5150.000	-5.99	63.26	57.27	74.00	-16.73 peak

802.11N20 Middle Channel 1GHz-6.6GHz_HORIZONTAL

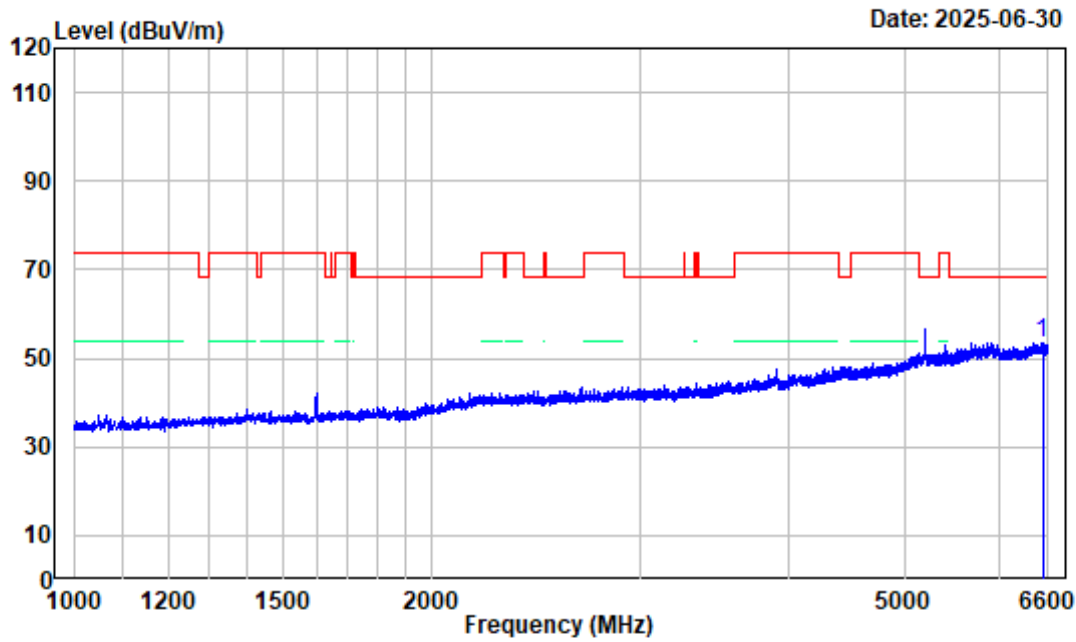

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U29636E-RF


Test Mode : TransmittingTester:Kevin Lv

Note : 802.11N20 Middle Channel 5200MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6529.300	-3.76	57.03	53.27	68.20	-14.93 Peak


802.11N20 Middle Channel 1GHz-6.6GHz_VERTICAL

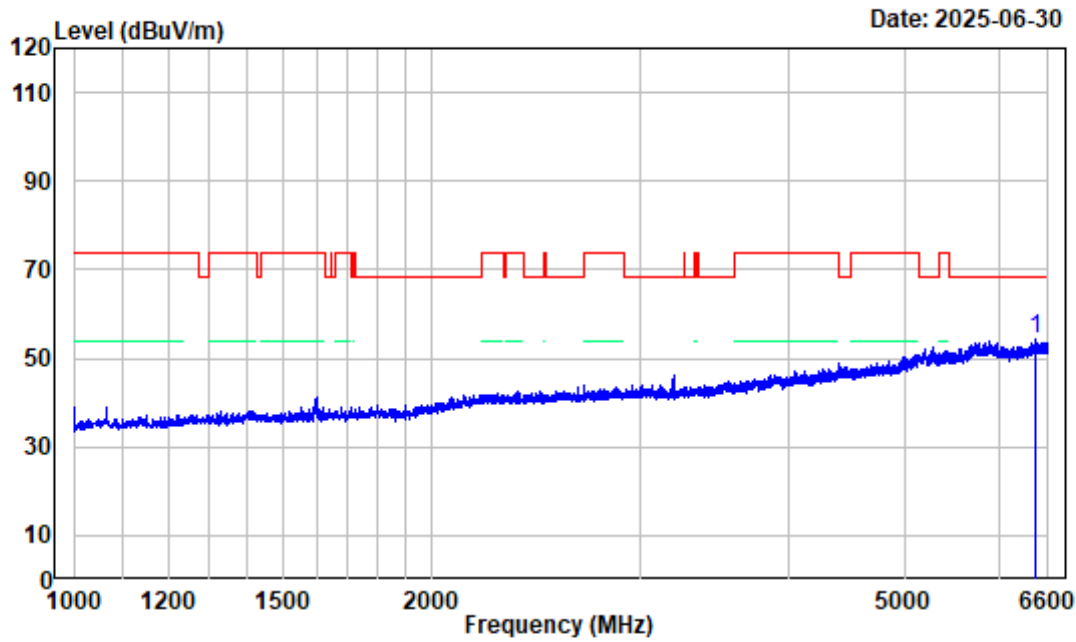

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504U29636E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11N20 Middle Channel 5200MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6448.800	-3.61	57.89	54.28	68.20	-13.92 Peak


802.11N20 Middle Channel 6.6GHz-18GHz_HORIZONTAL

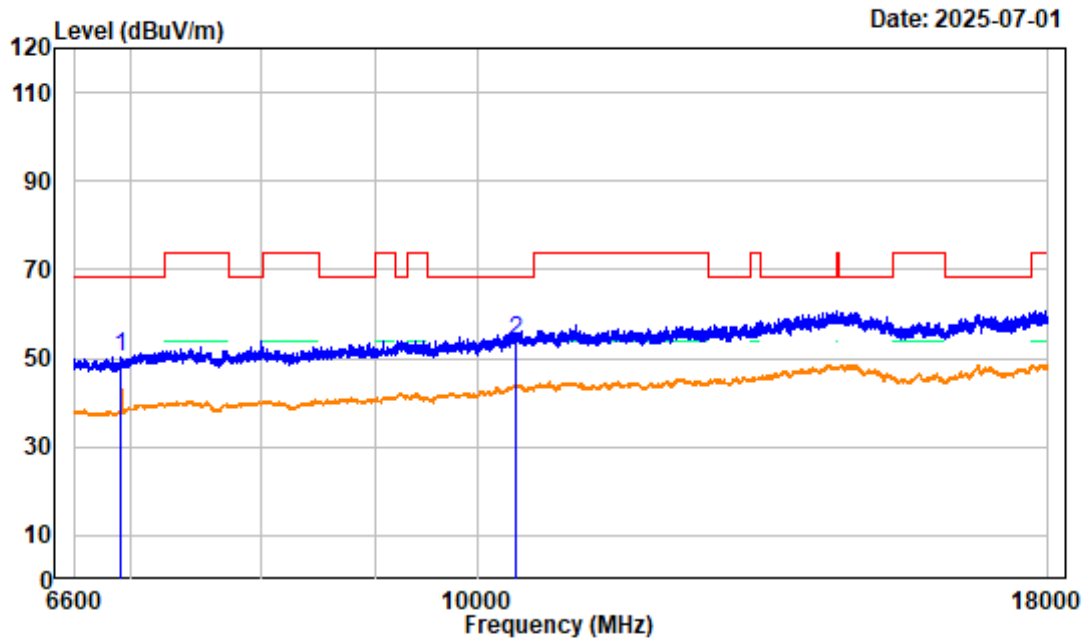

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504U29636E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11N20 Middle Channel 5200MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6929.175	-2.63	52.95	50.32	68.20	-17.88 Peak
2	10400.470	4.10	49.87	53.97	68.20	-14.23 Peak


802.11N20 Middle Channel 6.6GHz-18GHz_VERTICAL

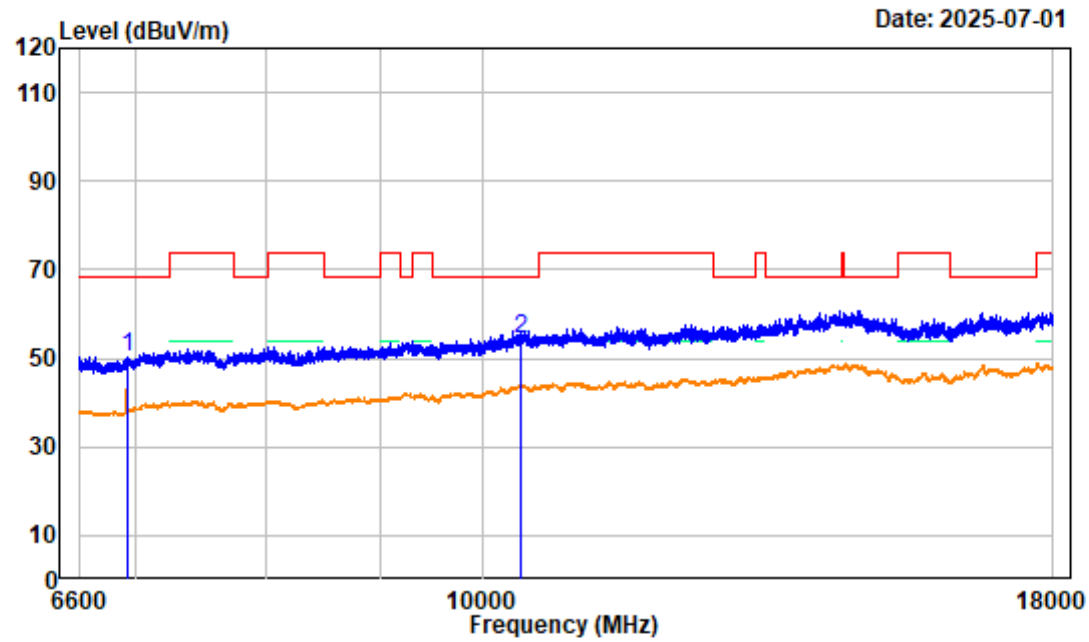

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504U29636E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11N20 Middle Channel 5200MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6933.450	-2.58	52.84	50.26	68.20	-17.94	Peak
2 10400.470	4.10	50.07	54.17	68.20	-14.03	Peak


802.11N20 High Channel 1GHz-6.6GHz_HORIZONTAL

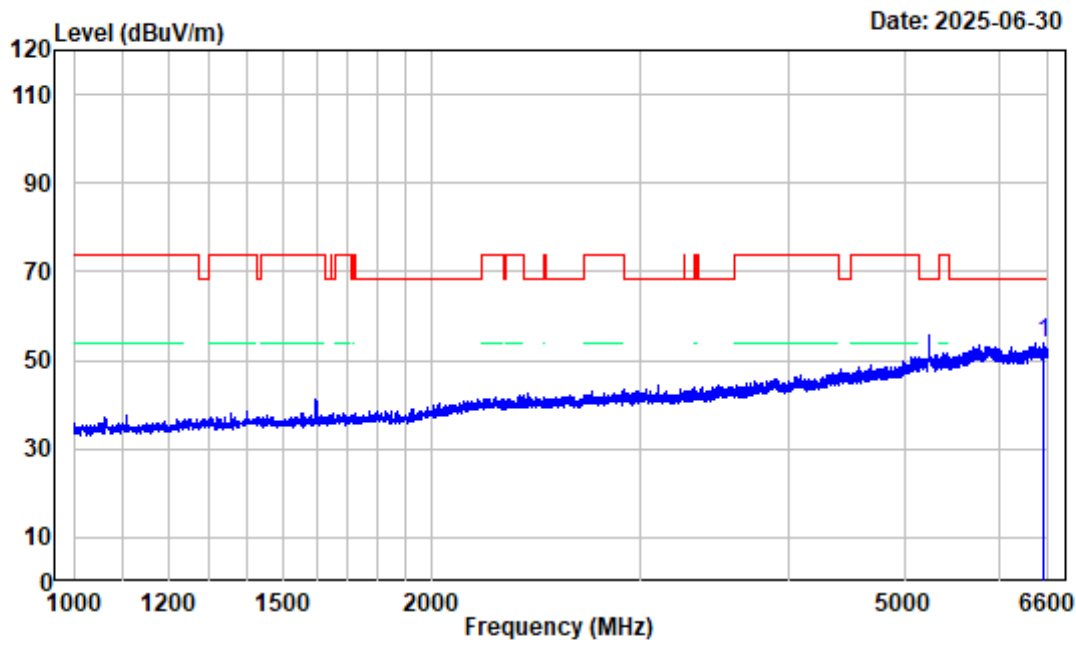

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504U29636E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11N20 High Channel 5240MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6537.700	-3.74	57.71	53.97	68.20	-14.23 Peak


802.11N20 High Channel 1GHz-6.6GHz_VERTICAL

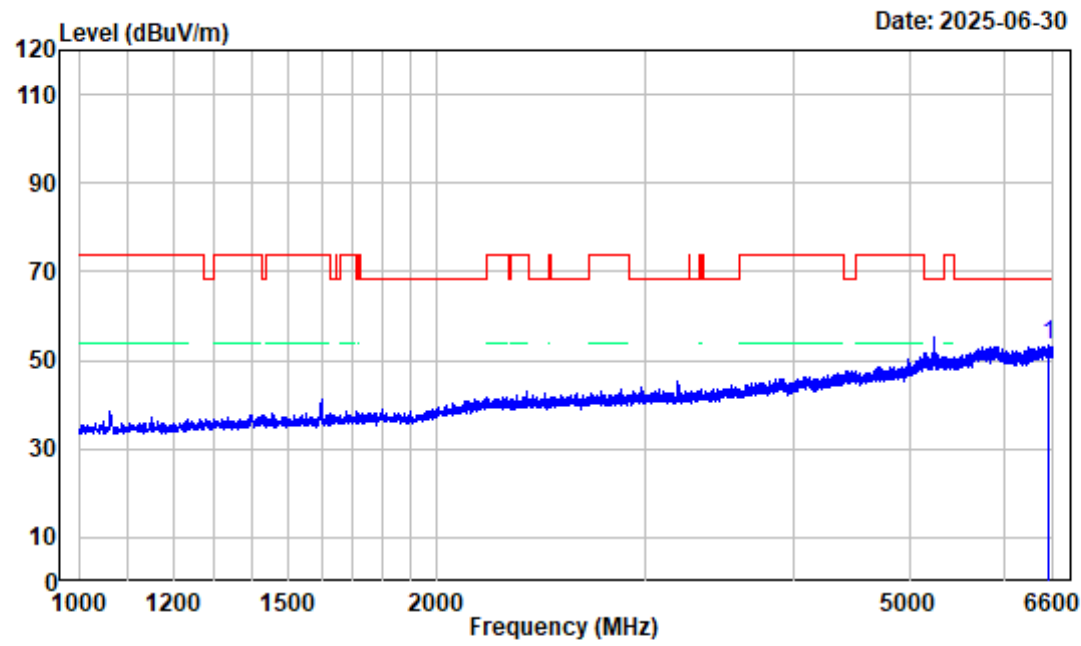

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504U29636E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11N20 High Channel 5240MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6538.400	-3.74	57.03	53.29	68.20	-14.91 Peak

802.11N20 High Channel 6.6GHz-18GHz_HORIZONTAL

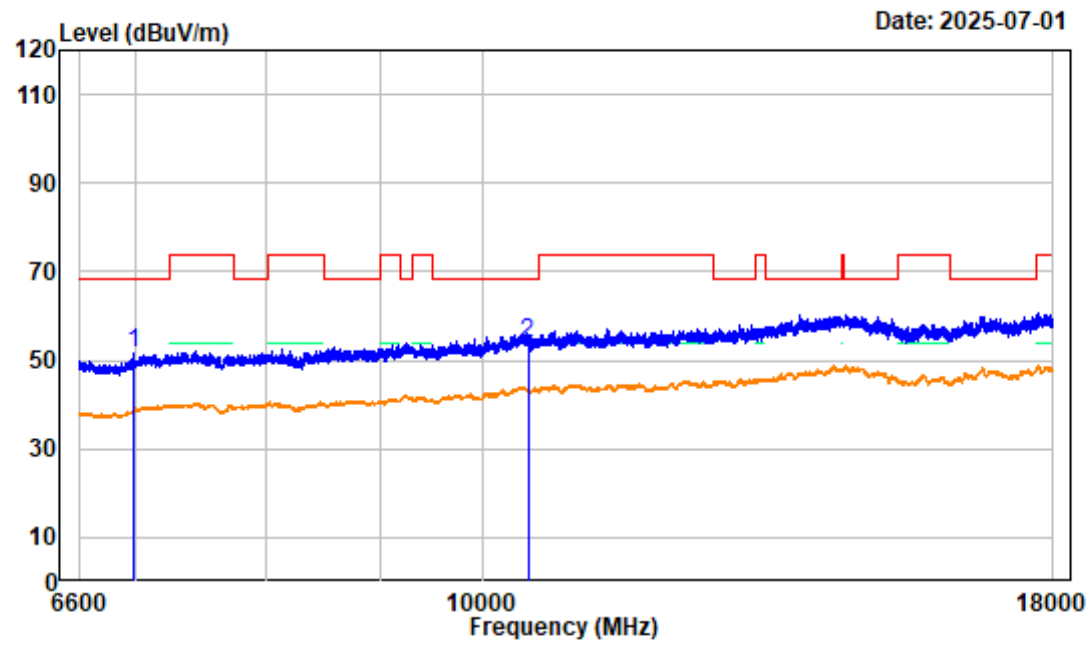

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U29636E-RF


Test Mode : TransmittingTester:Kevin Lv

Note : 802.11N20 High Channel 5240MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6986.175	-2.41	54.08	51.67	68.20	-16.53 Peak
2	10480.000	3.92	50.13	54.05	68.20	-14.15 Peak

802.11N20 High Channel 6.6GHz-18GHz_VERTICAL

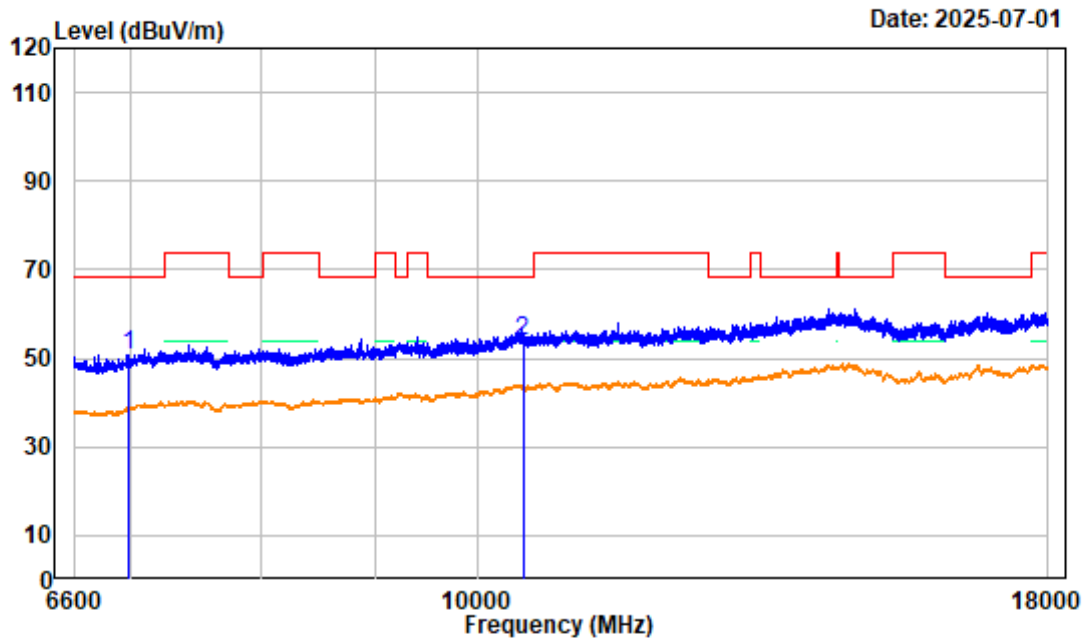

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U29636E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11N20 High Channel 5240MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6986.175	-2.41	52.96	50.55	68.20	-17.65 Peak
2	10480.280	3.92	50.12	54.04	68.20	-14.16 Peak

802.11N20 High Channel Bandedge_HORIZONTAL

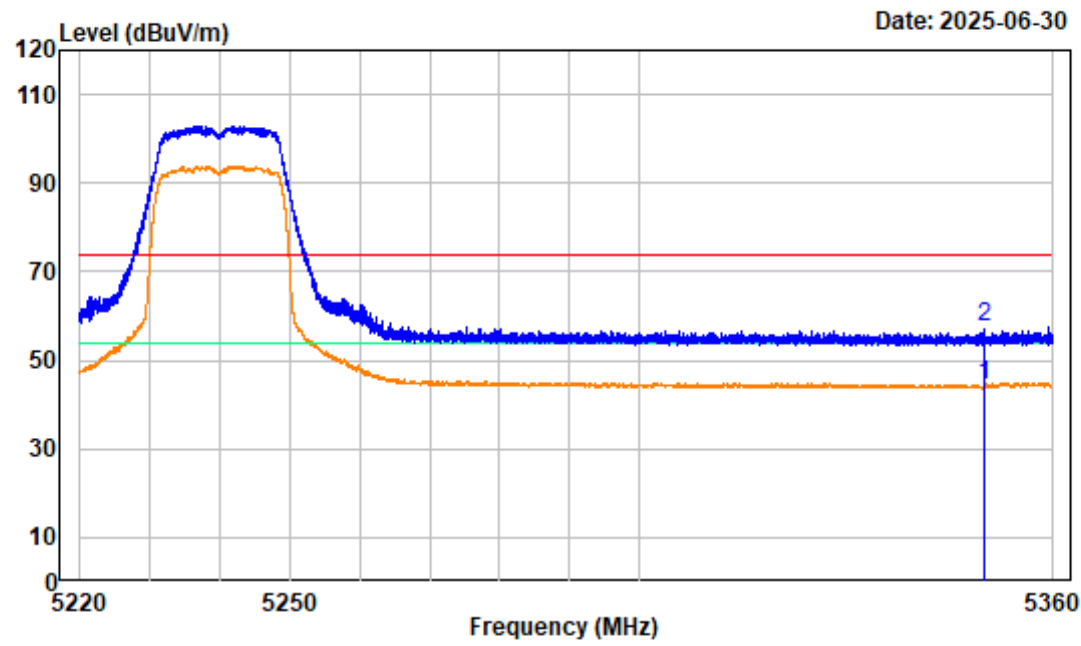

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U29636E-RF


Test Mode : TransmittingTester:Kevin Lv

Note : 802.11N20 High Channel 5240MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.81	50.39	44.58	54.00	-9.42 average
2	5350.000	-5.81	63.49	57.68	74.00	-16.32 peak


802.11N20 High Channel Bandedge_VERTICAL

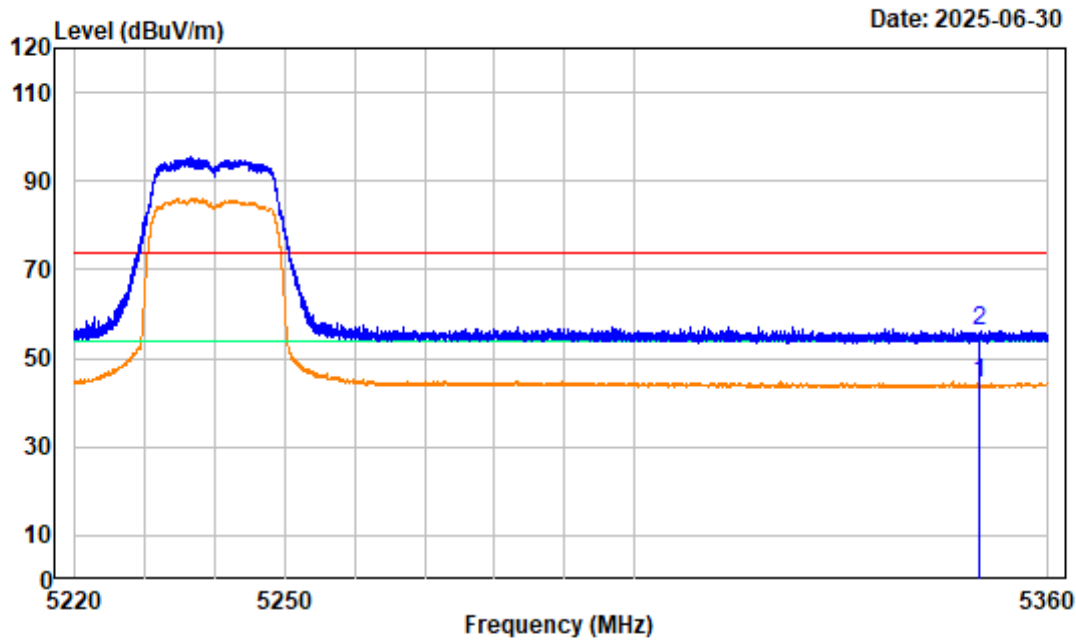

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504U29636E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11N20 High Channel 5240MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.81	50.09	44.28	54.00	-9.72 average
2	5350.000	-5.81	62.09	56.28	74.00	-17.72 peak


802.11N40 Low Channel 1GHz-6.6GHz_HORIZONTAL

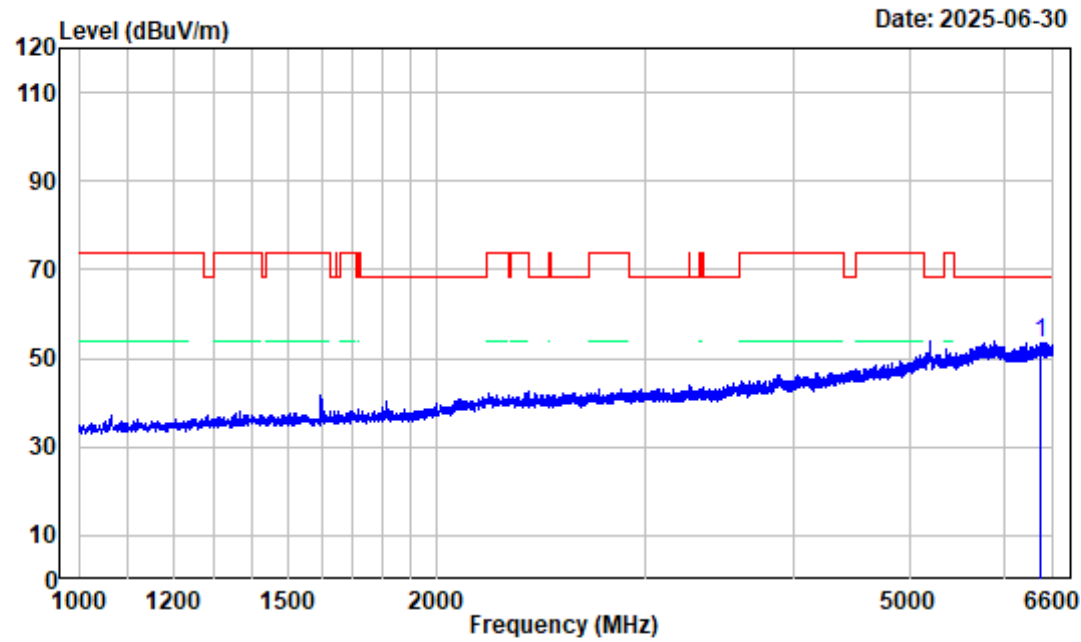

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504U29636E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11N40 Low Channel 5190MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6444.600	-3.62	57.13	53.51	68.20	-14.69 Peak


802.11N40 Low Channel 1GHz-6.6GHz_VERTICAL

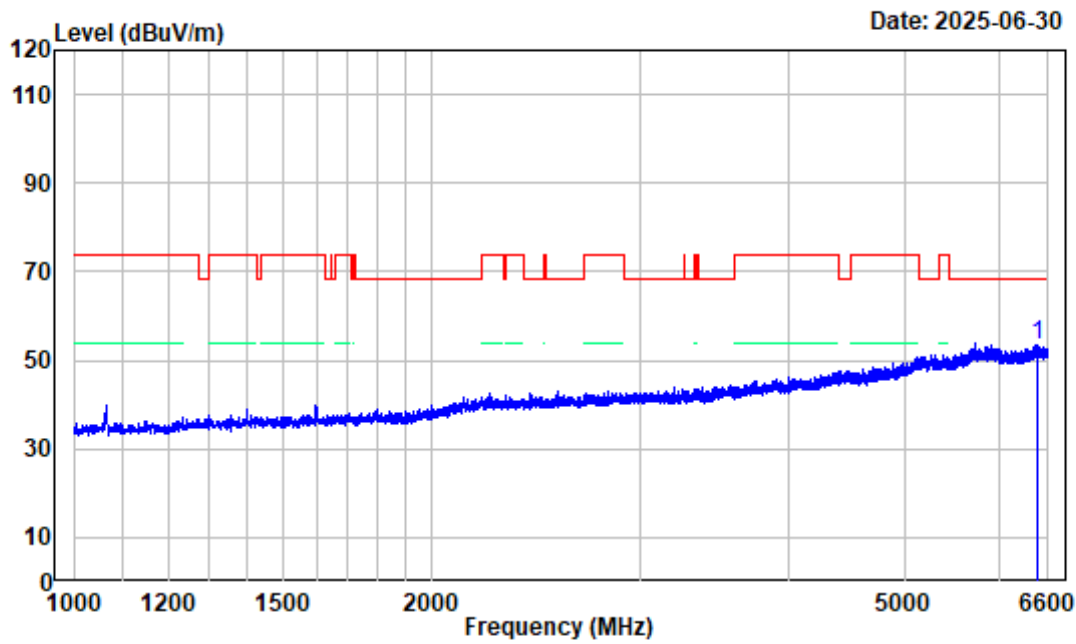

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504U29636E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11N40 Low Channel 5190MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6467.000	-3.69	57.03	53.34	68.20	-14.86	Peak


802.11N40 Low Channel 6.6GHz-18GHZ_HORIZONTAL

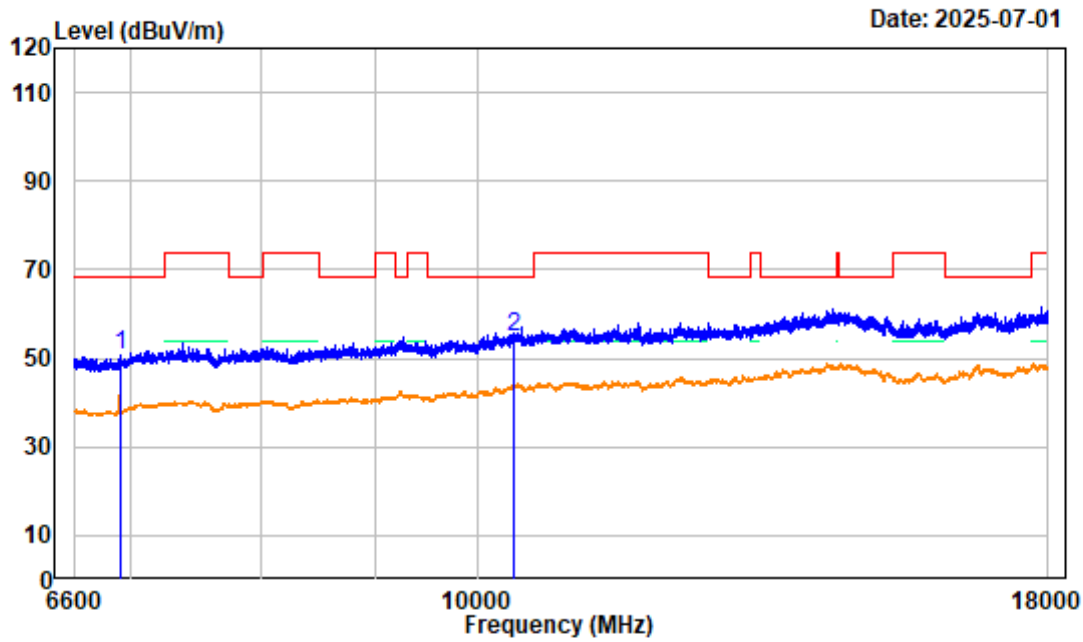

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504U29636E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11N40 Low Channel 5190MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6919.200	-2.73	53.32	50.59	68.20	-17.61 Peak
2	10380.530	3.97	50.71	54.68	68.20	-13.52 Peak

802.11N40 Low Channel 6.6GHz-18GHZ_VERTICAL

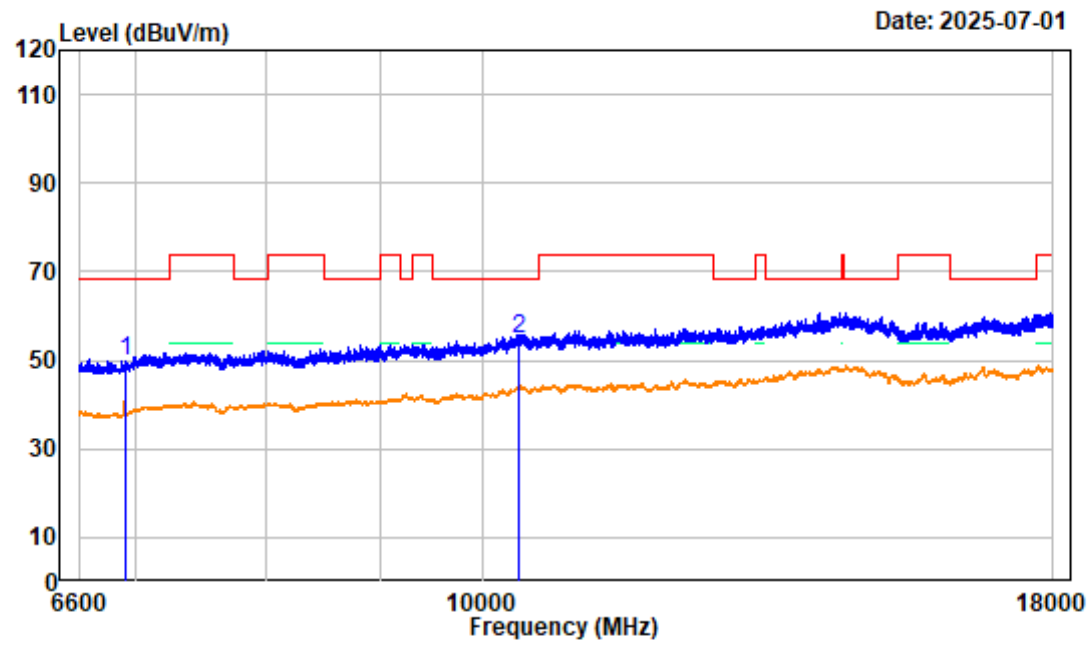

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U29636E-RF


Test Mode : TransmittingTester:Kevin Lv

Note : 802.11N40 Low Channel 5190MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6919.200	-2.73	52.52	49.79	68.20	-18.41	Peak
2 10380.530	3.97	50.69	54.66	68.20	-13.54	Peak


802.11N40 Low Channel Bandedge_HORIZONTAL

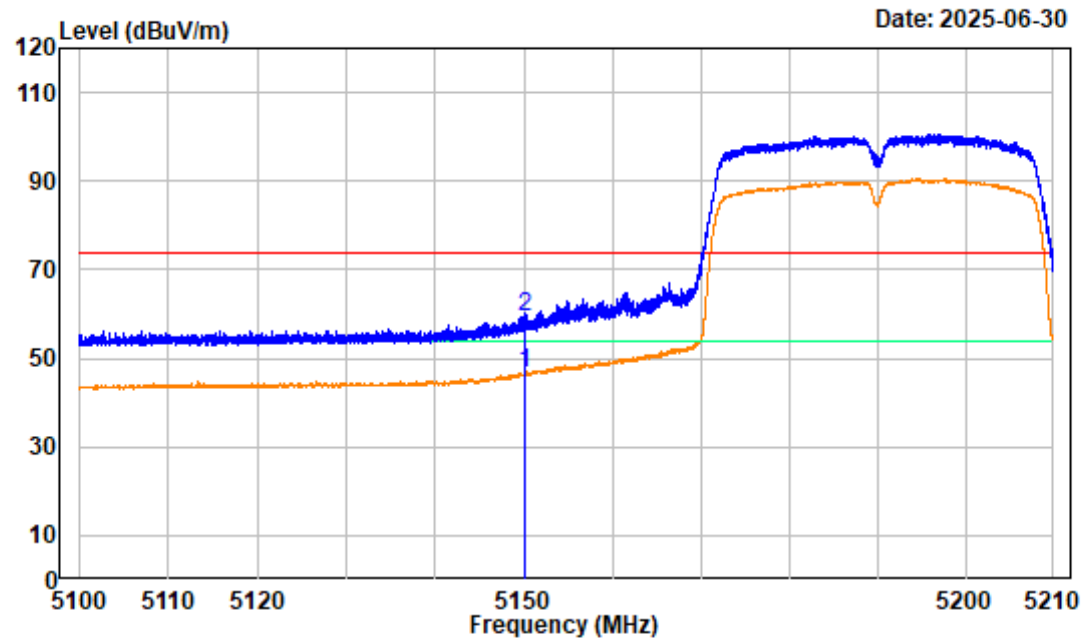

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504U29636E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11N40 Low Channel 5190MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	Line	Limit	
1	5150.000	-5.99	52.81	46.82	54.00	-7.18 average
2	5150.000	-5.99	65.31	59.32	74.00	-14.68 peak


802.11N40 Low Channel Bandedge_VERTICAL

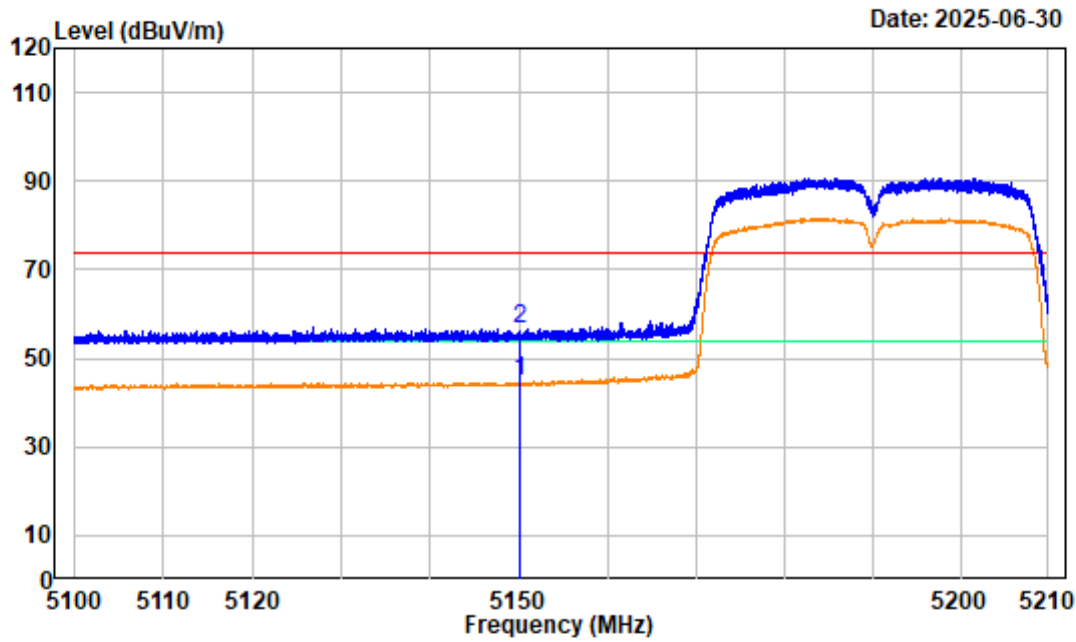

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504U29636E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11N40 Low Channel 5190MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-5.99	50.64	44.65	54.00	-9.35 average
2	5150.000	-5.99	62.54	56.55	74.00	-17.45 peak


802.11N40 High Channel 1GHz-6.6GHz_HORIZONTAL

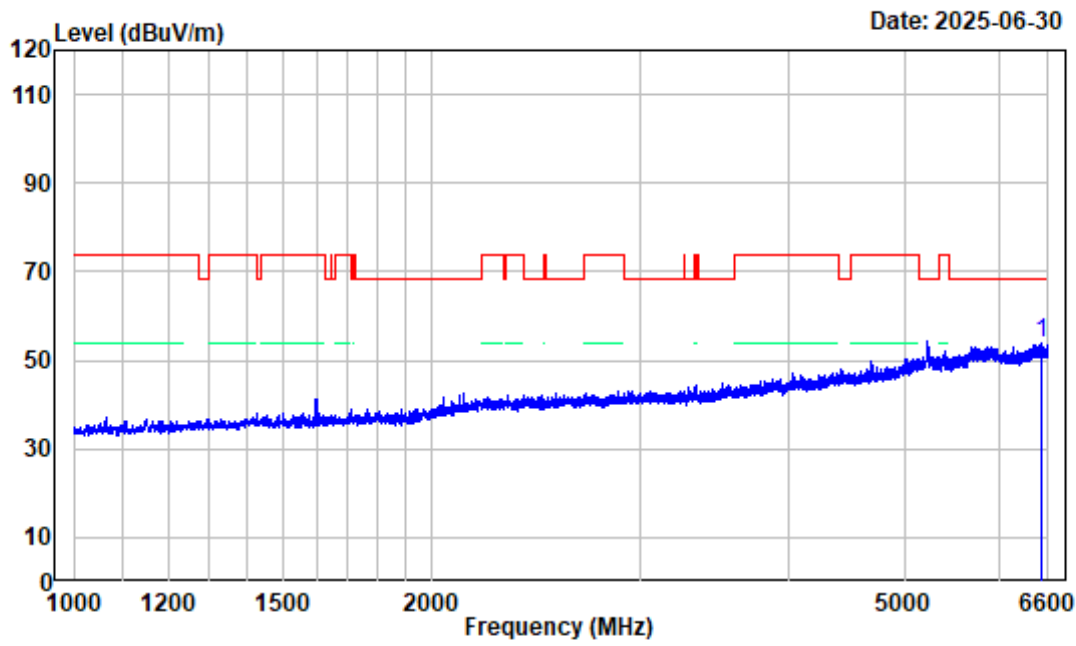

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504U29636E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11N40 High Channel 5230MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6515.300	-3.79	57.80	54.01	68.20	-14.19 Peak


802.11N40 High Channel 1GHz-6.6GHz_VERTICAL

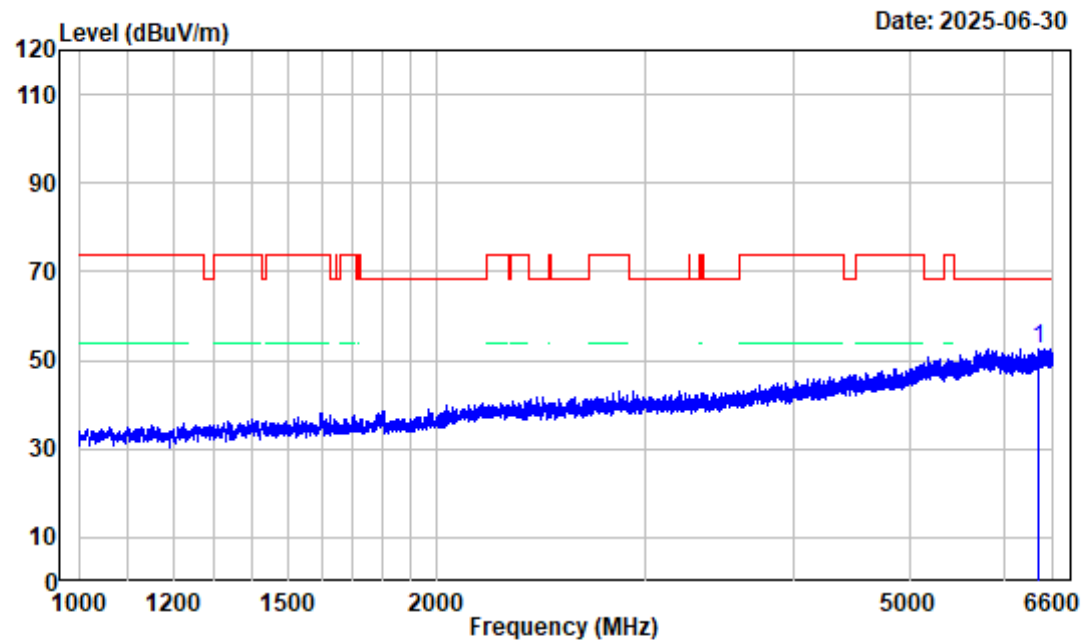

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504U29636E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11N40 High Channel 5230MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6409.600	-3.66	56.30	52.64	68.20	-15.56	Peak


802.11N40 High Channel 6.6GHz-18GHz_HORIZONTAL

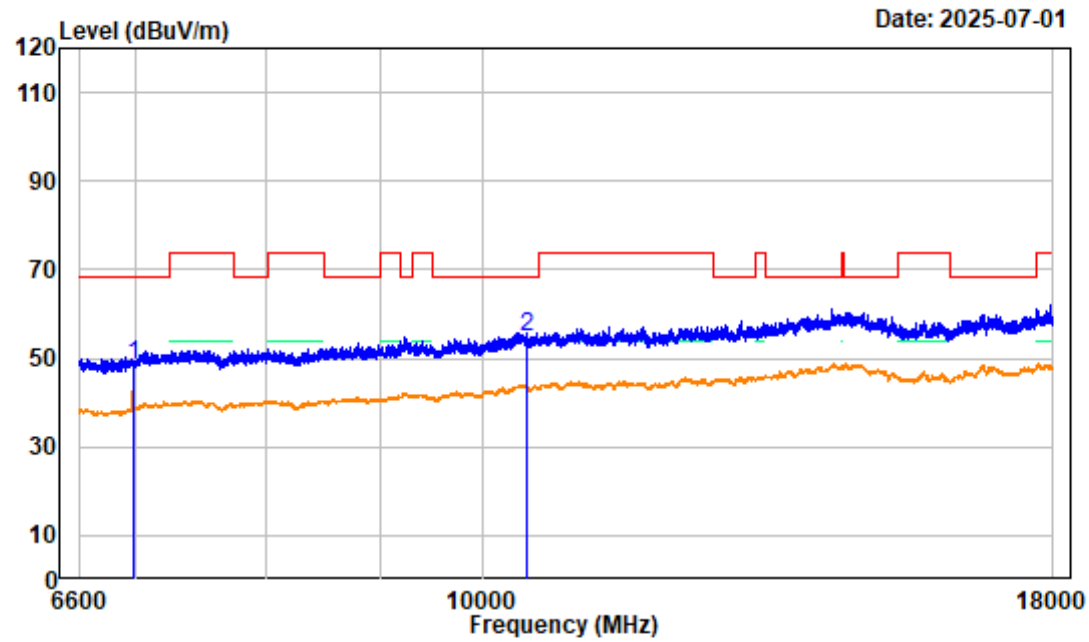

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504U29636E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11N40 High Channel 5230MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6979.050	-2.42	51.08	48.66	68.20	-19.54 Peak
2	10460.330	4.17	50.47	54.64	68.20	-13.56 Peak

802.11N40 High Channel 6.6GHz-18GHz_VERTICAL

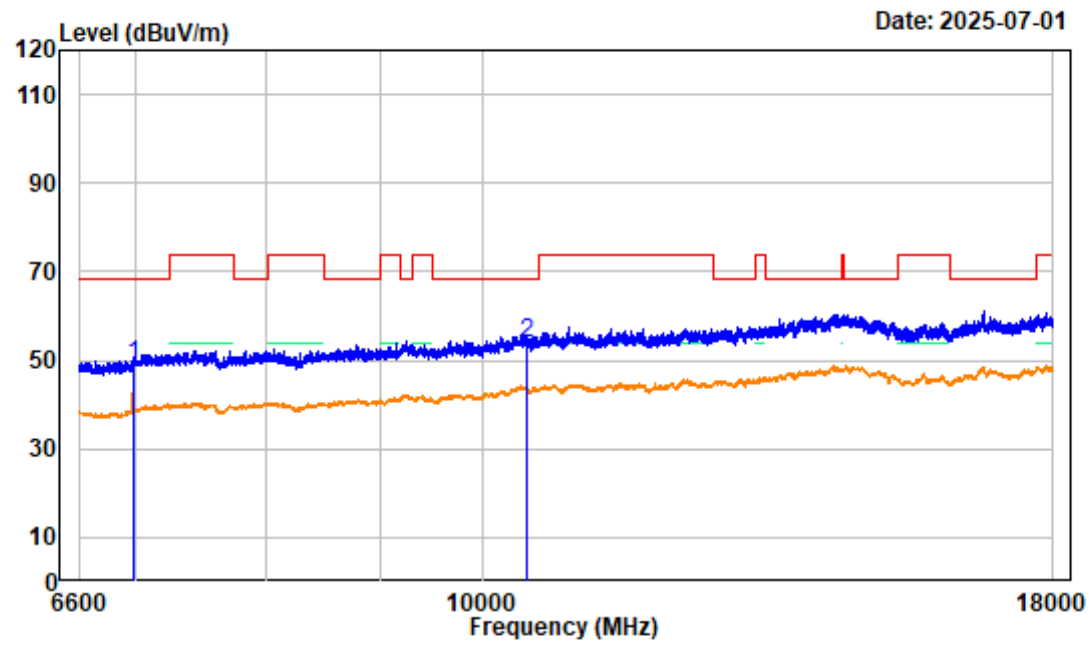

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U29636E-RF


Test Mode : TransmittingTester:Kevin Lv

Note : 802.11N40 High Channel 5230MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6979.050	-2.42	51.43	49.01	68.20	-19.19 Peak
2	10460.330	4.17	49.58	53.75	68.20	-14.45 Peak


802.11N40 High Channel Bandedge_HORIZONTAL

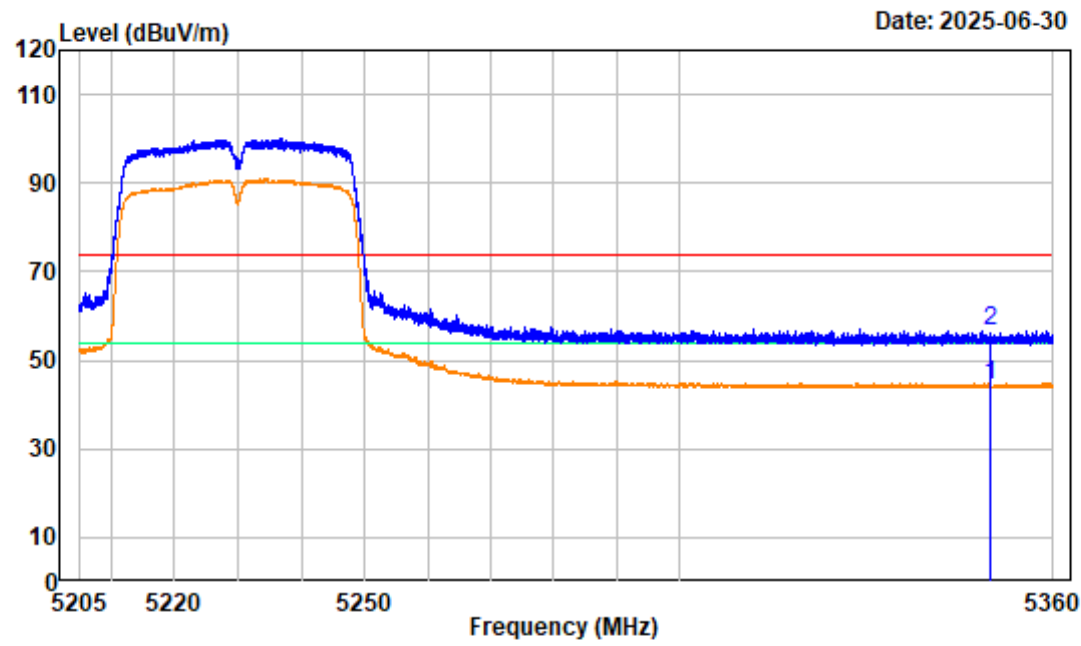

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504U29636E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11N40 High Channel 5230MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.81	50.28	44.47	54.00	-9.53 average
2	5350.000	-5.81	62.38	56.57	74.00	-17.43 peak

802.11N40 High Channel Bandedge_VERTICAL

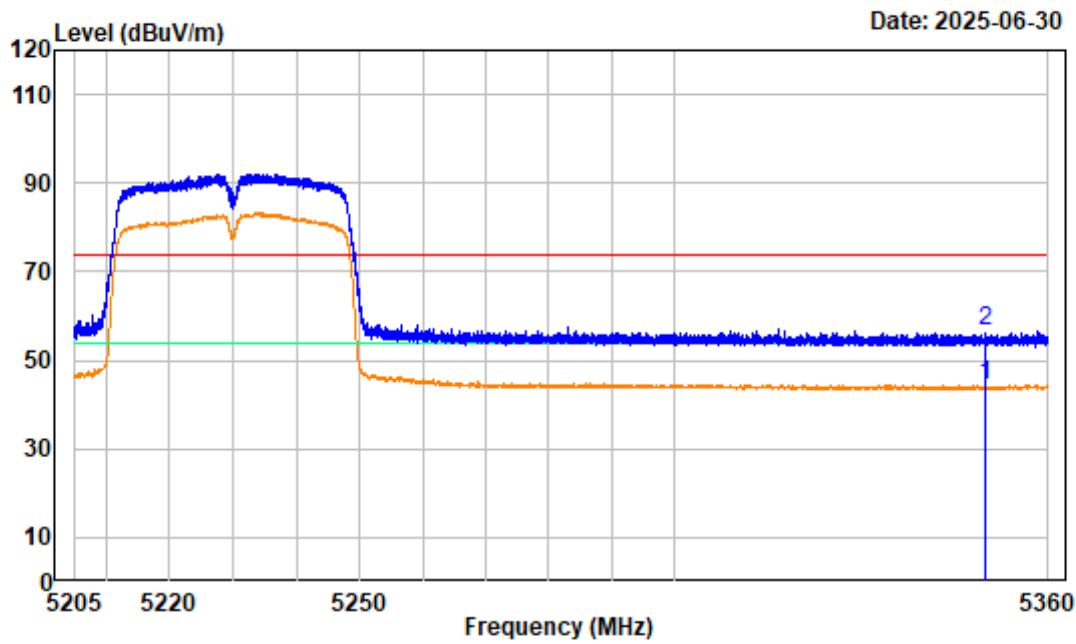

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U29636E-RF

Test Mode : TransmittingTester:Kevin Lv


Note : 802.11N40 High Channel 5230MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.81	50.04	44.23	54.00	-9.77 average
2	5350.000	-5.81	62.24	56.43	74.00	-17.57 peak

For band4:

802.11A Low Channel 1GHz-6.6GHz_HORIZONTAL

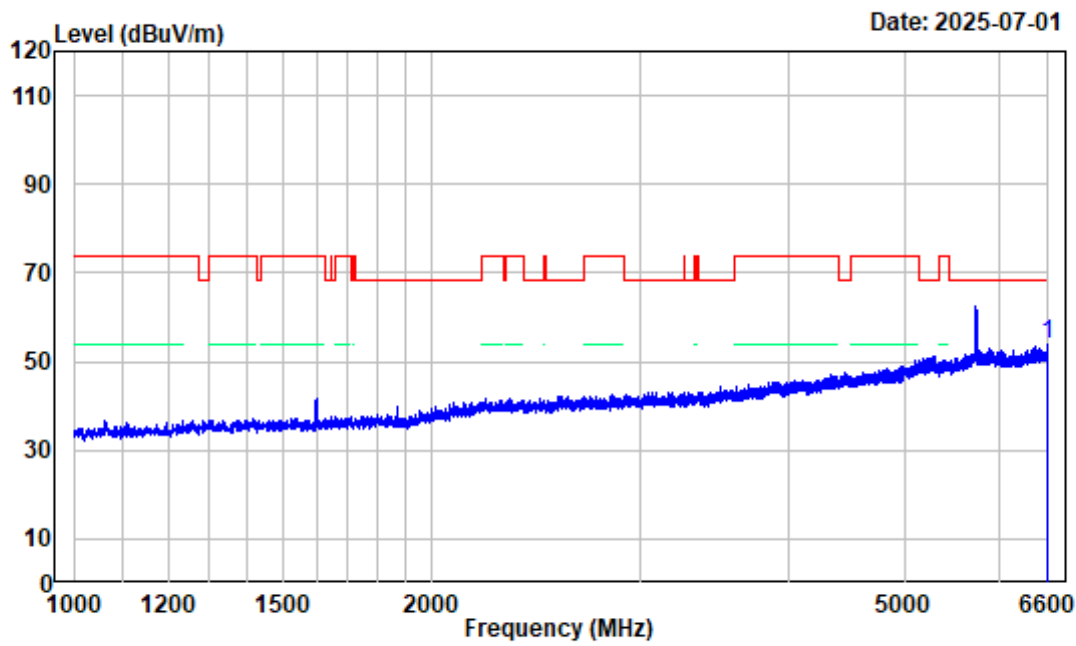

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U29636E-RF


Test Mode : TransmittingTester:Kevin Lv

Note : 802.11A Low Channel 5745MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6598.600	-3.55	57.34	53.79	68.20	-14.41 Peak


802.11A Low Channel 1GHz-6.6GHz_VERTICAL

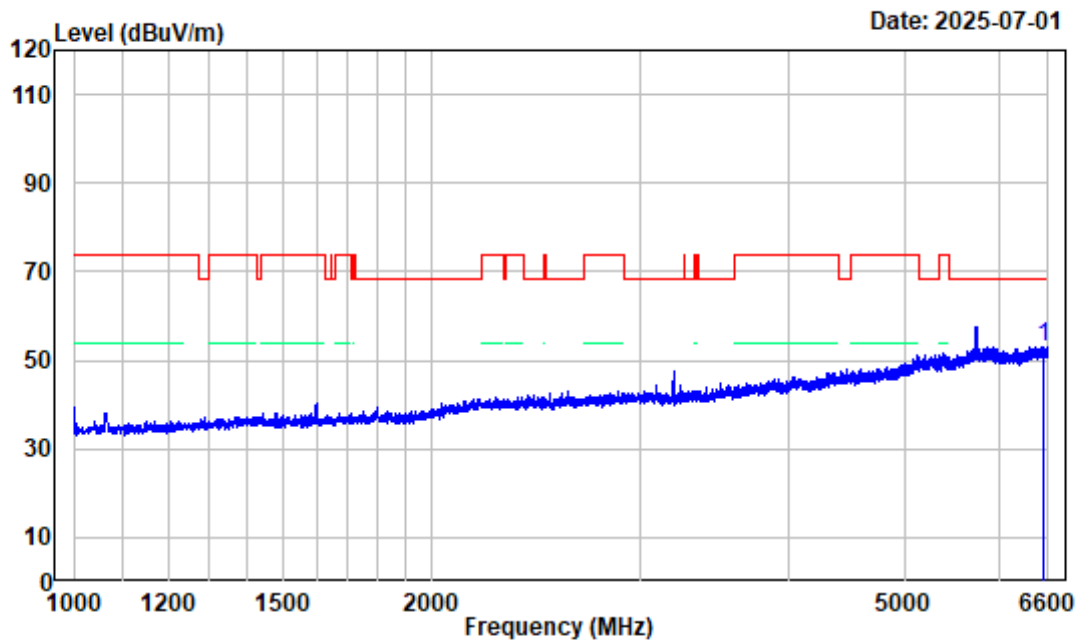

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504U29636E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A Low Channel 5745MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6531.400	-3.76	56.83	53.07	68.20	-15.13 Peak

802.11A Low Channel 6.6GHz-18GHz_HORIZONTAL

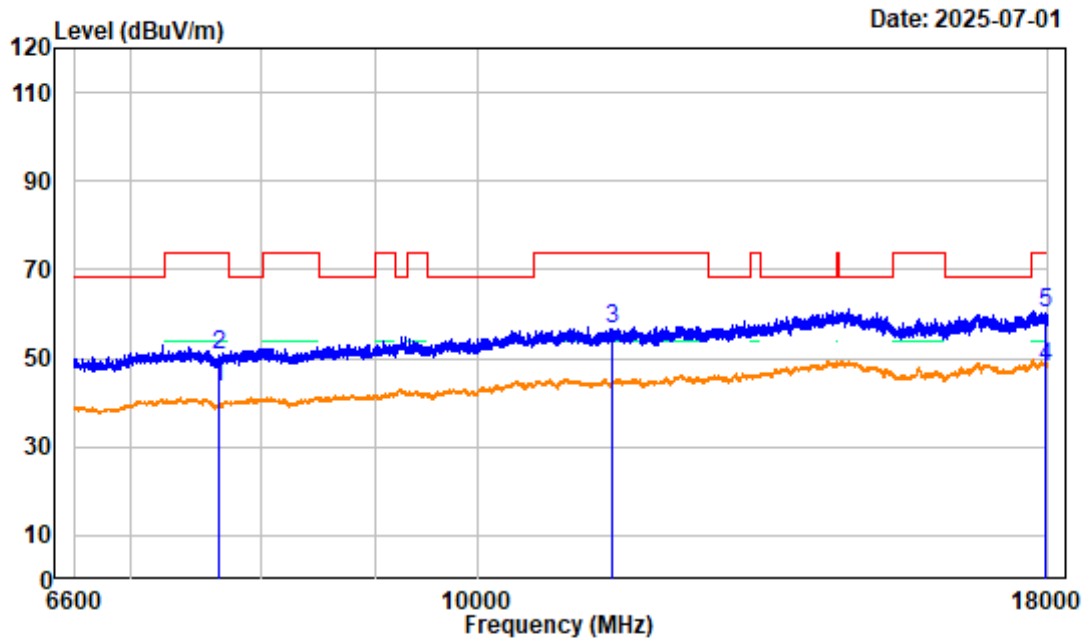

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U29636E-RF


Test Mode : TransmittingTester:Kevin Lv

Note : 802.11A Low Channel 5745MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7660.200	-1.45	45.08	43.63	54.00	-10.37 Average
2	7660.200	-1.45	52.02	50.57	74.00	-23.43 Peak
3	11490.600	6.12	50.46	56.58	74.00	-17.42 Peak
4	17957.250	8.20	39.72	47.92	54.00	-6.08 Average
5	17957.250	8.20	52.02	60.22	74.00	-13.78 Peak

802.11A Low Channel 6.6GHz-18GHz_VERTICAL

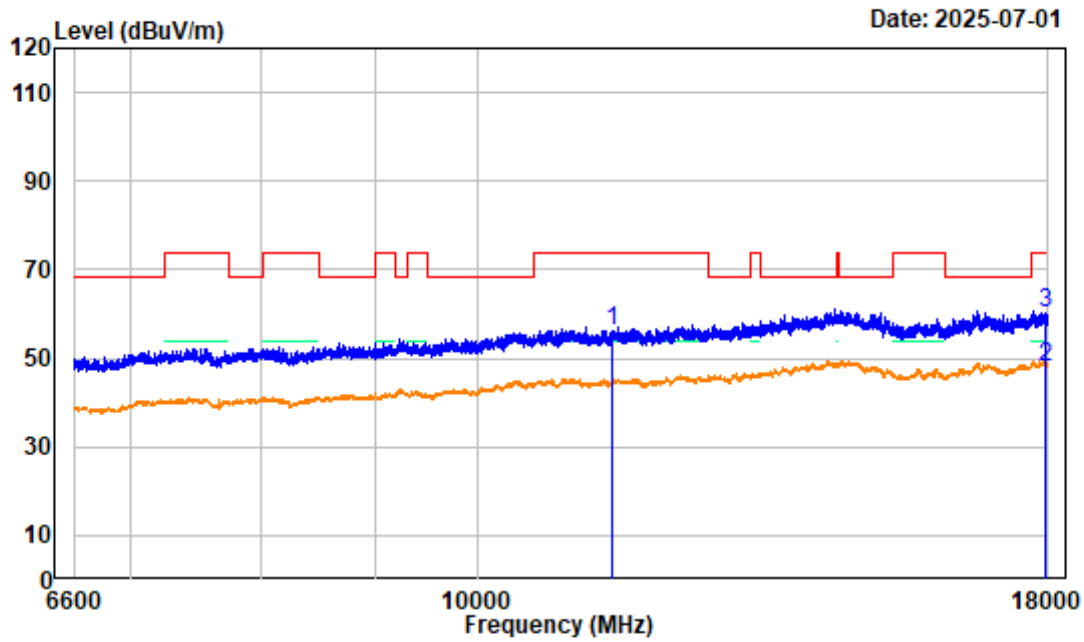

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U29636E-RF


Test Mode : TransmittingTester:Kevin Lv

Note : 802.11A Low Channel 5745MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11490.600	6.12	49.88	56.00	74.00	-18.00	Peak
2 17967.220	8.23	39.72	47.95	54.00	-6.05	Average
3 17967.220	8.23	51.91	60.14	74.00	-13.86	Peak

802.11A Low Channel Bandedge_HORIZONTAL

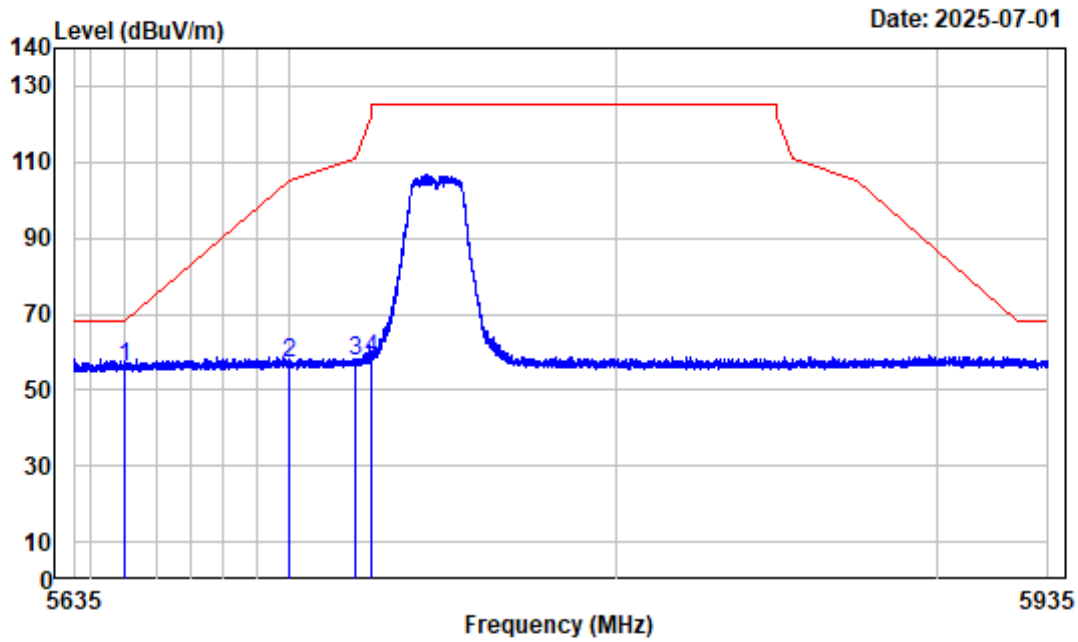

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U29636E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A Low Channel 5745MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.84	61.05	56.21	68.20	-11.99 peak
2	5700.000	-4.41	61.42	57.01	105.20	-48.19 peak
3	5720.000	-4.44	62.04	57.60	110.80	-53.20 peak
4	5725.000	-4.46	62.56	58.10	122.20	-64.10 peak

802.11A Low Channel Bandedge_VERTICAL

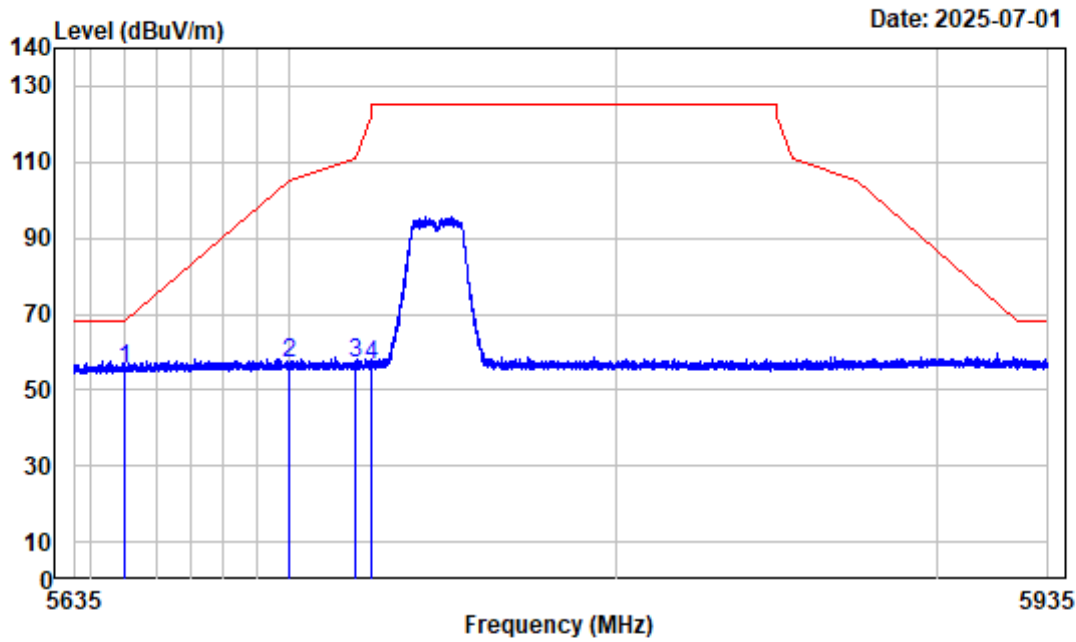

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U29636E-RF


Test Mode : TransmittingTester:Kevin Lv

Note : 802.11A Low Channel 5745MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.84	60.18	55.34	68.20	-12.86	peak
2	5700.000	-4.41	61.22	56.81	105.20	-48.39	peak
3	5720.000	-4.44	61.58	57.14	110.80	-53.66	peak
4	5725.000	-4.46	60.84	56.38	122.20	-65.82	peak


802.11A Middle Channel 1GHz-6.6GHz_HORIZONTAL

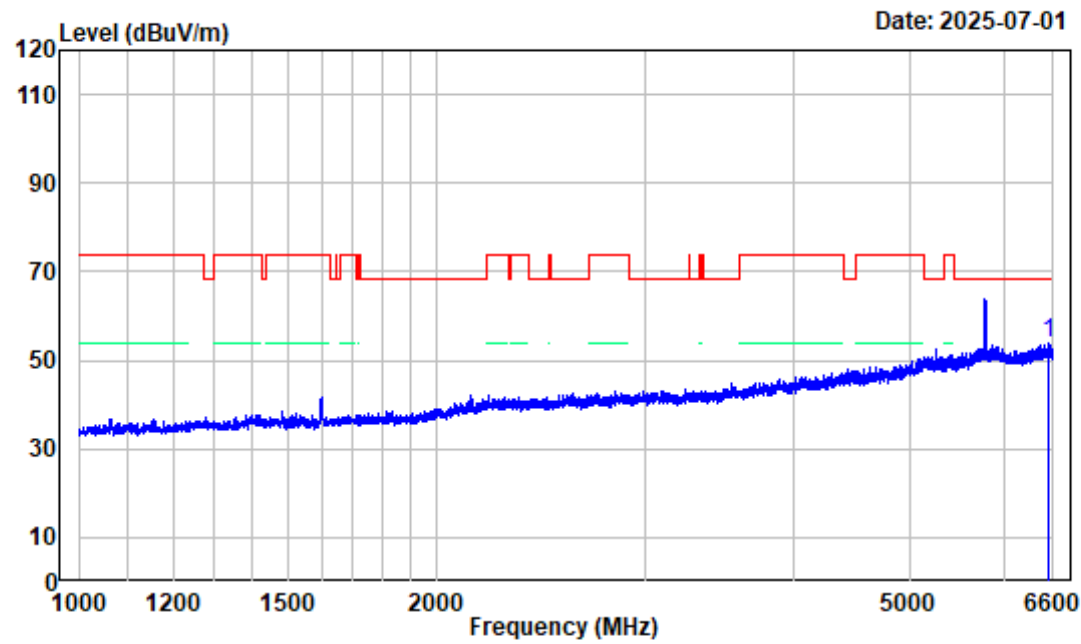

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504U29636E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A Middle Channel 5785MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6550.300	-3.72	57.60	53.88	68.20	-14.32 Peak


802.11A Middle Channel 1GHz-6.6GHz_VERTICAL

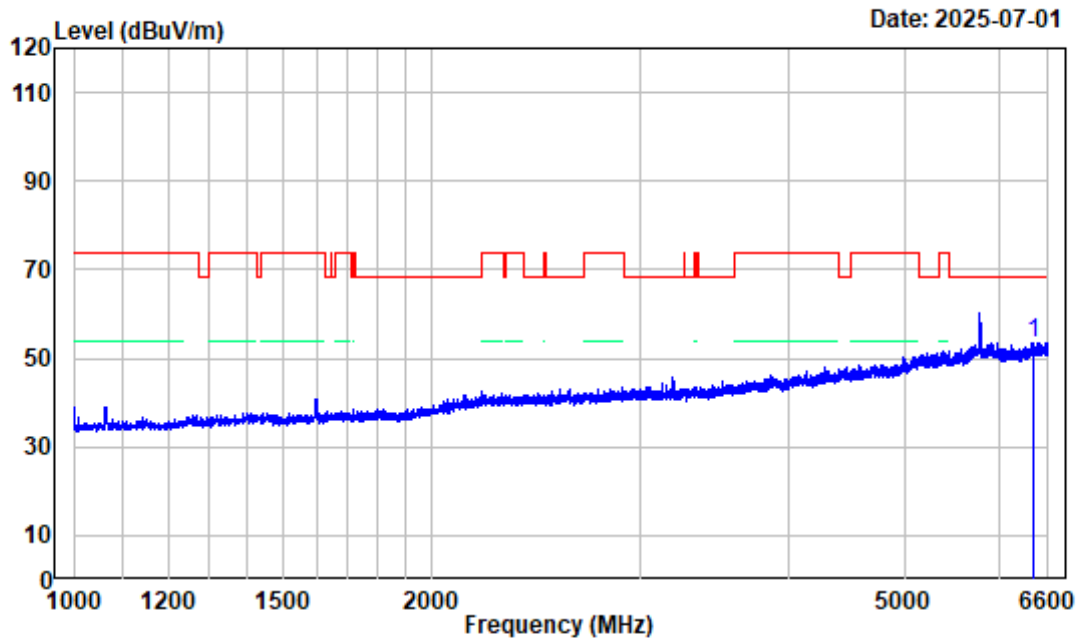

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504U29636E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A Middle Channel 5785MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6408.200	-3.66	57.27	53.61	68.20	-14.59 Peak


802.11A Middle Channel 6.6GHz-18GHz_HORIZONTAL

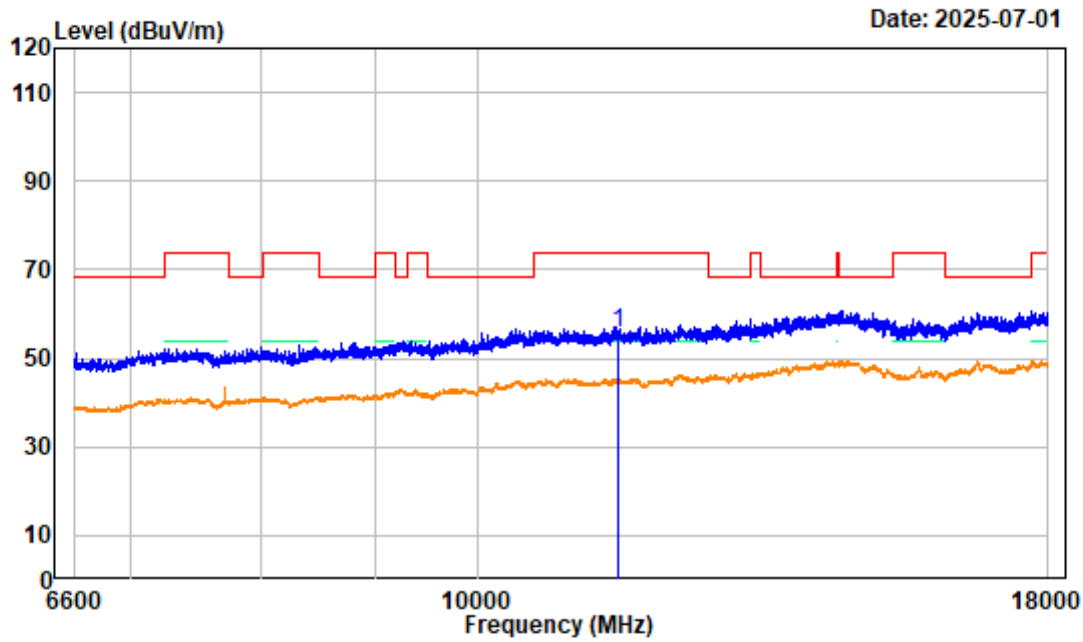

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504U29636E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A Middle Channel 5785MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11570.400	5.92	49.86	55.78	74.00	-18.22	Peak


802.11A Middle Channel 6.6GHz-18GHz_VERTICAL

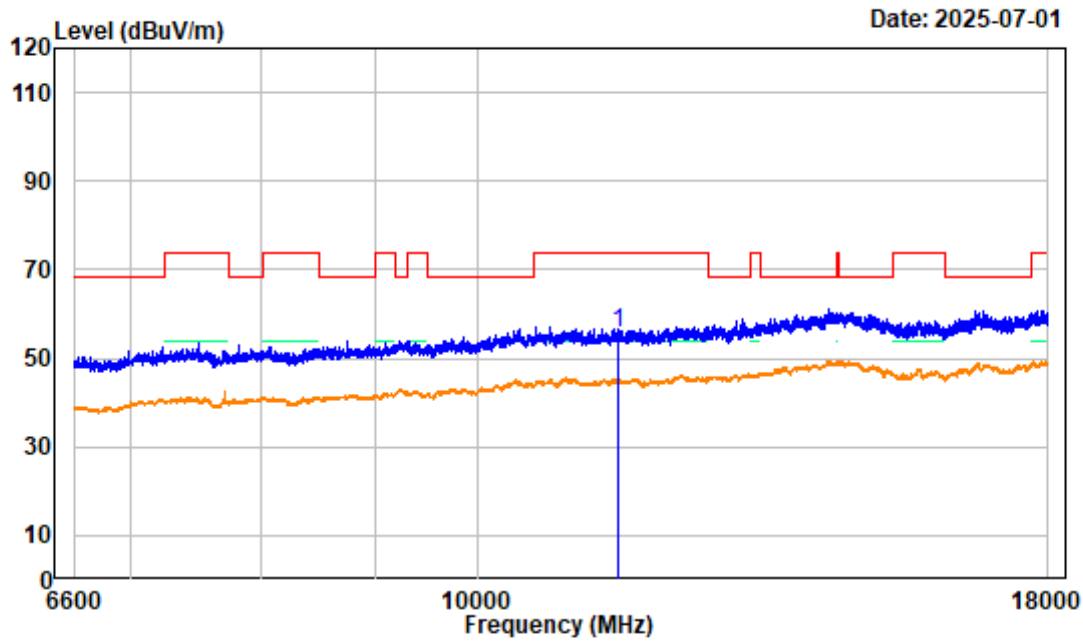

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504U29636E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A Middle Channel 5785MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11570.400	5.92	49.64	55.56	74.00	-18.44	Peak


802.11A High Channel 1GHz-6.6GHz_HORIZONTAL

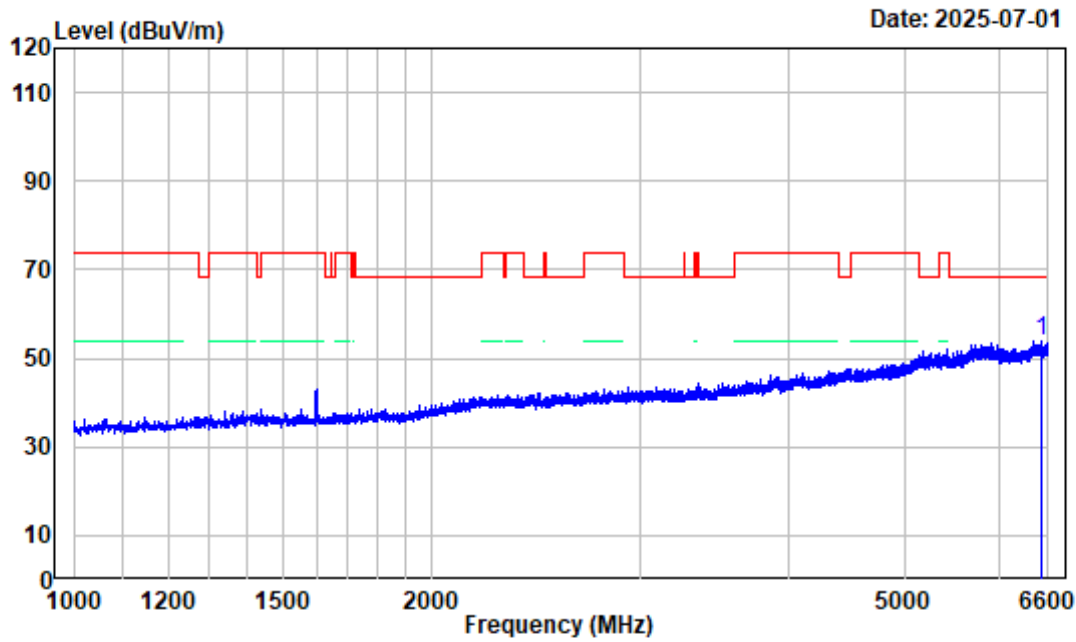

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504U29636E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A High Channel 5825MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6510.400	-3.80	57.86	54.06	68.20	-14.14 Peak


802.11A High Channel 1GHz-6.6GHz_VERTICAL

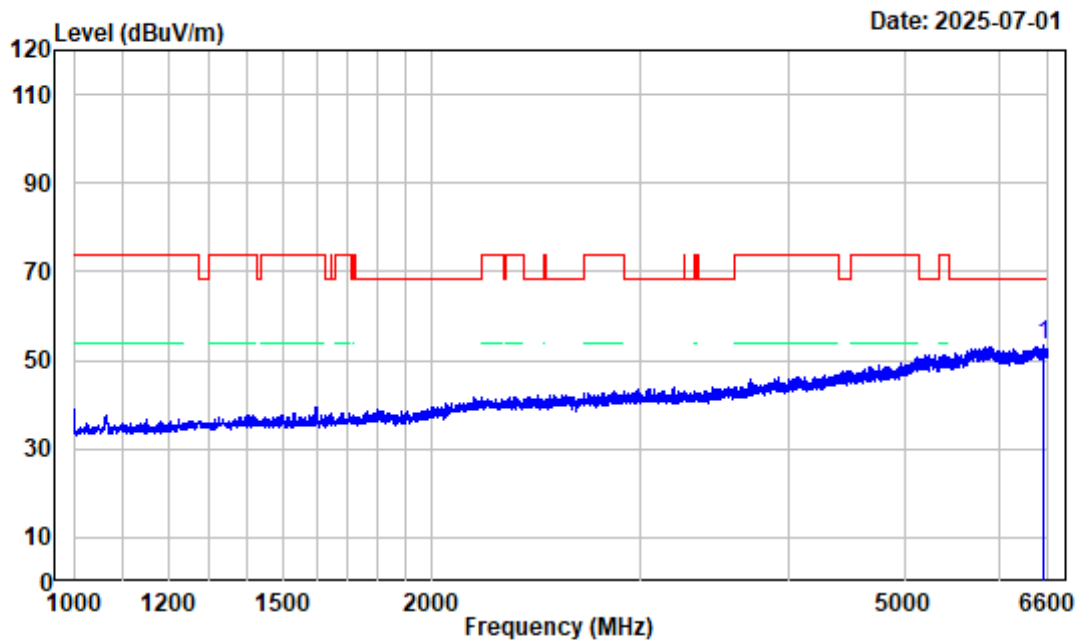

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504U29636E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A High Channel 5825MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6546.800	-3.73	57.16	53.43	68.20	-14.77 Peak


802.11A High Channel 6.6GHz-18GHz_HORIZONTAL

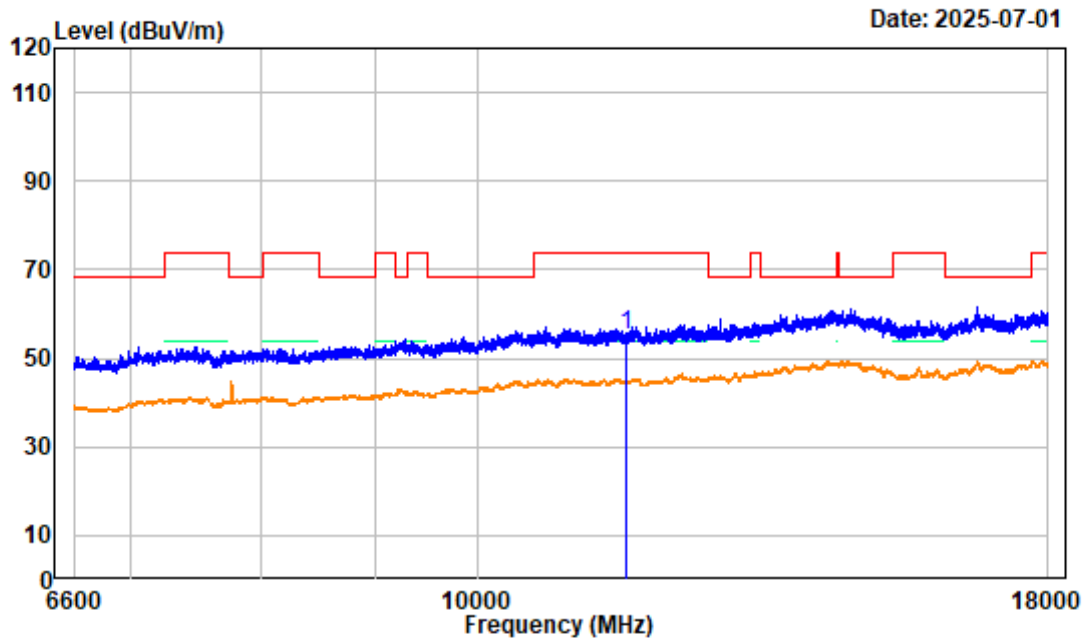

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504U29636E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A High Channel 5825MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11650.200	5.37	50.02	55.39	74.00	-18.61	Peak


802.11A High Channel 6.6GHz-18GHz_VERTICAL

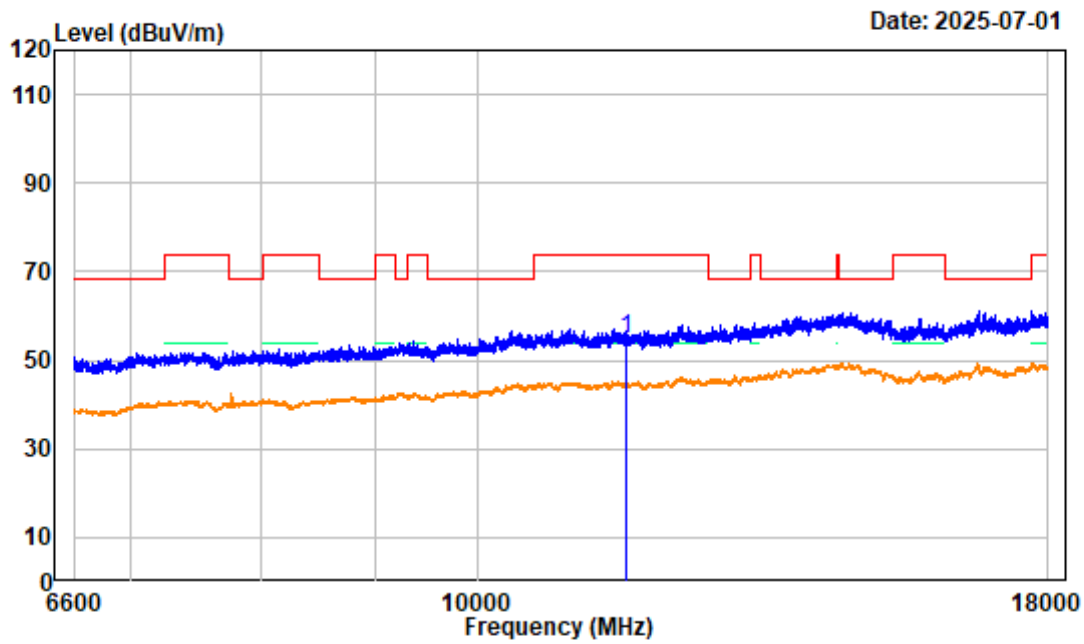

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504U29636E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A High Channel 5825MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11650.200	5.37	49.42	54.79	74.00	-19.21	Peak


802.11A High Channel Bandedge_HORIZONTAL

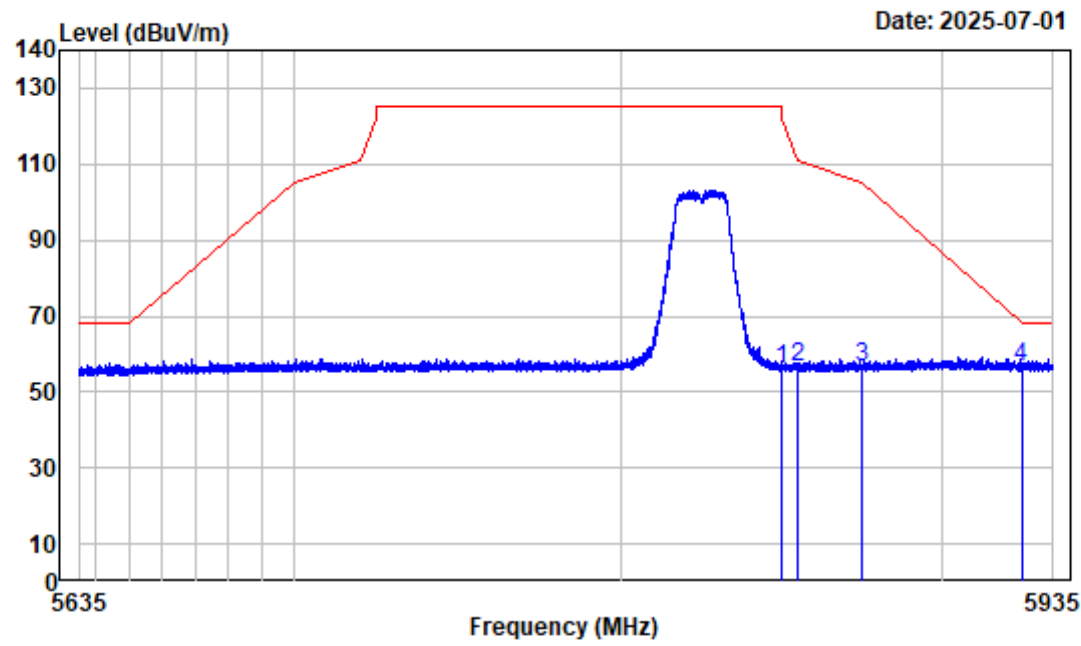

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504U29636E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A High Channel 5825MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.53	60.48	55.95	122.20	-66.25 peak
2	5855.000	-4.48	60.90	56.42	110.80	-54.38 peak
3	5875.000	-4.28	61.02	56.74	105.20	-48.46 peak
4	5925.000	-4.43	61.17	56.74	68.20	-11.46 peak

802.11A High Channel Bandedge_VERTICAL

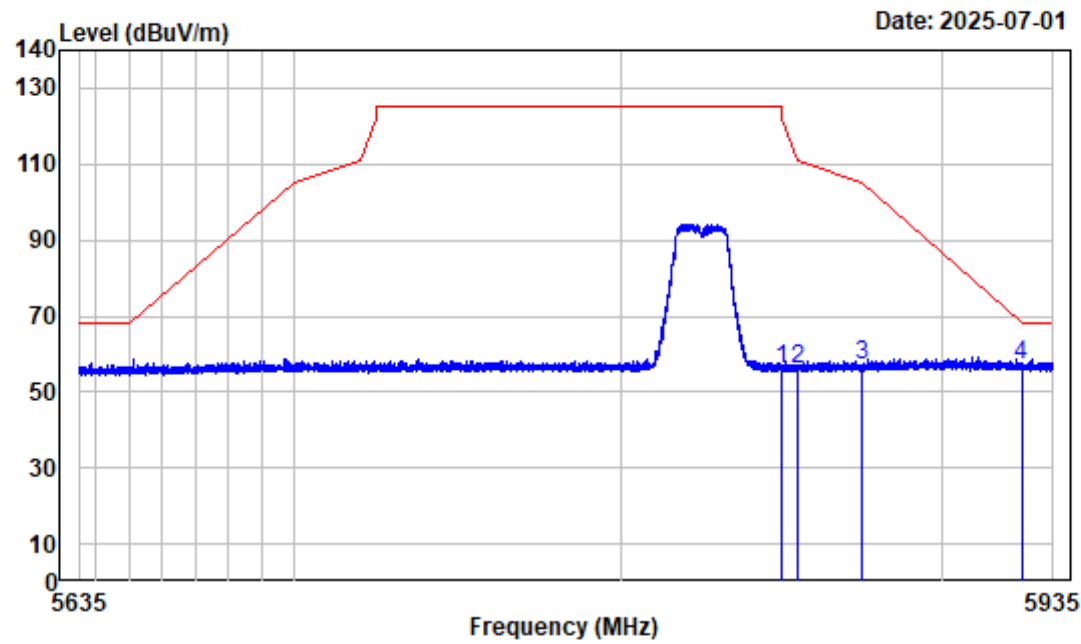

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U29636E-RF


Test Mode : TransmittingTester:Kevin Lv

Note : 802.11A High Channel 5825MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.53	60.55	56.02	122.20	-66.18 peak
2	5855.000	-4.48	60.70	56.22	110.80	-54.58 peak
3	5875.000	-4.28	61.46	57.18	105.20	-48.02 peak
4	5925.000	-4.43	61.62	57.19	68.20	-11.01 peak


802.11N20 Low Channel 1GHz-6.6GHz_HORIZONTAL

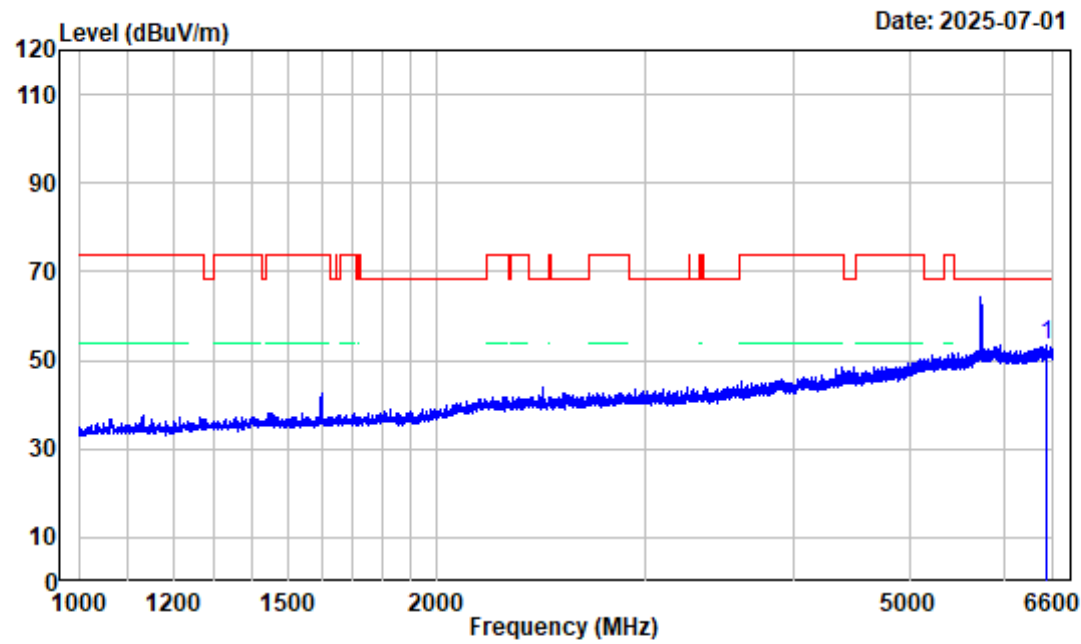

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504U29636E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11N20 Low Channel 5745MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6511.800	-3.80	57.42	53.62	68.20	-14.58 Peak

802.11N20 Low Channel 1GHz-6.6GHz_VERTICAL

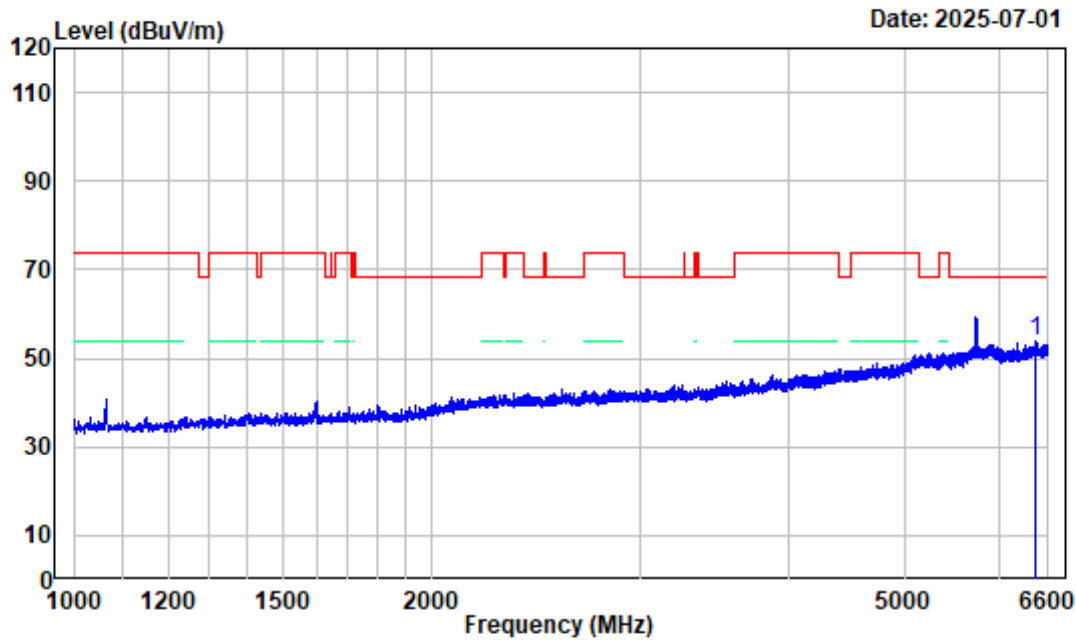

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U29636E-RF


Test Mode : TransmittingTester:Kevin Lv

Note : 802.11N20 Low Channel 5745MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6434.100	-3.63	57.35	53.72	68.20	-14.48 Peak


802.11N20 Low Channel 6.6GHz-18GHz_HORIZONTAL

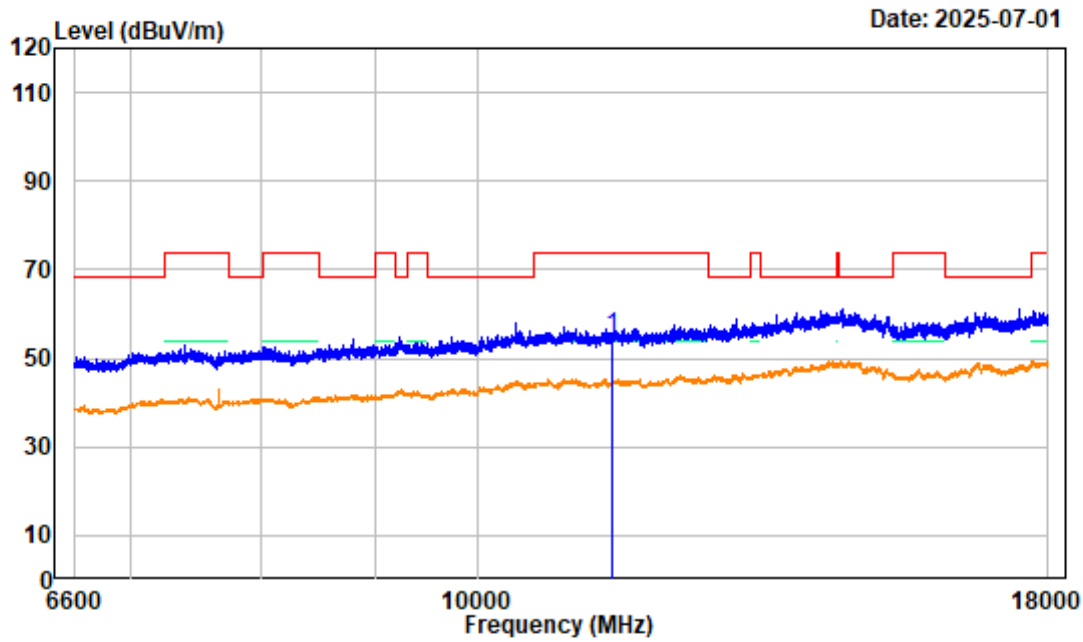

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504U29636E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11N20 Low Channel 5745MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11490.600	6.12	48.63	54.75	74.00	-19.25	Peak


802.11N20 Low Channel 6.6GHz-18GHz_VERTICAL

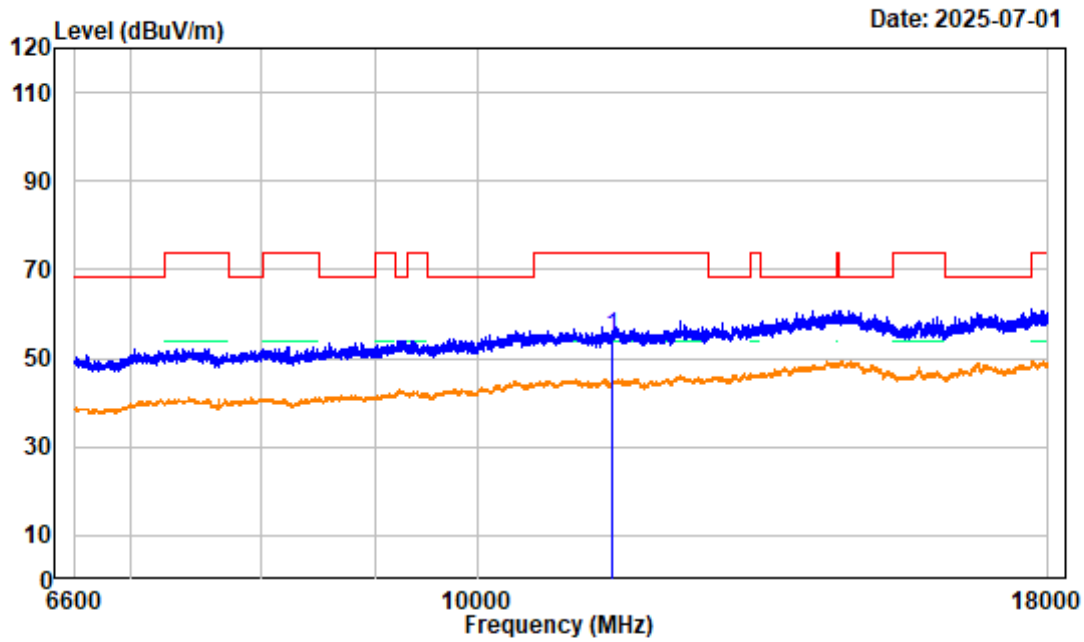

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504U29636E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11N20 Low Channel 5745MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11490.600	6.12	48.63	54.75	74.00	-19.25	Peak

802.11N20 Low Channel Bandedge_HORIZONTAL

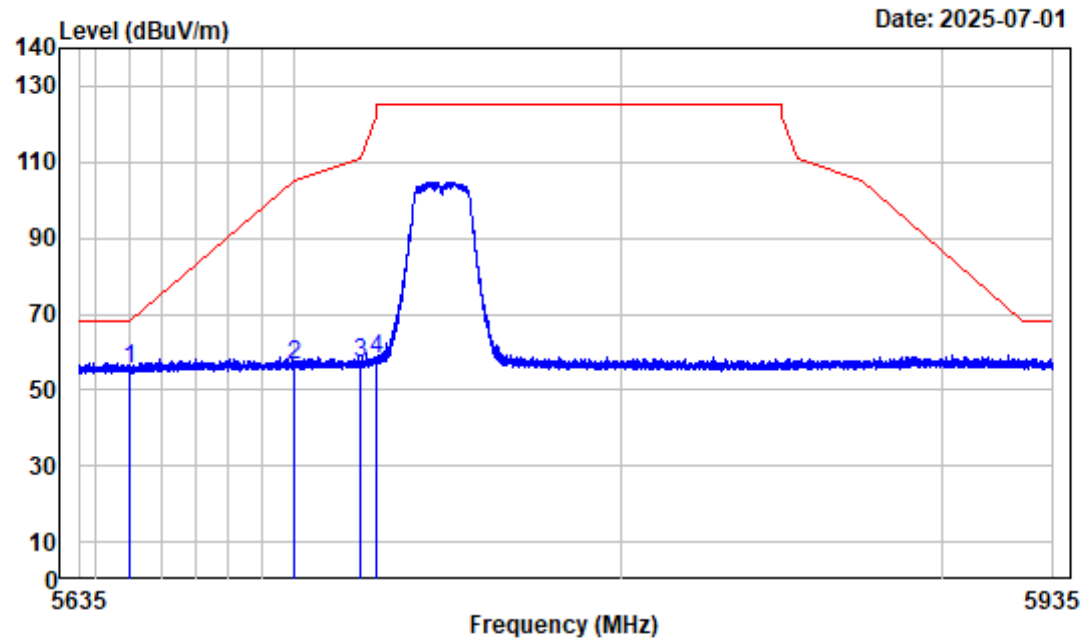

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U29636E-RF


Test Mode : TransmittingTester:Kevin Lv

Note : 802.11N20 Low Channel 5745MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.84	60.43	55.59	68.20	-12.61	peak
2	5700.000	-4.41	60.93	56.52	105.20	-48.68	peak
3	5720.000	-4.44	61.29	56.85	110.80	-53.95	peak
4	5725.000	-4.46	62.41	57.95	122.20	-64.25	peak

802.11N20 Low Channel Bandedge_VERTICAL

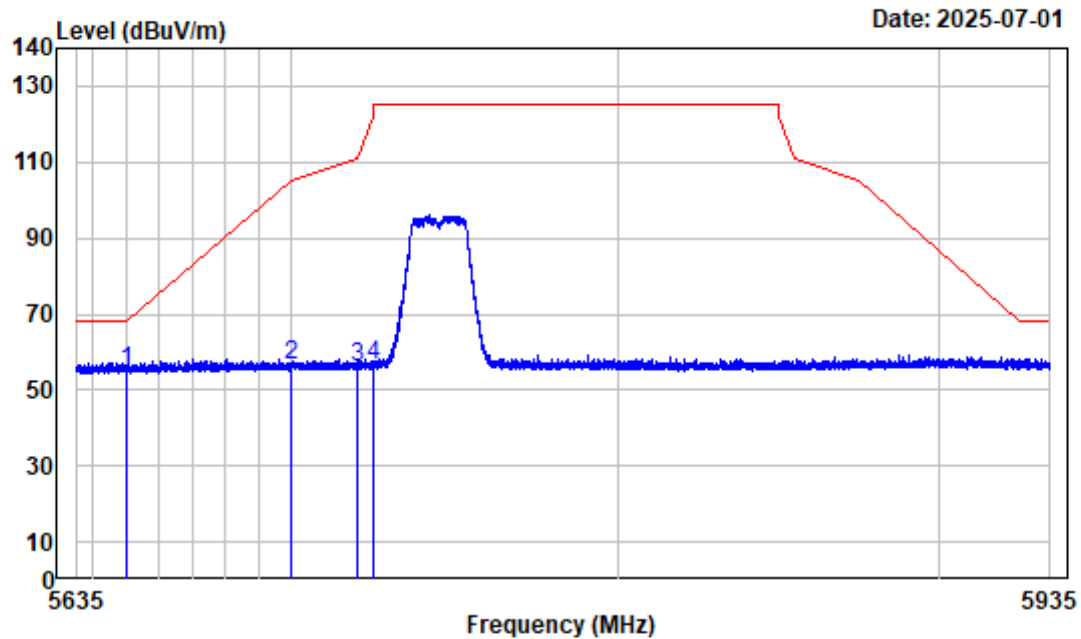

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U29636E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11N20 Low Channel 5745MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.84	59.94	55.10	68.20	-13.10	peak
2	5700.000	-4.41	60.84	56.43	105.20	-48.77	peak
3	5720.000	-4.44	60.65	56.21	110.80	-54.59	peak
4	5725.000	-4.46	60.88	56.42	122.20	-65.78	peak

802.11N20 Middle Channel 1GHz-6.6GHz_HORIZONTAL

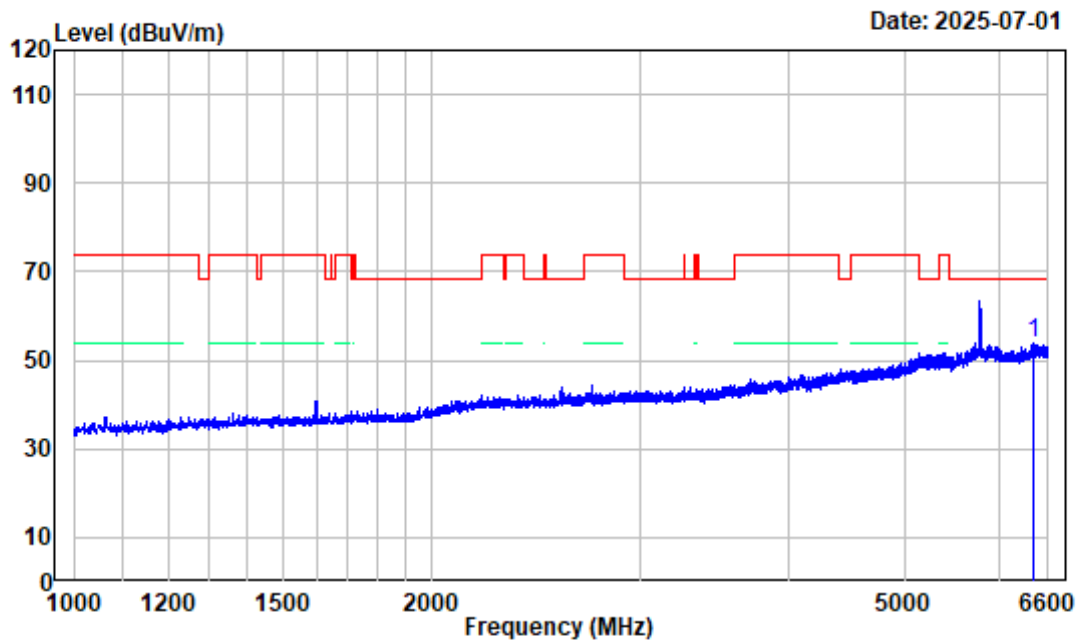

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U29636E-RF


Test Mode : TransmittingTester:Kevin Lv

Note : 802.11N20 Middle Channel 5785MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6427.800	-3.64	57.43	53.79	68.20	-14.41 Peak

802.11N20 Middle Channel 1GHz-6.6GHz_VERTICAL

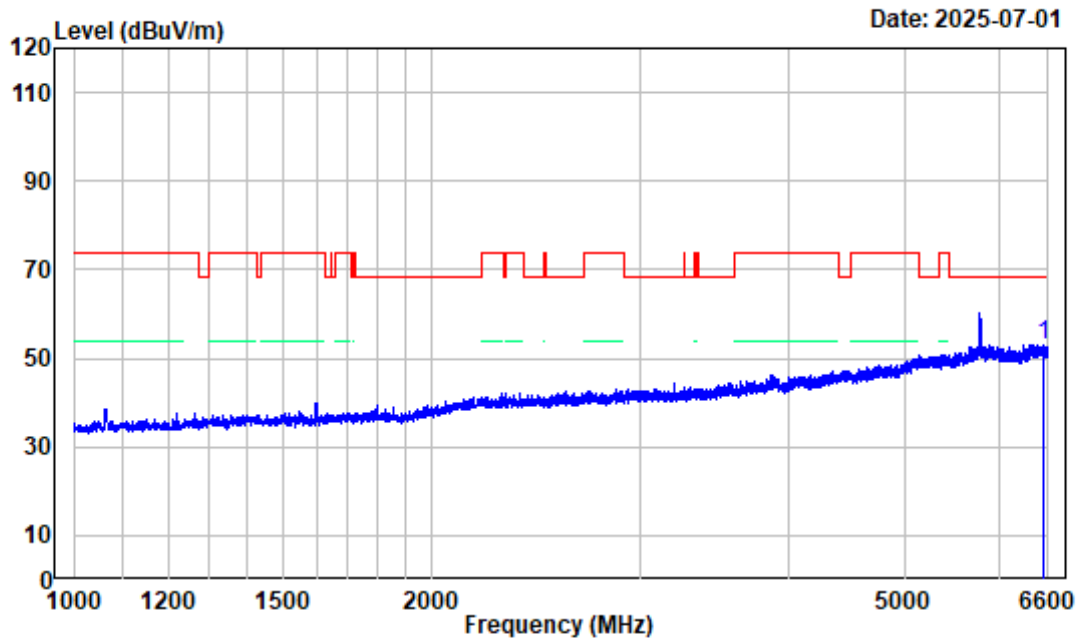

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U29636E-RF


Test Mode : TransmittingTester:Kevin Lv

Note : 802.11N20 Middle Channel 5785MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6547.500	-3.73	56.81	53.08	68.20	-15.12 Peak


802.11N20 Middle Channel 6.6GHz-18GHz_HORIZONTAL

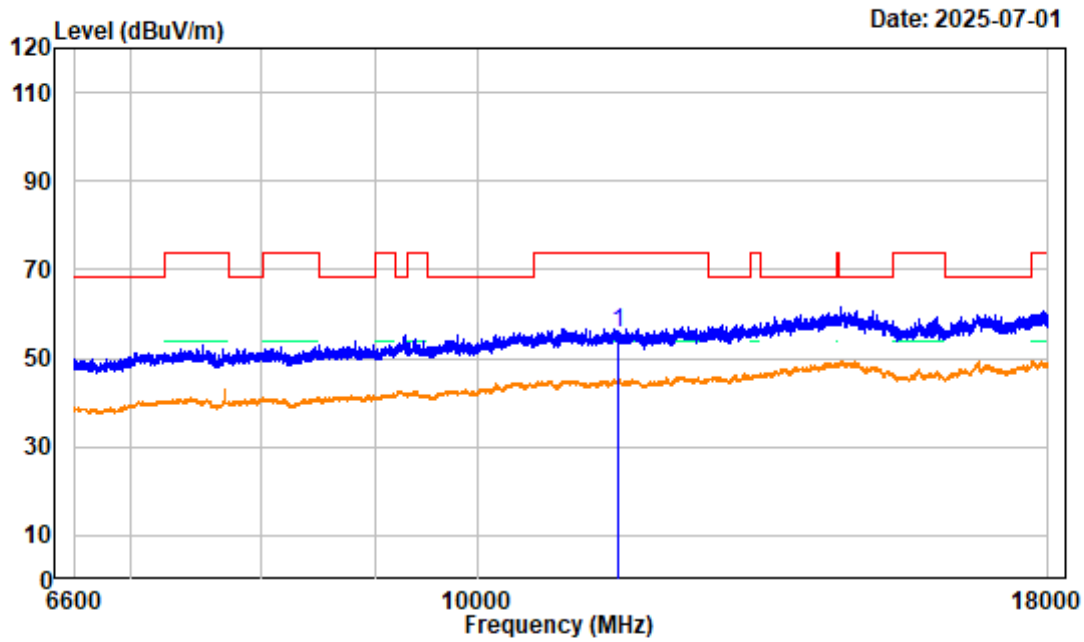

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504U29636E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11N20 Middle Channel 5785MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11570.400	5.92	49.66	55.58	74.00	-18.42	Peak

802.11N20 Middle Channel 6.6GHz-18GHz_VERTICAL

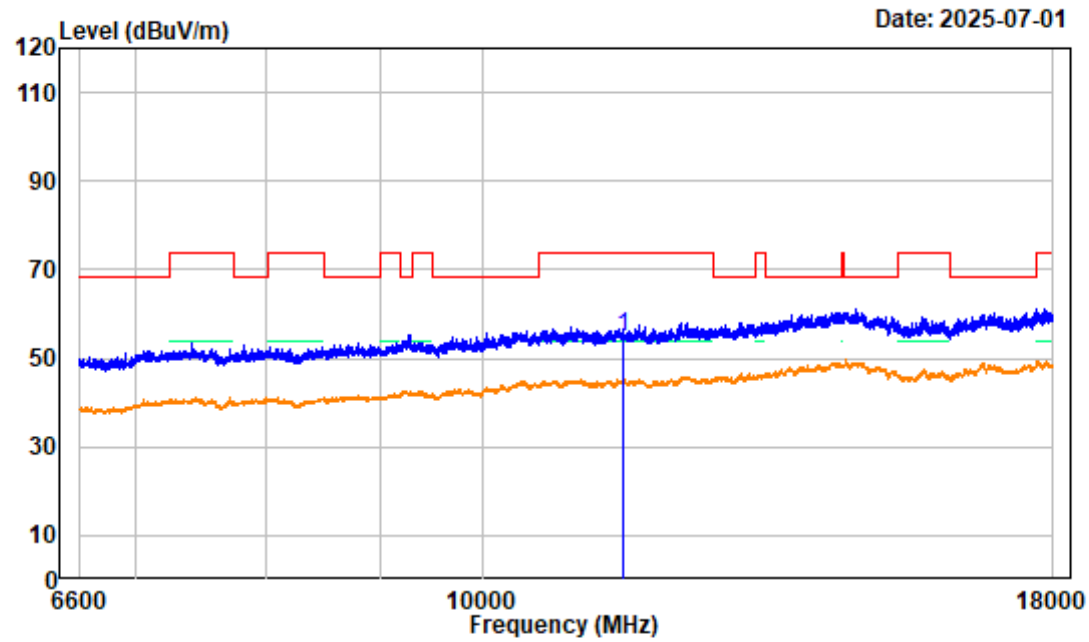

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U29636E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11N20 Middle Channel 5785MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11570.400	5.92	48.85	54.77	74.00	-19.23	Peak


802.11N20 High Channel 1GHz-6.6GHz_HORIZONTAL

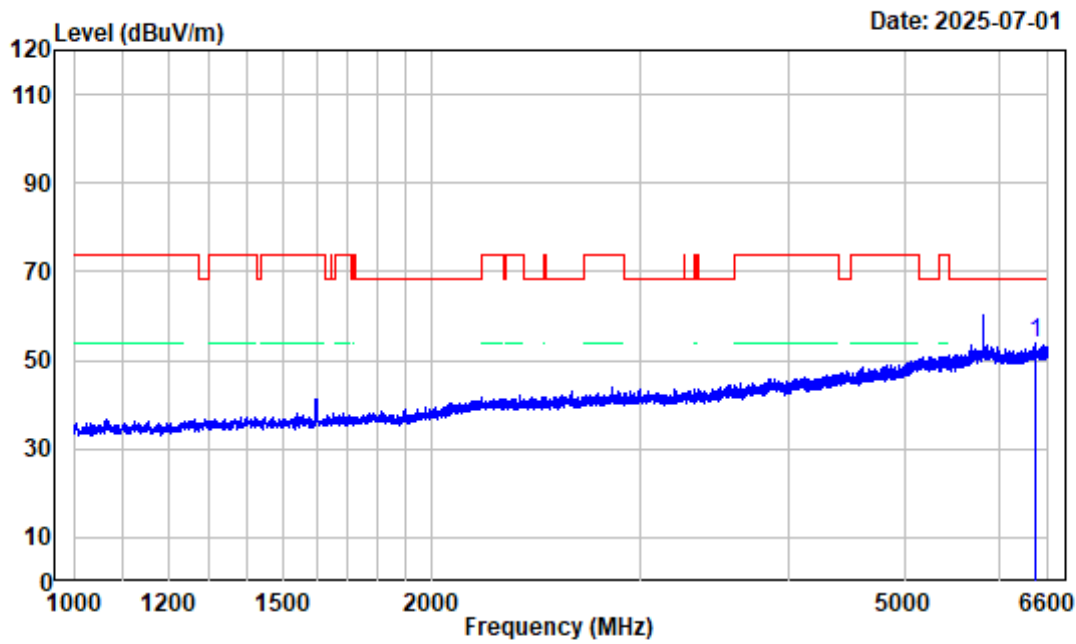

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504U29636E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11N20 High Channel 5825MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6442.500	-3.62	57.45	53.83	68.20	-14.37	Peak

802.11N20 High Channel 1GHz-6.6GHz_VERTICAL

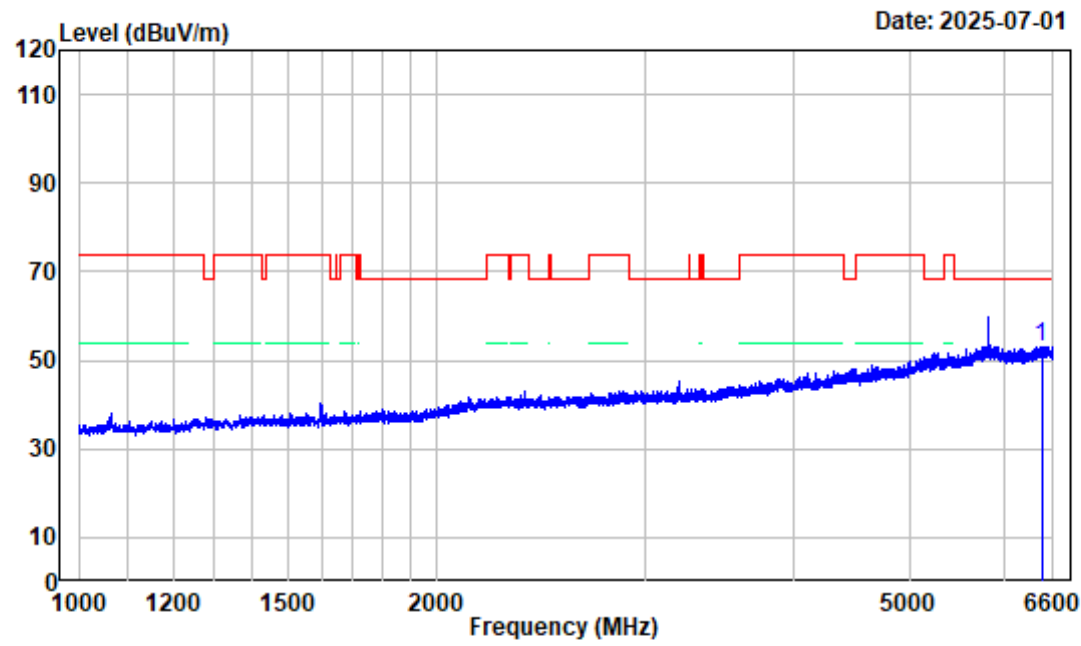

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U29636E-RF


Test Mode : TransmittingTester:Kevin Lv

Note : 802.11N20 High Channel 5825MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6453.700	-3.62	56.62	53.00	68.20	-15.20 Peak


802.11N20 High Channel 6.6GHz-18GHz_HORIZONTAL

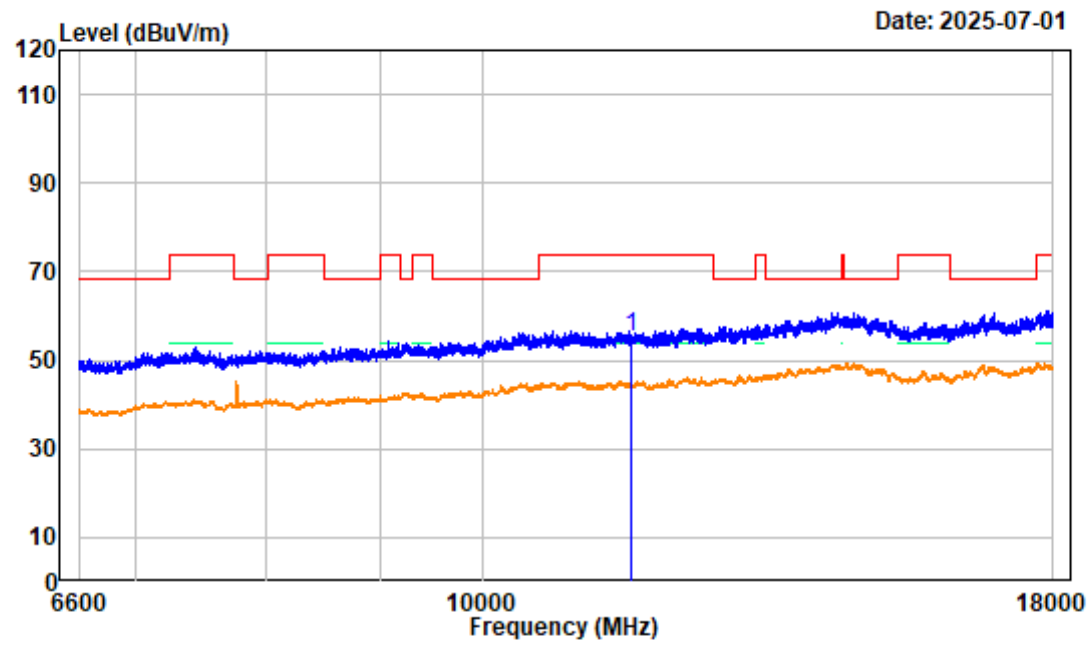

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504U29636E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11N20 High Channel 5825MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11650.200	5.37	50.03	55.40	74.00	-18.60	Peak


802.11N20 High Channel 6.6GHz-18GHz_VERTICAL

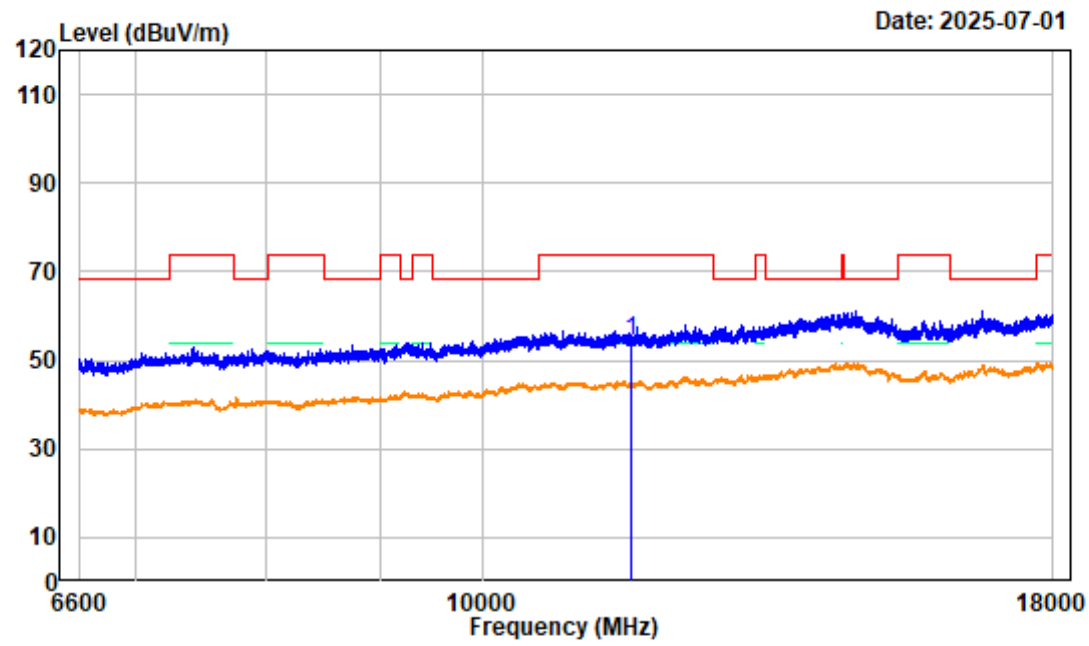

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504U29636E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11N20 High Channel 5825MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11650.200	5.37	48.78	54.15	74.00	-19.85	Peak


802.11N20 High Channel Bandedge_HORIZONTAL

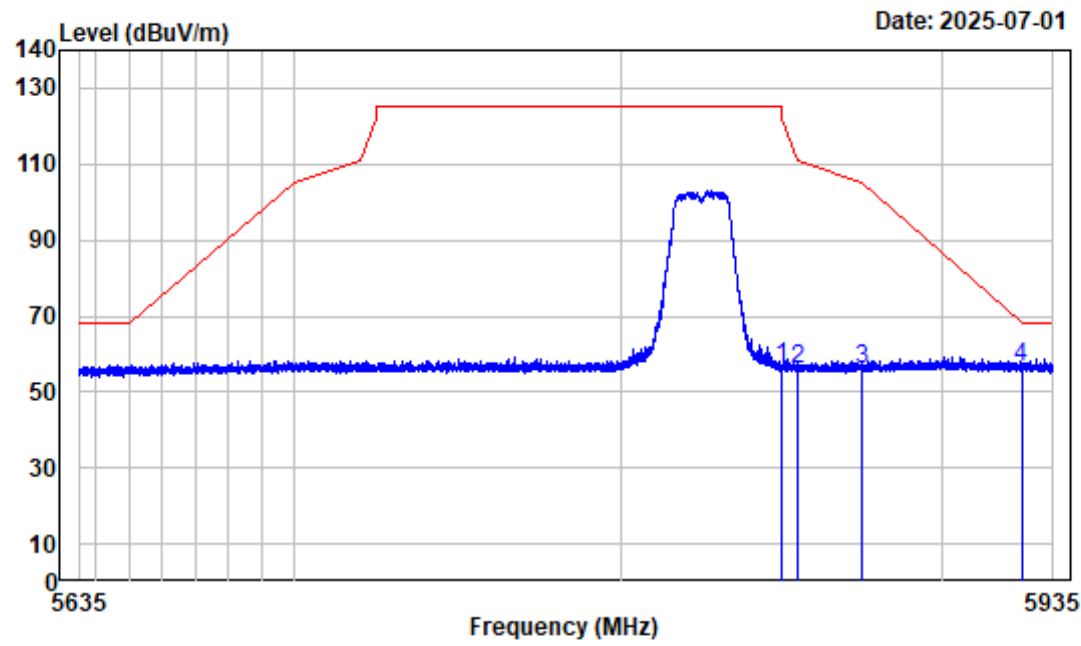

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504U29636E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11N20 High Channel 5825MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5850.000	-4.53	60.95	56.42	122.20	-65.78	peak
2 5855.000	-4.48	60.44	55.96	110.80	-54.84	peak
3 5875.000	-4.28	60.19	55.91	105.20	-49.29	peak
4 5925.000	-4.43	60.72	56.29	68.20	-11.91	peak

802.11N20 High Channel Bandedge_VERTICAL

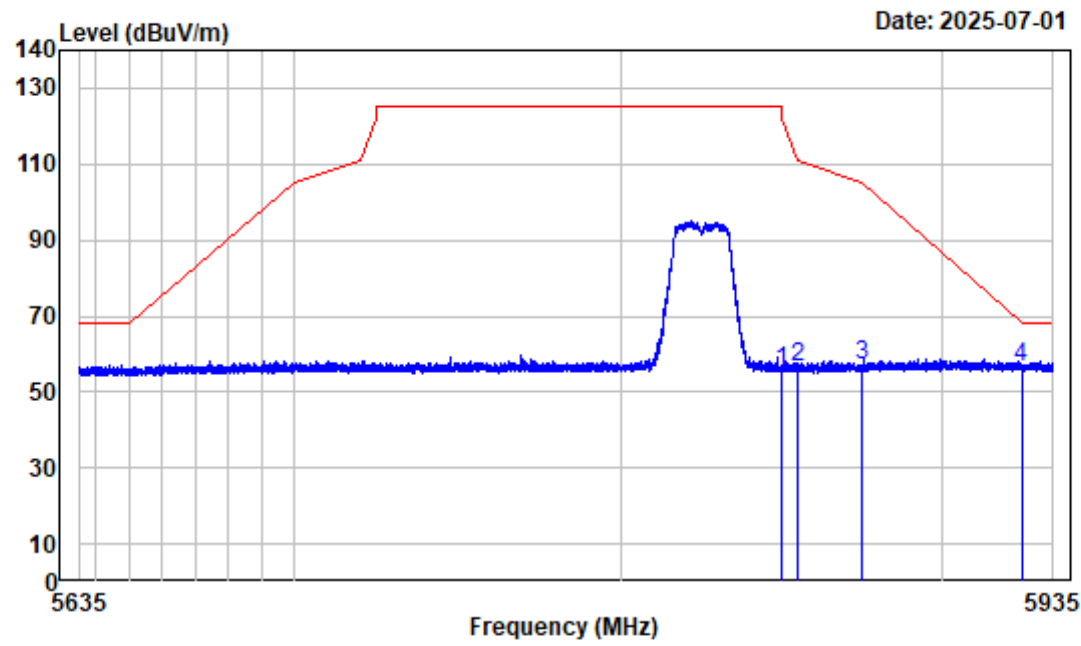

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U29636E-RF


Test Mode : TransmittingTester:Kevin Lv

Note : 802.11N20 High Channel 5825MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.53	60.23	55.70	122.20	-66.50	peak
2	5855.000	-4.48	61.00	56.52	110.80	-54.28	peak
3	5875.000	-4.28	61.39	57.11	105.20	-48.09	peak
4	5925.000	-4.43	61.16	56.73	68.20	-11.47	peak


802.11N40 Low Channel 1GHz-6.6GHz_HORIZONTAL

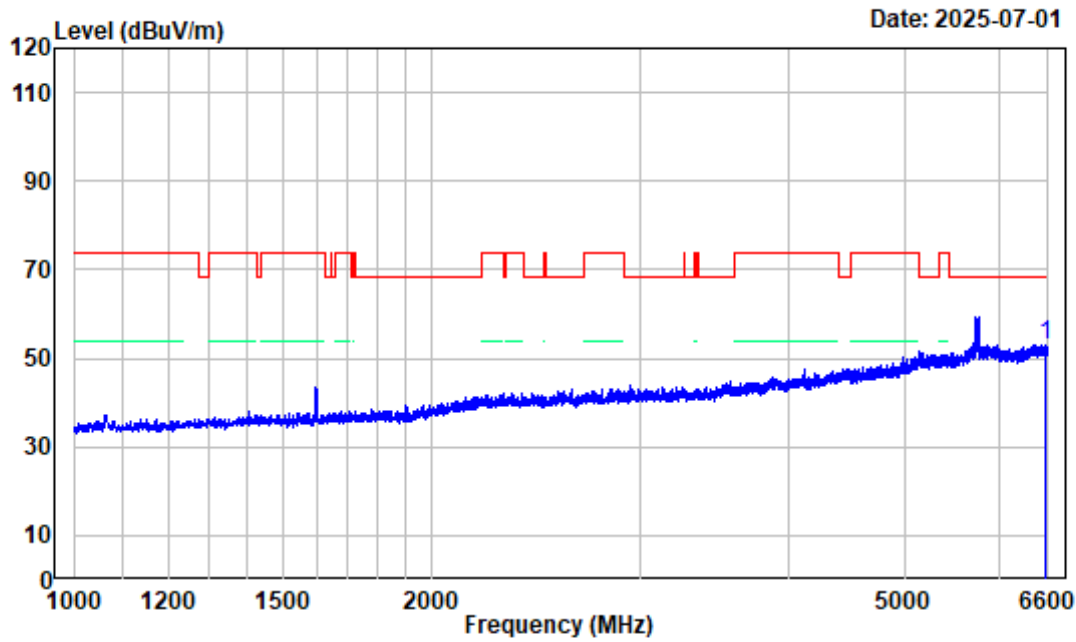

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504U29636E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11N40 Low Channel 5755MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6558.000	-3.69	56.76	53.07	68.20	-15.13 Peak

802.11N40 Low Channel 1GHz-6.6GHz_VERTICAL

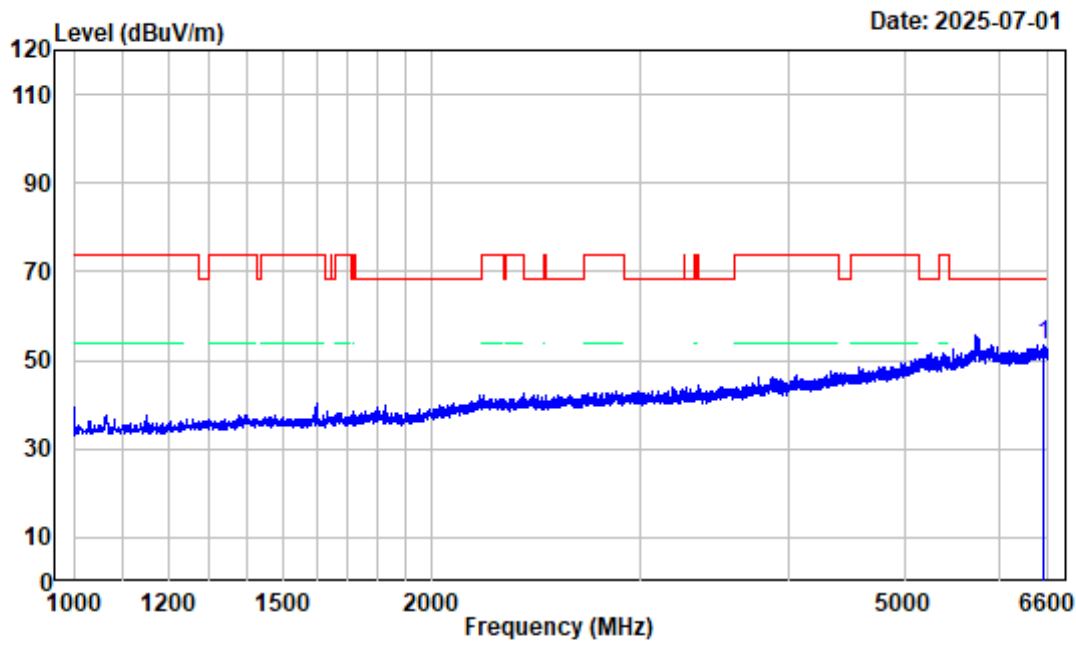

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U29636E-RF


Test Mode : TransmittingTester:Kevin Lv

Note : 802.11N40 Low Channel 5755MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6533.500	-3.75	57.14	53.39	68.20	-14.81 Peak


802.11N40 Low Channel 6.6GHz-18GHz_HORIZONTAL

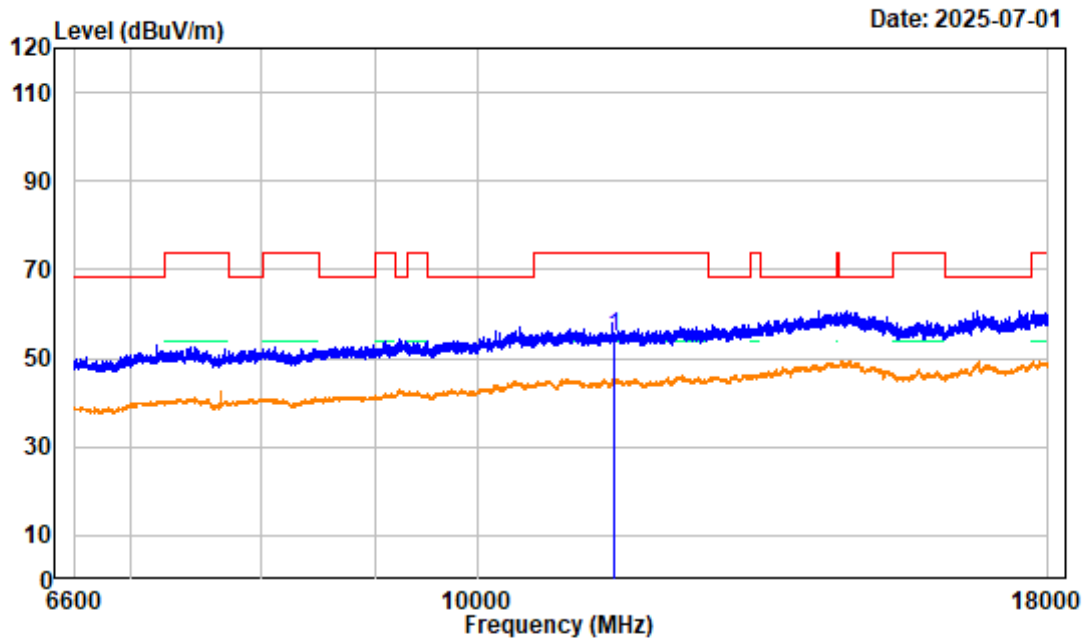

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504U29636E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11N40 Low Channel 5755MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11510.550	6.30	48.45	54.75	74.00	-19.25	Peak


802.11N40 Low Channel 6.6GHz-18GHz_VERTICAL

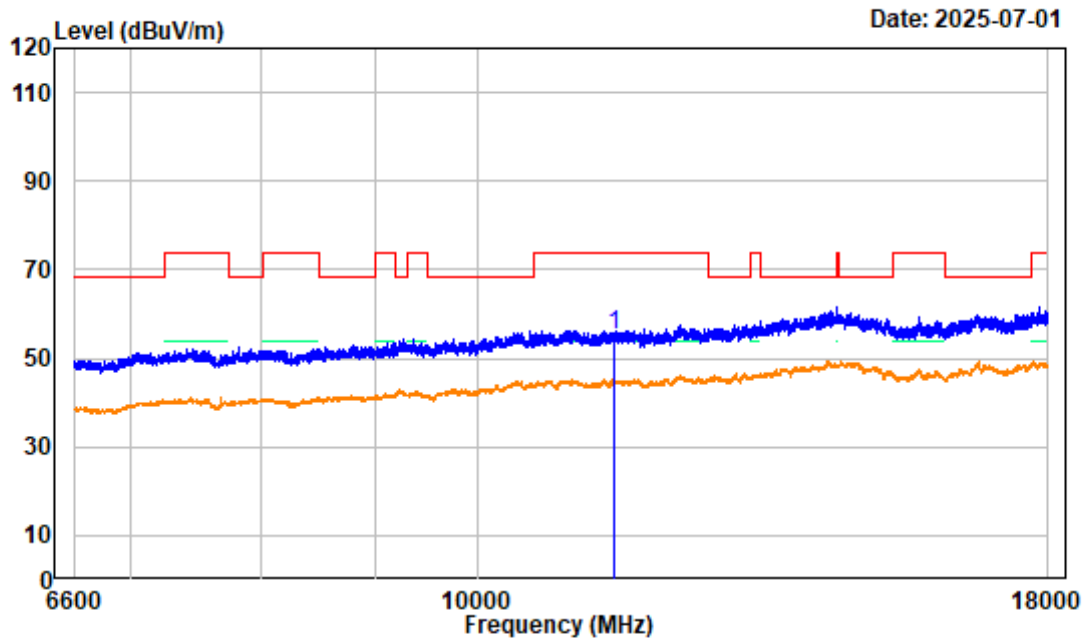

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504U29636E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11N40 Low Channel 5755MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11510.550	6.30	49.03	55.33	74.00	-18.67	Peak


802.11N40 Low Channel 18GHz-26.5GHz_Horizontal

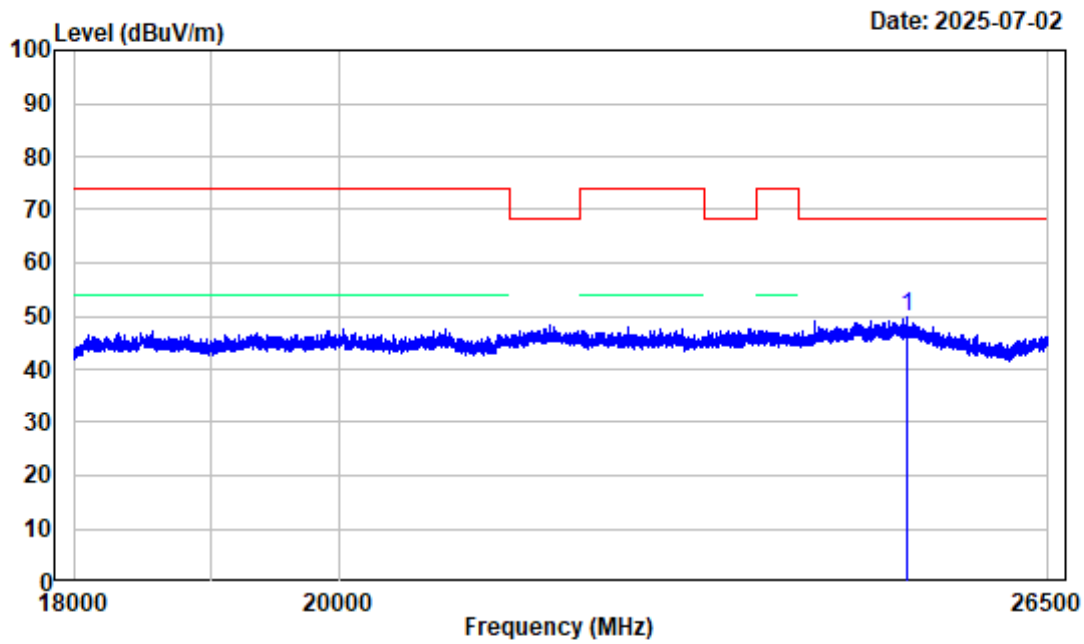

Site : chamber
Condition : 3m Horizontal
Project No.: 2504U29636E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11N40 Low Channel 5755MHz 18GHz-26.5GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 25061.380	0.37	49.48	49.85	68.20	-18.35	Peak


802.11N40 Low Channel 18GHz-26.5GHz_VERTICAL

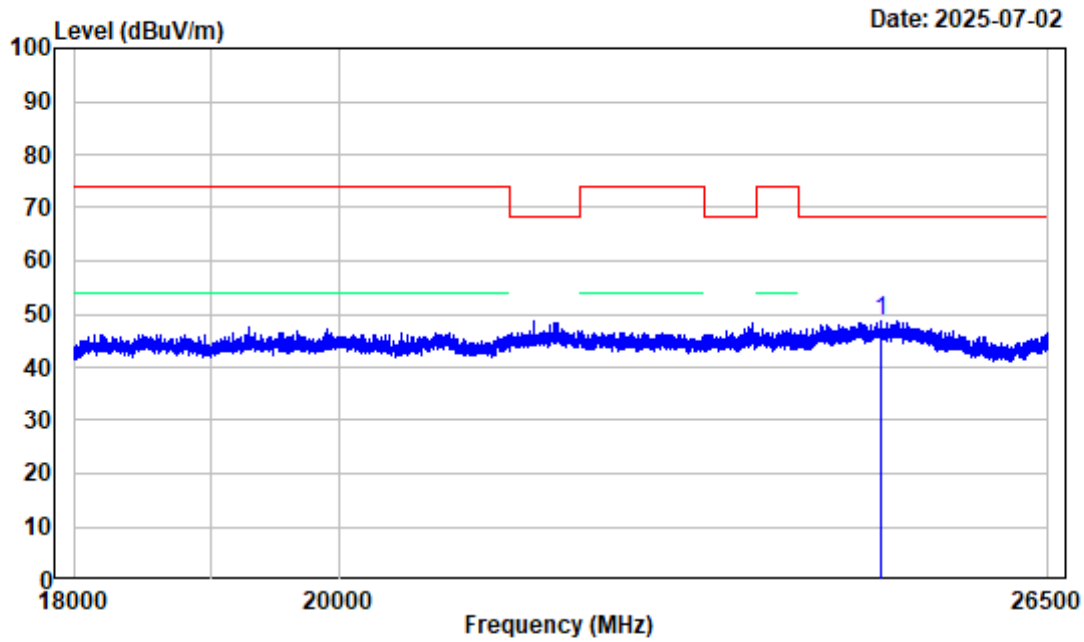

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504U29636E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11N40 Low Channel 5755MHz 18GHz-26.5GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 24803.190	0.16	48.67	48.83	68.20	-19.37	Peak


802.11N40 Low Channel 26.5GHz-40GHz_Horizontal

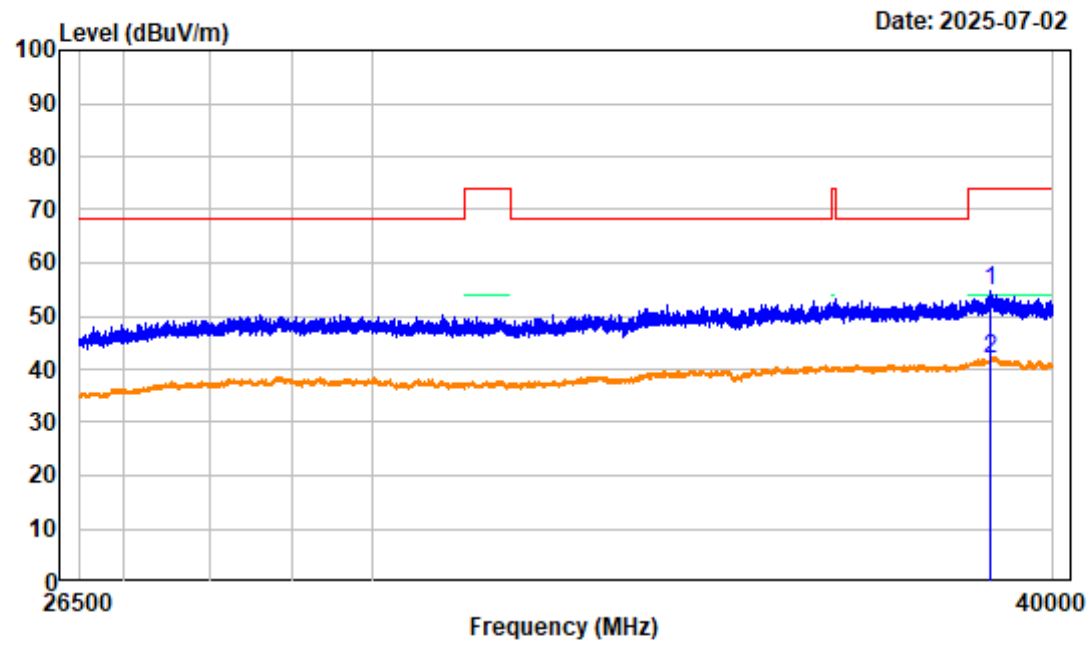

Site : chamber
Condition : 3m Horizontal
Project No.: 2504U29636E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11N40 Low Channel 5755MHz 26.5GHz-40GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 38957.130	3.10	51.76	54.86	74.00	-19.14	Peak
2 38957.130	3.10	38.96	42.06	54.00	-11.94	Average


802.11N40 Low Channel 26.5GHz-40GHz_VERTICAL

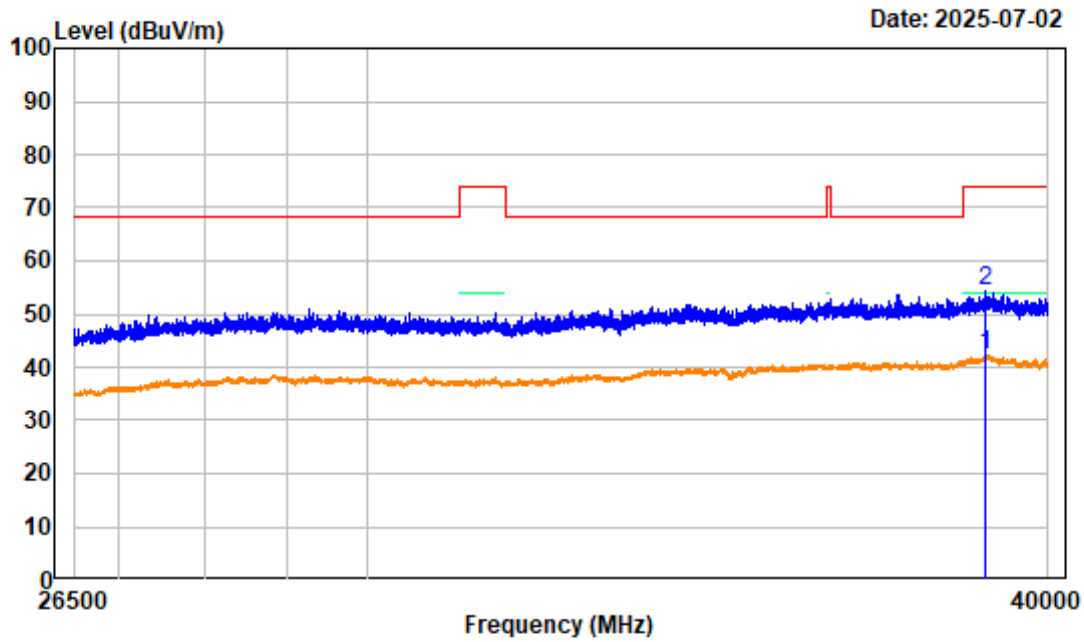

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504U29636E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11N40 Low Channel 5755MHz 26.5GHz-40GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 38960.500	3.10	39.13	42.23	54.00	-11.77	Average
2 38960.500	3.10	51.13	54.23	74.00	-19.77	Peak

802.11N40 Low Channel Bandedge_HORIZONTAL

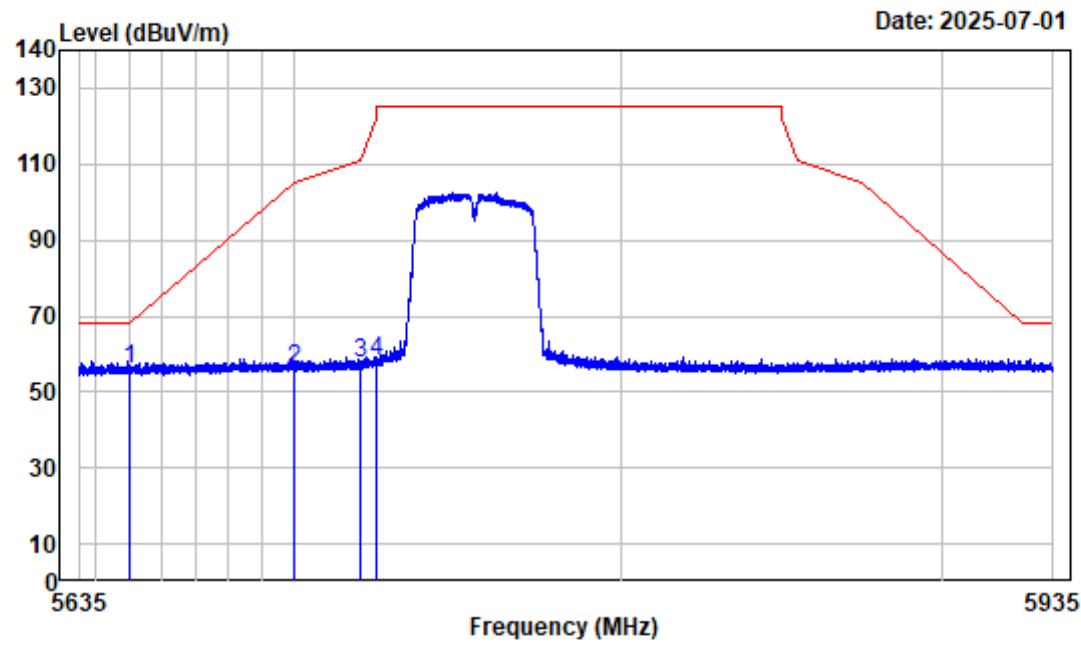

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U29636E-RF


Test Mode : TransmittingTester:Kevin Lv

Note : 802.11N40 Low Channel 5755MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.84	60.69	55.85	68.20	-12.35 peak
2	5700.000	-4.41	60.21	55.80	105.20	-49.40 peak
3	5720.000	-4.44	62.12	57.68	110.80	-53.12 peak
4	5725.000	-4.46	62.78	58.32	122.20	-63.88 peak


802.11N40 Low Channel Bandedge_VERTICAL

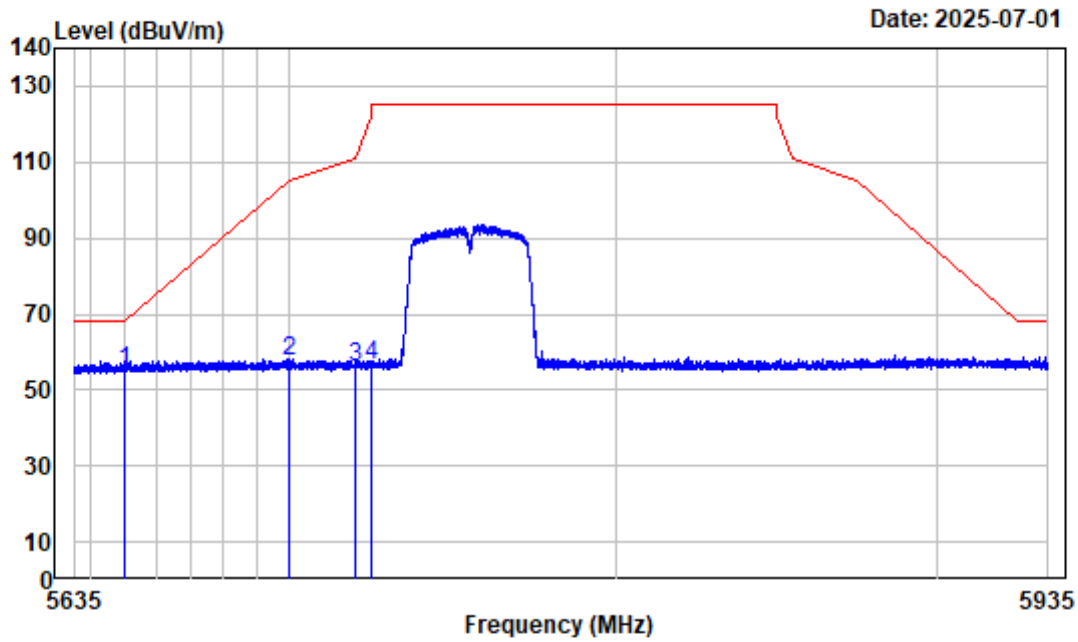

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504U29636E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11N40 Low Channel 5755MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.84	59.88	55.04	68.20	-13.16 peak
2	5700.000	-4.41	62.12	57.71	105.20	-47.49 peak
3	5720.000	-4.44	60.67	56.23	110.80	-54.57 peak
4	5725.000	-4.46	60.99	56.53	122.20	-65.67 peak


802.11N40 High Channel 1GHz-6.6GHz_HORIZONTAL

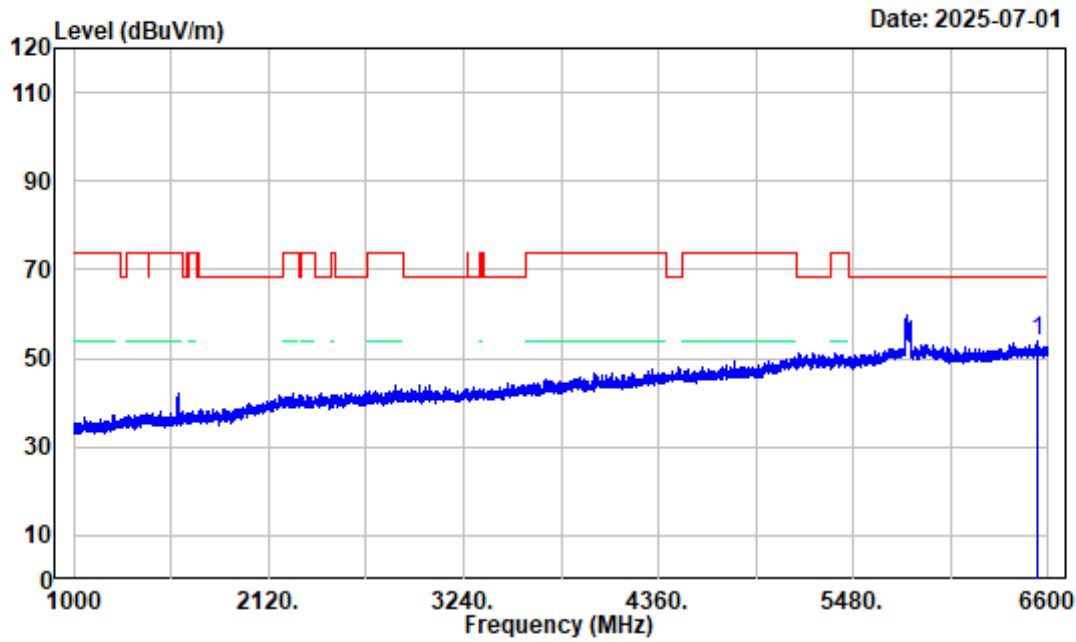

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504U29636E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11N40 High Channel 5795MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6541.900	-3.74	57.42	53.68	68.20	-14.52	Peak

802.11N40 High Channel 1GHz-6.6GHz_VERTICAL

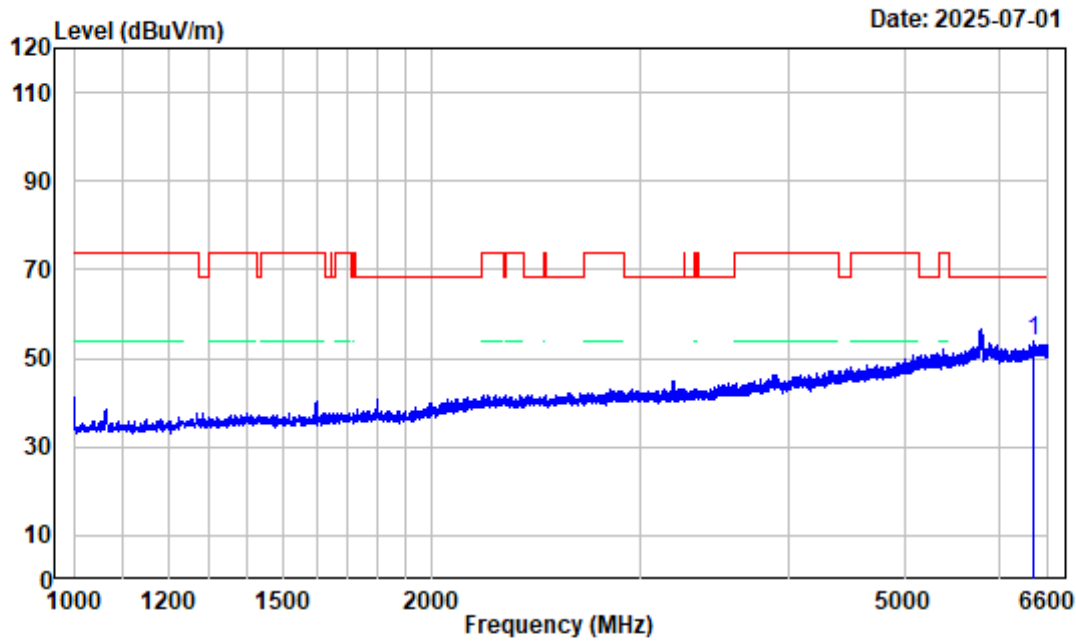

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U29636E-RF


Test Mode : TransmittingTester:Kevin Lv

Note : 802.11N40 High Channel 5795MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6406.100	-3.66	57.33	53.67	68.20	-14.53	Peak


802.11N40 High Channel 6.6GHz-18GHz_HORIZONTAL

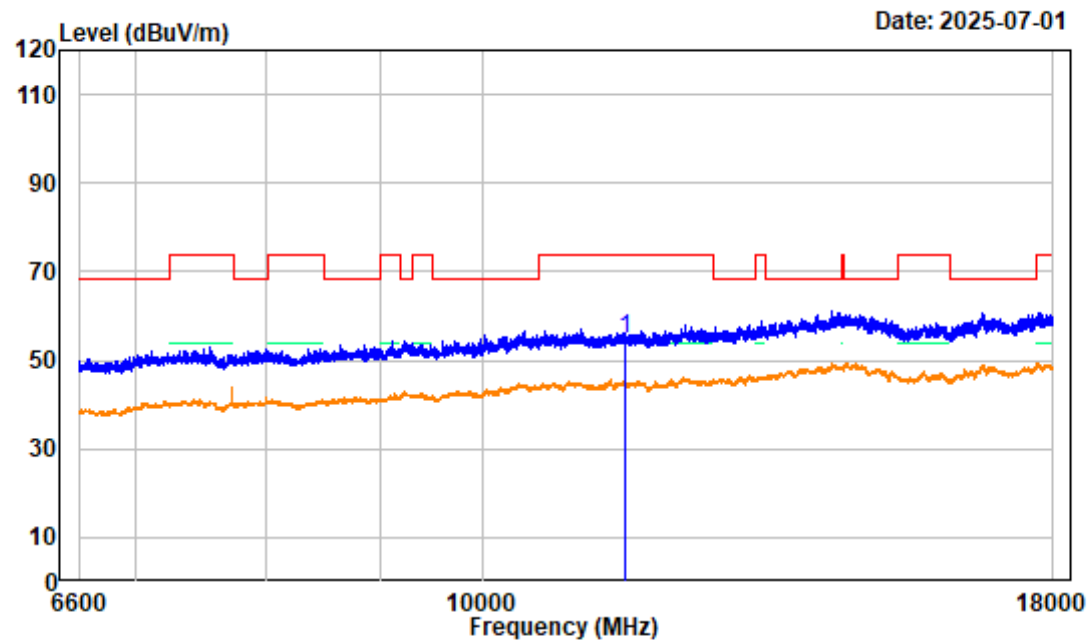

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504U29636E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11N40 High Channel 5795MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11590.350	5.77	48.93	54.70	74.00	-19.30	Peak


802.11N40 High Channel 6.6GHz-18GHz_VERTICAL

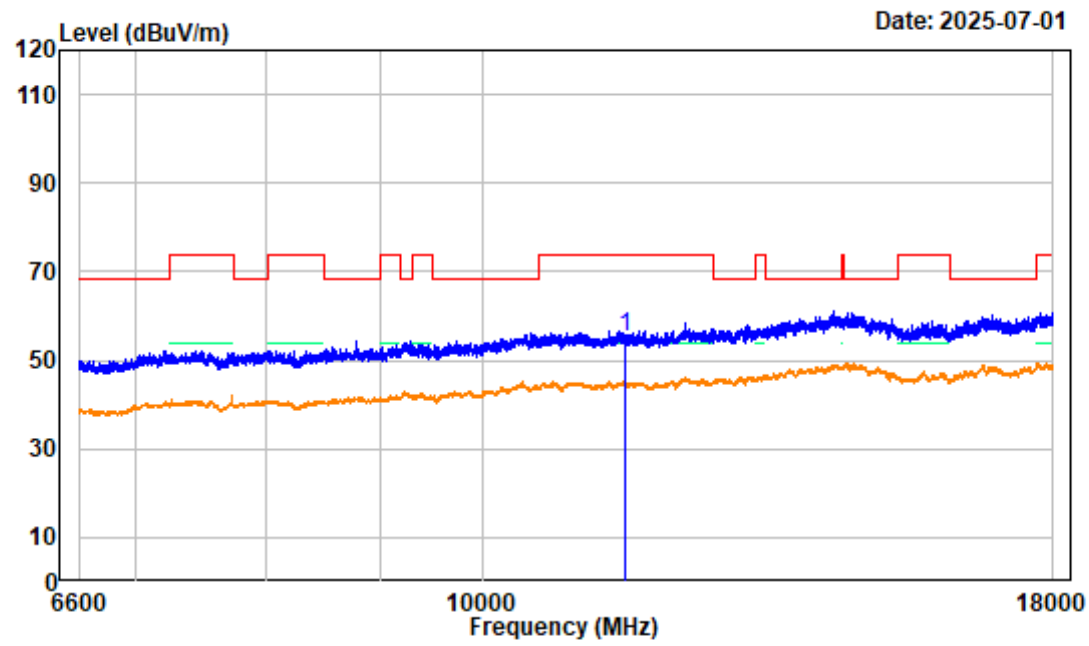

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504U29636E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11N40 High Channel 5795MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11590.350	5.77	49.27	55.04	74.00	-18.96	Peak

802.11N40 High Channel Bandedge_HORIZONTAL

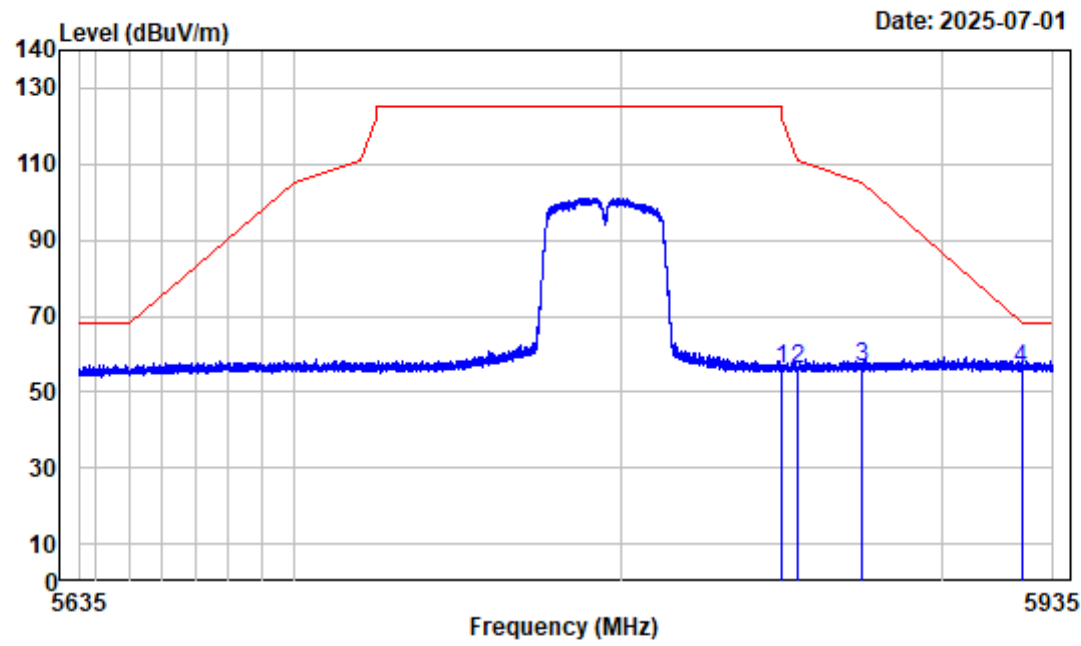

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U29636E-RF


Test Mode : TransmittingTester:Kevin Lv

Note : 802.11N40 High Channel 5795MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5850.000	-4.53	60.61	56.08	122.20	-66.12	peak
2 5855.000	-4.48	60.24	55.76	110.80	-55.04	peak
3 5875.000	-4.28	60.55	56.27	105.20	-48.93	peak
4 5925.000	-4.43	60.55	56.12	68.20	-12.08	peak

802.11N40 High Channel Bandedge_VERTICAL

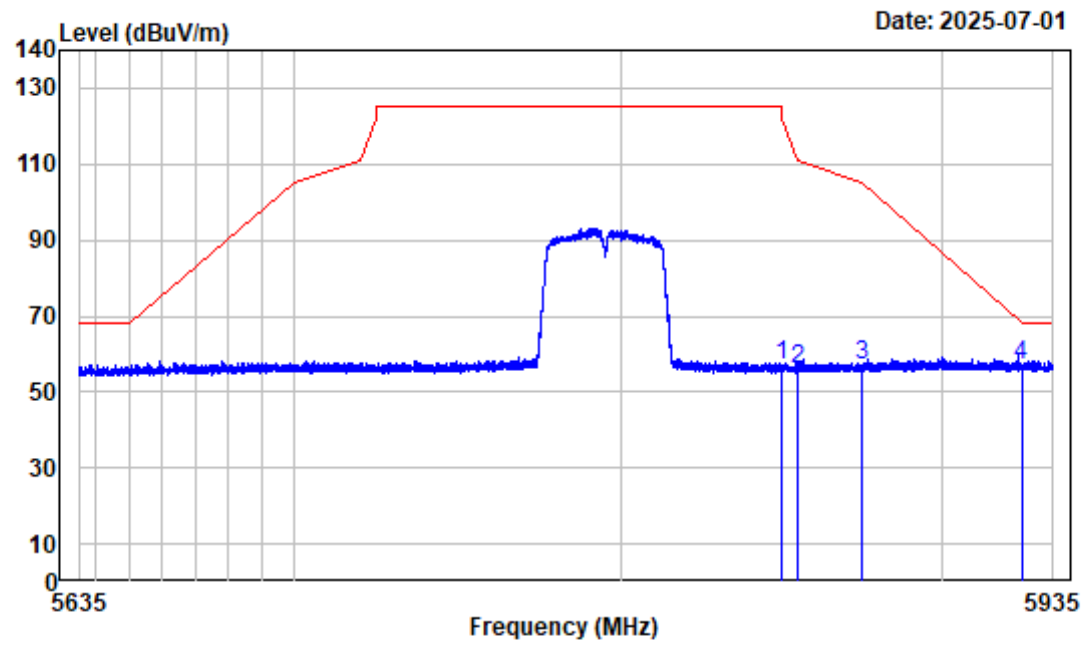

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U29636E-RF

Test Mode : TransmittingTester:Kevin Lv

Note : 802.11N40 High Channel 5795MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5850.000	-4.53	61.40	56.87	122.20	-65.33	peak
2 5855.000	-4.48	60.54	56.06	110.80	-54.74	peak
3 5875.000	-4.28	61.33	57.05	105.20	-48.15	peak
4 5925.000	-4.43	61.55	57.12	68.20	-11.08	peak

FCC §15.407(a)(e)-BANDWIDTH

Applicable Standard

The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Test Procedure

According to KDB789033 D02 section II.C. and section II.D.

1. Emission Bandwidth (EBW)

- Set RBW = approximately 1% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = Peak.
- Trace mode = max hold.
- Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

2. Minimum Emission Bandwidth for the band 5.725-5.85 GHz

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.725-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- Set RBW = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


3. 99% Occupied Bandwidth

The 99% occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. Measurement of the 99% occupied bandwidth is *required* only as a condition for using the optional bandedge measurement techniques described in II.G.3.d). Measurements of 99% occupied bandwidth may also optionally be used in lieu of the EBW to define the minimum frequency range over which the spectrum is integrated when measuring maximum conducted output power as described in II.E. However, the EBW must be measured to determine bandwidth dependent limits on maximum conducted output power in accordance with Section 15.407(a).

The following procedure shall be used for measuring (99%) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1% to 5% of the OBW
4. Set VBW $\geq 3 \times$ RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99% power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99% power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

Note: For devices that use channel aggregation refer to III.A and III.C for determining 99% bandwidth.



Test Data

Please refer to the Appendix.

FCC §15.407(a) (1) (3)-CONDUCTED TRANSMITTER OUTPUT POWER

Applicable Standard

For an indoor access point operating in the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


For an outdoor access point operating in the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Test Procedure

According to KDB789033 D02 section II.E.3.a).

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



Test Data

Please refer to the Appendix.

FCC §15.407(a) (1) (3)-POWER SPECTRAL DENSITY

Applicable Standard

For an indoor access point operating in the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For an outdoor access point operating in the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

For client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Duty cycle $\geq 98\%$


KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-1 should be applied.

Duty cycle $< 98\%$, duty cycle variations are less than $\pm 2\%$

KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-2 should be applied.

Duty cycle $< 98\%$, duty cycle variations exceed $\pm 2\%$

KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-3 should be applied.



Test Data

Please refer to the Appendix.

APPENDIX (RF TEST RESULTS)

Emission Bandwidth

Test Information:

Sample No.:	34RF-1	Test Date:	2025/06/23
Test Site:	RF	Test Mode:	Transmitting
Tester:	Cayde Hou	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	26.3	Relative Humidity: (%)	48	ATM Pressure: (kPa)	99.7
----------------------	------	------------------------------	----	------------------------	------

Test Data:

26dB Emission Bandwidth
5150-5250MHz


Mode	Test Frequency (MHz)	Result (MHz)
802.11a	5180	21.305
	5200	21.571
	5240	21.465
802.11n20	5180	22.077
	5200	21.968
	5240	22.016
802.11n40	5190	39.039
	5230	39.239

6dB Emission Bandwidth
5725-5850MHz

Mode	Test Frequency (MHz)	Result (MHz)	Limit (MHz)	Verdict
802.11a	5745	16.567	0.5	Pass
	5785	16.567	0.5	Pass
	5825	16.617	0.5	Pass
802.11n20	5745	17.768	0.5	Pass
	5785	17.718	0.5	Pass
	5825	17.718	0.5	Pass
802.11n40	5755	36.537	0.5	Pass
	5795	36.537	0.5	Pass


5150-5250MHz

802.11a_5180MHz

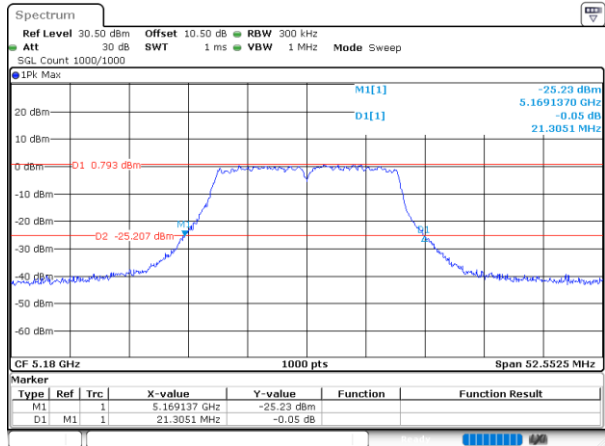


ProjectNo.:2504U29636E-RF Tester:Cayde Hou
Date: 23.JUN.2025 10:48:27

802.11a_5200MHz

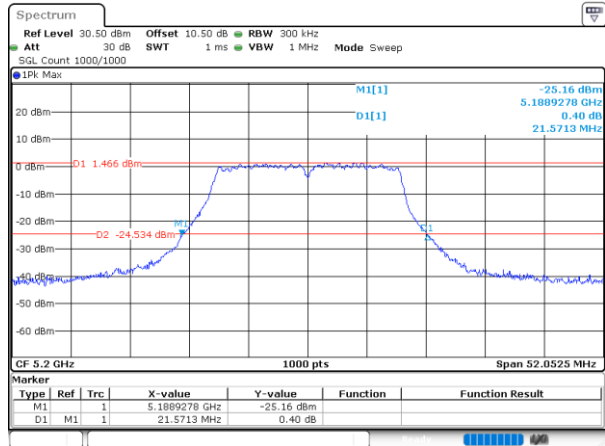


ProjectNo.:2504U29636E-RF Tester:Cayde Hou
Date: 23.JUN.2025 10:49:35

802.11a_5240MHz

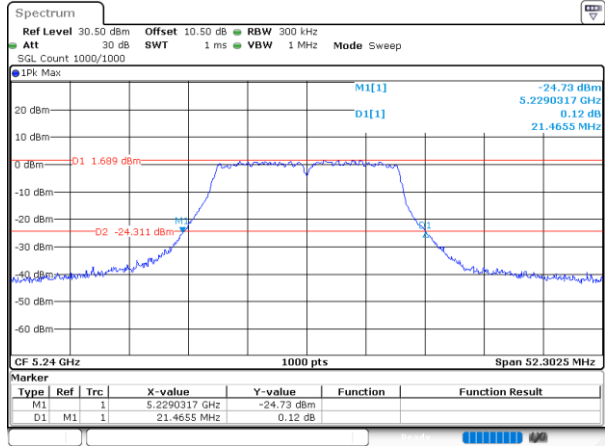


ProjectNo.:2504U29636E-RF Tester:Cayde Hou
Date: 23.JUN.2025 10:52:18

802.11n20_5180MHz

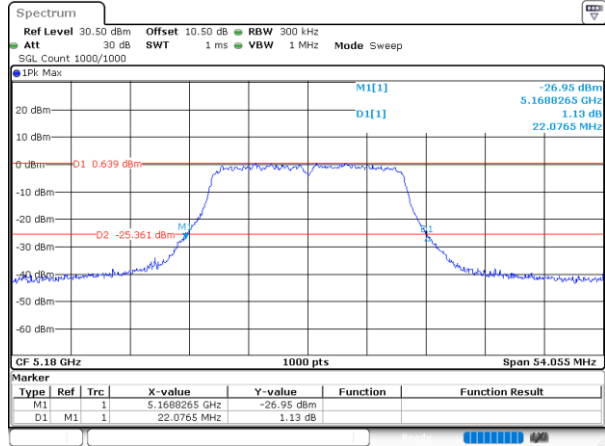


ProjectNo.:2504U29636E-RF Tester:Cayde Hou
Date: 23.JUN.2025 10:53:32

802.11n20_5200MHz

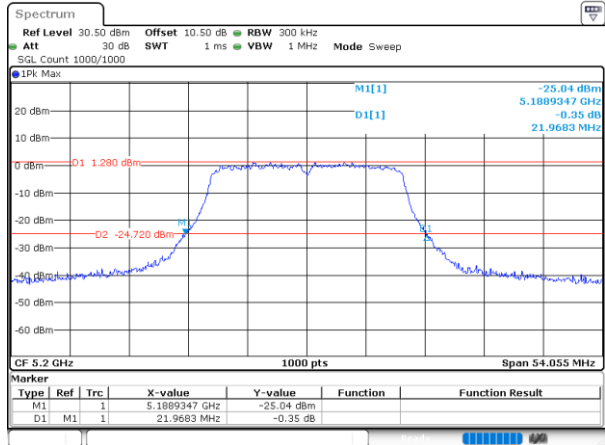


ProjectNo.:2504U29636E-RF Tester:Cayde Hou
Date: 23.JUN.2025 10:54:54

802.11n20_5240MHz

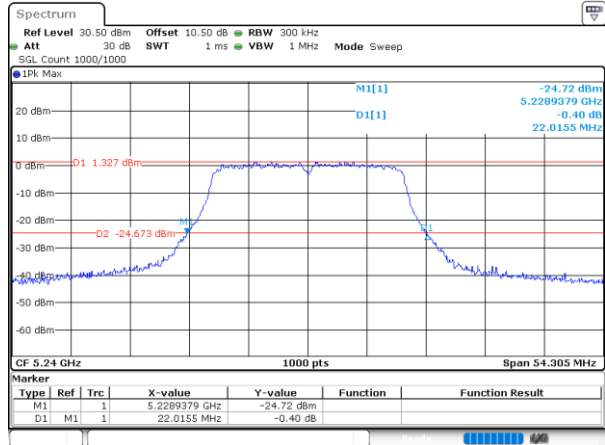


ProjectNo.:2504U29636E-RF Tester:Cayde Hou
Date: 23.JUN.2025 10:55:56

802.11n40_5190MHz

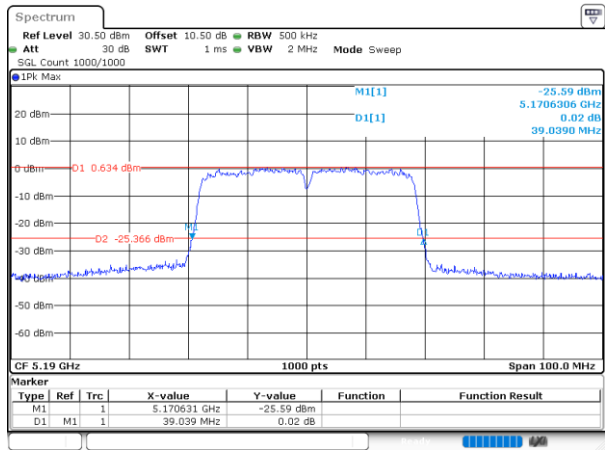

ProjectNo.:2504U29636E-RF Tester:Cayde Hou
Date: 23.JUN.2025 10:56:40


802.11n40_5230MHz

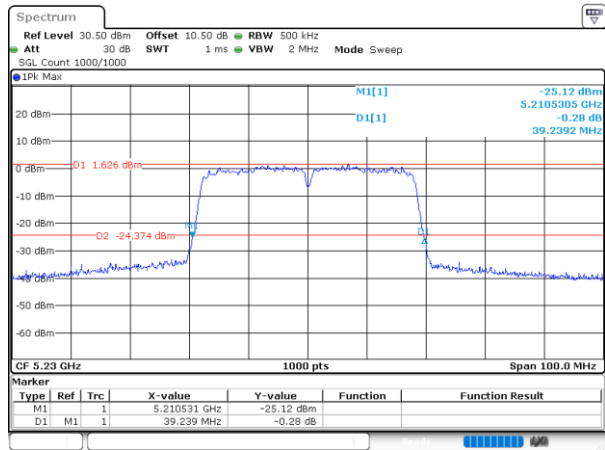

ProjectNo.:2504U29636E-RF Tester:Cayde Hou
Date: 23.JUN.2025 10:57:22


5725-5850MHz

802.11a_5745MHz

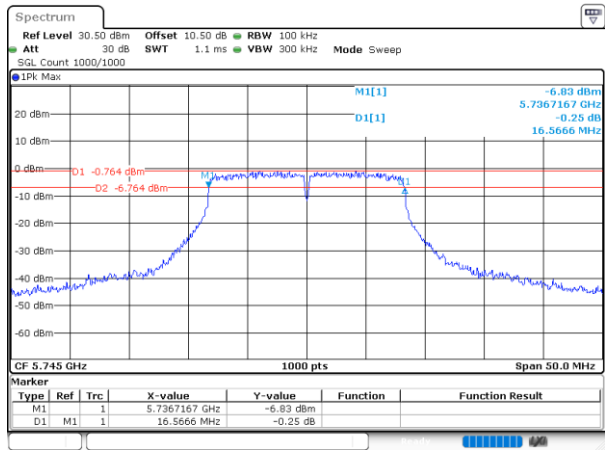


ProjectNo.:2504U29636E-RF Tester:Cayde Hou
Date: 23.JUN.2025 11:08:29

802.11a_5785MHz

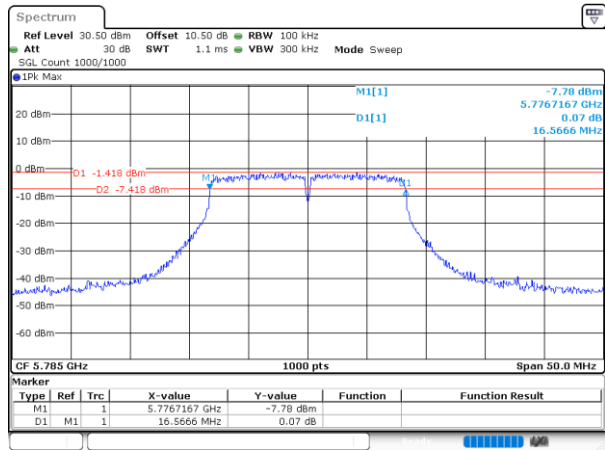


ProjectNo.:2504U29636E-RF Tester:Cayde Hou
Date: 23.JUN.2025 11:10:13

802.11a_5825MHz

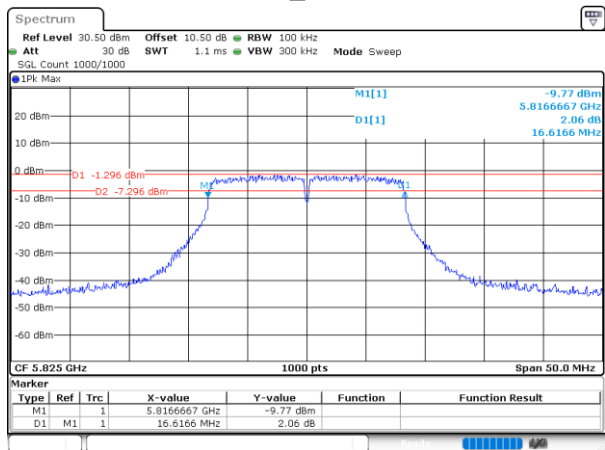


ProjectNo.:2504U29636E-RF Tester:Cayde Hou
Date: 23.JUN.2025 11:11:29

802.11n20_5745MHz

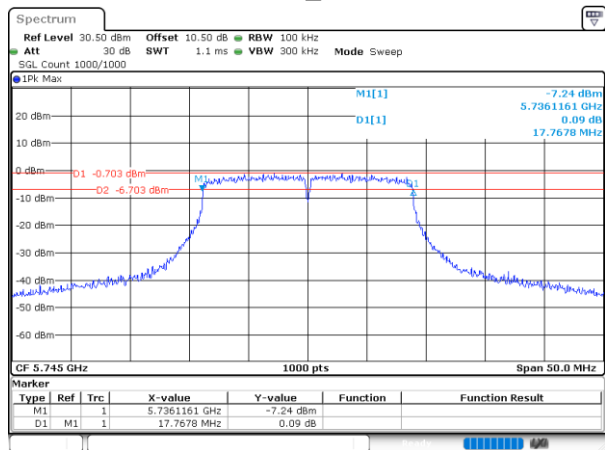


ProjectNo.:2504U29636E-RF Tester:Cayde Hou
Date: 23.JUN.2025 11:12:42

802.11n20_5785MHz

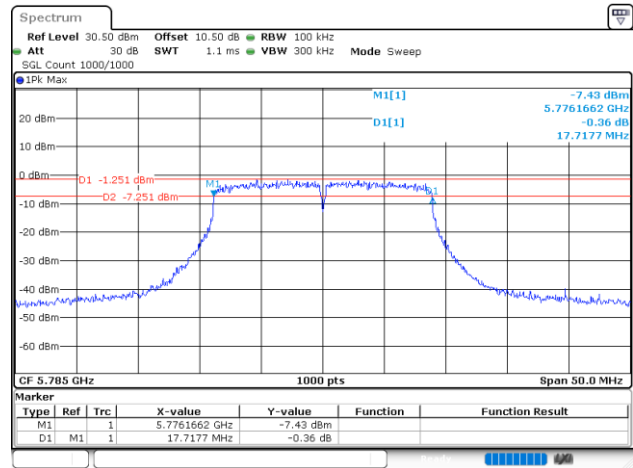


ProjectNo.:2504U29636E-RF Tester:Cayde Hou
Date: 23.JUN.2025 11:13:59

802.11n20_5825MHz

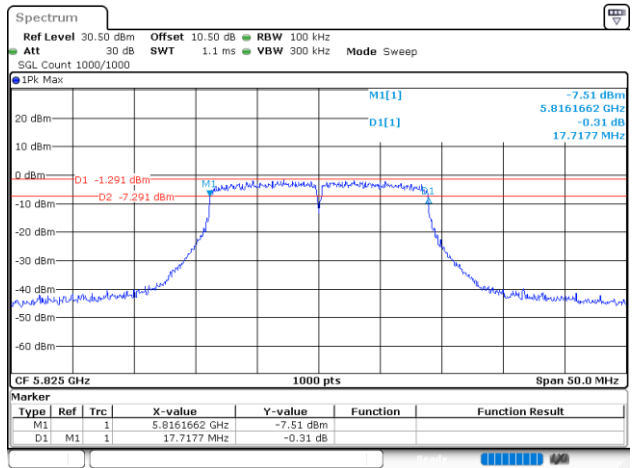


ProjectNo.:2504U29636E-RF Tester:Cayde Hou
Date: 23.JUN.2025 11:14:56

802.11n40_5755MHz

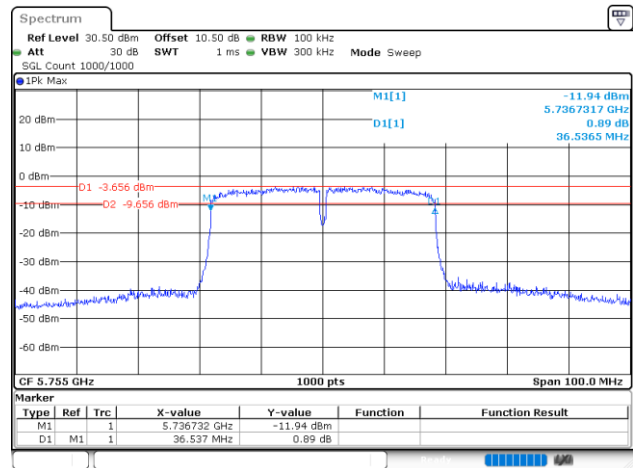

ProjectNo.:2504U29636E-RF Tester:Cayde Hou
Date: 23.JUN.2025 11:15:53

802.11n40_5795MHz

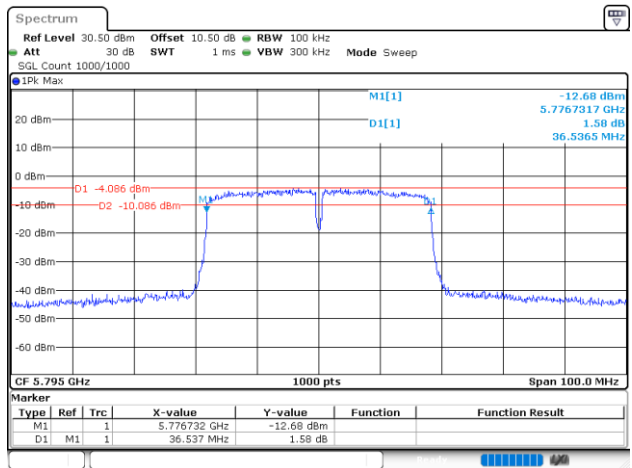

ProjectNo.:2504U29636E-RF Tester:Cayde Hou
Date: 23.JUN.2025 11:17:31

99% Occupied Bandwidth

Test Information:

Sample No.:	34RF-1	Test Date:	2025/06/23
Test Site:	RF	Test Mode:	Transmitting
Tester:	Cayde Hou	Test Result:	/

Environmental Conditions:

Temperature: (°C)	26.3	Relative Humidity: (%)	48	ATM Pressure: (kPa)	99.7
----------------------	------	------------------------------	----	------------------------	------

Test Data:

5150-5250MHz

Mode	Test Frequency (MHz)	99% OBW (MHz)
802.11a	5180	16.550
	5200	16.600
	5240	16.550
802.11n20	5180	17.700
	5200	17.700
	5240	17.700
802.11n40	5190	35.800
	5230	35.800

Note:
The 99% Occupied Bandwidth have not fall into the band 5250-5350MHz, please refer to the test plots of 99% Occupied Bandwidth.


5725-5850MHz

Mode	Test Frequency (MHz)	99% OBW (MHz)
802.11a	5745	16.600
	5785	16.600
	5825	16.600
802.11n20	5745	17.700
	5785	17.700
	5825	17.700
802.11n40	5755	35.800
	5795	35.800


Note:
The 99% Occupied Bandwidth have not fall into the band 5470-5725MHz, please refer to the test plots of 99% Occupied Bandwidth.

5150-5250MHz


802.11a_5180MHz

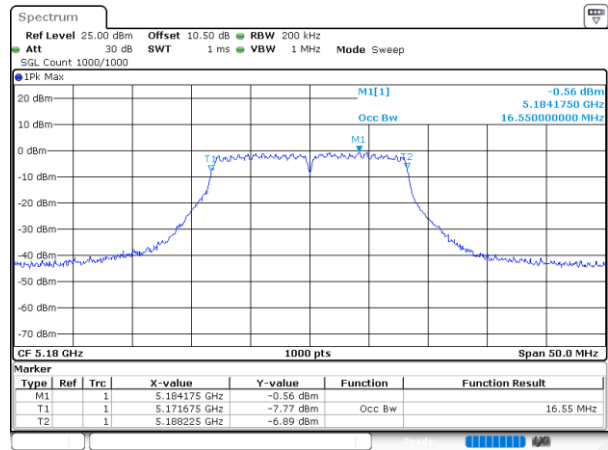


802.11a_5200MHz

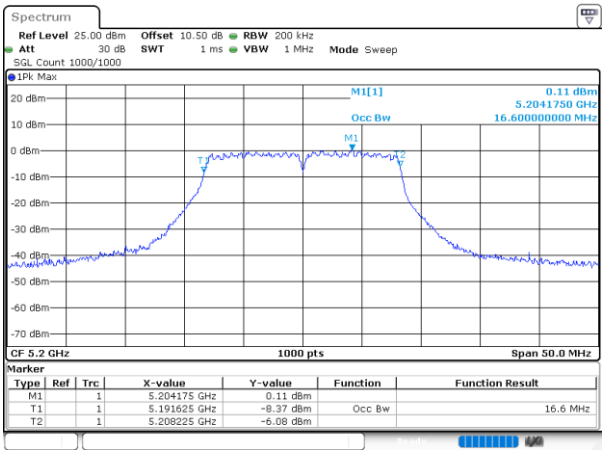


802.11a_5240MHz

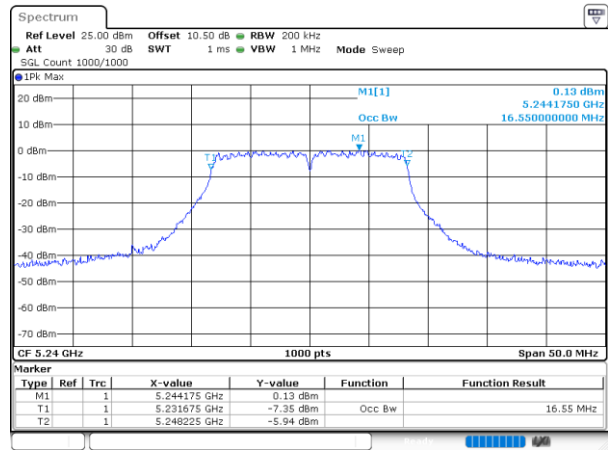


802.11n20_5180MHz

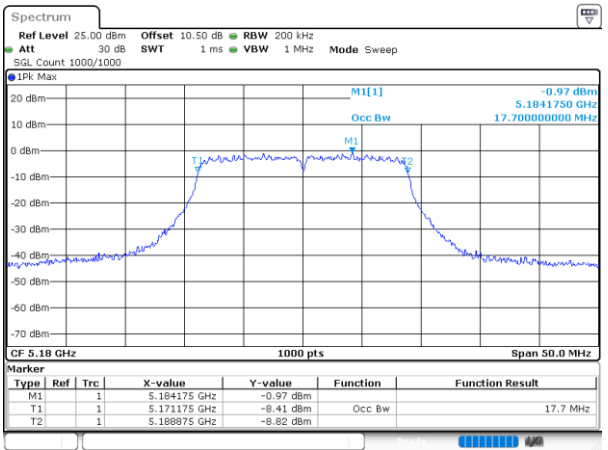


802.11n20_5200MHz

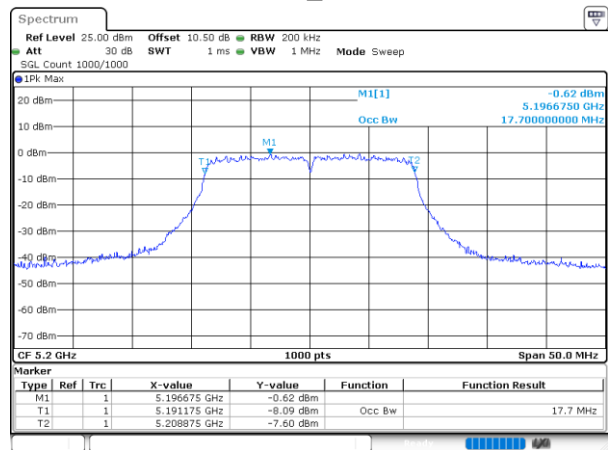

802.11n20_5240MHz

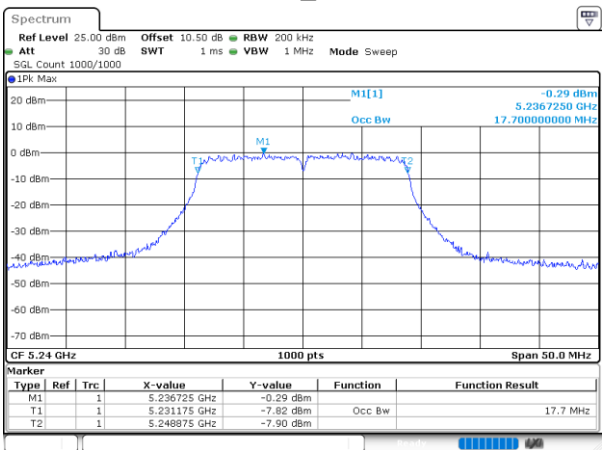


802.11n40_5190MHz

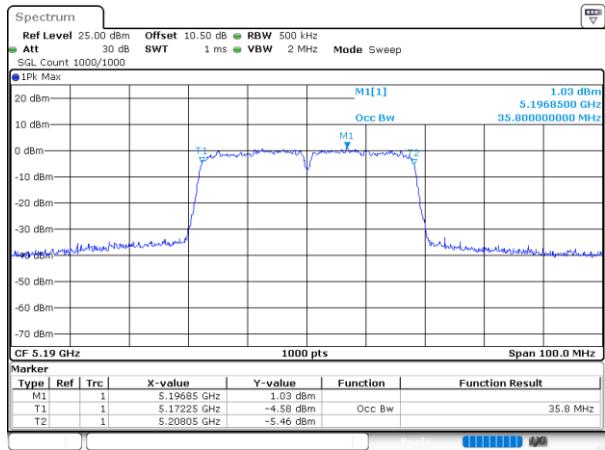

ProjectNo.:2504U29636E-RF Tester:Cayde Hou
Date: 23.JUN.2025 10:56:33


802.11n40_5230MHz

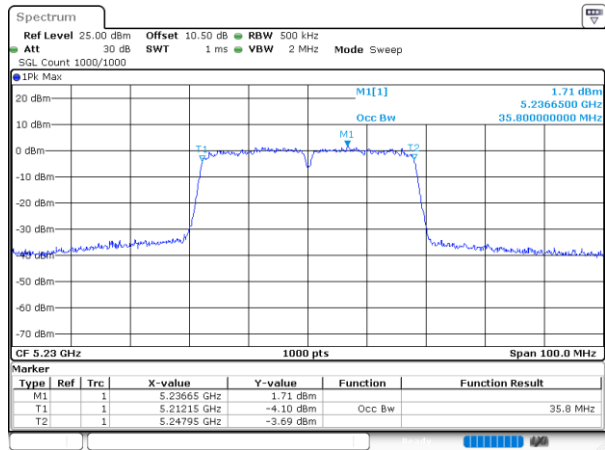

ProjectNo.:2504U29636E-RF Tester:Cayde Hou
Date: 23.JUN.2025 10:57:15


5725-5850MHz

802.11a_5745MHz

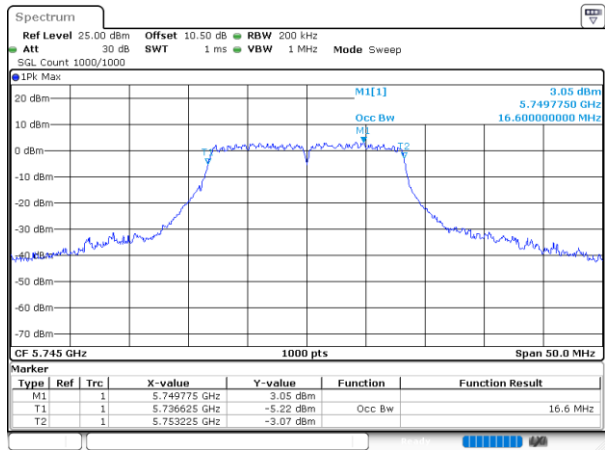


ProjectNo.:2504U29636E-RF Tester:Cayde Hou
Date: 23.JUN.2025 11:08:08

802.11a_5785MHz

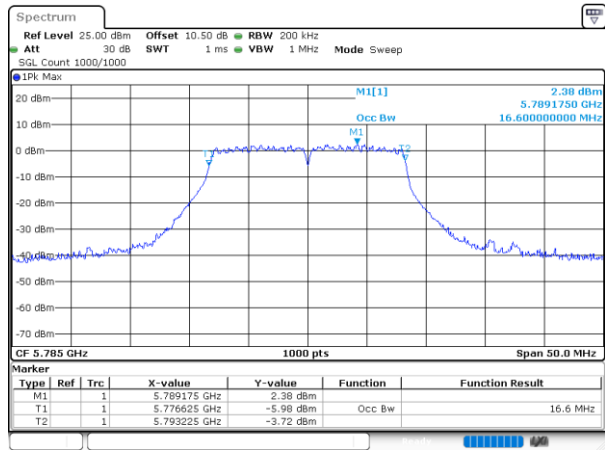


ProjectNo.:2504U29636E-RF Tester:Cayde Hou
Date: 23.JUN.2025 11:09:50

802.11a_5825MHz

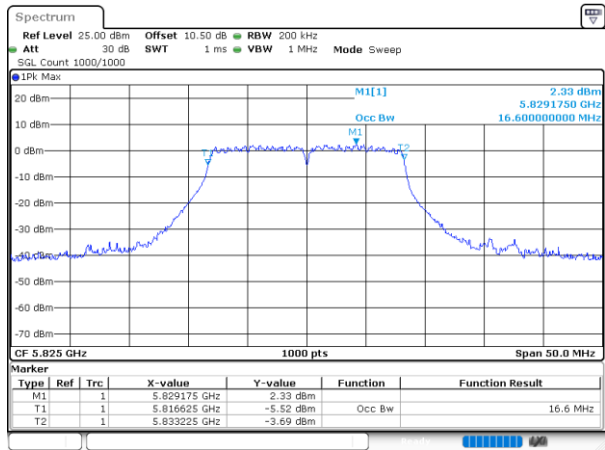


ProjectNo.:2504U29636E-RF Tester:Cayde Hou
Date: 23.JUN.2025 11:11:14

802.11n20_5745MHz

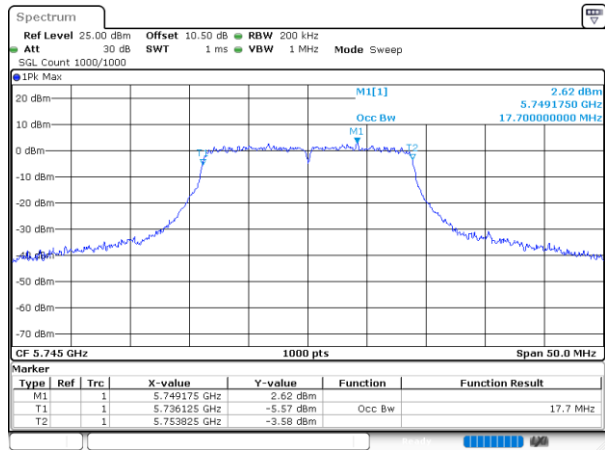


ProjectNo.:2504U29636E-RF Tester:Cayde Hou
Date: 23.JUN.2025 11:12:22

802.11n20_5785MHz

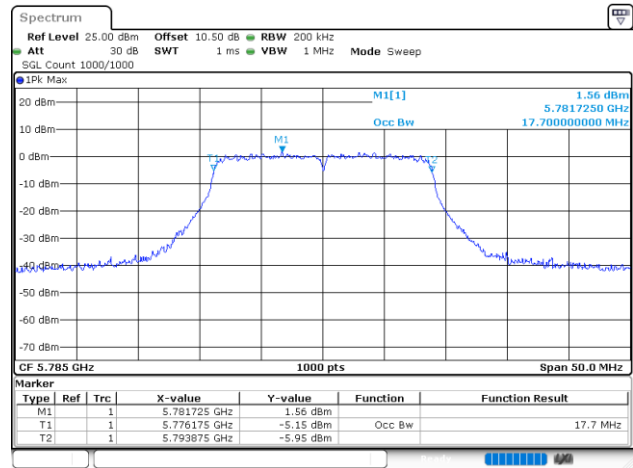


ProjectNo.:2504U29636E-RF Tester:Cayde Hou
Date: 23.JUN.2025 11:13:35

802.11n20_5825MHz

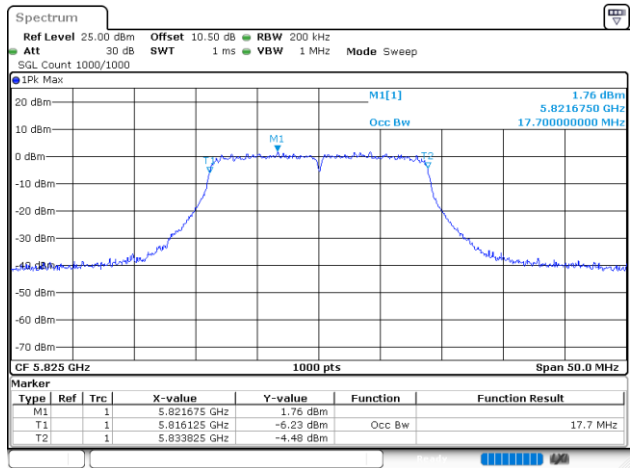


ProjectNo.:2504U29636E-RF Tester:Cayde Hou
Date: 23.JUN.2025 11:14:41

802.11n40_5755MHz

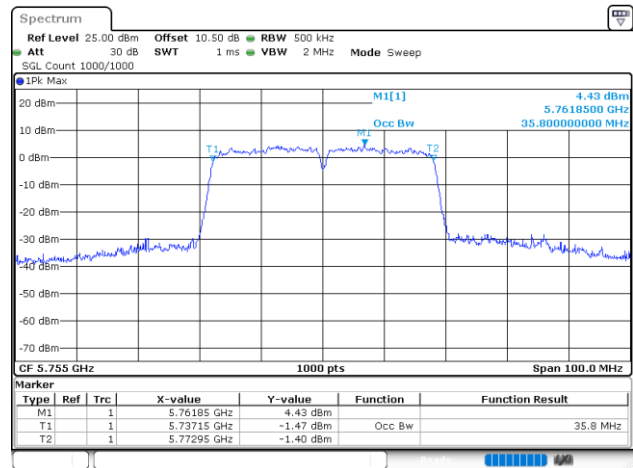

ProjectNo.:2504U29636E-RF Tester:Cayde Hou
Date: 23.JUN.2025 11:15:46

802.11n40_5795MHz

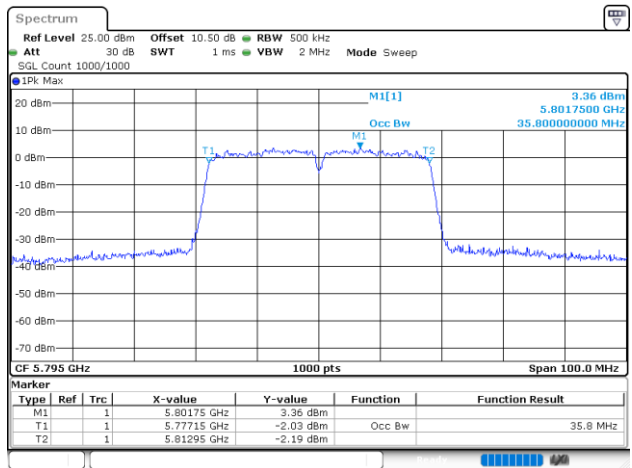

ProjectNo.:2504U29636E-RF Tester:Cayde Hou
Date: 23.JUN.2025 11:17:24

Maximum Conducted Output Power

Test Information:

Sample No.:	34RF-1	Test Date:	2025/06/23
Test Site:	RF	Test Mode:	Transmitting
Tester:	Cayde Hou	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	26.3	Relative Humidity: (%)	48	ATM Pressure: (kPa)	99.7
----------------------	------	------------------------------	----	------------------------	------

Test Data:

5150-5250MHz

Mode	Test Frequency (MHz)	Average Output Power(dBm)	Limit (dBm)	Verdict
802.11a	5180	9.54	24	Pass
	5200	10.3	24	Pass
	5240	10.51	24	Pass
802.11n20	5180	9.58	24	Pass
	5200	10.24	24	Pass
	5240	10.52	24	Pass
802.11n40	5190	9.93	24	Pass
	5230	10.67	24	Pass

5725-5850MHz

Mode	Test Frequency (MHz)	Average Output Power(dBm)	Limit (dBm)	Verdict
802.11a	5745	13.18	30	Pass
	5785	12.69	30	Pass
	5825	12.65	30	Pass
802.11n20	5745	12.92	30	Pass
	5785	12.61	30	Pass
	5825	12.44	30	Pass
802.11n40	5755	13.25	30	Pass
	5795	12.66	30	Pass

Power Spectral Density

Test Information:

Sample No.:	34RF-1	Test Date:	2025/06/23
Test Site:	RF	Test Mode:	Transmitting
Tester:	Cayde Hou	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	26.3	Relative Humidity: (%)	48	ATM Pressure: (kPa)	99.7
----------------------	------	------------------------------	----	------------------------	------

Test Data:

5150-5250MHz

Mode	Test Frequency (MHz)	Reading (dBm/MHz)	Duty Cycle Factor(dB)	Result (dBm/MHz)	Limit (dBm/MHz)	Verdict
802.11a	5180	-1.33	0	-1.33	11	Pass
	5200	-0.49	0	-0.49	11	Pass
	5240	-0.37	0	-0.37	11	Pass
802.11n20	5180	-1.46	0	-1.46	11	Pass
	5200	-0.85	0	-0.85	11	Pass
	5240	-0.48	0	-0.48	11	Pass
802.11n40	5190	-4.13	0	-4.13	11	Pass
	5230	-3.33	0	-3.33	11	Pass


5725-5850MHz

Mode	Test Frequency (MHz)	Reading (dBm/500kHz)	Duty Cycle Factor(dB)	Result (dBm/500kHz)	Limit (dBm/500kHz)	Verdict
802.11a	5745	-0.84	0	-0.84	30	Pass
	5785	-1.11	0	-1.11	30	Pass
	5825	-1.12	0	-1.12	30	Pass
802.11n20	5745	-1.22	0	-1.22	30	Pass
	5785	-1.15	0	-1.15	30	Pass
	5825	-1.62	0	-1.62	30	Pass
802.11n40	5755	-3.74	0	-3.74	30	Pass
	5795	-4.25	0	-4.25	30	Pass

Result = Reading + Duty Cycle Factor


5150-5250MHz

802.11a_5180MHz

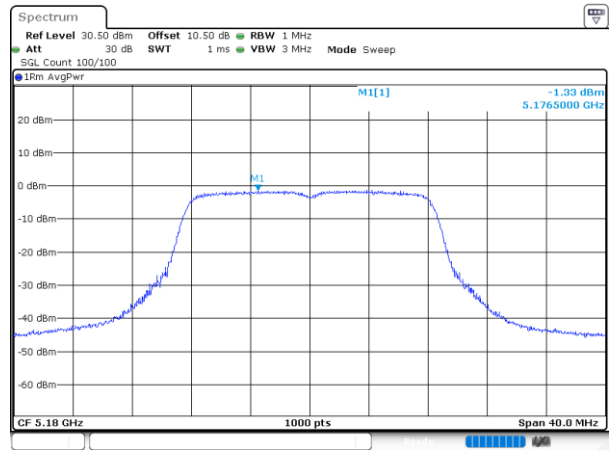


ProjectNo.:2504U29636E-RF Tester:Cayde Hou
Date: 23.JUN.2025 10:48:40

802.11a_5200MHz

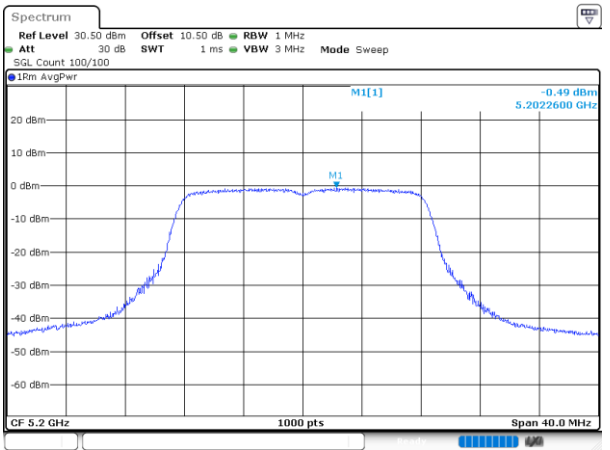


ProjectNo.:2504U29636E-RF Tester:Cayde Hou
Date: 23.JUN.2025 10:49:47

802.11a_5240MHz

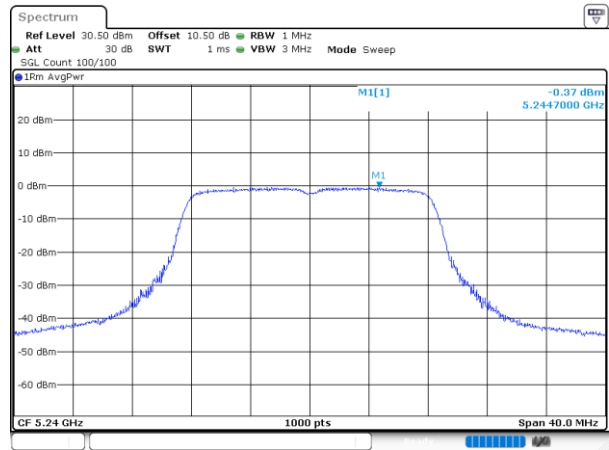


ProjectNo.:2504U29636E-RF Tester:Cayde Hou
Date: 23.JUN.2025 10:52:32

802.11n20_5180MHz

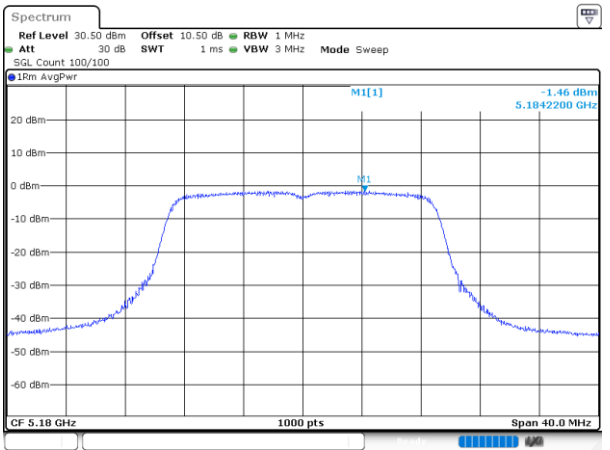


ProjectNo.:2504U29636E-RF Tester:Cayde Hou
Date: 23.JUN.2025 10:53:45

802.11n20_5200MHz

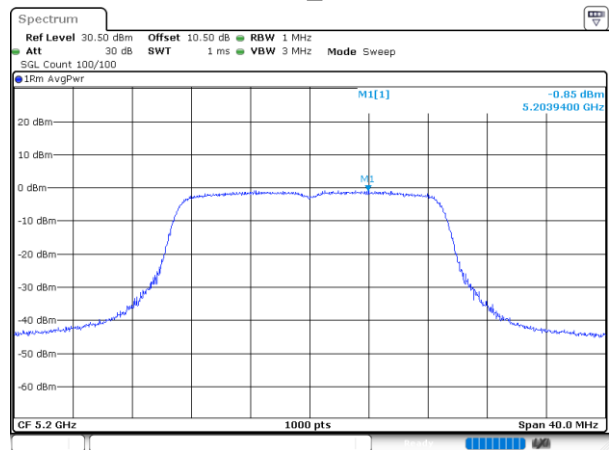


ProjectNo.:2504U29636E-RF Tester:Cayde Hou
Date: 23.JUN.2025 10:55:07

802.11n20_5240MHz

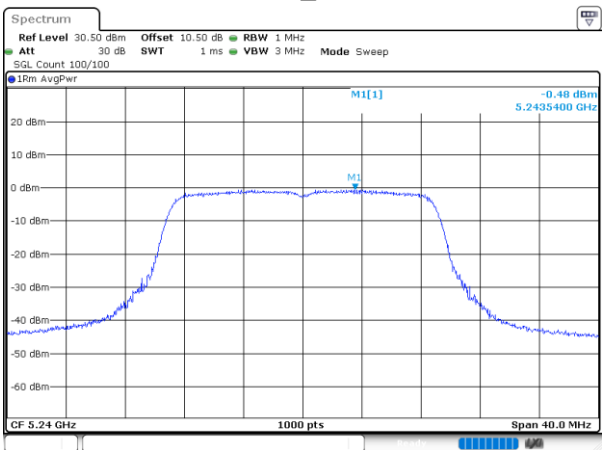


ProjectNo.:2504U29636E-RF Tester:Cayde Hou
Date: 23.JUN.2025 10:56:09

802.11n40_5190MHz

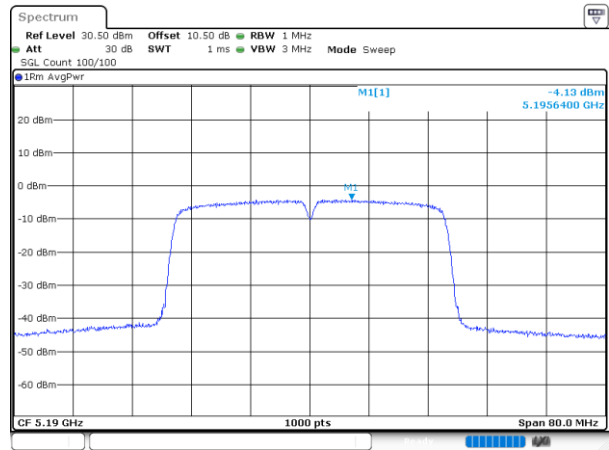

ProjectNo.:2504U29636E-RF Tester:Cayde Hou
Date: 23.JUN.2025 10:56:54


802.11n40_5230MHz

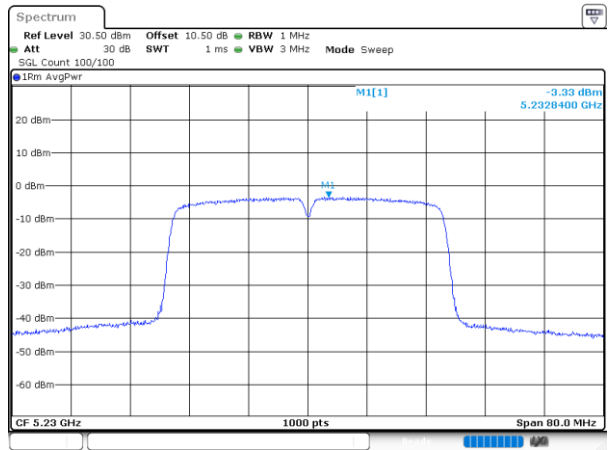

ProjectNo.:2504U29636E-RF Tester:Cayde Hou
Date: 23.JUN.2025 10:57:33


5725-5850MHz

802.11a_5745MHz

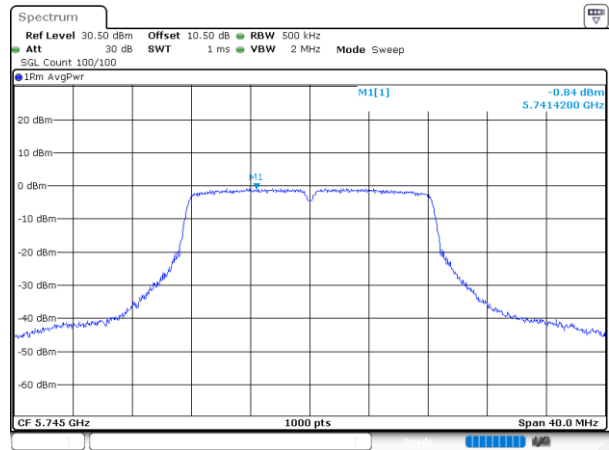


ProjectNo.:2504U29636E-RF Tester:Cayde Hou
Date: 23.JUN.2025 11:08:42

802.11a_5785MHz

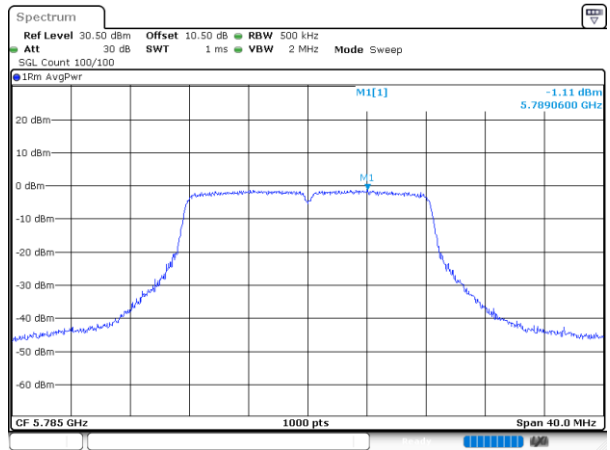


ProjectNo.:2504U29636E-RF Tester:Cayde Hou
Date: 23.JUN.2025 11:10:24

802.11a_5825MHz

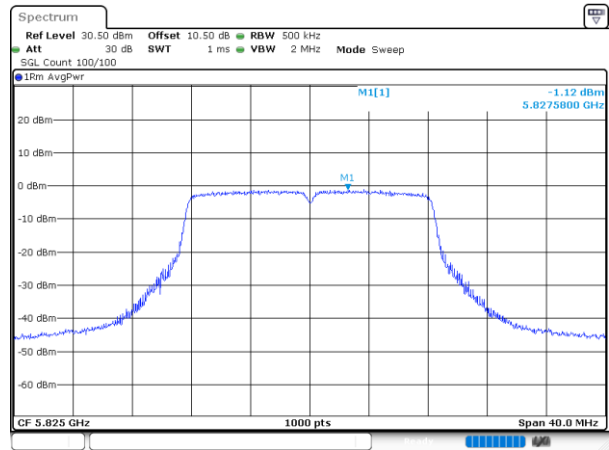


ProjectNo.:2504U29636E-RF Tester:Cayde Hou
Date: 23.JUN.2025 11:11:40

802.11n20_5745MHz

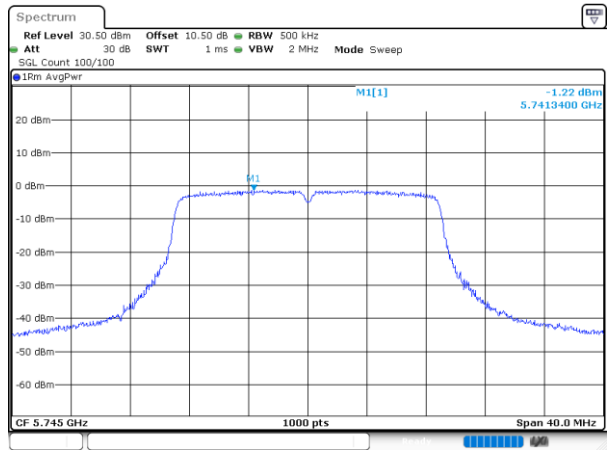


ProjectNo.:2504U29636E-RF Tester:Cayde Hou
Date: 23.JUN.2025 11:12:53

802.11n20_5785MHz

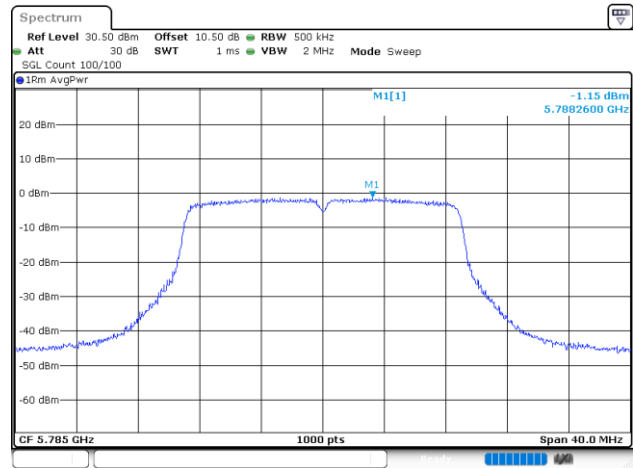


ProjectNo.:2504U29636E-RF Tester:Cayde Hou
Date: 23.JUN.2025 11:14:10

802.11n20_5825MHz

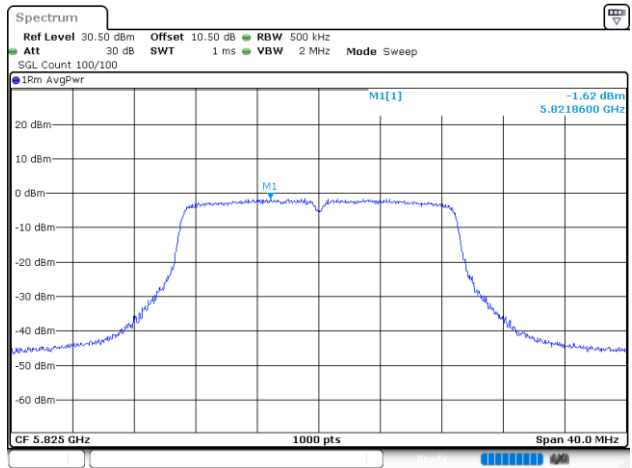


ProjectNo.:2504U29636E-RF Tester:Cayde Hou
Date: 23.JUN.2025 11:15:08

802.11n40_5755MHz

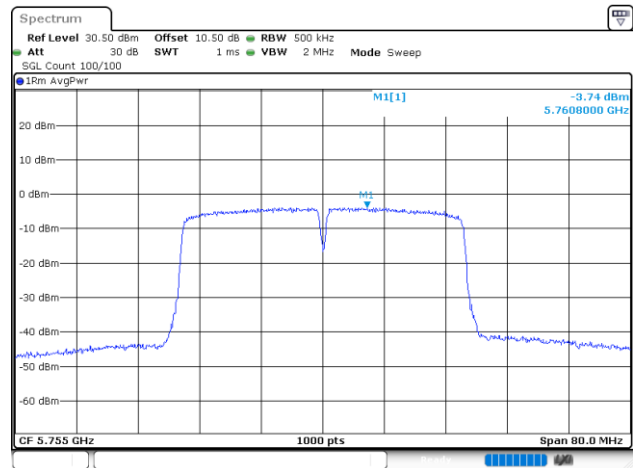

ProjectNo.:2504U29636E-RF Tester:Cayde Hou
Date: 23.JUN.2025 11:16:05

802.11n40_5795MHz

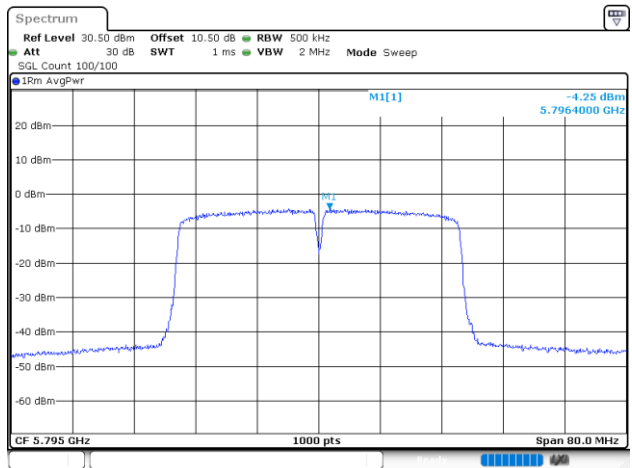

ProjectNo.:2504U29636E-RF Tester:Cayde Hou
Date: 23.JUN.2025 11:17:43

Duty Cycle

Test Information:

Sample No.:	34RF-1	Test Date:	2025/06/23
Test Site:	RF	Test Mode:	Transmitting
Tester:	Cayde Hou	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	26.3	Relative Humidity: (%)	48	ATM Pressure: (kPa)	99.7
----------------------	------	------------------------------	----	------------------------	------

Test Data:

5150-5250MHz

Mode	Test Frequency (MHz)	Ton (ms)	Ton+Toff (ms)	Duty Cycle (%)	Duty Cycle Factor(dB)	1/Ton (Hz)	VBW Setting (kHz)
802.11a	5200	100	100	100	0	NA	0.010
802.11n20	5200	100	100	100	0	NA	0.010
802.11n40	5190	100	100	100	0	NA	0.010


5725-5850MHz

Mode	Test Frequency (MHz)	Ton (ms)	Ton+Toff (ms)	Duty Cycle (%)	Duty Cycle Factor(dB)	1/Ton (Hz)	VBW Setting (kHz)
802.11a	5785	100	100	100	0	NA	0.010
802.11n20	5785	100	100	100	0	NA	0.010
802.11n40	5755	100	100	100	0	NA	0.010

Duty Cycle = Ton/(Ton+Toff)*100%


5150-5250MHz

802.11a_5200MHz

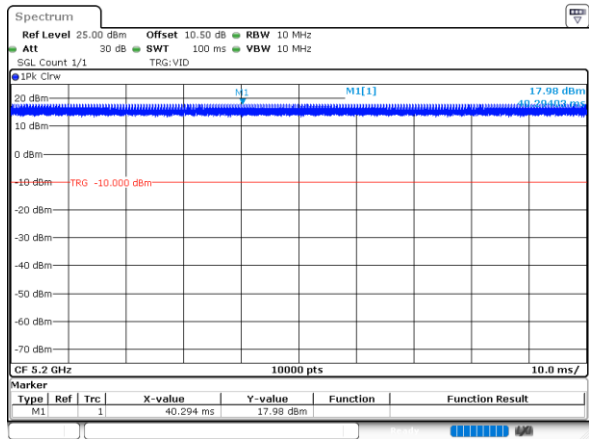

ProjectNo.:2504U29636E-RF Tester:Cayde Hou
Date: 23.JUN.2025 11:05:10


802.11n20_5200MHz

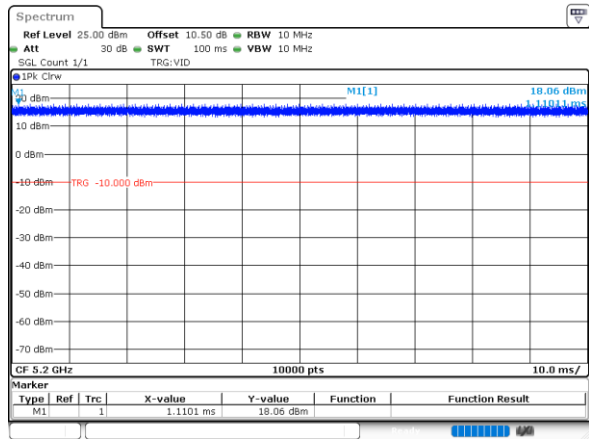

ProjectNo.:2504U29636E-RF Tester:Cayde Hou
Date: 23.JUN.2025 11:05:25


5725-5850MHz

802.11n40_5190MHz

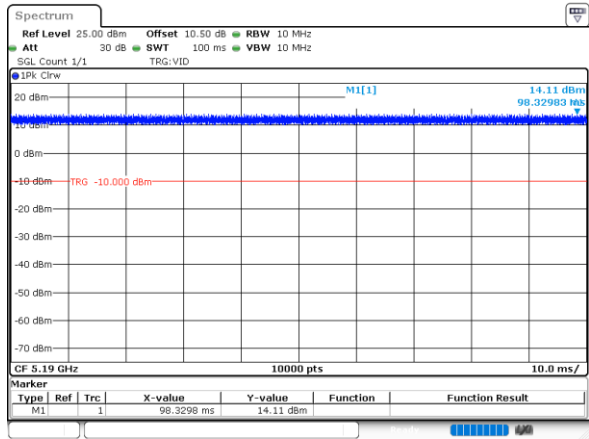


ProjectNo.:2504U29636E-RF Tester:Cayde Hou
Date: 23.JUN.2025 11:05:49

802.11a_5785MHz

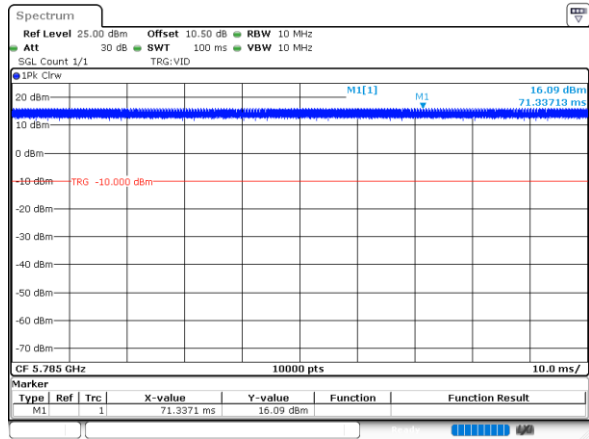


ProjectNo.:2504U29636E-RF Tester:Cayde Hou
Date: 23.JUN.2025 11:06:21

802.11n20_5785MHz

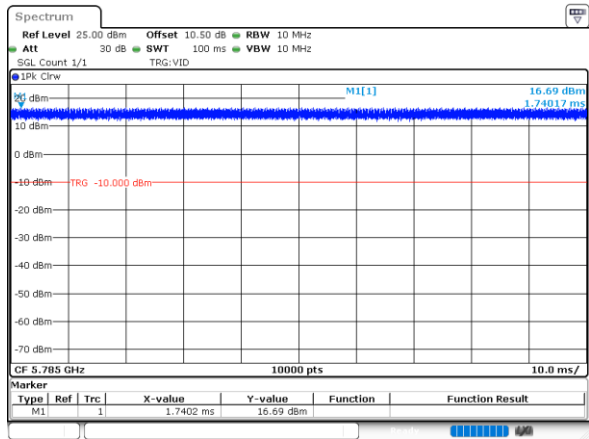

ProjectNo.:2504U29636E-RF Tester:Cayde Hou
Date: 23.JUN.2025 11:06:39

802.11n40_5755MHz

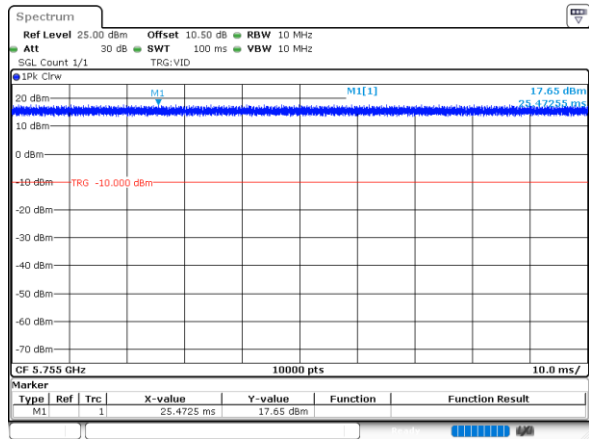

ProjectNo.:2504U29636E-RF Tester:Cayde Hou
Date: 23.JUN.2025 11:07:00

EXHIBIT A-EUT PHOTOGRAPHS

Please refer to the Attachment: 2504U29636E-RF EUT EXTERNAL PHOTOGRAPHS and 2504U29636E-RF EUT INTERNAL PHOTOGRAPHS.

EXHIBIT B-TEST SETUP PHOTOGRAPHS

Please refer to the Attachment: 2504U29636E-RF-00C TEST SETUP PHOTOGRAPHS.

***** END OF REPORT *****