

TEST REPORT

Product Name: Super Console G1
FCC ID: 2BCKD-DV8910
Trademark: KINHANK
Model Number: DV8910
Prepared For: Beijing Jinding Hanke Technology Development Co., Ltd.
Address: Room 1401-1, Building 2, Fuxing Guoji Zhongxin, Yizhuang, Beijing, China
Manufacturer: Shenzhen SDMC Technology Co., Ltd.
Address: Room 1022, Floor 10, Building A, Customs Building, No. 2, Xin'an 3rd Road, Dalang Community, Xin'an Street, Bao'an District, Shenzhen, China
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: Aug. 11, 2023
Sample tested Date: Aug. 11, 2023 to Aug. 24, 2023
Issue Date: Aug. 24, 2023
Report No.: CTB230818035RFX
Test Standards: FCC Part15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is WIFI-2.4GHz band radio test report.
Compiled by: Reviewed by: Approved by:

Zhou kui

Zhou Kui

Arron Liu

Arron LiuBin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION.....	3
2. TEST SUMMARY	4
3. MEASUREMENT UNCERTAINTY	5
4. PRODUCT INFORMATION AND TEST SETUP	6
4.1 Product Information	6
4.2 Test Setup Configuration.....	6
4.3 Support Equipment.....	6
4.4 Channel List	7
4.5 Test Mode	7
4.6 Test Environment	7
5. TEST FACILITY AND TEST INSTRUMENT USED	8
5.1 Test Facility	8
5.2 Test Instrument Used	8
6. AC POWER LINE CONDUCTED EMISSION	10
6.1 Block Diagram Of Test Setup.....	10
6.2 Limit.....	10
6.3 Test procedure	10
6.4 Test Result	12
7. RADIATED SPURIOUS EMISSION	14
7.1 Block Diagram Of Test Setup.....	14
7.2 Limit.....	14
7.3 Test procedure	15
7.4 Test Result	16
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	48
8.1 Block Diagram Of Test Setup.....	48
8.2 Limit.....	48
8.3 Test procedure	48
9. CONDUCTED OUTPUT POWER.....	73
9.1 Block Diagram Of Test Setup.....	73
9.2 Limit.....	73
9.3 Test procedure	73
9.4 Test Result	74
10. 6DB OCCUPIED BANDWIDTH.....	75
10.1 Block Diagram Of Test Setup.....	75
10.2 Limit.....	75
10.3 Test procedure	75
10.4 Test Result	76
11. POWER SPECTRAL DENSITY.....	90
11.1 Block Diagram Of Test Setup.....	90
11.2 Limit.....	90
11.3 Test procedure	90
11.4 Test Result	91
12. ANTENNA REQUIREMENT	104
13. EUT TEST SETUP PHOTOGRAPHS.....	105

(Note: N/A means not applicable)

1. VERSION

Report No.	Issue Date	Description	Approved
CTB230818035RFX	Aug. 24, 2023	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013/ KDB 558074 D01 v05r02	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1091	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	U=±54.3Hz
Conducted output power Above 1G	U=±1.0dB
Conducted output power below 1G	U=±0.9dB
Power Spectral Density , Conduction	U=±1.0dB
Conduction spurious emissions	U=±2.8dB
Out of band emission	U=±54Hz
3m chamber Radiated spurious emission(9KHz-30MHz)	U=±4.8dB
3m chamber Radiated spurious emission(30MHz-1GHz)	U=±4.3dB
3m chamber Radiated spurious emission(1GHz-18GHz)	U=±4.5dB
3m chamber Radiated spurious emission(1GHz-40GHz)	U=±4.8dB
humidity uncertainty	U=±5.3%
Temperature uncertainty	U=±0.59°C
Supply voltages	U=±3%
Time	U=±5%
Conducted Emission (9KHz-30MHz)	3.2 dB

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	DV8910
Model Description:	N/A
Wi-Fi Specification:	IEEE 802.11b/g/n/ax
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	WiFi: IEEE 802.11b/g/n20/ax20: 2412-2462MHz/ 11 channel IEEE 802.11n40/ax40: 2422-2452MHz/ 7 channel
Max. RF output power:	WiFi (2.4G) : 16.645dBm
Type of Modulation:	WiFi: DSSS, OFDM
Antenna installation:	WiFi: FPC Antenna
Antenna Gain:	WiFi (2.4G) : ANT1:1.76dBi ANT2:2.33dBi
Ratings:	ADAPTER: INPUT: 100-240V-50/60Hz 0.4A OUTPUT: 12.0V=1.0A 12.0W

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	AC ADAPTER	SUNUN	SA12BV-120100V	/	/

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462		

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

ANT 1, ANT 2

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11b/g/n20/ax20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40/ax40)	2422MHz	2437MHz	2452MHz

MIMO(ANT 1+ANT 2)

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11n20/ax20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40/ax40)	2422MHz	2437MHz	2452MHz

Test mode	Rate
802.11b	11M
802.11g	54M
802.11n20	65M
802.11n40	65M

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(DC):	12V
Normal Temperature(°C)	23
Low Temperature(°C)	0
High Temperature(°C)	50

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

Item	Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	2024.07.05
2	Power Sensor	Agilent	U2021XA	MY56120032	2024.07.05
3	Power Sensor	Agilent	U2021XA	MY56120034	2024.07.05
4	Communication test set	R&S	CMW500	108058	2024.07.05
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	2024.07.05
6	Signal Generator	Agilent	N5181A	MY50140365	2024.07.05
7	Vector signal generator	Agilent	N5182A	MY47420195	2024.07.05
8	Communication test set	Agilent	E5515C	MY50102567	2024.07.06
9	2.4 GHz Filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	2024.07.05
10	5 GHz Filter	Shenxiang	MSF5150-5850 MS-1155	20181015001	2024.07.06
11	Filter	Xingbo	XBLBQ-DZA120	190821-1-1	2024.07.06
12	BT&WI-FI Automatic test software	Microwave	MTS8000	Ver. 2.0.0.0	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2023.10.30
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2024.07.05
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/
16	966 chamber	C.R.T.	966	/	2024.08.11
17	Receiver	R&S	ESPI	100362	2024.07.05
18	Amplifier	HP	8447E	2945A02747	2024.07.05
19	Amplifier	Agilent	8449B	3008A01838	2024.07.05
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2024.07.08


21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	2024.07.08
22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	2024.07.08
24	loop antenna	ZHINAN	ZN30900A	GTS534	/
25	40G Horn antenna	A/H/System	SAS-574	588	2023.10.30
26	Amplifier	AEROFLEX	Aeroflex	097	2023.10.30

Continuous disturbance					
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	LISN	ROHDE&SCHWARZ	ESH3-Z5	100318	2024.07.05
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	2024.07.05
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2024.07.05
4	Coaxial cable	ZDECL	Z302S-NJ-SMA J-12M	18091905	2024.07.05
5	ISN	Schwarzbeck	NTFM8158	183	2024.07.05
6	Communication test set	Agilent	E5515C	MY50102567	2024.07.05
7	Communication test set	R&S	CMW500	108058	2024.07.05
8	EZ-EMC	Frad	EMC-con3A1.1	/	/

Radiated emission					
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	2024.07.08
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2024.07.08
3	Amplifier	Agilent	8449B	3008A01838	2024.07.05
4	Amplifier	HP	8447E	2945A02747	2024.07.05
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2024.07.05
6	Coaxial cable	ETS	RFC-SNS-100-NMS-80 NI	/	2024.07.05
7	Coaxial cable	ETS	RFC-SNS-100-NMS-20 NI	/	2024.07.05
8	Coaxial cable	ETS	RFC-SNS-100-SMS-20 NI	/	2024.07.05
9	Coaxial cable	ETS	RFC-NNS-100-NMS-300 NI	/	2024.07.05
10	Communication test set	Agilent	E5515C	MY50102567	2024.07.05
11	Communication test set	R&S	CMW500	108058	2024.07.05
12	EZ-EMC	Frad	EMC-con3A1.1	/	/

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

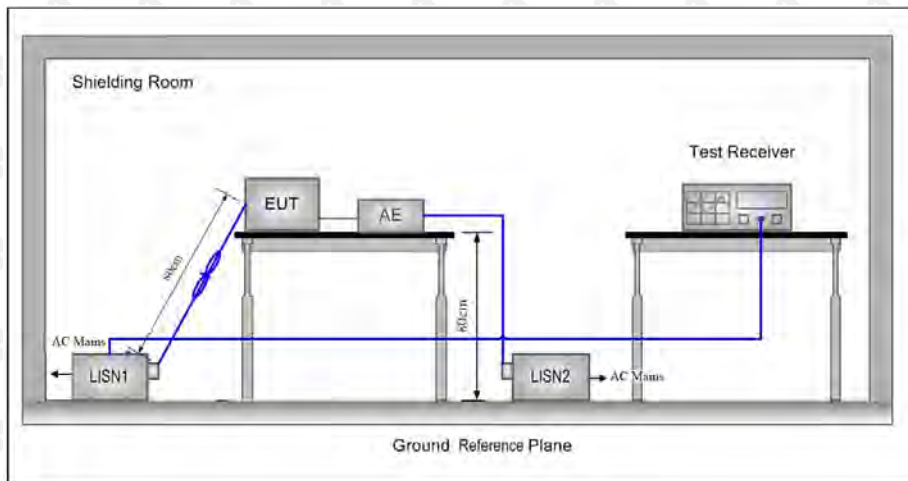

6.2 Limit

Table 4 – AC power-line conducted emissions limits

Frequency (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane.

This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

6.4 Test Result


Test Specification: Line
AC 120V 60Hz

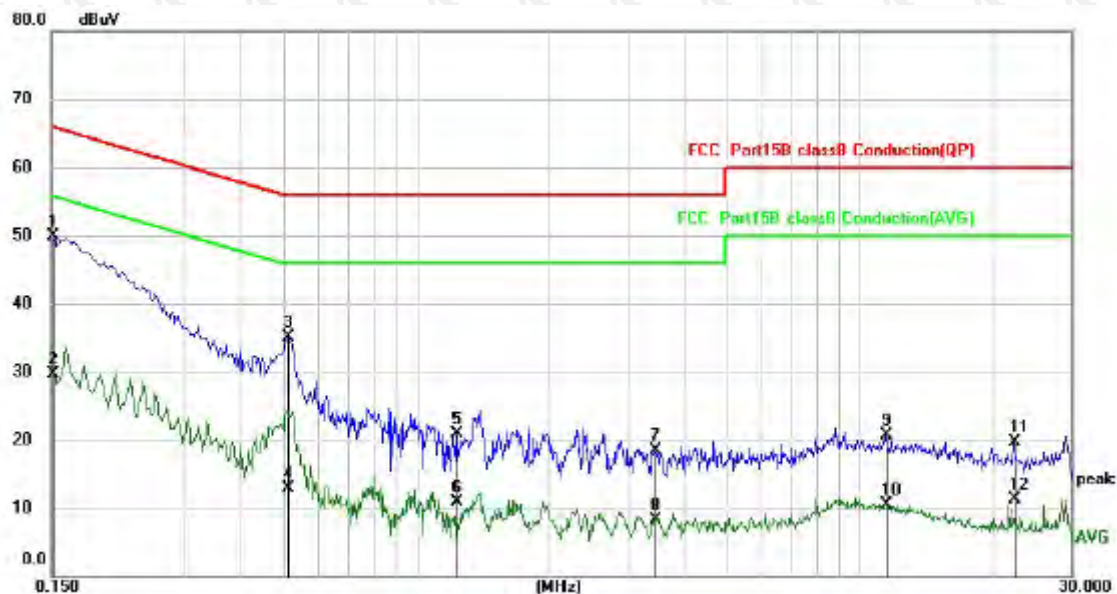

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1516	40.19	9.70	49.89	65.91	-16.02	QP
2		0.1516	20.04	9.70	29.74	55.91	-26.17	AVG
3		0.5140	25.52	9.68	35.20	56.00	-20.80	QP
4		0.5140	3.13	9.68	12.81	46.00	-33.19	AVG
5		1.2340	11.06	9.78	20.84	56.00	-35.16	QP
6		1.2340	1.22	9.78	11.00	46.00	-35.00	AVG
7		3.4420	8.70	9.87	18.57	56.00	-37.43	QP
8		3.4420	-1.59	9.87	8.28	46.00	-37.72	AVG
9		11.4420	10.50	10.23	20.73	60.00	-39.27	QP
10		11.4420	0.24	10.23	10.47	50.00	-39.53	AVG
11		22.2139	9.05	10.67	19.72	60.00	-40.28	QP
12		22.2139	0.60	10.67	11.27	50.00	-38.73	AVG

Remark: Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Test Specification: Neutral
AC 120V 60Hz

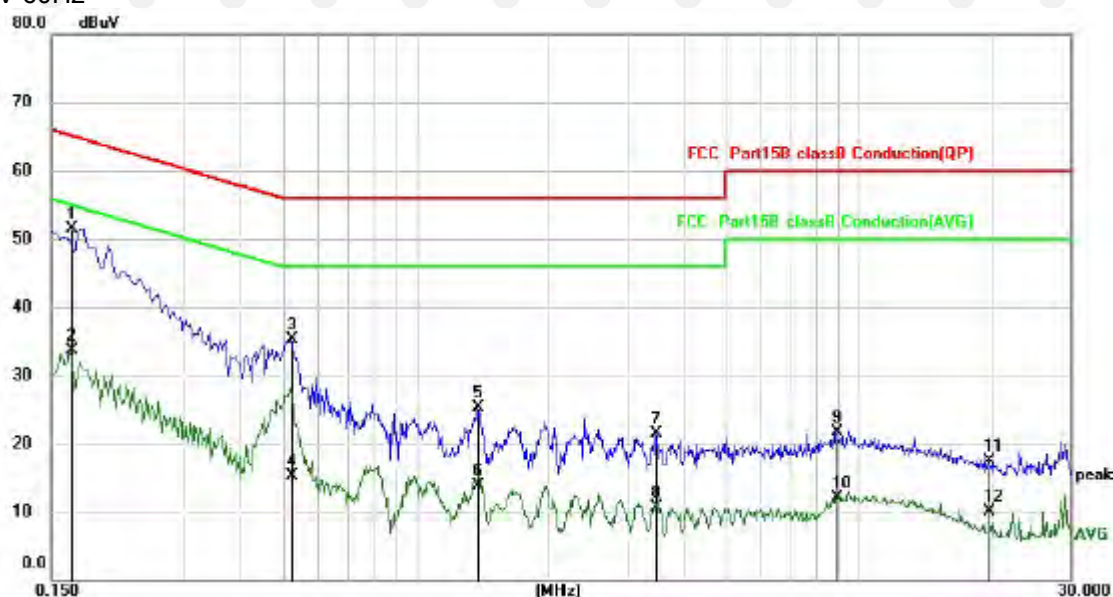

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1660	41.81	9.70	51.51	65.16	-13.65	QP
2		0.1660	24.03	9.70	33.73	55.16	-21.43	AVG
3		0.5220	25.61	9.68	35.29	56.00	-20.71	QP
4		0.5220	5.55	9.68	15.23	46.00	-30.77	AVG
5		1.3740	15.52	9.79	25.31	56.00	-30.69	QP
6		1.3740	4.19	9.79	13.98	46.00	-32.02	AVG
7		3.4780	11.67	9.88	21.55	56.00	-34.45	QP
8		3.4780	0.89	9.88	10.77	46.00	-35.23	AVG
9		8.8860	11.63	10.12	21.75	60.00	-38.25	QP
10		8.8860	2.00	10.12	12.12	50.00	-37.88	AVG
11		19.6220	6.89	10.56	17.45	60.00	-42.55	QP
12		19.6220	-0.43	10.56	10.13	50.00	-39.87	AVG

Remark: Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

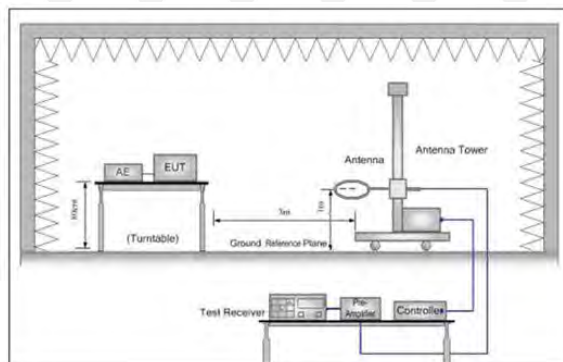


Figure 1. Below 30MHz

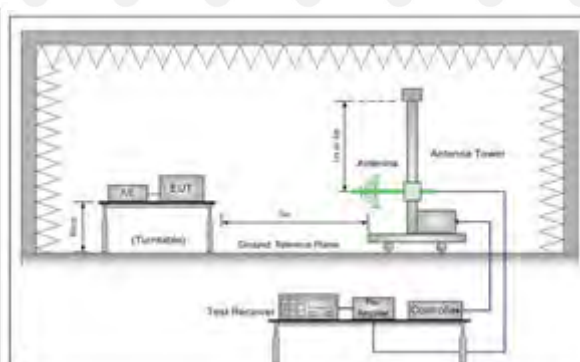


Figure 2. 30MHz to 1GHz

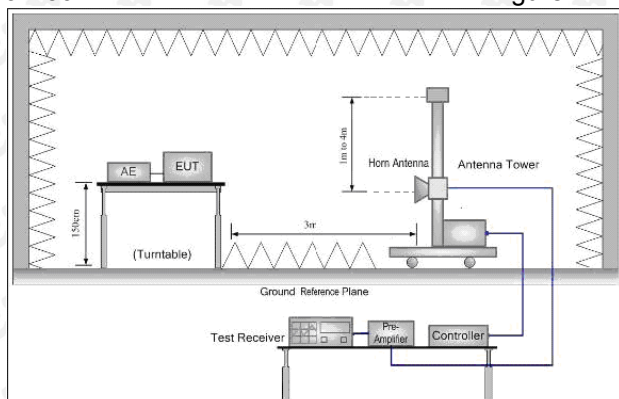


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F (kHz)	-	-	300
0.490MHz-1.705MHz	24000/F (kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- j. Repeat above procedures until all frequencies measured was complete.

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement –X, Y, and Z-plane. The X-plane results were found as the worst case and were shown in this report.

7.4 Test Result

After pre-scanning three directions, the report recorded the worst case

Below 1GHz Test Results:

Antenna polarity: H



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		63.2023	39.85	-8.04	31.81	40.00	-8.19	QP
2		78.0020	40.14	-10.22	29.92	40.00	-10.08	QP
3		142.8243	33.44	-5.50	27.94	43.50	-15.56	QP
4		215.6456	33.57	-9.07	24.50	43.50	-19.00	QP
5		405.3766	31.52	-2.50	29.02	46.00	-16.98	QP
6	*	948.7610	32.29	7.63	39.92	46.00	-6.08	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Antenna polarity: V



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		42.6000	34.04	-6.51	27.53	40.00	-12.47	QP
2		62.6507	37.99	-7.96	30.03	40.00	-9.97	QP
3		102.3597	40.43	-9.46	30.97	43.50	-12.53	QP
4		133.1511	36.67	-6.05	30.62	43.50	-12.88	QP
5		215.6456	33.92	-9.07	24.85	43.50	-18.65	QP
6	*	948.7610	29.73	7.63	37.36	46.00	-8.64	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

1. The margin of 9K-30MH measurement exceeds 20dB, so the test chart is not included.

2. All modes have been tested, and the test results show that ANT2 b-mode data is the worst, only ANT2 b-mode test chart is put.

Above 1 GHz Test Results:

ANT1 LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.17	-3.64	60.53	74	-13.47	peak
4824	49.13	-3.64	45.49	54	-8.51	AVG
7236	57.35	-0.95	56.40	74	-17.60	peak
7236	45.37	-0.95	44.42	54	-9.58	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	65.05	-3.64	61.41	74	-12.59	peak
4824	47.26	-3.64	43.62	54	-10.38	AVG
7236	56.32	-0.95	55.37	74	-18.63	peak
7236	43.94	-0.95	42.99	54	-11.01	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1 MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	65.19	-3.51	61.68	74	-12.32	peak
4874	49.39	-3.51	45.88	54	-8.12	AVG
7311	60.40	-0.82	59.58	74	-14.42	peak
7311	43.98	-0.82	43.16	54	-10.84	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	63.32	-3.51	59.81	74	-14.19	peak
4874	47.06	-3.51	43.55	54	-10.45	AVG
7311	58.12	-0.82	57.30	74	-16.70	peak
7311	45.01	-0.82	44.19	54	-9.81	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1 HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.00	-3.43	60.57	74	-13.43	peak
4924	48.48	-3.43	45.05	54	-8.95	AVG
7386	58.31	-0.75	57.56	74	-16.44	peak
7386	42.79	-0.75	42.04	54	-11.96	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.41	-3.43	60.98	74	-13.02	peak
4924	46.06	-3.43	42.63	54	-11.37	AVG
7386	57.88	-0.75	57.13	74	-16.87	peak
7386	41.63	-0.75	40.88	54	-13.12	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT1 LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.59	-3.64	60.95	74	-13.05	peak
4824	48.64	-3.64	45.00	54	-9.00	AVG
7236	57.50	-0.95	56.55	74	-17.45	peak
7236	44.44	-0.95	43.49	54	-10.51	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	66.51	-3.64	62.87	74	-11.13	peak
4824	48.29	-3.64	44.65	54	-9.35	AVG
7236	58.92	-0.95	57.97	74	-16.03	peak
7236	42.96	-0.95	42.01	54	-11.99	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1 MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	66.13	-3.51	62.62	74	-11.38	peak
4874	49.96	-3.51	46.45	54	-7.55	AVG
7311	57.72	-0.82	56.90	74	-17.10	peak
7311	44.41	-0.82	43.59	54	-10.41	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	65.56	-3.51	62.05	74	-11.95	peak
4874	47.57	-3.51	44.06	54	-9.94	AVG
7311	58.41	-0.82	57.59	74	-16.41	peak
7311	44.78	-0.82	43.96	54	-10.04	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1 HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.18	-3.43	60.75	74	-13.25	peak
4924	46.58	-3.43	43.15	54	-10.85	AVG
7386	59.35	-0.75	58.60	74	-15.40	peak
7386	44.20	-0.75	43.45	54	-10.55	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.85	-3.43	61.42	74	-12.58	peak
4924	46.73	-3.43	43.30	54	-10.70	AVG
7386	56.63	-0.75	55.88	74	-18.12	peak
7386	41.47	-0.75	40.72	54	-13.28	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

Above 1GHz ANT1+ANT2 :

LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	66.05	-3.64	62.41	74	-11.59	peak
4824	48.28	-3.64	44.64	54	-9.36	AVG
7236	57.85	-0.95	56.90	74	-17.10	peak
7236	43.96	-0.95	43.01	54	-10.99	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	65.96	-3.64	62.32	74	-11.68	peak
4824	49.29	-3.64	45.65	54	-8.35	AVG
7236	58.15	-0.95	57.20	74	-16.80	peak
7236	43.05	-0.95	42.10	54	-11.90	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

LOW CH1 (802.11n/H20 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.01	-3.51	60.50	74	-13.50	peak
4874	48.49	-3.51	44.98	54	-9.02	AVG
7311	59.50	-0.82	58.68	74	-15.32	peak
7311	44.25	-0.82	43.43	54	-10.57	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	63.77	-3.51	60.26	74	-13.74	peak
4874	48.63	-3.51	45.12	54	-8.88	AVG
7311	59.68	-0.82	58.86	74	-15.14	peak
7311	44.47	-0.82	43.65	54	-10.35	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

LOW CH1 (802.11n/H20 Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	62.96	-3.43	59.53	74	-14.47	peak
4924	48.24	-3.43	44.81	54	-9.19	AVG
7386	58.59	-0.75	57.84	74	-16.16	peak
7386	43.81	-0.75	43.06	54	-10.94	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	62.95	-3.43	59.52	74	-14.48	peak
4924	47.57	-3.43	44.14	54	-9.86	AVG
7386	58.80	-0.75	58.05	74	-15.95	peak
7386	41.94	-0.75	41.19	54	-12.81	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Above 1GHz ANT1+ANT2 :

LOW CH1 (802.11ax/H20 Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	66.00	-3.64	62.36	74	-11.64	peak
4824	50.03	-3.64	46.39	54	-7.61	AVG
7236	58.10	-0.95	57.15	74	-16.85	peak
7236	46.43	-0.95	45.48	54	-8.52	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.68	-3.64	61.04	74	-12.96	peak
4824	47.97	-3.64	44.33	54	-9.67	AVG
7236	56.89	-0.95	55.94	74	-18.06	peak
7236	44.16	-0.95	43.21	54	-10.79	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

LOW CH1 (802.11ax/H20 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	66.33	-3.51	62.82	74	-11.18	peak
4874	48.95	-3.51	45.44	54	-8.56	AVG
7311	59.79	-0.82	58.97	74	-15.03	peak
7311	44.21	-0.82	43.39	54	-10.61	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.21	-3.51	60.70	74	-13.30	peak
4874	48.36	-3.51	44.85	54	-9.15	AVG
7311	58.76	-0.82	57.94	74	-16.06	peak
7311	42.81	-0.82	41.99	54	-12.01	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

LOW CH1 (802.11ax/H20 Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.50	-3.43	60.07	74	-13.93	peak
4924	46.22	-3.43	42.79	54	-11.21	AVG
7386	57.37	-0.75	56.62	74	-17.38	peak
7386	42.71	-0.75	41.96	54	-12.04	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	65.31	-3.43	61.88	74	-12.12	peak
4924	45.82	-3.43	42.39	54	-11.61	AVG
7386	57.85	-0.75	57.10	74	-16.90	peak
7386	42.16	-0.75	41.41	54	-12.59	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT1+ANT2 LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	65.78	-3.63	62.15	74	-11.85	peak
4844	48.99	-3.63	45.36	54	-8.64	AVG
7266	58.38	-0.94	57.44	74	-16.56	peak
7266	46.68	-0.94	45.74	54	-8.26	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	65.88	-3.63	62.25	74	-11.75	peak
4844	48.61	-3.63	44.98	54	-9.02	AVG
7266	58.34	-0.94	57.40	74	-16.60	peak
7266	45.64	-0.94	44.70	54	-9.30	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1+ANT2 MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	63.21	-3.51	59.70	74	-14.30	peak
4874	49.57	-3.51	46.06	54	-7.94	AVG
7311	58.44	-0.82	57.62	74	-16.38	peak
7311	44.73	-0.82	43.91	54	-10.09	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.24	-3.51	58.73	74	-15.27	peak
4874	46.50	-3.51	42.99	54	-11.01	AVG
7311	56.68	-0.82	55.86	74	-18.14	peak
7311	43.37	-0.82	42.55	54	-11.45	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1+ANT2 HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4904	63.29	-3.43	59.86	74	-14.14	peak
4904	47.48	-3.43	44.05	54	-9.95	AVG
7356	58.32	-0.75	57.57	74	-16.43	peak
7356	43.37	-0.75	42.62	54	-11.38	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4904	62.65	-3.43	59.22	74	-14.78	peak
4904	47.77	-3.43	44.34	54	-9.66	AVG
7356	59.16	-0.75	58.41	74	-15.59	peak
7356	44.91	-0.75	44.16	54	-9.84	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1+ANT2 LOW CH3 (802.11ax/H40 Mode)/2422

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	63.02	-3.63	59.39	74	-14.61	peak
4844	47.72	-3.63	44.09	54	-9.91	AVG
7266	57.51	-0.94	56.57	74	-17.43	peak
7266	46.04	-0.94	45.10	54	-8.90	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	65.45	-3.63	61.82	74	-12.18	peak
4844	47.89	-3.63	44.26	54	-9.74	AVG
7266	58.77	-0.94	57.83	74	-16.17	peak
7266	45.51	-0.94	44.57	54	-9.43	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1+ANT2 MID CH6 (802.11ax/H40 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.29	-3.51	60.78	74	-13.22	peak
4874	47.22	-3.51	43.71	54	-10.29	AVG
7311	58.62	-0.82	57.80	74	-16.20	peak
7311	45.13	-0.82	44.31	54	-9.69	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.32	-3.51	58.81	74	-15.19	peak
4874	46.50	-3.51	42.99	54	-11.01	AVG
7311	56.63	-0.82	55.81	74	-18.19	peak
7311	43.36	-0.82	42.54	54	-11.46	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1+ANT2 HIGH CH9 (802.11ax/H40 Mode)/2452

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4904	63.84	-3.43	60.41	74	-13.59	peak
4904	49.56	-3.43	46.13	54	-7.87	AVG
7356	56.16	-0.75	55.41	74	-18.59	peak
7356	43.50	-0.75	42.75	54	-11.25	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4904	63.71	-3.43	60.28	74	-13.72	peak
4904	46.67	-3.43	43.24	54	-10.76	AVG
7356	58.02	-0.75	57.27	74	-16.73	peak
7356	43.76	-0.75	43.01	54	-10.99	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

Restricted bands around fundamental frequency (Radiated)

Operation Mode:

ANT 1 802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.75	-5.81	50.94	74	-23.06	peak
2390	/	-5.81	/	54	/	AVG
2399	65.26	-5.84	59.42	74	-14.58	peak
2399	48.69	-5.84	42.85	54	-11.15	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.34	-5.81	51.53	74	-22.47	peak
2390	/	-5.81	/	54	/	AVG
2399	63.55	-5.84	57.71	74	-16.29	peak
2399	46.38	-5.84	40.54	54	-13.46	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode:

ANT1 802.11b Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.56	-5.65	51.91	74	-22.09	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.19	-5.65	51.54	74	-22.46	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode:

ANT1 802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.43	-5.81	52.62	74	-21.38	peak
2390	/	-5.81	/	54	/	AVG
2399	63.29	-5.84	57.45	74	-16.55	peak
2399	45.87	-5.84	40.03	54	-13.97	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.10	-5.81	51.29	74	-22.71	peak
2390	/	-5.81	/	54	/	AVG
2399	62.86	-5.84	57.02	74	-16.98	peak
2399	46.01	-5.84	40.17	54	-13.83	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode:

ANT1 802.11g Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.56	-5.65	51.91	74	-22.09	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	58.18	-5.65	52.53	74	-21.47	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode:

ANT1+ANT2 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.54	-5.81	50.73	74	-23.27	peak
2390	/	-5.81	/	54	/	AVG
2399	63.02	-5.84	57.18	74	-16.82	peak
2399	48.08	-5.84	42.24	54	-11.76	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	55.91	-5.81	50.10	74	-23.90	peak
2390	/	-5.81	/	54	/	AVG
2399	60.24	-5.84	54.40	74	-19.60	peak
2399	47.03	-5.84	41.19	54	-12.81	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode:

ANT1+ANT2 802.11n/H20 Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.40	-5.65	50.75	74	-23.25	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.81	-5.65	51.16	74	-22.84	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

ANT1+ANT2 802.11ax/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.94	-5.81	52.13	74	-21.87	peak
2390	/	-5.81	/	54	/	AVG
2399	63.69	-5.84	57.85	74	-16.15	peak
2399	48.45	-5.84	42.61	54	-11.39	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.52	-5.81	50.71	74	-23.29	peak
2390	/	-5.81	/	54	/	AVG
2399	61.02	-5.84	55.18	74	-18.82	peak
2399	47.37	-5.84	41.53	54	-12.47	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode:

ANT1+ANT2 802.11ax/H20 Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.25	-5.65	50.60	74	-23.40	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.28	-5.65	50.63	74	-23.37	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode:

ANT1+ANT2 802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.58	-5.81	52.77	74	-21.23	peak
2390	/	-5.81	/	54	/	AVG
2399	62.37	-5.84	56.53	74	-17.47	peak
2399	46.54	-5.84	40.70	54	-13.30	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.92	-5.81	53.11	74	-20.89	peak
2390	/	-5.81	/	54	/	AVG
2399	61.77	-5.84	55.93	74	-18.07	peak
2399	46.09	-5.84	40.25	54	-13.75	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode:

ANT1+ANT2 802.11n/H40 Mode TX CH High (2452MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.30	-5.65	51.65	74	-22.35	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.84	-5.65	52.19	74	-21.81	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

ANT1+ANT2 802.11ax/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	59.24	-5.81	53.43	74	-20.57	peak
2390	/	-5.81	/	54	/	AVG
2399	63.96	-5.84	58.12	74	-15.88	peak
2399	45.59	-5.84	39.75	54	-14.25	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.52	-5.81	51.71	74	-22.29	peak
2390	/	-5.81	/	54	/	AVG
2399	60.41	-5.84	54.57	74	-19.43	peak
2399	45.66	-5.84	39.82	54	-14.18	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode:

ANT1+ANT2 802.11ax/H40 Mode TX CH High (2452MHz)

Horizontal


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.49	-5.65	51.84	74	-22.16	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.61	-5.65	50.96	74	-23.04	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

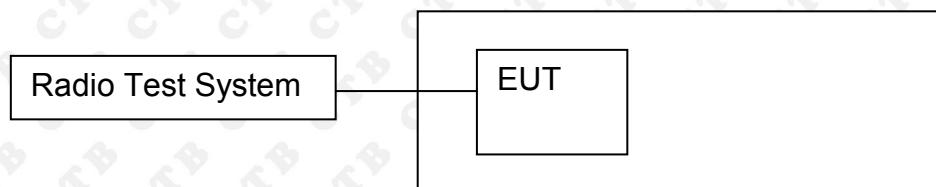

8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:

Below 30MHz:

RBW = 100kHz, VBW = 300kHz, Sweep = auto

Detector function = peak, Trace = max hold

Above 30MHz:

RBW = 100KHz, VBW = 300KHz, Sweep = auto


Detector function = peak, Trace = max hold

8.4 Test Result


ANT1:

BAND EDGE Graphs

802.11b/LCH

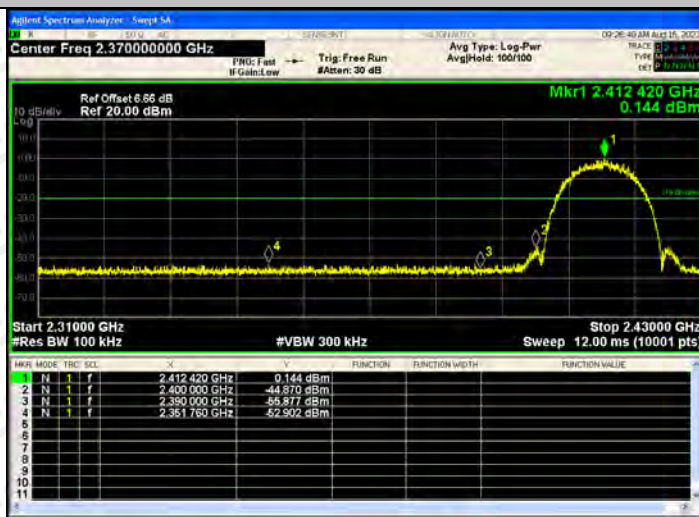


802.11b/HCH

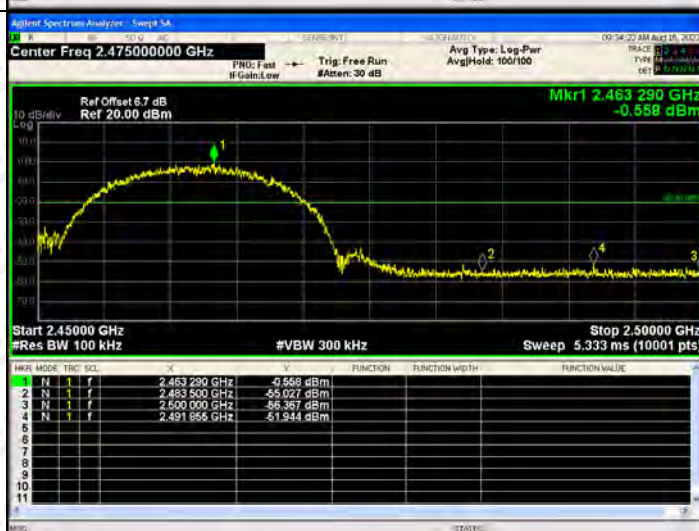


BAND EDGE Graphs

802.11g/LCH

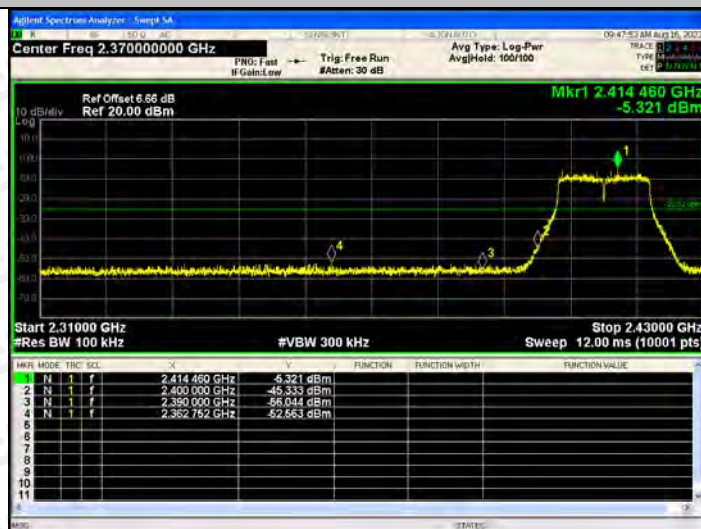


802.11g/HCH

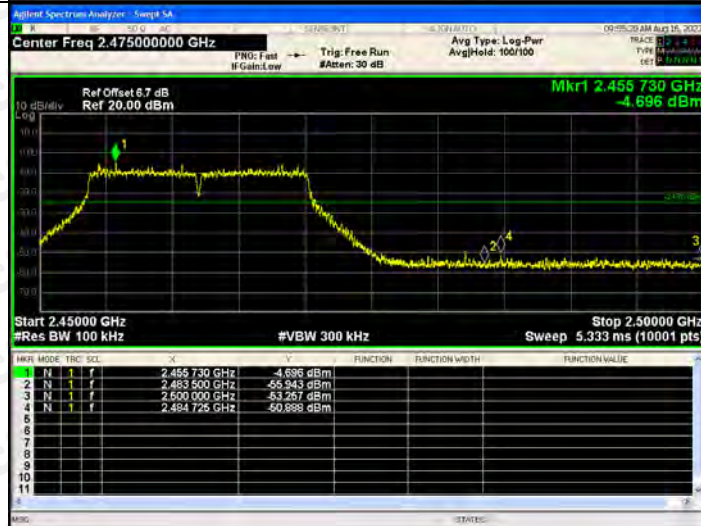

BAND EDGE Graphs

802.11n(HT20)/L
CH

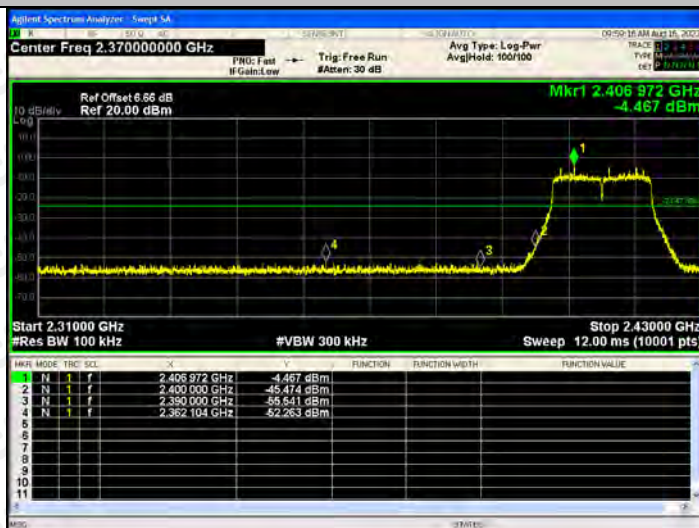


802.11n(HT20)/H
CH



BAND EDGE Graphs

802.11n(HT40)/L
CH

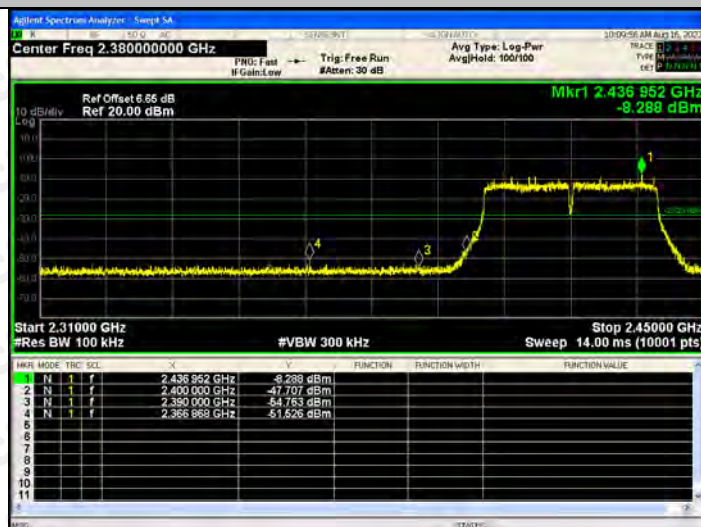

802.11n(HT40)/H
CH



BAND EDGE Graphs

802.11ax(HT20)/
LCH




802.11ax(HT20)/
HCH




BAND EDGE Graphs

802.11ax(HT40)/
LCH

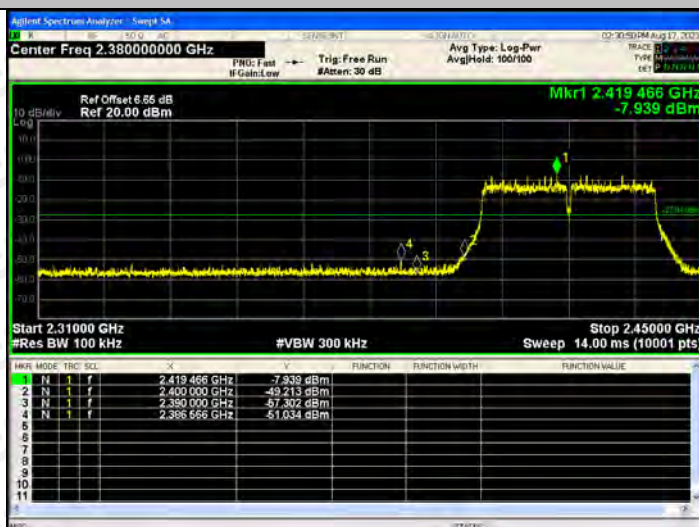


802.11ax(HT40)/
HCH

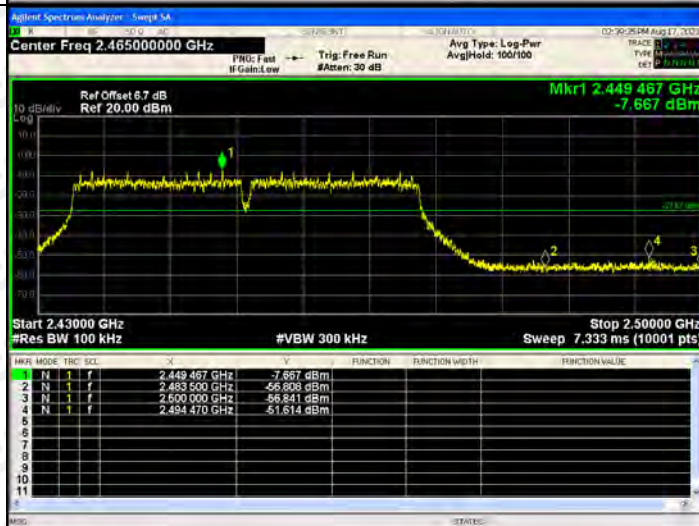




RF Conducted Spurious Emissions Graphs

802.11b /LCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz PRG: Fast Trig: Free Run Avg Type: Log-Pwr IF Gain: Low #Atten: 26 dB AvgHold: 10/10 09:27:47 AM Aug 16, 2023 Ref Offset 6.66 dB Ref 15.00 dBm Mkr1 2.409 7 GHz -2.984 dBm 10 dBm/div Log Start 30 MHz Stop 26.50 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.530 s (30001 pts) <table><tr><th>Mkrs</th><th>Mode</th><th>Trig</th><th>SQL</th><th>F</th><th>V</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.409 7 GHz</td><td>-2.984 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.653 3 GHz</td><td>-41.353 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.784 9 GHz</td><td>-55.271 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.396 6 GHz</td><td>-54.932 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.548 6 GHz</td><td>-54.801 dBm</td><td></td><td></td><td></td></tr></table>	Mkrs	Mode	Trig	SQL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.409 7 GHz	-2.984 dBm				2	N	1	f	24.653 3 GHz	-41.353 dBm				3	N	1	f	4.784 9 GHz	-55.271 dBm				4	N	1	f	7.396 6 GHz	-54.932 dBm				5	N	1	f	9.548 6 GHz	-54.801 dBm			
Mkrs	Mode	Trig	SQL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.409 7 GHz	-2.984 dBm																																																		
2	N	1	f	24.653 3 GHz	-41.353 dBm																																																		
3	N	1	f	4.784 9 GHz	-55.271 dBm																																																		
4	N	1	f	7.396 6 GHz	-54.932 dBm																																																		
5	N	1	f	9.548 6 GHz	-54.801 dBm																																																		
802.11b /MCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz PRG: Fast Trig: Free Run Avg Type: Log-Pwr IF Gain: Low #Atten: 26 dB AvgHold: 10/10 09:31:27 AM Aug 16, 2023 Ref Offset 6.72 dB Ref 15.00 dBm Mkr1 2.439 7 GHz -1.825 dBm 10 dBm/div Log Start 30 MHz Stop 26.50 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.530 s (30001 pts) <table><tr><th>Mkrs</th><th>Mode</th><th>Trig</th><th>SQL</th><th>F</th><th>V</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.439 7 GHz</td><td>-1.825 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>25.053 9 GHz</td><td>-41.469 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.788 4 GHz</td><td>-54.379 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.244 8 GHz</td><td>-54.470 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.578 0 GHz</td><td>-54.199 dBm</td><td></td><td></td><td></td></tr></table>	Mkrs	Mode	Trig	SQL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.439 7 GHz	-1.825 dBm				2	N	1	f	25.053 9 GHz	-41.469 dBm				3	N	1	f	4.788 4 GHz	-54.379 dBm				4	N	1	f	7.244 8 GHz	-54.470 dBm				5	N	1	f	9.578 0 GHz	-54.199 dBm			
Mkrs	Mode	Trig	SQL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.439 7 GHz	-1.825 dBm																																																		
2	N	1	f	25.053 9 GHz	-41.469 dBm																																																		
3	N	1	f	4.788 4 GHz	-54.379 dBm																																																		
4	N	1	f	7.244 8 GHz	-54.470 dBm																																																		
5	N	1	f	9.578 0 GHz	-54.199 dBm																																																		
802.11b /HCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz PRG: Fast Trig: Free Run Avg Type: Log-Pwr IF Gain: Low #Atten: 26 dB AvgHold: 10/10 09:34:57 AM Aug 16, 2023 Ref Offset 6.7 dB Ref 15.00 dBm Mkr1 2.459 9 GHz -2.713 dBm 10 dBm/div Log Start 30 MHz Stop 26.50 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.530 s (30001 pts) <table><tr><th>Mkrs</th><th>Mode</th><th>Trig</th><th>SQL</th><th>F</th><th>V</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.459 9 GHz</td><td>-2.713 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.618 9 GHz</td><td>-40.557 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>5.058 7 GHz</td><td>-55.408 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.581 0 GHz</td><td>-54.112 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.905 1 GHz</td><td>-55.601 dBm</td><td></td><td></td><td></td></tr></table>	Mkrs	Mode	Trig	SQL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.459 9 GHz	-2.713 dBm				2	N	1	f	24.618 9 GHz	-40.557 dBm				3	N	1	f	5.058 7 GHz	-55.408 dBm				4	N	1	f	7.581 0 GHz	-54.112 dBm				5	N	1	f	9.905 1 GHz	-55.601 dBm			
Mkrs	Mode	Trig	SQL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.459 9 GHz	-2.713 dBm																																																		
2	N	1	f	24.618 9 GHz	-40.557 dBm																																																		
3	N	1	f	5.058 7 GHz	-55.408 dBm																																																		
4	N	1	f	7.581 0 GHz	-54.112 dBm																																																		
5	N	1	f	9.905 1 GHz	-55.601 dBm																																																		




RF Conducted Spurious Emissions Graphs

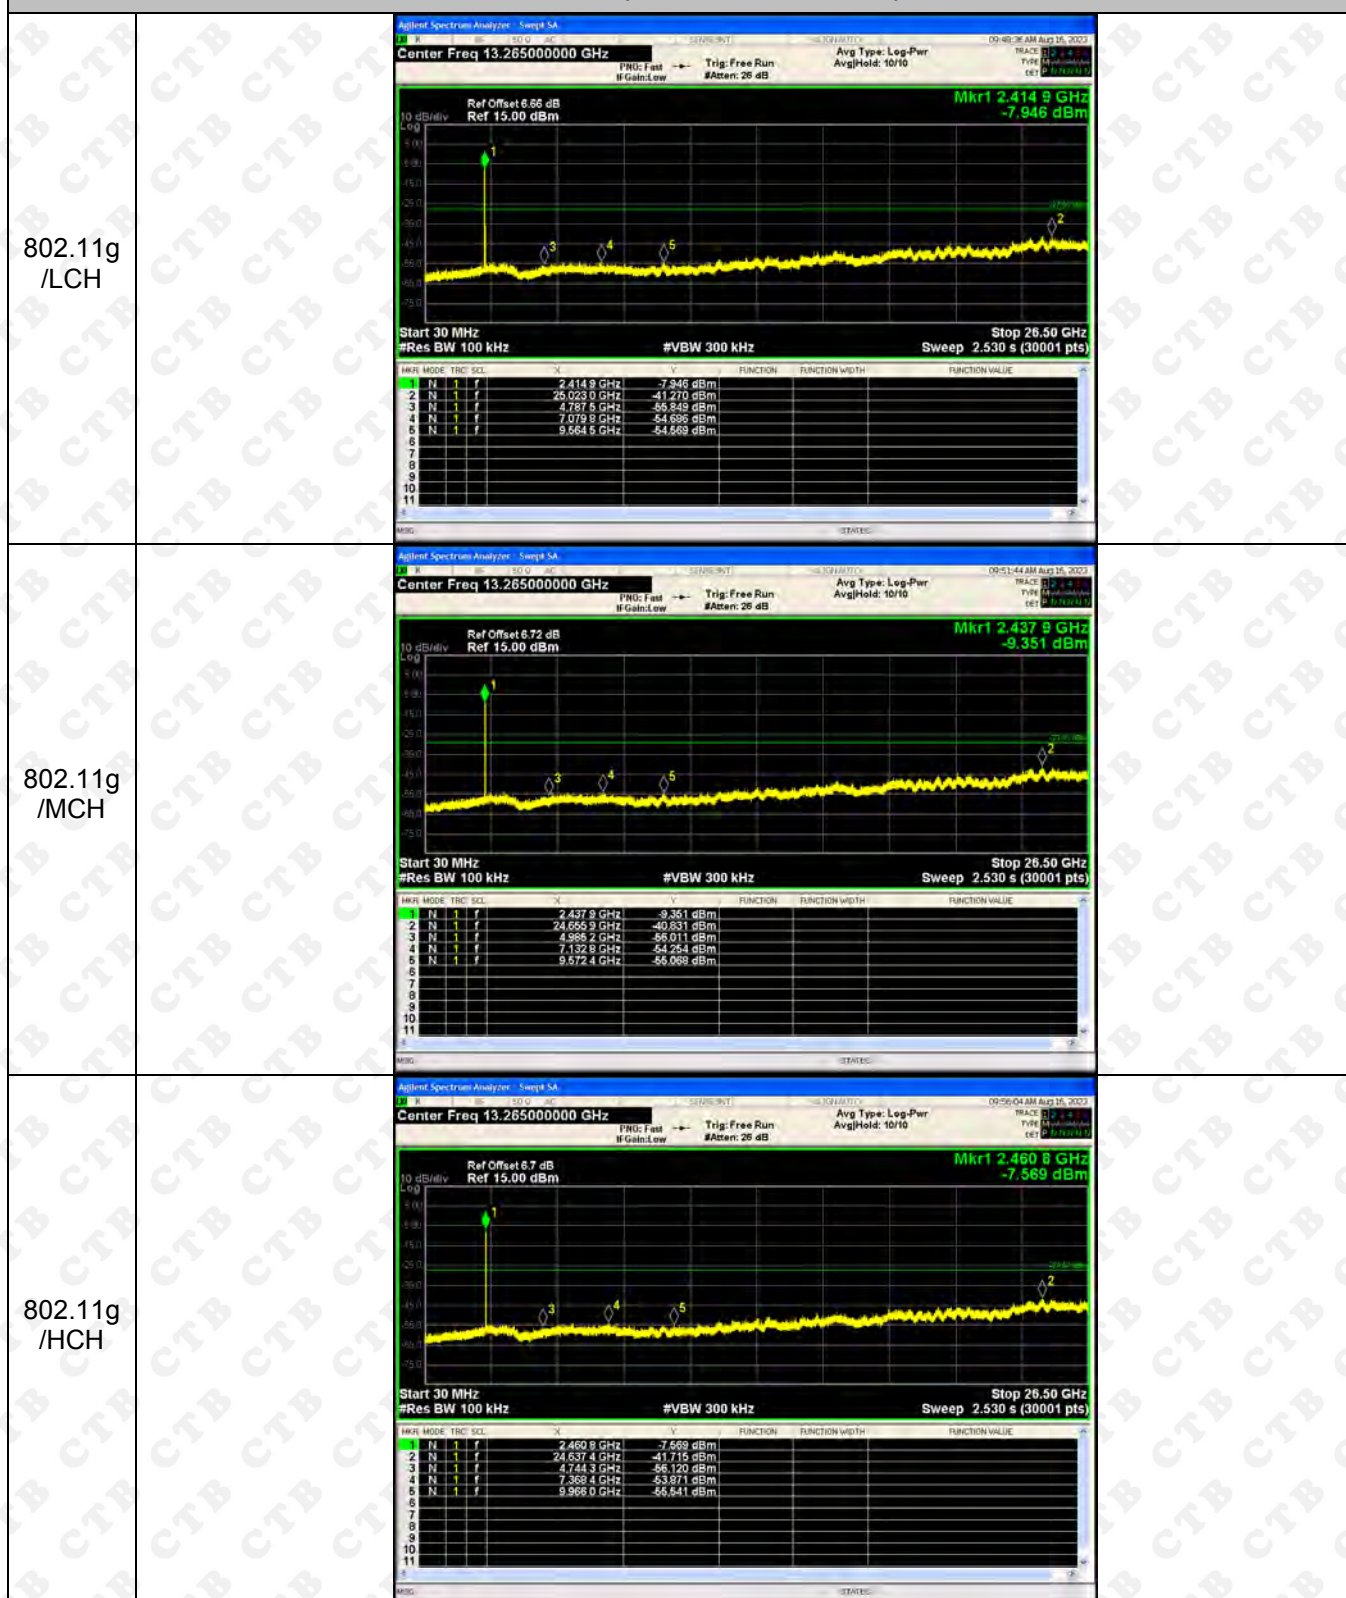




RF Conducted Spurious Emissions Graphs

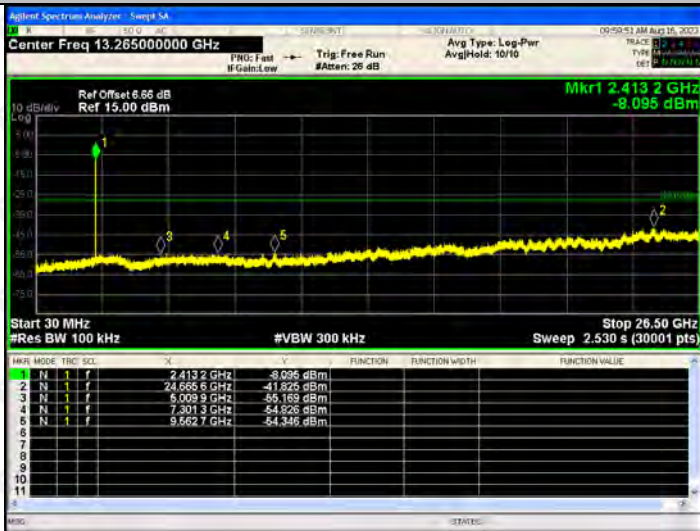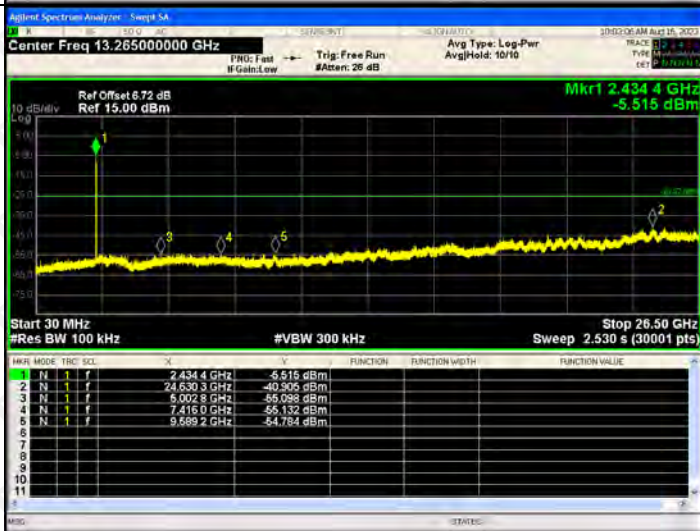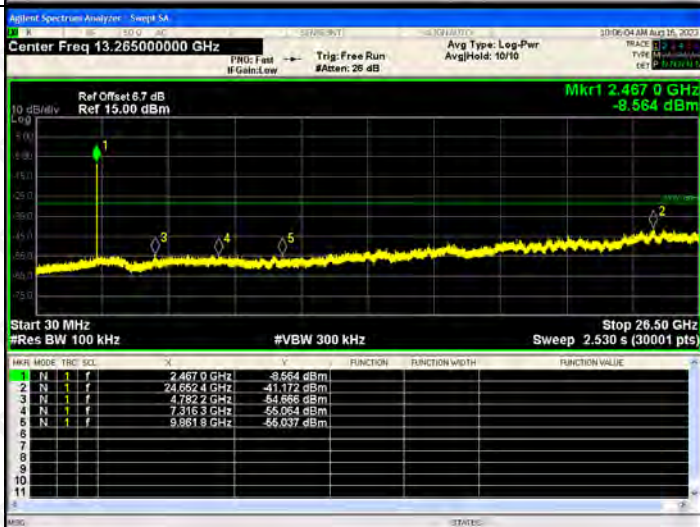802.11n (HT20)/ LCH	 <table><tr><th>Marker</th><th>Freq (GHz)</th><th>Power (dBm)</th></tr><tr><td>1</td><td>2.4132</td><td>-9.095</td></tr><tr><td>2</td><td>24.6656</td><td>-41.825</td></tr><tr><td>3</td><td>5.0028</td><td>-55.169</td></tr><tr><td>4</td><td>7.3013</td><td>-54.826</td></tr><tr><td>5</td><td>9.5627</td><td>-54.346</td></tr></table>	Marker	Freq (GHz)	Power (dBm)	1	2.4132	-9.095	2	24.6656	-41.825	3	5.0028	-55.169	4	7.3013	-54.826	5	9.5627	-54.346
Marker	Freq (GHz)	Power (dBm)																	
1	2.4132	-9.095																	
2	24.6656	-41.825																	
3	5.0028	-55.169																	
4	7.3013	-54.826																	
5	9.5627	-54.346																	
802.11 n(HT20) /MCH	 <table><tr><th>Marker</th><th>Freq (GHz)</th><th>Power (dBm)</th></tr><tr><td>1</td><td>2.4344</td><td>-5.515</td></tr><tr><td>2</td><td>24.6303</td><td>-40.305</td></tr><tr><td>3</td><td>5.0028</td><td>-55.098</td></tr><tr><td>4</td><td>7.4160</td><td>-55.132</td></tr><tr><td>5</td><td>9.5892</td><td>-54.784</td></tr></table>	Marker	Freq (GHz)	Power (dBm)	1	2.4344	-5.515	2	24.6303	-40.305	3	5.0028	-55.098	4	7.4160	-55.132	5	9.5892	-54.784
Marker	Freq (GHz)	Power (dBm)																	
1	2.4344	-5.515																	
2	24.6303	-40.305																	
3	5.0028	-55.098																	
4	7.4160	-55.132																	
5	9.5892	-54.784																	
802.11 n(HT20) /HCH	 <table><tr><th>Marker</th><th>Freq (GHz)</th><th>Power (dBm)</th></tr><tr><td>1</td><td>2.4670</td><td>-9.564</td></tr><tr><td>2</td><td>24.6624</td><td>-41.172</td></tr><tr><td>3</td><td>4.7822</td><td>-54.866</td></tr><tr><td>4</td><td>7.3163</td><td>-55.054</td></tr><tr><td>5</td><td>9.8819</td><td>-55.037</td></tr></table>	Marker	Freq (GHz)	Power (dBm)	1	2.4670	-9.564	2	24.6624	-41.172	3	4.7822	-54.866	4	7.3163	-55.054	5	9.8819	-55.037
Marker	Freq (GHz)	Power (dBm)																	
1	2.4670	-9.564																	
2	24.6624	-41.172																	
3	4.7822	-54.866																	
4	7.3163	-55.054																	
5	9.8819	-55.037																	




RF Conducted Spurious Emissions Graphs

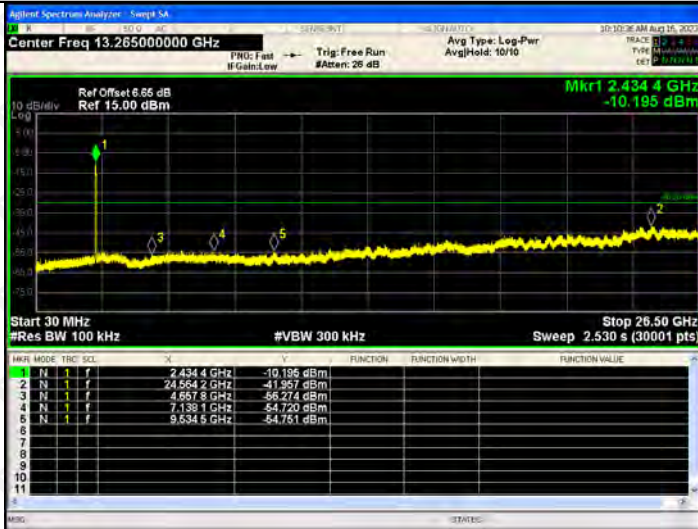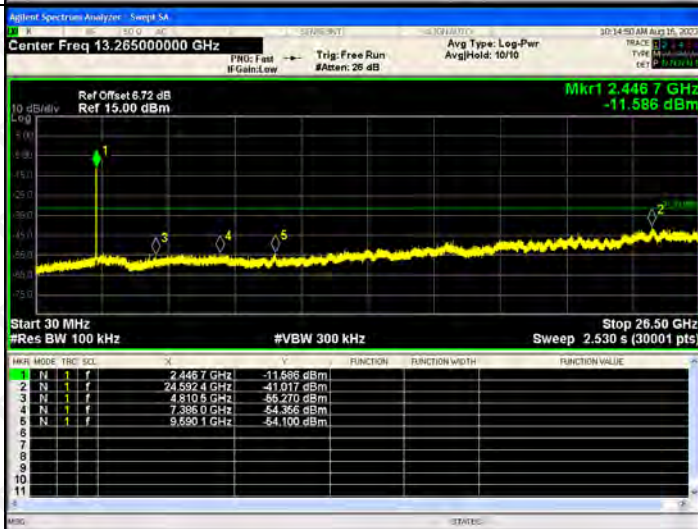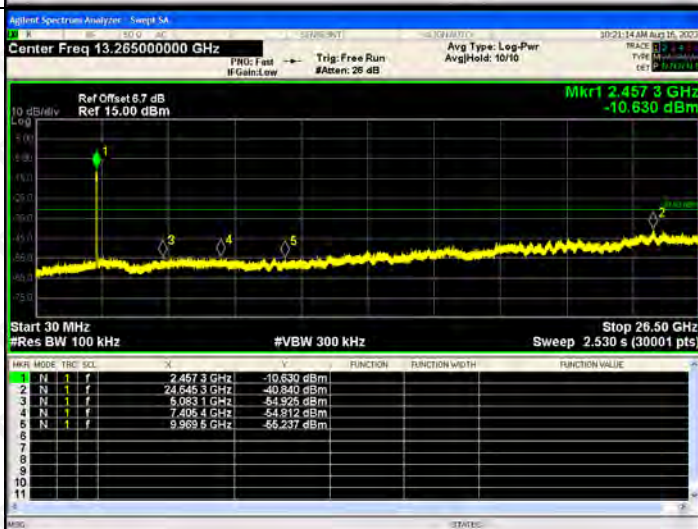802.11n (HT40)/ LCH	 <table><tr><th>Mkrs</th><th>Mode</th><th>Trig</th><th>SQL</th><th>X</th><th>Y</th><th>Function</th><th>Function Width</th><th>Function Value</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.434 4 GHz</td><td>-10.195 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.564 2 GHz</td><td>-41.957 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.557 8 GHz</td><td>-55.274 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.135 1 GHz</td><td>-54.720 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.534 5 GHz</td><td>-54.751 dBm</td><td></td><td></td><td></td></tr></table>	Mkrs	Mode	Trig	SQL	X	Y	Function	Function Width	Function Value	1	N	1	f	2.434 4 GHz	-10.195 dBm				2	N	1	f	24.564 2 GHz	-41.957 dBm				3	N	1	f	4.557 8 GHz	-55.274 dBm				4	N	1	f	7.135 1 GHz	-54.720 dBm				5	N	1	f	9.534 5 GHz	-54.751 dBm			
Mkrs	Mode	Trig	SQL	X	Y	Function	Function Width	Function Value																																															
1	N	1	f	2.434 4 GHz	-10.195 dBm																																																		
2	N	1	f	24.564 2 GHz	-41.957 dBm																																																		
3	N	1	f	4.557 8 GHz	-55.274 dBm																																																		
4	N	1	f	7.135 1 GHz	-54.720 dBm																																																		
5	N	1	f	9.534 5 GHz	-54.751 dBm																																																		
802.11 n(HT40) /MCH	 <table><tr><th>Mkrs</th><th>Mode</th><th>Trig</th><th>SQL</th><th>X</th><th>Y</th><th>Function</th><th>Function Width</th><th>Function Value</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.446 7 GHz</td><td>-11.586 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.592 4 GHz</td><td>-41.017 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.510 5 GHz</td><td>-55.270 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.385 0 GHz</td><td>-54.356 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.590 1 GHz</td><td>-54.100 dBm</td><td></td><td></td><td></td></tr></table>	Mkrs	Mode	Trig	SQL	X	Y	Function	Function Width	Function Value	1	N	1	f	2.446 7 GHz	-11.586 dBm				2	N	1	f	24.592 4 GHz	-41.017 dBm				3	N	1	f	4.510 5 GHz	-55.270 dBm				4	N	1	f	7.385 0 GHz	-54.356 dBm				5	N	1	f	9.590 1 GHz	-54.100 dBm			
Mkrs	Mode	Trig	SQL	X	Y	Function	Function Width	Function Value																																															
1	N	1	f	2.446 7 GHz	-11.586 dBm																																																		
2	N	1	f	24.592 4 GHz	-41.017 dBm																																																		
3	N	1	f	4.510 5 GHz	-55.270 dBm																																																		
4	N	1	f	7.385 0 GHz	-54.356 dBm																																																		
5	N	1	f	9.590 1 GHz	-54.100 dBm																																																		
802.11 n(HT40) /HCH	 <table><tr><th>Mkrs</th><th>Mode</th><th>Trig</th><th>SQL</th><th>X</th><th>Y</th><th>Function</th><th>Function Width</th><th>Function Value</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.457 3 GHz</td><td>-10.630 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.645 3 GHz</td><td>-40.840 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>5.083 1 GHz</td><td>-54.925 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.405 4 GHz</td><td>-54.912 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.969 5 GHz</td><td>-55.237 dBm</td><td></td><td></td><td></td></tr></table>	Mkrs	Mode	Trig	SQL	X	Y	Function	Function Width	Function Value	1	N	1	f	2.457 3 GHz	-10.630 dBm				2	N	1	f	24.645 3 GHz	-40.840 dBm				3	N	1	f	5.083 1 GHz	-54.925 dBm				4	N	1	f	7.405 4 GHz	-54.912 dBm				5	N	1	f	9.969 5 GHz	-55.237 dBm			
Mkrs	Mode	Trig	SQL	X	Y	Function	Function Width	Function Value																																															
1	N	1	f	2.457 3 GHz	-10.630 dBm																																																		
2	N	1	f	24.645 3 GHz	-40.840 dBm																																																		
3	N	1	f	5.083 1 GHz	-54.925 dBm																																																		
4	N	1	f	7.405 4 GHz	-54.912 dBm																																																		
5	N	1	f	9.969 5 GHz	-55.237 dBm																																																		

RF Conducted Spurious Emissions Graphs

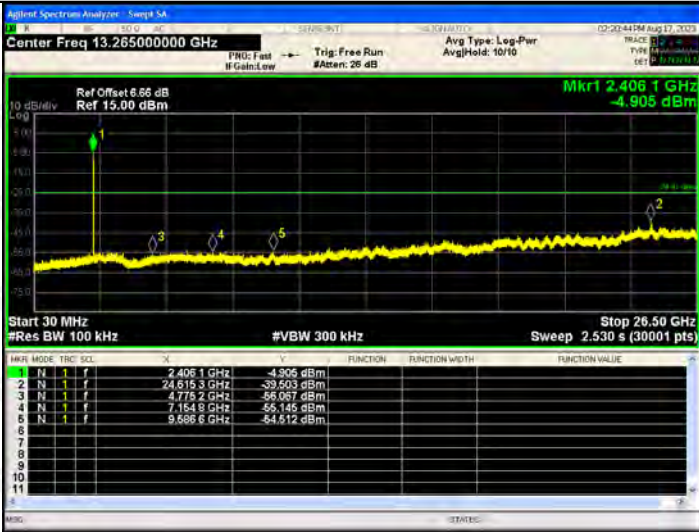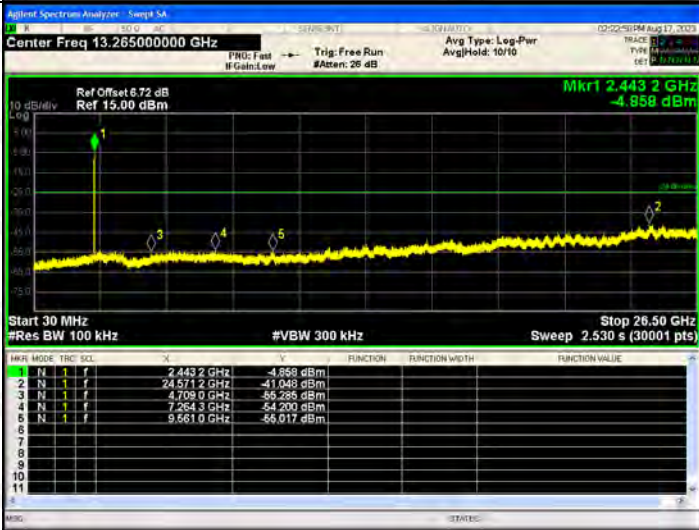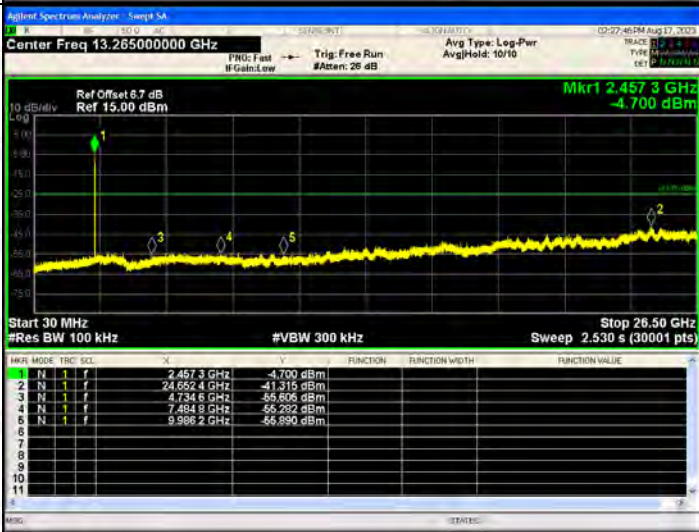802.11 ax(HT2 0)/LCH	
802.11 ax(HT2 0)/MCH	
802.11 ax(HT2 0)/HCH	

RF Conducted Spurious Emissions Graphs

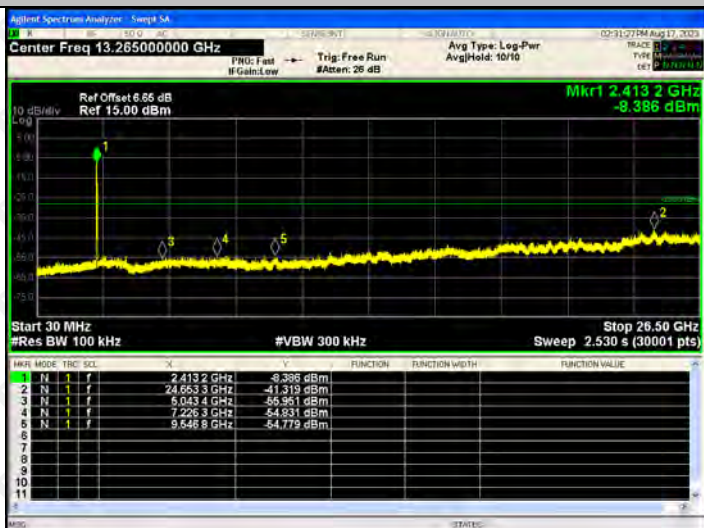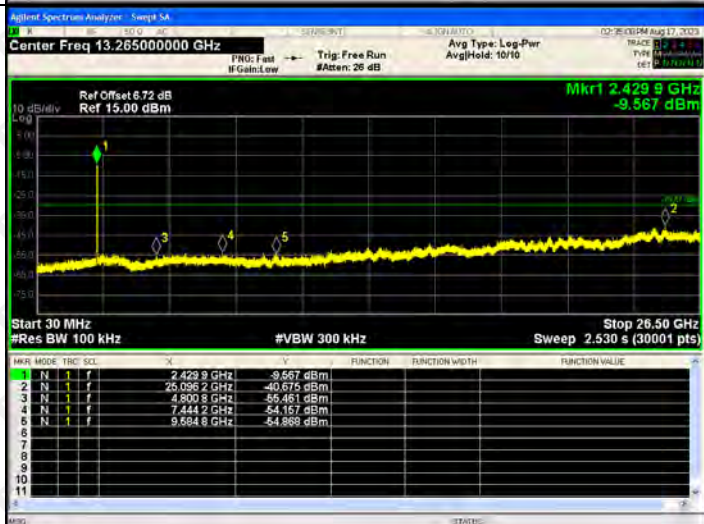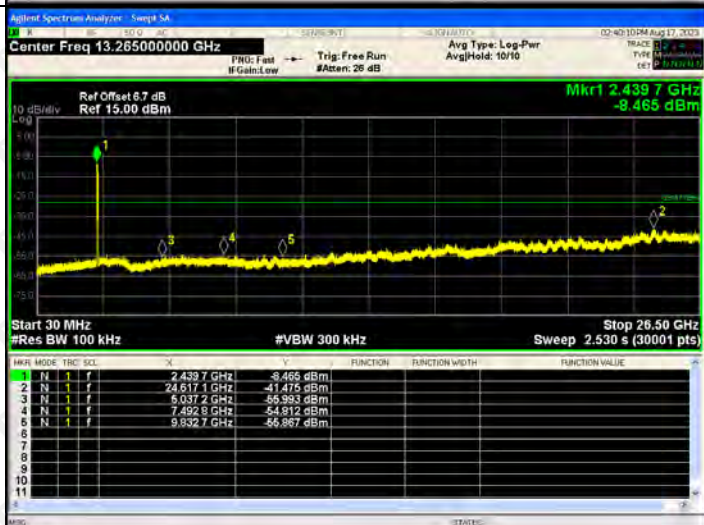
802.11
ax(HT4
0)/LCH

802.11
ax(HT4
0)/MCH

802.11
ax(HT4
0)/HCH


ANT2:

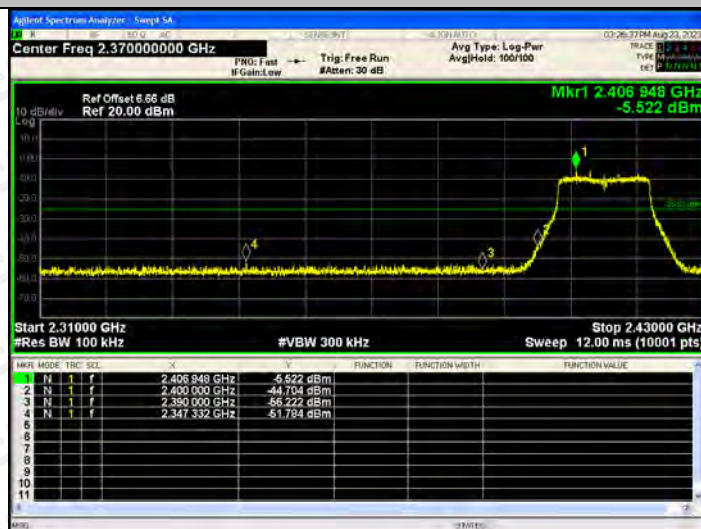


BAND EDGE Graphs

802.11g/LCH



802.11g/HCH

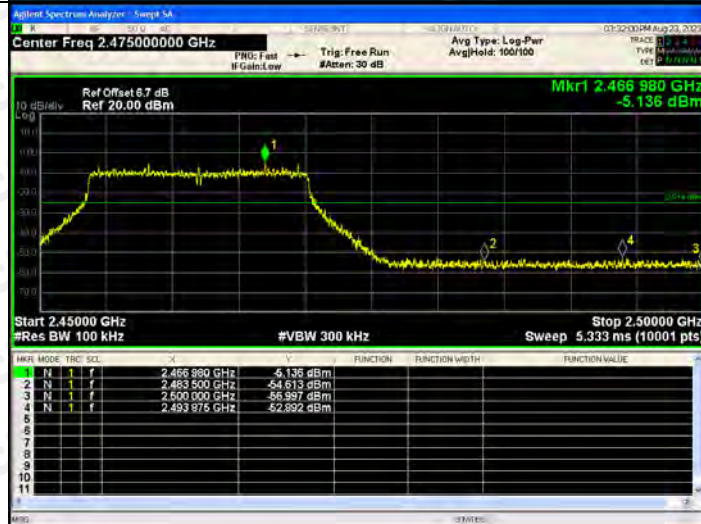

BAND EDGE Graphs

802.11n(HT20)/L
CH




802.11n(HT20)/H
CH




BAND EDGE Graphs

802.11n(HT40)/L
CH

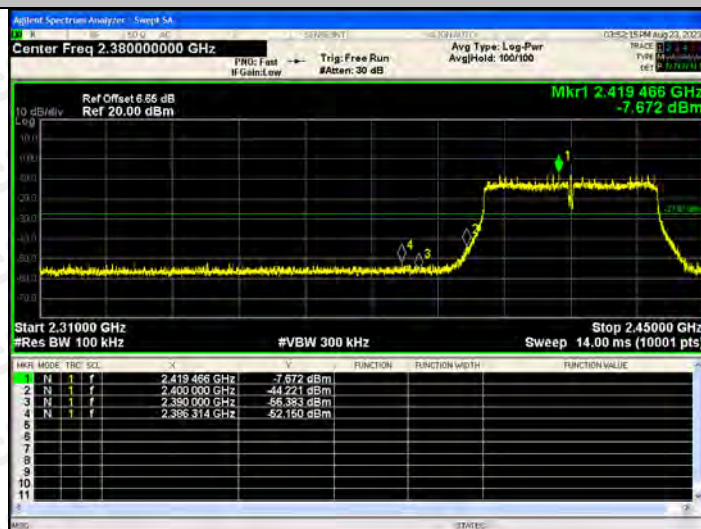


802.11n(HT40)/H
CH

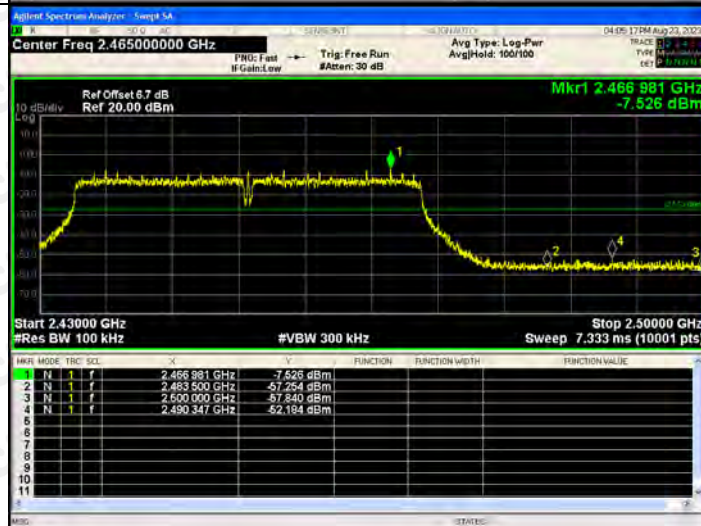


BAND EDGE Graphs

802.11ax(HT20)/
LCH

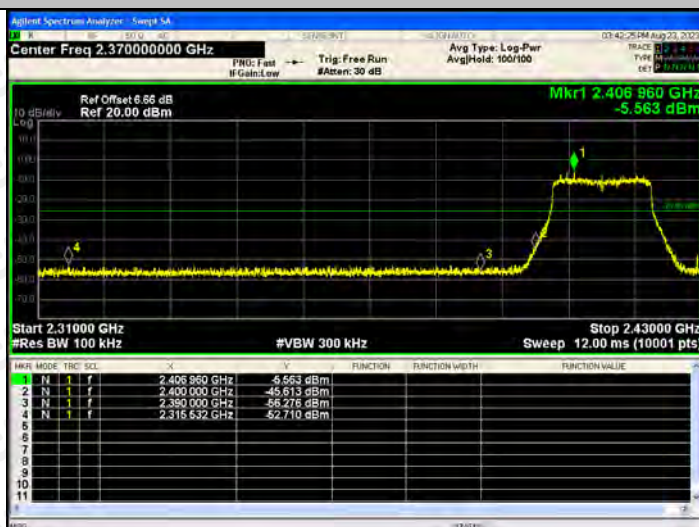


802.11ax(HT20)/
HCH

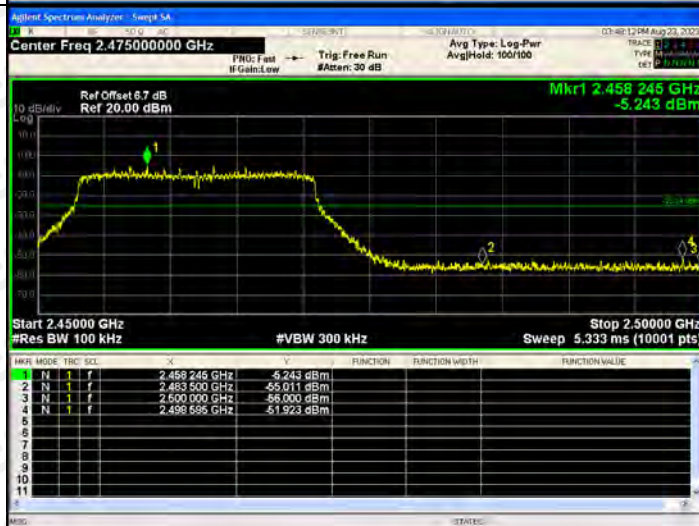

BAND EDGE Graphs


802.11ax(HT40)/
LCH

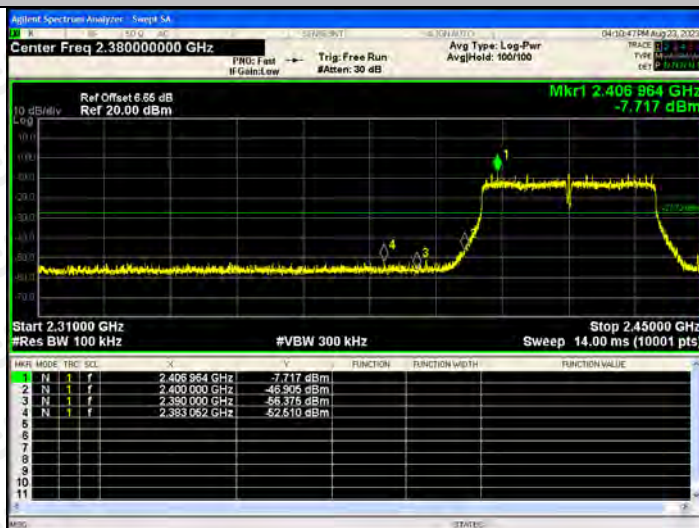


802.11ax(HT40)/
HCH






RF Conducted Spurious Emissions Graphs

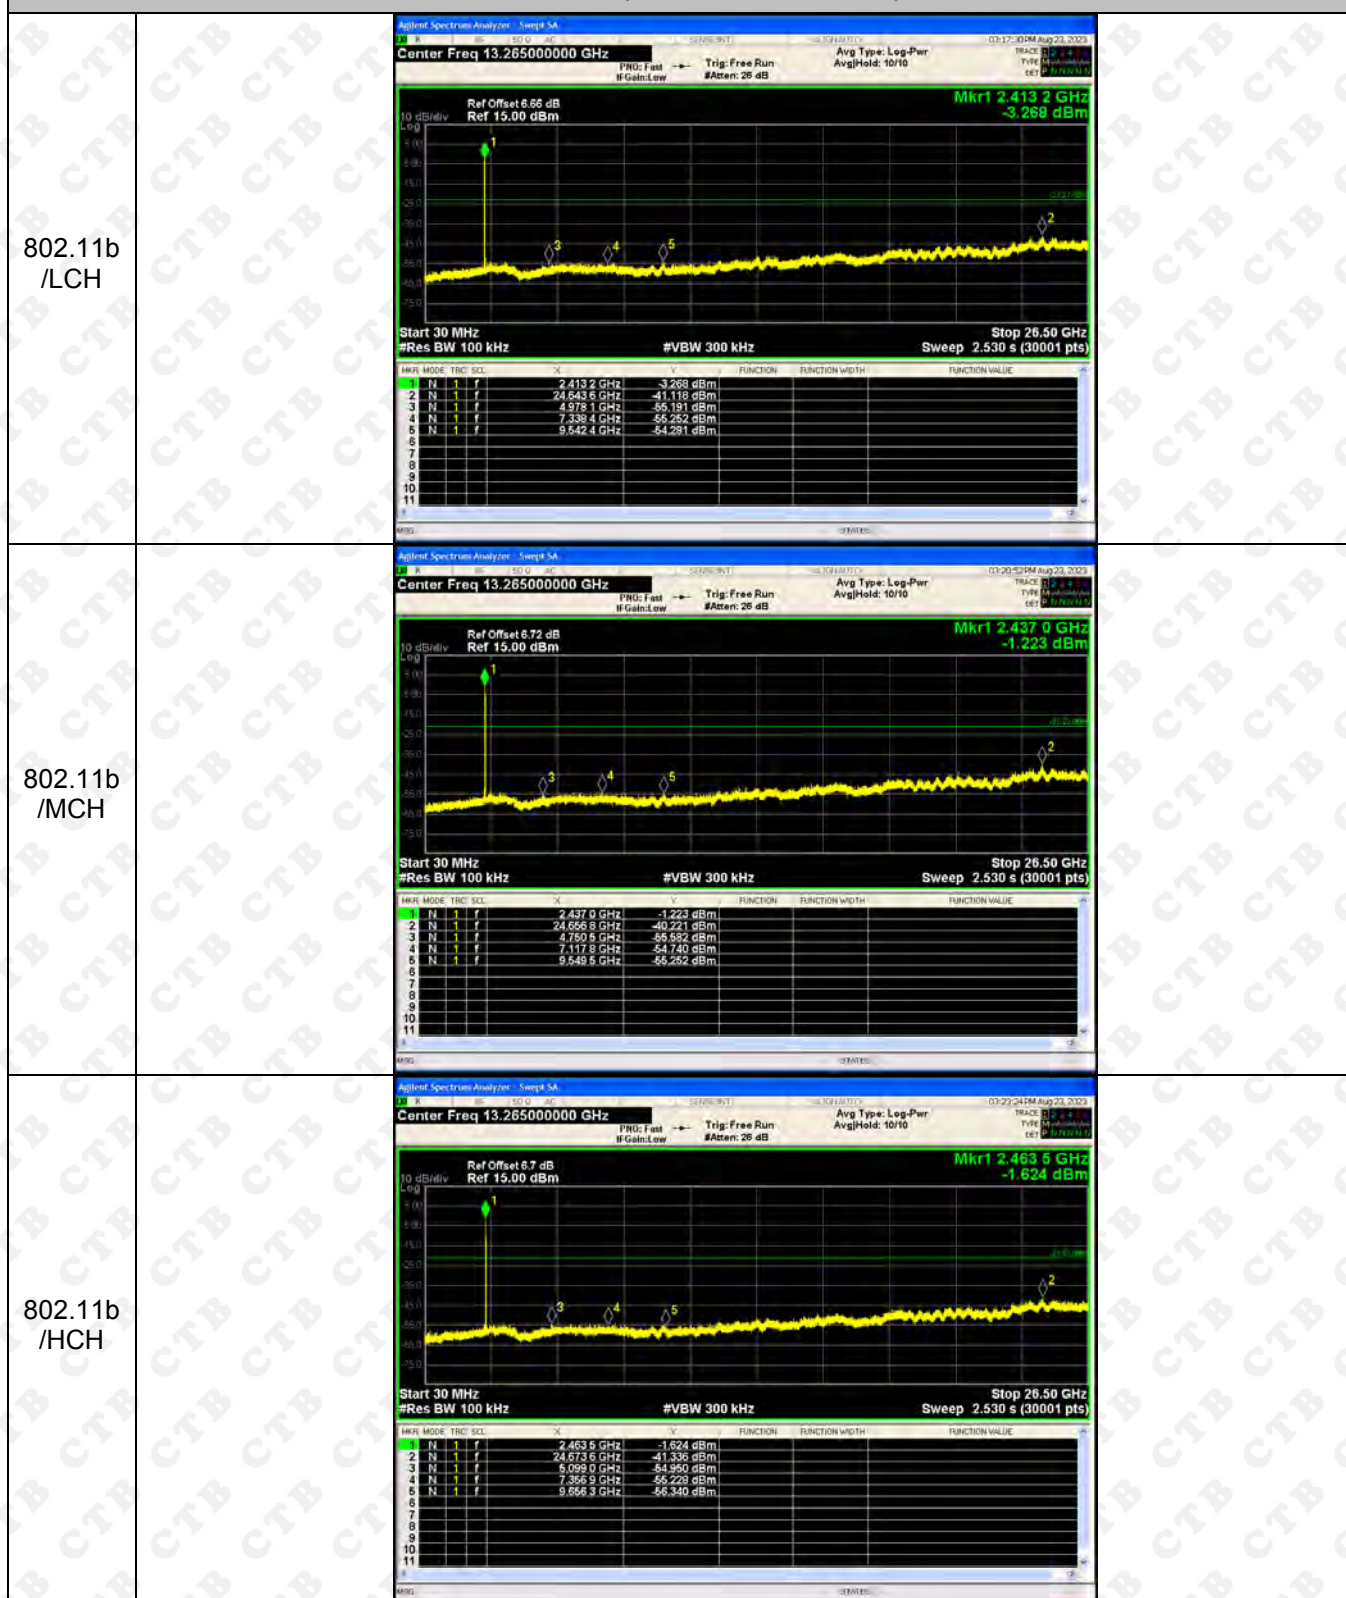




RF Conducted Spurious Emissions Graphs

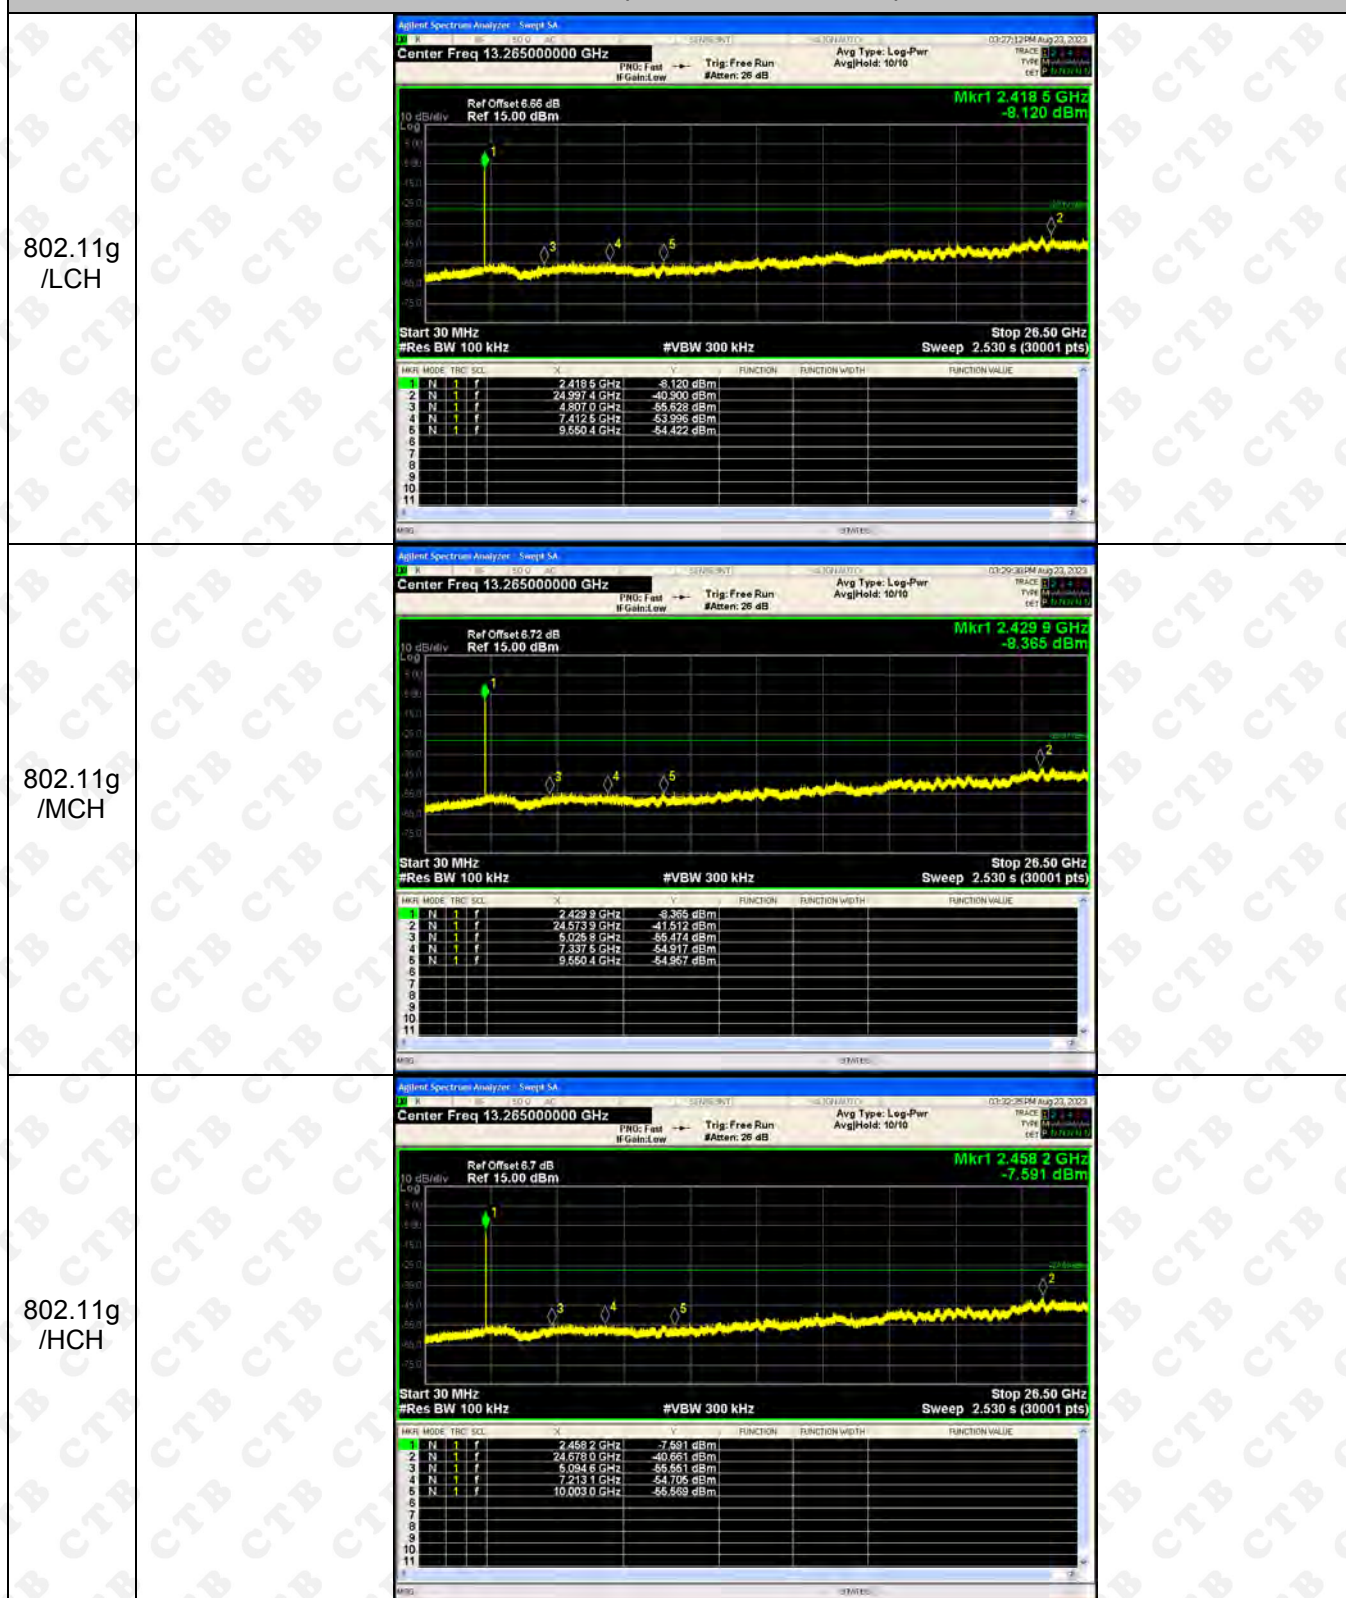




RF Conducted Spurious Emissions Graphs

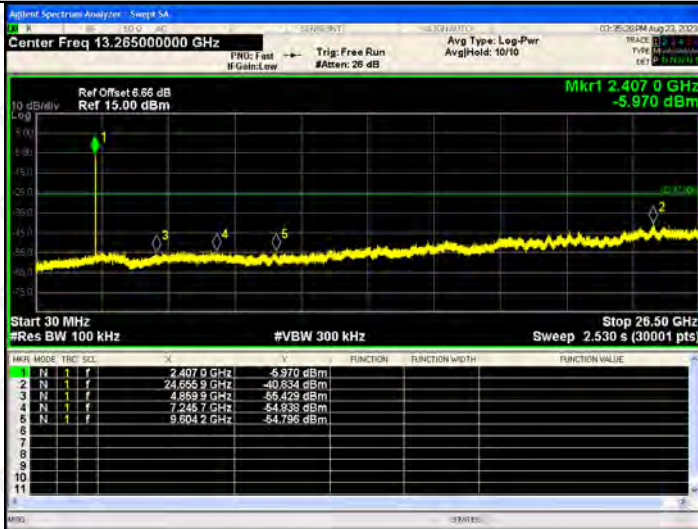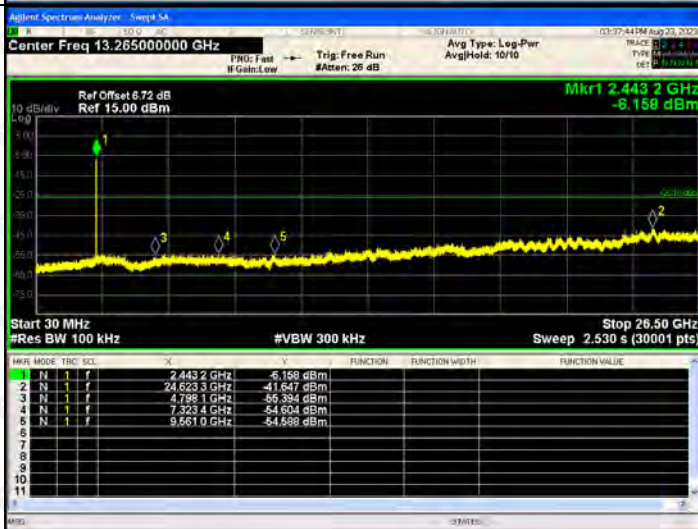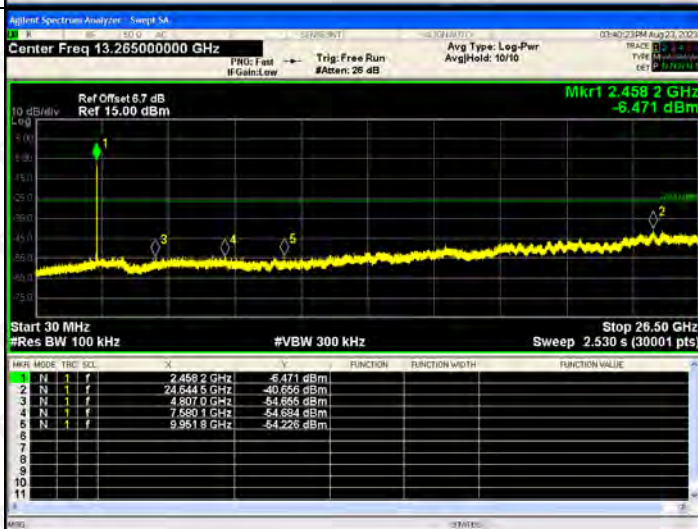802.11n (HT20)/ LCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 6.65 dB Ref 15.00 dBm Mkr1 2.407 0 GHz -5.970 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MKR</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.407 0 GHz</td><td>-5.970 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.655 9 GHz</td><td>-40.834 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.659 9 GHz</td><td>-56.423 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.245 7 GHz</td><td>-54.938 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.604 2 GHz</td><td>-54.796 dBm</td><td></td><td></td><td></td></tr></table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.407 0 GHz	-5.970 dBm				2	N	1	f	24.655 9 GHz	-40.834 dBm				3	N	1	f	4.659 9 GHz	-56.423 dBm				4	N	1	f	7.245 7 GHz	-54.938 dBm				5	N	1	f	9.604 2 GHz	-54.796 dBm			
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.407 0 GHz	-5.970 dBm																																																		
2	N	1	f	24.655 9 GHz	-40.834 dBm																																																		
3	N	1	f	4.659 9 GHz	-56.423 dBm																																																		
4	N	1	f	7.245 7 GHz	-54.938 dBm																																																		
5	N	1	f	9.604 2 GHz	-54.796 dBm																																																		
802.11 n(HT20) /MCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 6.72 dB Ref 15.00 dBm Mkr1 2.443 2 GHz -6.158 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MKR</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.443 2 GHz</td><td>-6.158 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.623 3 GHz</td><td>-41.647 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.795 1 GHz</td><td>-56.394 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.323 4 GHz</td><td>-54.904 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.661 0 GHz</td><td>-54.588 dBm</td><td></td><td></td><td></td></tr></table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.443 2 GHz	-6.158 dBm				2	N	1	f	24.623 3 GHz	-41.647 dBm				3	N	1	f	4.795 1 GHz	-56.394 dBm				4	N	1	f	7.323 4 GHz	-54.904 dBm				5	N	1	f	9.661 0 GHz	-54.588 dBm			
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.443 2 GHz	-6.158 dBm																																																		
2	N	1	f	24.623 3 GHz	-41.647 dBm																																																		
3	N	1	f	4.795 1 GHz	-56.394 dBm																																																		
4	N	1	f	7.323 4 GHz	-54.904 dBm																																																		
5	N	1	f	9.661 0 GHz	-54.588 dBm																																																		
802.11 n(HT20) /HCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 6.7 dB Ref 15.00 dBm Mkr1 2.458 2 GHz -6.471 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MKR</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.458 2 GHz</td><td>-6.471 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.644 5 GHz</td><td>-40.656 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.807 0 GHz</td><td>-54.885 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.580 1 GHz</td><td>-54.684 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.951 9 GHz</td><td>-54.226 dBm</td><td></td><td></td><td></td></tr></table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.458 2 GHz	-6.471 dBm				2	N	1	f	24.644 5 GHz	-40.656 dBm				3	N	1	f	4.807 0 GHz	-54.885 dBm				4	N	1	f	7.580 1 GHz	-54.684 dBm				5	N	1	f	9.951 9 GHz	-54.226 dBm			
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.458 2 GHz	-6.471 dBm																																																		
2	N	1	f	24.644 5 GHz	-40.656 dBm																																																		
3	N	1	f	4.807 0 GHz	-54.885 dBm																																																		
4	N	1	f	7.580 1 GHz	-54.684 dBm																																																		
5	N	1	f	9.951 9 GHz	-54.226 dBm																																																		




RF Conducted Spurious Emissions Graphs

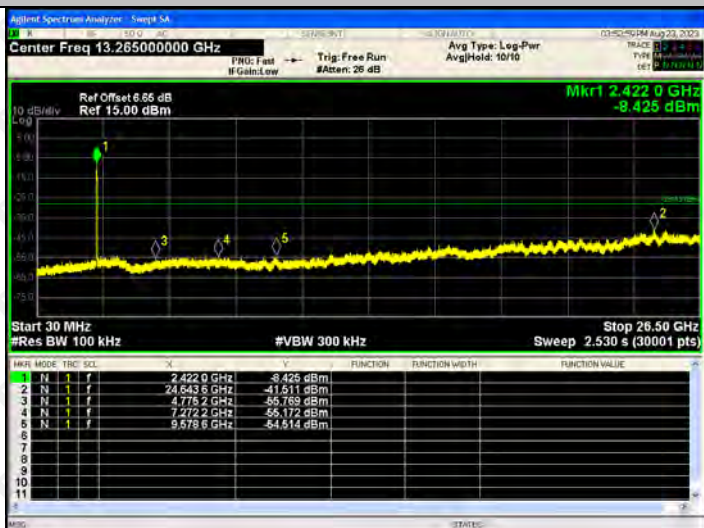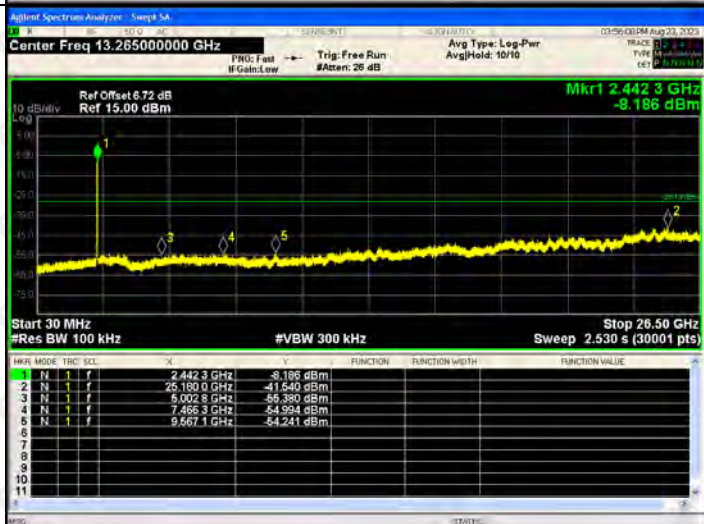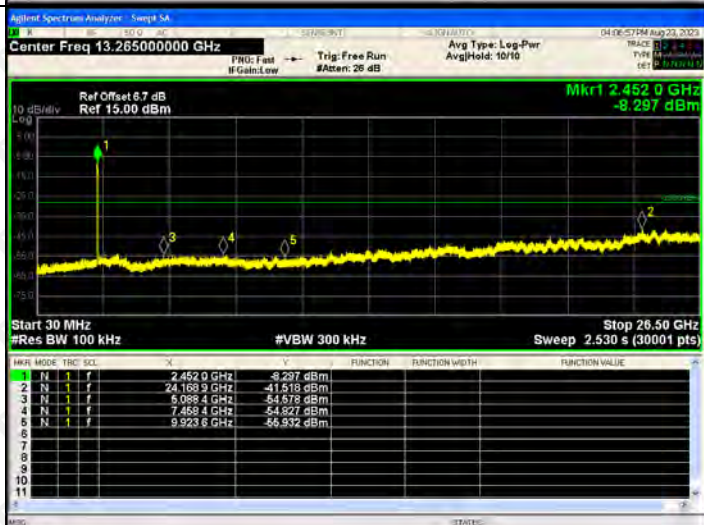802.11n
(HT40)/
LCH

802.11
n(HT40)
/MCH

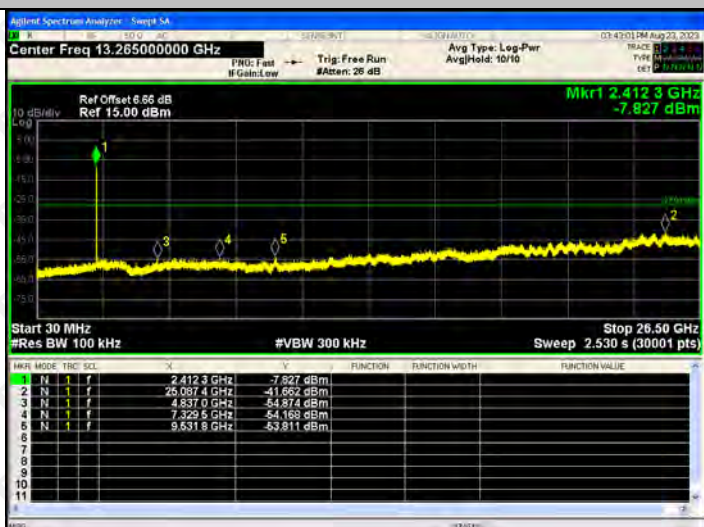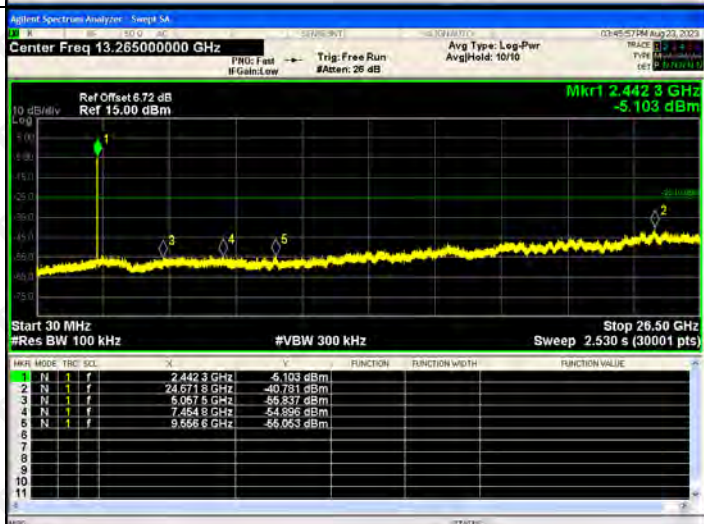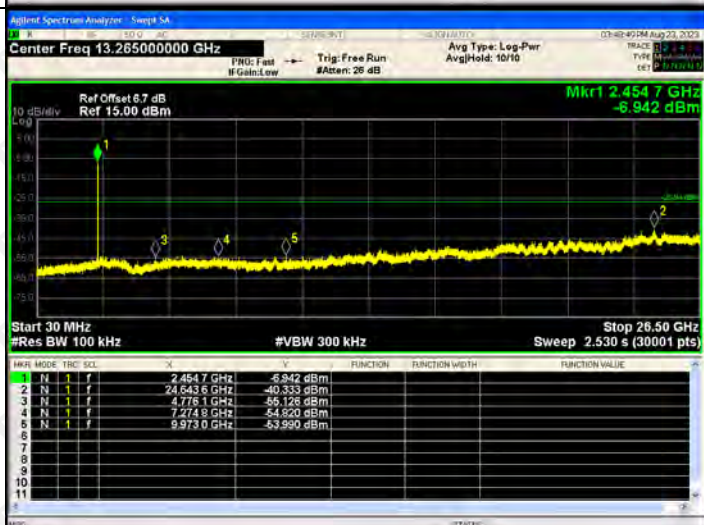802.11
n(HT40)
/HCH


RF Conducted Spurious Emissions Graphs

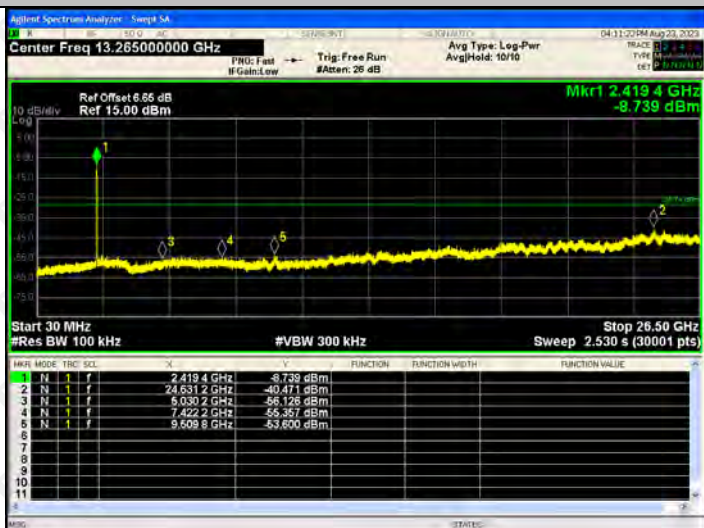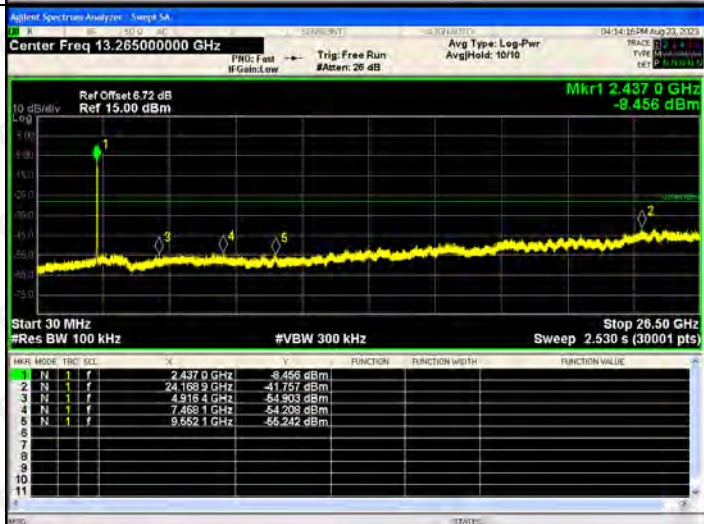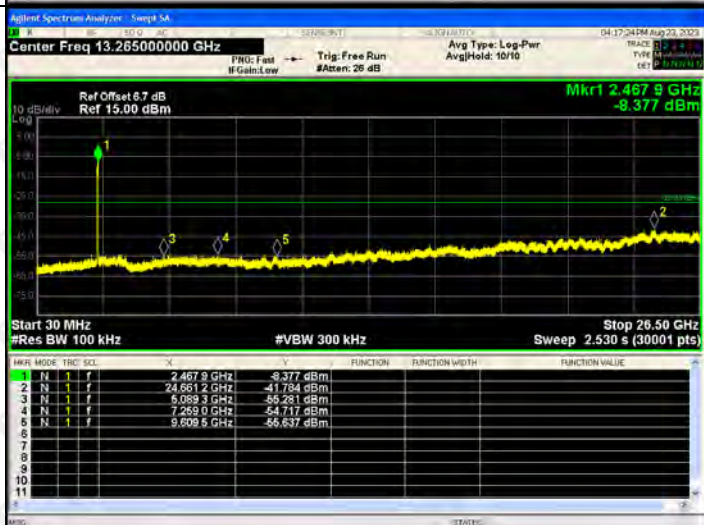
802.11
ax(HT2
0)/LCH

802.11
ax(HT2
0)/MCH

802.11
ax(HT2
0)/HCH


RF Conducted Spurious Emissions Graphs

802.11
ax(HT4
0)/LCH

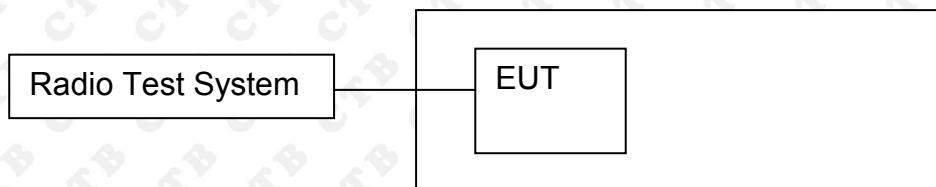802.11
ax(HT4
0)/MCH

802.11
ax(HT4
0)/HCH


9. COUDUCTED OUTPUT POWER

9.1 Block Diagram Of Test Setup



9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

9.3 Test procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1MHz. VBW = 3MHz. Sweep = auto; Detector Function = Peak. Channel power function is used
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.

9.4 Test Result

Mode	Channel.	Maximum Peak Power [dBm] ant 1	Maximum Peak Power [dBm] ant 2	Total Power Peak Output Power(dBm)	Limit[dBm]
802.11b	LCH	14.421	14.218	/	30
	MCH	14.915	14.212	/	30
	HCH	14.375	14.098	/	30
802.11g	LCH	13.655	13.246	/	30
	MCH	13.32	13.73	/	30
	HCH	13.412	13.312	/	30
802.11n(HT20)	LCH	13.579	13.536	16.568	30
	MCH	13.33	13.296	16.323	30
	HCH	13.324	13.036	16.193	30
802.11n(HT40)	LCH	12.69	13.192	15.959	30
	MCH	12.894	13.382	16.155	30
	HCH	12.983	13.241	16.124	30
802.11ax(HT20)	LCH	13.46	13.083	16.286	30
	MCH	13.555	13.19	16.387	30
	HCH	13.509	13.756	16.645	30
802.11ax(HT40)	LCH	12.523	13.39	15.988	30
	MCH	12.691	13.358	16.048	30
	HCH	12.874	13.459	16.187	30

10. 6DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

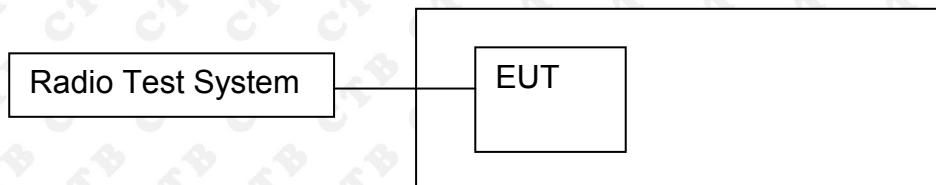

10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

10.3 Test procedure

1. Rem1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result

ANT1:

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	9.248	500	PASS
	MCH	9.354	500	PASS
	HCH	10.117	500	PASS
802.11g	LCH	16.359	500	PASS
	MCH	16.525	500	PASS
	HCH	16.337	500	PASS
802.11n(HT20)	LCH	17.551	500	PASS
	MCH	17.289	500	PASS
	HCH	17.609	500	PASS
802.11n(HT40)	LCH	35.692	500	PASS
	MCH	35.737	500	PASS
	HCH	35.878	500	PASS
802.11ax(HT20)	LCH	17.538	500	PASS
	MCH	16.921	500	PASS
	HCH	17.554	500	PASS
802.11ax(HT40)	LCH	35.231	500	PASS
	MCH	35.203	500	PASS
	HCH	35.62	500	PASS

ANT2:

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	9.67	500	PASS
	MCH	10.27	500	PASS
	HCH	9.221	500	PASS
802.11g	LCH	16.375	500	PASS
	MCH	16.36	500	PASS
	HCH	16.34	500	PASS
802.11n(HT20)	LCH	17.581	500	PASS
	MCH	17.341	500	PASS
	HCH	17.528	500	PASS
802.11n(HT40)	LCH	35.578	500	PASS
	MCH	35.831	500	PASS
	HCH	35.709	500	PASS
802.11ax(HT20)	LCH	17.125	500	PASS
	MCH	17.573	500	PASS
	HCH	17.074	500	PASS
802.11ax(HT40)	LCH	35.594	500	PASS
	MCH	35.498	500	PASS
	HCH	35.594	500	PASS

ANT1:

Test Graph:


6dB

Graphs

802.11b /LCH



802.11b /MCH

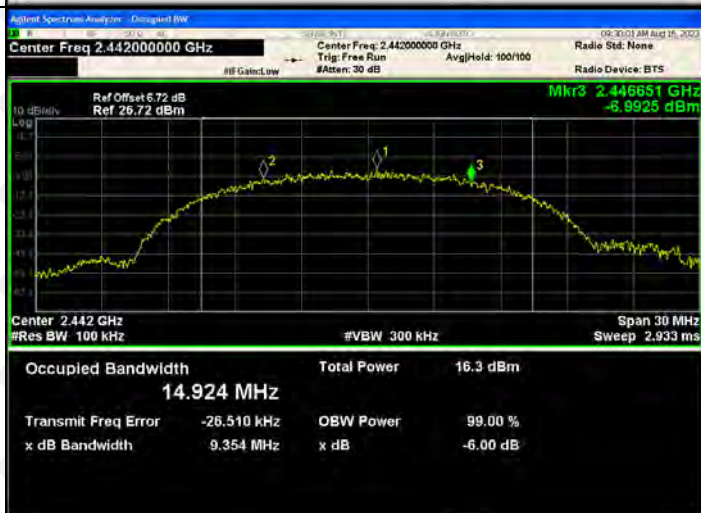


802.11b/HCH



802.11g/LCH



802.11g/MCH

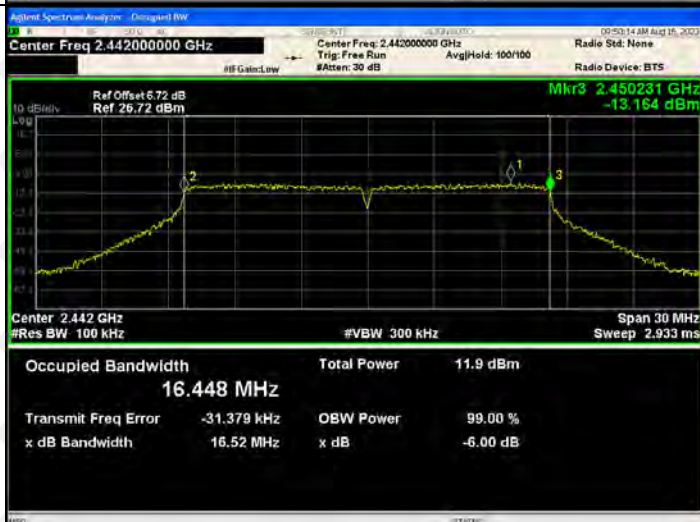

802.11g/HCH



802.11n(HT20)/LCH




802.11n(HT20)/MCH



802.11n(HT20)/HCH



802.11n(HT40)/LCH

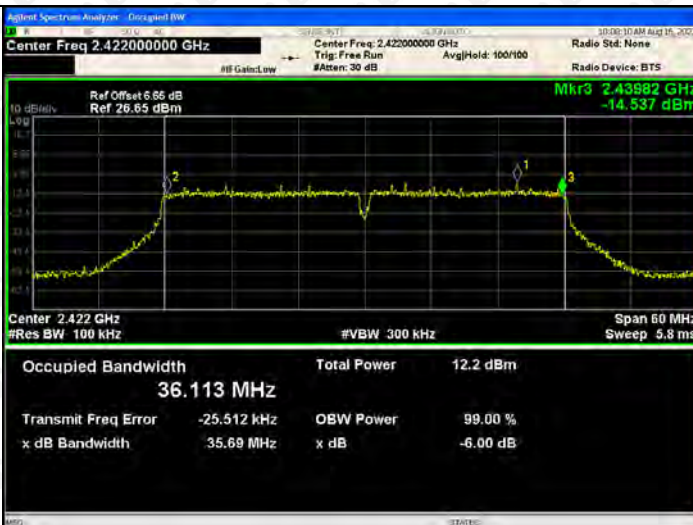


802.11n(HT40)/MCH



802.11n(HT40)/HCH



802.11ax(HT20)/LCH



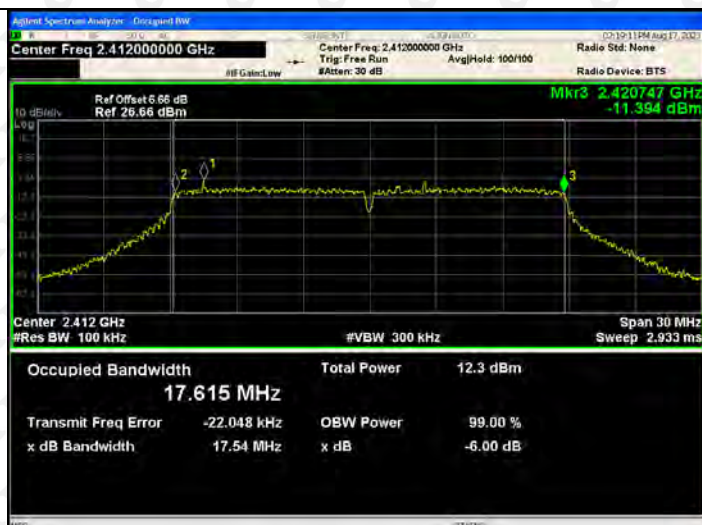


802.11ax(HT20)/MCH



802.11ax(HT20)/HCH

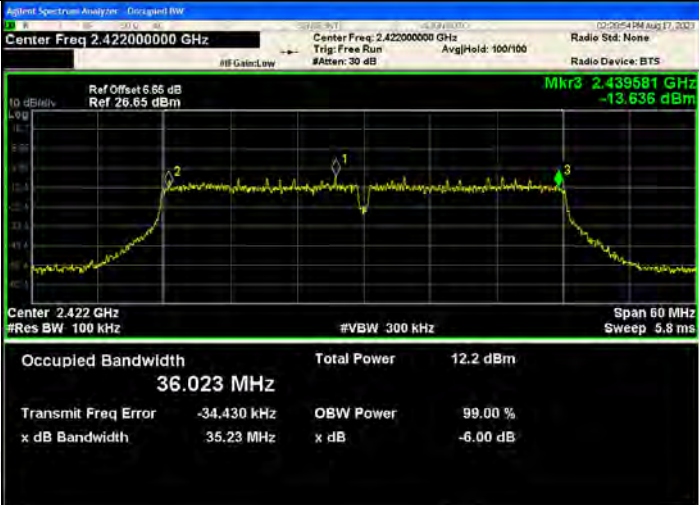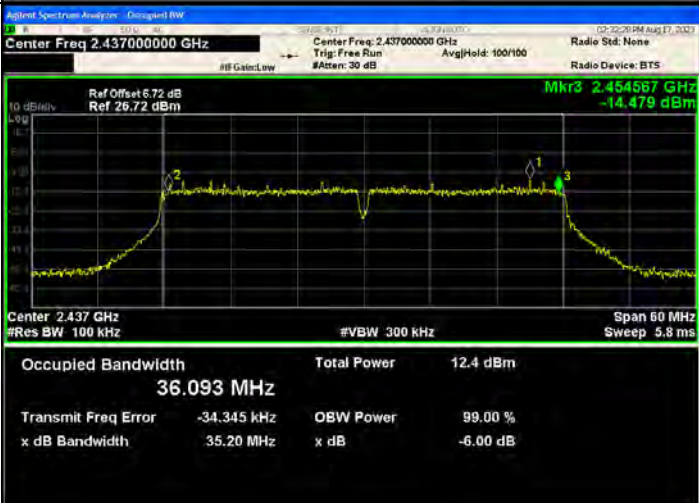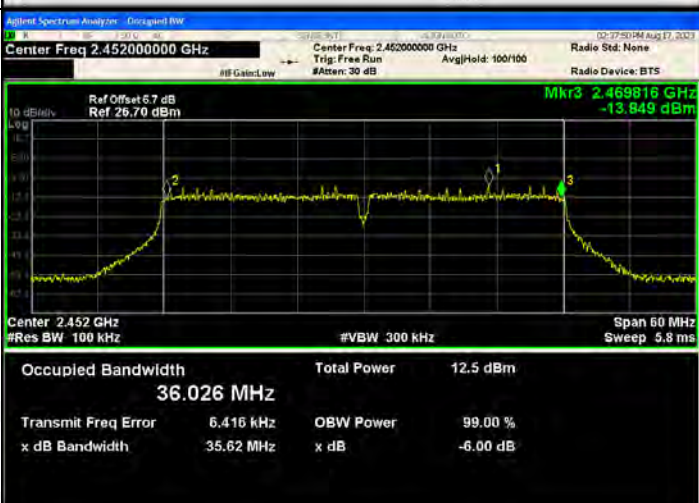

802.11ax(HT40)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.422000000 GHz Ref Offset 6.66 dB Ref 26.65 dBm Mkr3 2.439581 GHz -13.636 dBm Center 2.422 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 36.023 MHz Total Power 12.2 dBm Transmit Freq Error -34.430 kHz OBW Power 99.00 % x dB Bandwidth 35.23 MHz x dB -6.00 dB
802.11ax(HT40)/M CH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.437000000 GHz Ref Offset 6.72 dB Ref 26.72 dBm Mkr3 2.454567 GHz -14.479 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 36.093 MHz Total Power 12.4 dBm Transmit Freq Error -34.345 kHz OBW Power 99.00 % x dB Bandwidth 35.20 MHz x dB -6.00 dB
802.11ax(HT40)/H CH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.452000000 GHz Ref Offset 6.7 dB Ref 26.70 dBm Mkr3 2.469816 GHz -13.849 dBm Center 2.452 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 36.026 MHz Total Power 12.5 dBm Transmit Freq Error 6.416 kHz OBW Power 99.00 % x dB Bandwidth 35.62 MHz x dB -6.00 dB

ANT2:

Test Graph:


6dB

Graphs

802.11b /LCH




802.11b /MCH

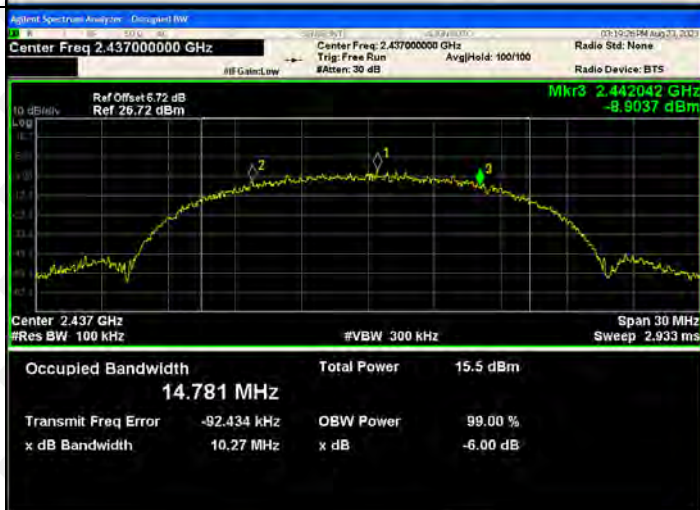

802.11b/HCH




802.11g/LCH

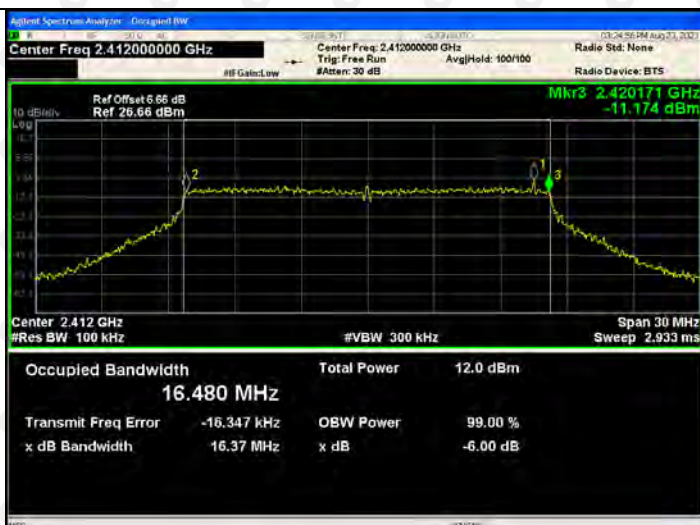

802.11g/MCH




802.11g/HCH

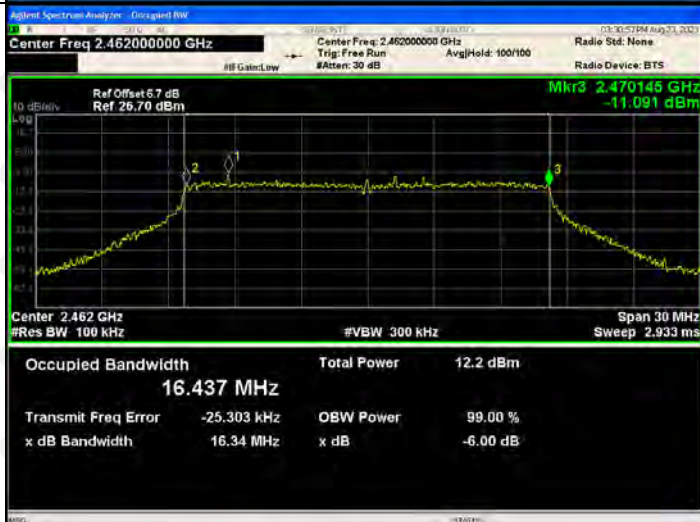

802.11n(HT20)/LCH




802.11n(HT20)/MCH

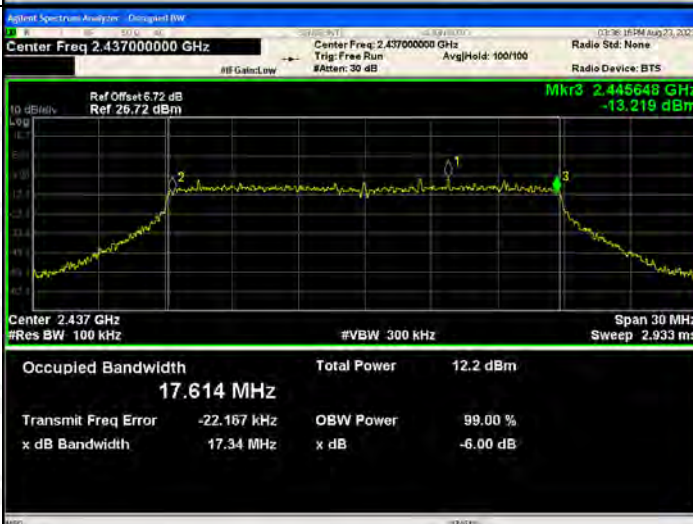

802.11n(HT20)/HCH



802.11n(HT40)/LCH

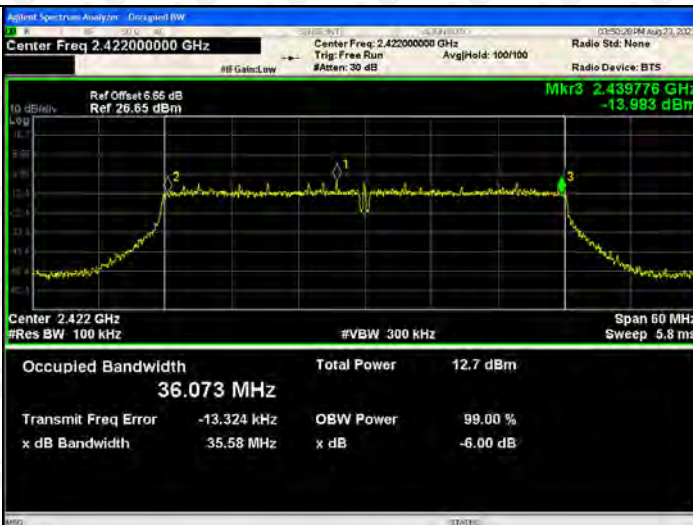

802.11n(HT40)/MCH




802.11n(HT40)/HCH



802.11ax(HT20)/LCH





802.11ax(HT20)/MCH

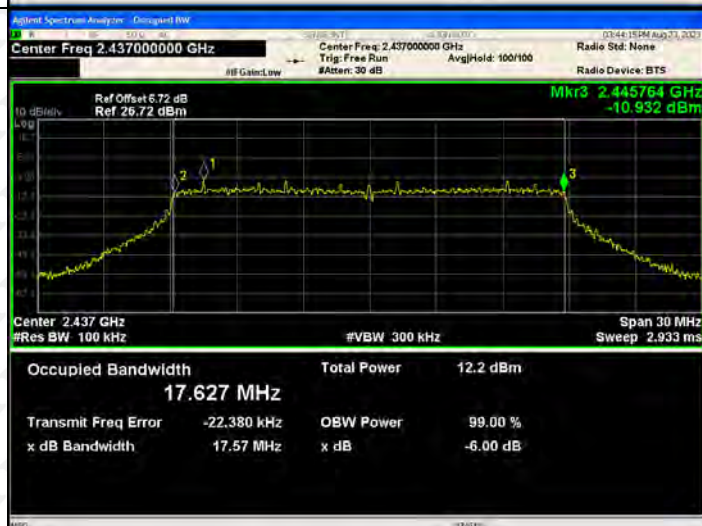


802.11ax(HT20)/HCH

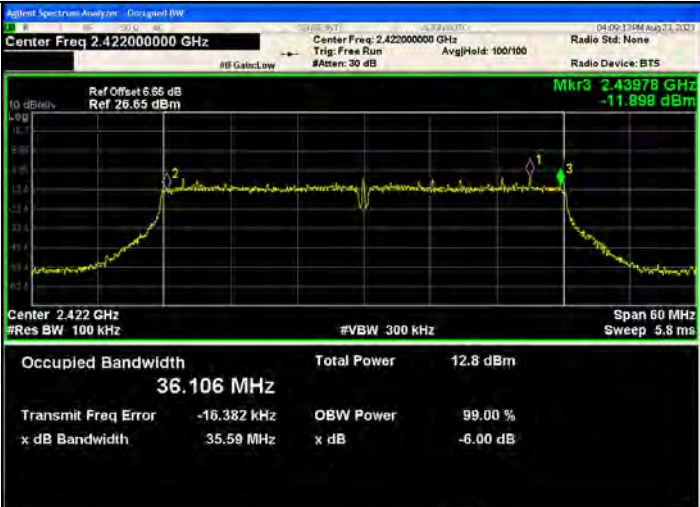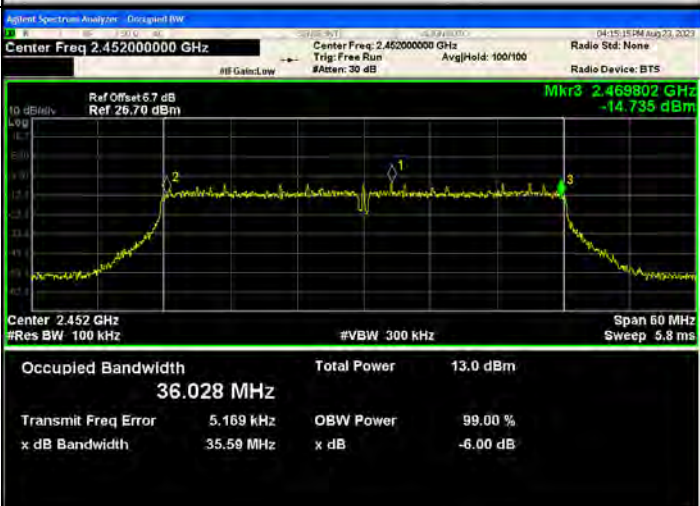

802.11ax(HT40)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.422000000 GHz Ref Offset 6.66 dB Ref 26.65 dBm Mkr3 2.43978 GHz -11.898 dBm Center 2.422 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 36.106 MHz Total Power 12.8 dBm Transmit Freq Error -16.382 kHz OBW Power 99.00 % x dB Bandwidth 35.59 MHz x dB -6.00 dB
802.11ax(HT40)/M CH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.437000000 GHz Ref Offset 6.72 dB Ref 26.72 dBm Mkr3 2.454734 GHz -13.468 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 36.095 MHz Total Power 12.9 dBm Transmit Freq Error -14.340 kHz OBW Power 99.00 % x dB Bandwidth 35.50 MHz x dB -6.00 dB
802.11ax(HT40)/H CH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.452000000 GHz Ref Offset 6.7 dB Ref 26.70 dBm Mkr3 2.469802 GHz -14.735 dBm Center 2.452 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 36.028 MHz Total Power 13.0 dBm Transmit Freq Error 5.169 kHz OBW Power 99.00 % x dB Bandwidth 35.59 MHz x dB -6.00 dB

11. POWER SPECTRAL DENSITY

11.1 Block Diagram Of Test Setup

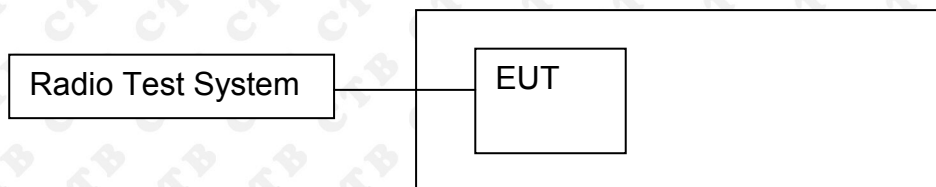

11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

11.3 Test procedure


1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = Peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

11.4 Test Result


Mode	Channel.	Power Spectral Density [dBm /3KHz] ANT 1	Power Spectral Density [dBm /3KHz] ANT 2	Power Spectral Density [dBm /3KHz] Total	Limit(dBm)
802.11b	LCH	-15.69	-13.242	/	8
	MCH	-14.339	-13.246	/	8
	HCH	-14.545	-13.17	/	8
802.11g	LCH	-18.089	-9.443	/	8
	MCH	-22.358	-9.303	/	8
	HCH	-19.16	-9.318	/	8
802.11n(H T20)	LCH	-18.916	-9.492	-9.022	8
	MCH	-19.096	-9.304	-8.871	8
	HCH	-19.479	-9.318	-8.918	8
802.11n(H T40)	LCH	-23.001	-9.254	-9.074	8
	MCH	-21.952	-9.132	-8.911	8
	HCH	-22.298	-9.027	-8.827	8
802.11ax(HT20)	LCH	-18.986	-9.505	-9.041	8
	MCH	-19.159	-9.318	-8.889	8
	HCH	-19.004	-9.29	-8.849	8
802.11ax(HT40)	LCH	-22.946	-9.304	-9.120	8
	MCH	-22.738	-9.08	-8.897	8
	HCH	-22.453	-8.979	-8.788	8

ANT1:


Test Graph

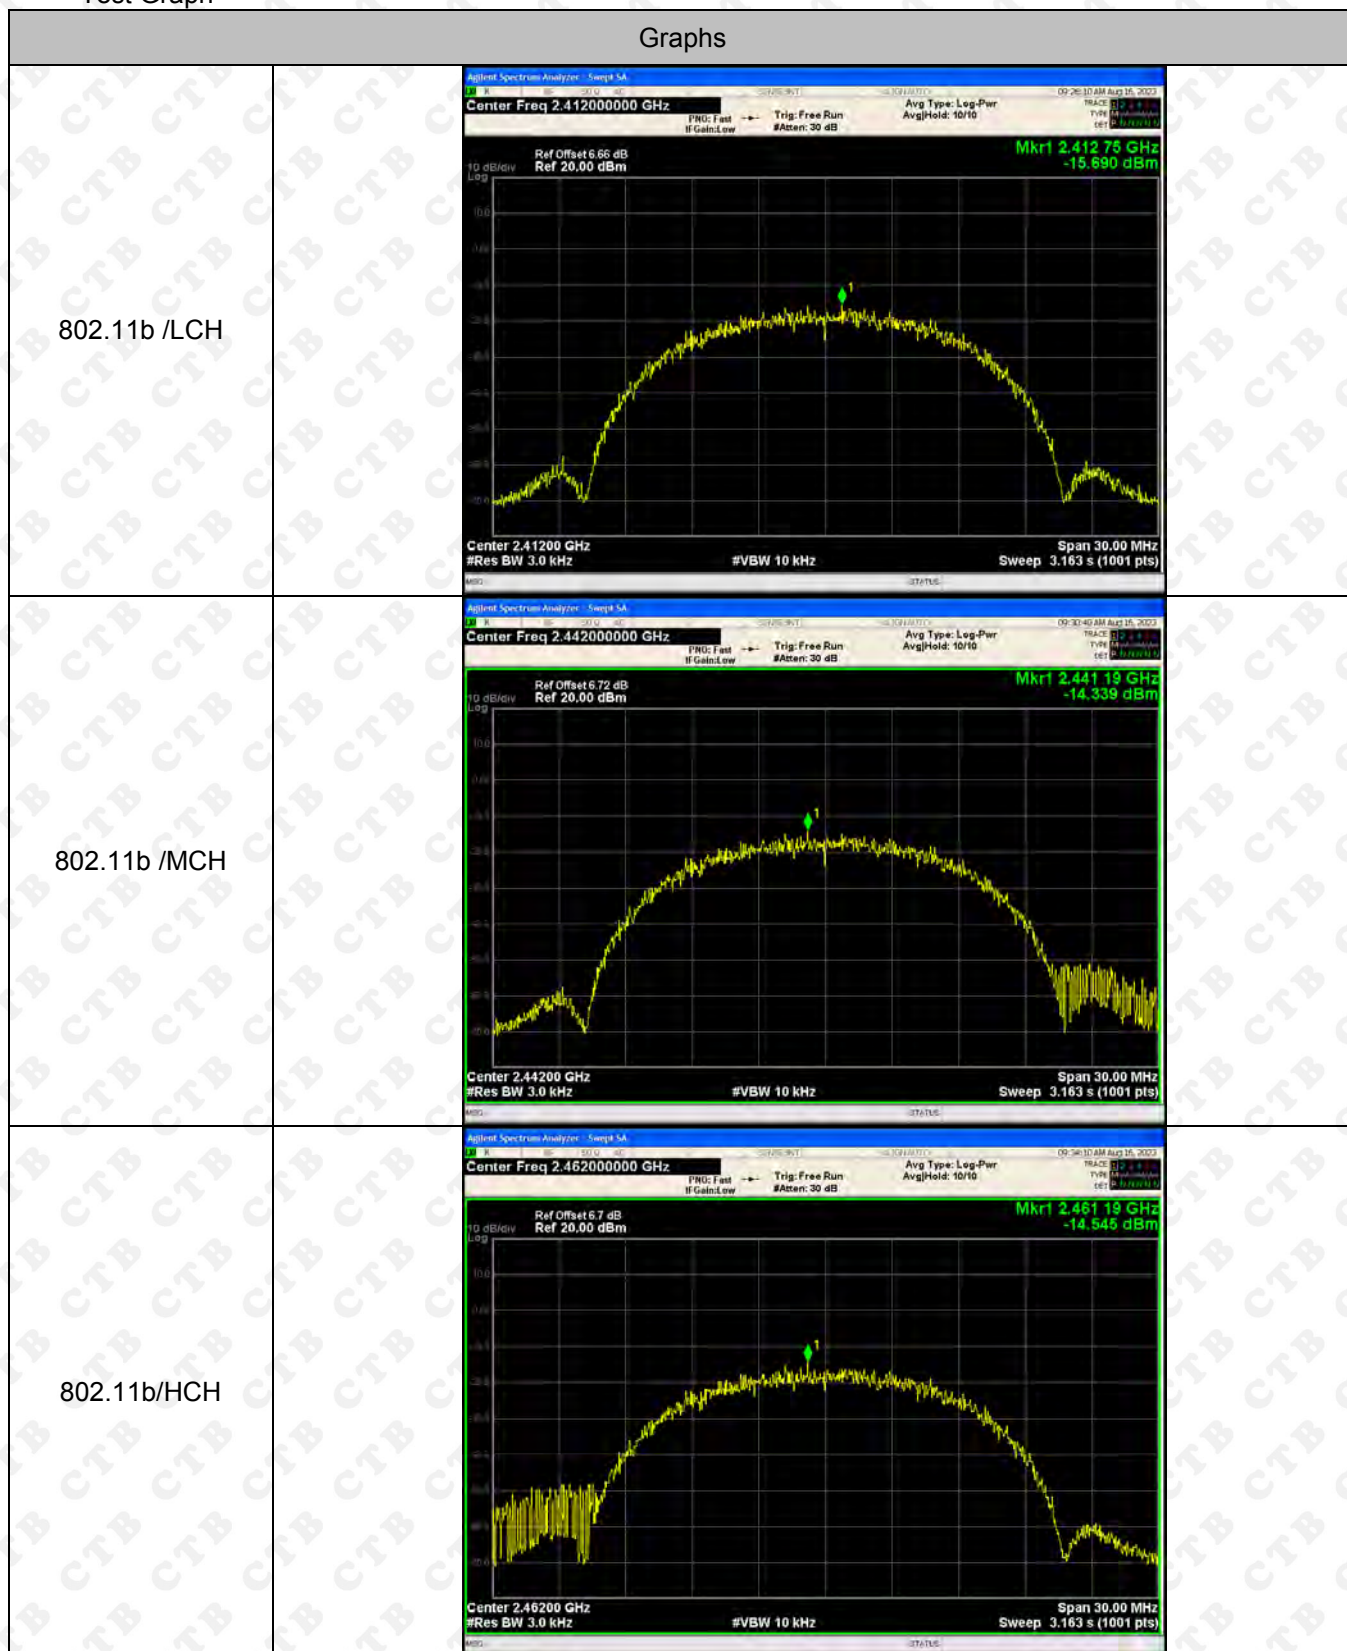

802.11g/LCH

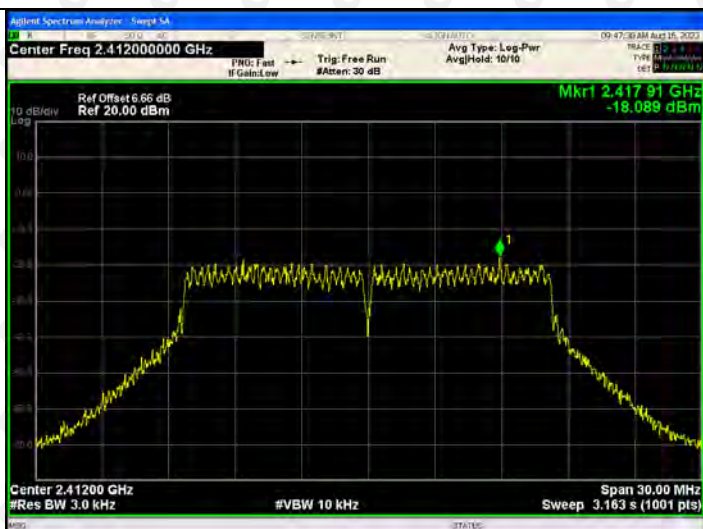


802.11g/MCH

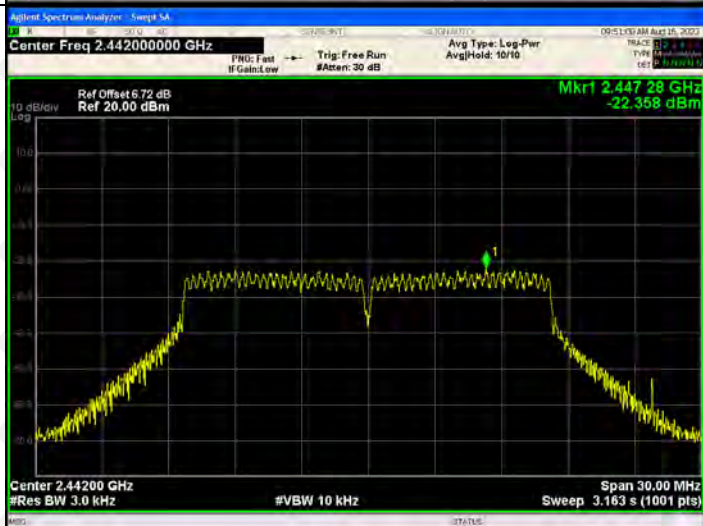




802.11g/HCH



802.11n(HT20)/LC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.412000000 GHz Ref Offset 6.66 dB Ref 20.00 dBm Mkr1 2.405 70 GHz -18.918 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11n(HT20)/MC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.442000000 GHz Ref Offset 6.72 dB Ref 20.00 dBm Mkr1 2.440 47 GHz -19.096 dBm Center 2.44200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11n(HT20)/HC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.462000000 GHz Ref Offset 6.7 dB Ref 20.00 dBm Mkr1 2.460 41 GHz -19.479 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)

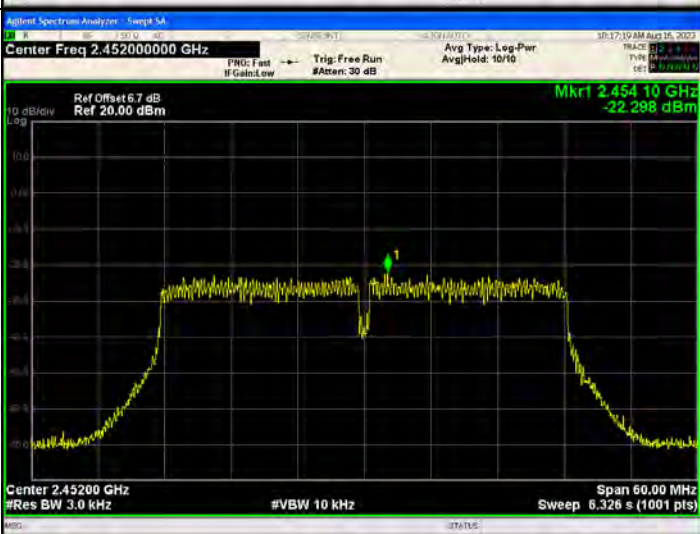
802.11n(HT40)/LC H	
802.11n(HT40)/MC H	
802.11n(HT40)/HC H	

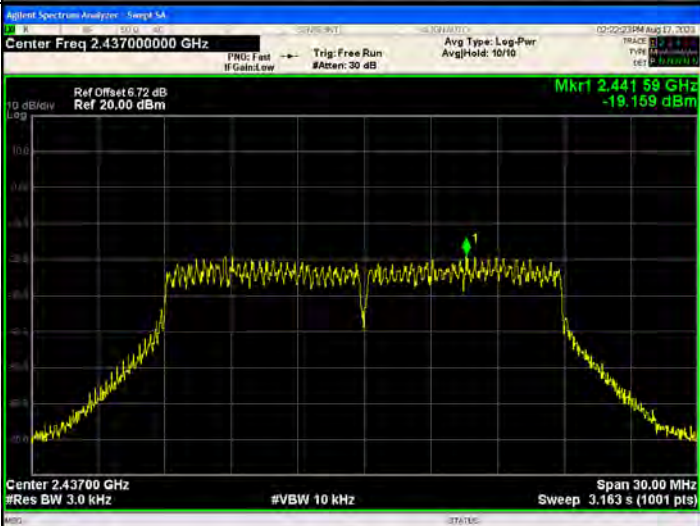802.11ax(HT20)/LC H	
802.11ax(HT20)/M CH	
802.11ax(HT20)/H CH	

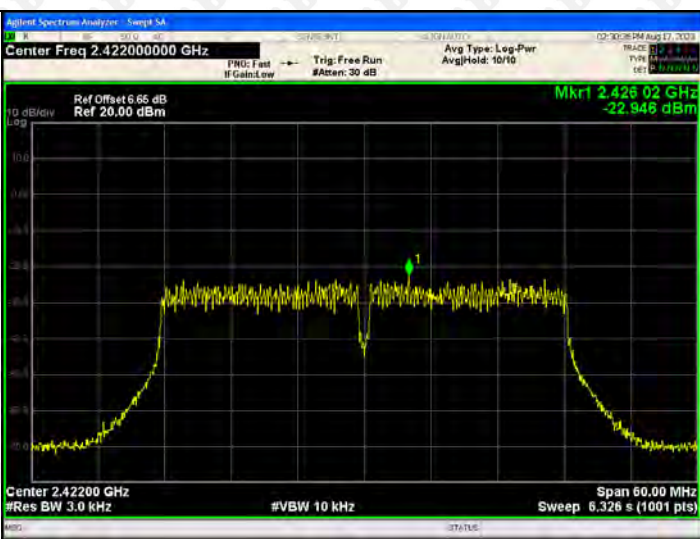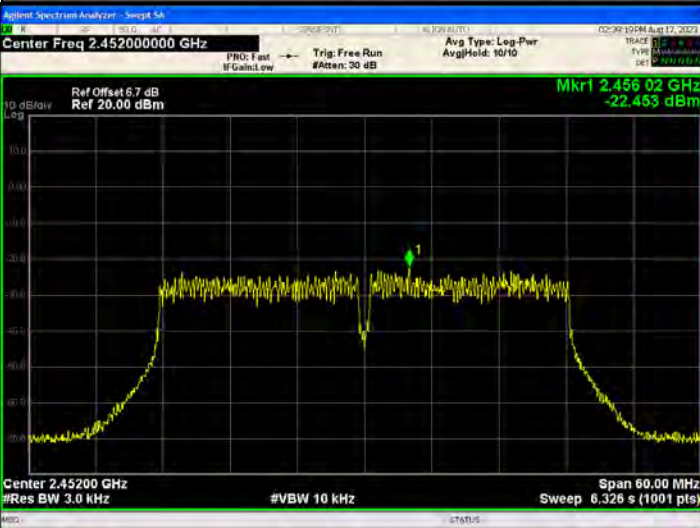
802.11ax(HT40)/LC H	
802.11ax(HT40)/M CH	
802.11ax(HT40)/H CH	

ANT 2:

Test Graph

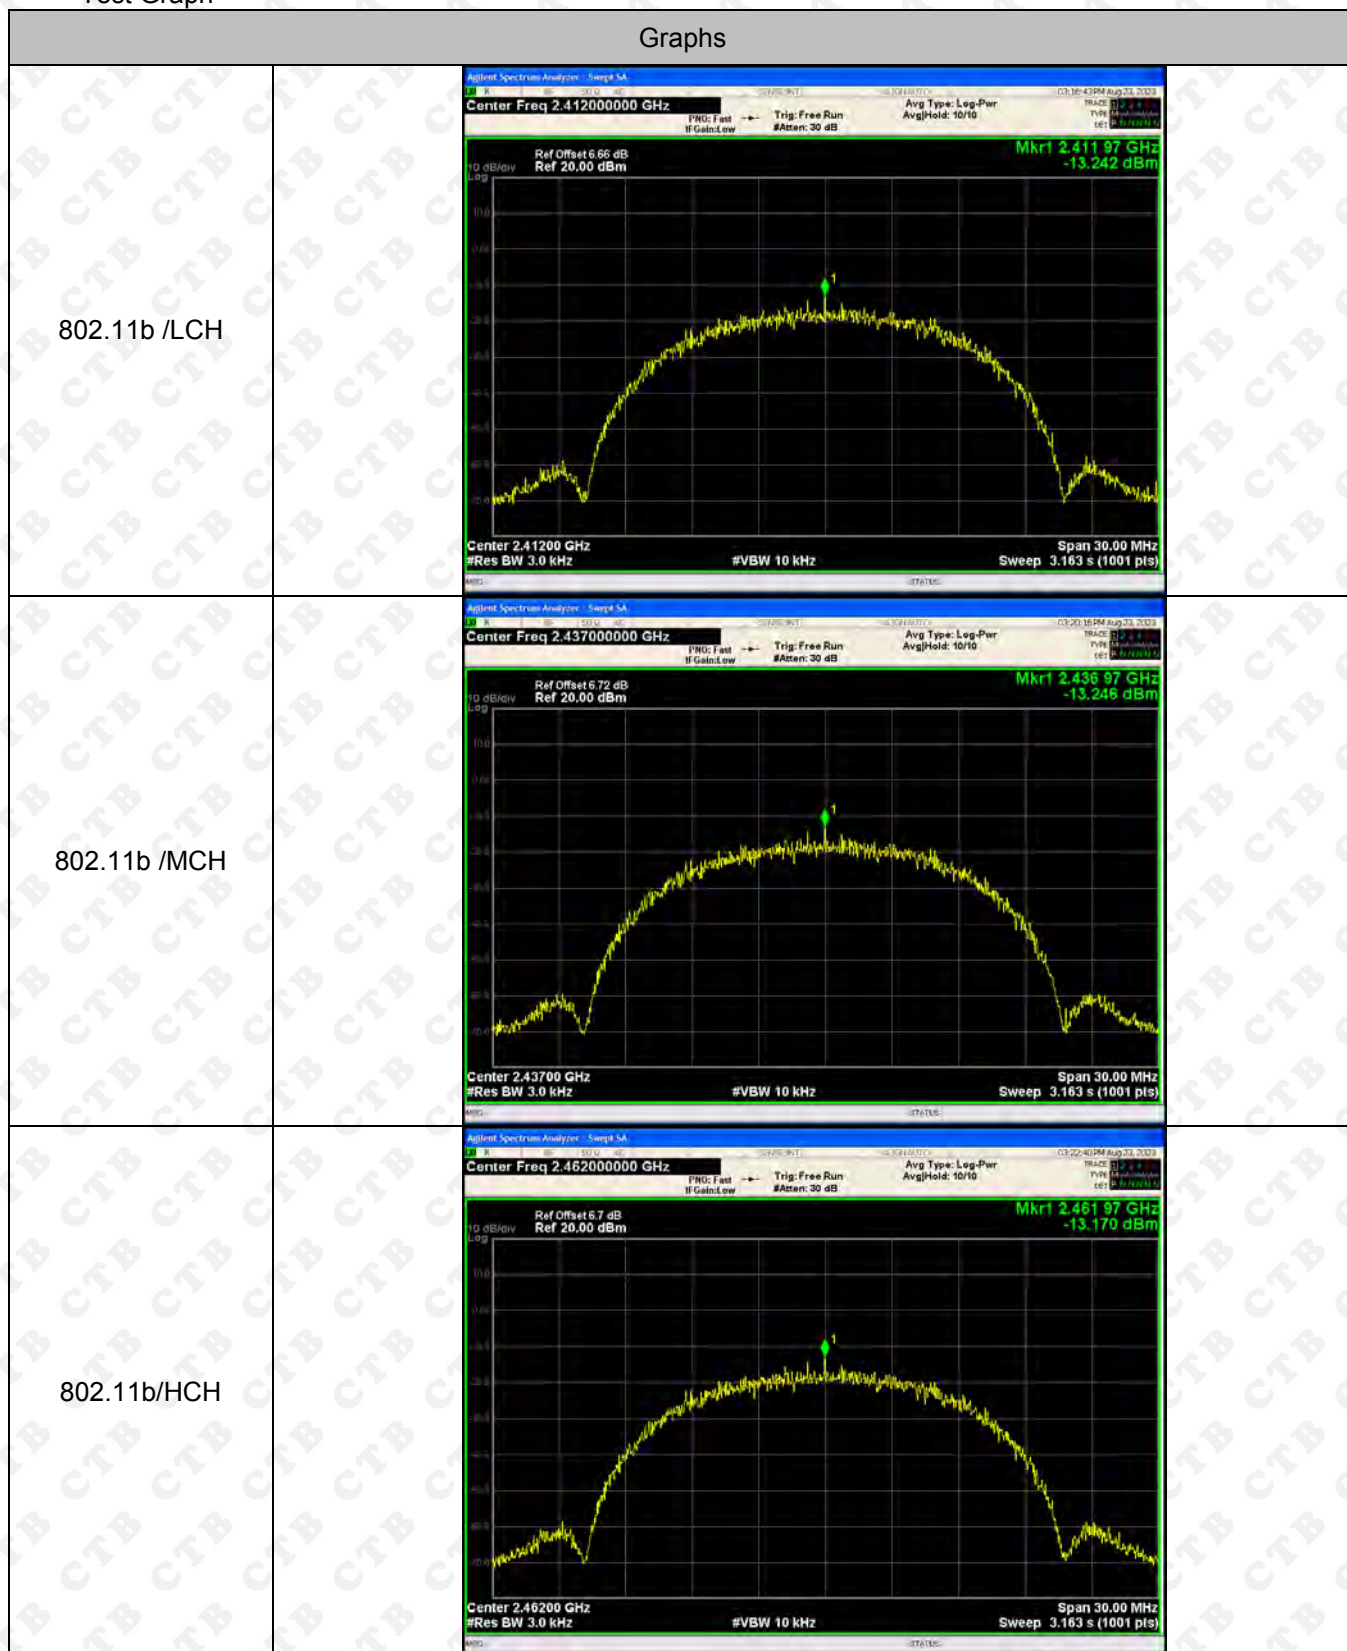

802.11g/LCH


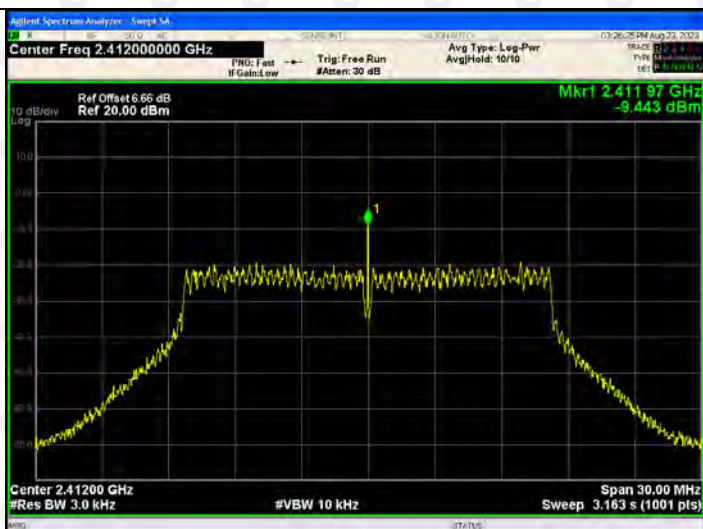





802.11g/MCH








802.11g/HCH

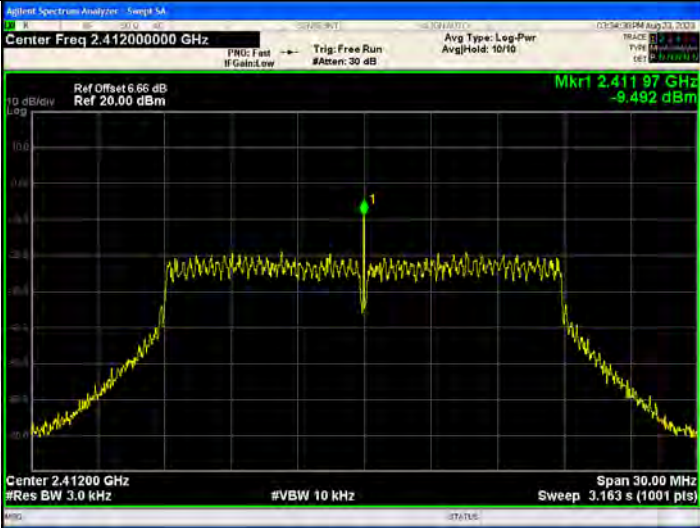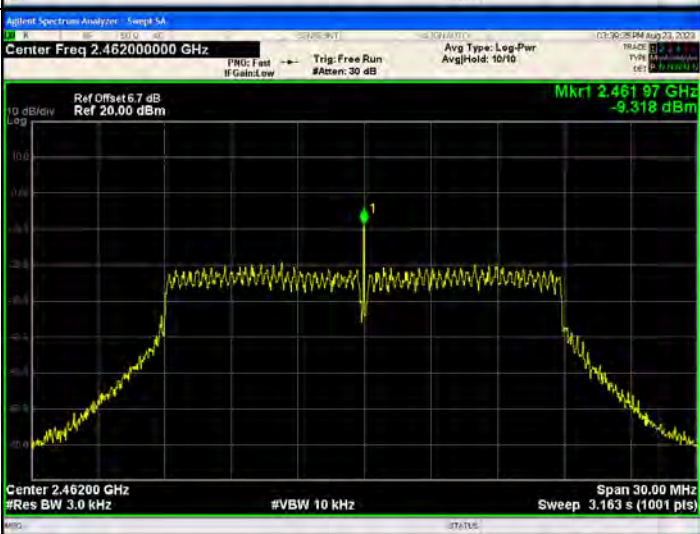

802.11n(HT20)/LC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.41200000 GHz Ref Offset 6.66 dB Ref 20.00 dBm Mkr1 2.411 97 GHz -9.492 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11n(HT20)/MC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.43700000 GHz Ref Offset 6.72 dB Ref 20.00 dBm Mkr1 2.436 97 GHz -9.304 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11n(HT20)/HC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.46200000 GHz Ref Offset 6.7 dB Ref 20.00 dBm Mkr1 2.461 97 GHz -9.318 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)

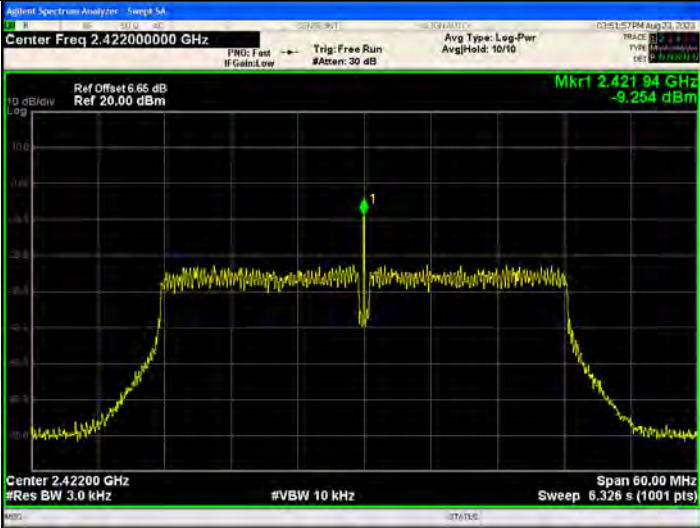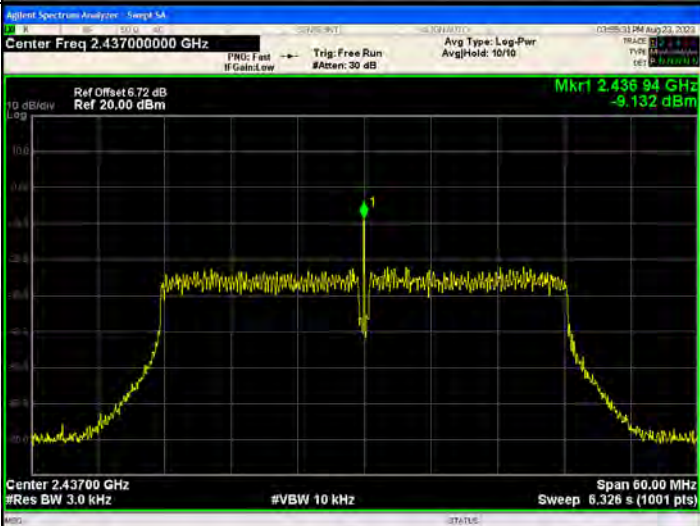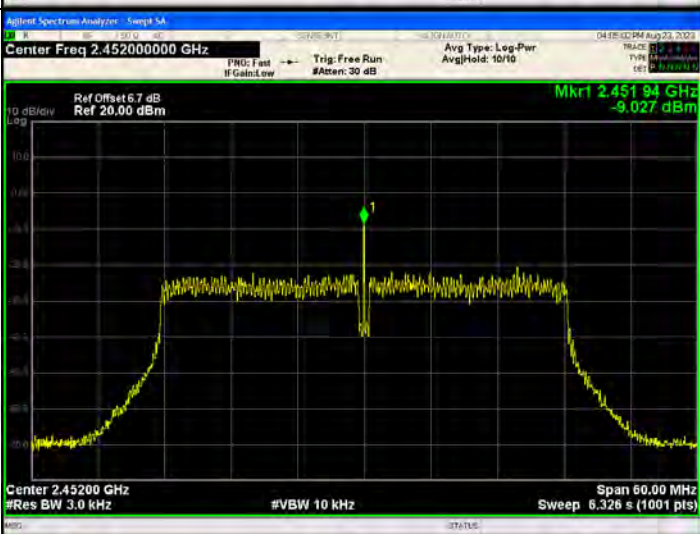802.11n(HT40)/LC H	
802.11n(HT40)/MC H	
802.11n(HT40)/HC H	

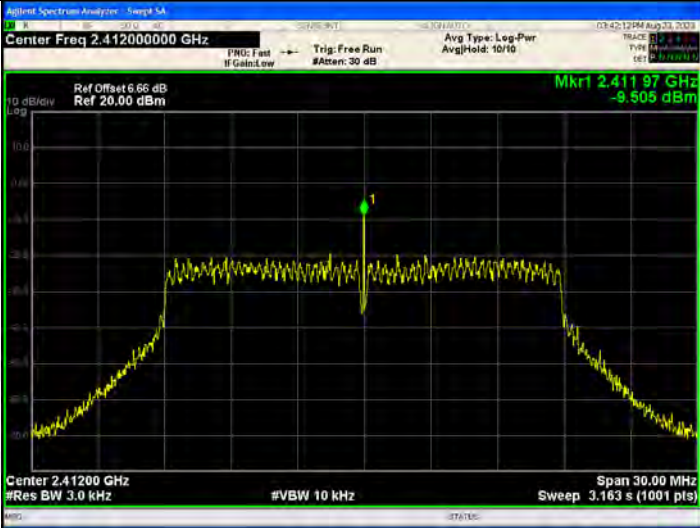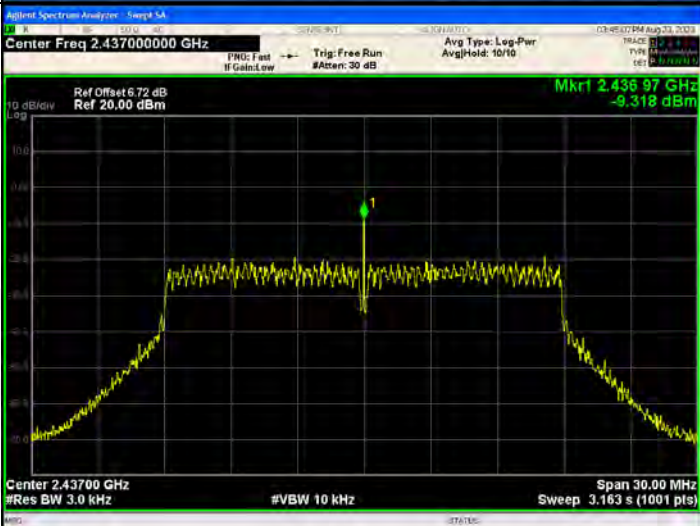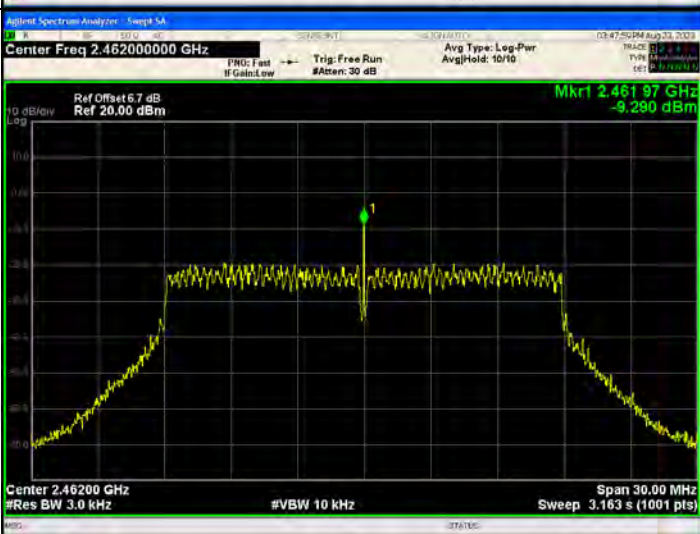802.11ax(HT20)/LC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.412000000 GHz Ref Offset 6.66 dB Ref 20.00 dBm Mkr1 2.411 97 GHz -9.505 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11ax(HT20)/M CH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.437000000 GHz Ref Offset 6.72 dB Ref 20.00 dBm Mkr1 2.436 97 GHz -9.318 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11ax(HT20)/H CH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.462000000 GHz Ref Offset 6.7 dB Ref 20.00 dBm Mkr1 2.461 97 GHz -9.280 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)

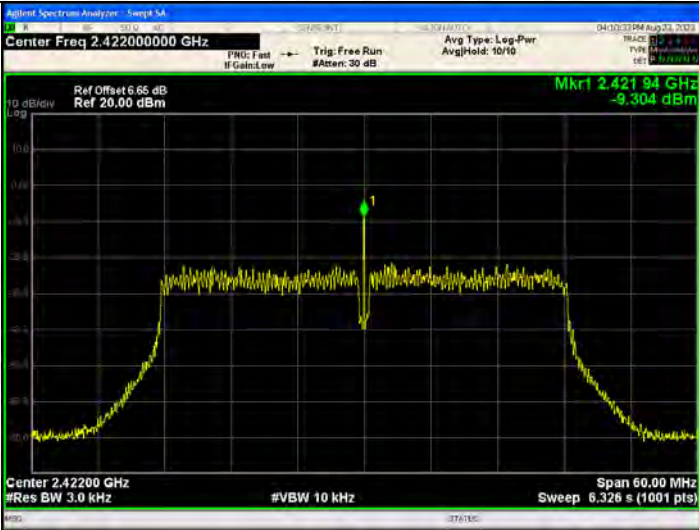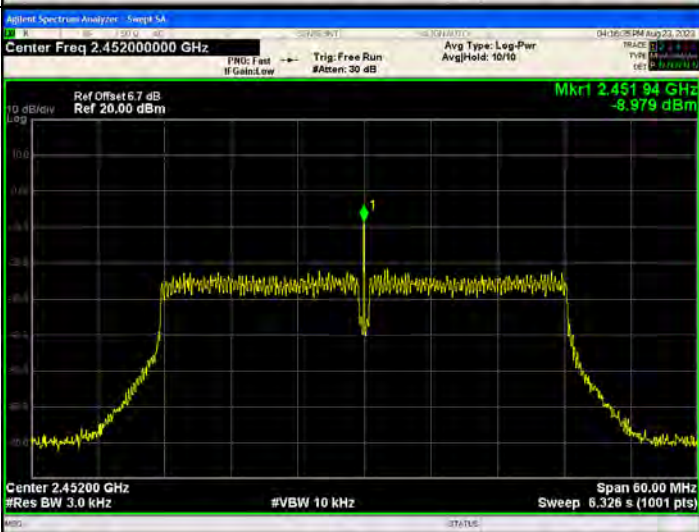802.11ax(HT40)/LC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.422000000 GHz Ref Offset 6.65 dB Ref 20.00 dBm Mkr1 2.421 94 GHz -9.304 dBm Center 2.42200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11ax(HT40)/M CH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.437000000 GHz Ref Offset 6.72 dB Ref 20.00 dBm Mkr1 2.436 94 GHz -9.080 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11ax(HT40)/H CH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.452000000 GHz Ref Offset 6.7 dB Ref 20.00 dBm Mkr1 2.451 94 GHz -8.979 dBm Center 2.45200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)

12. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


EUT Antenna:

The antenna is FPC Antenna and no consideration of replacement. The best case gain of the antenna is ANT1:1.76dBi, ANT2:2.33dBi.

13. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission


Below 1G

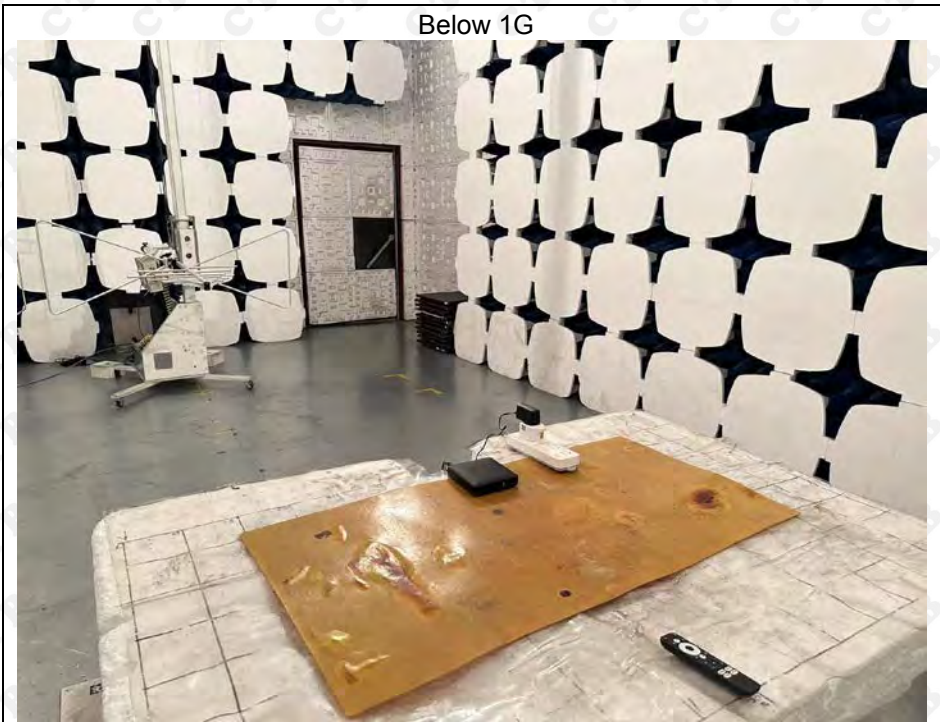

Above 1G



Conducted Emission

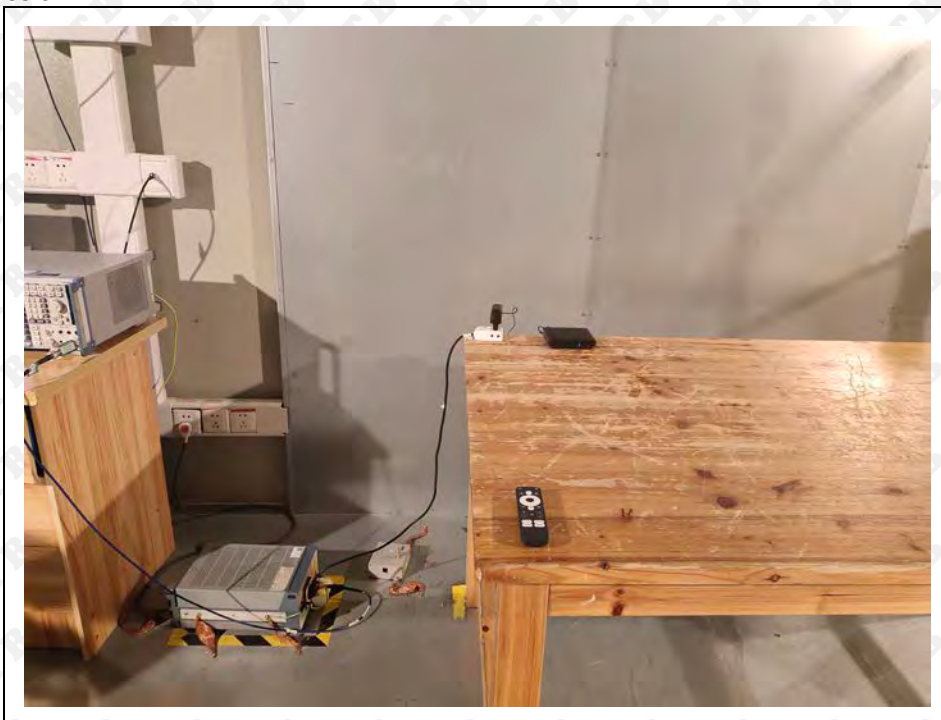

***** END OF REPORT *****