

RADIO TEST REPORT

Report No.: SHATBL2302006W01

Applicant

Sichuan AnSphere Technology Co., Ltd.

Address

Room 332, building 2, innovation center, science and Innovation Park,
Mianyang, Sichuan, China

Product Name : BG96 module

Brand Name : N/A

Model Name : BG96MC-128-SGNS

Series Model : N/A

FCC ID : 2A4AD-BG96MT7688A

Test Standard : FCC Part15.247

"Shanghai ATBL Technology Co., Ltd." hereby certifies that according to actual testing conditions. The test results or observations are provided in accordance with measured value, without taking risks caused by uncertainty into account. Without explicit stipulation in special agreements, standards or regulations, ATBL shall not assume any responsibility. The test results or observations are applicable only to tested sample. Client shall be responsible for representativeness of the sample and authenticity of the material. This report will be void without authorized signature or special seal for testing report. Do not copied without authorization.

TEST RESULT CERTIFICATION

Applicant's Name.....: Sichuan AnSphere Technology Co., Ltd.
Address.....: Room 332, building 2, innovation center, science and Innovation Park, Mianyang, Sichuan, China
Manufacturer's Name.....: Sichuan AnSphere Technology Co., Ltd.
Address.....: Room 332, building 2, innovation center, science and Innovation Park, Mianyang, Sichuan, China
Product Description
Product Name.....: BG96 module
Brand Name.....: N/A
Model Name.....: BG96MC-128-SGNS
Series Model.....: N/A
Test Standards.....: FCC Part15.247
Test Procedure.....: ANSI C63.10-2013

This device described above has been tested by ATBL, and the test results show that the equipment under test (EUT) is in compliance with the requirements of FCC Part15.247. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of ATBL, this document only be altered or revised by ATBL, personal only, and shall be noted in the revision of the document.

Date of Test


Date of receipt of test item.....: 2023.02.14
Date (s) of performance of tests.....: 2023.02.21 ~ 2023.03.09
Date of Issue.....: 2023.03.10
Test Result.....: Pass

Report Prepared by :




(Jack Suo)

Report Approved by :



(Ghost Li)

Authorized Signatory :



(Terry Yang)



Table of Contents

Page

1. SUMMARY OF TEST RESULTS	6
2. GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF THE EUT	7
2.2 DESCRIPTION OF THE TEST MODES	9
2.3 TEST SOFTWARE AND POWER LEVEL	9
2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	11
2.6 LABORATORY INFORMATION	11
2.7 MEASUREMENT UNCERTAINTY	11
2.8 EQUIPMENTS LIST	12
3. EMC EMISSION TEST	13
3.1 CONDUCTED EMISSION MEASUREMENT	13
3.2 RADIATED EMISSION MEASUREMENT	17
4. CONDUCTED SPURIOUS & BAND EDGE EMISSION	50
4.1 LIMIT	50
4.2 TEST PROCEDURE	50
4.3 DEVIATION FROM STANDARD	50
4.4 TEST SETUP	50
4.5 EUT OPERATION CONDITIONS	50
4.6 TEST RESULTS	51
5. POWER SPECTRAL DENSITY TEST	54
5.1 LIMIT	54
5.2 TEST PROCEDURE	54
5.3 DEVIATION FROM STANDARD	54
5.4 TEST SETUP	54
5.5 EUT OPERATION CONDITIONS	54
5.6 TEST RESULTS	55
6. BANDWIDTH TEST	57
6.1 LIMIT	57
6.2 TEST PROCEDURE	57
6.3 DEVIATION FROM STANDARD	57
6.4 TEST SETUP	57
6.5 EUT OPERATION CONDITIONS	58
6.6 TEST RESULTS	58
7. PEAK OUTPUT POWER TEST	61

Table of Contents

Page

7.1 LIMIT	61
7.2 TEST PROCEDURE	61
7.3 DEVIATION FROM STANDARD	61
7.4 TEST SETUP	61
7.5 EUT OPERATION CONDITIONS	61
7.6 TEST RESULTS	62
8. ANTENNA REQUIREMENT	64
8.1 STANDARD REQUIREMENT	64
8.2 EUT ANTENNA	64
9.APPENDIX-PHOTOS OF TEST SETUP	65

Revision History

Rev.	Issue Date	Report No.	Effect Page	Contents
00	2023.03.10	SHATBL2302006W01	ALL	Initial Issue

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

KDB 558074 D01 15.247 Meas Guidance v05r02.

FCC Part 15.247,Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	--
15.247 (a)(2)	6dB&99% Bandwidth	PASS	--
15.247 (b)(3)	Output Power	PASS	--
15.247(d) & 15.209 & 15.205	Radiated Spurious Emission	PASS	--
15.247(d) & 15.205	Conducted Spurious & Band Edge Emission	PASS	--
15.247 (e)	Power Spectral Density	PASS	--
15.205	Restricted bands of operation	PASS	--
15.203	Antenna Requirement	PASS	--

NOTE:

(1) 'N/A' denotes test is not applicable in this Test Report.

(2)All tests are according to ANSI C63.10-2013.

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	BG96 module	
Trade Name	N/A	
Model Name	BG96MC-128-SGNS	
Series Model	N/A	
Model Difference	N/A	
Product Description	The EUT is BG96 module	
	Operation Frequency:	802.11b/g/n20:2412~2462MHz 802.11n40:2422~2452MHz
	Modulation Type:	802.11b(DSSS):CCK,DQPSK,DBPSK 802.11g(OFDM):BPSK,QPSK,16-QAM,64-QAM 802.11n(OFDM):BPSK,QPSK,16-QAM,64-QAM
	Bit Rate of Transmitter:	802.11b:11/5.5/2/1Mbps 802.11g:54/48/36/24/18/12/9/6Mbps 802.11n(20MHz):MCS7/MCS6/MCS5/MCS4/MCS3/MCS2/MCS1/MCS0 802.11n(40MHz):MCS7/MCS6/MCS5/MCS4/MCS3/MCS2/MCS1/MCS0
	Number of Channel:	802.11b/g/n20: 11CH 802.11n40:7CH
	Antenna Designation:	External antenna
	Antenna Gain (dBi):	5dBi
	Duty Cycle:	>98%
Channel List	Please refer to the Note 2.	
Adapter	N/A	
Battery	N/A	
Hardware version number	V1.0.8	
Software version number	V1.0.0	
Connecting I/O Port(s)	Please refer to the User's Manual	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User Manual.

2.

Operation Frequency of channel			
802.11b/g/n(20MHz)		Channel List for 802.11n(40MHz)	
Channel	Frequency	Channel	Frequency
01	2412	03	2422
02	2417	04	2427
03	2422	05	2432
04	2427	06	2437
05	2432	07	2442
06	2437	08	2447
07	2442	09	2452
08	2447		
09	2452		
10	2457		
11	2462		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Carrier Frequency Channel

2.4GHz Test Frequency:

For 802.11b/g/n (HT20)	
Channel	Freq.(MHz)
01	2412
06	2437
11	2462

For 802.11n (HT40)	
Channel	Freq.(MHz)
03	2422
06	2437
09	2452

3.

Ant.	Model Name	Antenna Type	Connector	Gain (dBi)	Note
1	BG96MC-128-SGNS	External antenna	N/A	5dBi	WLANANT

2.2 DESCRIPTION OF THE TEST MODES

Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Test Mode	Description	Data Rate
Mode 1	TX IEEE 802.11b CH1	1Mbps
Mode 2	TX IEEE 802.11b CH6	1Mbps
Mode 3	TX IEEE 802.11 b CH11	1Mbps
Mode 4	TX IEEE 802.11g CH1	6Mbps
Mode 5	TX IEEE 802.11g CH6	6Mbps
Mode 6	TX IEEE 802.11g CH11	6Mbps
Mode 7	TX IEEE 802.11n HT20 CH1	MCS0
Mode 8	TX IEEE 802.11n HT20 CH6	MCS0
Mode 9	TX IEEE 802.11n HT20 CH11	MCS0
Mode 10	TX IEEE 802.11n HT40 CH03	MCS0
Mode 11	TX IEEE 802.11n HT40 CH06	MCS0
Mode 12	TX IEEE 802.11n HT40 CH09	MCS0

Note:

- (1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.
- (2) We have be tested for all available U.S. voltage and frequencies(For 120V,50/60Hz and 240V, 50/60Hz) for which the device is capable of operation, and the worst case of 120V /60Hz is shown in the report.

Conducted Emission

Test Case	
Conducted Emission	Mode13 Keeping WIFI TX


2.3 TEST SOFTWARE AND POWER LEVEL

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.


RF Function	Type	Mode Or Modulation type	Ant Gain(dBi)	Power Class	Software For Testing
WIFI(2.4G)	2.4G WIFI	802.11b	5	Auto	Provided by the customer
		802.11g		Auto	
		802.11n(HT20)		Auto	
		802.11n(HT40)		Auto	

2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiation Test Set

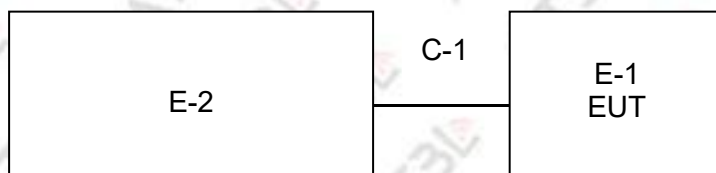

Conduction Test Set



2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Necessary accessories

Item	Equipment	Mfr/Brand	Model/Type No.	Length	Note
C-2	Adapter	SUNUN	SA21V-050200IV	100cm	N/A

Support units

Item	Equipment	Mfr/Brand	Model/Type No.	Type No.	Note
C-1	Notebook	Lenovo	DESKTOP-USDEO09	00326-10000-00000-AA636	N/A
E-2	USB	N/A	100cm	N/A	N/A

Note:

(1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.6 LABORATORY INFORMATION

Company Name:	Shanghai ATBL Technology Co., Ltd.
Address:	Building 8, No. 160, Basheng Road, Waigaoqiao Free Trade Zone, Pudong New Area, Shanghai
Telephone:	+86(0)21-51298625
The FCC Registration Number (FRN):	0031025281
A2LA Number:	6184.01
CNAS Number:	CNAS L14531

2.7 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 0.958\text{dB}$
2	Conducted spurious emissions	$\pm 2.988\text{dB}$
3	All emissions, radiated 30MHz-1GHz	$\pm 2.50\text{dB}$
4	All emissions, radiated 1GHz-18GHz	$\pm 3.51\text{dB}$
5	Occupied bandwidth	$\pm 23.20\text{Hz}$
6	Power spectral density	$\pm 0.886\text{dB}$

2.8 EQUIPMENTS LIST

2.8.1 Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Management number	Calibrated until
Test Receiver	R&S	ESCI	100469	SHATBL-E003	2023.05.20
Spectrum Analyzer	Agilent	N9020A	MY50200811	SHATBL-E017	2023.05.20
Bilog Antenna	SCHWARZBECK	VLUB 9168	01174	SHATBL-E008	2023.05.20
Horn Antenna	SCHWARZBECK	BBHA 9120D	02014	SHATBL-E009	2023.05.20
Pre-Amplifier (0.1M-3GHz)	JPT	JPA-10M1G35	21010100035001	SHATBL-E005	2023.05.20
Pre-Amplifier (1G-18GHz)	JPT	JPA0118-55-303A	1910001800055000	SHATBL-E006	2023.05.20
Temperature & Humidity	DeLi	DeLi	N/A	SHATBL-E016	2023.05.20
Antenna/Turntable Controller	Brilliant	N/A	N/A	SHATBL-E007	N/A
Test SW	FALA	EMC-RI(Ver.4A2)		SHATBL-E046	N/A
Active ring antenna 9kHz-30MHz	Daze	ZN30900C	20077	SHATBL-E042	2023.05.20
Horn Antenna With Amplifier(18G-40G)	COM-POWER Made in USA	AH-1840	10100008	SHATBL-E043	2023.05.20

2.8.2 RF Connected Test

Kind of Equipment	Manufacturer	Type No.	Serial No.	equipment number	Calibrated until
Power meter (with pulse power sensor)	Anritsu	ML2496A	1935001	SHATBL-W030	2023.09.27
Pulse power sensor (with power meter)	Anritsu	MA2411B	1911006	SHATBL-W031	2023.09.27
Signal Analyzer	Agilent	N9020A	MY57300196	SHATBL-W004	2023.09.27
Signal Generator	Agilent	N5182B	MY46240556	SHATBL-W005	2023.09.27
Wireless Communications Test Set	R&S	CMW500	101331	SHATBL-W007	2023.09.27
Temperature & Humidity	Deli	deli	N/A	SHATBL-W011	2023.09.27
Attenuator	Agilent	8494B	DC-18G	SHATBL-W009	2023.09.27
Attenuator	Agilent	8496B	DC-18G	SHATBL-W010	2023.09.27
power splitter	MNK	MPD-DC/6-2S	62315 G51	SHATBL-W015	2023.09.27
			62315 G52	SHATBL-W016	2023.09.27
Filter	Chengdu kangmaiwei	ZBSF-C2400-2483.5-T3	N/A	SHATBL-W021	N/A
Constant temperature and humidity box	KSON	THS-B6C-150	6159K	SHATBL-W019	2024.01.16
Test SW	FALA	LZ-RF(Ver.LzRF-03A3.1)		SHATBL-W020	N/A

3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION LIMITS

The radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table.

FREQUENCY (MHz)	Conducted Emission limit (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of “ * ” marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.1.2 TEST PROCEDURE

- The EUT is 0.8 m from the horizontal ground plane and 0.4 m from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment are powered from additional LISN(s). The LISN provides 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN is at least 80 cm from the nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 TEST SETUP

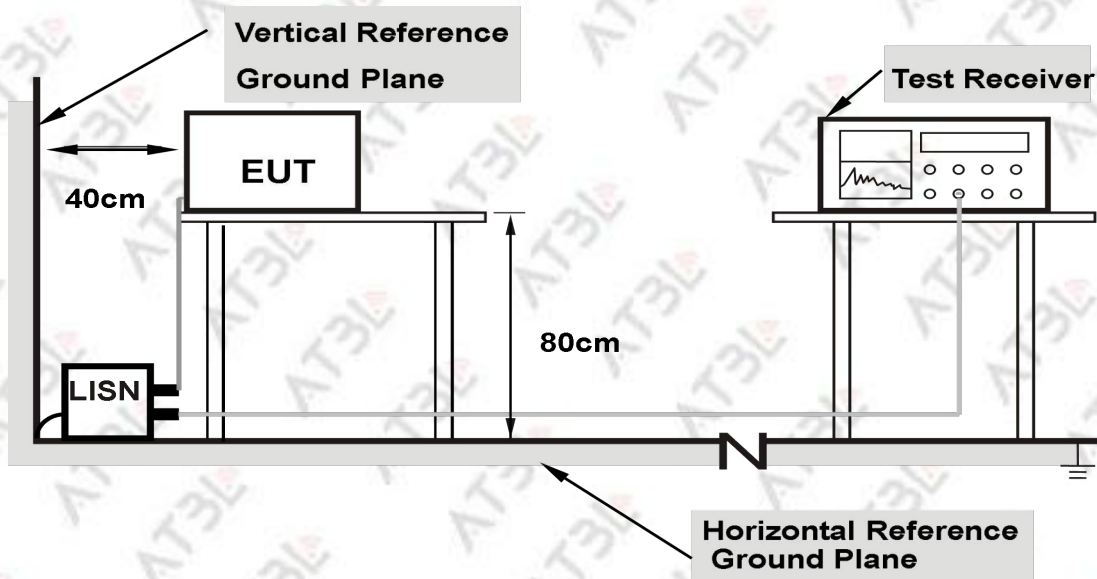

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes support units.

3.1.4 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

3.1.5 TEST RESULT


Temperature:	22.8℃	Relative Humidity:	51%RH
Test Voltage:	DC 3.8V	Phase:	L
Test Mode:	Mode 13		

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1830	36.49	10.73	47.22	64.35	-17.13	QP
2	0.1830	24.43	10.73	35.16	54.35	-19.19	AVG
3	0.3649	22.69	10.68	33.37	58.62	-25.25	QP
4	0.3649	13.19	10.68	23.87	48.62	-24.75	AVG
5	0.8504	21.05	10.70	31.75	56.00	-24.25	QP
6	0.8504	13.69	10.70	24.39	46.00	-21.61	AVG
7	2.7740	14.47	10.80	25.27	56.00	-30.73	QP
8	2.7740	4.87	10.80	15.67	46.00	-30.33	AVG
9	6.9190	5.93	10.75	16.68	60.00	-43.32	QP
10	6.9190	0.75	10.75	11.50	50.00	-38.50	AVG
11	23.1271	2.51	11.13	13.64	60.00	-46.36	QP
12	23.1271	-1.89	11.13	9.24	50.00	-40.76	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result = Reading + Factor) - Limit.
3. Factor = LISN factor + Cable loss + Limiter (10dB)

80.0 dBuV

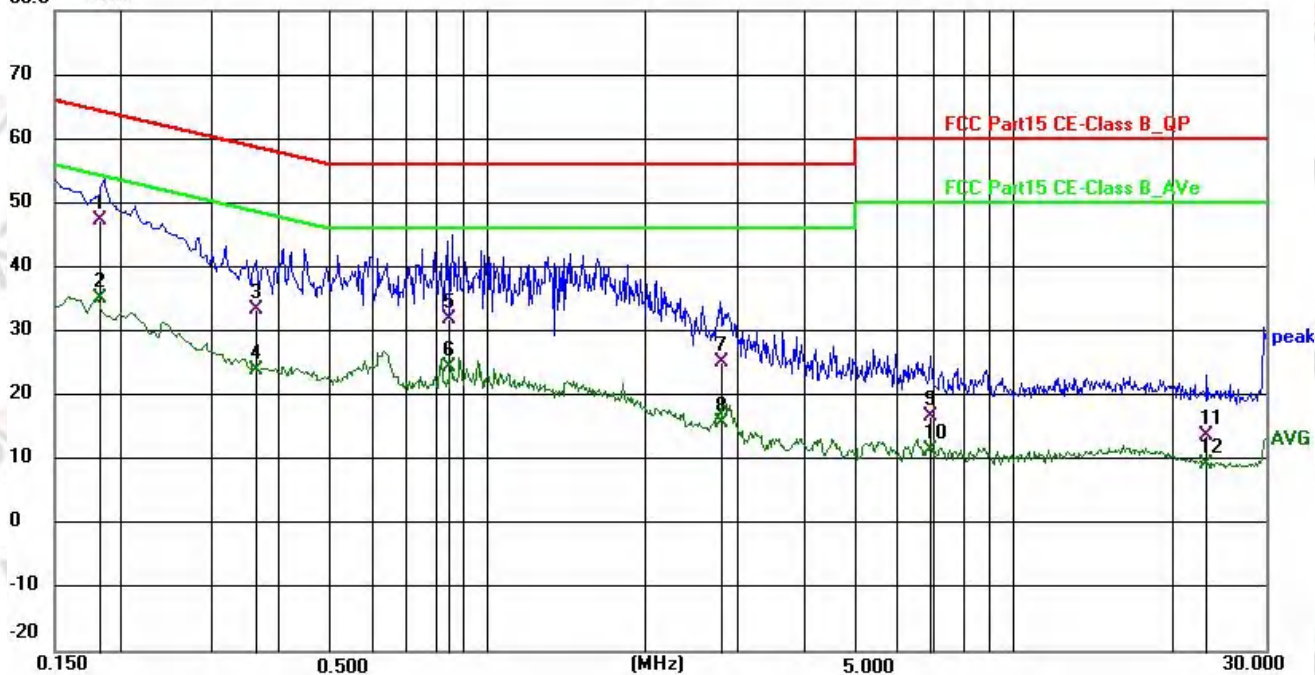


Temperature:	22.8℃	Relative Humidity:	51%RH
Test Voltage:	DC 3.8V	Phase:	N
Test Mode:	Mode 13		

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1573	37.17	10.43	47.60	65.61	-18.01	QP
2	0.1573	22.09	10.43	32.52	55.61	-23.09	AVG
3	0.3370	22.89	10.32	33.21	59.28	-26.07	QP
4	0.3370	13.49	10.32	23.81	49.28	-25.47	AVG
5	0.7895	20.03	10.35	30.38	56.00	-25.62	QP
6	0.7895	11.94	10.35	22.29	46.00	-23.71	AVG
7	1.7641	17.46	10.39	27.85	56.00	-28.15	QP
8	1.7641	8.45	10.39	18.84	46.00	-27.16	AVG
9	4.0324	7.76	10.43	18.19	56.00	-37.81	QP
10	4.0324	0.69	10.43	11.12	46.00	-34.88	AVG
11	17.6808	3.02	10.82	13.84	60.00	-46.16	QP
12	17.6808	-1.48	10.82	9.34	50.00	-40.66	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result =Reading + Factor)–Limit.
3. Factor=LISN factor+Cable loss+Limiter (10dB)

80.0 dBuV

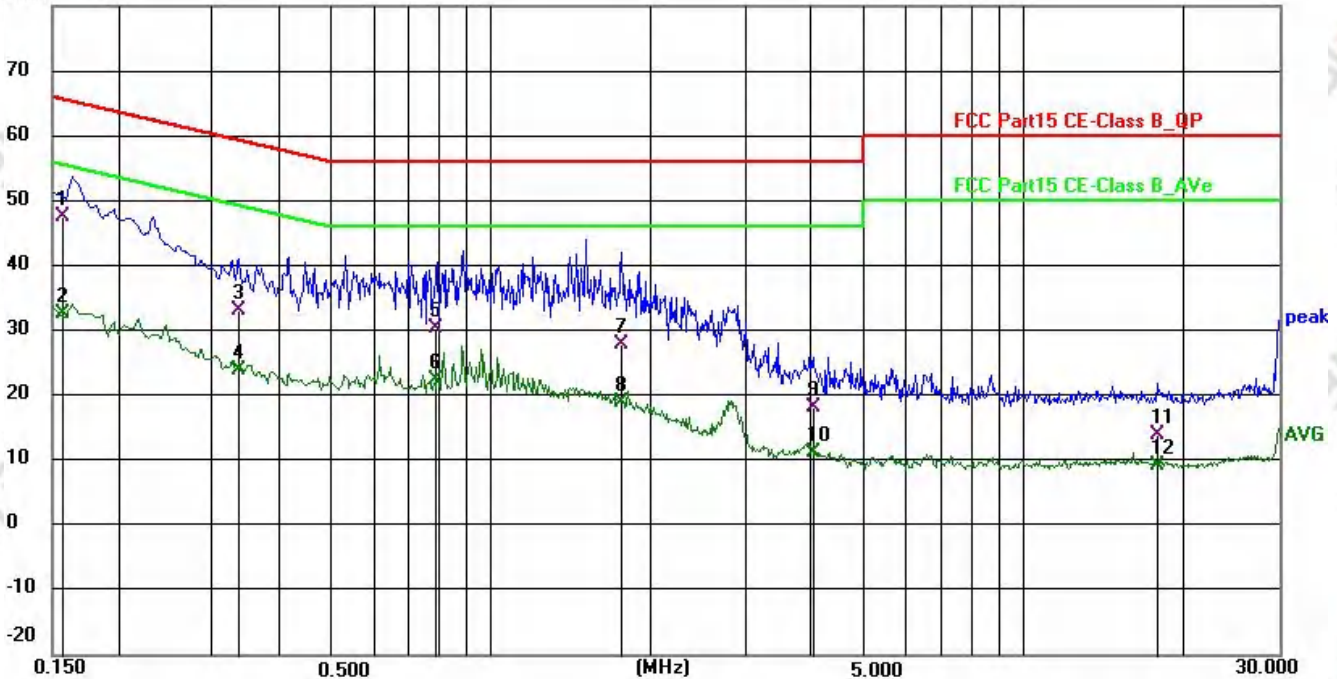

3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS

In any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the Restricted band specified on Part15.205(a)&209(a) limit in the table and according to ANSI C63.10-2013 below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (Frequency Range 9kHz-1000MHz)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	(dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

LIMITS OF RESTRICTED FREQUENCY BANDS

IC:

FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (GHz)
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

For Radiated Emission

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/QP/AV
Start Frequency	9 kHz/150kHz(Peak/QP/AV)
Stop Frequency	150kHz/30MHz(Peak/QP/AV)
RB / VB (emission in restricted band)	200Hz (From 9kHz to 0.15MHz)/ 9kHz (From 0.15MHz to 30MHz); 200Hz (From 9kHz to 0.15MHz)/ 9kHz (From 0.15MHz to 30MHz)

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/QP
Start Frequency	30 MHz(Peak/QP)
Stop Frequency	1000 MHz (Peak/QP)
RB / VB (emission in restricted band)	120 kHz / 300 kHz

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/AV
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	10th carrier hamonic(Peak/AV)
RB / VB (emission in restricted band)	1MHz / 3MHz(Peak) 1 MHz/1/T MHz(AVG)

For Restricted band

Spectrum Parameter	Setting
Detector	Peak/AV
Start/Stop Frequency	2310MHz to 2500MHz
RB / VB	1 MHz / 3 MHz(Peak) 1 MHz/1/T MHz(AVG)

Receiver Parameter	Setting
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE


- The measuring distance at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- The EUT was placed on the top of a rotating table 0.8 m (above 1GHz is 1.5 m) above the ground at a 3 m anechoic chamber test site. The table was rotated 360 degree to determine the position of the highest radiation.
- The height of the equipment shall be 0.8 m (above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. Horizontal and vertical polarization of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and Quasi Peak detector mode will be re-measured.
- If the Peak Mode measured value is compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and no additional QP Mode measurement was performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

3.2.3 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

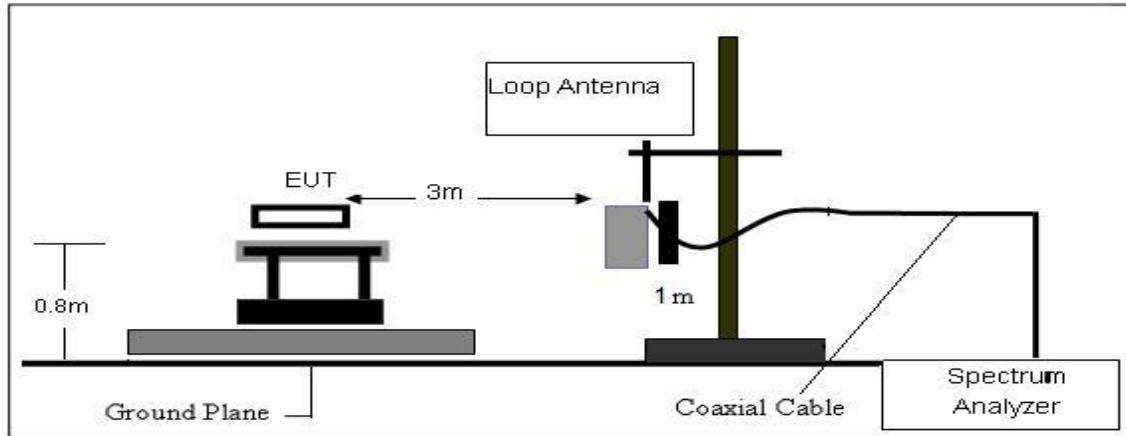

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

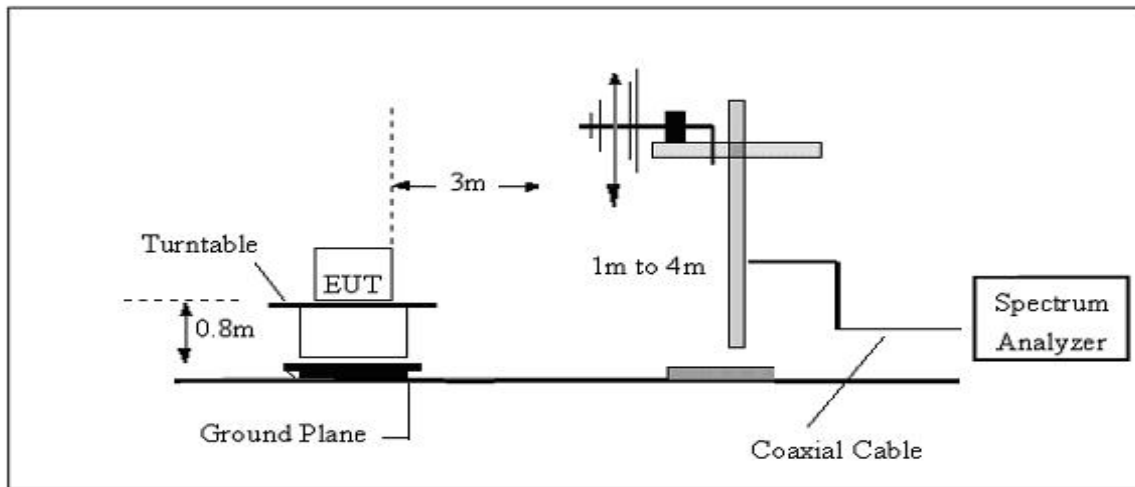

(C) Radiated Emission Test-Up Frequency Above 1GHz

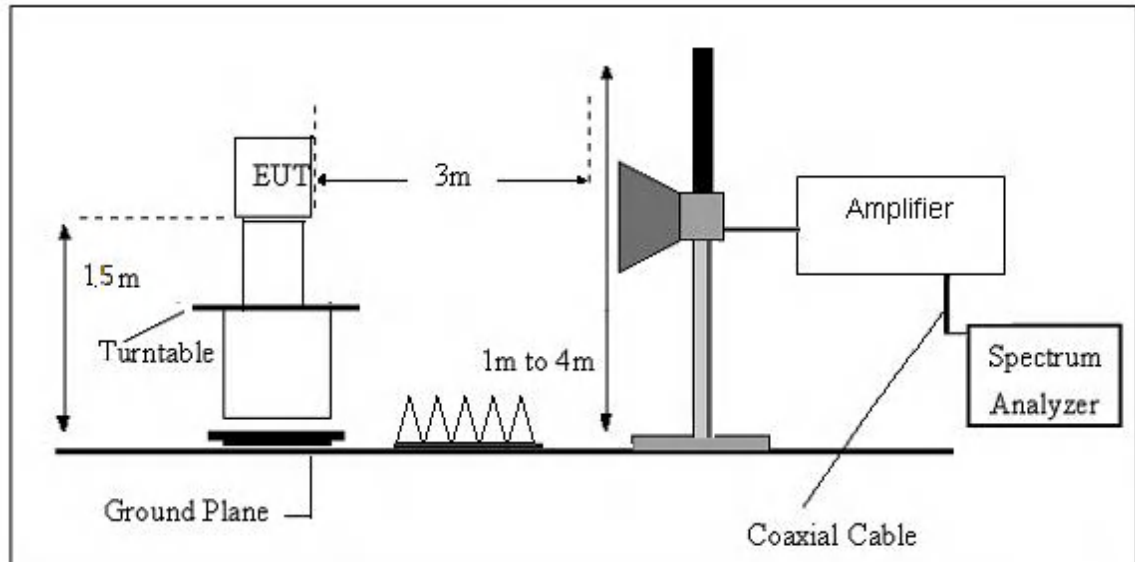

3.2.4 EUT OPERATING CONDITIONS

Please refer to section 3.1.4 of this report.

3.2.5 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where

FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

For example

Frequency	FS	RA	AF	CL	AG	Factor
(MHz)	(dBμV/m)	(dBμV/m)	(dB)	(dB)	(dB)	(dB)
300	40	58.1	12.2	1.6	31.9	-18.1

$$\text{Factor} = \text{AF} + \text{CL} - \text{AG}$$

3.2.6 TEST RESULTS(RADIATEDSPURIOUS EMISSIONS)

9kHz - 30MHz

Temperature:	22.8℃	Relative Humidity:	51%RH
Test Voltage:	DC3.8V	Polarization:	--
Test Mode:	TX Mode		

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = 40 log (specific distance/test distance)(dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.

30MHz - 1000MHz

Temperature:	22.8℃	Relative Humidity:	51%RH
Test Voltage:	DC3.8V	Phase:	Horizontal
Test Mode:	Mode 1		

Mode 1 Horizontal

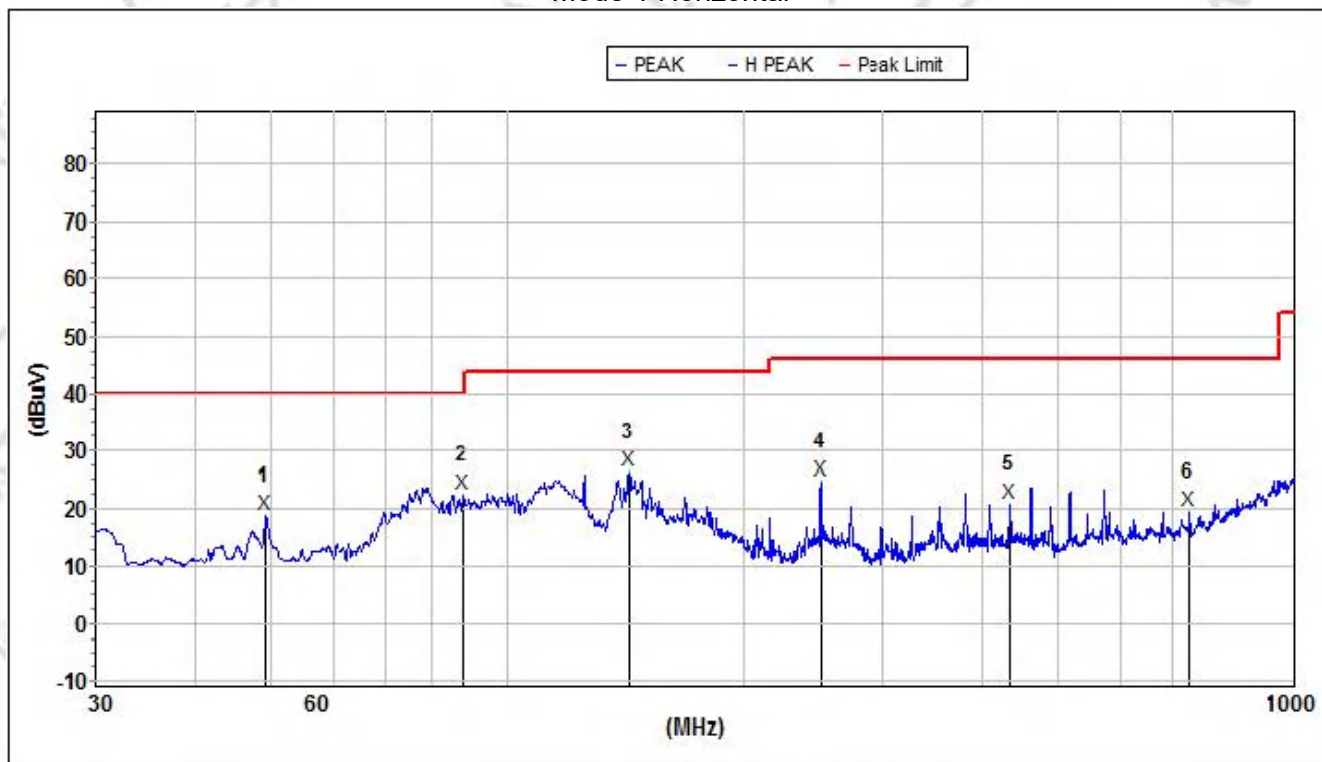


Mk.	Freq.(MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.F/G. (dB/m)	Amp.G. (dB)	Cbl.L. (dB)	Pol.
Peak								
1	49.359419	18.9	40.0	21.1	13.6	32.6	0.8	H
2	87.571081	22.7	40.0	17.3	9.4	32.9	1.1	H
3	142.824363	26.4	43.5	17.1	13.7	32.9	1.3	H
4	249.862716	25.0	46.0	21.0	11.6	32.8	2.6	H
5	436.354216	20.8	46.0	25.2	14.2	32.4	2.7	H
6	735.780222	19.6	46.0	26.4	17.1	32.2	3.6	H

30MHz - 1000MHz

Temperature:	22.8℃	Relative Humidity:	51%RH
Test Voltage:	DC3.8V	Phase:	Vertical
Test Mode:	Mode 1		

Mode 1 Vertical

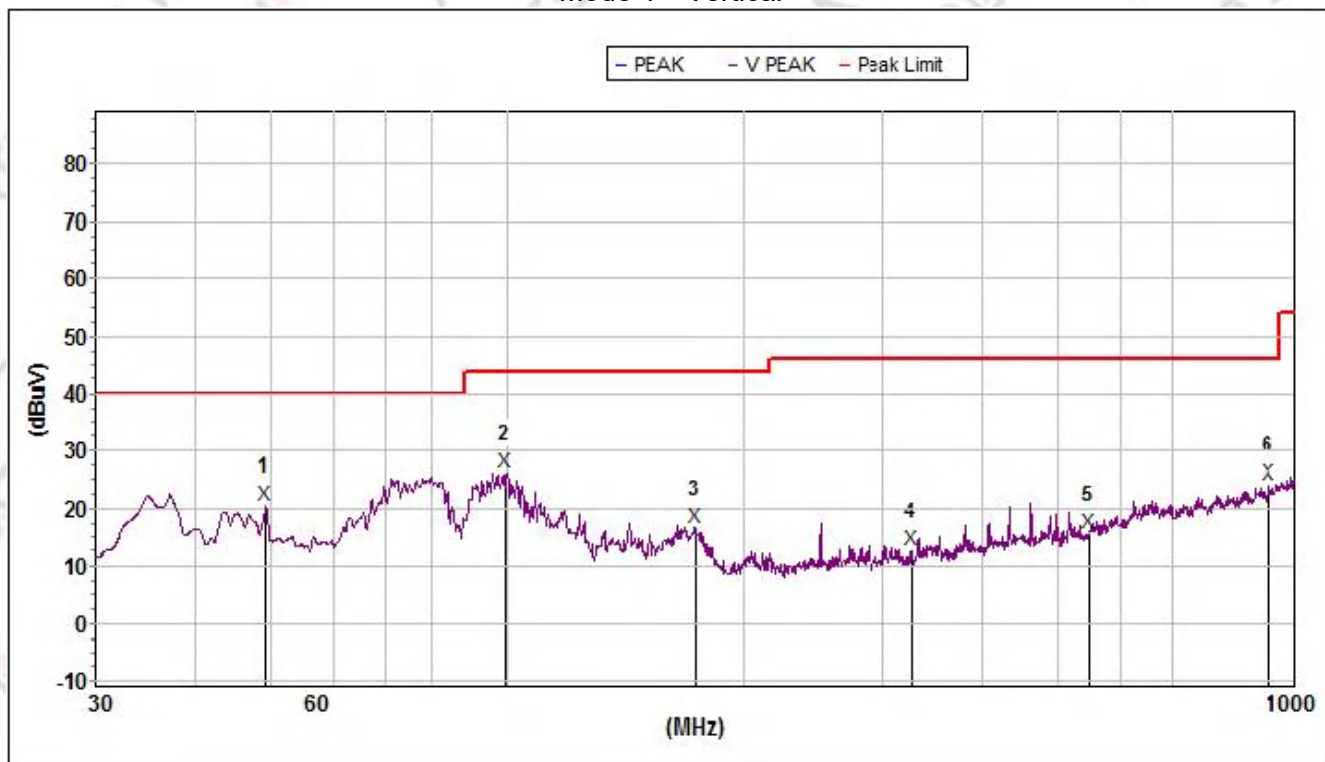


Mk.	Freq.(MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.F/G. (dB/m)	Amp.G. (dB)	Cbl.L. (dB)	Pol.
Peak								
1	49.359419	20.6	40.0	19.4	13.6	32.6	0.8	V
2	99.702770	26.3	43.5	17.2	10.1	32.9	1.4	V
3	172.901670	16.6	43.5	26.9	12.7	32.8	1.8	V
4	326.739530	12.6	46.0	33.4	13.4	32.6	2.7	V
5	548.057714	15.6	46.0	30.4	17.4	32.4	3.1	V
6	925.756282	24.1	46.0	21.9	21.9	31.5	3.7	V

30MHz - 1000MHz

Temperature:	22.8℃	Relative Humidity:	51%RH
Test Voltage:	DC3.8V	Phase:	Horizontal
Test Mode:	Mode 2		

Mode 2 Horizontal

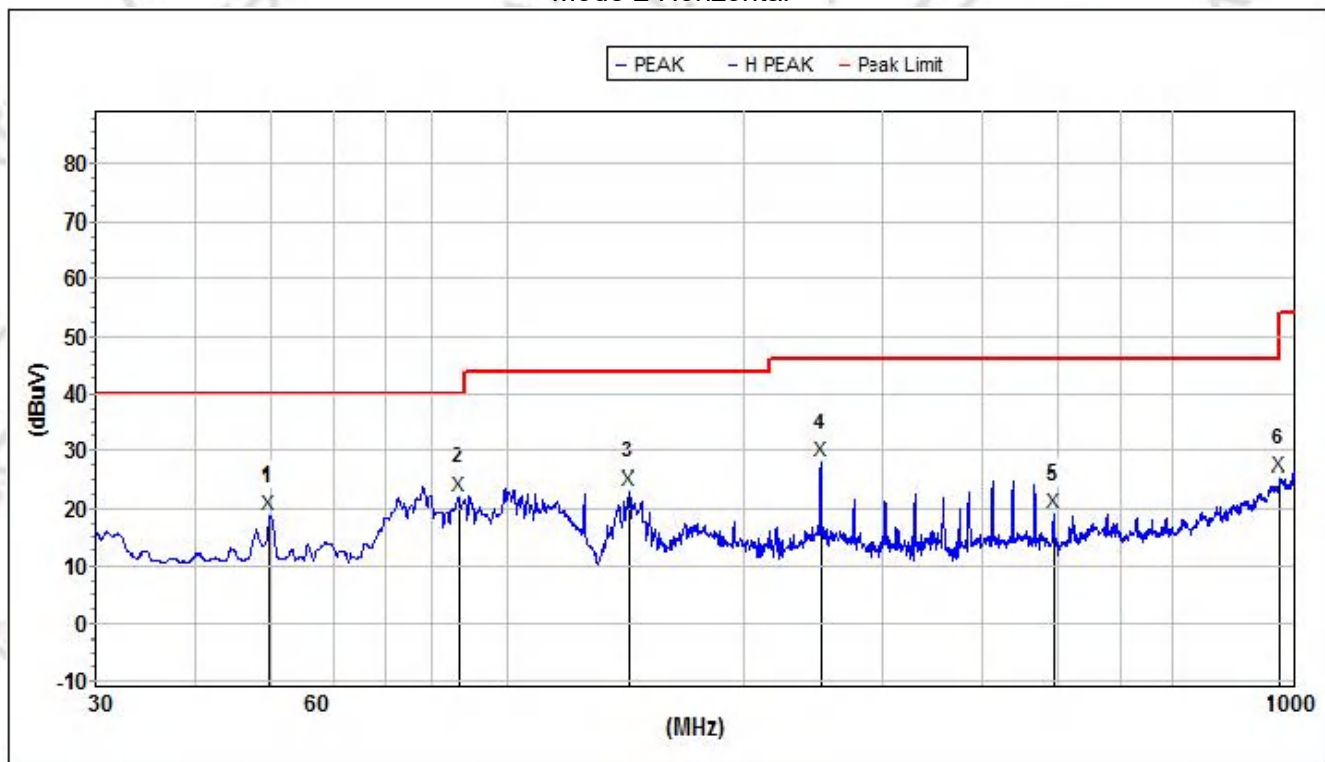


Mk.	Freq.(MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.F/G. (dB/m)	Amp.G. (dB)	Cbl.L. (dB)	Pol.
Peak								
1	49.881404	18.9	40.0	21.1	13.5	32.6	0.8	H
2	86.654690	22.2	40.0	17.8	9.4	32.9	1.1	H
3	143.326064	23.3	43.5	20.2	13.7	32.9	1.3	H
4	249.862716	28.0	46.0	18.0	11.6	32.8	2.6	H
5	495.065670	19.3	46.0	26.7	14.7	32.5	2.8	H
6	960.476834	25.5	54.0	28.5	20.4	31.2	3.8	H

30MHz - 1000MHz

Temperature:	22.8℃	Relative Humidity:	51%RH
Test Voltage:	DC3.8V	Phase:	Vertical
Test Mode:	TX Mode 2		

Mode2 Vertical

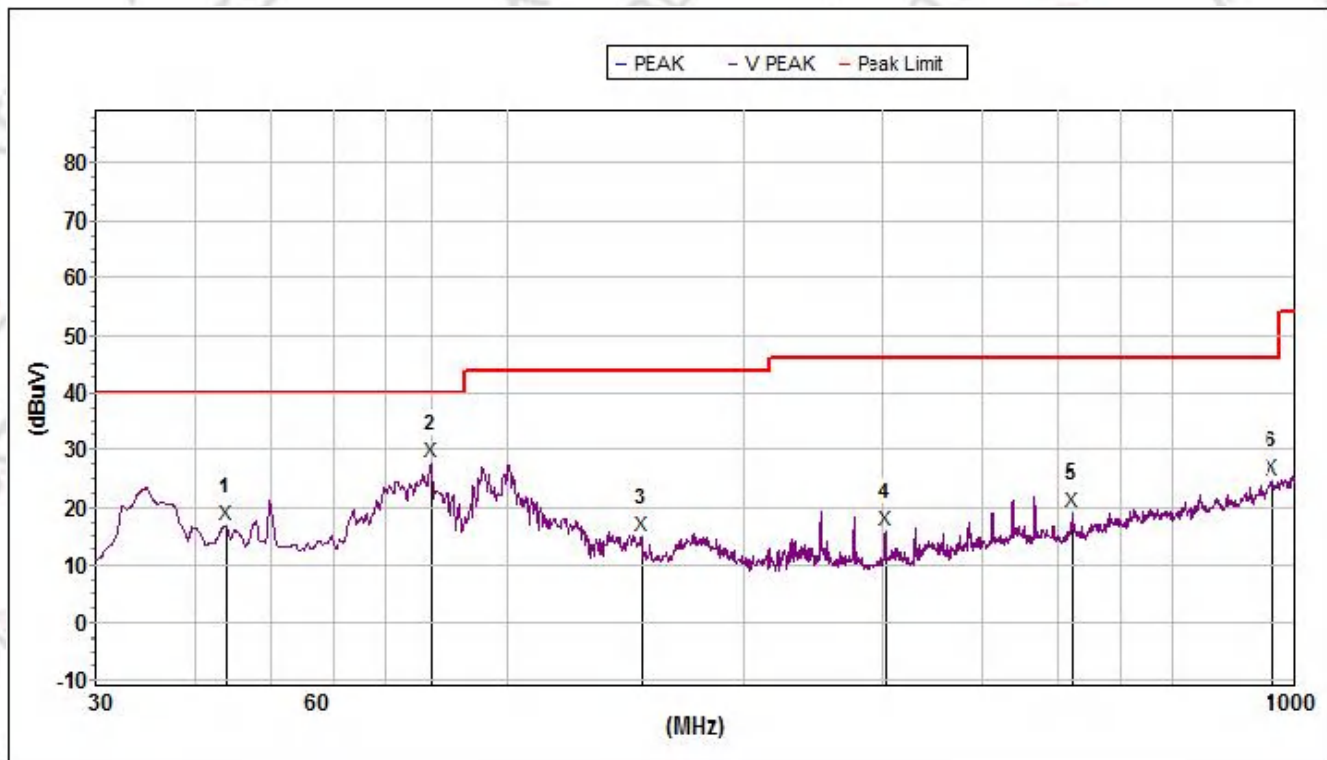

Mk.	Freq.(MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.F/G. (dB/m)	Amp.G. (dB)	Cbl.L. (dB)	Pol.
Peak								
1	44.042958	16.8	40.0	23.2	13.9	32.5	0.8	V
2	79.940317	27.7	40.0	12.3	9.3	32.9	0.9	V
3	148.181001	15.1	43.5	28.4	14.0	32.9	1.3	V
4	303.011972	15.9	46.0	30.1	12.9	32.7	2.7	V
5	520.888241	19.3	46.0	26.7	16.9	32.4	2.9	V
6	940.480125	24.8	46.0	21.2	22.0	31.4	3.7	V


(30MHz -1000MHz)

Temperature:	23.4℃	Relative Humidity:	55%RH
Test Voltage:	DC3.8V	Phase:	Horizontal
Test Mode:	TX Mode 3		

Remark:

1. Margin = Result (Result =Reading + Factor)–Limit
2. Factor= Antenna factor+Cable attenuation factor(cable loss)-Amplifier gain

Mode 3 Horizontal

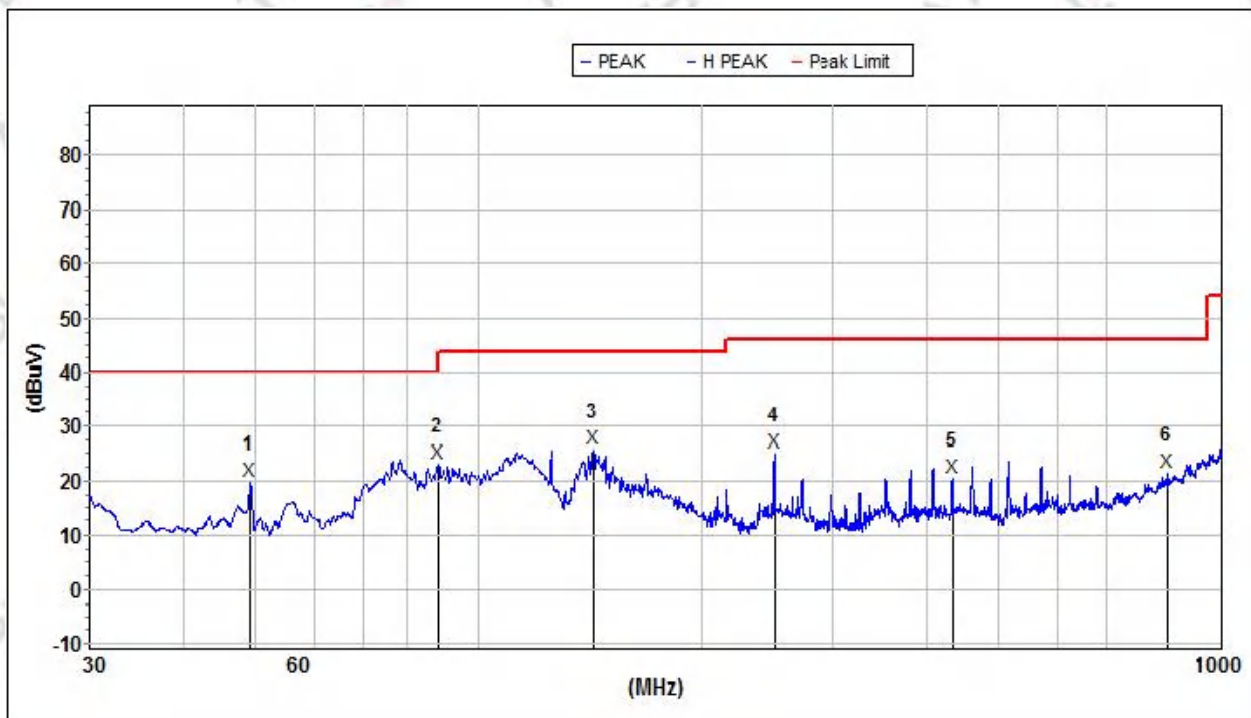

Mk.	Freq.(MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.F/G. (dB/m)	Amp.G. (dB)	Cbl.L. (dB)	Pol.
Peak								
1	49.359419	19.9	40.0	20.1	13.6	32.6	0.8	H
2	88.187386	23.1	43.5	20.4	9.4	32.9	1.1	H
3	143.326064	26.0	43.5	17.5	13.7	32.9	1.3	H
4	249.862716	25.2	46.0	20.8	11.6	32.8	2.6	H
5	434.826795	20.7	46.0	25.3	14.2	32.4	2.7	H
6	842.129617	21.5	46.0	24.5	19.3	31.9	3.6	H

(30MHz -1000MHz)


Temperature:	23.4℃	Relative Humidity:	55%RH
Test Voltage:	DC3.8V	Phase:	Vertical
Test Mode:	TX Mode 3		

Remark:

1. Margin = Result (Result =Reading + Factor)-Limit

2. Factor= Antenna factor+Cable attenuation factor(cable loss)-Amplifier gain


Mode 3 Vertical

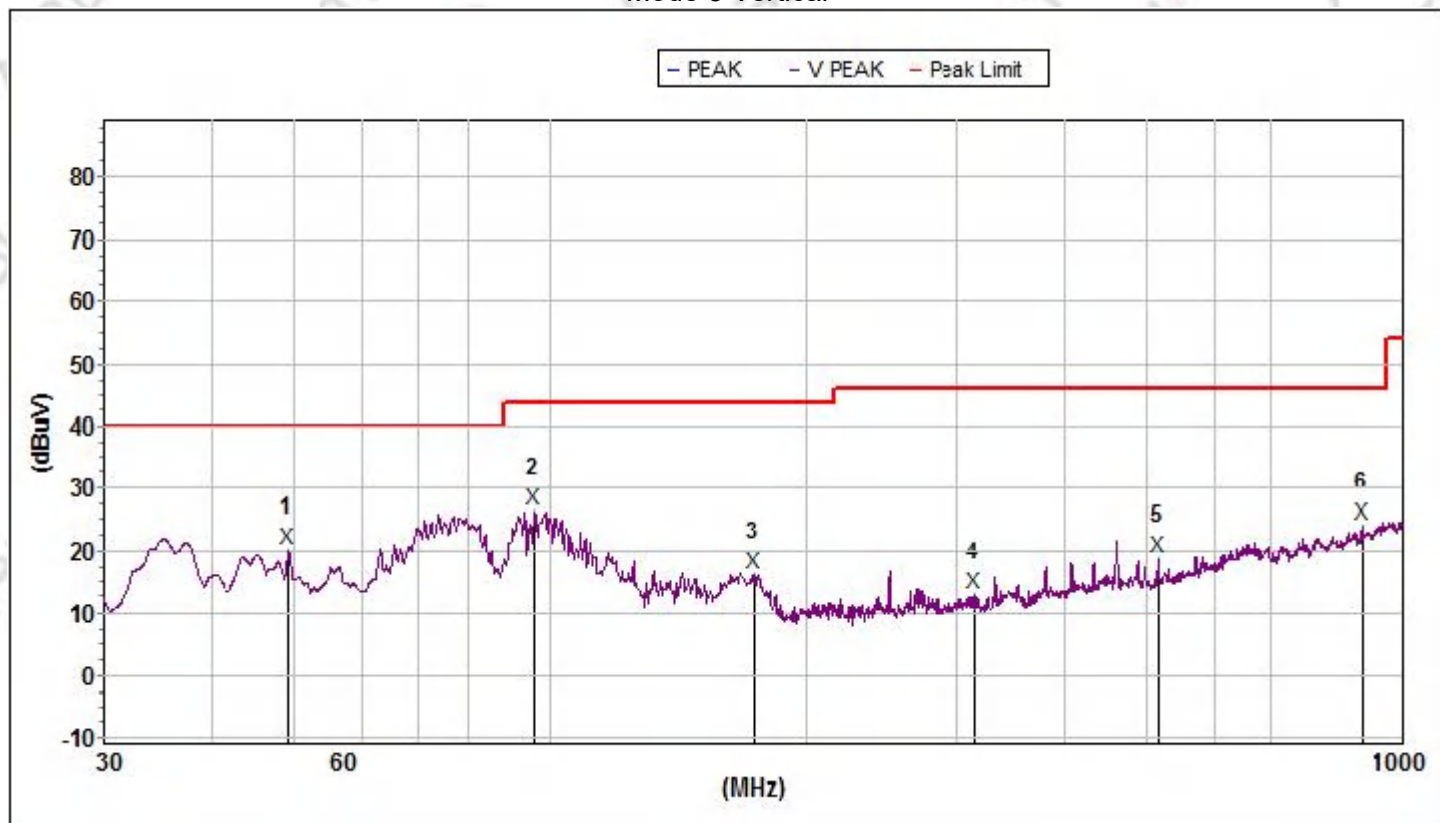

Mk.	Freq.(MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.F/G. (dB/m)	Amp.G. (dB)	Cbl.L. (dB)	Pol.
Peak								
1	49.359419	20.3	40.0	19.7	13.6	32.6	0.8	V
2	95.930246	26.5	43.5	17.0	9.9	32.9	1.3	V
3	172.901670	16.4	43.5	27.1	12.7	32.8	1.8	V
4	314.928129	13.1	46.0	32.9	13.1	32.6	2.7	V
5	516.341886	19.0	46.0	27.0	16.8	32.4	2.9	V
6	892.290853	24.1	46.0	21.9	21.5	31.7	3.6	V

1GHz~18GHz


Mode 1 Horizontal

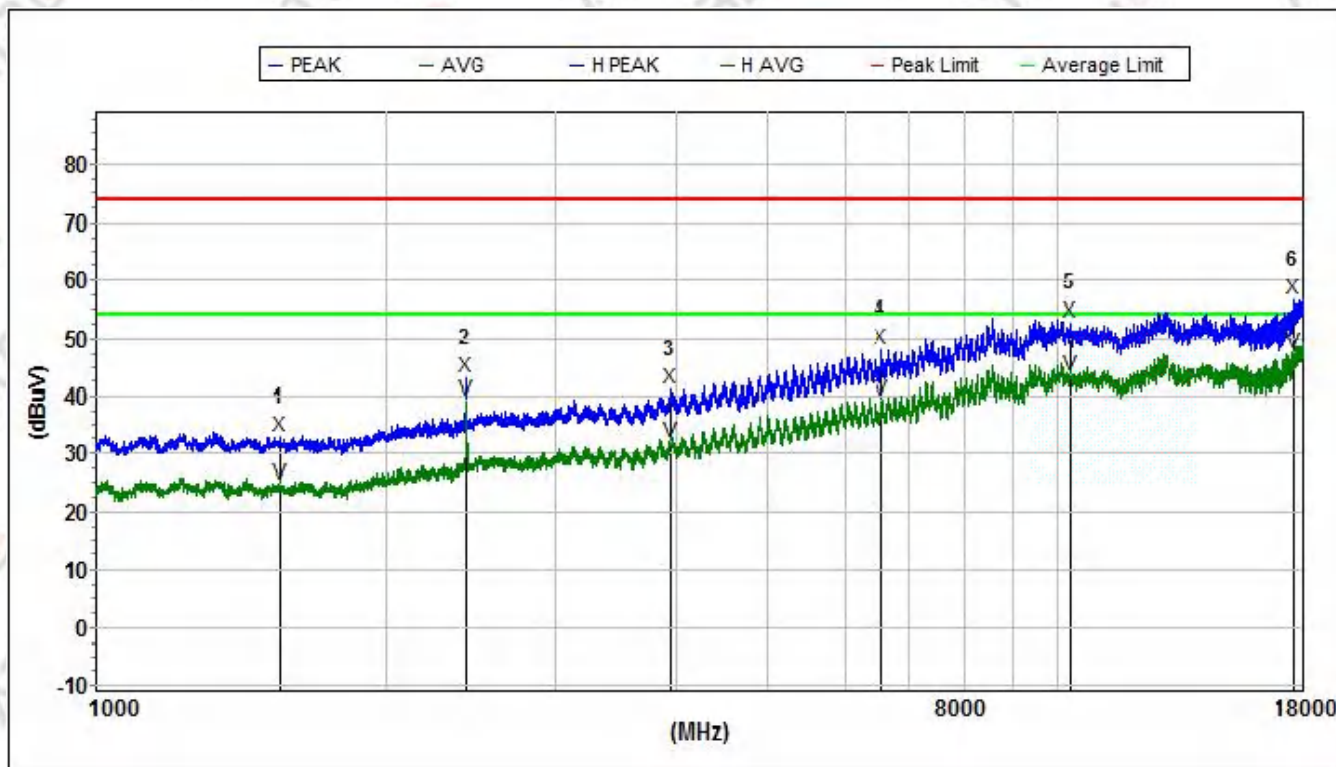

Mk.	Freq.(MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.F/G. (dB/m)	Amp.G. (dB)	Cbl.L. (dB)	Pol.
Peak								
1	1549.950000	33.0	74.0	41.0	25.3	61.3	2.5	H
2	2421.200000	43.4	74.0	30.6	27.4	59.4	2.8	H
3	3953.750000	41.2	74.0	32.8	30.8	58.5	3.2	H
4	6564.950000	48.3	74.0	25.7	35.4	58.0	4.2	H
5	10303.250000	52.7	74.0	21.3	38.8	60.8	5.5	H
6	17593.700000	56.9	74.0	17.1	39.8	58.0	6.9	H
AVG								
1	1549.950000	24.7	54.0	29.3	25.3	61.3	2.5	H
2	2421.200000	39.3	54.0	14.7	27.4	59.4	2.8	H
3	3953.750000	32.1	54.0	21.9	30.8	58.5	3.2	H
4	6564.950000	39.4	54.0	14.6	35.4	58.0	4.2	H
5	10303.250000	43.5	54.0	10.5	38.8	60.8	5.5	H
6	17593.700000	47.7	54.0	6.3	39.8	58.0	6.9	H

1GHz~18GHz


Mode 1 Vertical

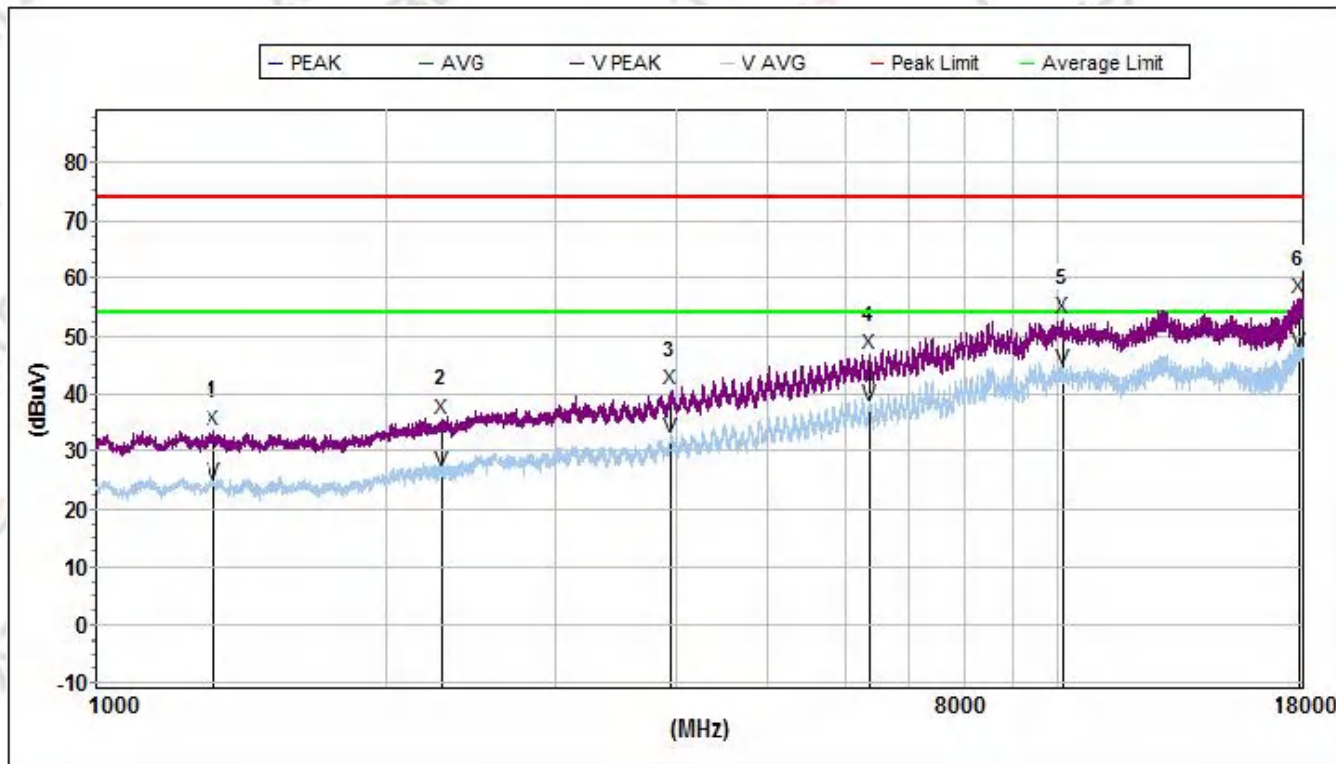

Mk.	Freq.(MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.F/G. (dB/m)	Amp.G. (dB)	Cbl.L. (dB)	Pol.
Peak								
1	1326.400000	33.7	74.0	40.3	25.8	61.1	2.3	V
2	2288.600000	35.7	74.0	38.3	27.2	60.0	2.8	V
3	3959.700000	40.6	74.0	33.4	30.8	58.5	3.3	V
4	6355.000000	46.8	74.0	27.2	34.5	58.0	4.2	V
5	10102.650000	53.2	74.0	20.8	38.6	60.4	5.4	V
6	17809.600000	56.5	74.0	17.5	41.2	57.8	7.0	V
AVG								
1	1326.400000	24.6	54.0	29.4	25.8	61.1	2.3	V
2	2288.600000	26.6	54.0	27.4	27.2	60.0	2.8	V
3	3959.700000	32.3	54.0	21.7	30.8	58.5	3.3	V
4	6355.000000	38.0	54.0	16.0	34.5	58.0	4.2	V
5	10102.650000	44.3	54.0	9.7	38.6	60.4	5.4	V
6	17809.600000	47.3	54.0	6.7	41.2	57.8	7.0	V

1GHz~18GHz


Mode 2 Horizontal

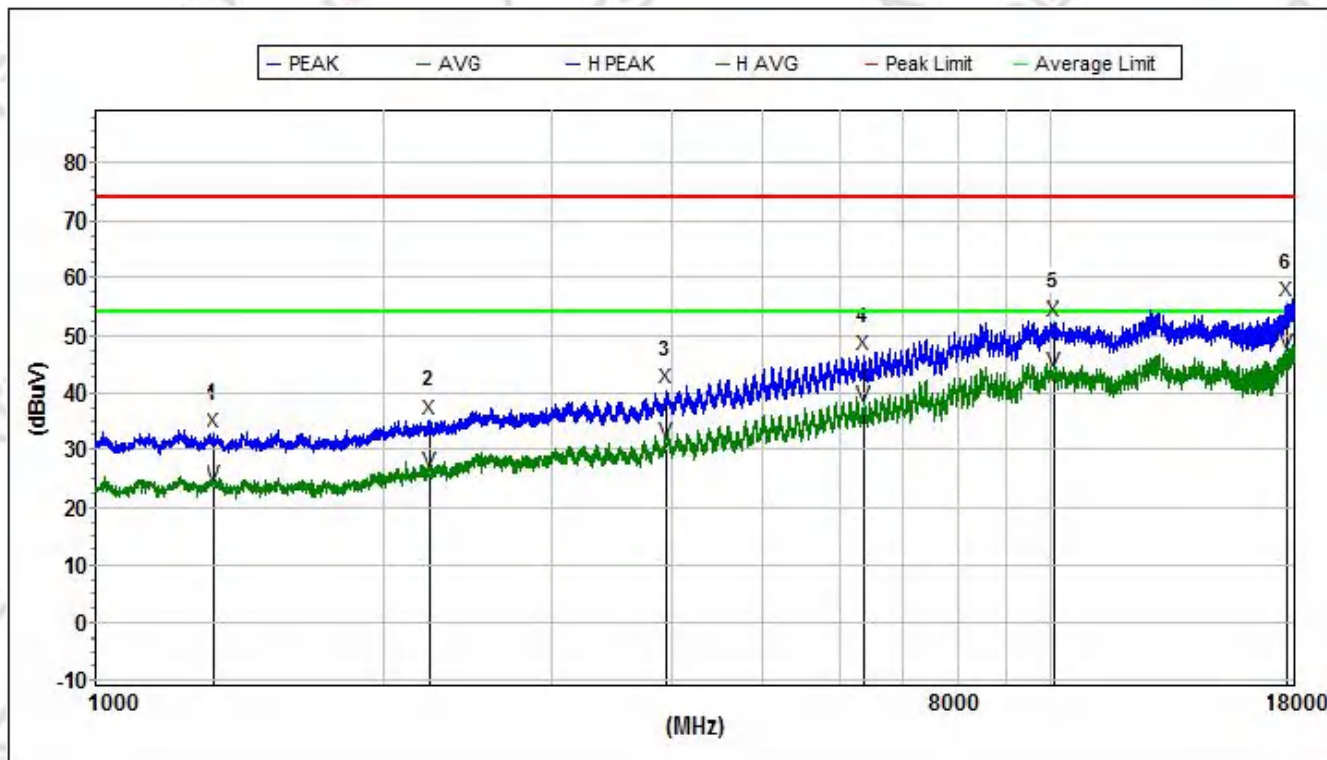

Mk.	Freq.(MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.F/G. (dB/m)	Amp.G. (dB)	Cbl.L. (dB)	Pol.
Peak								
1	1331.500000	33.2	74.0	40.8	25.8	61.2	2.3	H
2	2230.800000	35.3	74.0	38.7	27.2	60.3	2.8	H
3	3952.050000	40.5	74.0	33.5	30.8	58.5	3.2	H
4	6356.700000	46.7	74.0	27.3	34.5	58.0	4.2	H
5	10088.200000	52.5	74.0	21.5	38.6	60.4	5.4	H
6	17680.400000	55.9	74.0	18.1	40.4	57.9	6.9	H
AVG								H
1	1331.500000	24.0	54.0	30.0	25.8	61.2	2.3	H
2	2230.800000	26.1	54.0	27.9	27.2	60.3	2.8	H
3	3952.050000	31.3	54.0	22.7	30.8	58.5	3.2	H
4	6356.700000	37.7	54.0	16.3	34.5	58.0	4.2	H
5	10088.200000	43.6	54.0	10.4	38.6	60.4	5.4	H
6	17680.400000	47.0	54.0	7.0	40.4	57.9	6.9	H

1GHz~18GHz


Mode 2 Vertical

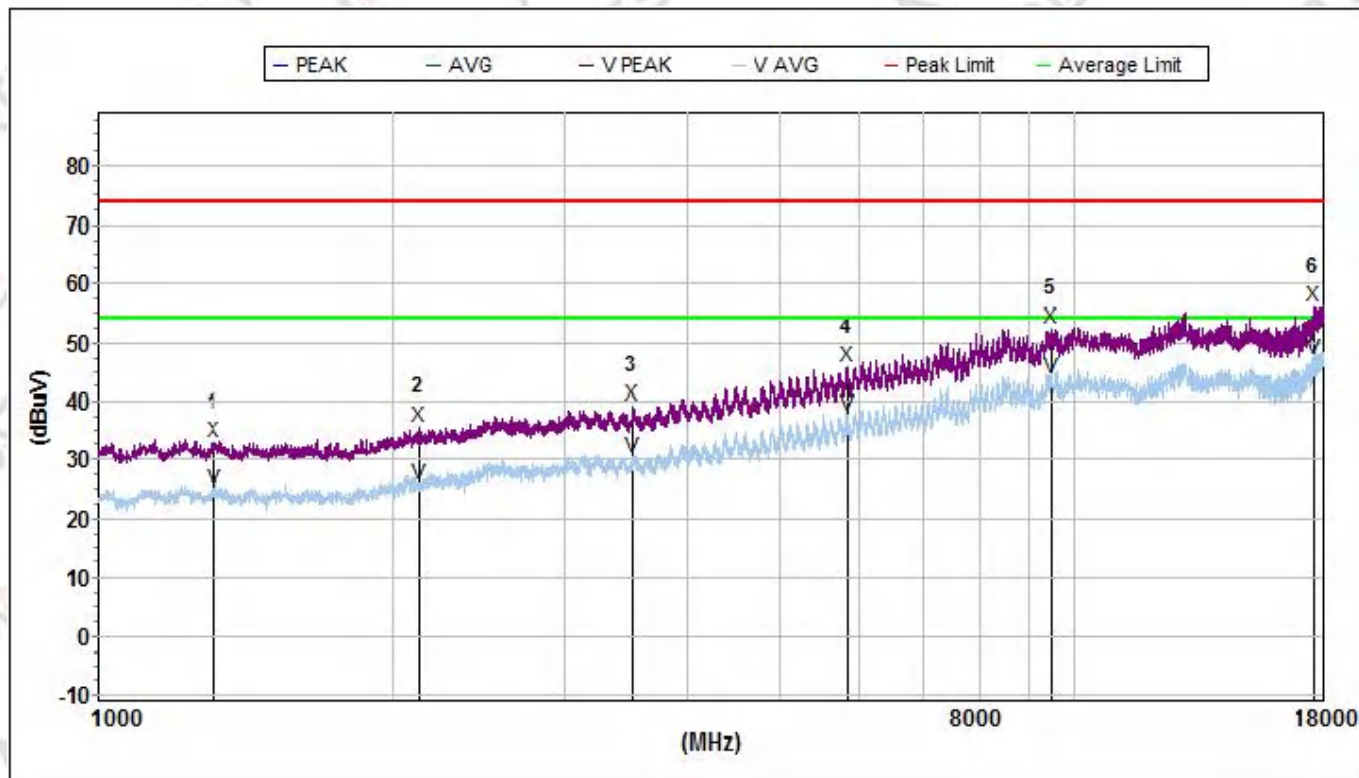

Mk.	Freq.(MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.F/G. (dB/m)	Amp.G. (dB)	Cbl.L. (dB)	Pol.
Peak								
1	1314.500000	33.1	74.0	40.9	25.8	61.1	2.3	V
2	2131.350000	35.6	74.0	38.4	27.2	60.8	2.7	V
3	3535.550000	39.2	74.0	34.8	29.5	59.0	3.1	V
4	5838.200000	45.8	74.0	28.2	33.9	58.1	4.1	V
5	9466.000000	52.6	74.0	21.4	38.6	59.7	5.4	V
6	17597.950000	56.1	74.0	17.9	39.9	58.0	6.9	V
AVG								
1	1314.500000	24.8	54.0	29.2	25.8	61.1	2.3	V
2	2131.350000	25.7	54.0	28.3	27.2	60.8	2.7	V
3	3535.550000	30.6	54.0	23.4	29.5	59.0	3.1	V
4	5838.200000	37.6	54.0	16.4	33.9	58.1	4.1	V
5	9466.000000	44.0	54.0	10.0	38.6	59.7	5.4	V
6	17597.950000	47.1	54.0	6.9	39.9	58.0	6.9	V

1GHz~18GHz


Mode 3Horizontal

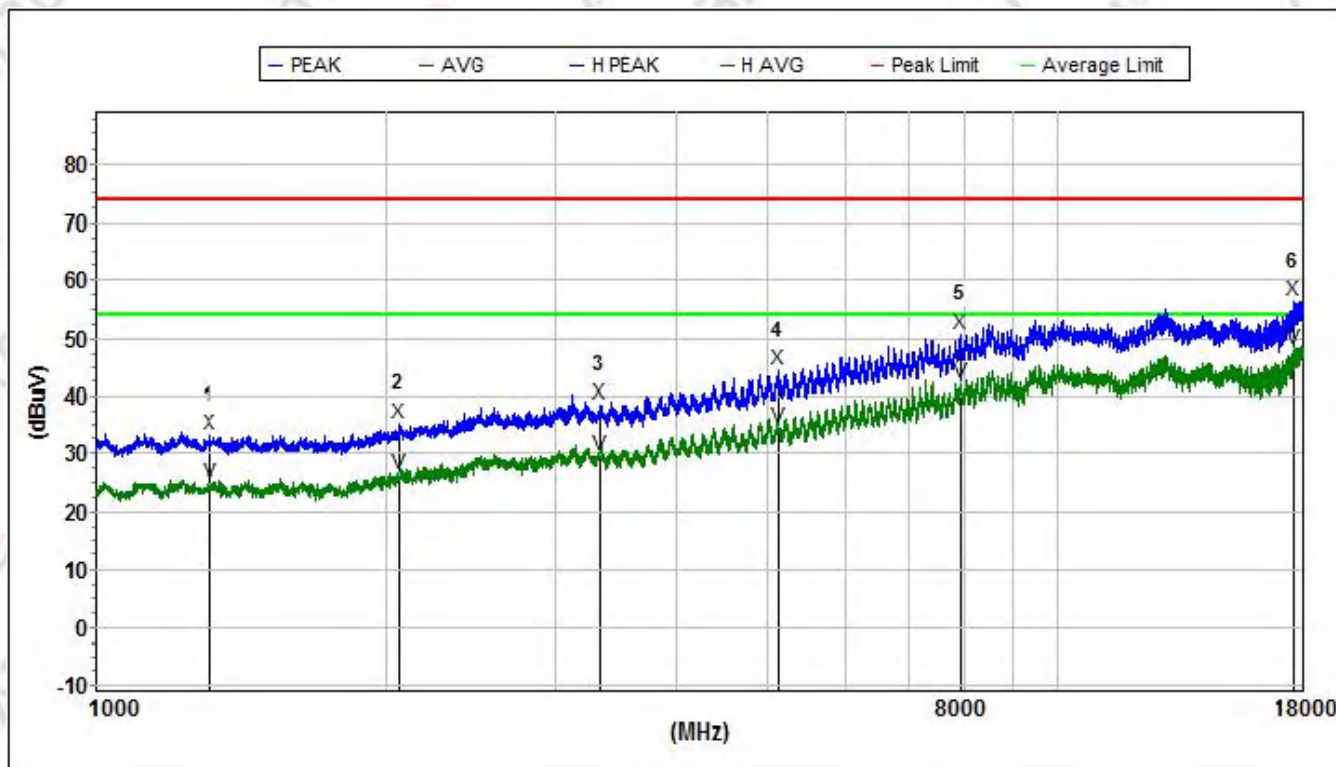

Mk.	Freq.(MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.F/G. (dB/m)	Amp.G. (dB)	Cbl.L. (dB)	Pol.
Peak								
1	1312.800000	33.5	74.0	40.5	25.8	61.1	2.3	H
2	2061.650000	35.3	74.0	38.7	26.9	60.9	2.7	H
3	3330.700000	38.7	74.0	35.3	29.6	58.2	3.1	H
4	5119.950000	44.5	74.0	29.5	33.0	57.5	3.7	H
5	7907.950000	50.7	74.0	23.3	37.2	57.4	4.8	H
6	17595.400000	56.5	74.0	17.5	39.8	58.0	6.9	H
AVG								
1	1312.800000	24.7	54.0	29.3	25.8	61.1	2.3	H
2	2061.650000	26.4	54.0	27.6	26.9	60.9	2.7	H
3	3330.700000	29.8	54.0	24.2	29.6	58.2	3.1	H
4	5119.950000	34.8	54.0	19.2	33.0	57.5	3.7	H
5	7907.950000	42.3	54.0	11.7	37.2	57.4	4.8	H
6	17595.400000	48.2	54.0	5.8	39.8	58.0	6.9	H

1GHz~18GHz

Mode 3Vertical

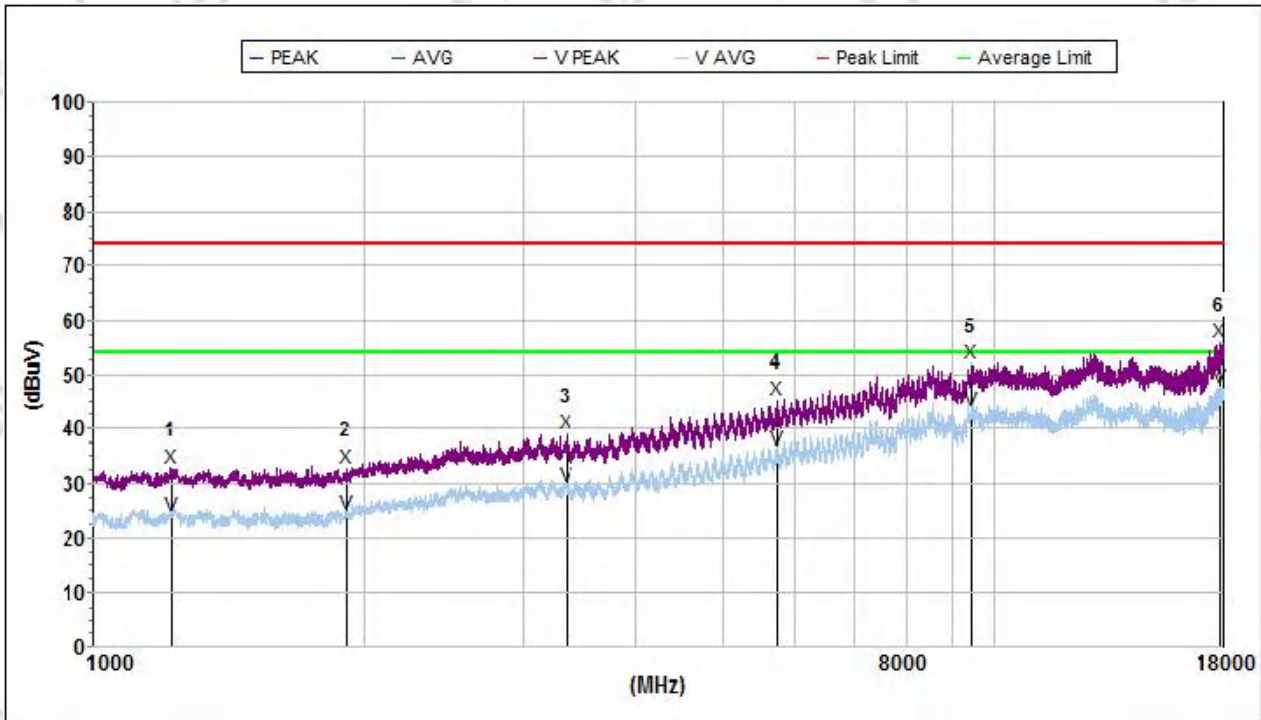

Mk.	Freq.(MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.F/G. (dB/m)	Amp.G. (dB)	Cbl.L. (dB)	Pol.
Peak								
1	1217.600000	33.0	74.0	41.0	25.7	60.9	2.3	V
2	2015.750000	34.3	74.0	39.7	26.6	60.9	2.7	V
3	3339.200000	37.8	74.0	36.2	29.6	58.2	3.1	V
4	5620.600000	45.7	74.0	28.3	33.0	58.1	4.0	V
5	8749.450000	51.3	74.0	22.7	38.1	58.0	5.2	V
6	17592.000000	56.5	74.0	17.5	39.8	58.0	6.9	V
AVG								
1	1217.600000	24.1	54.0	29.9	25.7	60.9	2.3	V
2	2015.750000	25.1	54.0	28.9	26.6	60.9	2.7	V
3	3339.200000	29.4	54.0	24.6	29.6	58.2	3.1	V
4	5620.600000	35.7	54.0	18.3	33.0	58.1	4.0	V
5	8749.450000	42.5	54.0	11.5	38.1	58.0	5.2	V
6	17592.000000	46.9	54.0	7.1	39.8	58.0	6.9	V


Note:

- Factor=Ant.Factor+cable loss-Amp.Gain .
- Level contains the factor;Margin=Limit-Level.
- 802.11b, 802.11g, 802.11n (HT-20), 802.11n (HT-40) mode all have been tested, the worst case is 802.11b, only show the worst case.
- Other 18G-25G Emission detected are more than 20dB below the limit.

3.2.6 TEST RESULTS (BAND EDGE REQUIREMENTS)


802.11b-2412MHz

Horizontal

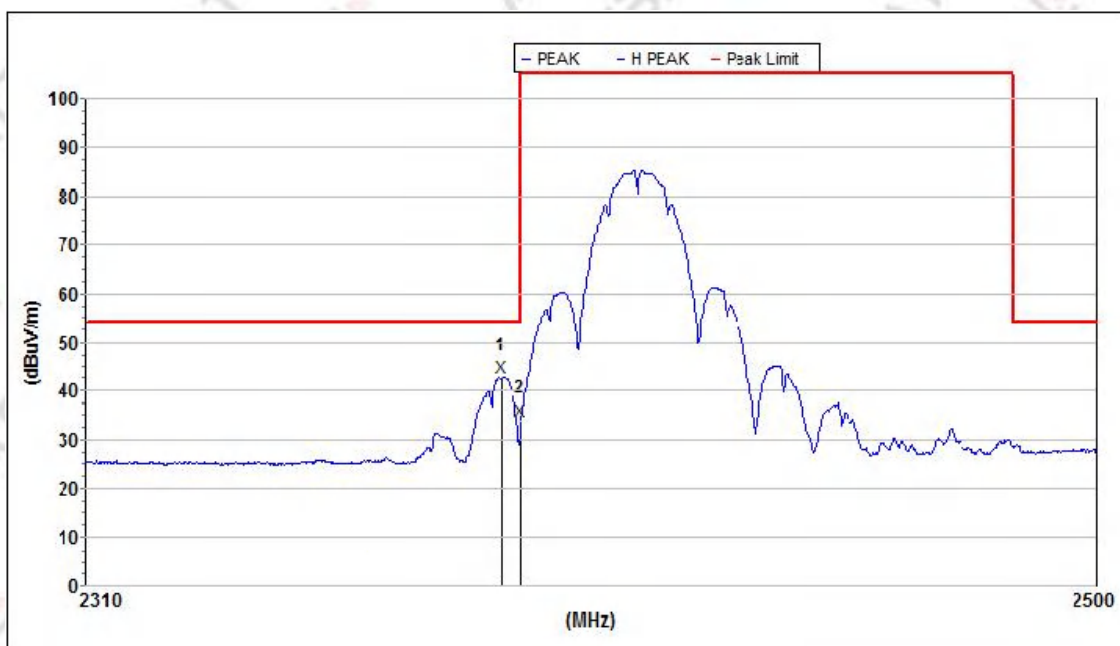

Mk.	Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.F/G. (dB/m)	Amp.G. (dB)	Cbl.L. (dB)	Pol.
AVG								
1	2386.088083	42.8	54.0	11.2	27.3	59.6	2.8	H
2	2390.000000	34.0	54.0	20.0	27.3	59.6	2.8	H


Vertical

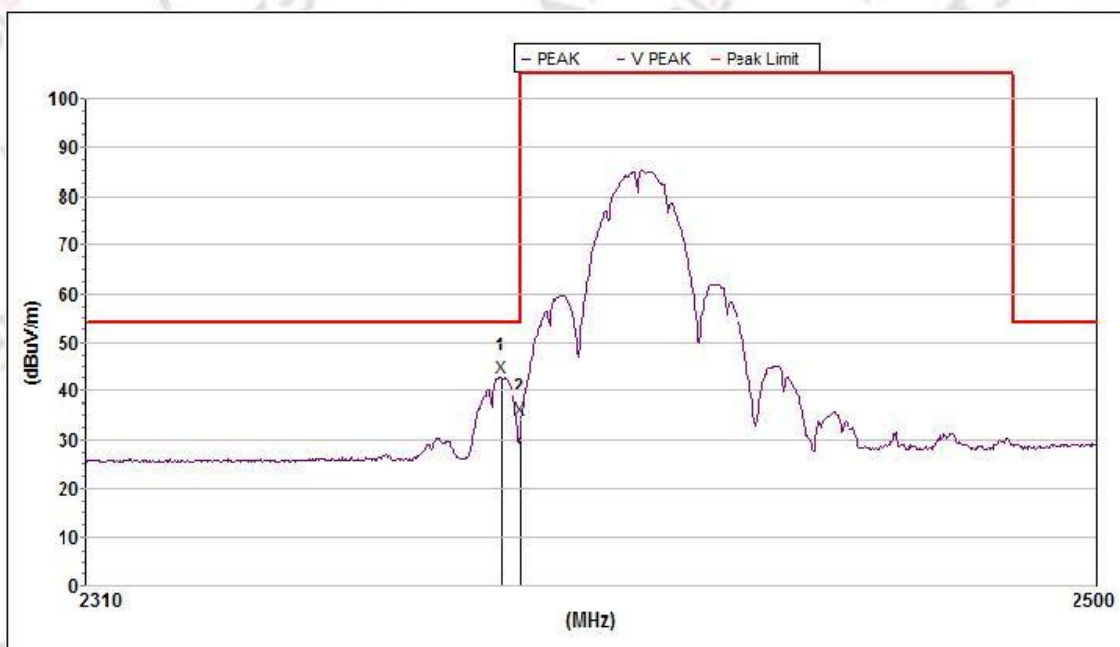

Mk.	Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.F/G. (dB/m)	Amp.G. (dB)	Cbl.L. (dB)	Pol.
AVG								
1	2386.088083	42.7	54.0	11.3	27.3	59.6	2.8	V
2	2390.000000	34.1	54.0	19.9	27.3	59.6	2.8	V


802.11b-2412MHz

Horizontal

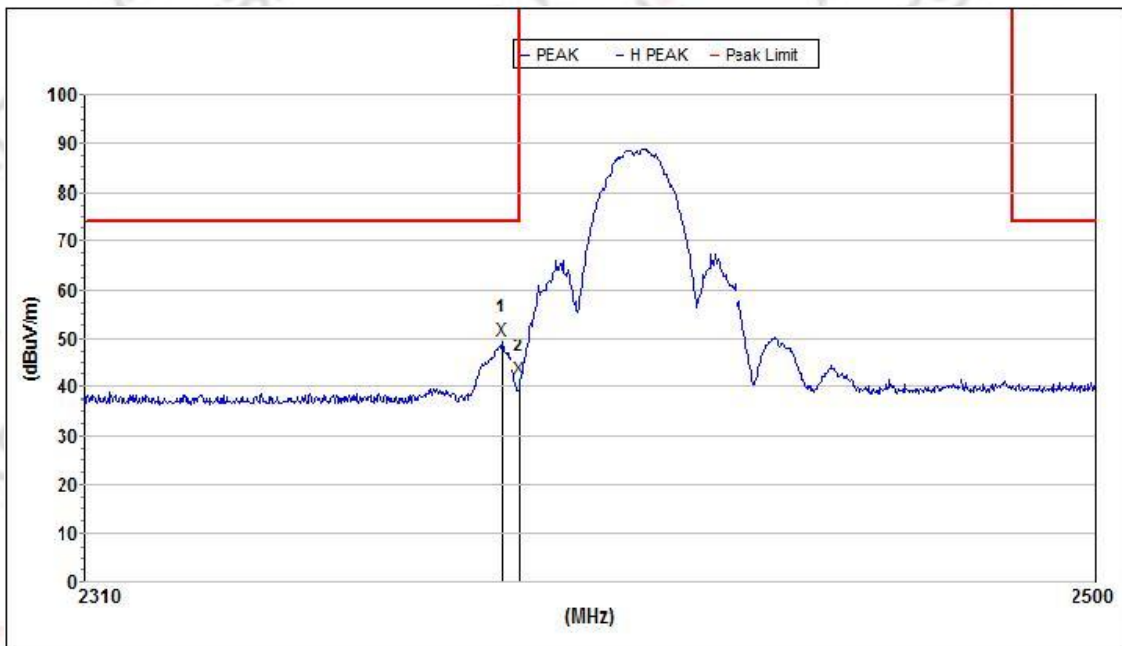

Mk.	Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.F/G. (dB/m)	Amp.G. (dB)	Cbl.L. (dB)	Pol.
Peak								
1	2386.465321	49.6	74.0	24.4	27.3	59.6	2.8	H
2	2390.000000	41.8	74.0	32.2	27.3	59.6	2.8	H


Vertical

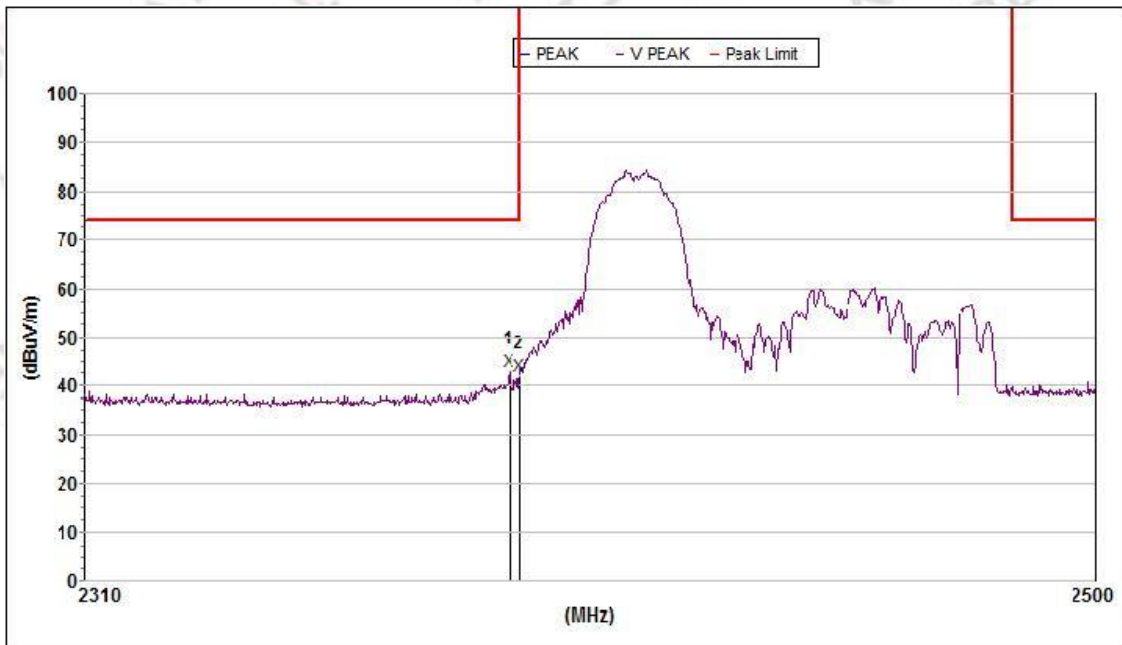

Mk.	Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.F/G. (dB/m)	Amp.G. (dB)	Cbl.L. (dB)	Pol.
Peak								
1	2385.899486	47.4	74.0	26.6	27.3	59.6	2.8	V
2	2390.000000	40.1	74.0	33.9	27.3	59.6	2.8	V


802.11b-2462MHz

Horizontal

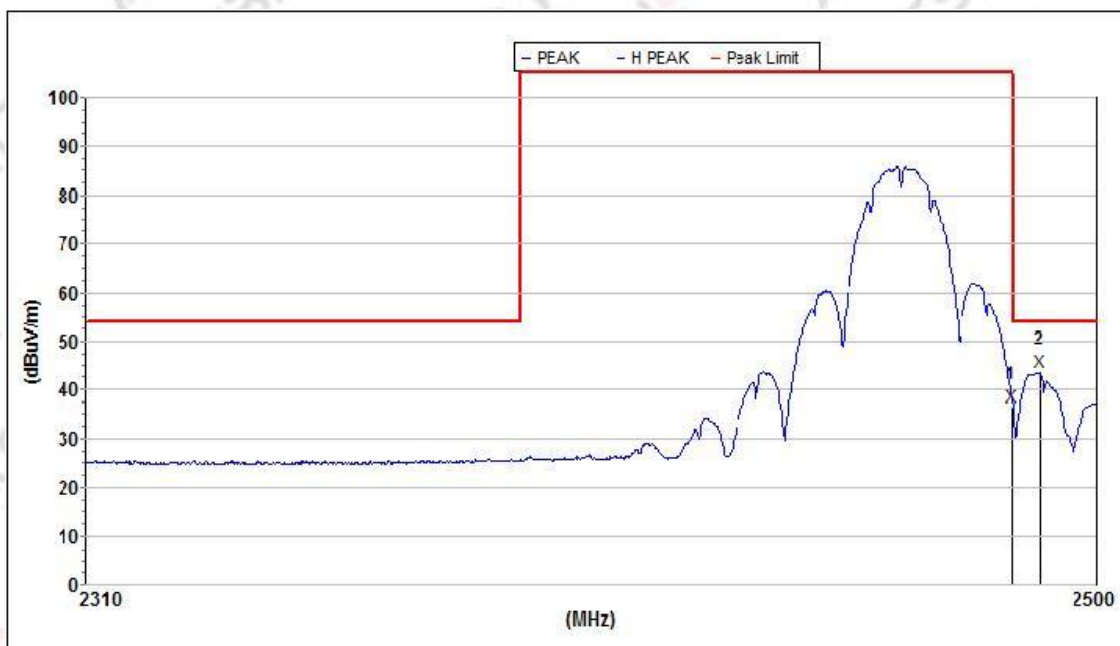

Mk.	Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.F/G. (dB/m)	Amp.G. (dB)	Cbl.L. (dB)	Pol.
AVG								
1	2483.501000	36.4	54.0	17.6	27.6	58.9	2.8	H
2	2488.761679	43.7	54.0	10.3	27.7	58.9	2.8	H


Vertical

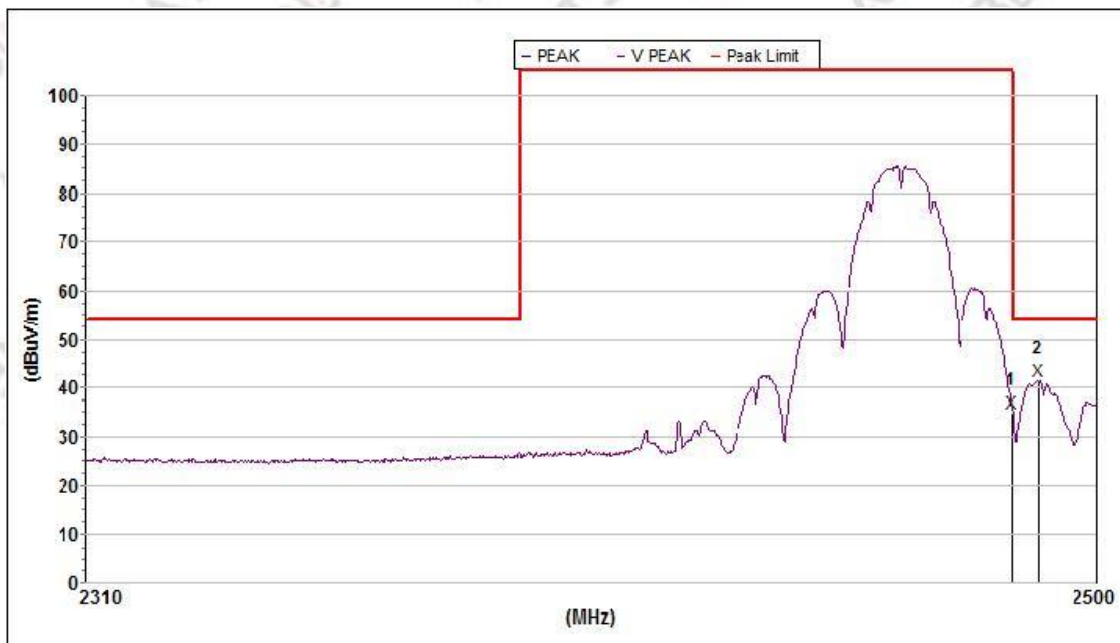

Mk.	Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.F/G. (dB/m)	Amp.G. (dB)	Cbl.L. (dB)	Pol.
AVG								
1	2483.501000	34.8	54.0	19.2	27.6	58.9	2.8	V
2	2488.564967	41.4	54.0	12.6	27.7	58.9	2.8	V


802.11b-2462MHz

Horizontal

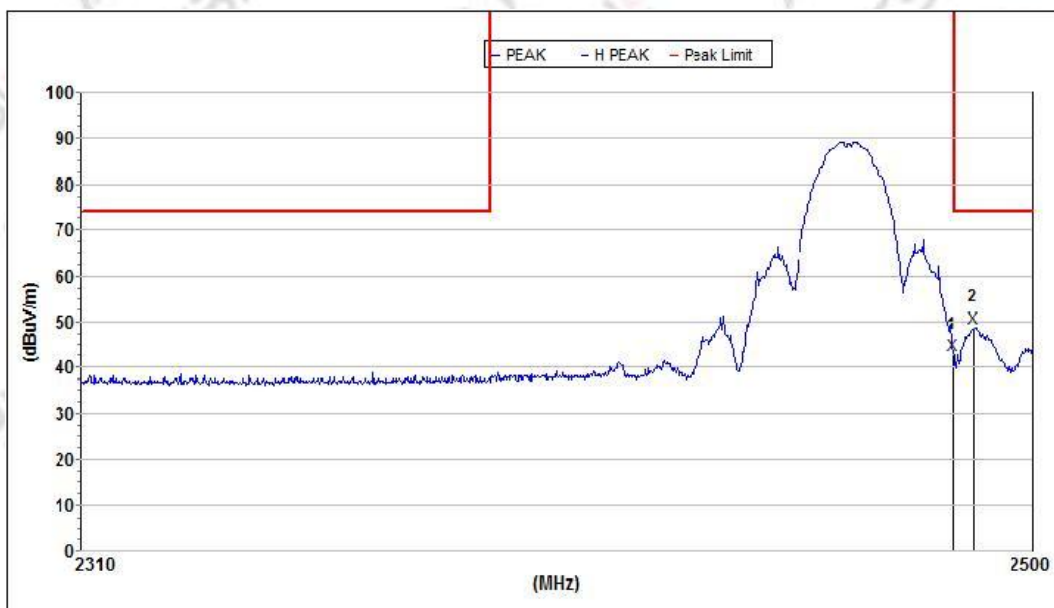

Mk.	Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.F/G. (dB/m)	Amp.G. (dB)	Cbl.L. (dB)	Pol.
Peak								
1	2483.501000	42.7	74.0	31.3	27.7	58.9	2.8	H
2	2487.581641	48.7	74.0	25.3	27.7	58.9	2.8	H


Vertical

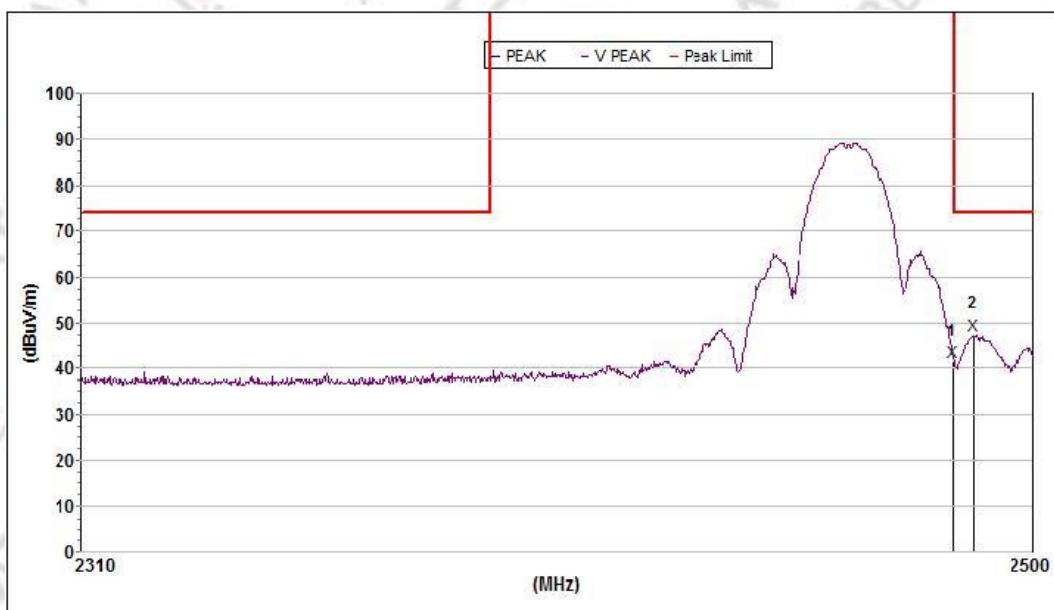

Mk.	Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.F/G. (dB/m)	Amp.G. (dB)	Cbl.L. (dB)	Pol.
Peak								
1	2483.501000	41.4	74.0	32.6	27.6	58.9	2.8	V
2	2487.778275	47.4	74.0	26.6	27.7	58.9	2.8	V


802.11g-2412MHz

Horizontal

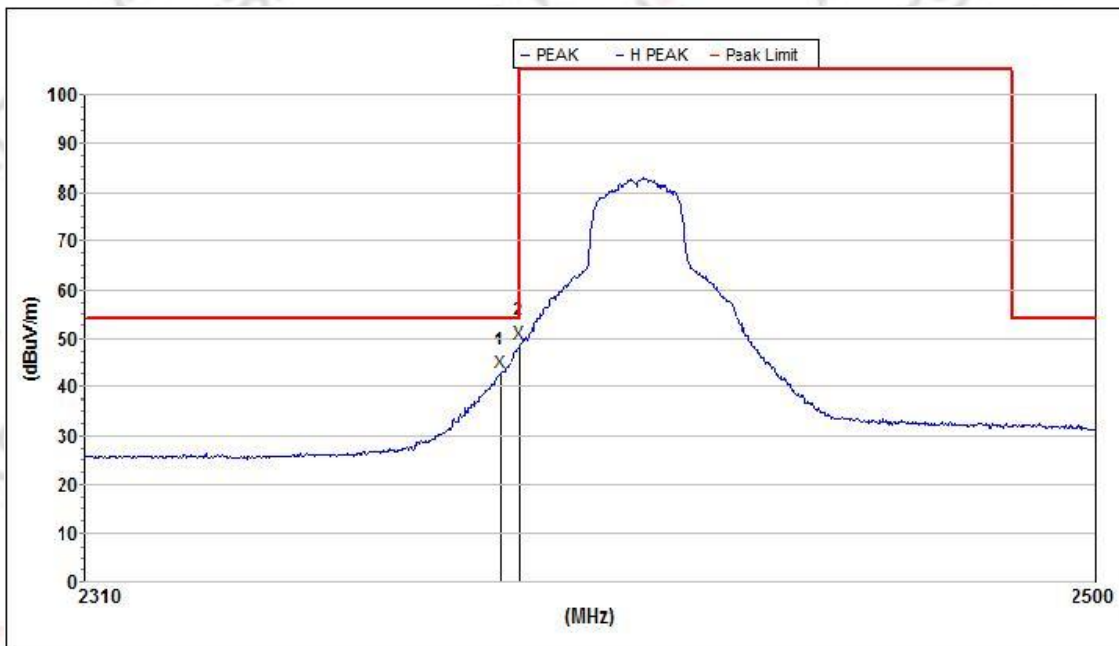

Mk.	Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.F/G. (dB/m)	Amp.G. (dB)	Cbl.L. (dB)	Pol.
AVG								
1	2386.276694	43.0	54.0	11.0	27.3	59.6	2.8	H
2	2390.000000	48.9	54.0	5.1	27.3	59.5	2.8	H


Vertical

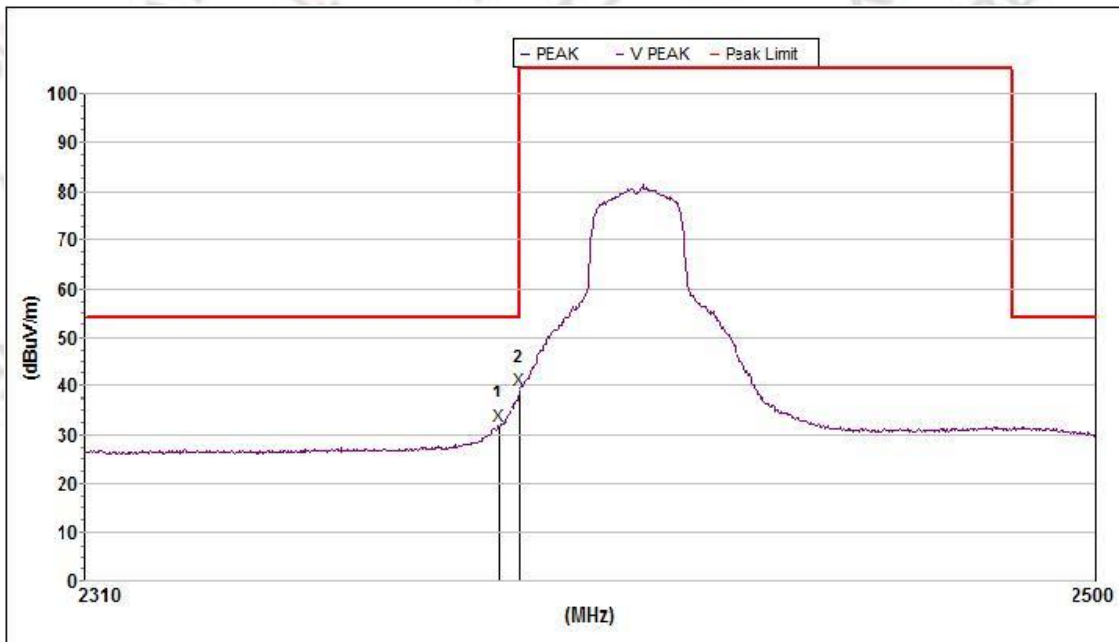

Mk.	Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.F/G. (dB/m)	Amp.G. (dB)	Cbl.L. (dB)	Pol.
AVG								
1	2385.899486	31.9	54.0	22.1	27.3	59.6	2.8	V
2	2390.000000	39.0	54.0	15.0	27.3	59.6	2.8	V


802.11g-2412MHz

Horizontal

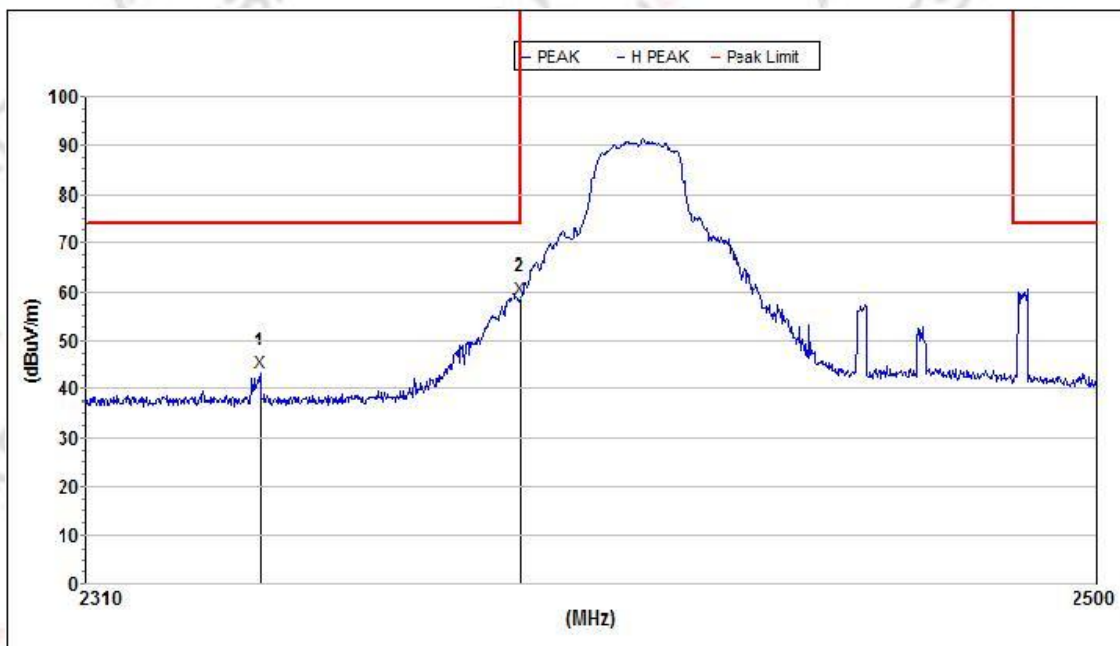

Mk.	Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.F/G. (dB/m)	Amp.G. (dB)	Cbl.L. (dB)	Pol.
Peak								
1	2341.619903	43.4	74.0	30.6	27.2	59.8	2.8	H
2	2390.000000	58.6	74.0	15.4	27.3	59.5	2.8	H


Vertical

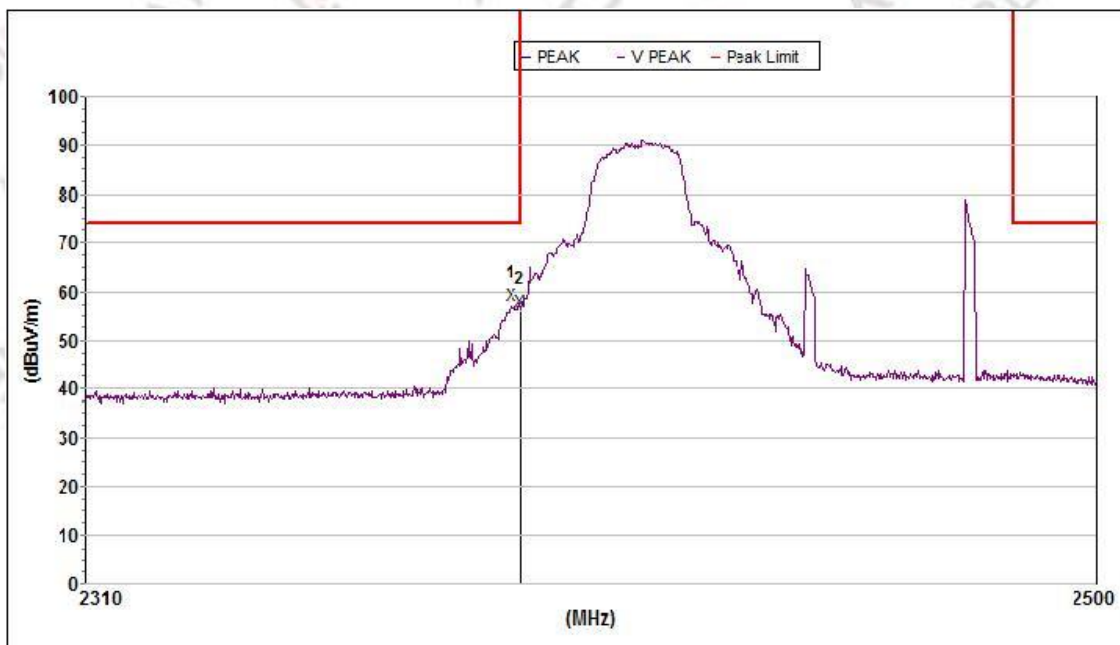

Mk.	Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.F/G. (dB/m)	Amp.G. (dB)	Cbl.L. (dB)	Pol.
Peak								
1	2388.163630	57.2	74.0	16.8	27.3	59.6	2.8	V
2	2390.000000	56.0	74.0	18.0	27.3	59.6	2.8	V


802.11g-2462MHz

Horizontal

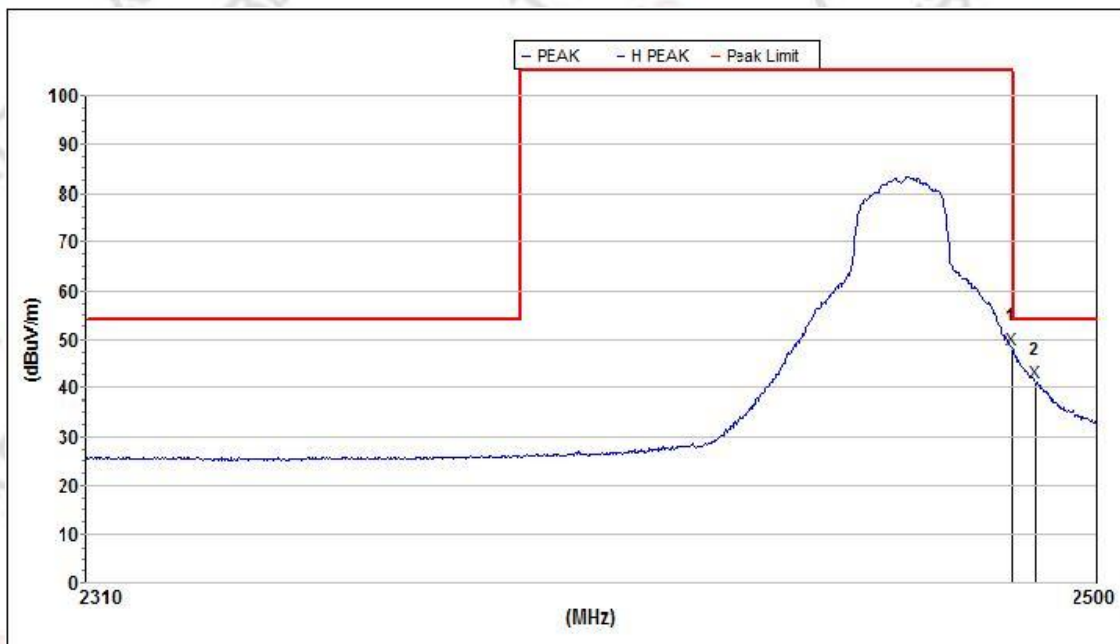

Mk.	Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.F/G. (dB/m)	Amp.G. (dB)	Cbl.L. (dB)	Pol.
AVG								
1	2483.501000	47.9	54.0	6.1	27.7	58.9	2.8	H
2	2487.974924	41.2	54.0	12.8	27.7	58.9	2.8	H


Vertical

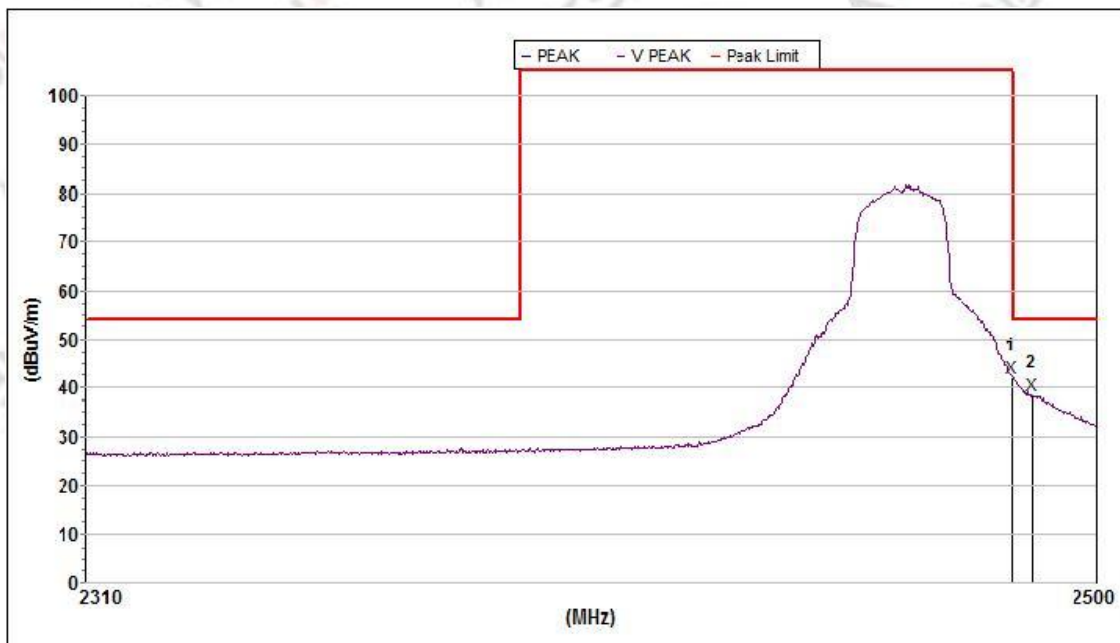

Mk.	Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.F/G. (dB/m)	Amp.G. (dB)	Cbl.L. (dB)	Pol.
AVG								
1	2483.501000	42.2	54.0	11.8	27.7	58.9	2.8	V
2	2487.385022	38.4	54.0	15.6	27.7	58.9	2.8	V


802.11g-2462MHz

Horizontal

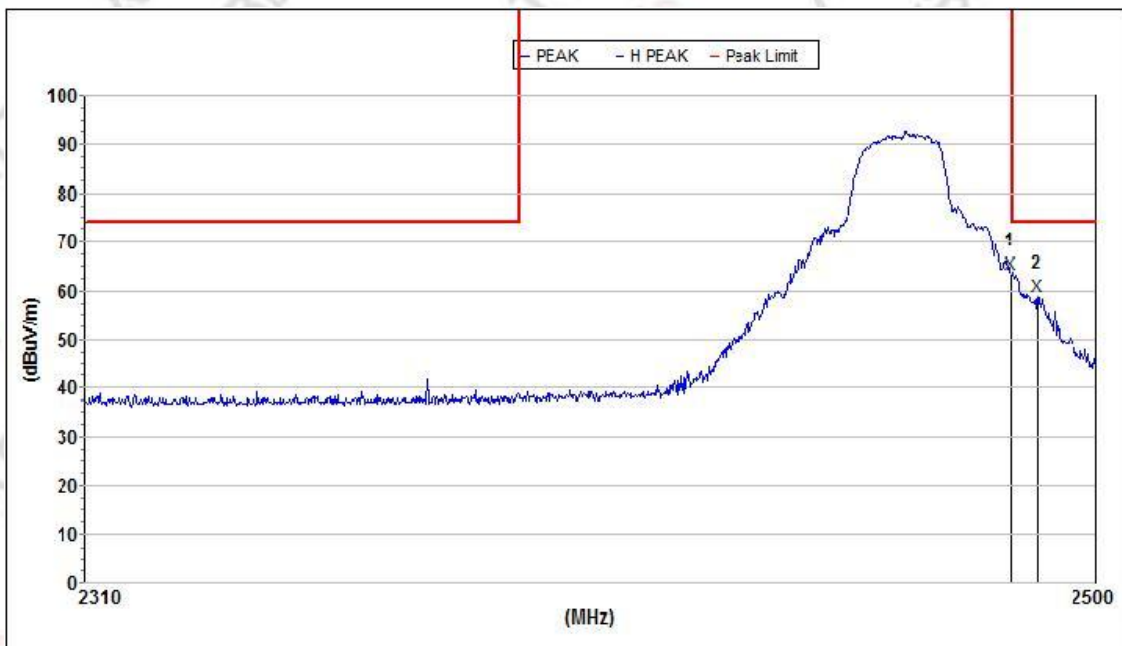

Mk.	Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.F/G. (dB/m)	Amp.G. (dB)	Cbl.L. (dB)	Pol.
Peak								
1	2483.501000	63.6	74.0	10.4	27.7	58.9	2.8	H
2	2488.564967	58.9	74.0	15.1	27.7	58.9	2.8	H


Vertical

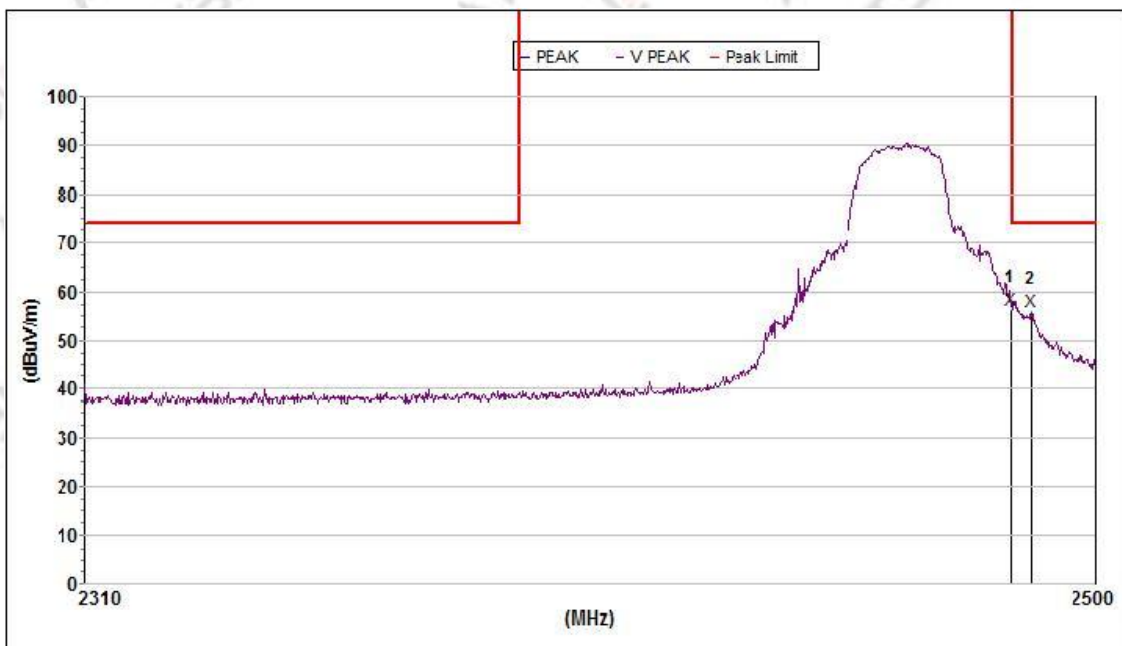

Mk.	Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.F/G. (dB/m)	Amp.G. (dB)	Cbl.L. (dB)	Pol.
Peak								
1	2483.501000	56.4	74.0	17.6	27.7	58.9	2.8	V
2	2487.385022	55.9	74.0	18.1	27.7	58.9	2.8	V


802.11n20-2412MHz

Horizontal

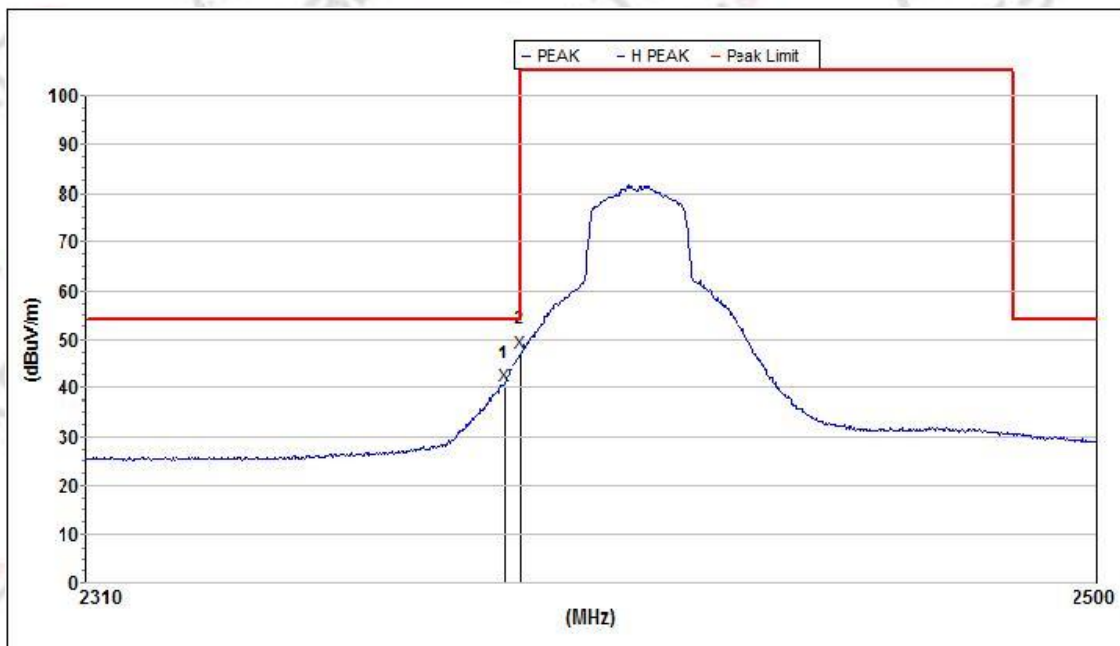

Mk.	Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.F/G. (dB/m)	Amp.G. (dB)	Cbl.L. (dB)	Pol.
AVG								
1	2386.653962	40.6	54.0	13.4	27.3	59.6	2.8	H
2	2390.000000	47.3	54.0	6.7	27.3	59.6	2.8	H


Vertical

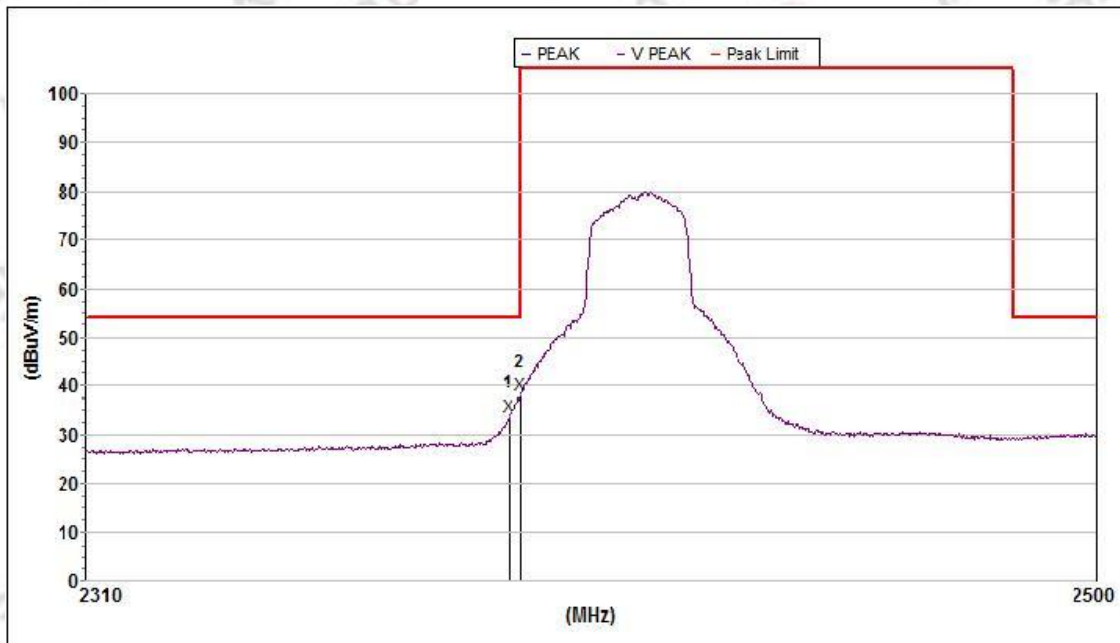

Mk.	Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.F/G. (dB/m)	Amp.G. (dB)	Cbl.L. (dB)	Pol.
AVG								
1	2387.786123	33.9	54.0	20.1	27.3	59.6	2.8	V
2	2390.000000	38.2	54.0	15.8	27.3	59.6	2.8	V


802.11n20-2412MHz

Horizontal


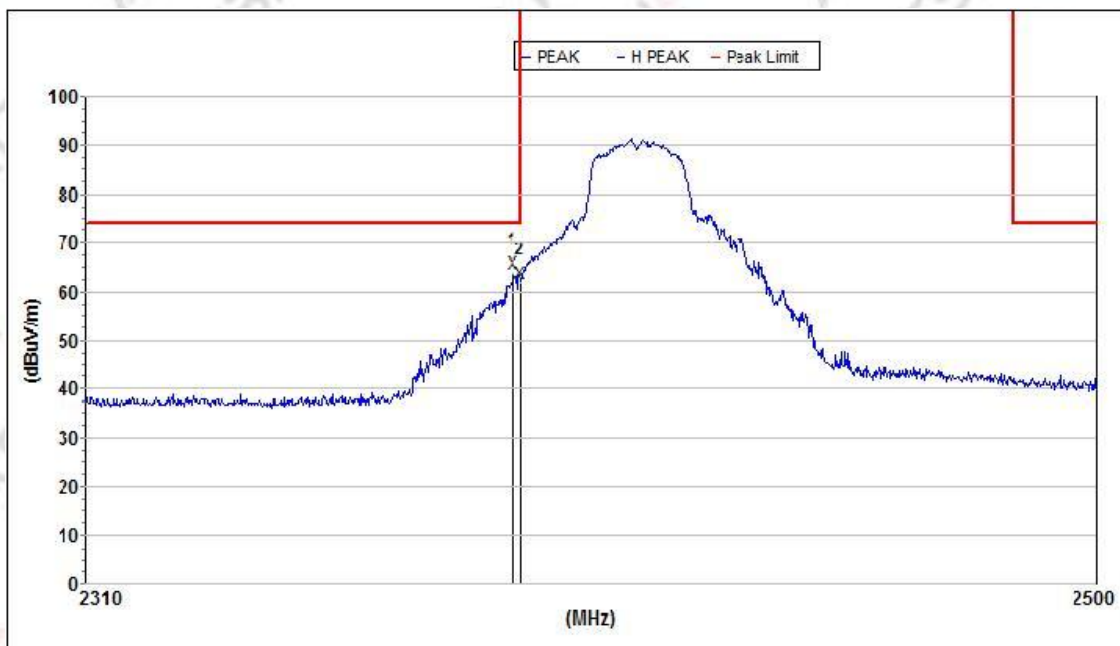


Mk.	Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.F/G. (dB/m)	Amp.G. (dB)	Cbl.L. (dB)	Pol.
Peak								
1	2388.541196	63.7	74.0	10.3	27.3	59.6	2.8	H
2	2390.000000	62.0	74.0	12.0	27.3	59.6	2.8	H

Vertical

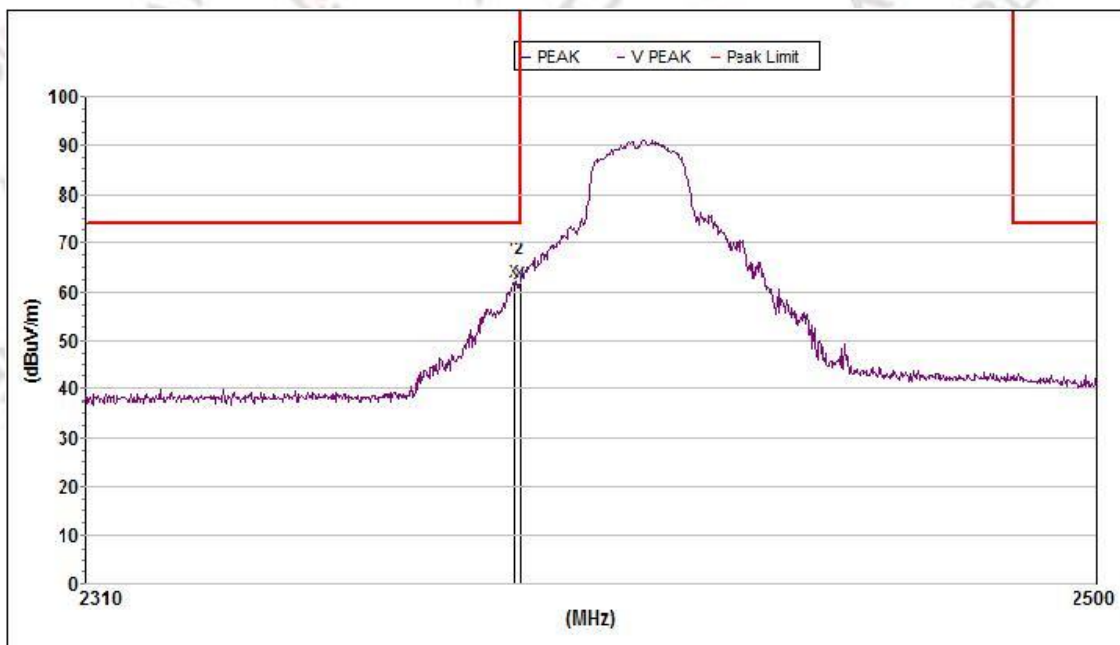


Mk.	Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.F/G. (dB/m)	Amp.G. (dB)	Cbl.L. (dB)	Pol.
Peak								
1	2388.730001	62.2	74.0	11.8	27.3	59.6	2.8	V
2	2390.000000	61.8	74.0	12.2	27.3	59.6	2.8	V

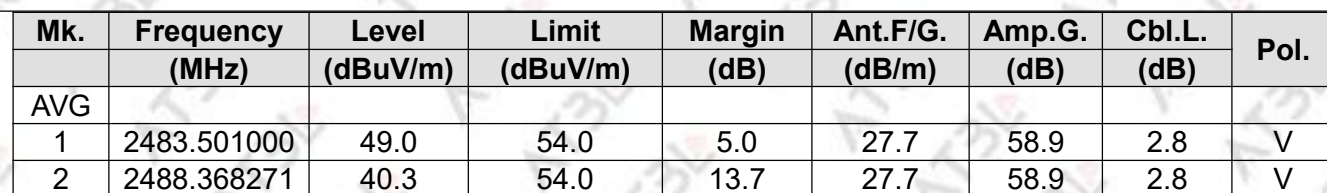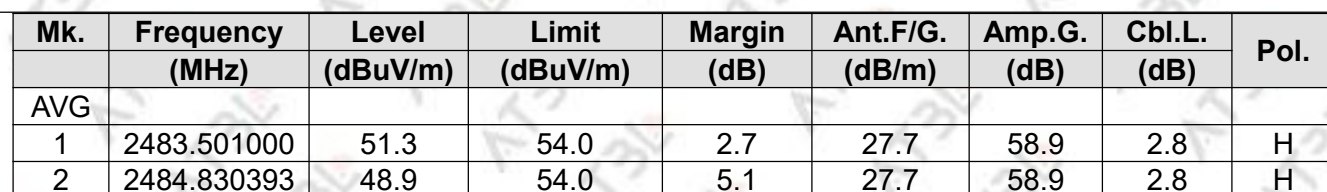


802.11n20-2462MHz

Horizontal

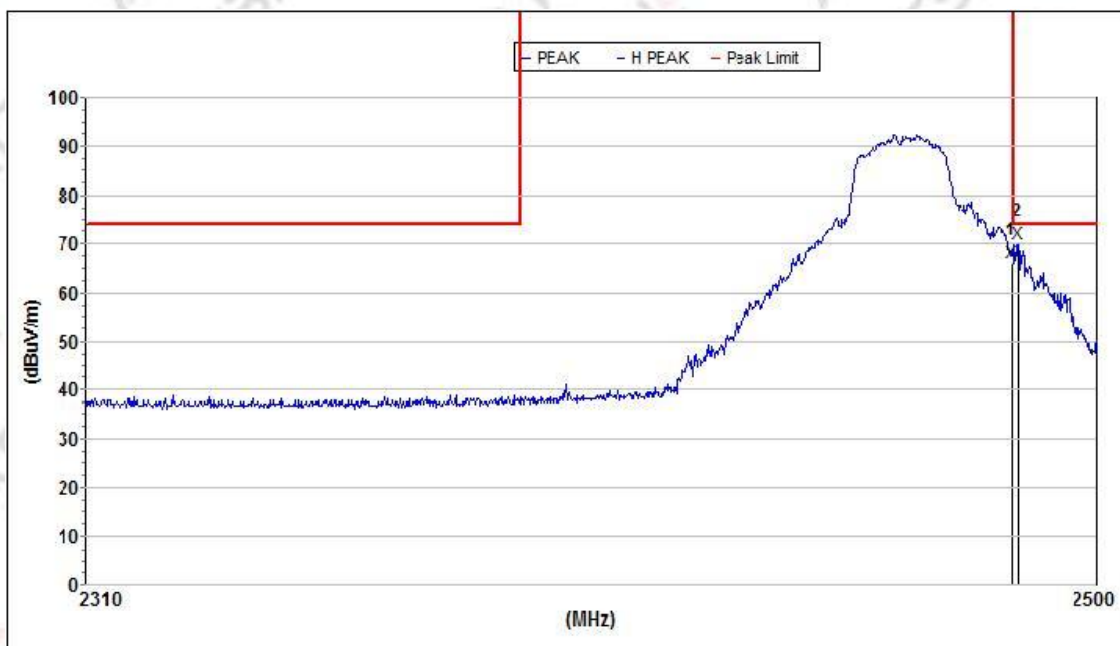

Mk.	Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.F/G. (dB/m)	Amp.G. (dB)	Cbl.L. (dB)	Pol.
Peak								
1	2483.501000	66.1	74.0	7.9	27.7	58.9	2.8	H
2	2484.633992	70.1	74.0	3.9	27.7	58.9	2.8	H


Vertical

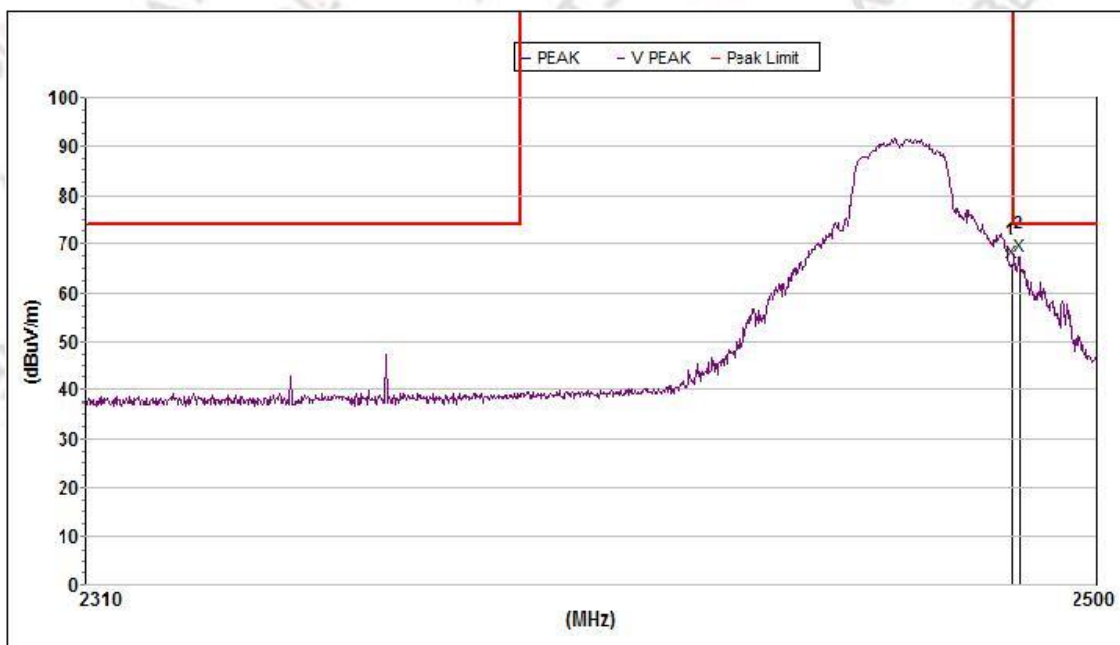

Mk.	Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.F/G. (dB/m)	Amp.G. (dB)	Cbl.L. (dB)	Pol.
Peak								
1	2483.501000	66.2	74.0	7.8	27.7	58.9	2.8	V
2	2484.830393	67.5	74.0	6.5	27.7	58.9	2.8	V


802.11n40-2422MHz

Horizontal

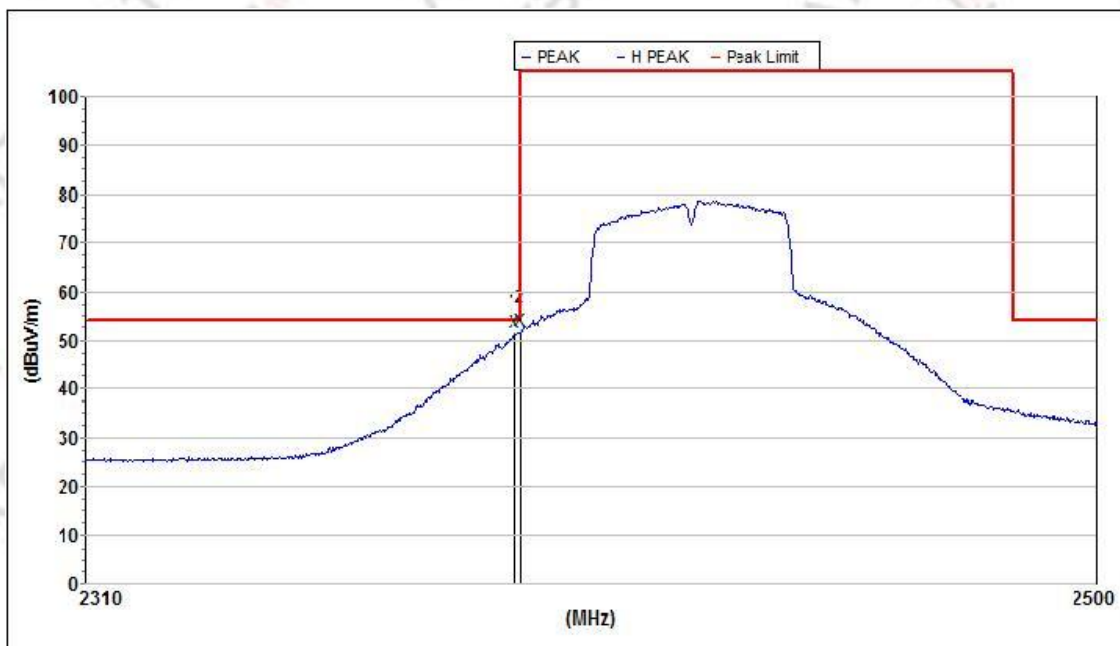

Mk.	Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.F/G. (dB/m)	Amp.G. (dB)	Cbl.L. (dB)	Pol.
AVG								
1	2388.918822	51.5	54.0	2.5	27.3	59.6	2.8	H
2	2390.000000	52.0	54.0	2.0	27.3	59.5	2.8	H


Vertical

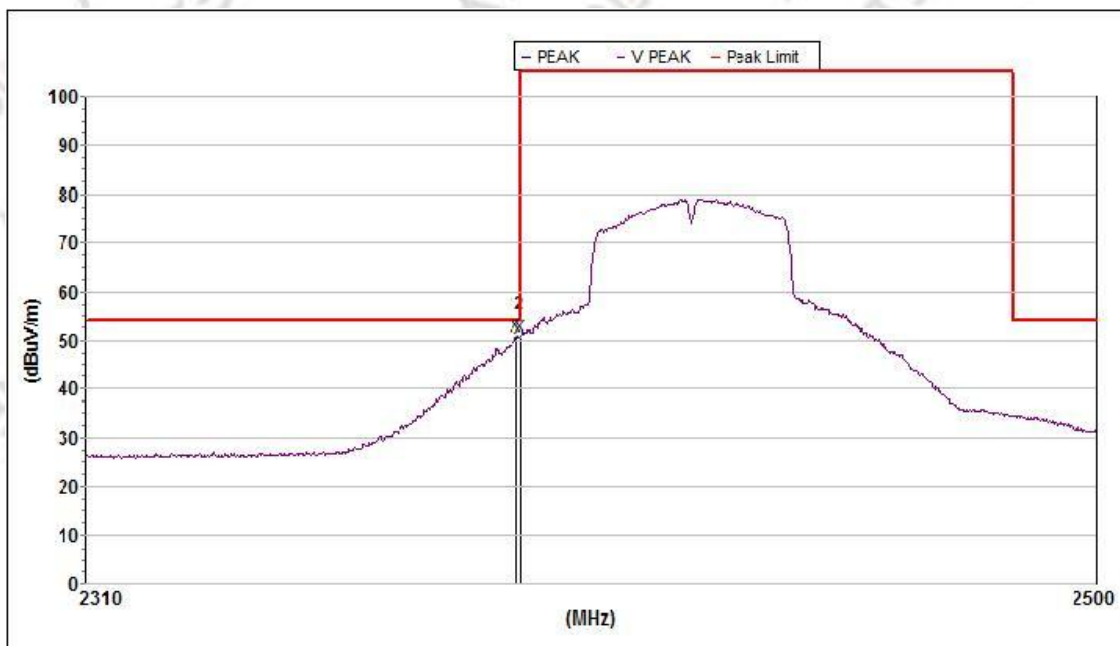

Mk.	Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.F/G. (dB/m)	Amp.G. (dB)	Cbl.L. (dB)	Pol.
AVG								
1	2389.107657	50.9	54.0	3.1	27.3	59.6	2.8	V
2	2390.000000	50.8	54.0	3.2	27.3	59.5	2.8	V


802.11n40-2422MHz

Horizontal

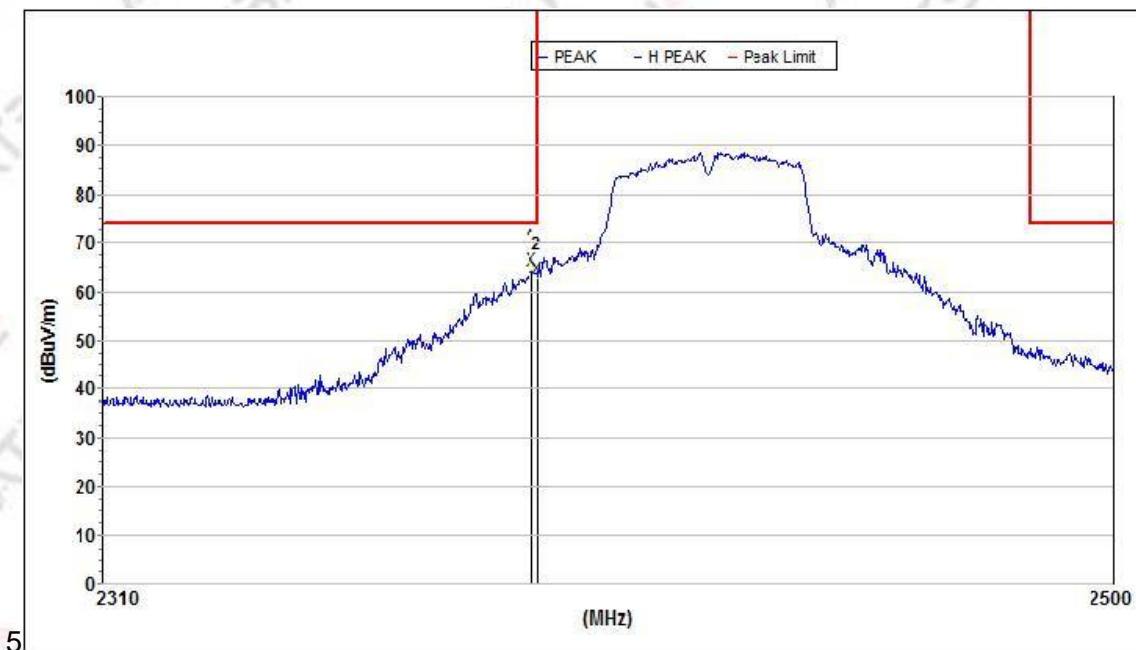

Mk.	Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.F/G. (dB/m)	Amp.G. (dB)	Cbl.L. (dB)	Pol.
Peak								
1	2388.918822	64.6	74.0	9.4	27.3	59.6	2.8	H
2	2390.000000	62.9	74.0	11.1	27.3	59.5	2.8	H


Vertical

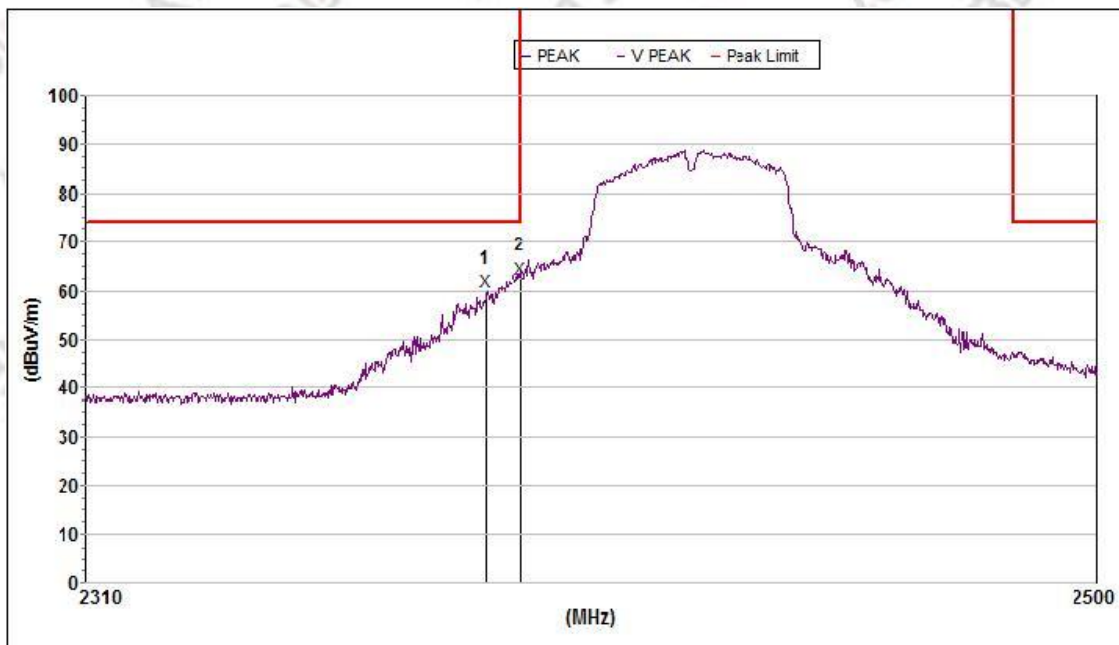

Mk.	Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.F/G. (dB/m)	Amp.G. (dB)	Cbl.L. (dB)	Pol.
Peak								
1	2383.449087	59.9	74.0	14.1	27.3	59.6	2.8	V
2	2390.000000	62.4	74.0	11.6	27.3	59.5	2.8	V


802.11n40-2452MHz

Horizontal

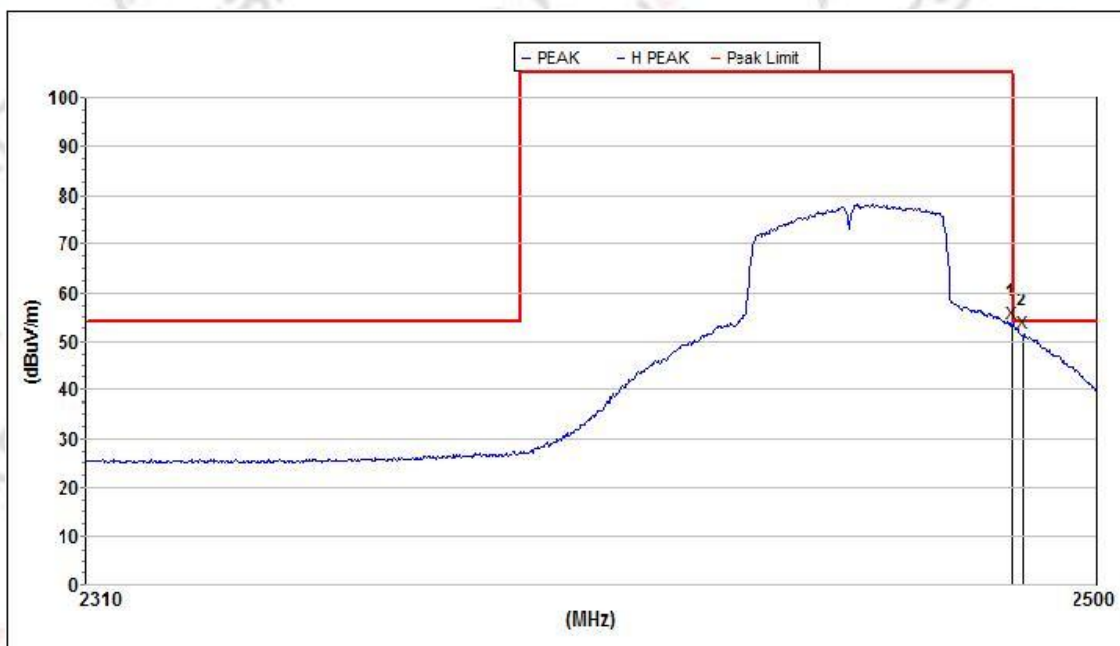

Mk.	Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.F/G. (dB/m)	Amp.G. (dB)	Cbl.L. (dB)	Pol.
AVG								
1	2483.501000	53.7	54.0	0.3	274	200	27.7	H
2	2485.419690	51.6	54.0	2.4	291	200	27.7	H


Vertical

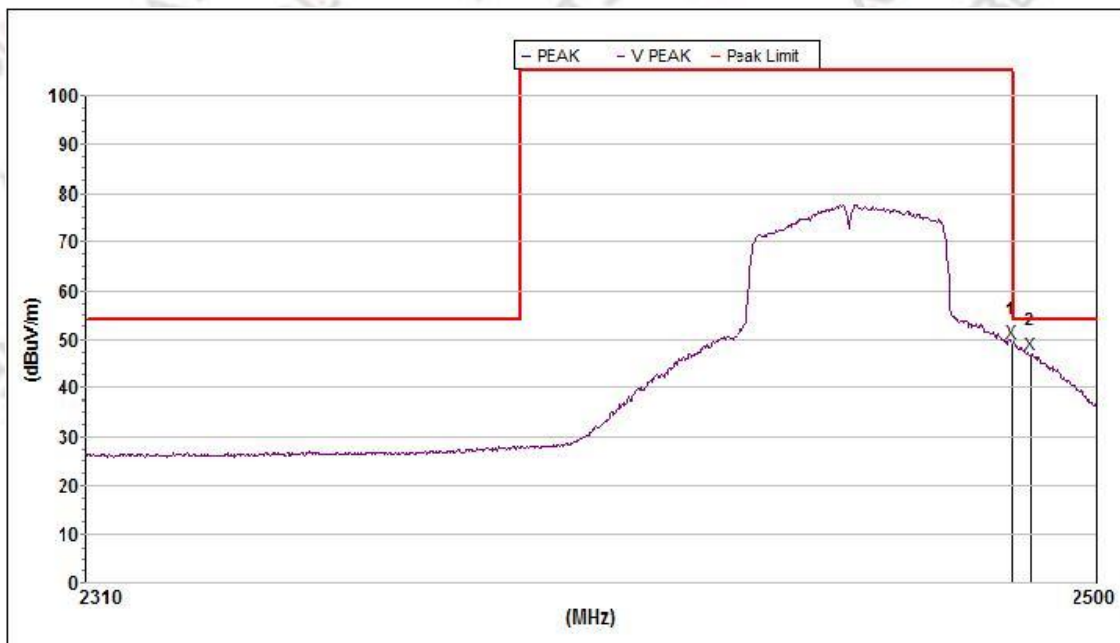

Mk.	Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.F/G. (dB/m)	Amp.G. (dB)	Cbl.L. (dB)	Pol.
AVG								
1	2483.501000	49.5	54.0	4.5	195	200	27.7	V
2	2486.991831	47.1	54.0	6.9	85	200	27.7	V


802.11n40-2452MHz

Horizontal

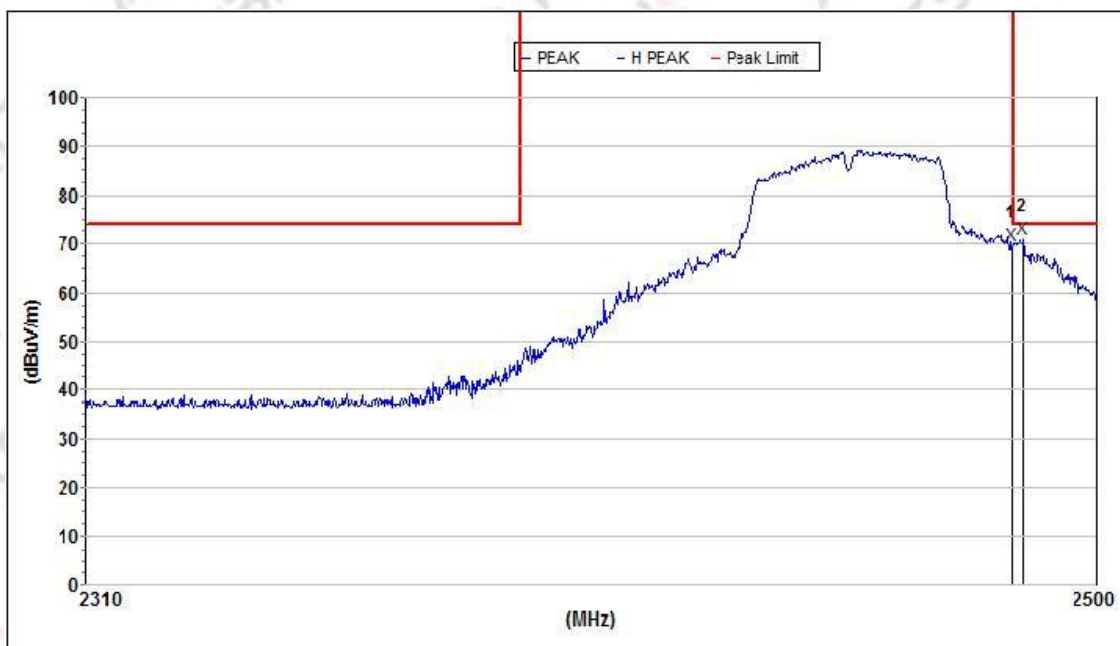

Mk.	Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.F/G. (dB/m)	Amp.G. (dB)	Cbl.L. (dB)	Pol.
Peak								
1	2483.501000	69.6	74.0	4.4	278	200	27.7	H
2	2485.616153	70.9	74.0	3.1	278	200	27.7	H

Vertical

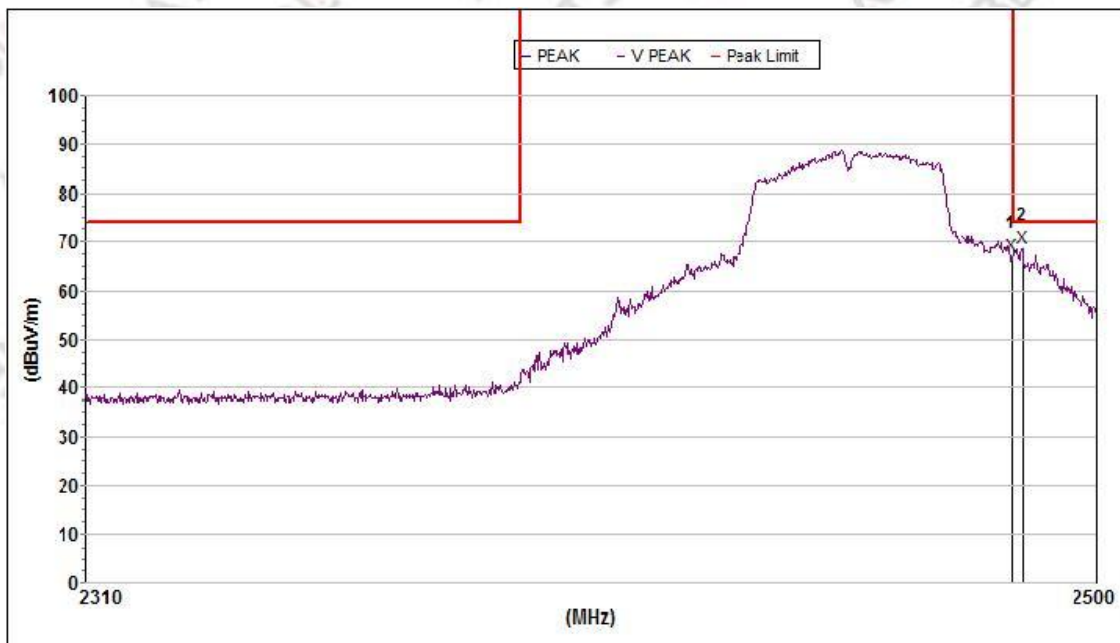

Mk.	Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.F/G. (dB/m)	Amp.G. (dB)	Cbl.L. (dB)	Pol.
Peak								
1	2483.501000	67.2	74.0	6.8	195	200	27.7	V
2	2485.419690	68.6	74.0	5.4	195	200	27.7	V

4.CONDUCTED SPURIOUS & BAND EDGE EMISSION

4.1 LIMIT

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

4.2 TEST PROCEDURE

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	30 MHz to 25GHz carrier harmonic
RB / VB (emission in restricted band)	100 kHz/300 kHz
Trace-Mode:	Max hold

For Band edge

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	Lower Band Edge: 2300 to 2450 MHz Upper Band Edge: 2430 to 2580 MHz
RB / VB (emission in restricted band)	100 kHz/300 kHz
Trace-Mode:	Max hold

4.3 DEVIATION FROM STANDARD

No deviation.

4.4 TEST SETUP



The EUT which is powered by the Battery, is connected to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.


Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

4.5 EUT OPERATION CONDITIONS


Please refer to section 3.1.4 of this report.

Temperature:	22.8℃	Relative Humidity:	51%RH
Test Voltage:	DC 3.8V	Test Mode:	TX Mode1/2/3/4/5/6/7/8/9/10/11/12


802.11b

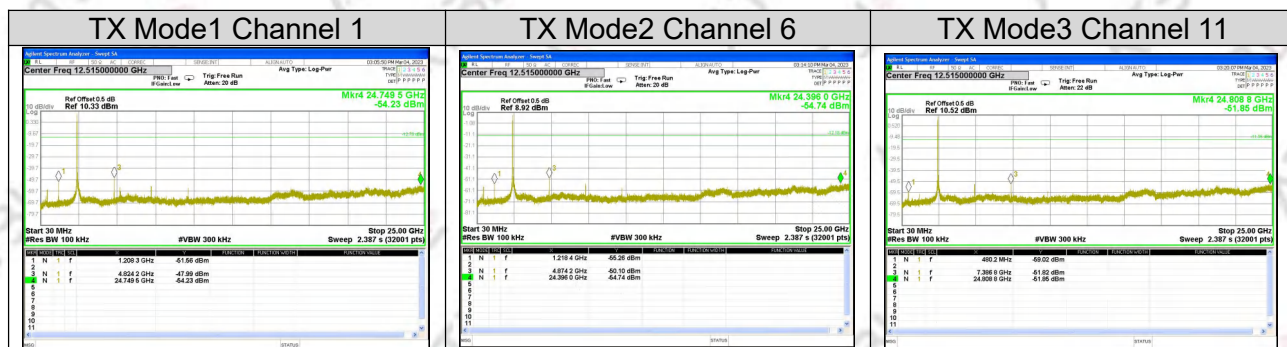


802.11g

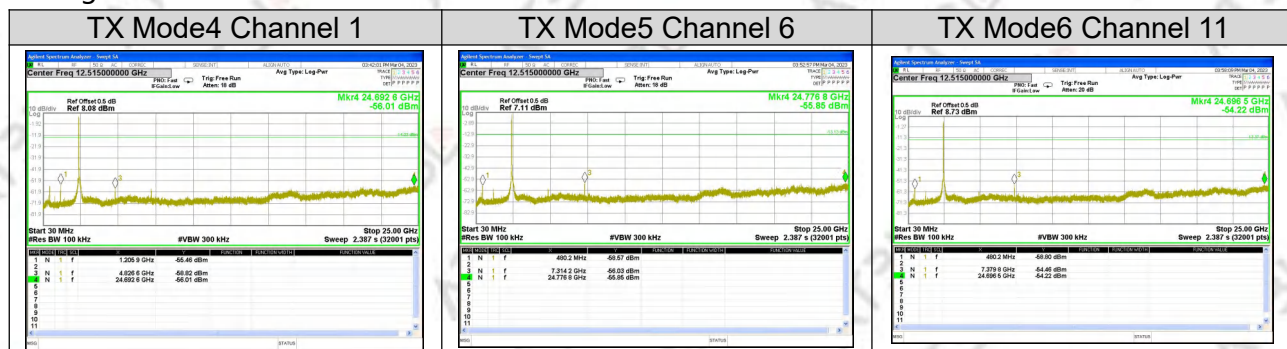

802.11n20

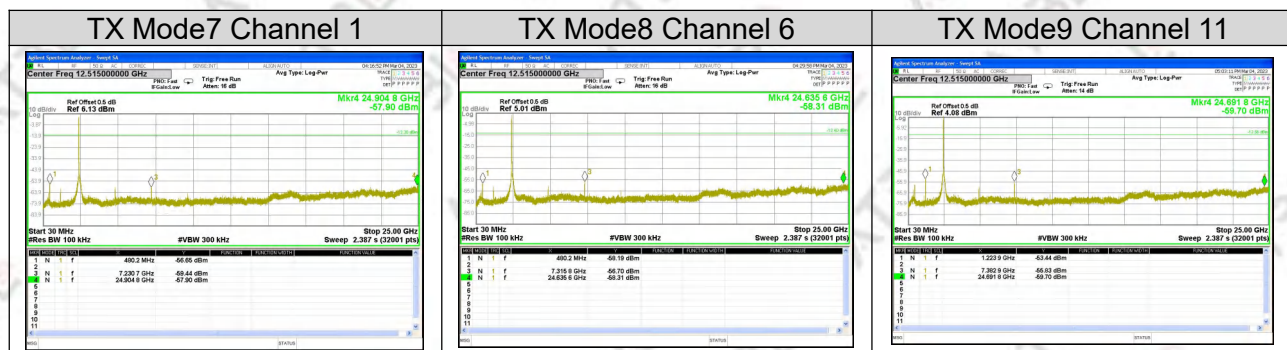


802.11n40

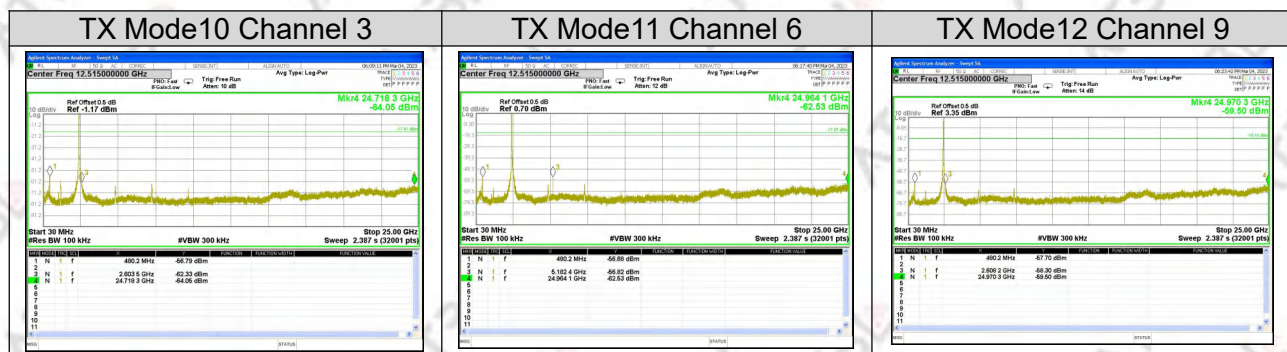


For Band edge(it's also the reference level for conducted spurious emission)


802.11b

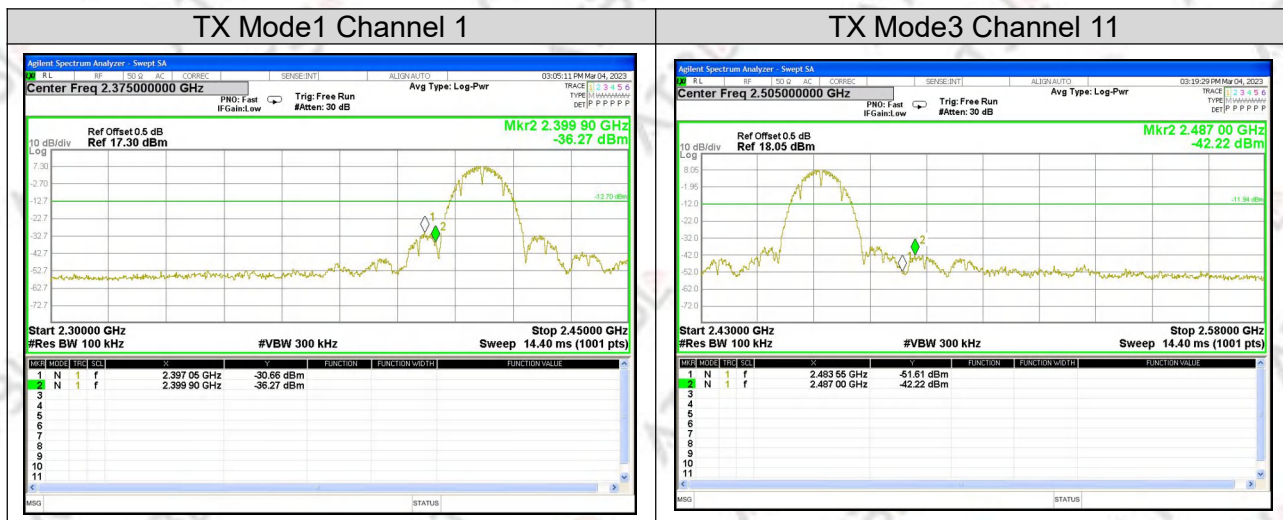

802.11g

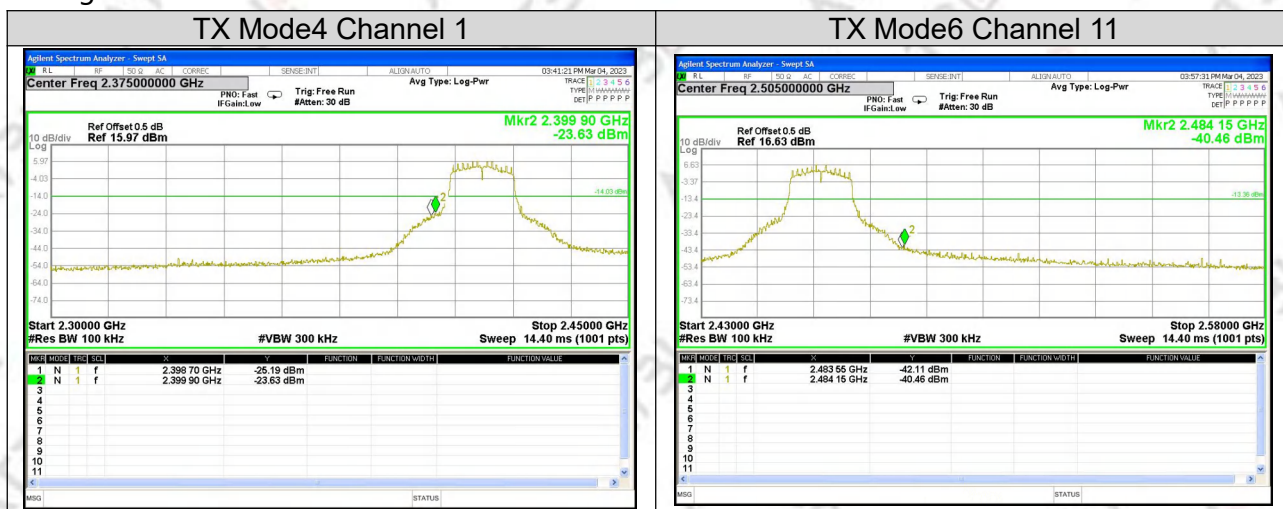

802.11n20

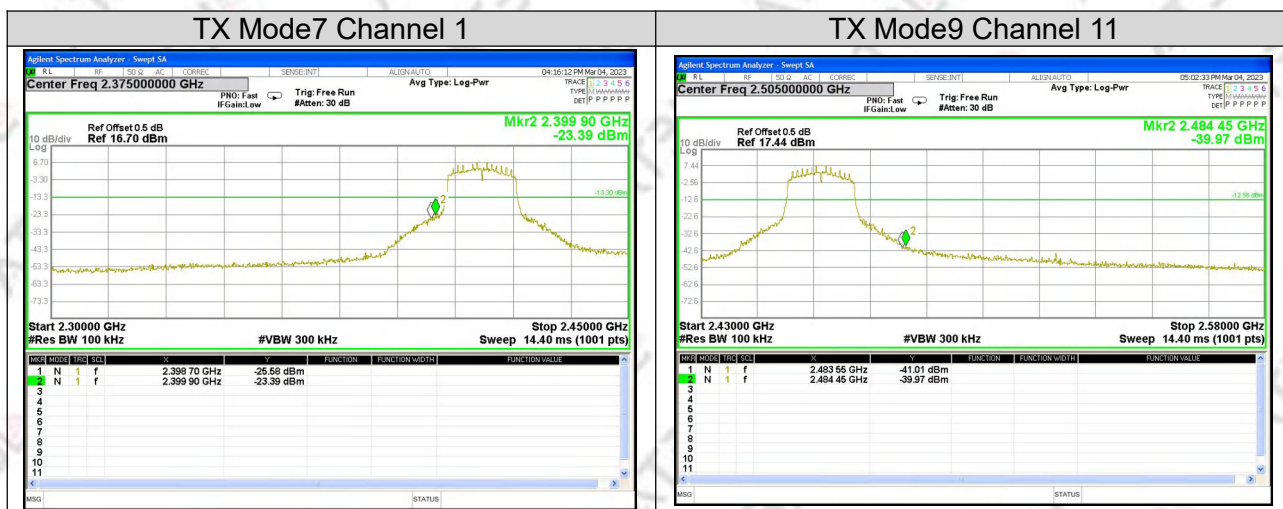

802.11n40



5. POWER SPECTRAL DENSITY TEST

5.1 LIMIT

FCC Part15.247,Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(e)	Power Spectral Density	$\leq 8 \text{ dBm}$ (RBW $\geq 3\text{kHz}$)	2400-2483.5	PASS

5.2 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the $100 \text{ kHz} \geq \text{RBW} \geq 3 \text{ kHz}$.
4. Set the $\text{VBW} \geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP



5.5 EUT OPERATION CONDITIONS


Please refer to section 3.1.4 of this report.

5.6 TEST RESULTS


Temperature:	22.8℃	Relative Humidity:	51%RH
Test Voltage:	DC3.8V	Test Mode:	TX Mode1/2/3/4/5/6/7/8/9/10/11/12

Test mode	Frequency	Power Density	Limit (3kHz/dBm)	Result
		(dBm/3kHz)		
Mode1	2412 MHz	-0.96	≤8	PASS
Mode2	2437 MHz	-0.17	≤8	PASS
Mode3	2462 MHz	-0.52	≤8	PASS
Mode4	2412 MHz	-9.87	≤8	PASS
Mode5	2437 MHz	-9.73	≤8	PASS
Mode6	2462 MHz	-8.75	≤8	PASS
Mode7	2412 MHz	-8.57	≤8	PASS
Mode8	2437 MHz	-8.60	≤8	PASS
Mode9	2462 MHz	-6.79	≤8	PASS
Mode10	2422 MHz	-12.84	≤8	PASS
Mode11	2437 MHz	-13.26	≤8	PASS
Mode12	2452 MHz	-12.69	≤8	PASS


802.11b

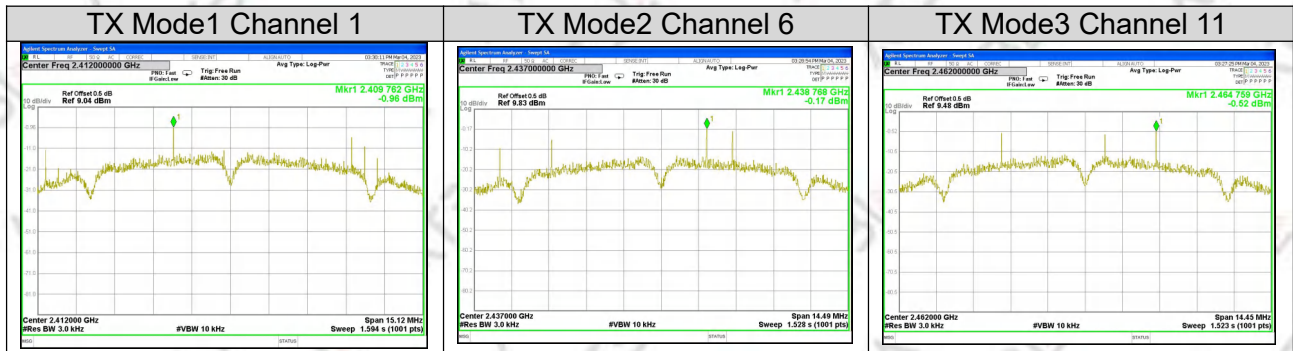


802.11g

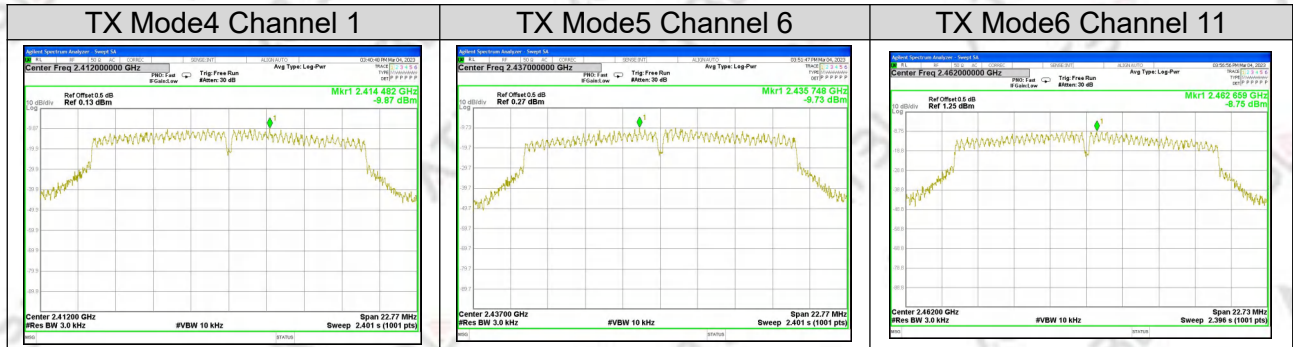

802.11n20

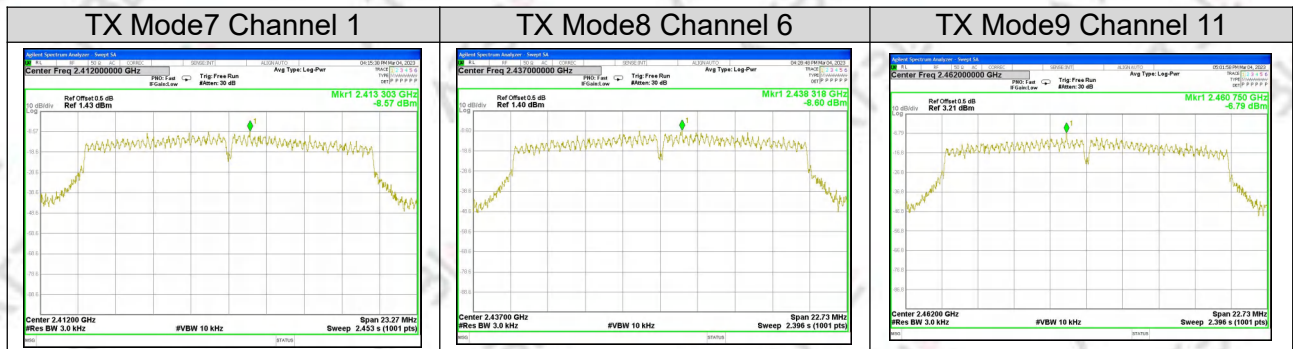

802.11n40

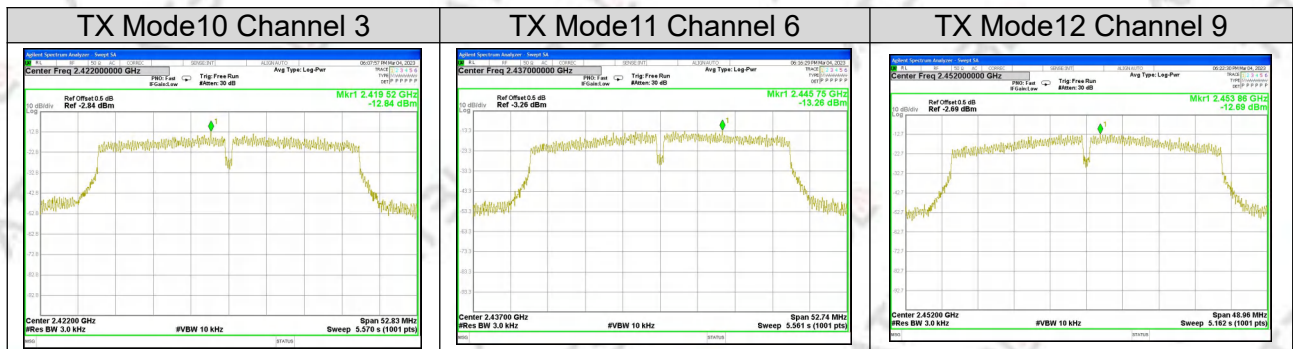

6. BANDWIDTH TEST

6.1 LIMIT

FCC Part15.247,Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{kHz}$ (6dB bandwidth)	2400-2483.5	PASS
15.247	99% Bandwidth	For reporting purposes only.	2400-2483.5	PASS

6.2 TEST PROCEDURE

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described above (i.e., RBW = 100 kHz, VBW $\geq$ 3RBW, peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP



6.5 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.



6.6 TEST RESULTS

Temperature:	22.8℃	Relative Humidity:	51%RH
Test Voltage:	DC3.8V	Test Mode:	TX Mode1/2/3/4/5/6/7/8/9/10/11/12



Test mode	Frequency	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	6dB Bandwidth Limit(kHz)	Result
Mode1	2412 MHz	10.08	14.524	≥500kHz	PASS
Mode2	2437 MHz	9.66	14.397	≥500kHz	PASS
Mode3	2462 MHz	9.63	14.184	≥500kHz	PASS
Mode4	2412 MHz	15.18	16.553	≥500kHz	PASS
Mode5	2437 MHz	15.18	16.510	≥500kHz	PASS
Mode6	2462 MHz	15.15	16.461	≥500kHz	PASS
Mode7	2412 MHz	15.51	17.571	≥500kHz	PASS
Mode8	2437 MHz	15.15	17.541	≥500kHz	PASS
Mode9	2462 MHz	15.15	17.494	≥500kHz	PASS
Mode10	2422 MHz	35.22	36.118	≥500kHz	PASS
Mode11	2437 MHz	35.16	35.937	≥500kHz	PASS
Mode12	2452 MHz	32.64	35.617	≥500kHz	PASS

6dB Bandwidth &99% Bandwidth



802.11b

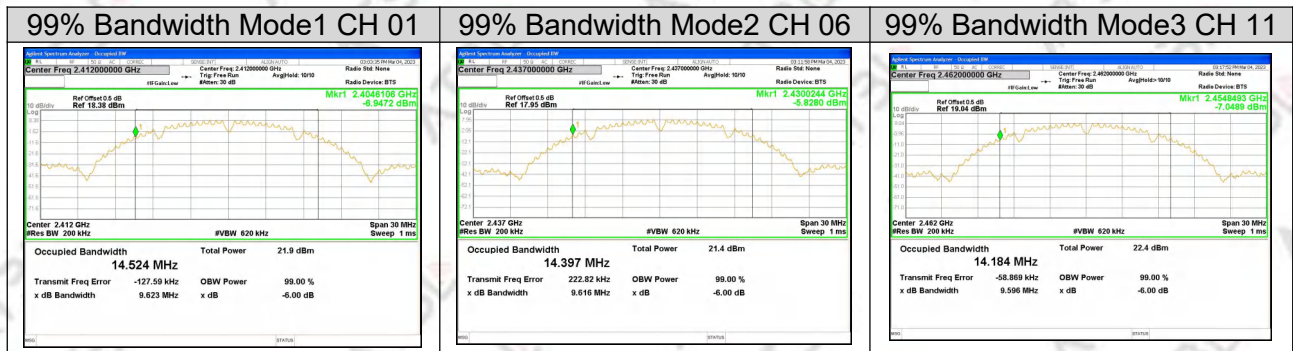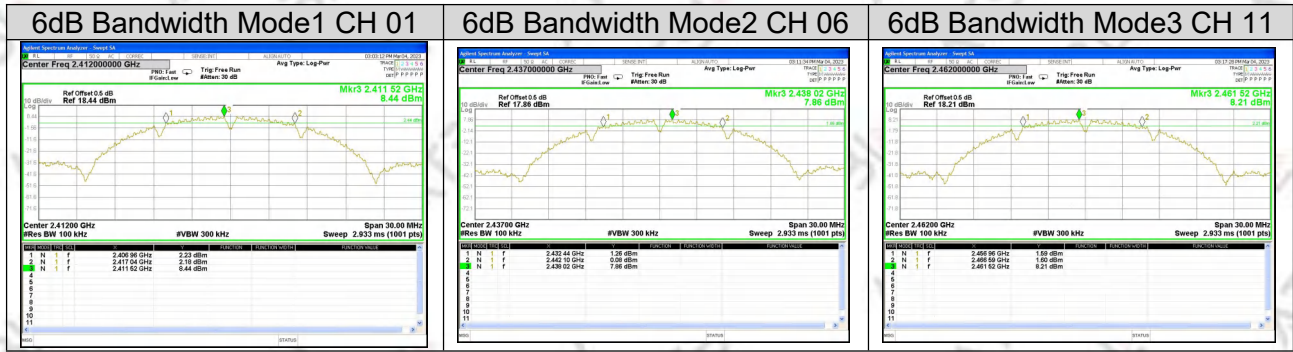



802.11g

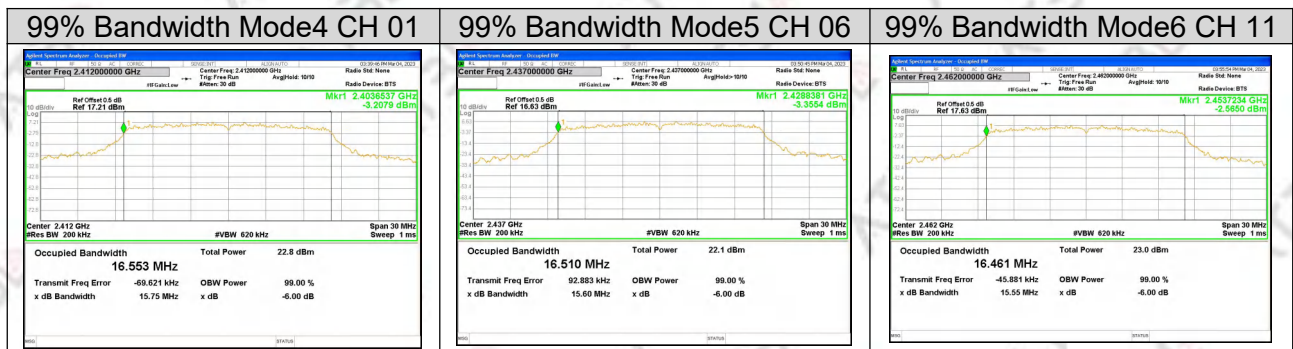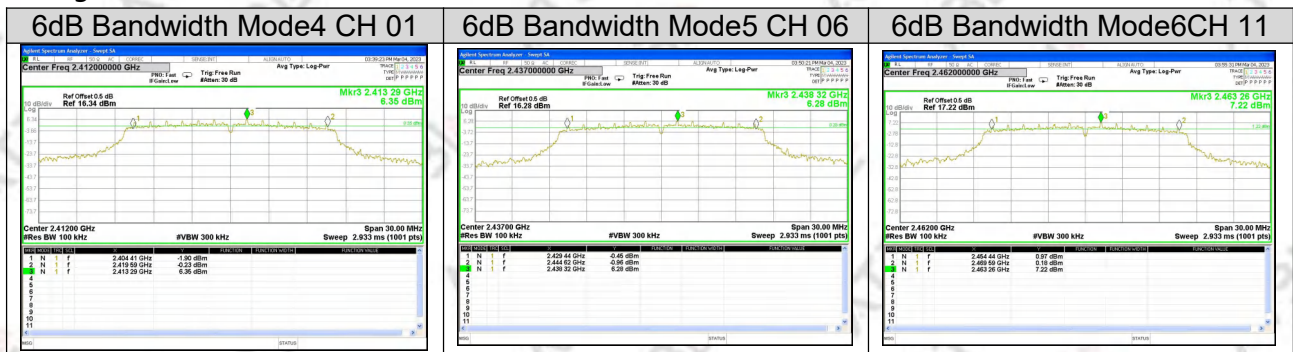

802.11n20

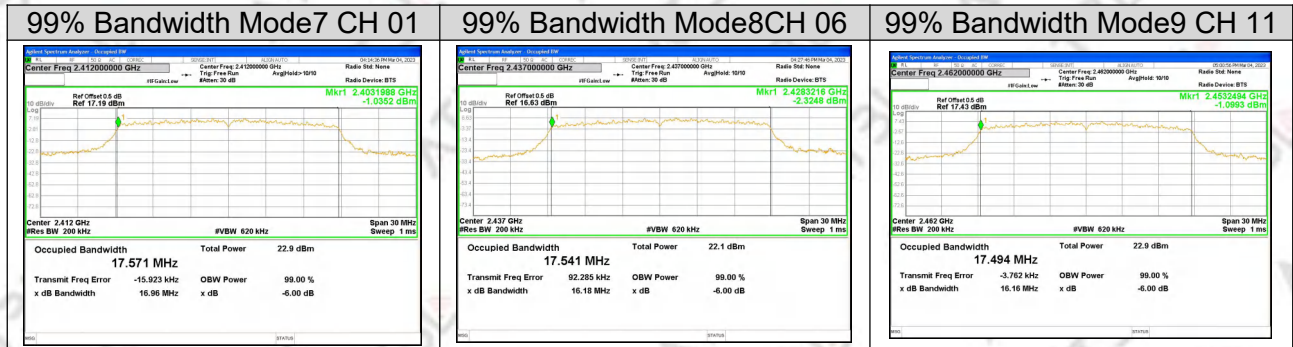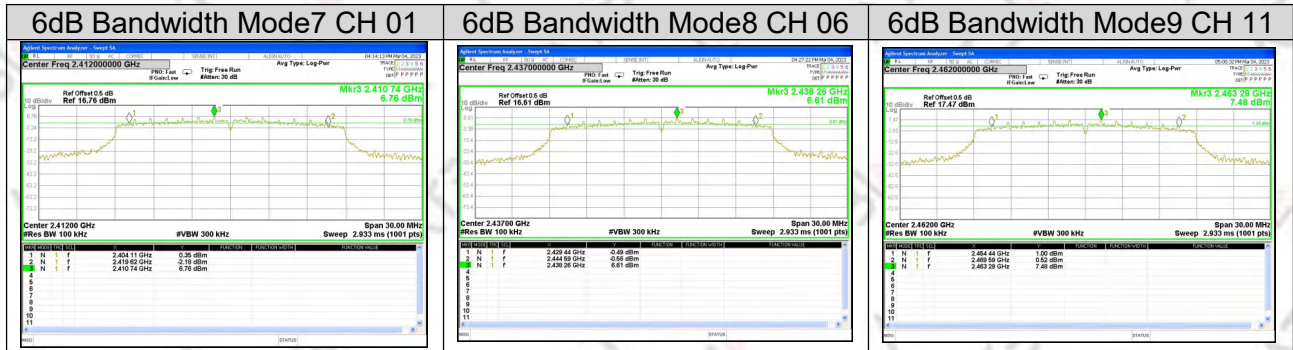

802.11n40

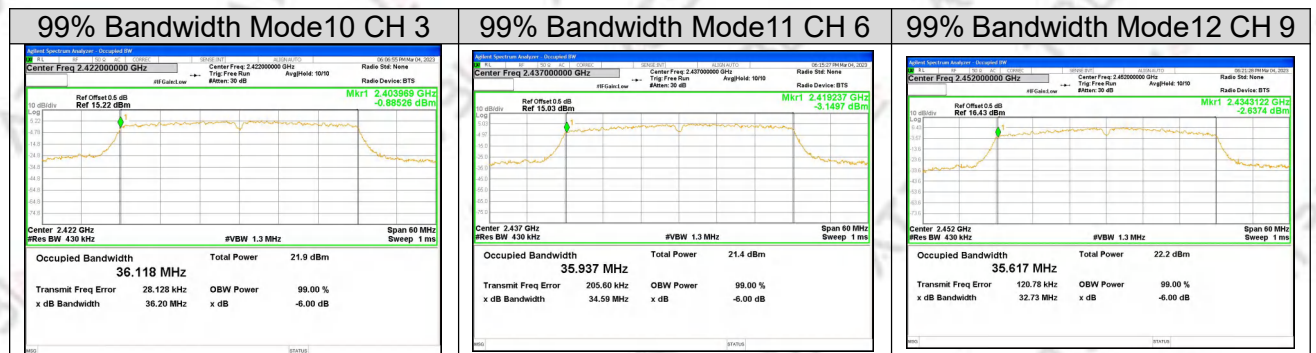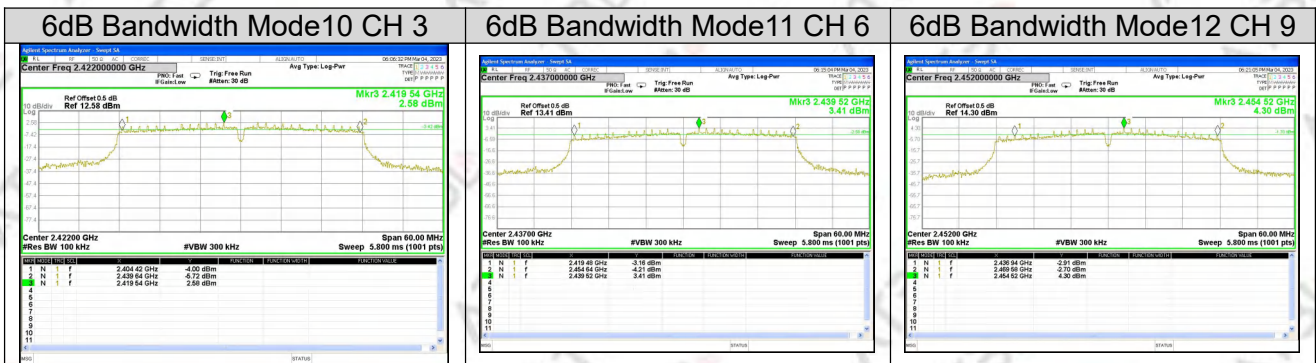

7. PEAK OUTPUT POWER TEST

7.1 LIMIT

FCC Part15.247				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Output Power	1 watt or 30dBm	2400-2483.5	PASS

7.2 TEST PROCEDURE

PKPM1 Peak power meter method:

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP



7.5 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.

7.6 TEST RESULTS

Temperature:	22.8℃	Relative Humidity:	51%RH
Test Voltage:	DC3.8V	Test Mode:	TX Mode1/2/3/4/5/6/7/8/9/10/11/12

Test mode	Test Channel	Frequency	Peak Conducted Output Power	Average Conducted Output Power	LIMIT
		(MHz)	(dBm)	(dBm)	dBm
Mode1	CH01	2412	19.85	17.81	30
Mode2	CH06	2437	19.64	17.58	30
Mode3	CH11	2462	19.55	17.51	30
Mode4	CH01	2412	24.02	16.70	30
Mode5	CH06	2437	24.05	16.68	30
Mode6	CH11	2462	23.98	16.43	30
Mode7	CH01	2412	24.08	16.67	30
Mode8	CH06	2437	24.07	16.48	30
Mode9	CH11	2462	24.04	16.22	30
Mode10	CH03	2422	23.69	15.33	30
Mode11	CH06	2437	23.72	15.23	30
Mode12	CH09	2452	23.63	15.11	30

Test Mode	Frequency	Peak Conducted Output Power	Antenna Gain	EIRP Power	LIMIT
	(MHz)	(dBm)	(dBi)	(dBm)	dBm
Mode1	2412	19.85	5	24.85	36
Mode2	2437	19.64	5	24.64	36
Mode3	2462	19.55	5	24.55	36
Mode4	2412	24.02	5	29.02	36
Mode5	2437	24.05	5	29.05	36
Mode6	2462	23.98	5	28.98	36
Mode7	2412	24.08	5	29.08	36
Mode8	2437	24.07	5	29.07	36
Mode9	2462	24.04	5	29.04	36
Mode10	2422	23.69	5	28.69	36
Mode11	2437	23.72	5	28.72	36
Mode12	2452	23.63	5	28.63	36

Note: Our power sensor test AVG power has no duty cycle display. The power sensor measures AVG power is Burst power. The software has considered the factor of the duty cycle factor, so it is unnecessary to add it again.

8. ANTENNA REQUIREMENT

8.1 STANDARD REQUIREMENT


15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

8.2 EUT ANTENNA


The EUT antenna is Chip Antenna. It comply with the standard requirement.

9.APPENDIX-PHOTOS OF TEST SETUP

Radiated Emissions for 30MHz-1GHz

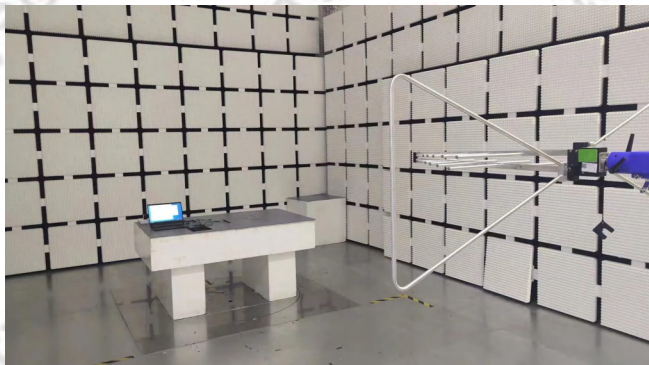


Radiated Emissions for 1GHz-18GHz

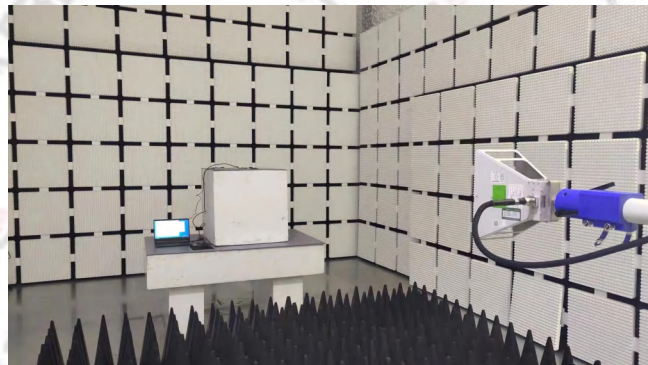

Radiated Emissions for 9kHz-30MHz



Conducted for RF

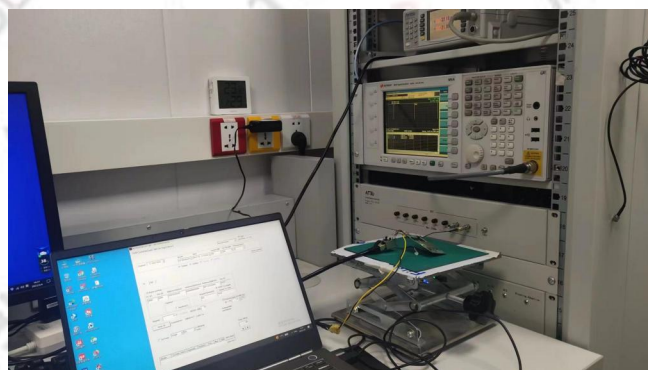

Radiated Emissions for above 18GHz



AC Power Line Conducted Emissions



*****END OF THE REPORT*****