



RADIO TEST REPORT

Report No.: SHATBL2201008W01

Applicant:
Sichuan AnSphere Technology Co., Ltd.

Address:
Room 332, building 2, innovation center, science and Innovation Park,
Mianyang, Sichuan, China

Product Name : Bluetooth modularN/

Brand Name : A

Model Name : nRF52810

Series Model : N/A

FCC ID : 2A4AD-NRF52810

Test Standard : FCC Part15.247

"Shanghai ATBL Technology Co., Ltd." hereby certifies that according to actual testing conditions. The test results or observations are provided in accordance with measured value, without taking risks caused by uncertainty into account. Without explicit stipulation in special agreements, standards or regulations, ATBL shall not assume any responsibility. The test results or observations are applicable only to tested sample. Client shall be responsible for representativeness of the sample and authenticity of the material. This report will be void without authorized signature or special seal for testing report. Do not copied without authorization.

Tel: +86(0)21-51298625

Web: www.atbl-lab.com

Email: atbl@atbl-lab.com

TEST RESULT CERTIFICATION

Applicant's Name..... : Sichuan AnSphere Technology Co., Ltd.
Address : Room 332, building 2, innovation center, science and Innovation Park, Mianyang, Sichuan, China
Manufacture's Name..... : Sichuan AnSphere Technology Co., Ltd.
Address : Room 332, building 2, innovation center, science and Innovation Park, Mianyang, Sichuan, China

Product Description

Product Name : Bluetooth modular
Brand Name : N/A
Model Name : nRF52810
SeriesModel : N/A

Test Standards : FCC Part15.247

Test Procedure : ANSI C63.10-2013

This device described above has been tested by ATBL, the test results show that the equipment under test (EUT) is in compliance with the FCC/IC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of ATBL, this document may be altered or revised by ATBL, personal only, and shall be noted in the revision of the document.

Date of Test

Date of receipt of test item..... : 06 Jan. 2022

Date (s) of performance of tests : 10 Jan. 2022 ~ 14 Jan. 2022

Date of Issue : 17 Jan. 2022

Test Result..... : Pass

Report Prepared by :

Roean wei

(Roean.wei)

Report Approved by :

Ghost Li.

(Ghost.li)

Authorized Signatory :

Terry yang

(Terry yang)



Table of Contents

1. SUMMARY OF TEST RESULTS	6
2. GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF THE EUT	7
2.2 DESCRIPTION OF THE TEST MODES	9
2.3 TEST SOFTWARE AND POWER LEVEL	9
2.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	11
2.6 LABORATORY INFORMATION	11
2.7 MEASUREMENT UNCERTAINTY	12
2.8 EQUIPMENTS LIST	13
3. EMC EMISSION TEST	14
3.1 CONDUCTED EMISSION MEASUREMENT	14
3.2 TEST PROCEDURE	15
3.3 TEST SETUP	15
3.4 EUT OPERATING CONDITIONS	15
3.5 TEST RESULTS	16
4. RADIATED EMISSION MEASUREMENT	18
4.1 RADIATED EMISSION LIMITS	18
4.2 TEST PROCEDURE	20
4.3 TEST SETUP	21
4.4 EUT OPERATING CONDITIONS	21
4.5 FIELD STRENGTH CALCULATION	22
4.6 TEST RESULTS	23
5. CONDUCTED SPURIOUS & BAND EDGE EMISSION	43
5.1 LIMIT	43
5.2 TEST PROCEDURE	43
5.3 TEST SETUP	43
5.4 EUT OPERATION CONDITIONS	43
5.5 TEST RESULTS	44
6. POWER SPECTRAL DENSITY TEST	49
6.1 LIMIT	49
6.2 TEST PROCEDURE	49
6.3 TEST SETUP	49

Table of Contents

6.4 EUT OPERATION CONDITIONS	49
6.5 TEST RESULTS	50
7. BANDWIDTH TEST	54
7.1 LIMIT	54
7.2 TEST PROCEDURE	54
7.3 TEST SETUP	54
7.4 EUT OPERATION CONDITIONS	54
7.5 TEST RESULTS	55
8. PEAK OUTPUT POWER TEST	59
8.1 LIMIT	59
8.2 TEST PROCEDURE	59
8.3 TEST SETUP	59
8.4 EUT OPERATION CONDITIONS	59
8.5 TEST RESULTS	59
9. ANTENNA REQUIREMENT	62
9.1 STANDARD REQUIREMENT	62
9.2 EUT ANTENNA	62
APPENDIX-PHOTOS OF TEST SETUP	63

Revision History

Rev.	Issue Date	Report NO.	Effect Page	Contents
00	17 Jan. 2022	SHATBL2201008W01	ALL	Initial Issue



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:
KDB 558074 D01 15.247 Meas Guidance v05r02.

FCC Part15.247			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	--
15.247 (a)(2)	6dB&99% Bandwidth	PASS	--
15.247 (b)(3)	Output Power	PASS	--
15.247(d) & 15.209 & 15.205	Radiated Spurious Emission	PASS	--
15.247(d) & 15.205	Conducted Spurious & Band Edge Emission	PASS	--
15.247 (e)	Power Spectral Density	PASS	--
15.205	Restricted bands of operation	PASS	--
15.203	Antenna Requirement	PASS	--

NOTE:

- (1) 'N/A' denotes test is not applicable in this Test Report.
- (2) All tests are according to ANSI C63.10-2013.

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	Bluetooth modular	
Trade Name	N/A	
Model Name	nRF52810	
Series Model	N/A	
Model Difference	N/A	
Product Description	The EUT is a Bluetooth modular	
	Operation Frequency:	2402~2480 MHz
	Modulation Type:	GFSK
	Radio Technology:	BLE
	Bluetooth Version:	5.0
	Bluetooth Configuration:	LE(Support 1M PHY,2M PHY)
	Number Of Channel:	40
	Antenna Designation:	Please refer to the Note 3.
	AntennaGain (dBi)	2.14 dBi
Channel List	Please refer to the Note 2.	
Power Rating	DC 5V	
Battery	None	
Hardware version number	1.0.0	
Software versionnumber	1.0.0	
Connecting I/O Port(s)	Please refer to the Note 1.	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User Manual.

2.

Channel List							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	10	2422	20	2442	30	2462
01	2404	11	2424	21	2444	31	2464
02	2406	12	2426	22	2446	32	2466
03	2408	13	2428	23	2448	33	2468
04	2410	14	2430	24	2450	34	2470
05	2412	15	2432	25	2452	35	2472
06	2414	16	2434	26	2454	36	2474
07	2416	17	2436	27	2456	37	2476
08	2418	18	2438	28	2458	38	2478
09	2420	19	2440	29	2460	39	2480

3.

Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	N/A	nRF52810	Dipole antenna	N/A	2.14 dBi	BLE ANT

2.2 DESCRIPTION OF THE TEST MODES

For conducted test items and radiated spurious emissions

Each of these EUT operation mode(s) or test configuration mode(s) mentioned below was evaluated respectively.

Worst Mode	Description	Data/Modulation
Mode 1	TX CH00(2402MHz)	1 Mbps/GFSK
Mode 2	TX CH19(2440MHz)	1 Mbps/GFSK
Mode 3	TX CH39(2480MHz)	1 Mbps/GFSK
Mode 4	TX CH00(2402MHz)	2 Mbps/GFSK
Mode 5	TX CH19(2440MHz)	2 Mbps/GFSK
Mode 6	TX CH39(2480MHz)	2 Mbps/GFSK

Note:

(1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.

For Conducted Emission

Test Case	
Conducted Emission	Mode 7 : Keeping BT TX


2.3 TEST SOFTWARE AND POWER LEVEL

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.


RF Function	Type	Mode Or Modulation type	Ant Gain(dBi)	Power Class	Software For Testing
BLE	BLE	GFSK	2.14	default	nrfconnect-setup-3.9.3

2.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Spurious EmissionTest

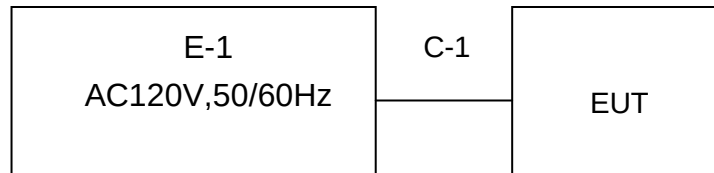

Conduction Emission Test

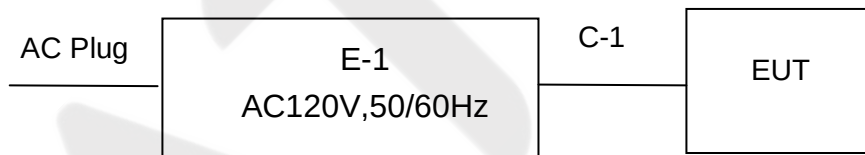

2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Necessary accessories

Item	Equipment	Mfr/Brand	Model/Type No.	Length	Note
N/A	N/A	N/A	N/A	N/A	N/A

Support units

Item	Equipment	Mfr/Brand	Model	Type No.	Note
E-2	Notebook	Lenovo	DESKTOP-USDEO09	00326-10000-00000-AA636	N/A
C-1	USB Cable	N/A	100cm	N/A	N/A

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.6 LABORATORY INFORMATION

Company Name:	Shanghai ATBL Technology Co., Ltd.
Address:	Building 8, No. 160, Basheng Road, Waigaoqiao Free Trade Zone, Pudong New Area, Shanghai
Telephone:	+86(0)21-51298625
The FCC Registration Number (FRN):	0031025281
A2LA Number:	6184.01
CNAS Number:	CNAS L14531

2.7 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 0.958\text{dB}$
2	Conducted spurious emissions	$\pm 2.988\text{dB}$
3	All emissions, radiated 30MHz-1GHz	$\pm 2.50\text{dB}$
4	All emissions, radiated 1GHz-18GHz	$\pm 3.51\text{dB}$
5	Occupied bandwidth	$\pm 23.20\text{dB}$
6	Power spectral density	$\pm 0.886\text{dB}$

2.8 EQUIPMENTS LIST

2.8.1 Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Management number	Calibrated until
Test Receiver	R&S	ESCI	100469	SHATBL-E003	2022.07.13
Spectrum Analyzer	Agilent	N9020A	MY50200811	SHATBL-E017	2022.07.13
Bilog Antenna	SCHWARZBECK	VLUB 9168	01174	SHATBL-E008	2023.09.27
Horn Antenna	SCHWARZBECK	BBHA 9120D	02014	SHATBL-E009	2023.09.27
Pre-Amplifier (0.1M-3GHz)	JPT	JPA-10M1G35	21010100035001	SHATBL-E005	2022.10.07
Pre-Amplifier (1G-18GHz)	JPT	JPA0118-55-303A	1910001800055000	SHATBL-E006	2022.07.13
Temperature & Humidity	DeLi	DeLi	N/A	SHATBL-E016	2022.10.08
Antenna/Turntable Controller	Brilliant	N/A	N/A	SHATBL-E007	N/A
Test SW	FALA	EMC-RI(Ver.4A2)		SHATBL-E046	N/A

2.8.2 RF Connected Test

Kind of Equipment	Manufacturer	Type No.	Serial No.	equipment number	Calibrated until
MIMO Power measurement test Set	DARE	RPR3006W	16I00054SN016	SHATBL-W006	2022.10.07
			RPR6W-20001005	SHATBL-W013	2022.10.07
Signal Analyzer	Agilent	N9020A	MY57300196	SHATBL-W004	2022.10.07
Signal Generator	Agilent	N5182B	MY46240556	SHATBL-W005	2022.10.07
Wireless Communications Test Set	R&S	CMW500	101331	SHATBL-W007	2022.10.07
Temperature & Humidity	Deli	deli	N/A	SHATBL-W011	2022.10.07
Attenuator	Agilent	8494B	DC-18G	SHATBL-W009	2022.10.07
Attenuator	Agilent	8496B	DC-18G	SHATBL-W010	2022.10.07
power splitter	MNK	MPD-DC/6-2S	62315 G51	SHATBL-W015	2022.10.07
			62315 G52	SHATBL-W016	2022.10.07
Filter	Chengdu kangmaiwei	ZBSF-C2400-2483.5-T3	N/A	SHATBL-W021	N/A
Constant temperature and humidity box	KSON	THS-B6C-150	6159K	SHATBL-W019	2022.01.26
Test SW	FALA	LZ-RF(Ver.LzRF-03A3.1)		SHATBL-W020	N/A

3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION LIMITS

Operating frequency band. In case the emission fall within the restricted band specified on Part 207(a)&RSS-Gen Issue 5 limit in the table below has to be followed.

FREQUENCY (MHz)	Conducted Emissionlimit (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of “ * ” marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.2 TEST PROCEDURE

- The EUT is 0.8 m from the horizontal ground plane and 0.4 m from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments are powered from additional LISN(s). The LISN provides 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN is at least 80 cm from the nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.3 TEST SETUP

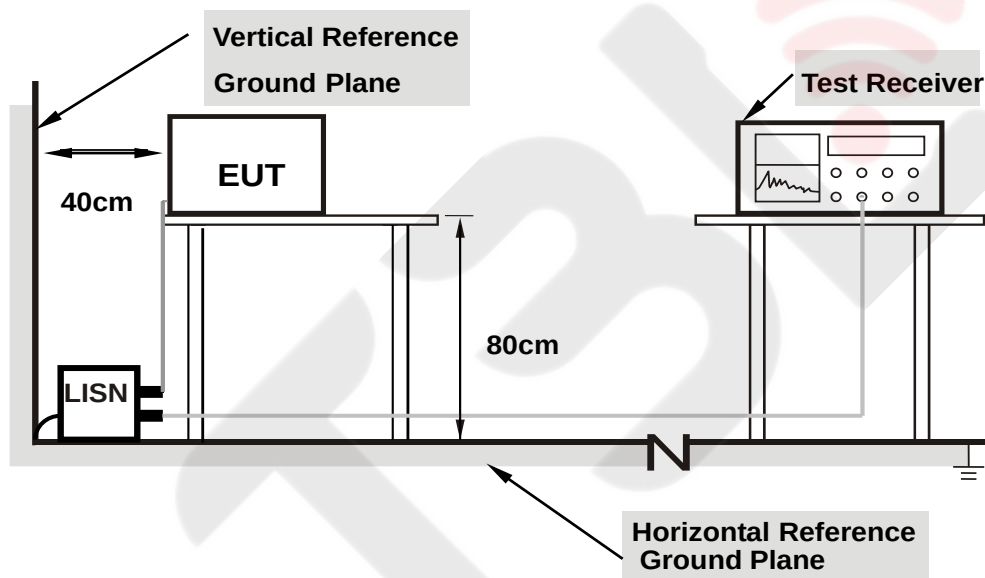

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes support.

3.4 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.


3.5 TEST RESULTS

Temperature:	26 °C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz	Phase:	L
Test Mode :	Mode 7		

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.1725	43.81	10.11	53.92	64.84	-10.92	QP
2	0.1725	32.97	10.11	43.08	54.84	-11.76	AVG
3	0.3525	40.19	10.08	50.27	58.90	-8.63	QP
4	0.3525	30.43	10.08	40.51	48.90	-8.39	AVG
5	0.5325	39.97	10.04	50.01	56.00	-5.99	QP
6	0.5325	30.82	10.04	40.86	46.00	-5.14	AVG
7	1.4010	39.39	9.96	49.35	56.00	-6.65	QP
8	1.4010	27.93	9.96	37.89	46.00	-8.11	AVG
9	5.4465	28.98	10.09	39.07	60.00	-20.93	QP
10	5.4465	18.84	10.09	28.93	50.00	-21.07	AVG
11	19.1760	30.59	10.84	41.43	60.00	-18.57	QP
12	19.1760	19.38	10.84	30.22	50.00	-19.78	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result =Reading + Factor)–Limit

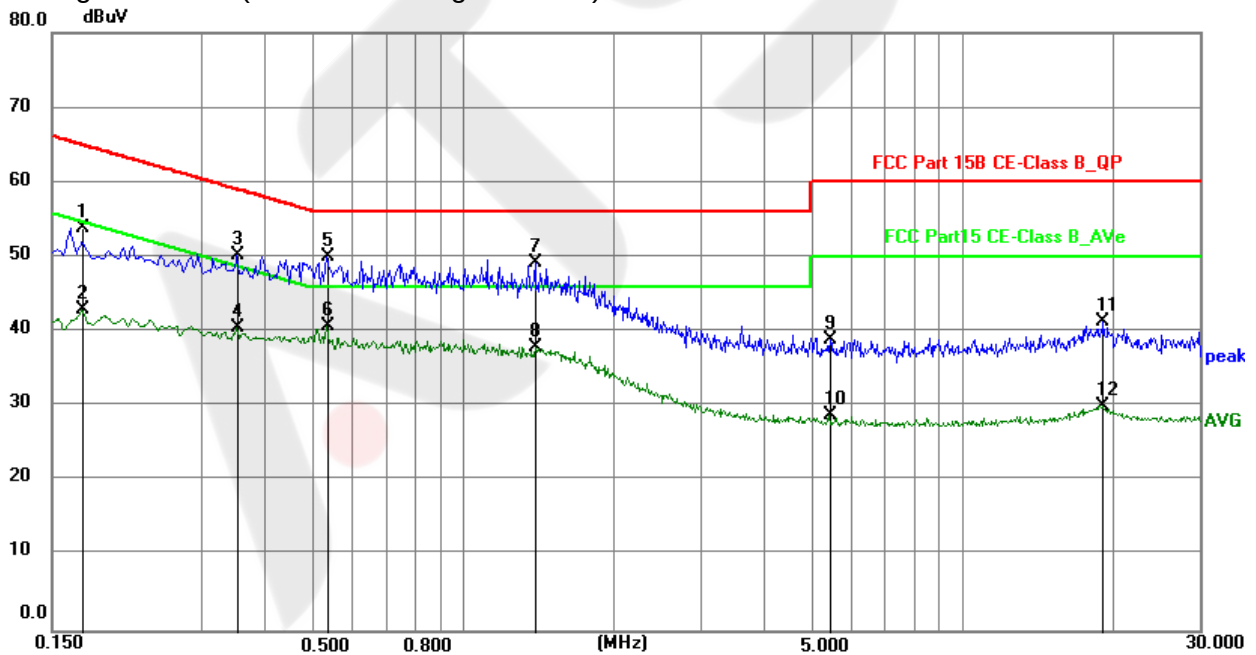


Temperature:	26 °C	Relative Humidity:	54%
Test Voltage	AC 120V/60Hz	Phase:	N
Test Mode	Mode 13		

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.1680	42.90	10.42	53.32	65.06	-11.74	QP
2	0.1680	32.63	10.42	43.05	55.06	-12.01	AVG
3	0.3435	40.88	10.31	51.19	59.12	-7.93	QP
4	0.3435	30.11	10.31	40.42	49.12	-8.70	AVG
5	1.4325	38.49	10.17	48.66	56.00	-7.34	QP
6	1.4325	28.75	10.17	38.92	46.00	-7.08	AVG
7	4.3080	30.11	10.20	40.31	56.00	-15.69	QP
8	4.3080	18.59	10.20	28.79	46.00	-17.21	AVG
9	10.9500	29.75	10.17	39.92	60.00	-20.08	QP
10	10.9500	17.83	10.17	28.00	50.00	-22.00	AVG
11	23.8785	28.43	10.87	39.30	60.00	-20.70	QP
12	23.8785	17.67	10.87	28.54	50.00	-21.46	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result = Reading + Factor)–Limit

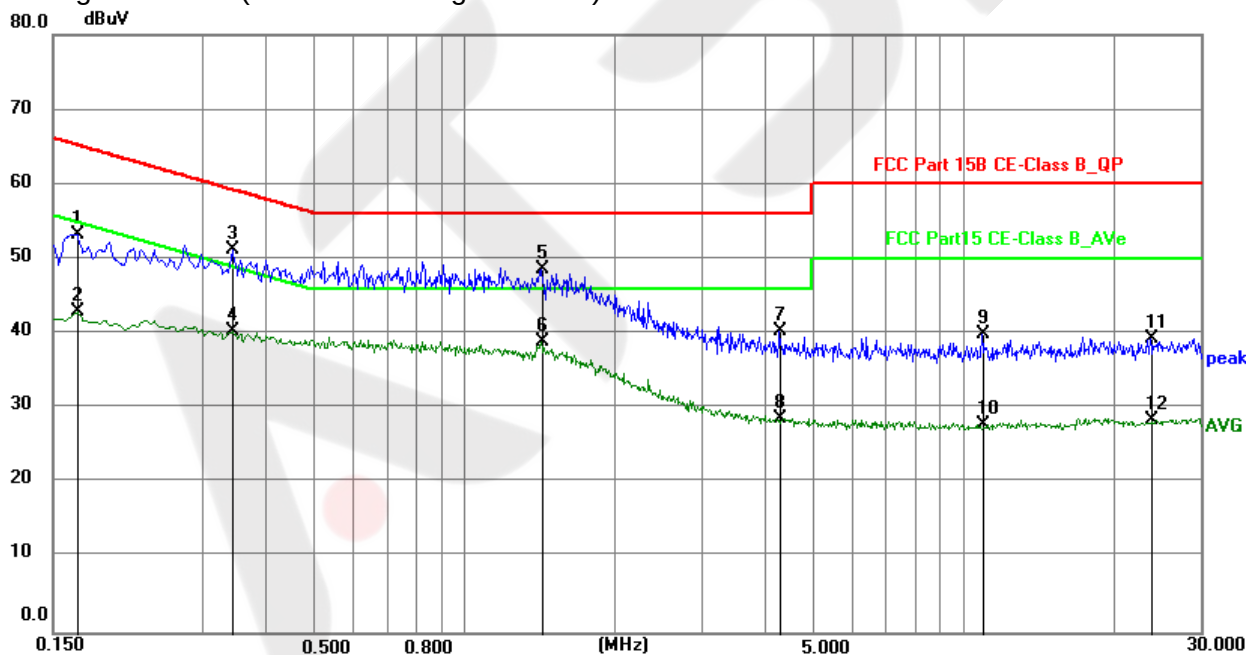

4. RADIATED EMISSION MEASUREMENT

4.1 RADIATED EMISSION LIMITS

In any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the Restricted band specified on Part 15.205(a)&209(a), RSS-Gen Issue 5 and RSS-247 Issue 2, February 2017 (5.5) limit in the table and according to ANSI C63.10-2013 below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (Frequency Range 9kHz-1000MHz)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	(dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

LIMITS OF RESTRICTED FREQUENCY BANDS

FCC:

FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (GHz)
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

For Radiated Emission

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/QP/AV
Start Frequency	9 KHz/150KHz(Peak/QP/AV)
Stop Frequency	150KHz/30MHz(Peak/QP/AV)
RB / VB (emission in restricted band)	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz); 200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/QP
Start Frequency	30 MHz(Peak/QP)
Stop Frequency	1000 MHz (Peak/QP)
RB / VB (emission in restricted band)	120 KHz / 300 KHz

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/AV
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	10th carrier hamonic(Peak/AV)
RB / VB (emission in restricted band)	1MHz / 3MHz(Peak) 1 MHz/1/T MHz(AVG)

For Restricted band

Spectrum Parameter	Setting
Detector	Peak/AV
Start/Stop Frequency	Lower Band Edge: 2310 to 2410 MHz Upper Band Edge: 2475to 2500 MHz
RB / VB	1 MHz / 3 MHz(Peak) 1 MHz/1/T MHz(AVG)

Receiver Parameter	Setting
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

4.2 TEST PROCEDURE


- The measuring distance of at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- The EUT was placed on the top of a rotating table 0.8 meters (above 1GHz is 1.5 m) above the ground at a 3 meter anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment shall be 0.8 m (above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. Horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

4.3 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

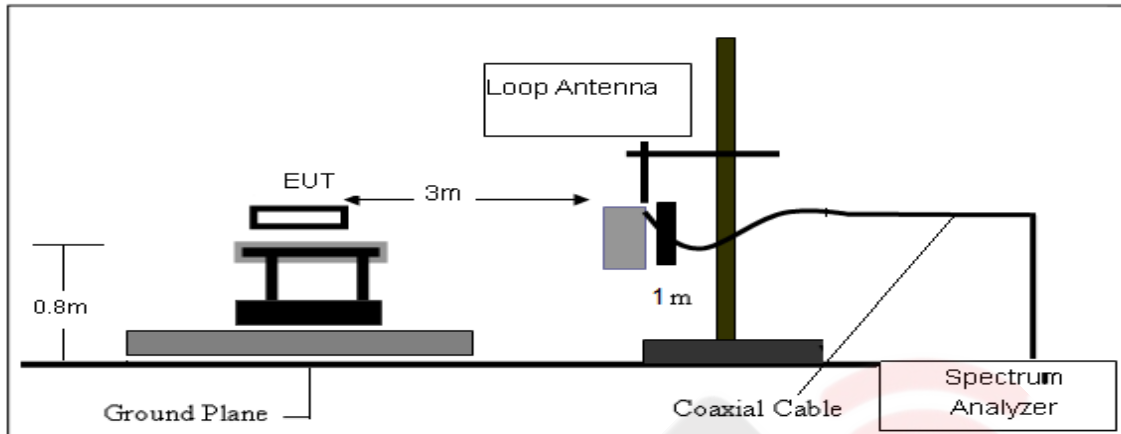

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

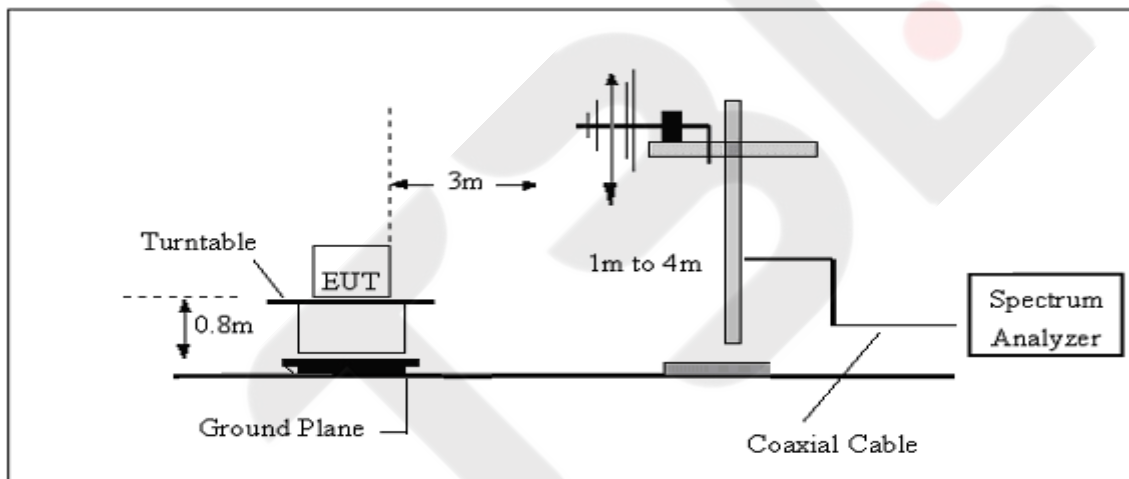

(C) Radiated Emission Test-Up Frequency Above 1GHz

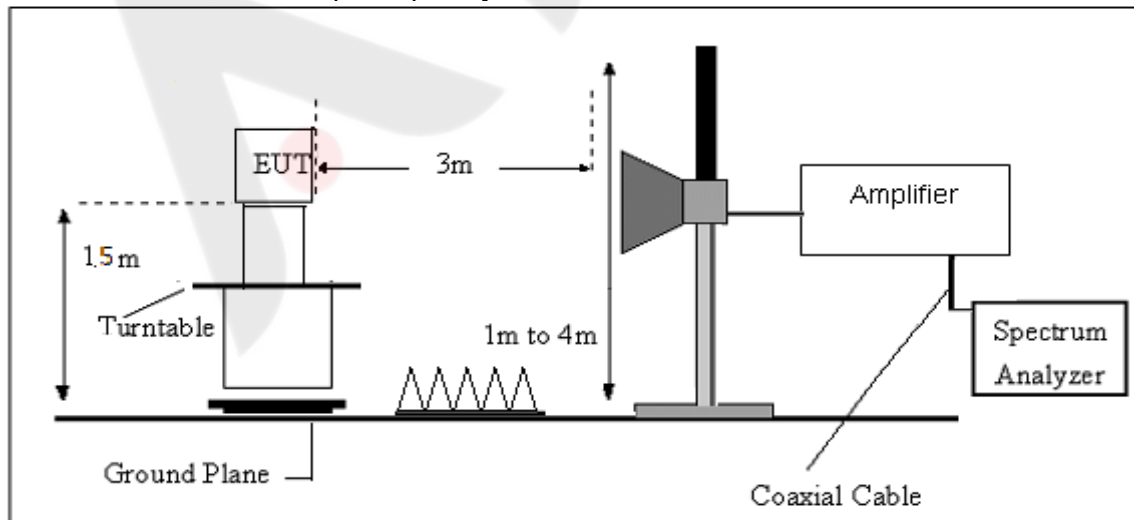

4.4 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

4.5 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where

FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

For example

Frequency	FS	RA	AF	CL	AG	Factor
(MHz)	(dBμV/m)	(dBμV/m)	(dB)	(dB)	(dB)	(dB)
300	40	58.1	12.2	1.6	31.9	-18.1

$$\text{Factor} = \text{AF} + \text{CL} - \text{AG}$$

4.6 TEST RESULTS

Temperature:	23.0℃	Relative Humidity:	59%RH
Test Voltage:	AC120V	Polarization:	--
Test Mode:	TX Mode1/2/3/4/5/6		

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuV) + distance extrapolation factor.

(30MHz -1000MHz)

Temperature	26 ℃	Relative Humidity	56%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Mode 1		


Mode 1- Horizontal

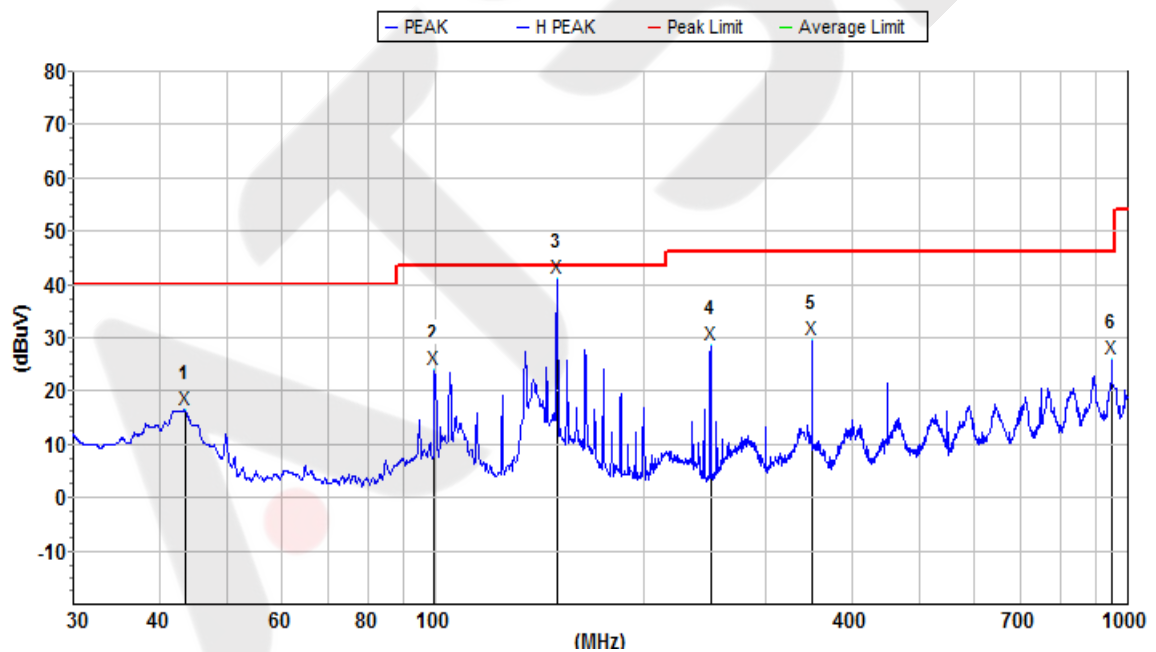

Mk.	Freq.(MHz)	Level(dB uV/m)	Limit(dBu V/m)	Margin(dB)	Ant.F/G.(d B/m)	Amp.G.(d B)	Cbl.L. (dB)	Pol.
1	43.505724	16.6	40.0	23.4	13.9	32.5	0.8	H
2	99.702770	24.2	43.5	19.3	10.1	32.9	1.4	H
3	149.748044	41.1	43.5	2.4	14.1	32.9	1.3	H
4	249.862716	28.7	46.0	17.3	11.6	32.8	2.6	H
5	349.862839	29.8	46.0	16.2	13.4	32.5	2.7	H
6	948.760988	26.0	46.0	20.0	20.3	31.3	3.7	H

Temperature	26 °C	Relative Humidity	56%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Mode 1		

Mode 1-Vertical

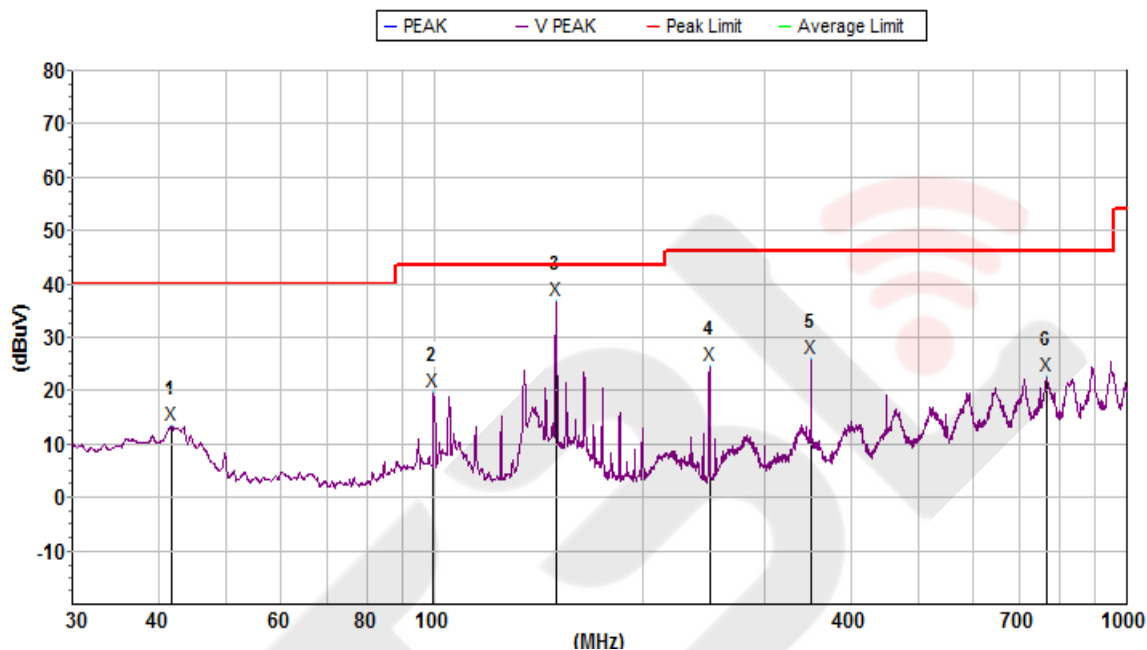


Mk.	Freq.(MHz)	Level(dB uV/m)	Limit(dBu V/m)	Margin(dB)	Ant.F/G.(d B/m)	Amp.G.(d B)	Cbl.L. (dB)	Pol.
1	41.639971	13.4	40.0	26.6	14.0	32.4	0.8	V
2	99.702770	19.8	43.5	23.7	10.1	32.9	1.4	V
3	149.748044	37.0	43.5	6.5	14.1	32.9	1.3	V
4	249.862716	24.8	46.0	21.2	11.6	32.8	2.6	V
5	349.862839	26.2	46.0	19.8	13.8	32.5	2.7	V
6	766.057229	22.6	46.0	23.4	20.4	32.2	3.6	V

(30MHz -1000MHz)

Temperature	26 °C	Relative Humidity	56%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Mode 3		


Mode3 - Horizontal

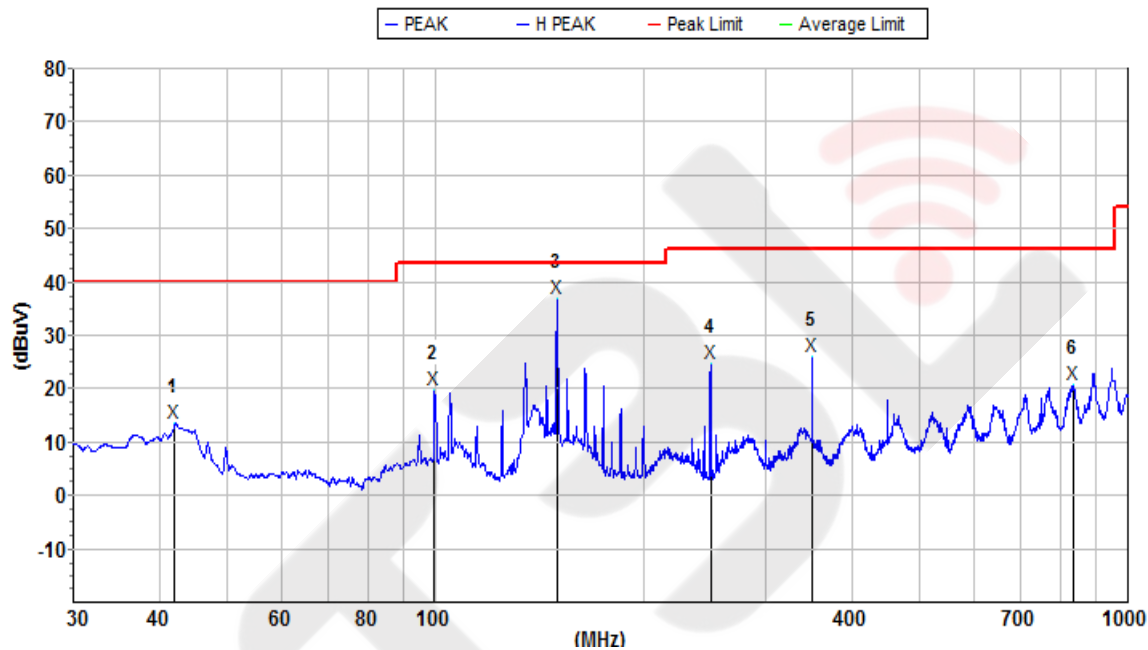

Mk.	Freq.(MHz)	Level(dB uV/m)	Limit(dBu V/m)	Margin(dB)	Ant.F/G.(d B/m)	Amp.G.(d B)	Cbl.L. (dB)	Pol.
1	42.080322	13.6	40.0	26.4	14.0	32.4	0.8	H
2	99.702770	19.9	43.5	23.6	10.1	32.9	1.4	H
3	149.748044	37.0	43.5	6.5	14.1	32.9	1.3	H
4	249.862716	24.8	46.0	21.2	11.6	32.8	2.6	H
5	349.862839	25.9	46.0	20.1	13.4	32.5	2.7	H
6	836.244326	20.7	46.0	25.3	19.2	32.0	3.6	H

Temperature	26 °C	Relative Humidity	56%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Mode 3		

Mode 3 -Vertical

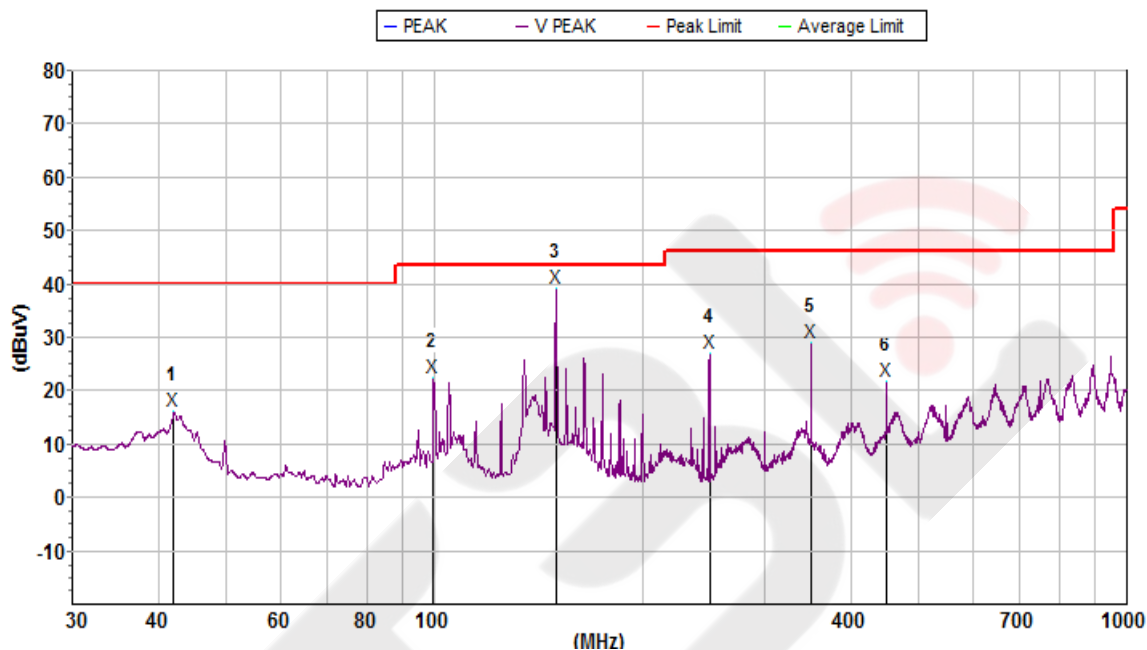


Mk.	Freq.(MHz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Ant.F/G.(dB/m)	Amp.G.(dB)	Cbl.L.(dB)	Pol.
1	42.080322	16.1	40.0	23.9	14.0	32.4	0.8	V
2	99.702770	22.4	43.5	21.1	10.1	32.9	1.4	V
3	149.748044	39.3	43.5	4.2	14.1	32.9	1.3	V
4	249.862716	27.1	46.0	18.9	11.6	32.8	2.6	V
5	349.862839	28.9	46.0	17.1	13.8	32.5	2.7	V
6	449.555842	21.9	46.0	24.1	16.0	32.4	2.7	V

(30MHz -1000MHz)

Temperature	26 °C	Relative Humidity	56%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Mode 4		


Mode 4 - Horizontal

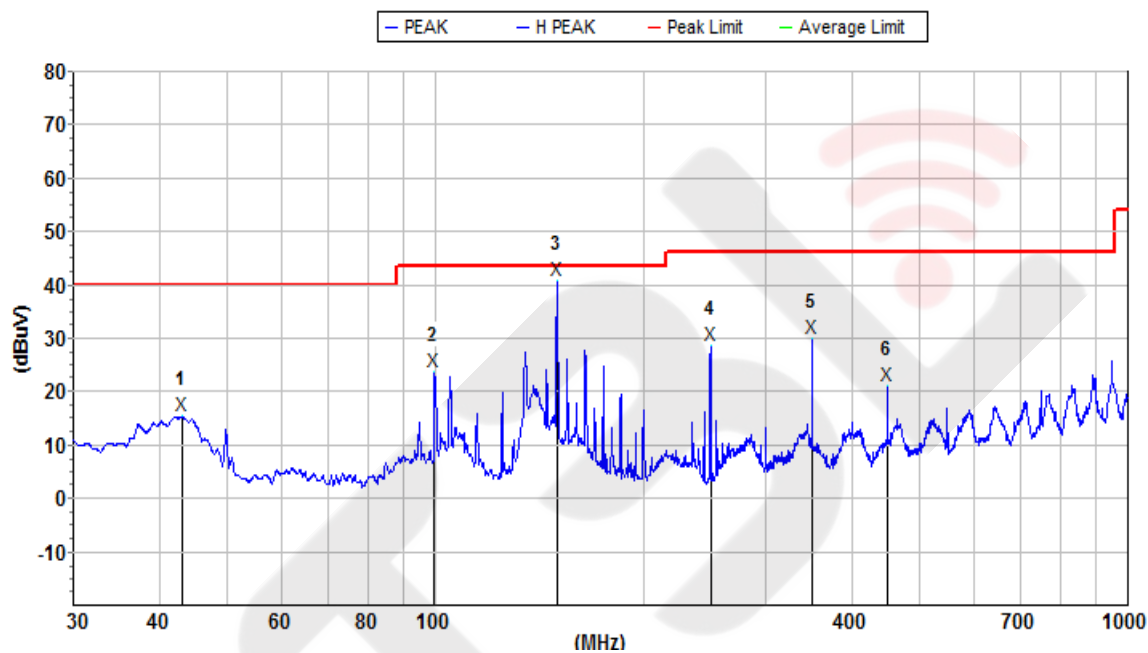

Mk.	Freq.(MHz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Ant.F/G.(dB/m)	Amp.G.(dB)	Cbl.L.(dB)	Pol.
1	43.050457	15.4	40.0	24.6	13.9	32.5	0.8	H
2	99.702770	23.6	43.5	19.9	10.1	32.9	1.4	H
3	149.748044	40.8	43.5	2.7	14.1	32.9	1.3	H
4	249.862716	28.6	46.0	17.4	11.6	32.8	2.6	H
5	349.862839	30.1	46.0	15.9	13.4	32.5	2.7	H
6	449.555842	21.0	46.0	25.0	14.3	32.4	2.7	H

Temperature	26 °C	Relative Humidity	56%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Mode 4		

Mode 4 -Vertical

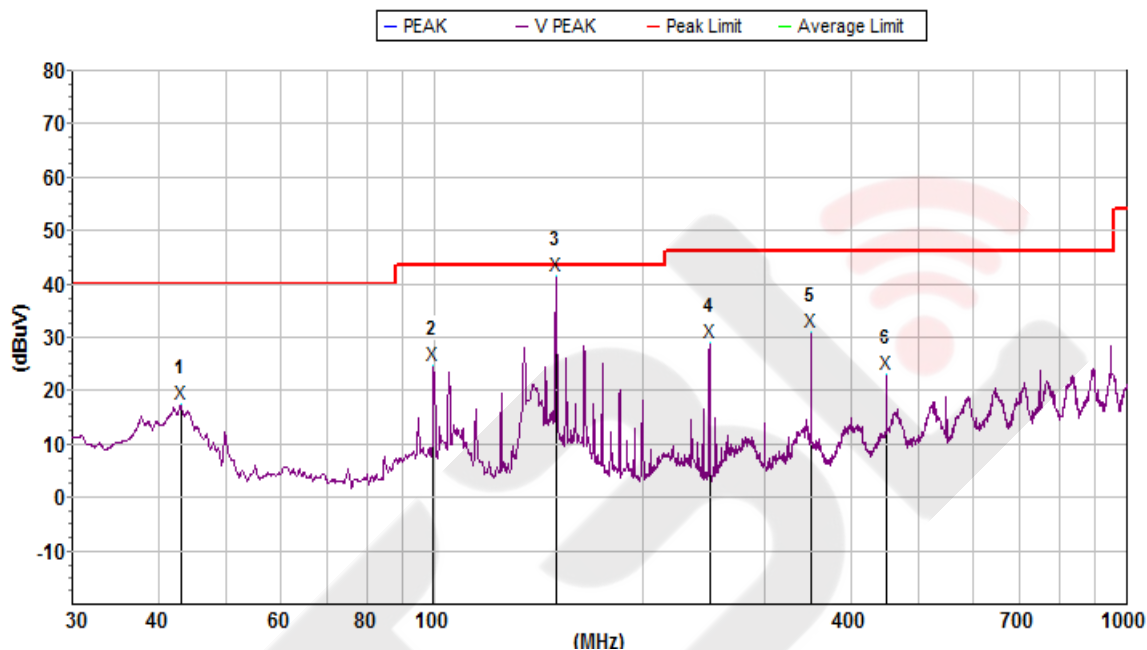


Mk.	Freq.(MHz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Ant.F/G.(dB/m)	Amp.G.(dB)	Cbl.L.(dB)	Pol.
1	43.050457	17.5	40.0	22.5	13.9	32.5	0.8	V
2	99.702770	24.6	43.5	18.9	10.1	32.9	1.4	V
3	149.748044	41.5	43.5	2.0	14.1	32.9	1.3	V
4	249.862716	29.1	46.0	16.9	11.6	32.8	2.6	V
5	349.862839	31.0	46.0	15.0	13.8	32.5	2.7	V
6	449.555842	23.0	46.0	23.0	16.0	32.4	2.7	V

(30MHz -1000MHz)

Temperature	26 °C	Relative Humidity	56%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Mode 6		


Mode 6 - Horizontal

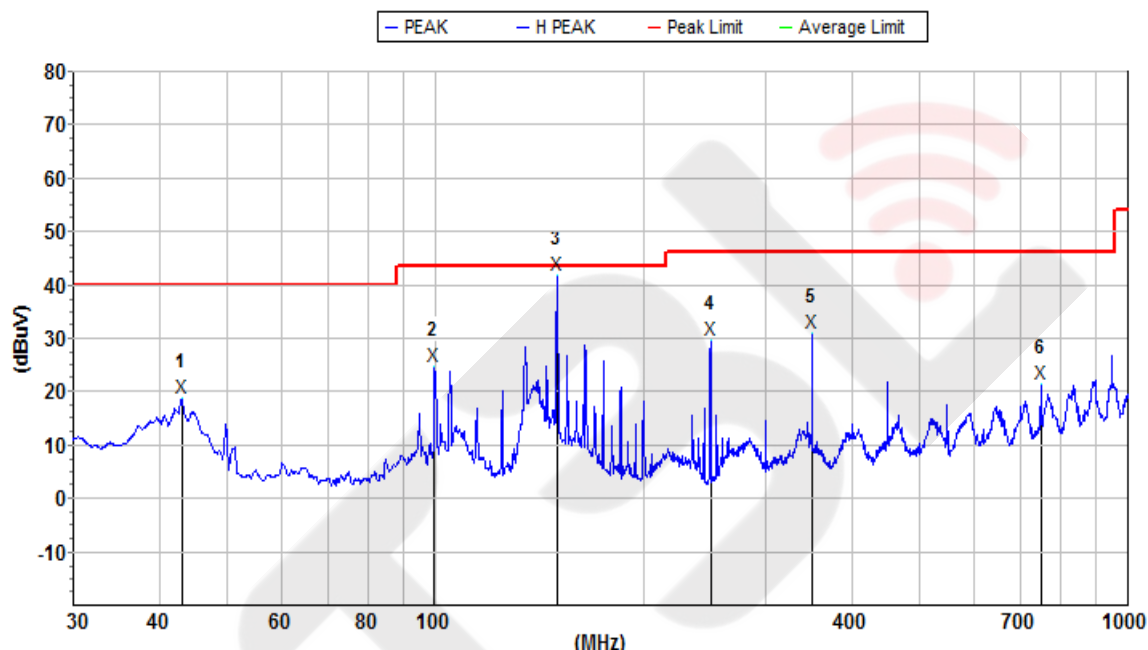

Mk.	Freq.(MHz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Ant.F/G.(dB/m)	Amp.G.(dB)	Cbl.L.(dB)	Pol.
1	43.050457	18.9	40.0	21.1	13.9	32.5	0.8	H
2	99.702770	24.7	43.5	18.8	10.1	32.9	1.4	H
3	149.748044	41.9	43.5	1.6	14.1	32.9	1.3	H
4	249.862716	29.6	46.0	16.4	11.6	32.8	2.6	H
5	349.862839	31.1	46.0	14.9	13.4	32.5	2.7	H
6	750.108251	21.3	46.0	24.7	17.4	32.2	3.6	H

Temperature	26 °C	Relative Humidity	56%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Mode 6		

Mode 6 -Vertical

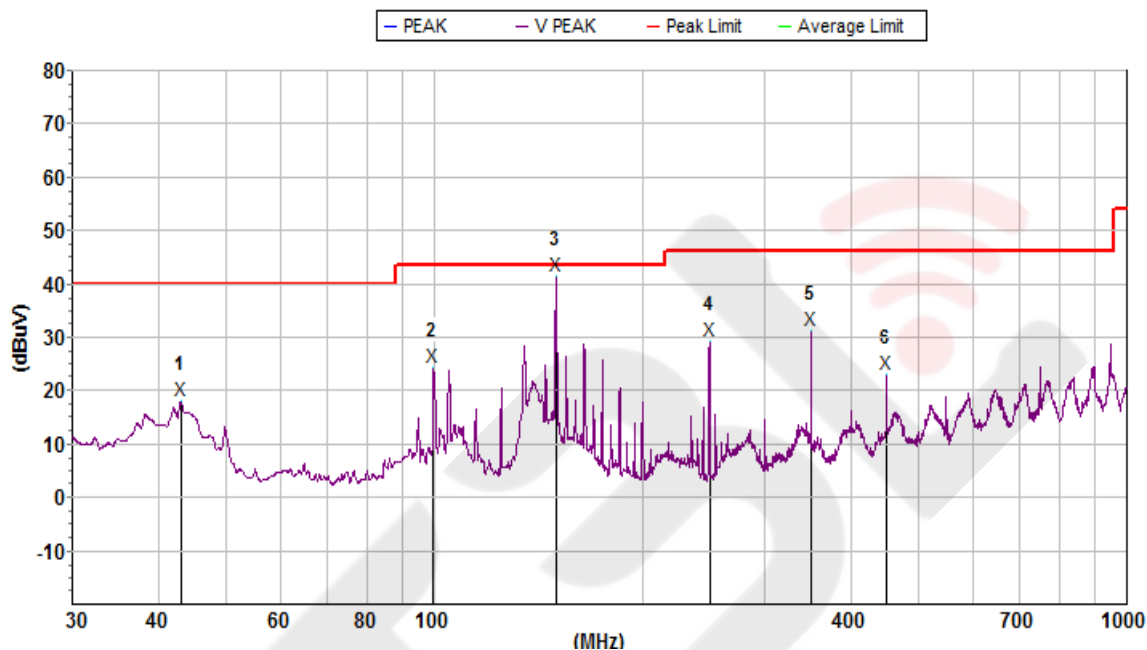


Mk.	Freq.(MHz)	Level(d BuV/m)	Limit(dB uV/m)	Margin(dB)	Ant.F/G.(d B/m)	Amp.G.(d B)	Cbl.L. (dB)	Pol.
1	43.050457	18.3	40.0	21.7	13.9	32.5	0.8	V
2	99.702770	24.5	43.5	19.0	10.1	32.9	1.4	V
3	149.748044	41.6	43.5	1.9	14.1	32.9	1.3	V
4	249.862716	29.5	46.0	16.5	11.6	32.8	2.6	V
5	349.862839	31.3	46.0	14.7	13.8	32.5	2.7	V
6	449.555842	23.2	46.0	22.8	16.0	32.4	2.7	V

(1000MHz -18000MHz)

Temperature	26 °C	Relative Humidity	56%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Mode 1		


Mode1-Horizontal

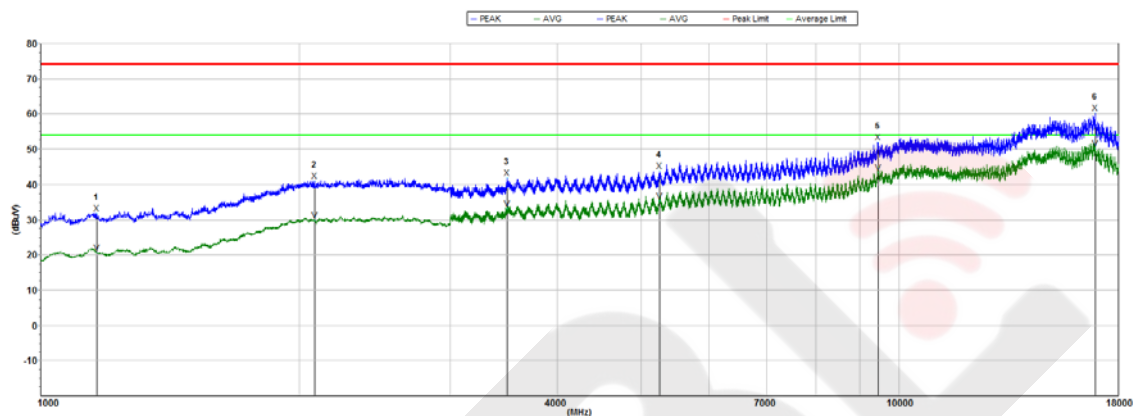

Mk.	Freq.(MHz)	Level(d BuV/m)	Limit(dB uV/m)	Margin(dB)	Ant.F/G.(d B/m)	Amp.G.(d B)	Cbl.L. (dB)	Pol.
Peak								
1	1163.000000	31.9	74.0	42.1	20.7	57.3	2.2	H
2	2085.000000	41.0	74.0	33.0	22.1	50.1	2.7	H
3	3497.250000	42.0	74.0	32.0	24.2	50.5	3.1	H
4	5262.750000	44.0	74.0	30.0	24.9	49.1	3.8	H
5	9453.000000	52.0	74.0	22.0	27.2	48.6	5.4	H
6	16918.500000	60.3	74.0	13.7	31.0	47.3	6.8	H
Avg								
1	1163.000000	20.6	54.0	33.4	20.7	57.3	2.2	H
2	2085.000000	29.8	54.0	24.2	22.1	50.1	2.7	H
3	3497.250000	33.1	54.0	20.9	24.2	50.5	3.1	H
4	5262.750000	35.4	54.0	18.6	24.9	49.1	3.8	H
5	9453.000000	43.5	54.0	10.5	27.2	48.6	5.4	H
6	16918.500000	50.3	54.0	3.7	31.0	47.3	6.8	H

Temperature	26 °C	Relative Humidity	56%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Mode 1		


Mode 1- Vertical

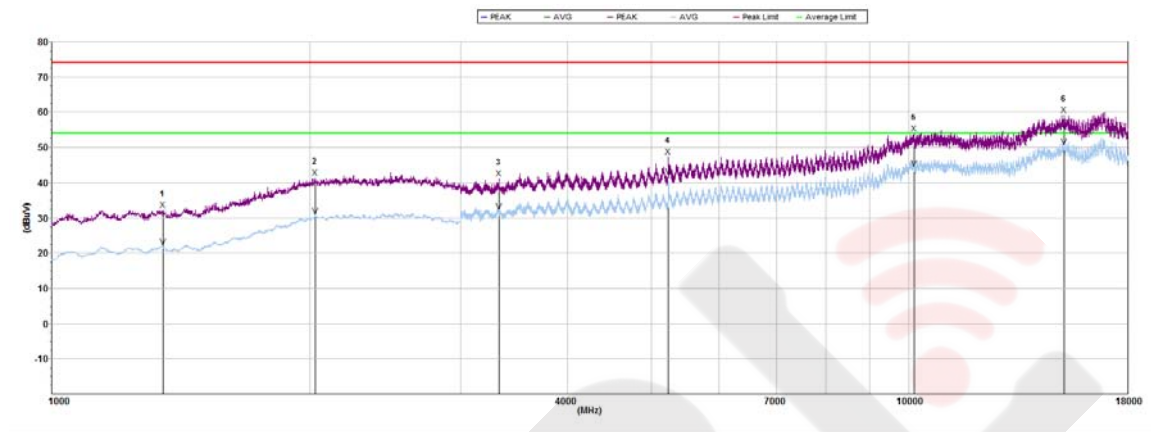

Mk.	Freq.(MHz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Ant.F/G.(dB/m)	Amp.G.(dB)	Cbl.L.(dB)	Pol.
Peak								
1	1348.000000	32.4	74.0	41.6	20.8	57.3	2.3	V
2	2030.000000	41.4	74.0	32.6	22.2	50.1	2.7	V
3	3322.500000	41.3	74.0	32.7	24.5	51.0	3.1	V
4	5238.750000	47.3	74.0	26.7	25.6	49.2	3.8	V
5	10135.500000	53.9	74.0	20.1	28.5	48.5	5.4	V
6	15152.250000	59.3	74.0	14.7	31.1	47.1	6.4	V
Avg								
1	1348.000000	21.9	54.0	32.1	20.8	57.3	2.3	V
2	2030.000000	30.6	54.0	23.4	22.2	50.1	2.7	V
3	3322.500000	31.9	54.0	22.1	24.5	51.0	3.1	V
4	5238.750000	41.9	54.0	12.1	25.6	49.2	3.8	V
5	10135.500000	44.2	54.0	9.8	28.5	48.5	5.4	V
6	15152.250000	50.2	54.0	3.8	31.1	47.1	6.4	V


(1000MHz -18000MHz)

Temperature	26 °C	Relative Humidity	56%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Mode 3		

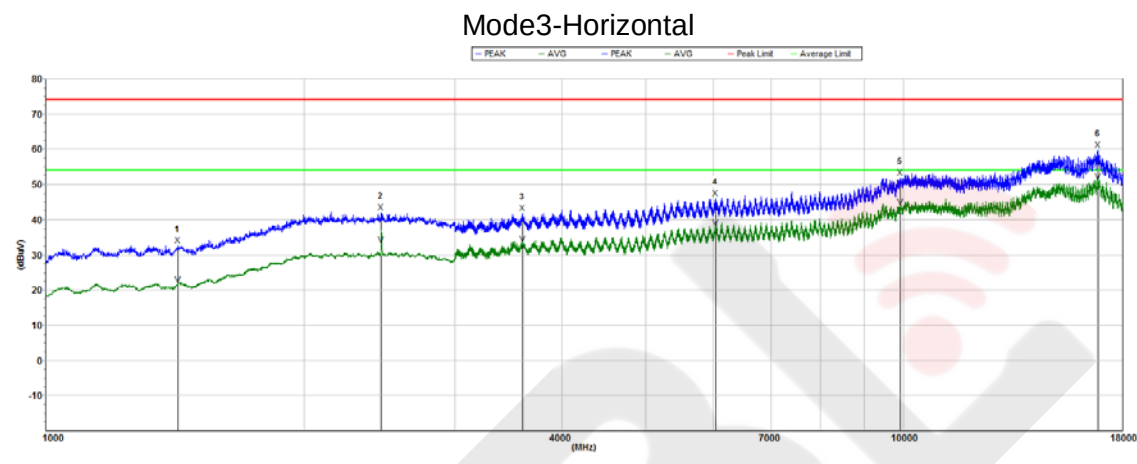

Mk.	Freq.(MHz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Ant.F/G.(dB/m)	Amp.G.(dB)	Cbl.L.(dB)	Pol.
Peak								
1	1426.000000	32.7	74.0	41.3	20.9	57.3	2.4	H
2	2460.000000	42.1	74.0	31.9	22.9	50.2	2.8	H
3	3595.500000	41.9	74.0	32.1	24.2	50.4	3.1	H
4	6039.000000	46.1	74.0	27.9	25.1	48.9	4.1	H
5	9914.250000	52.0	74.0	22.0	27.5	48.5	5.4	H
6	16839.000000	59.8	74.0	14.2	31.0	47.4	6.8	H
Avg								
1	1426.000000	21.5	54.0	32.5	20.9	57.3	2.4	H
2	2460.000000	33.0	54.0	21.0	22.9	50.2	2.8	H
3	3595.500000	33.1	54.0	20.9	24.2	50.4	3.1	H
4	6039.000000	37.8	54.0	16.2	25.1	48.9	4.1	H
5	9914.250000	43.6	54.0	10.4	27.5	48.5	5.4	H
6	16839.000000	51.0	54.0	3.0	31.0	47.4	6.8	H

Temperature	26 °C	Relative Humidity	56%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Mode 3		

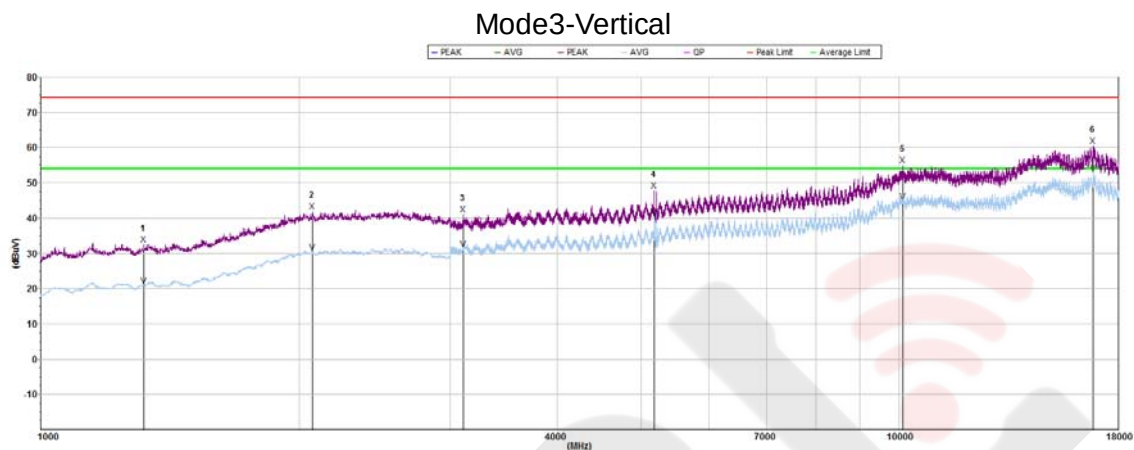


Mk.	Freq.(MHz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Ant.F/G.(dB/m)	Amp.G.(dB)	Cbl.L.(dB)	Pol.
Peak								
1	1319.000000	32.5	74.0	41.5	20.8	57.3	2.3	V
2	2074.000000	41.9	74.0	32.1	22.3	50.1	2.7	V
3	3104.250000	41.1	74.0	32.9	24.4	51.5	3.0	V
4	5185.500000	47.8	74.0	26.2	25.6	49.2	3.7	V
5	10102.500000	55.0	74.0	19.0	28.5	48.5	5.4	V
6	16830.750000	60.5	74.0	13.5	31.5	47.4	6.8	V
Avg								
1	1319.000000	20.9	54.0	33.1	20.8	57.3	2.3	V
2	2074.000000	30.3	54.0	23.7	22.3	50.1	2.7	V
3	3104.250000	31.1	54.0	22.9	24.4	51.5	3.0	V
4	5185.500000	40.1	54.0	13.9	25.6	49.2	3.7	V
5	10102.500000	44.7	54.0	9.3	28.5	48.5	5.4	V
6	16830.750000	52.8	54.0	1.2	31.5	47.4	6.8	V

(1000MHz -18000MHz)

Temperature	26 °C	Relative Humidity	56%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Mode 4		


Mode 4- Horizontal

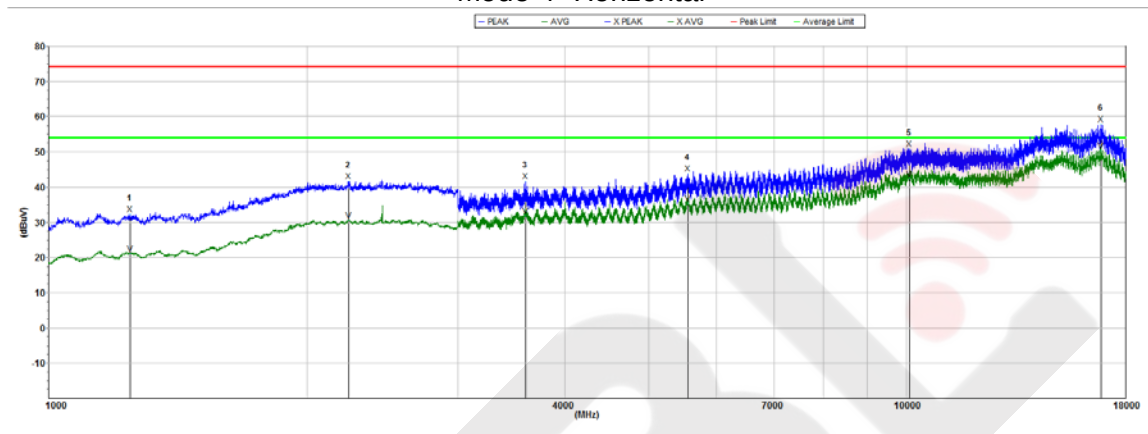

Mk.	Freq.(MHz)	Level(d BuV/m)	Limit(dB uV/m)	Margin(dB)	Ant.F/G.(d B/m)	Amp.G.(d B)	Cbl.L. (dB)	Pol.
Peak								
1	1245.000000	32.3	74.0	41.7	20.7	57.3	2.3	H
2	2235.000000	41.8	74.0	32.2	22.5	50.1	2.8	H
3	3597.000000	41.7	74.0	32.3	24.2	50.4	3.2	H
4	5562.750000	43.8	74.0	30.2	25.0	49.1	4.0	H
5	10077.750000	51.0	74.0	23.0	27.6	48.5	5.4	H
6	16840.500000	57.9	74.0	16.1	30.9	47.4	6.8	H
Avg								
1	1245.000000	21.1	54.0	32.9	20.7	57.3	2.3	H
2	2235.000000	30.5	54.0	23.5	22.5	50.1	2.8	H
3	3597.000000	31.9	54.0	22.1	24.2	50.4	3.2	H
4	5562.750000	35.3	54.0	18.7	25.0	49.1	4.0	H
5	10077.750000	42.3	54.0	11.7	27.6	48.5	5.4	H
6	16840.500000	50.4	54.0	3.6	30.9	47.4	6.8	H

Temperature	26 °C	Relative Humidity	56%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Mode 4		

Mode 4 - Vertical

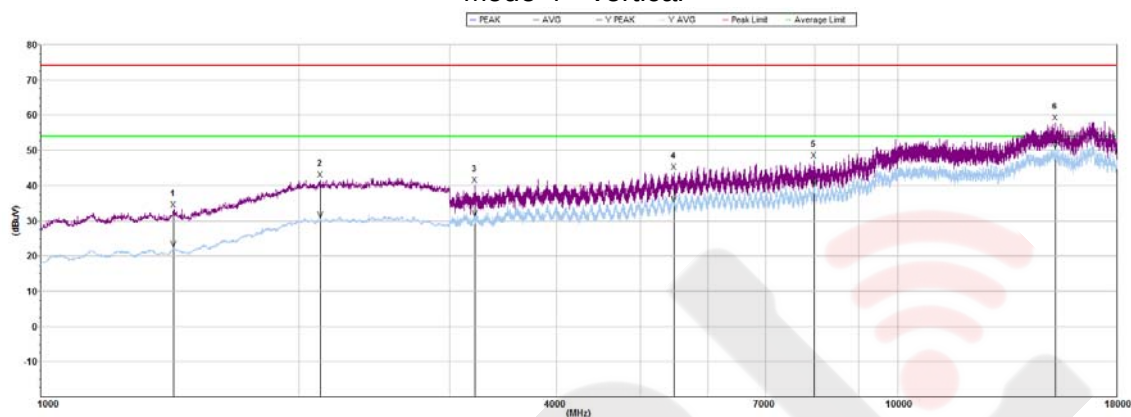


Mk.	Freq.(MHz)	Level(d BuV/m)	Limit(dB uV/m)	Margin(dB)	Ant.F/G.(d B/m)	Amp.G.(d B)	Cbl.L. (dB)	Pol.
Peak	1430.000000	33.1	74.0	40.9	20.9	57.3	2.4	
1	2119.000000	41.6	74.0	32.4	22.4	50.1	2.7	V
2	3207.750000	40.2	74.0	33.8	24.4	51.3	3.0	V
3	5475.000000	43.8	74.0	30.2	25.4	49.1	4.0	V
4	7983.750000	47.2	74.0	26.8	26.9	48.6	4.9	V
5	15264.000000	57.9	74.0	16.1	31.1	47.2	6.4	V
6								V
Avg	1430.000000	22.0	54.0	32.0	20.9	57.3	2.4	
1	2119.000000	30.3	54.0	23.7	22.4	50.1	2.7	V
2	3207.750000	30.8	54.0	23.2	24.4	51.3	3.0	V
3	5475.000000	34.6	54.0	19.4	25.4	49.1	4.0	V
4	7983.750000	39.0	54.0	15.0	26.9	48.6	4.9	V
5	15264.000000	50.1	54.0	3.9	31.1	47.2	6.4	V
6	1430.000000	33.1	74.0	40.9	20.9	57.3	2.4	V

(1000MHz -18000MHz)


Temperature	26 °C	Relative Humidity	56%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Mode 6		

Mode 6- Horizontal

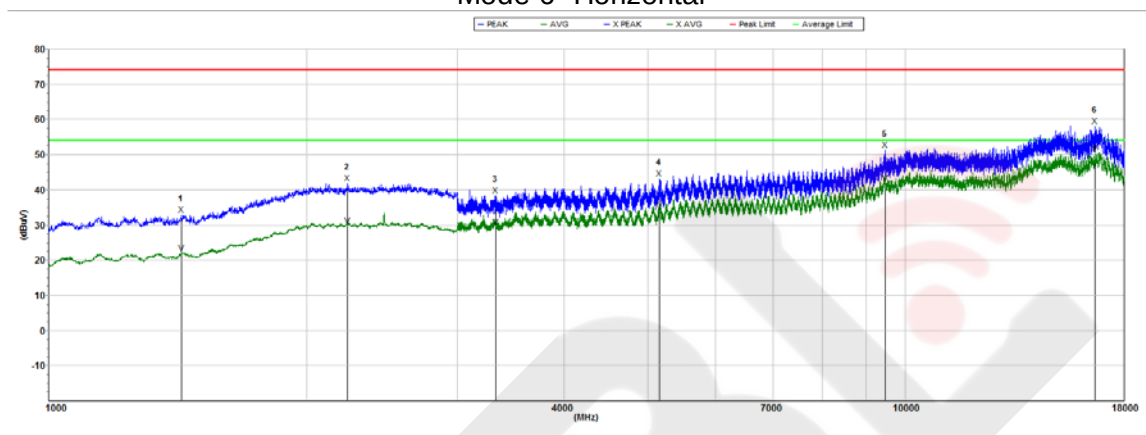

Mk.	Freq.(MHz)	Level(d BuV/m)	Limit(dB uV/m)	Margin(dB)	Ant.F/G.(d B/m)	Amp.G.(d B)	Cbl.L. (dB)	Pol.
Peak								
1	1429.000000	33.0	74.0	41.0	20.8	57.3	2.4	H
2	2232.000000	41.9	74.0	32.1	22.5	50.1	2.8	H
3	3324.750000	38.5	74.0	35.5	24.1	51.0	3.1	H
4	5163.750000	43.3	74.0	30.7	24.8	49.2	3.8	H
5	9462.750000	51.3	74.0	22.7	27.2	48.6	5.4	H
6	16639.500000	58.1	74.0	15.9	30.9	47.7	6.8	H
Avg								
1	1429.000000	22.1	54.0	31.9	20.8	57.3	2.4	H
2	2232.000000	30.0	54.0	24.0	22.5	50.1	2.8	H
3	3324.750000	29.5	54.0	24.5	24.1	51.0	3.1	H
4	5163.750000	33.8	54.0	20.2	24.8	49.2	3.8	H
5	9462.750000	41.9	54.0	12.1	27.2	48.6	5.4	H
6	16639.500000	50.4	54.0	3.6	30.9	47.7	6.8	H

Temperature	26 °C	Relative Humidity	56%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Mode 6		

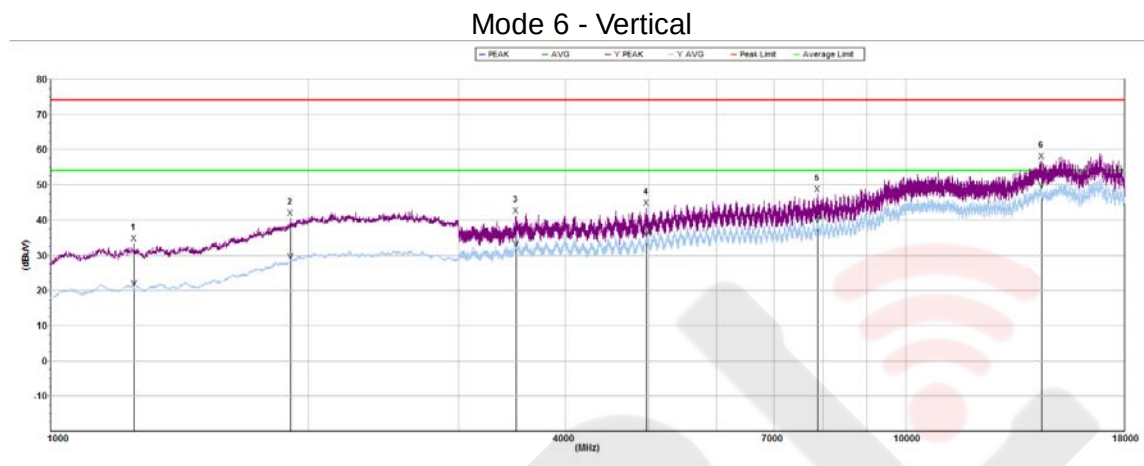


Mk.	Freq.(MHz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Ant.F/G.(dB/m)	Amp.G.(dB)	Cbl.L.(dB)	Pol.
Peak								
1	1253.000000	33.4	74.0	40.6	20.7	57.3	2.3	V
2	1908.000000	40.6	74.0	33.4	21.8	51.4	2.6	V
3	3498.000000	41.3	74.0	32.7	24.6	50.5	3.1	V
4	4976.250000	43.5	74.0	30.5	25.7	49.2	3.6	V
5	7884.750000	47.3	74.0	26.7	26.8	48.6	4.8	V
6	14395.500000	56.7	74.0	17.3	30.8	47.2	6.3	V
Avg								
1	1253.000000	20.6	54.0	33.4	20.7	57.3	2.3	V
2	1908.000000	28.3	54.0	25.7	21.8	51.4	2.6	V
3	3498.000000	31.8	54.0	22.2	24.6	50.5	3.1	V
4	4976.250000	34.9	54.0	19.1	25.7	49.2	3.6	V
5	7884.750000	38.6	54.0	15.4	26.8	48.6	4.8	V
6	14395.500000	48.4	54.0	5.6	30.8	47.2	6.3	V

Note:

- Factor=Ant.Factor+cable loss-Amp.Gain .
- Level contains the factor; Margin=Limit-Level.
- Other 18G-25G Emission detected are more than 20dB below the limit.


4.6 TEST RESULTS (Restricted Bands Requirements)

Mode 1 GFSK-Low Horizontal

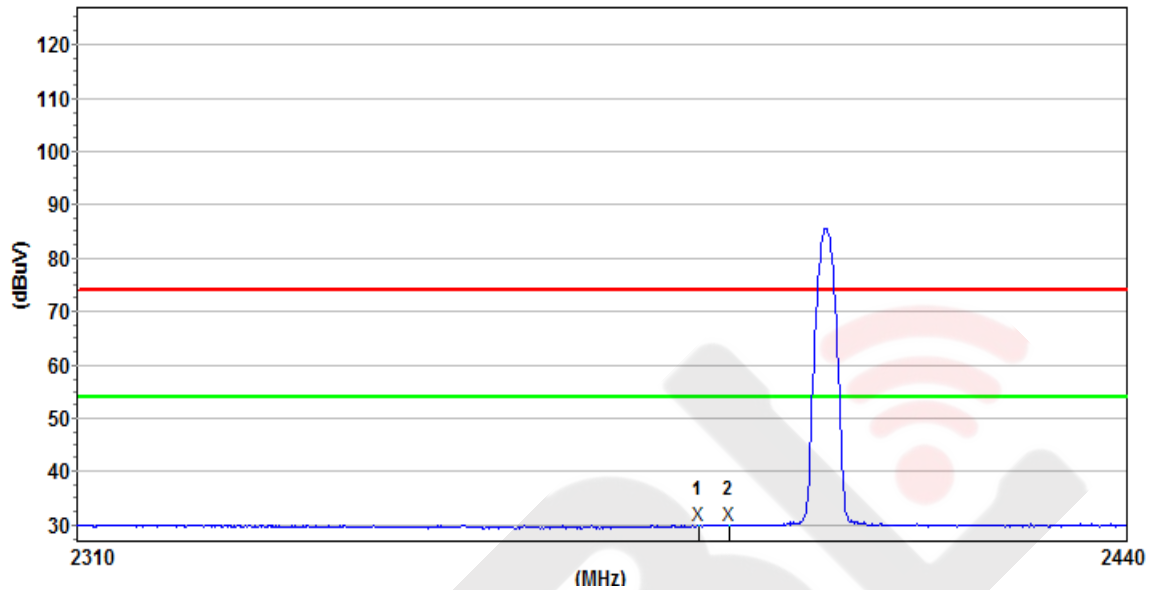


Mk.	Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.F/G. (dB/m)	Amp.G. (dB)	Cbl.L. (dB)	Pol.
AVG								
1	2386.229678	30.0	54.0	24.0	22.8	50.2	2.8	H
2	2390.000000	29.9	54.0	24.1	22.8	50.2	2.8	H

Vertical

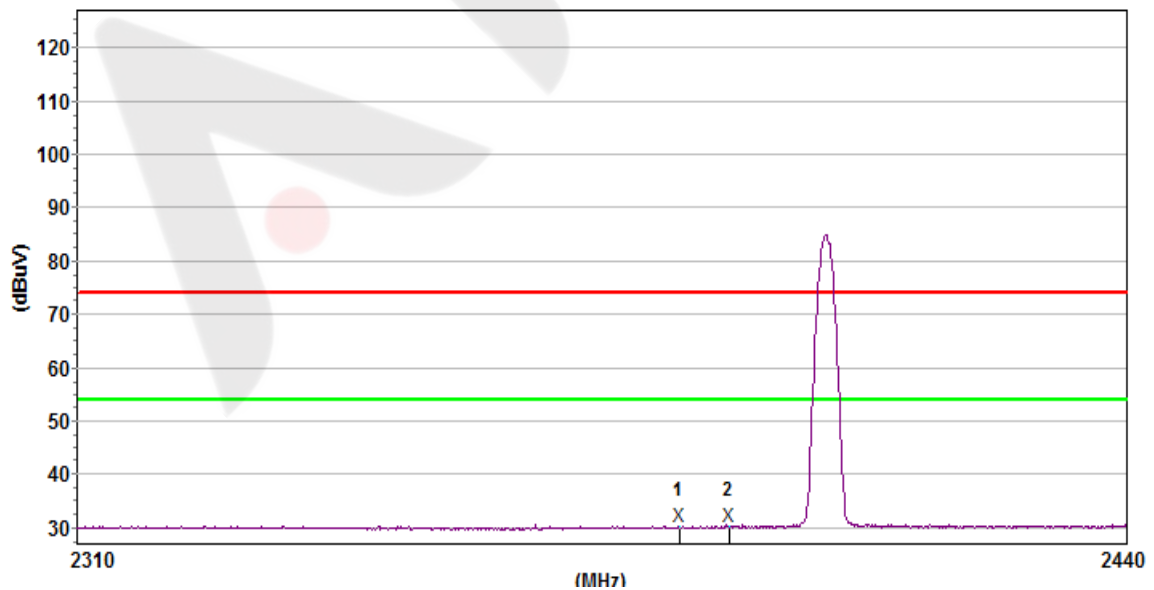


Mk.	Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.F/G. (dB/m)	Amp.G. (dB)	Cbl.L. (dB)	Pol.
AVG								
1	2383.748670	30.3	54.0	23.7	23.1	50.2	2.8	V
2	2390.000000	30.2	54.0	23.8	23.1	50.2	2.8	V

Mode 1 GFSK-Low Horizontal

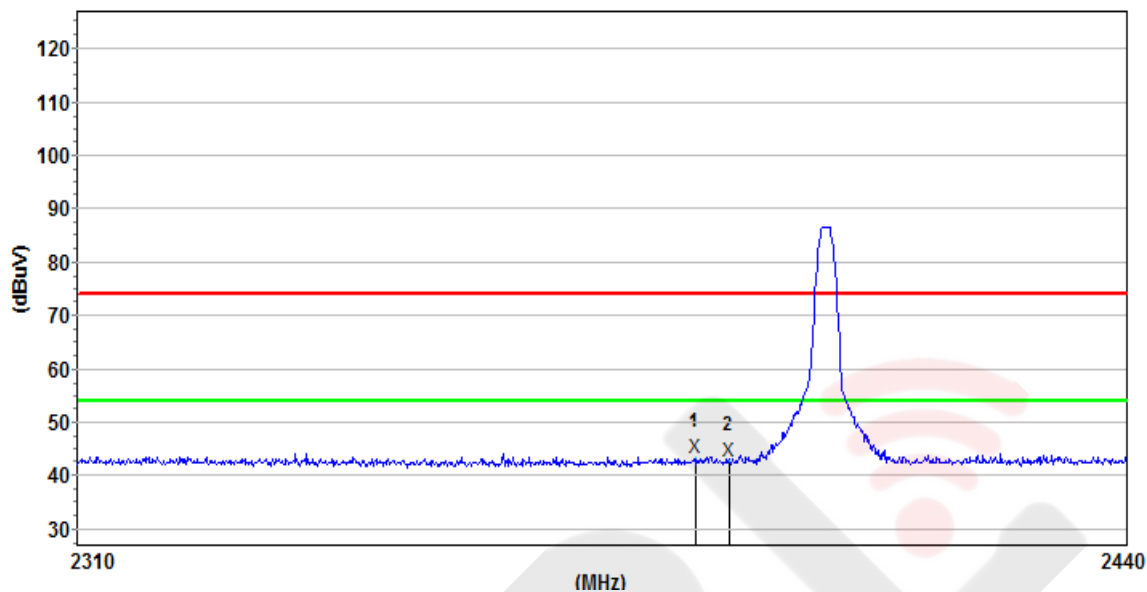


Mk.	Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.F/G. (dB/m)	Amp.G. (dB)	Cbl.L. (dB)	Pol.
Peak:								
1	2385.837768	43.4	74.0	30.6	22.8	50.2	2.8	H
2	2390.000000	42.8	74.0	31.2	22.8	50.2	2.8	H

Vertical

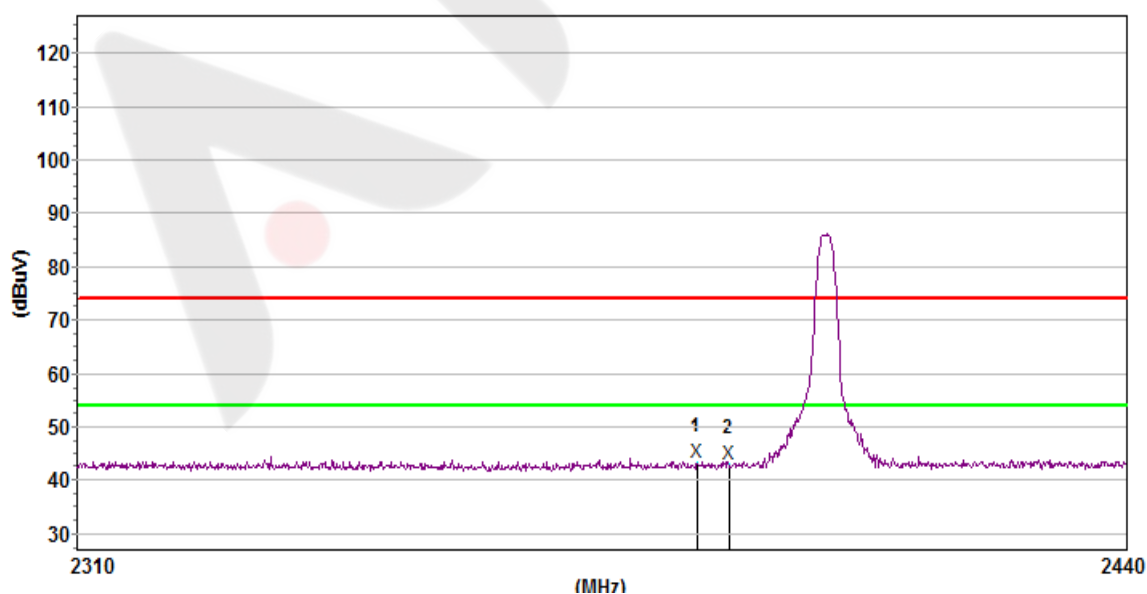


Mk.	Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.F/G. (dB/m)	Amp.G. (dB)	Cbl.L. (dB)	Pol.
Peak:								
1	2385.968398	43.4	74.0	30.6	23.1	50.2	2.8	V
2	2390.000000	43.2	74.0	30.8	23.1	50.2	2.8	V

Mode 3 GFSK-High Horizontal

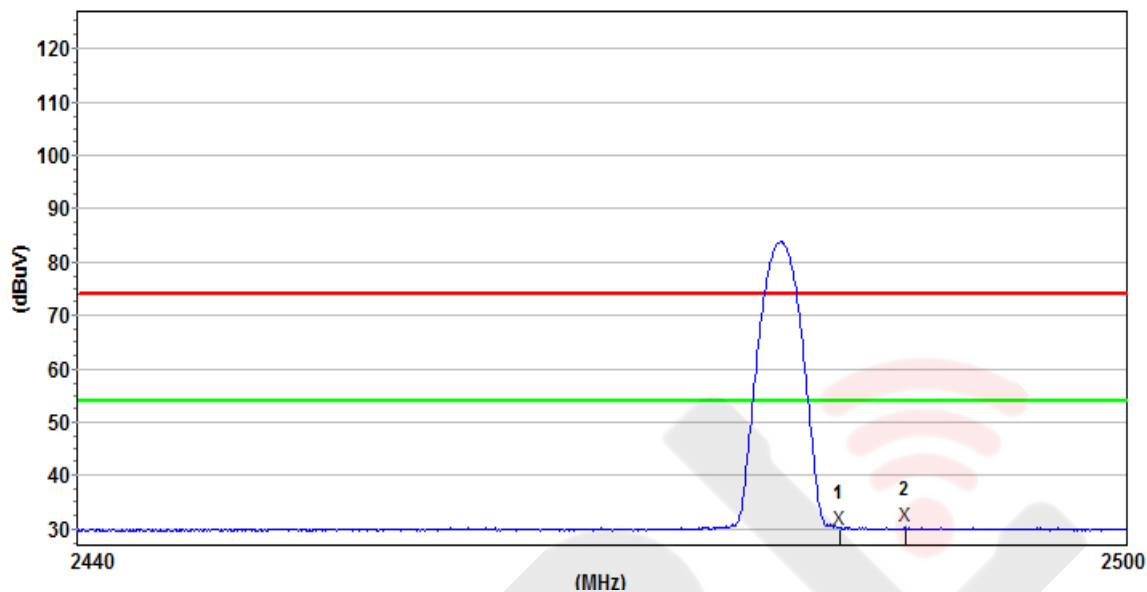

Mk.	Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.F/G. (dB/m)	Amp.G. (dB)	Cbl.L. (dB)	Pol.
AVG								
1	2483.500000	30.1	54.0	23.9	22.9	50.2	2.8	H
2	2487.218390	30.5	54.0	23.5	22.9	50.2	2.8	H


Vertical

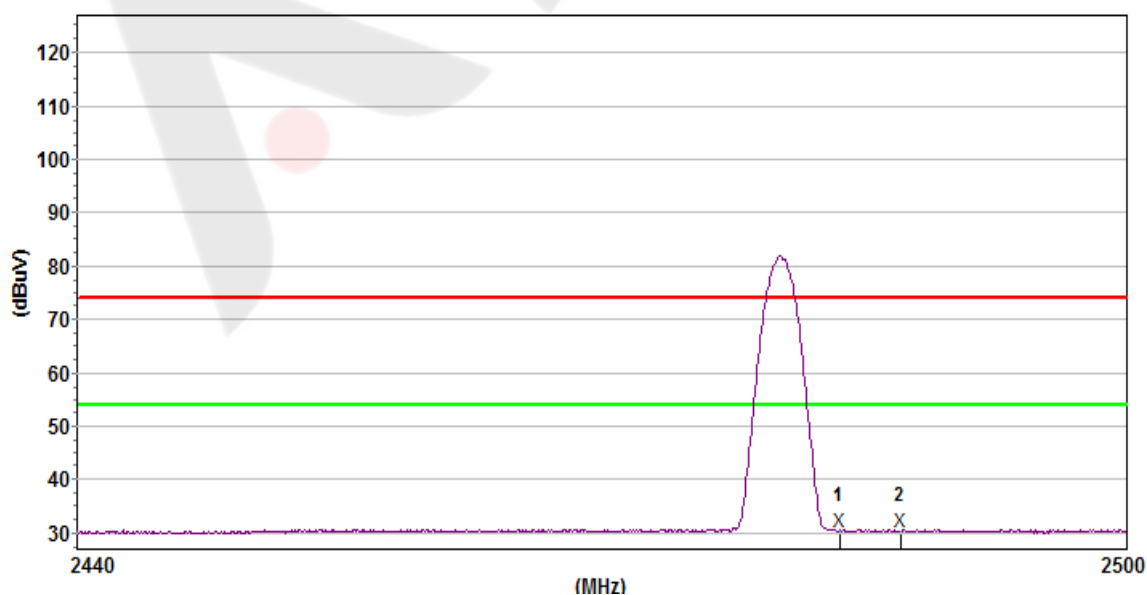

Mk.	Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.F/G. (dB/m)	Amp.G. (dB)	Cbl.L. (dB)	Pol.


AVG								
1	2483.500000	30.4	54.0	23.6	23.3	50.2	2.8	V
2	2486.976717	30.3	54.0	23.7	23.3	50.2	2.8	V

Mode 3 GFSK-High Horizontal

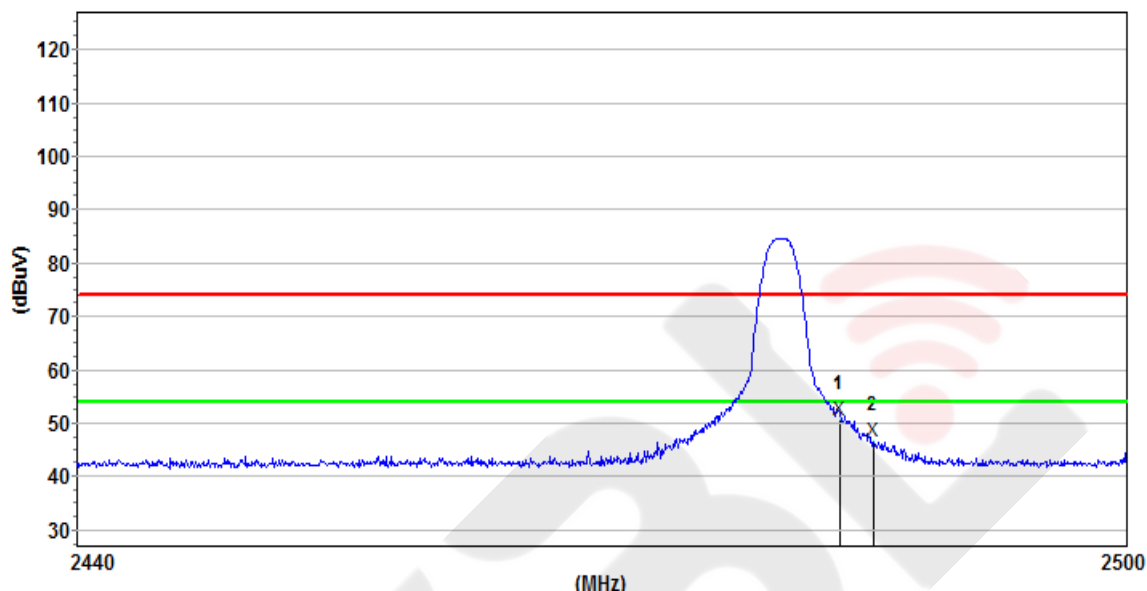

Mk.	Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.F/G. (dB/m)	Amp.G. (dB)	Cbl.L. (dB)	Pol.
Peak:								
1	2483.500000	50.6	74.0	23.4	22.9	50.2	2.8	H
2	2485.406414	46.7	74.0	27.3	22.9	50.2	2.8	H

Vertical

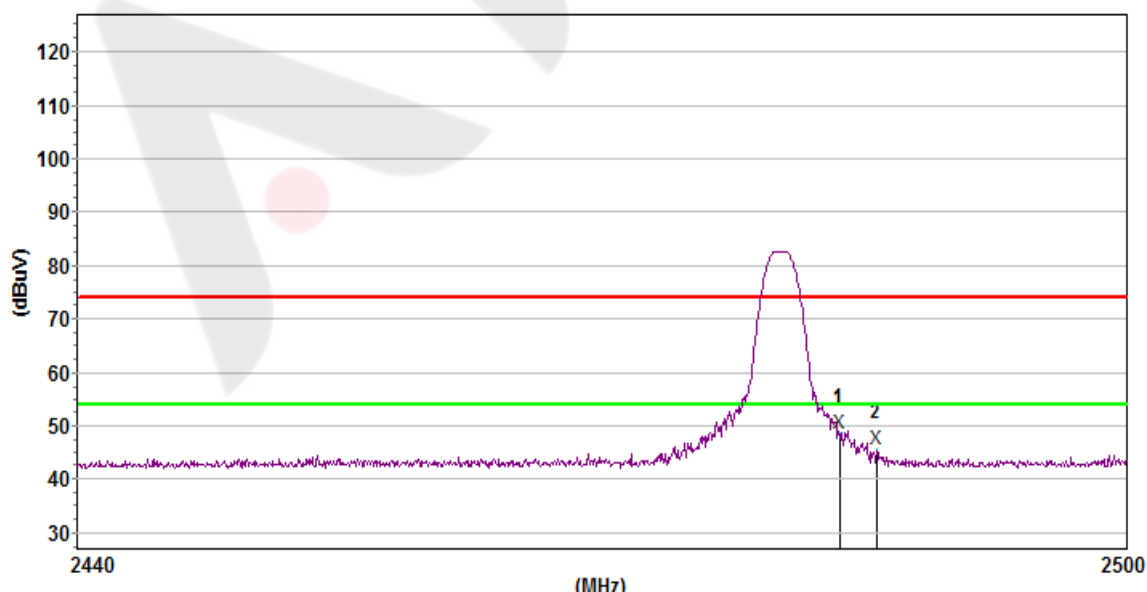

Mk.	Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.F/G. (dB/m)	Amp.G. (dB)	Cbl.L. (dB)	Pol.
Peak:								
1	2483.500000	48.6	74.0	25.4	23.3	50.2	2.8	V
2	2485.587552	45.6	74.0	28.4	23.3	50.2	2.8	V

5. CONDUCTED SPURIOUS & BAND EDGE EMISSION

5.1 LIMIT

According to FCC section 15.247(d)&RSS-247 Issue 2, in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.2 TEST PROCEDURE

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	30 MHz to 10th carrier harmonic
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

For Band edge

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	Lower Band Edge: 2300 – 2407 MHz Upper Band Edge: 2475 – 2500 MHz
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

5.3 TEST SETUP



The EUT which is powered by the Battery, is connected to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50 Ohm; the path loss as the factor is calibrated to correct the reading. Make the measurement with the spectrum analyzer's resolution bandwidth(RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.


5.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.


5.5 TEST RESULTS

Temperature:	25°C	Relative Humidity:	50%RH
Test Voltage:	DC 5V	Test Mode:	TX Mode 1/2/3/4/5/6


Mode1 CH00

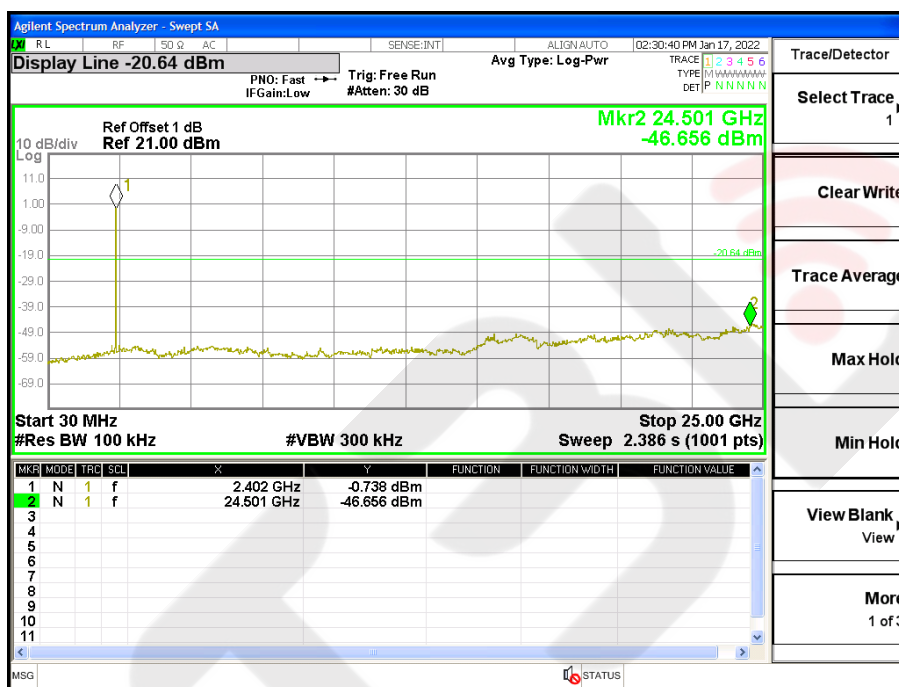


Mode2 CH19

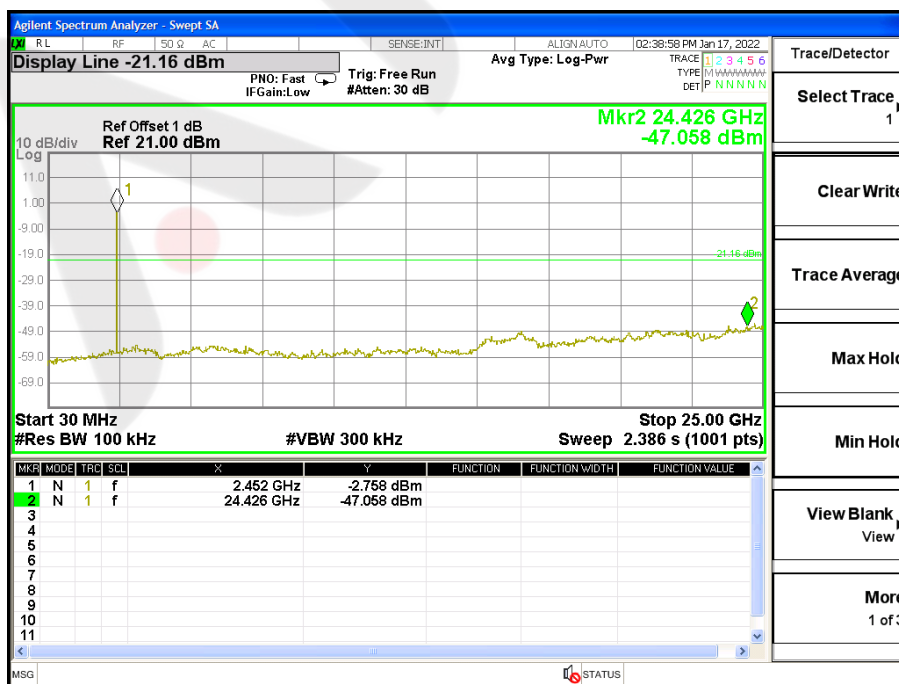


Mode3 CH39

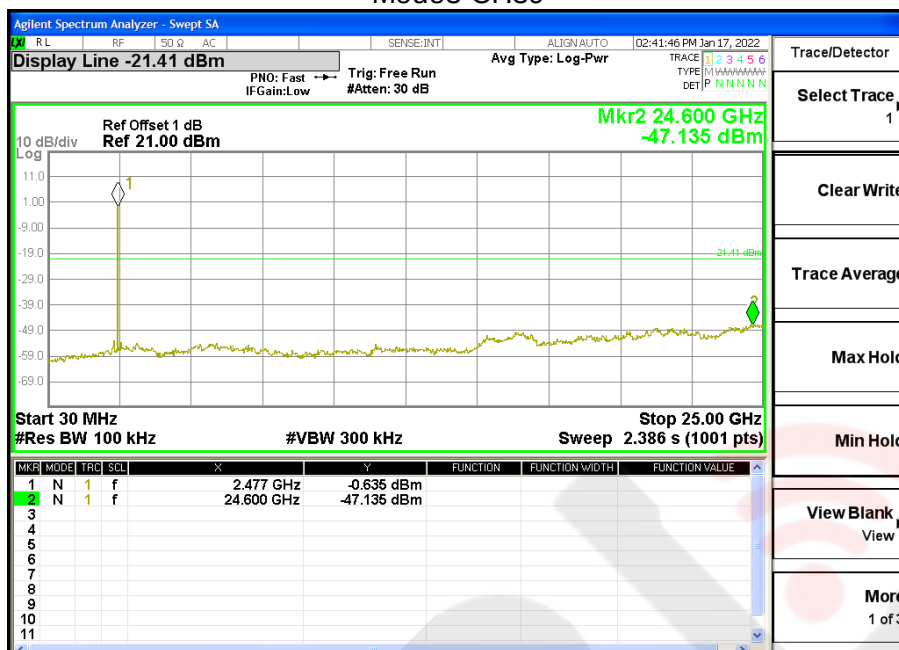


Mode4 CH00

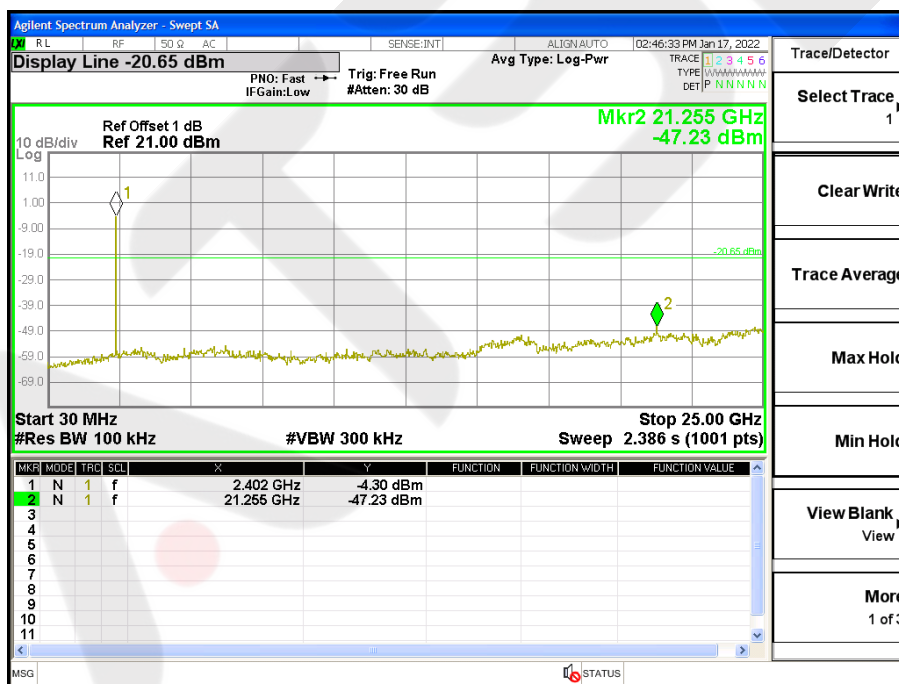

Mode 5 CH19

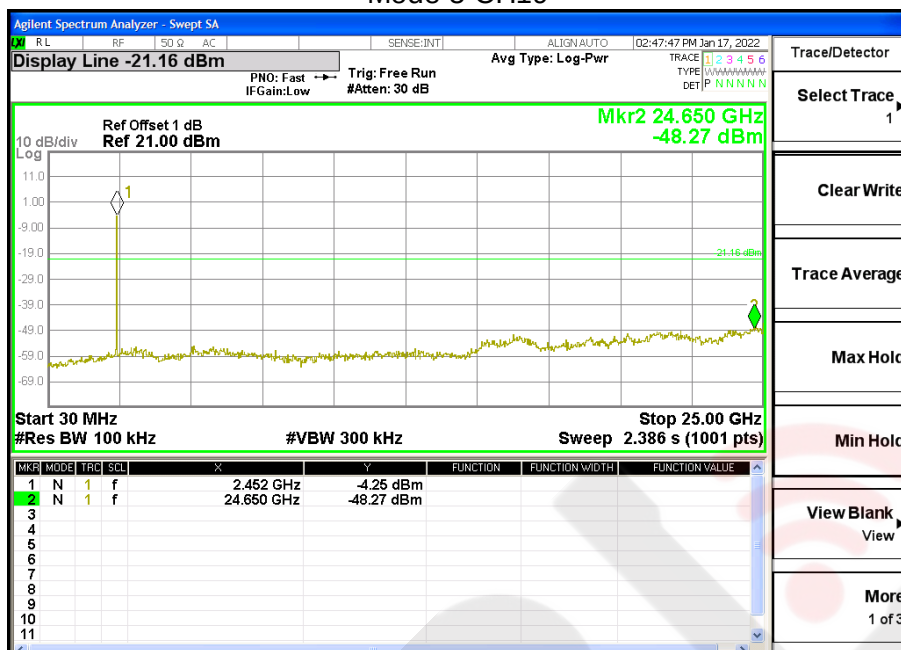


Mode6 CH39

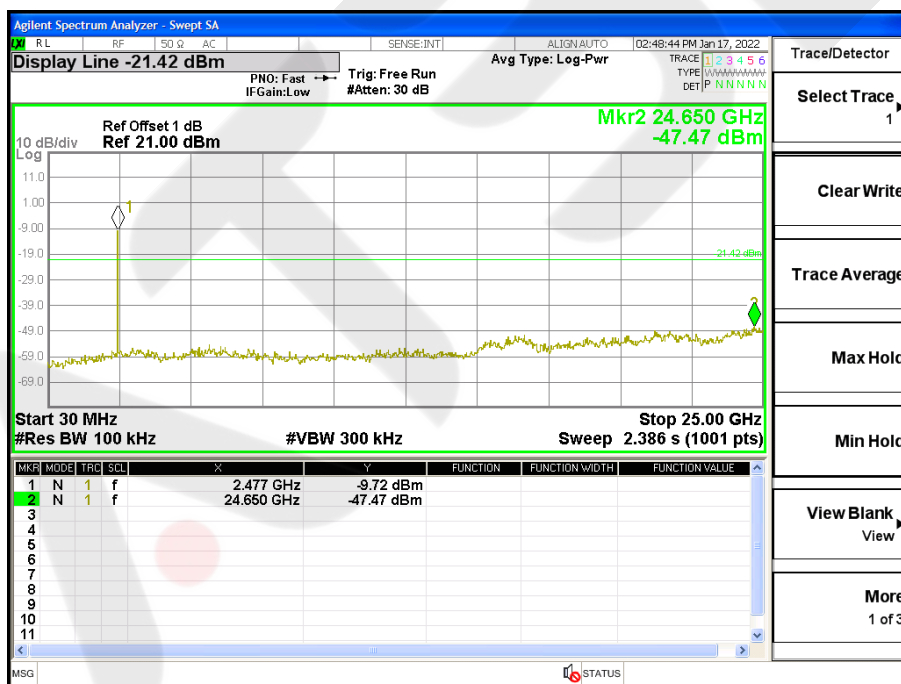


For Band edge(it's also the reference level for conducted spurious emission)


Mode1 CH00

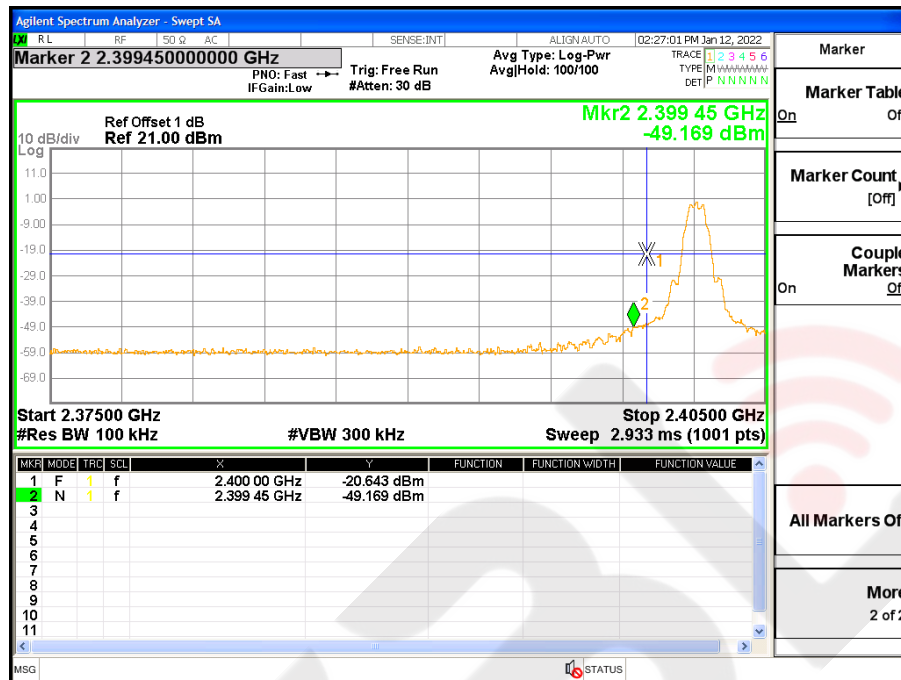


Mode3 CH39

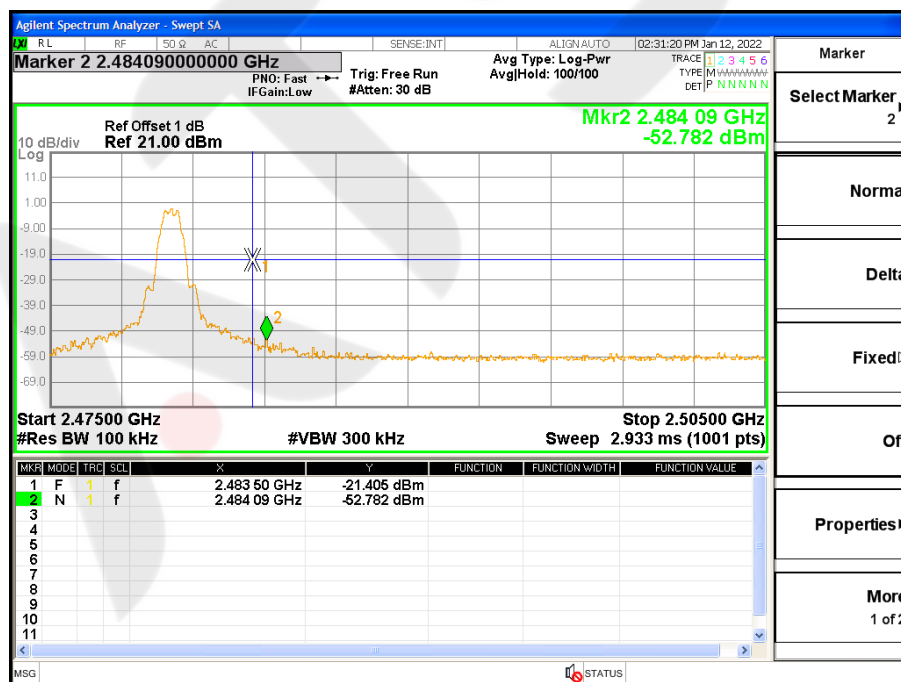

Mode4 CH00

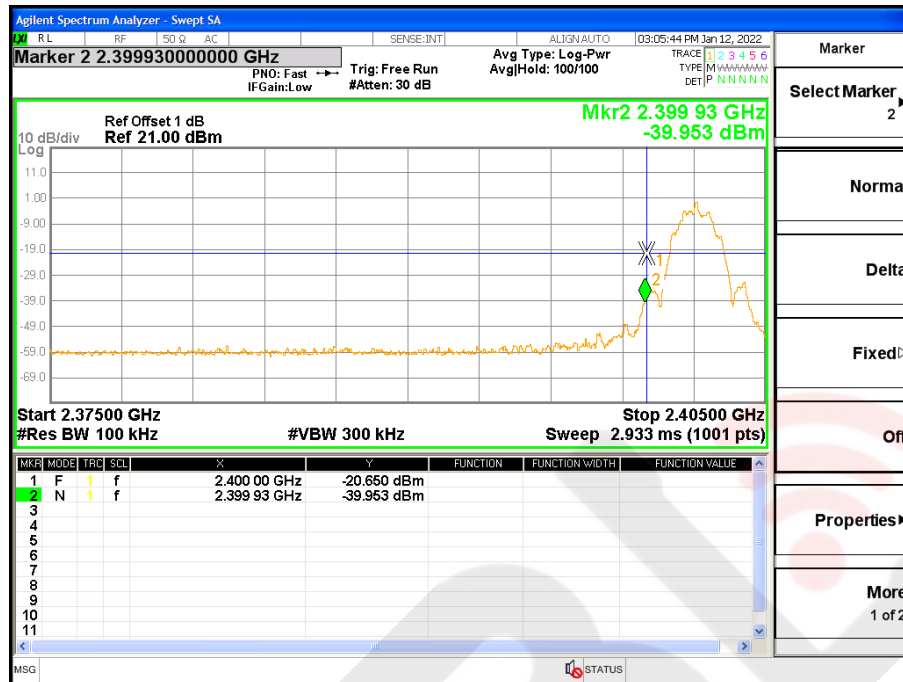

Mode6 CH39

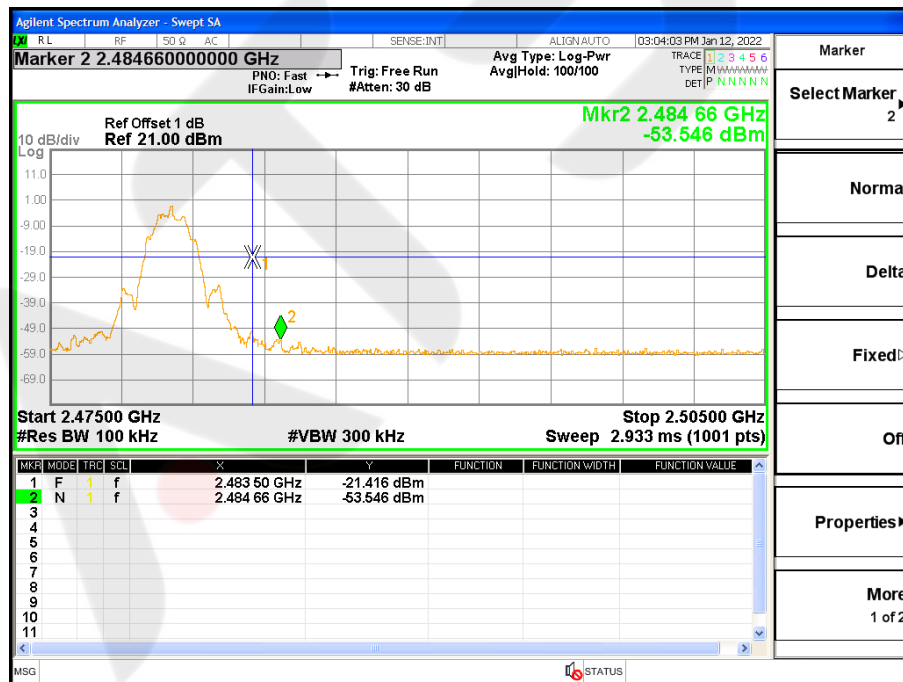

6. POWER SPECTRAL DENSITY TEST

6.1 LIMIT

FCC Part15.247,Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(e)	Power Spectral Density	$\leq 8 \text{ dBm}$ (RBW $\geq 3\text{KHz}$)	2400-2483.5	PASS

6.2 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the RBW to: $100 \text{ kHz} \geq \text{RBW} \geq 3 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

6.3 TEST SETUP



6.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

6.5 TEST RESULTS


Temperature:	25 °C	Relative Humidity:	60%RH
Test Voltage:	DC 5V	Test Mode:	TX Mode1/2/3/4/5/6

Frequency	Power Density	Limit (3KHz/dBm)	Result
	(dBm/3kHz)		
2402 MHz	-15.775	≤8	PASS
2440 MHz	-16.302	≤8	PASS
2480 MHz	-16.577	≤8	PASS
2402 MHz	-18.240	≤8	PASS
2440 MHz	-18.699	≤8	PASS
2480 MHz	-19.061	≤8	PASS


Mode1 CH00

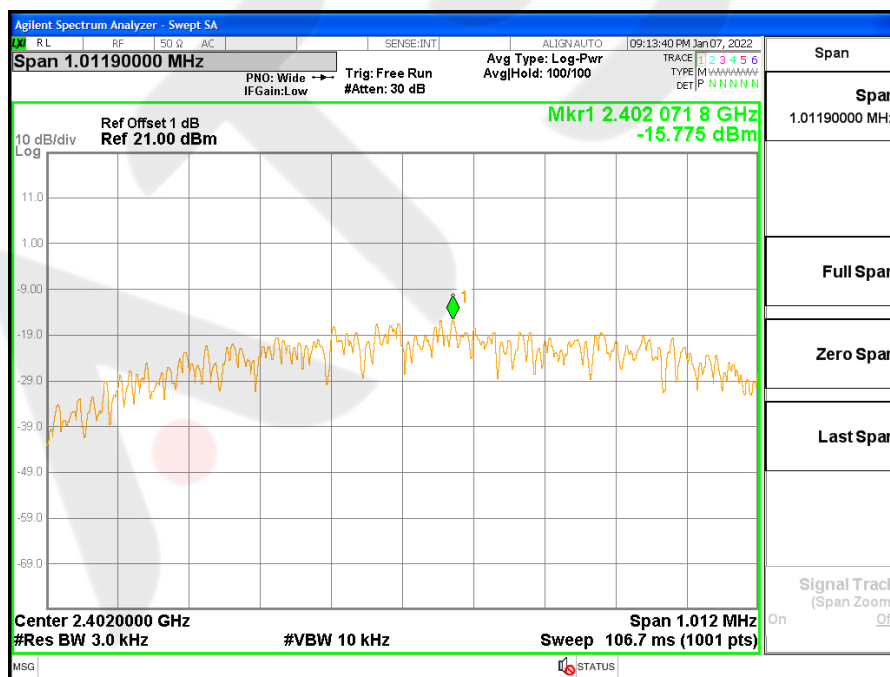


Mode2 CH19

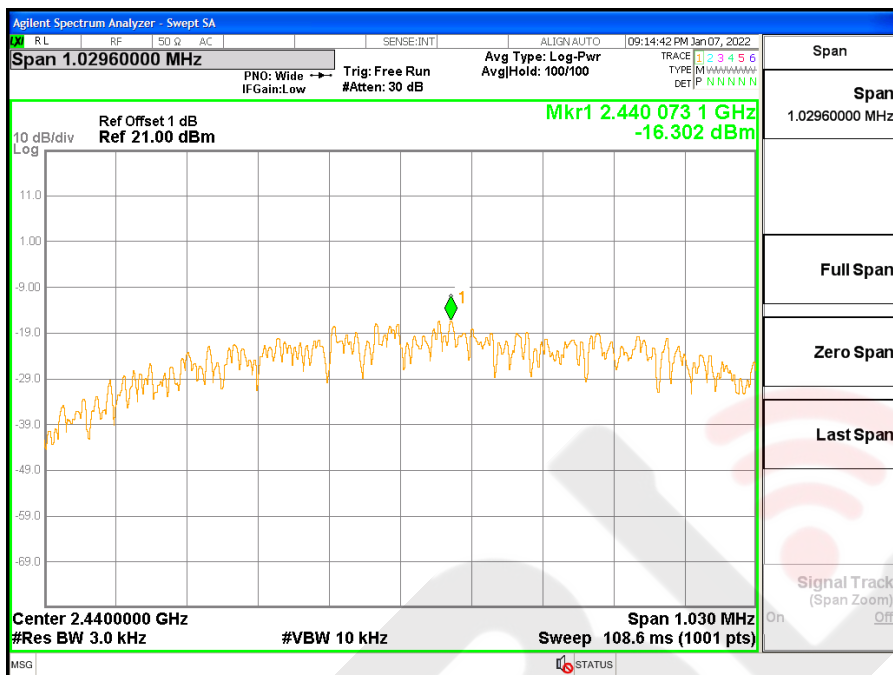


Mode3 CH39

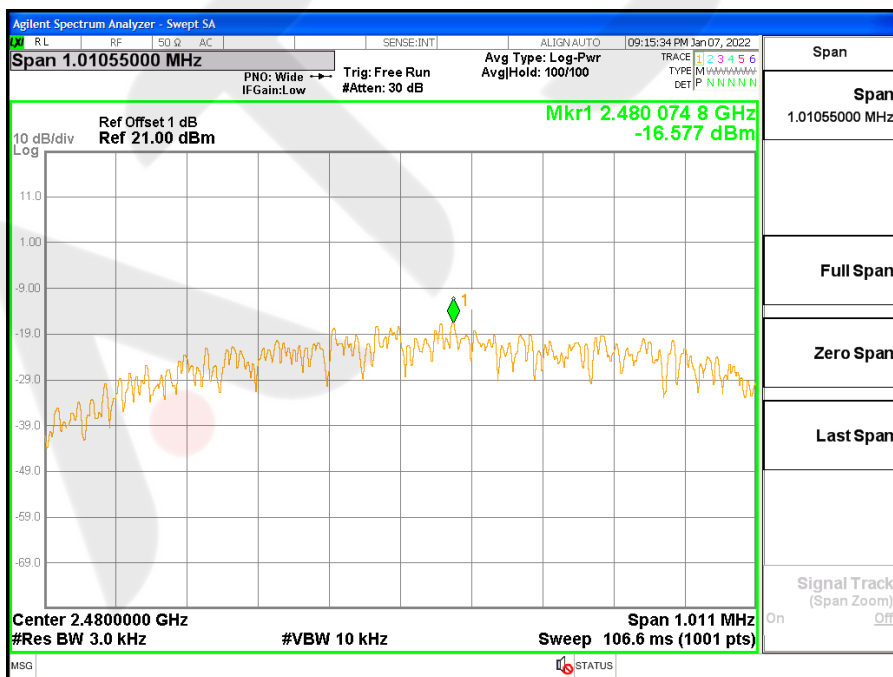


Mode4 CH00

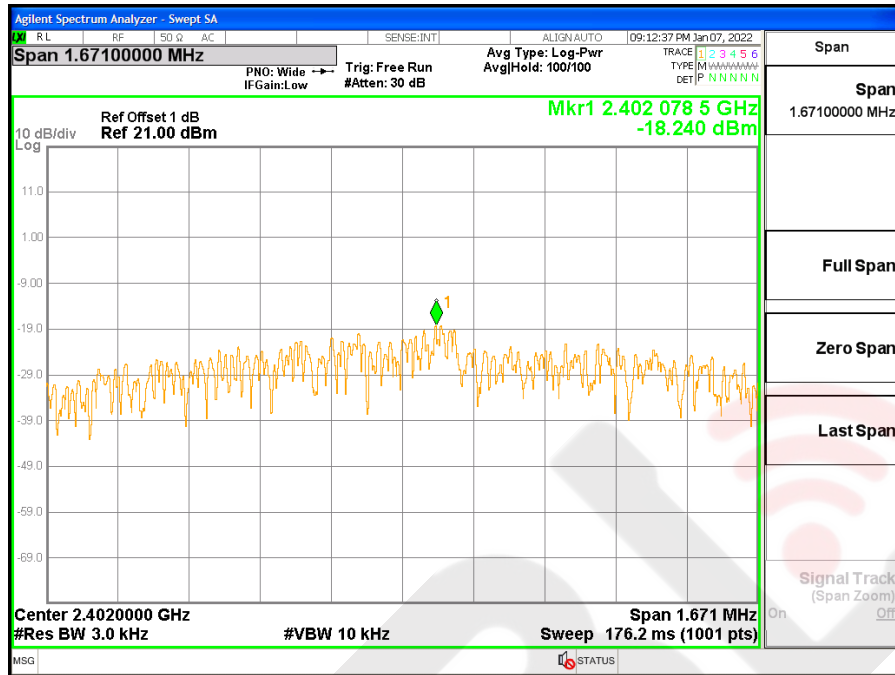

Mode5 CH19

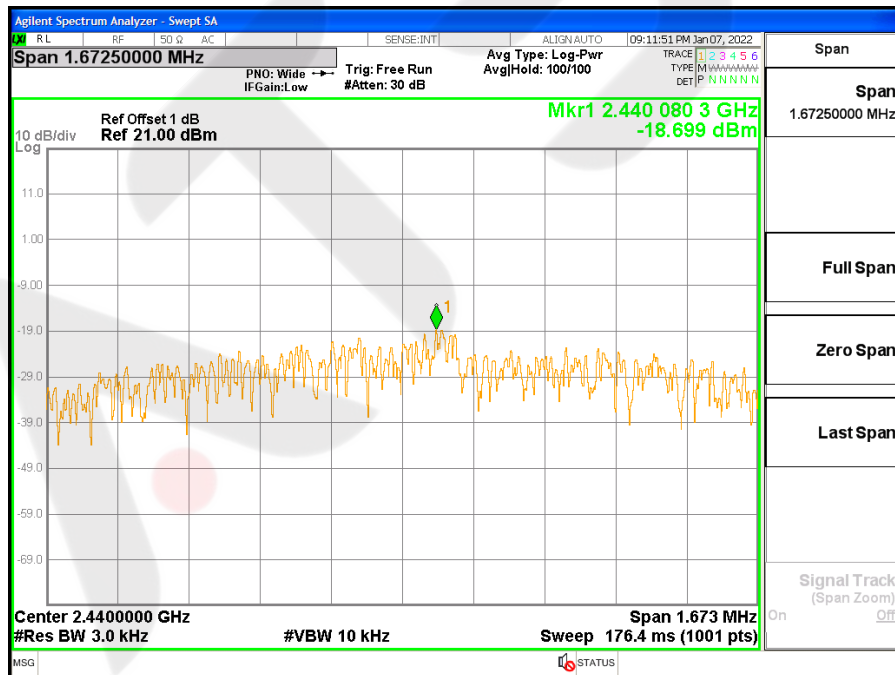

Mode6 CH39

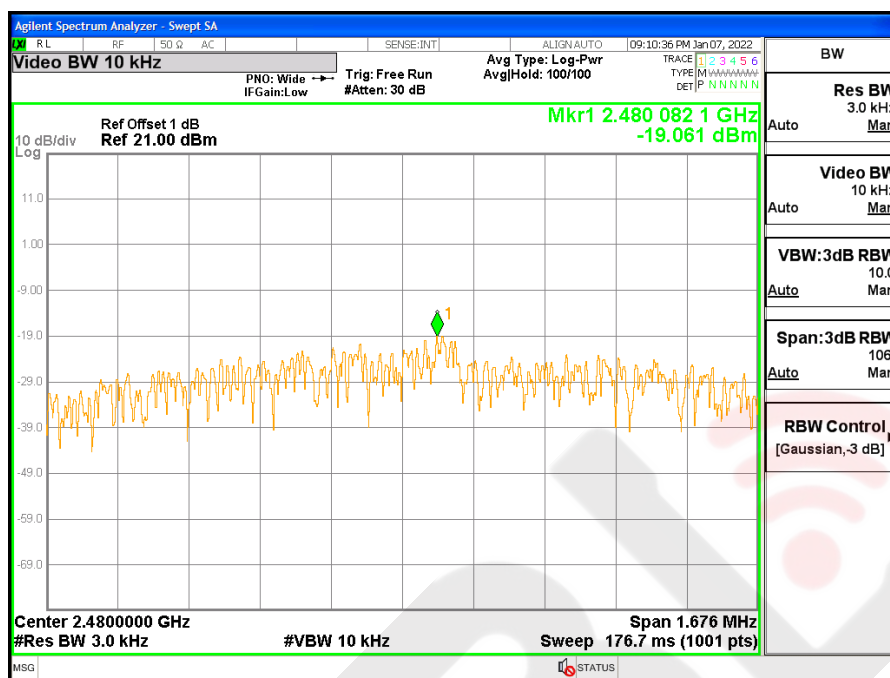

7. BANDWIDTH TEST

7.1 LIMIT

FCC Part15.247,Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

7.2 TEST PROCEDURE

Connect the UUT to the spectrum analyser and use the following settings:

Center Frequency	The centre frequency of the channel under test
Detector	Peak
RBW	For 6 dB Bandwidth :100KHz For 99% Bandwidth :1% to 5% of the occupied bandwidth
VBW	For 6dB Bandwidth : $\geq 3 \times \text{RBW}$ For 99% Bandwidth : approximately $3 \times \text{RBW}$
Trace	Max hold
Sweep	Auto

Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB and 99% relative to the maximum level measured in the fundamental emission.

7.3 TEST SETUP



7.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



7.5 TEST RESULTS

Temperature:	25 °C	Relative Humidity:	60%RH
Test Voltage:	DC 5V	Test Mode:	TX Mode1/2/3/4/5/6

Frequency	6dB Bandwidth (KHz)	99% Bandwidth (KHz)	6dB Bandwidth Limit(KHz)	Result
2402 MHz	674.6	1037.3	≥500KHz	PASS
2440 MHz	686.4	1036.6	≥500KHz	PASS
2480 MHz	673.7	1042.3	≥500KHz	PASS
2402 MHz	1114	2046.1	≥500KHz	PASS
2440 MHz	1115	2050.4	≥500KHz	PASS
2480 MHz	1117	2051.9	≥500KHz	PASS


6dB BandwidthMode1 CH00

99% Bandwidth Mode1 CH00

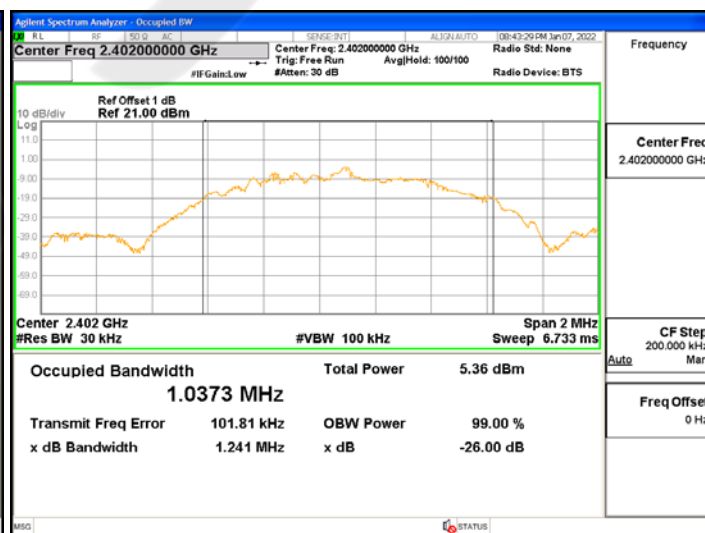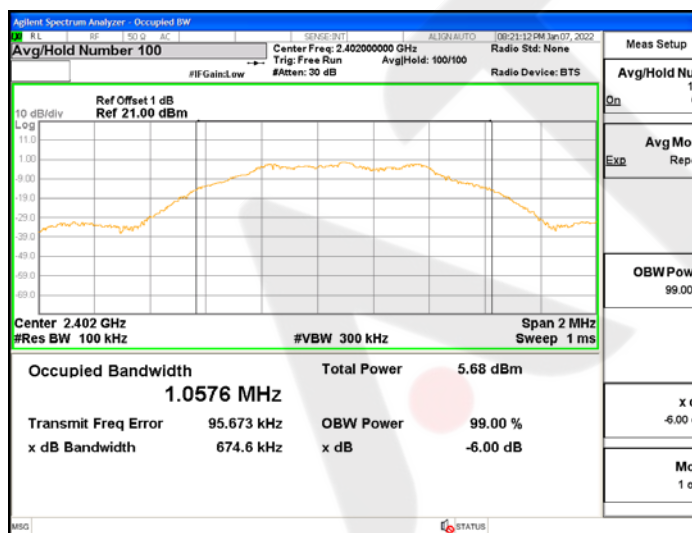



6dB BandwidthMode2 CH19

99% Bandwidth Mode2 CH19

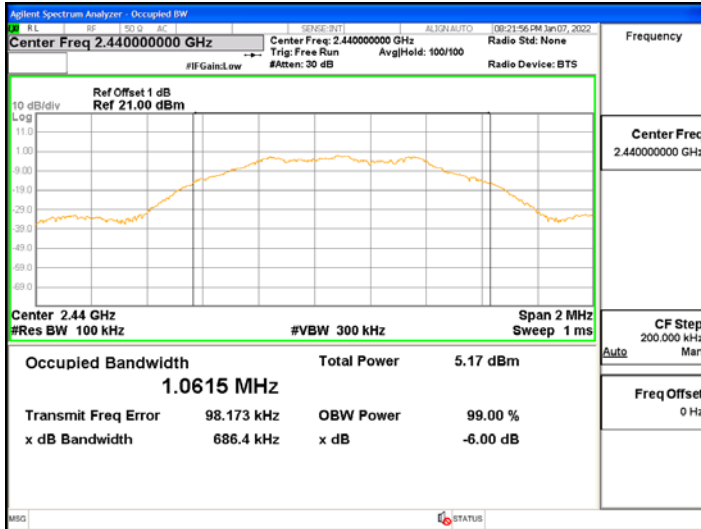



6dB BandwidthMode3 CH39

99% Bandwidth Mode3 CH39

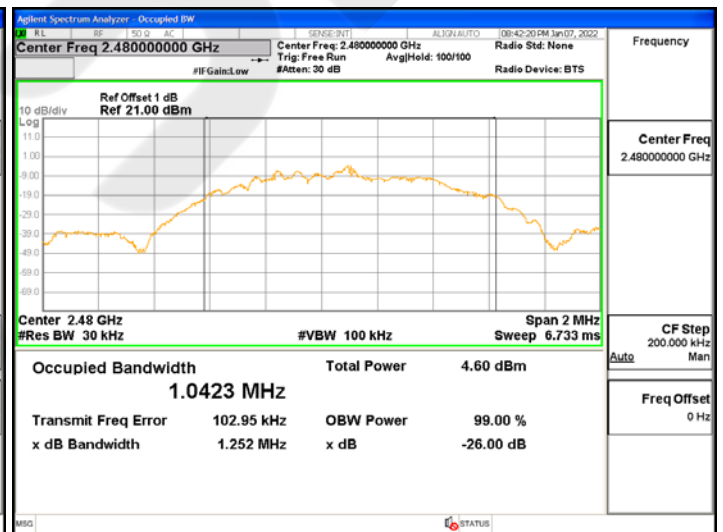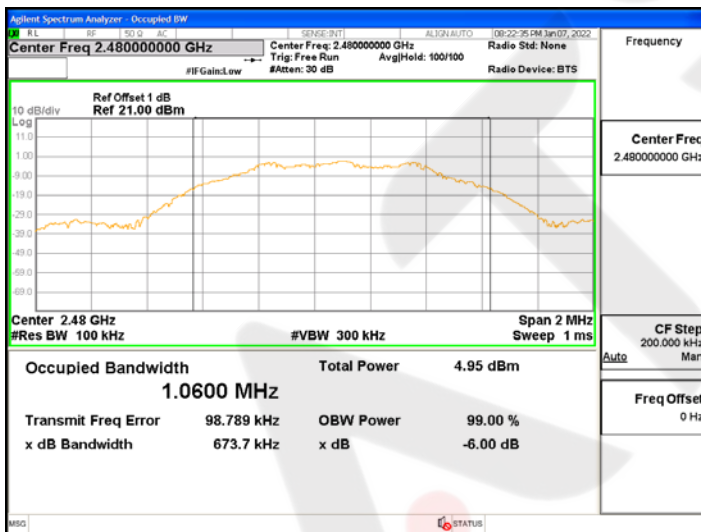



6dB BandwidthMode4 CH00

99% Bandwidth Mode4 CH00

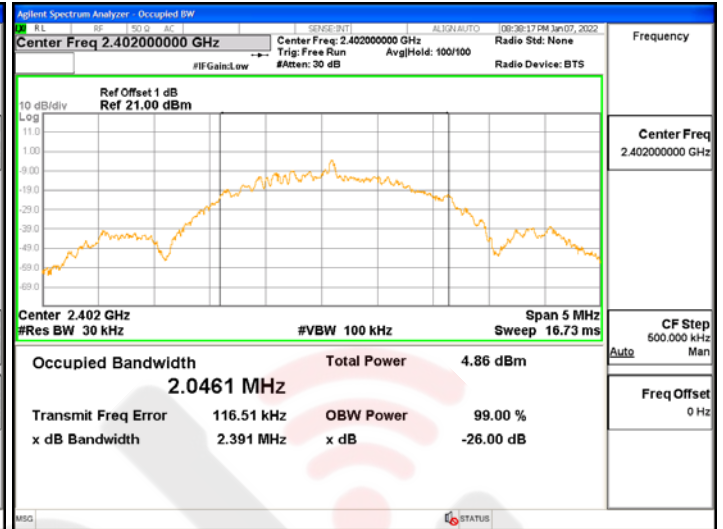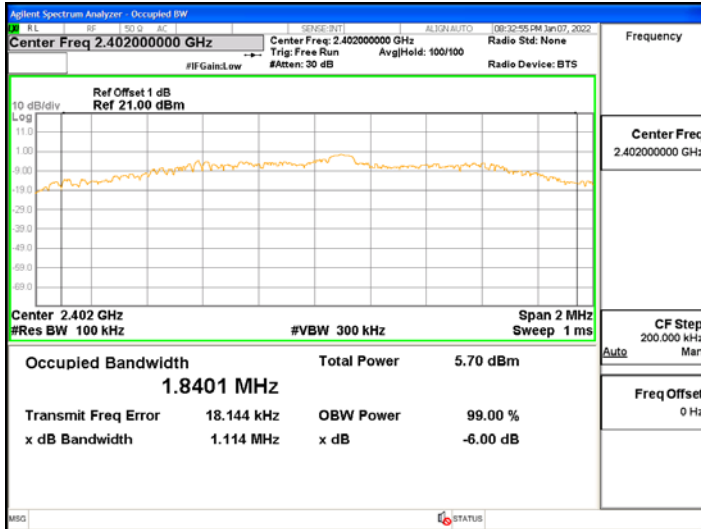


6dB BandwidthMode5 CH19

99% Bandwidth Mode5 CH19

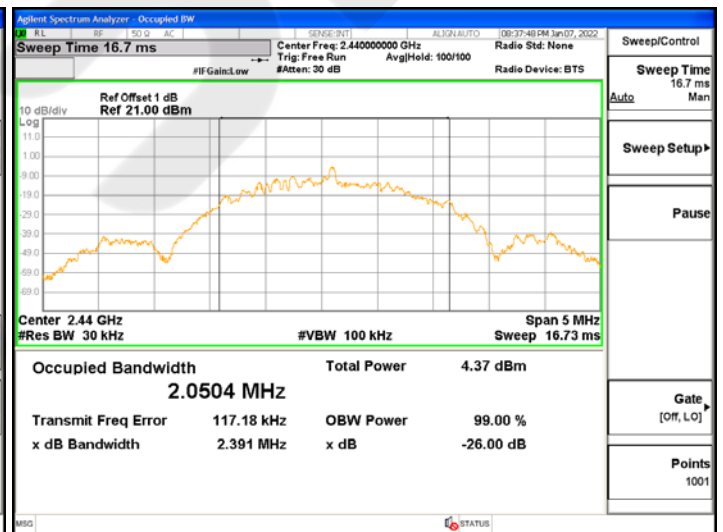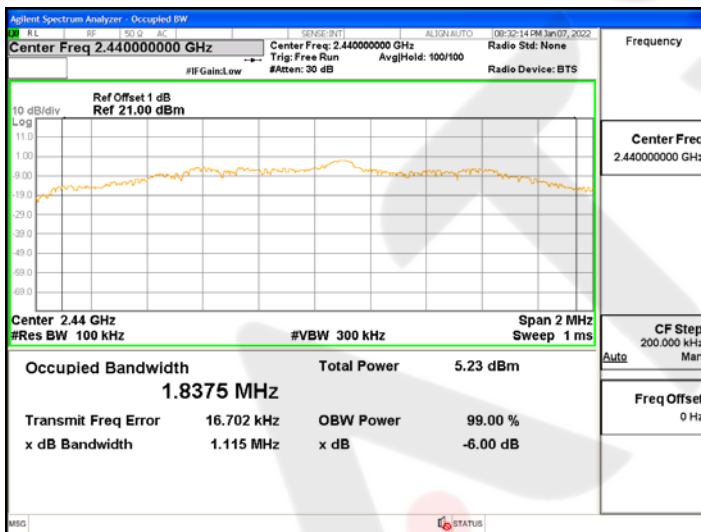

6dB BandwidthMode6 CH39

99% Bandwidth Mode6 CH39

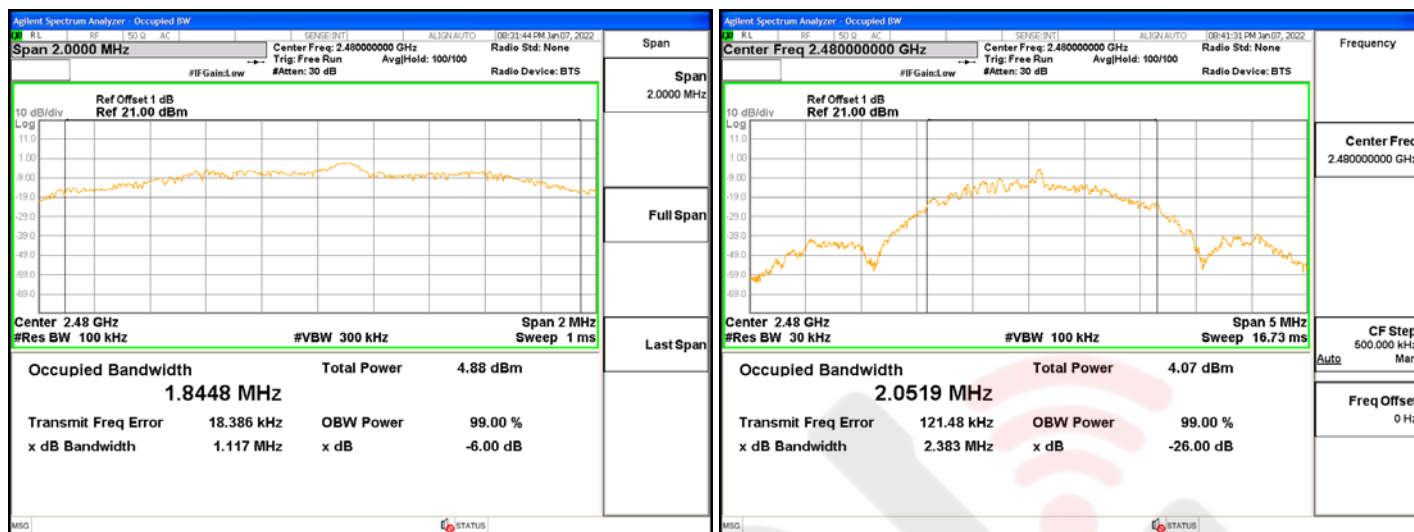

8. PEAK OUTPUT POWER TEST

8.1 LIMIT

FCC Part15.247				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Output Power	1 watt or 30dBm	2400-2483.5	PASS

8.2 TEST PROCEDURE

PKPM1 Peak power meter method:

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

8.3 TEST SETUP



8.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

8.5 TEST RESULTS

Temperature:	25 °C	Relative Humidity:	60%RH
Test Voltage:	DC 5V	Test Mode:	TX Mode1/2/3/4/5/6


Test Channel	Frequency	Peak Conducted Output Power	Average Conducted Output Power	LIMIT
	(MHz)	(dBm)	(dBm)	dBm
Mode1 CH00	2402	-0.58	-0.90	30
Mode2 CH19	2440	-1.25	-1.59	30
Mode3 CH39	2480	-2.07	-2.37	30
Mode4 CH00	2402	-0.59	-0.64	30
Mode5 CH19	2440	-1.26	-1.38	30
Mode6 CH39	2480	-2.08	-1.98	30

EIRP Power


Test Channel	Frequency	Peak Conducted Output Power	Antenna Gain	EIRP Power	LIMIT
	(MHz)	(dBm)	(dBi)	(dBm)	dBm
Mode1 CH00	2402	-0.58	2.14	1.56	36
Mode2 CH19	2440	-1.25	2.14	0.89	36
Mode3 CH39	2480	-2.07	2.14	0.07	36
Mode4 CH00	2402	-0.59	2.14	1.55	36
Mode5 CH19	2440	-1.26	2.14	0.88	36
Mode6 CH39	2480	-2.08	2.14	0.06	36

Note: RF output power = Reading value + Cable loss + Duty offset.

BLE 1M Duty cycle

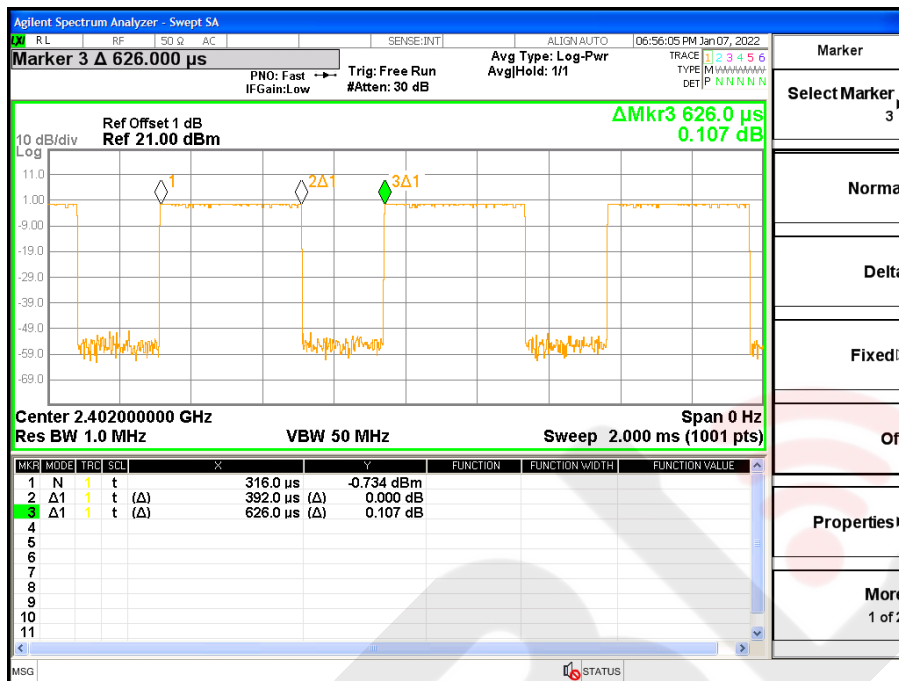

BLE 2M Duty cycle

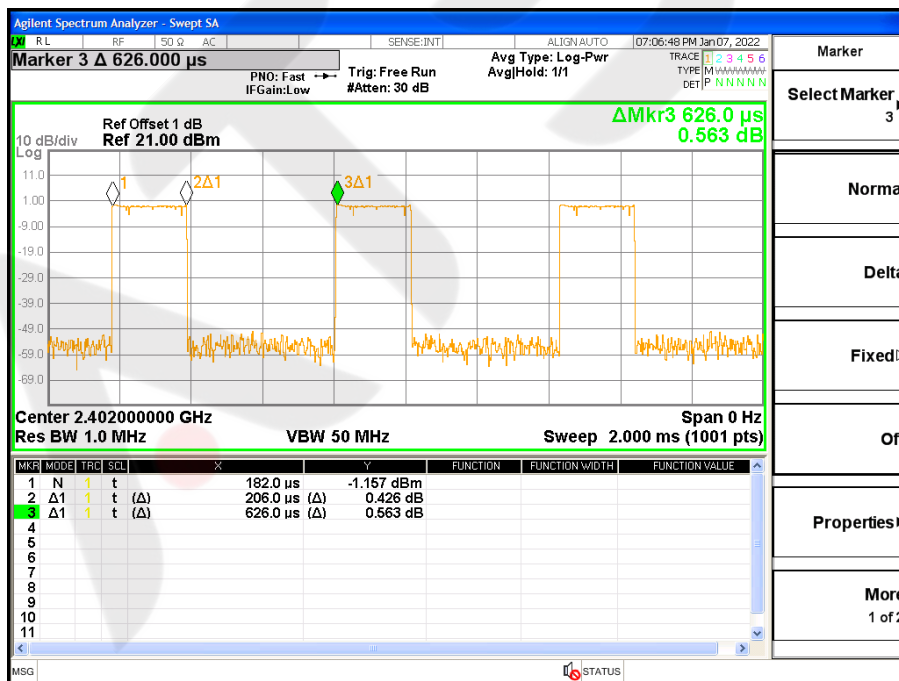

Ton	Tp	Duty cycle(%)	Duty factor(dB)
0.392	0.626	62.62	2.03
0.206	0.626	32.91	4.83

9. ANTENNA REQUIREMENT

9.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

9.2 EUT ANTENNA

The EUT antenna is Dipole Antenna. It comply with the standard requirement.




APPENDIX-PHOTOS OF TEST SETUP

Conduction Emission




Conducted for RF

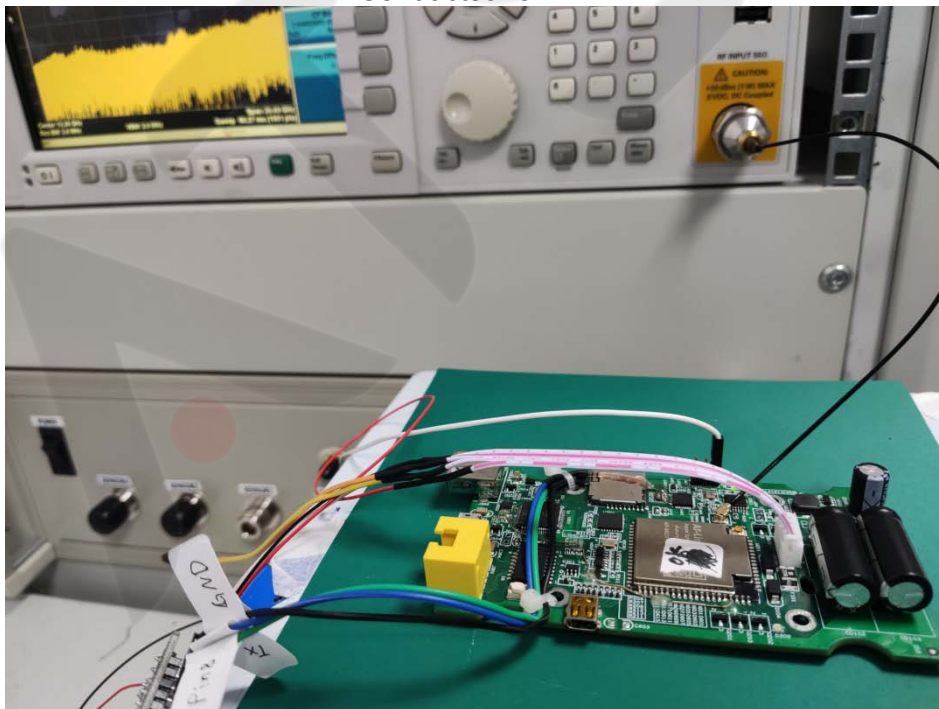


Radiation Emission
30MHz-1000MHz



Radiated Spurious Emission
30MHz-1000MHz

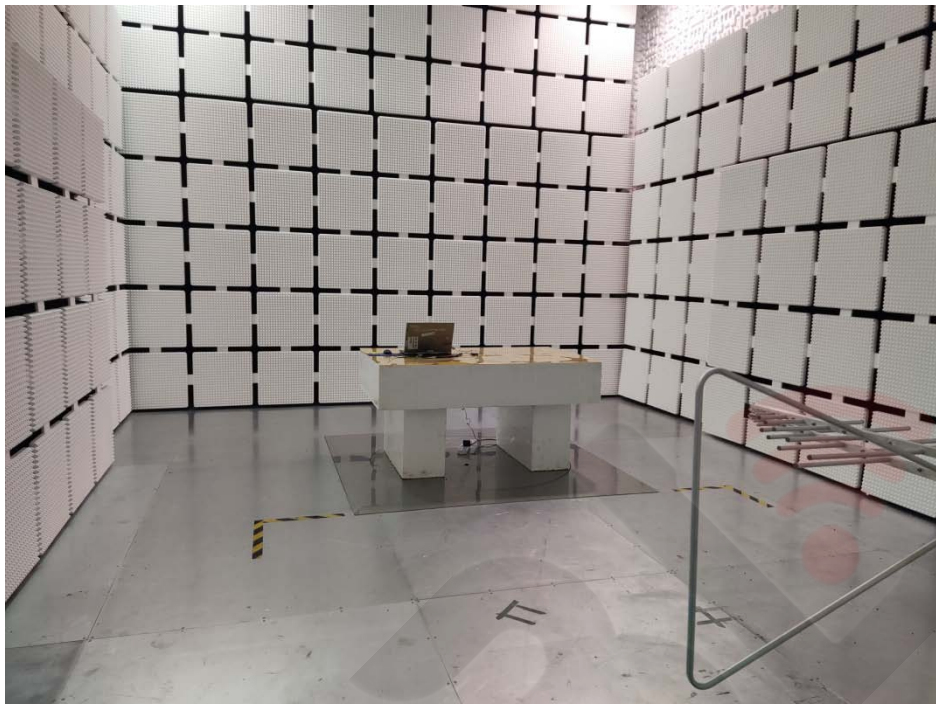

1GHz-18GHz

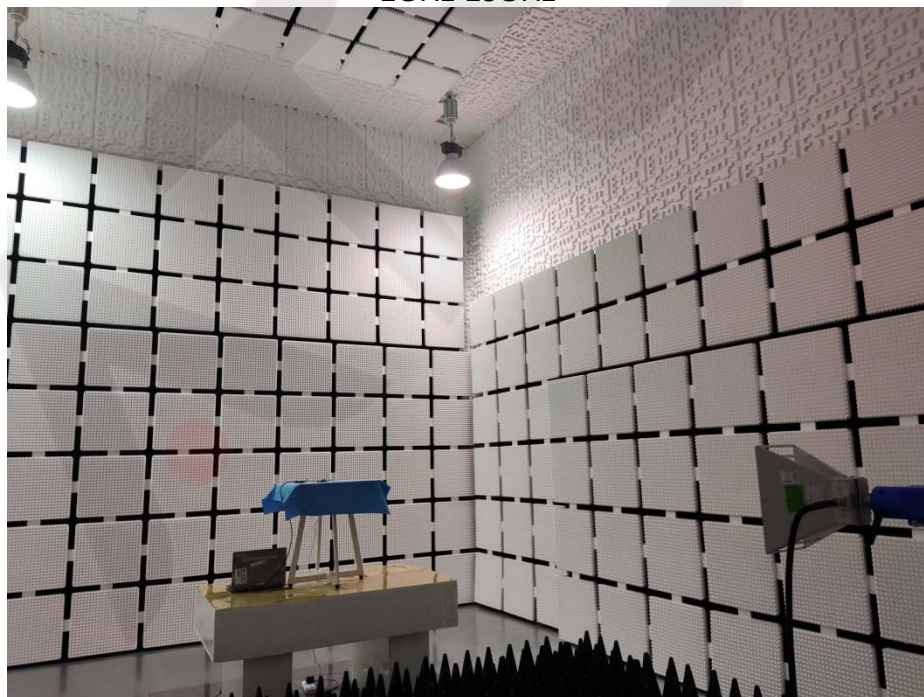

※※※※※END OF THE REPORT※※※※※