

## **Product specification**

### **Quick Reference Date**

|                            |                                    |  |
|----------------------------|------------------------------------|--|
|                            | Antenna module on the system board |  |
| Frequenc Range             | 2400 ~ 2500GHz                     |  |
| Ant. Port Input Pwr. (dBm) | 0 (Typ. BT class 2 output power)   |  |
| Tot. Rad. Pwr. (dBm)       | -1.2 (Input pwr – loss pwr)        |  |
| Peak EIRP(dBm)             | 0                                  |  |
| Directivity (dBi)          | 1 (all direction antenna)          |  |
| Efficiency (dB)            | 0                                  |  |
| Gain (dBi)                 | 2.5(Avg Gain XY-plane)             |  |
| Maximum Power (dBm)        | 0 (XY-plane)                       |  |
| Minimum Power (dBm)        | (XY-plane)                         |  |
| Avg. Power (dBm)           | (XY-plane)                         |  |
| Input Impedence(ohm)       | 50                                 |  |
| Polarization Type          | V ertical & Horizontal             |  |
| V . S .W . R               | < 1.4                              |  |

All the technical data and information contained herein are subject to change without prior notice

### **Antenna Layout & module on the system board**




### **Antenna Gain**


**Gain Table**

| Unit in dBi @2.44GHz | XY-plane |      | XZ-plane |      | YZ-plane |      | Efficiency |
|----------------------|----------|------|----------|------|----------|------|------------|
|                      | Peak     | Avg. | Peak     | Avg. | Peak     | Avg. |            |
| Module Board         | 2.5      | -0.5 | 2.3      | -3.6 | 1.5      | -3.0 |            |


Return Loss

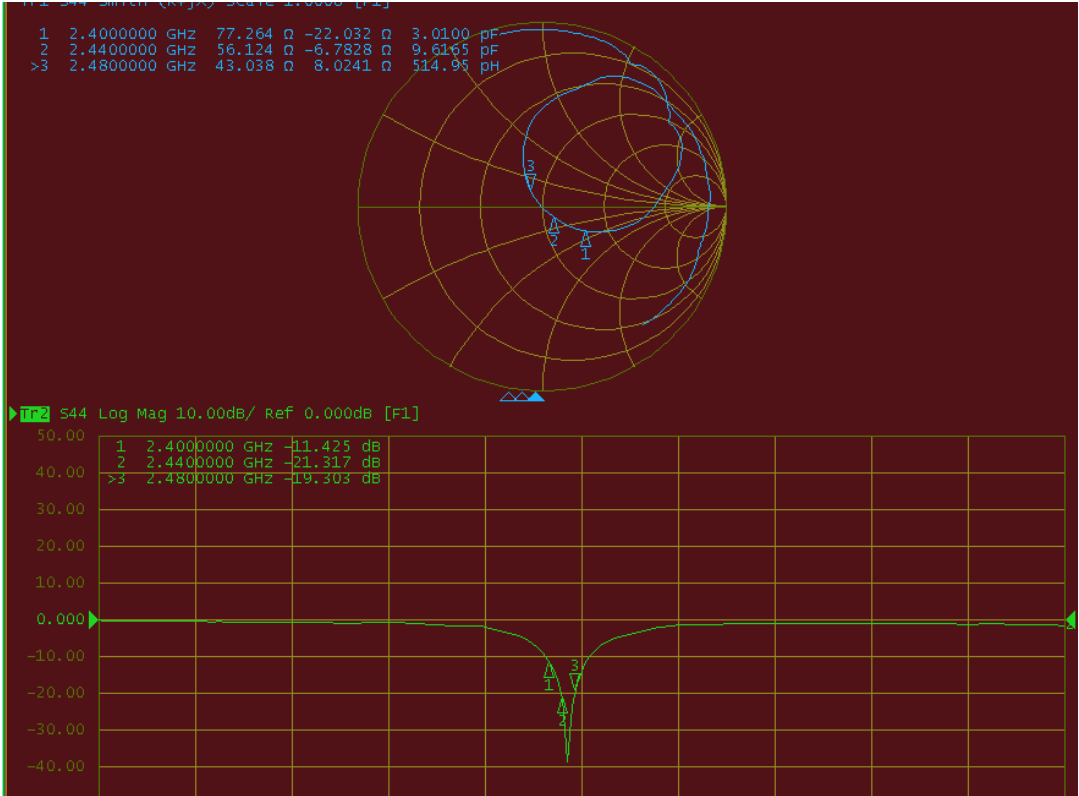

## The Environment of Antenna Radiation Pattern

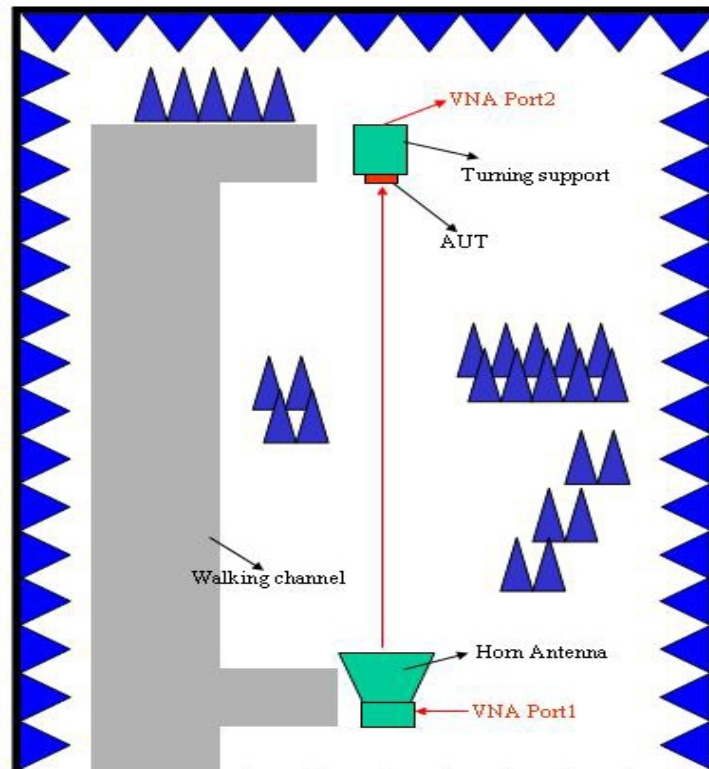

3D radiation pattern diagram

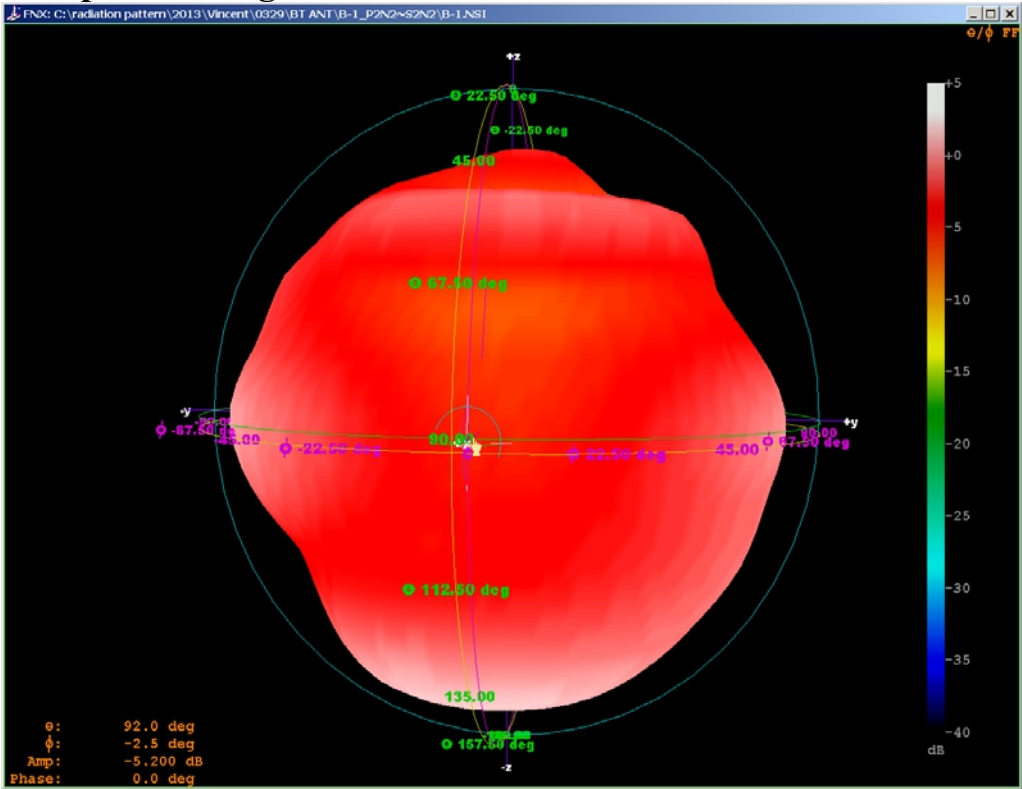

XY-plane

XZ-plane

YZ-plane