

# 1、Pin Definition

## 1.1 Pin Assignment

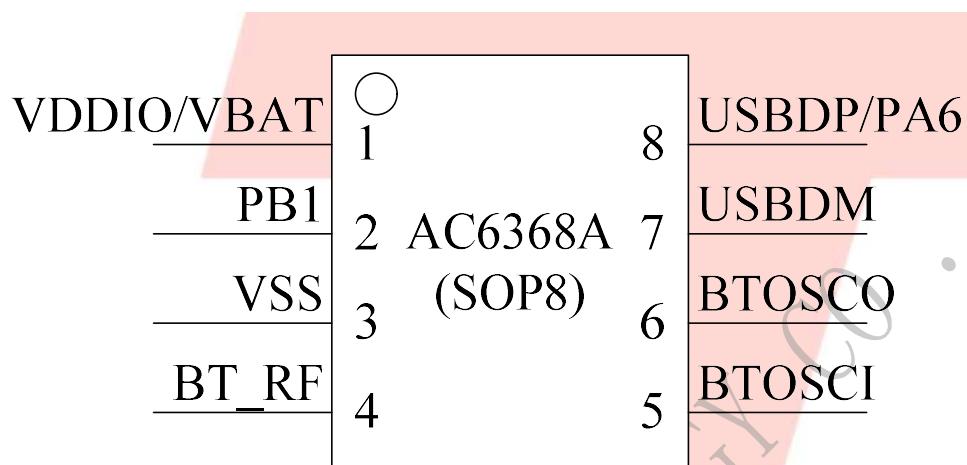


Figure 1-1 AC6368A Package Diagram

## 1.2 Pin Description

Table 1-1 AC6368A Pin Description

PIN NO.	Name	I/O Type	Drive (mA)	Function	Other Function
1	VBAT	P	/		Battery Power Supply
	VDDIO	P	/		IO Power 3.3v
2	PB1	I/O		GPIO (pull up)	Long Press Reset; ADC5: ADC Input Channel 5; UART0RXB: Uart0 Data In(B);
3	VSS	P	/		Ground
4	BT_RF	/			BT Antenna
5	BTOSCI	I			BT OSC In
6	BTOSCO	O			BT OSC Out
7	USBDM	I/O		USB Negative Data (pull down)	IIC_SDA_A: IIC SDA(A); SPI2_DOB: SPI2 Data Out(B); ADC14: ADC Input Channel 14; UART1RXD: Uart1 Data In(D);
8	USBDP	I/O		USB Positive Data (pull down)	IIC_SCL_A: IIC SCL(A); SPI2_CLKB: SPI2 Clock(B); ADC13: ADC Input Channel 13; UART1TXD: Uart1 Data Output(D);
	PA6	I/O		GPIO	ADC4: ADC Input Channel 4; CAP4: Timer4 Capture; UART0RXA: Uart0 Data In(A);

## 2、Electrical Characteristics

### 2.1 Absolute Maximum Ratings

Table 2-1

Symbol	Parameter	Min	Max	Unit
T <sub>opt</sub>	Operating temperature	-40	+85	°C
T <sub>stg</sub>	Storage temperature	-65	+150	°C
V <sub>BAT</sub>	Supply Voltage	-0.3	3.6	V
V <sub>3.3IO</sub>	3.3V IO Input Voltage	-0.3	3.6	V

Note : The chip can be damaged by any stress in excess of the absolute maximum ratings listed below

### 2.2 Recommended Operating Conditions

Table 2-2

Symbol	Parameter	Min	Typ	Max	Unit	Test Conditions
V <sub>BAT</sub>	Voltage Input	2.2	3.0	3.4	V	
V <sub>VDDIO</sub>	Voltage Input	—	3.0	—	V	

### 2.3 IO Input/Output Electrical Logical Characteristics

Table 2-3

IO input characteristics						
Symbol	Parameter	Min	Typ	Max	Unit	Test Conditions
V <sub>IL</sub>	Low-Level Input Voltage	-0.3	—	0.3* V <sub>VDDIO</sub>	V	V <sub>VDDIO</sub> = 3.3V
V <sub>IH</sub>	High-Level Input Voltage	0.7* V <sub>VDDIO</sub>	—	V <sub>VDDIO</sub> +0.3	V	V <sub>VDDIO</sub> = 3.3V
IO output characteristics						
V <sub>OL</sub>	Low-Level Output Voltage	—	—	0.33	V	V <sub>VDDIO</sub> = 3.3V
V <sub>OH</sub>	High-Level Output Voltage	2.7	—	—	V	V <sub>VDDIO</sub> = 3.3V

## 2.4 Internal Resistor Characteristics

Table 2-4

Port	General Output	High Drive	Internal Pull-Up Resistor	Internal Pull-Down Resistor	Comment
PA6 PB1	8mA	24mA	10K	10K	1、 PB1 default pull up 2、 USBDM & USBDP default pull down 3、 internal pull-up/pull-down resistance   accuracy ±20%
USBDP	4mA	—	1.5K	15K	
USBDM	4mA	—	180K	15K	

## 2.5 BT Characteristics

### 2.5.1 Transmitter

Basic Data Rate

Table 2-5

Parameter	Min	Typ	Max	Unit	Test Conditions
RF Transmit Power		4	6	dBm	
RF Power Control Range		20		dB	
20dB Bandwidth		950		KHz	
Adjacent Channel	+2MHz	-40		dBm	
	-2MHz	-38		dBm	
Transmit Power	+3MHz	-44		dBm	
	-3MHz	-35		dBm	

Enhanced Data Rate

Table 2-6

Parameter	Min	Typ	Max	Unit	Test Conditions
Relative Power		-1		dB	
$\pi/4$ DQPSK Modulation Accuracy	DEVM RMS	6		%	25°C, Power Supply VBAT=5V 2441MHz
	DEVM 99%	10		%	
	DEVM Peak	15		%	
Adjacent Channel	+2MHz	-40		dBm	25°C, Power Supply VBAT=5V 2441MHz
	-2MHz	-38		dBm	
	+3MHz	-44		dBm	
	-3MHz	-35		dBm	

### 2.5.2 Receiver

**Basic Data Rate****Table 2-7**


Parameter	Min	Typ	Max	Unit	Test Conditions
Sensitivity		-90		dBm	
Co-channel Interference Rejection		-13		dB	
Adjacent Channel Interference Rejection	+1MHz	+5		dB	25°C, Power Supply VBAT=5V 2441MHz
	-1MHz	+2		dB	
	+2MHz	+37		dB	
	-2MHz	+36		dB	
	+3MHz	+40		dB	
	-3MHz	+35		dB	

**Enhanced Data Rate****Table 2-8**

Parameter	Min	Typ	Max	Unit	Test Conditions
Sensitivity		-90		dBm	
Co-channel Interference Rejection		-13		dB	
Adjacent Channel Interference Rejection	+1MHz	+5		dB	25°C, Power Supply VBAT=5V 2441MHz
	-1MHz	+2		dB	
	+2MHz	+37		dB	
	-2MHz	+36		dB	
	+3MHz	+40		dB	
	-3MHz	+35		dB	

### 3、 Package Information

#### 3.1 SOP8

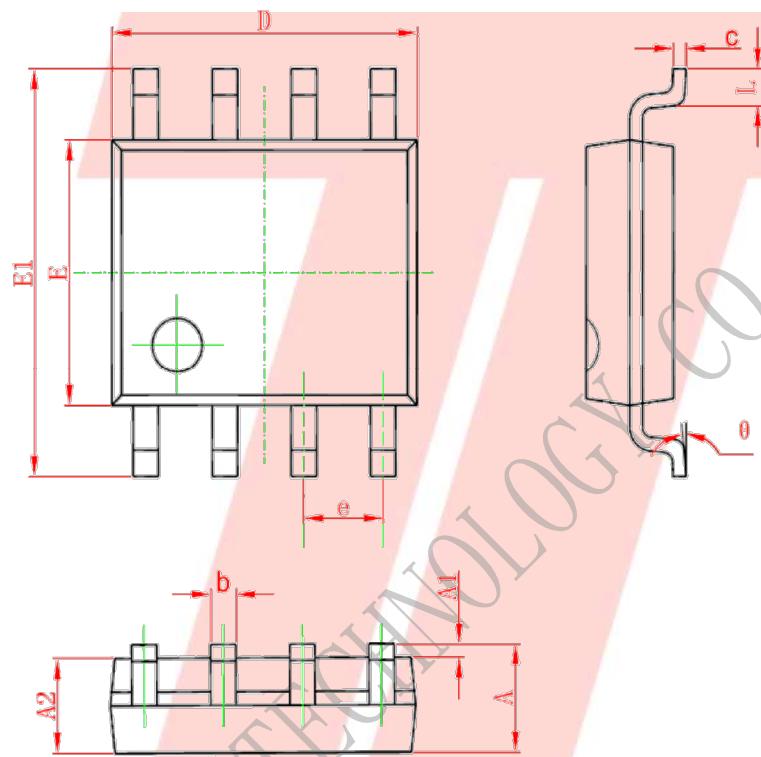

Symbol	Dimension In Millimeters		Dimension In Inches	
	Min	Max	Min	Max
A	1.350	1.750	0.053	0.069
A1	0.100	0.250	0.004	0.010
A2	1.350	1.550	0.053	0.061
b	0.330	0.510	0.013	0.020
c	0.170	0.250	0.007	0.010
D	4.700	5.100	0.185	0.201
E	3.800	4.000	0.150	0.157
E1	5.800	6.200	0.228	0.244
e	1.27TYP		0.050TYP	
L	0.400	1.270	0.016	0.050
θ	0°	8°	0°	8°

Figure 3-1 AC6368A Package

## FCC WARNING

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This device complies with Part 15 of the FCC Rules.

Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This device and its antenna(s) must not be co-located or operating in conjunction with any other antenna or transmitter.

### 15.105 Information to the user.

(b) For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

—Reorient or relocate the receiving antenna.

—Increase the separation between the equipment and receiver.

—Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

—Consult the dealer or an experienced radio/TV technician for help.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20

cm between the radiator and your body.

### Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.

This transmitter must not be co-located or operating in conjunction with any other

antenna or transmitter.

The availability of some specific channels and/or operational frequency bands are country dependent and are firmware programmed at the factory to match the intended destination.

The firmware setting is not accessible by the end user.

The final end product must be labelled in a visible area with the following:

“Contains Transmitter Module 2A4AM-BP-B01”

The module can be used for BUBBLE MASSAGE BATH APPLIANCE with 0dBi antenna. The host manufacturer installing this module into their product must ensure that the final compost product complies with the FCC requirements by a technical assessment or evaluation to provide information to the end user regarding how to install or remove this RF module in the user's manual of the end product which integrates this module. The end user manual shall include all required regulatory information/warming as show in this manual.

## Requirement per KDB996369 D03

### 2.2 List of applicable FCC rules

List the FCC rules that are applicable to the modular transmitter. These are the rules that specifically establish the bands of operation, the power, spurious emissions, and operating fundamental frequencies. DO NOT list compliance to unintentional-radiator rules (Part 15 Subpart B) since that is not a condition of a module grant that is extended to a host manufacturer. See also Section 2.10 below concerning the need to notify host manufacturers that further testing is required.<sup>3</sup>

**Explanation:** This module meets the requirements of FCC part 15C (15.247). It specifically identified AC Power Line Conducted Emission, Radiated Spurious emissions, Band edge and RF Conducted Spurious Emissions, Conducted Peak Output Power, Bandwidth, Power Spectral Density, Antenna Requirement.

Summarize the specific operational use conditions

Describe use conditions that are applicable to the modular transmitter, including for example any limits on antennas, etc. For example, if point-to-point antennas are used that require reduction in power or compensation for cable loss, then this information must be in the instructions. If the use condition limitations extend to professional users, then instructions must state that this information also extends to the host manufacturer's instruction manual. In addition, certain information may also be needed, such as peak gain per frequency band and minimum gain, specifically for master devices in 5 GHz DFS bands.

**Explanation:** The EUT has one PCB antenna, the antenna can't be replaced by other authorized antennas.

### 2.3 Limited module procedures

If a modular transmitter is approved as a "limited module," then the module manufacturer is responsible for approving the host environment that the limited module is used with. The manufacturer of a limited module must describe, both in the filing and in the installation instructions, the alternative means that the limited module manufacturer uses to verify that the host meets the necessary requirements to satisfy the module limiting conditions.

A limited module manufacturer has the flexibility to define its alternative method to address the conditions that limit the initial approval, such as: shielding, minimum signaling amplitude, buffered modulation/data inputs, or power supply regulation. The alternative method could include that the limited

module manufacturer reviews detailed test data or host designs prior to giving the host manufacturer approval.

This limited module procedure is also applicable for RF exposure evaluation when it is necessary to demonstrate compliance in a specific host. The module manufacturer must state how control of the product into which the modular transmitter will be installed will be maintained such that full compliance of the product is always ensured. For additional hosts other than the specific host originally granted with a limited module, a Class II permissive change is required on the module grant to register the additional host as a specific host also approved with the module.

**Explanation:** The module is a limited single module.

## **2.6 RF exposure considerations**

It is essential for module grantees to clearly and explicitly state the RF exposure conditions that permit a host product manufacturer to use the module. Two types of instructions are required for RF exposure information: (1) to the host product manufacturer, to define the application conditions (mobile, portable – xx cm from a person's body); and (2) additional text needed for the host product manufacturer to provide to end users in their end-product manuals. If RF exposure statements and use conditions are not provided, then the host product manufacturer is required to take responsibility of the module through a change in FCC ID (new application).

**Explanation:** This module complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20cm between the radiator and your body." This module is designed to comply with the FCC statement, FCC ID is: 2A4AM-BP-B01.

## **2.7 Antennas**

A list of antennas included in the application for certification must be provided in the instructions. For modular transmitters approved as limited modules, all applicable professional installer instructions must be included as part of the information to the host product manufacturer. The antenna list shall also identify the antenna types (monopole, PIFA, dipole, etc. (note that for example an "omni-directional antenna" is not considered to be a specific "antenna type")).

For situations where the host product manufacturer is responsible for an external connector, for example with an RF pin and antenna trace design, the integration instructions shall inform the installer that unique antenna connector must be used on the Part 15 authorized transmitters used in the host product.

The module manufacturers shall provide a list of acceptable unique connectors.

**Explanation:** The EUT has one PCB antenna, the antenna can't be replaced by other authorized antennas.

## **2.8 Label and compliance information**

Grantees are responsible for the continued compliance of their modules to the FCC rules. This

includes advising host product manufacturers that they need to provide a physical or e-label stating "Contains FCC ID" with their finished product. See Guidelines for Labeling and User Information for RF Devices – KDB Publication 784748.

**Explanation:** The host system using this module, should have label in a visible area indicated the following texts: "Contains FCC ID: 2A4AM-BP-B01.

## **2.9 Information on test modes and additional testing requirements<sup>5</sup>**

Additional guidance for testing host products is given in KDB Publication 996369 D04 Module Integration Guide. Test modes should take into consideration different operational conditions for a stand-alone modular transmitter in a host, as well as for multiple simultaneously transmitting modules or other transmitters in a host product.

The grantee should provide information on how to configure test modes for host product evaluation for different operational conditions for a stand-alone modular transmitter in a host, versus with multiple, simultaneously transmitting modules or other transmitters in a host.

Grantees can increase the utility of their modular transmitters by providing special means, modes, or instructions that simulates or characterizes a connection by enabling a transmitter. This can greatly simplify a host manufacturer's determination that a module as installed in a host complies with FCC requirements.

**Explanation:** ZheJiang Bright-Power Electric Appliance CO.,LTD. can increase the utility of our modular transmitters by providing instructions that simulates or characterizes a connection by enabling a transmitter.

## **2.10 Additional testing, Part 15 Subpart B disclaimer**

The grantee should include a statement that the modular transmitter is only FCC authorized for the specific rule parts (i.e., FCC transmitter rules) listed on the grant, and that the host product manufacturer is responsible for compliance to any other FCC rules that apply to the host not covered by the modular transmitter grant of certification. If the grantee markets their product

as being Part 15

Subpart B compliant (when it also contains unintentional-radiator digital circuitry), then the grantee shall provide a notice stating that the final host product still requires Part 15 Subpart B compliance testing with the modular transmitter installed.

**Explanation:** The module without unintentional-radiator digital circuitry, so the module does not require an evaluation by FCC Part 15 Subpart B. The host should be evaluated by the FCC Subpart B.