



WDF-0487天线调试报告

匹配参数

0487

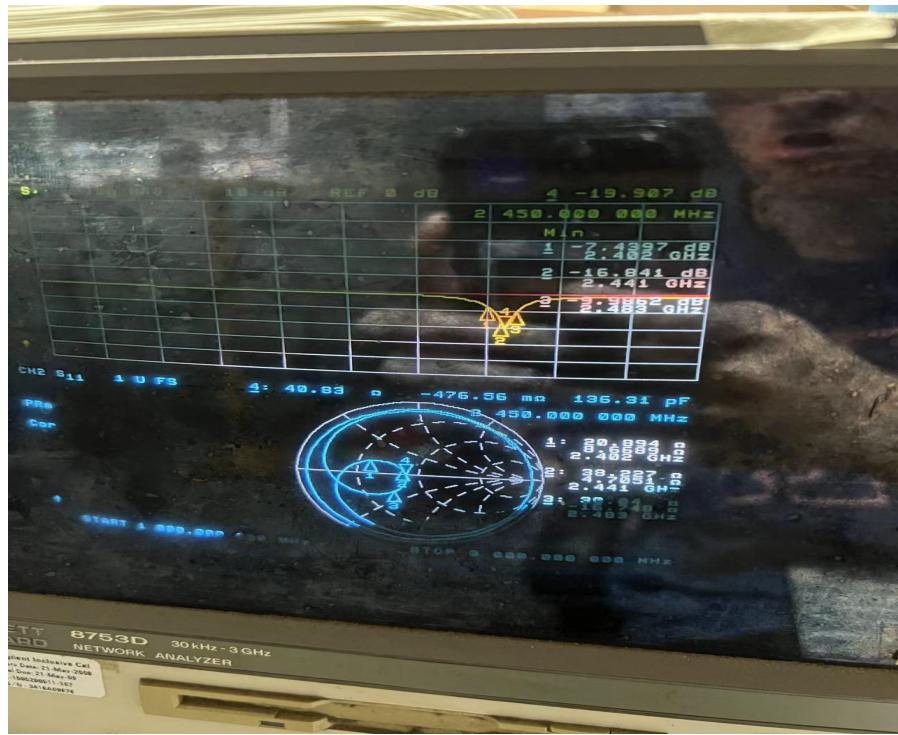


AAN5022H1R2G45

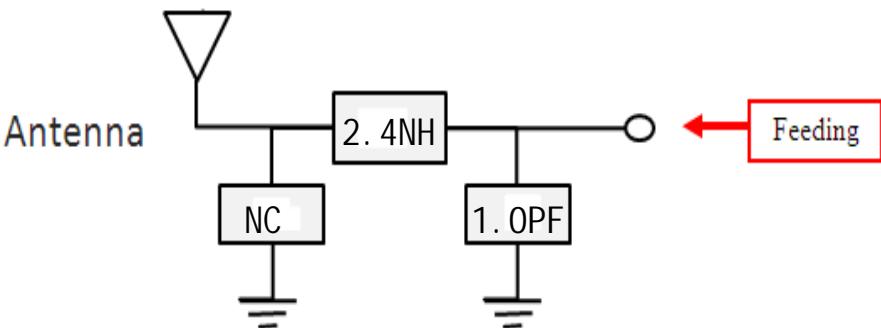




天线效率

2D 3D场形图


frequency 频率(MHz)	gain 增益(dBi)	gain 增益对应角度	CO Gain 主极化最	CP Gain 交叉极化	efficiency 效率(dB)	efficiency 效率(%)
2400	0.65	$\psi=303, \theta=133$	0	0	-3.5	44.7
2410	0.52	$\psi=303, \theta=133$	0	0	-3.53	44.32
2420	1.32	$\psi=302, \theta=133$	0	0	-3.11	48.82
2430	1.39	$\psi=301, \theta=133$	0	0	-3.17	48.14
2440	0.93	$\psi=300, \theta=133$	0	0	-3.19	48.01
2450	1.63	$\psi=300, \theta=133$	0	0	-2.94	50.76
2460	1.74	$\psi=300, \theta=133$	0	0	-2.99	50.18
2470	1.52	$\psi=299, \theta=133$	0	0	-2.88	51.48
2480	2.02	$\psi=299, \theta=133$	0	0	-2.68	53.99
2490	1.55	$\psi=299, \theta=133$	0	0	-3.11	48.88
2500	1.89	$\psi=301, \theta=133$	0	0	-2.79	52.57

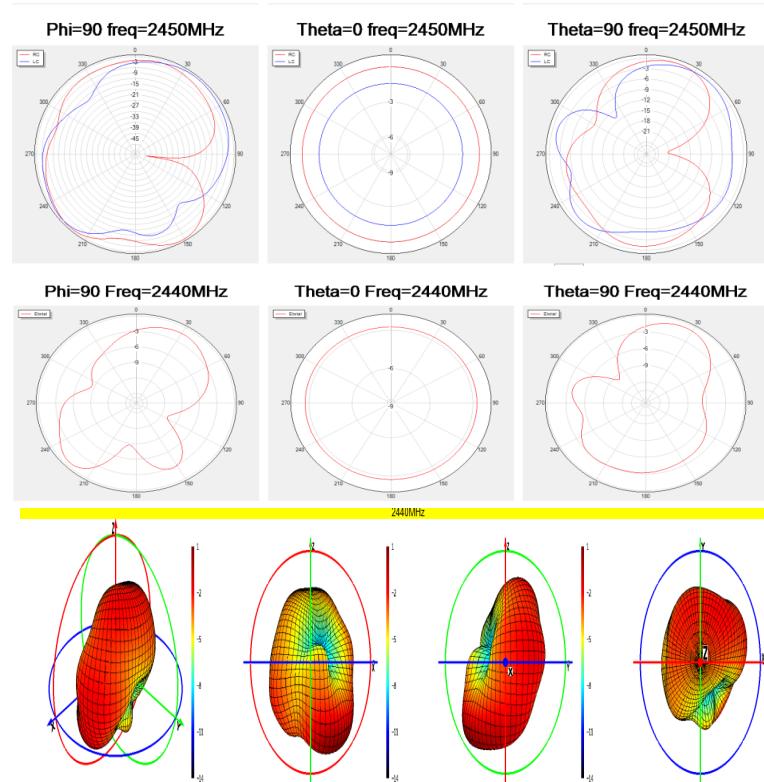

测试设备

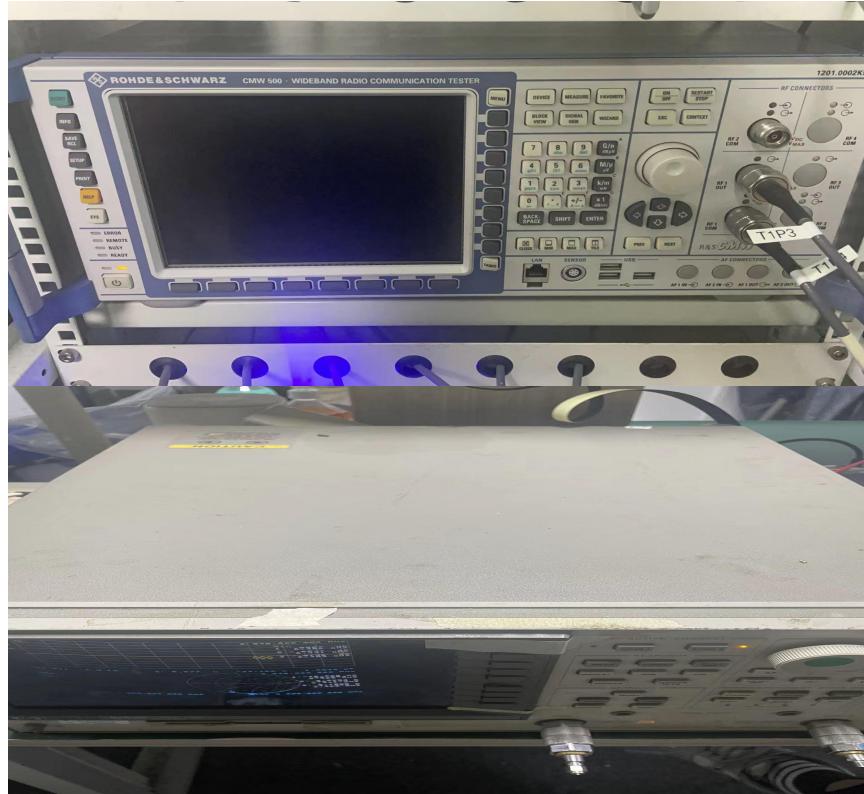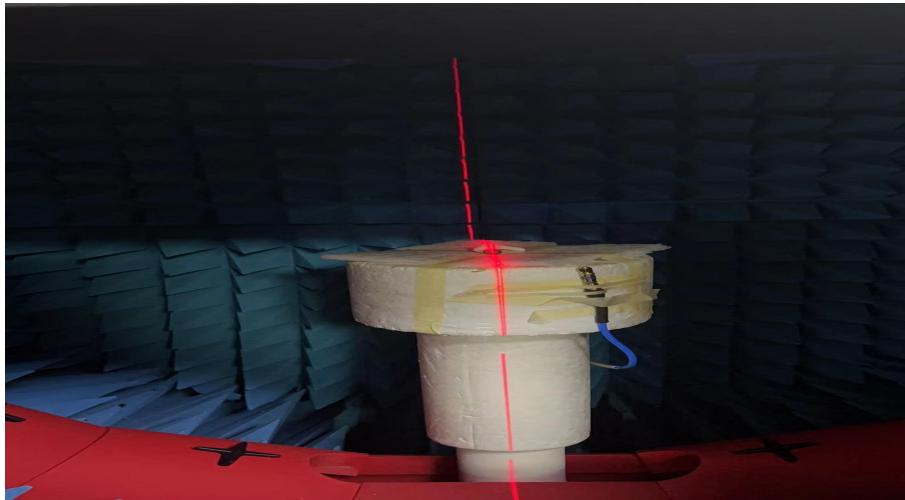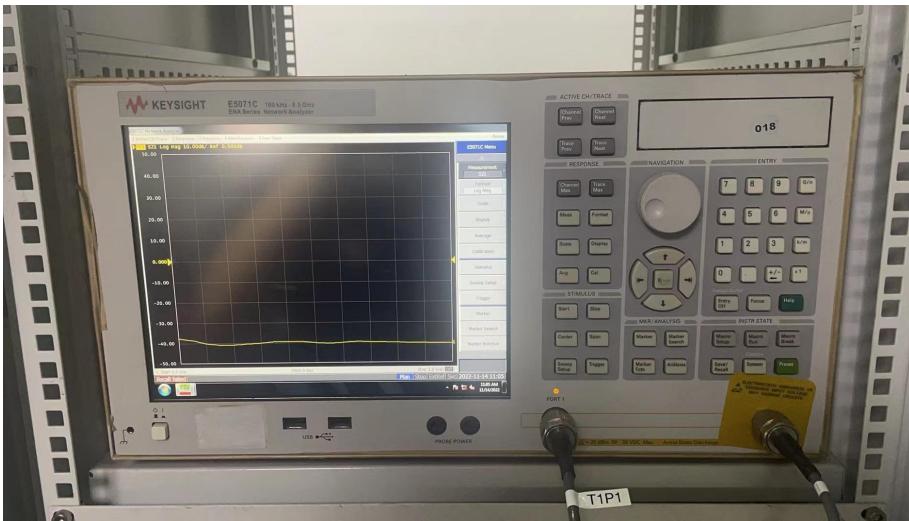


Dimension and Terminal Configuration

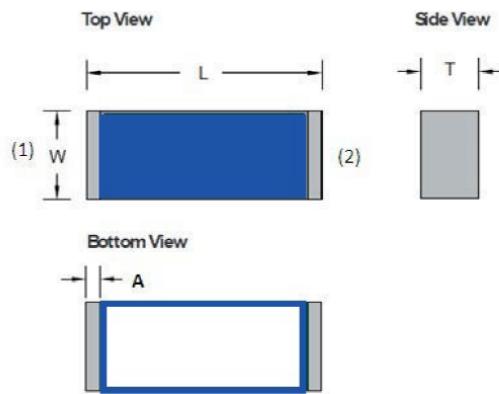

Dimension (mm)	
L	5.0 +0.20
W	2.2+- 0.20
T	1.00+-0.20
A	0.20+-0.20

No.	Terminal Name
1	Feeding
2	Soldering



Thank You