
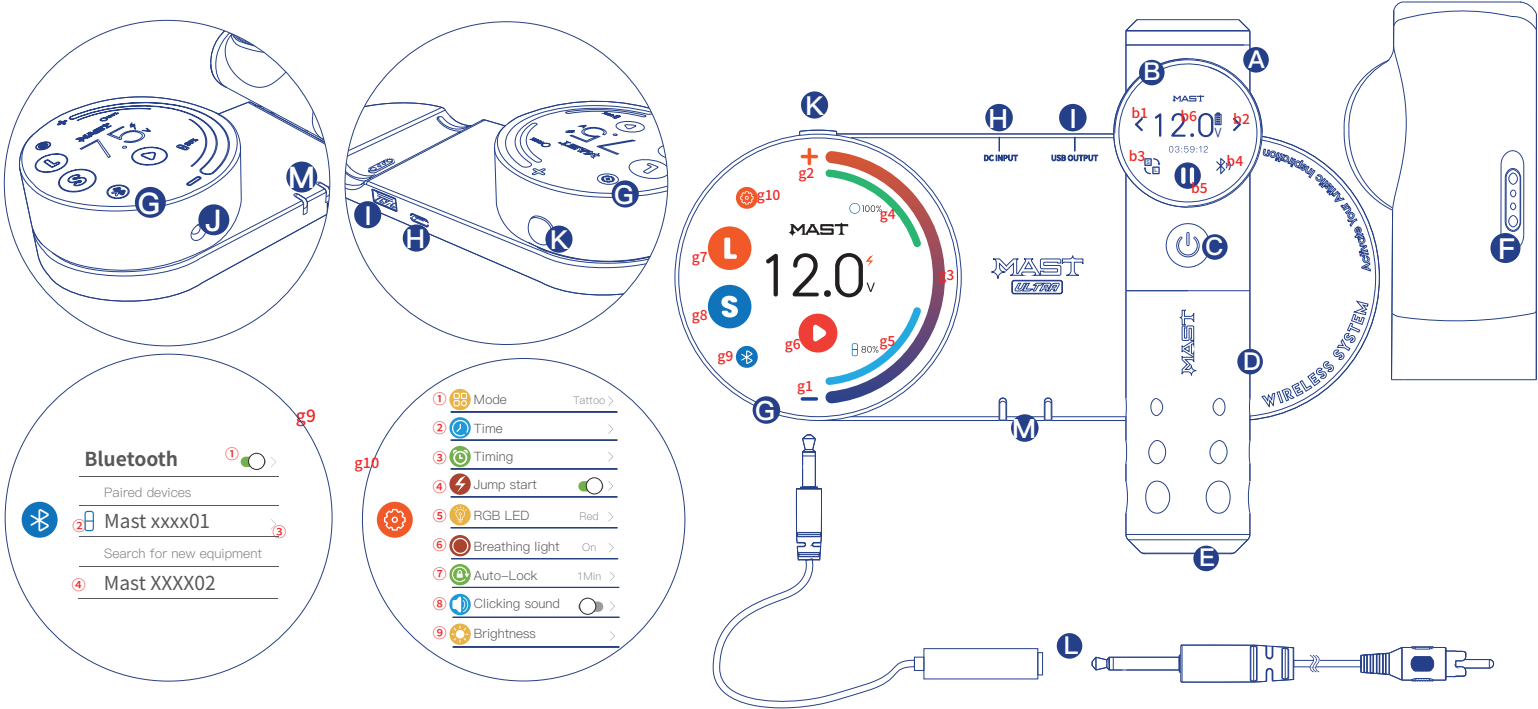


Model: P400

MAST

Activate Your Artistic Inspiration

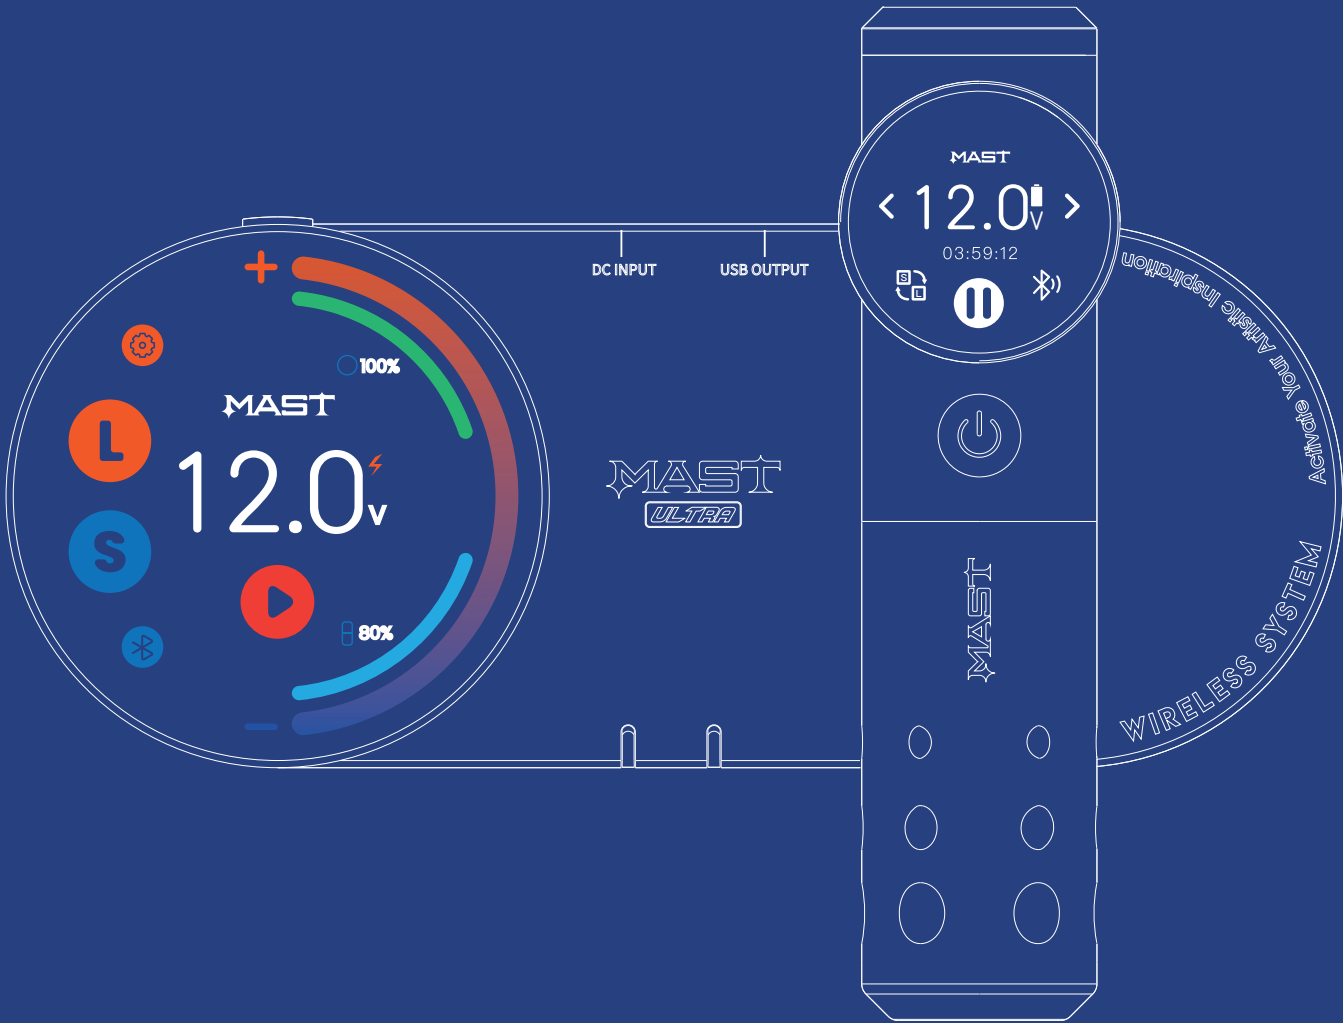

A. Tattoo pen Battery Module

B. Tattoo Pen Screen Function Module

- b1. Button to decrease voltage by 0.1V
- b2. Button to increase voltage by 0.1V
- b3. Can switch between L/S modes
- b4. Bluetooth connection function switch option
- b5. Click to start or pause
- b6. Voltage display: Touch the screen to display the voltage value, and slide up or down to increase/decrease the voltage in increments of 1.0V.

C. Tattoo Pen Start/Stop Button

- Long press the button: power on/off
- Click to run/pause when powered on

D. Tattoo Pen Grip

- Rotate the grip to adjust the length of the needle.

E. Tattoo Pen Cartridges Interface

- Insert the cartridges into the round port (E) and tighten it clockwise.

F. Tattoo Pen Charging Interface

G. ULTRA Smart Power Supply

- g1. Click to decrease voltage by 0.1V
- g2. Click to increase voltage by 0.1V
- g3. Drag the slider to quickly adjust the voltage
- g4. Remaining battery power of the Smart Power Supply (G)
- g5. Remaining battery power of the paired pen machine currently in use
- g6. Click the button to start/pause
- g7, g8. Two memory voltage settings in tattoo mode, can switch to permanent makeup mode in g10-1 Mode
- Permanent makeup mode comes with three selectable memory settings
- g9. Bluetooth connection function:
 - 1. Bluetooth function switch
 - 2. Connection successful icon prompt
 - 3. Click the expansion arrow to delete the current saved device name
 - 4. Search for nearby unlinked products; click the product name to connect
- g10. The settings panel allows customization of product functions:
 - 1. Mode selection, can switch between permanent makeup and tattoo modes
 - 2. Time display, can manually calibrate with local time, displays when entering standby mode
 - 3. Timing function: After powering on, press the run button to start timing; timing pauses during standby. Powering off resets the timer, or it can be manually reset here.
 - 4. Instant start-up mode: right-side button selects the strong start switch
 - 5. Change the atmosphere light color, with various colors available to choose from
 - 6. Atmosphere light display mode switching, can switch between constant light, breathing light, and light off
 - 7. Standby option, can set the duration for entering standby mode
 - 8. Button touch feedback sound switch, can be turned on or off with the right-side button
 - 9. Power screen brightness adjustment

- H. Type-C power input interface, can be used to charge the power and pen machine via the charging pad

- I.USB output interface: After connecting, it can charge mobile devices

- J. Power output interface, can connect with a dedicated adapter cable for use with other wired products

- K. Long press the button to power on/off the smart power

- L. Output adapter cable, can be used with other wired machines

- M. Charging indicator: Green indicates charging, Blue indicates fully charged or no device connected

The bottom of the smart power supply features a magnetic adhesive pad for attaching the smart power supply to other iron surfaces for use.

