
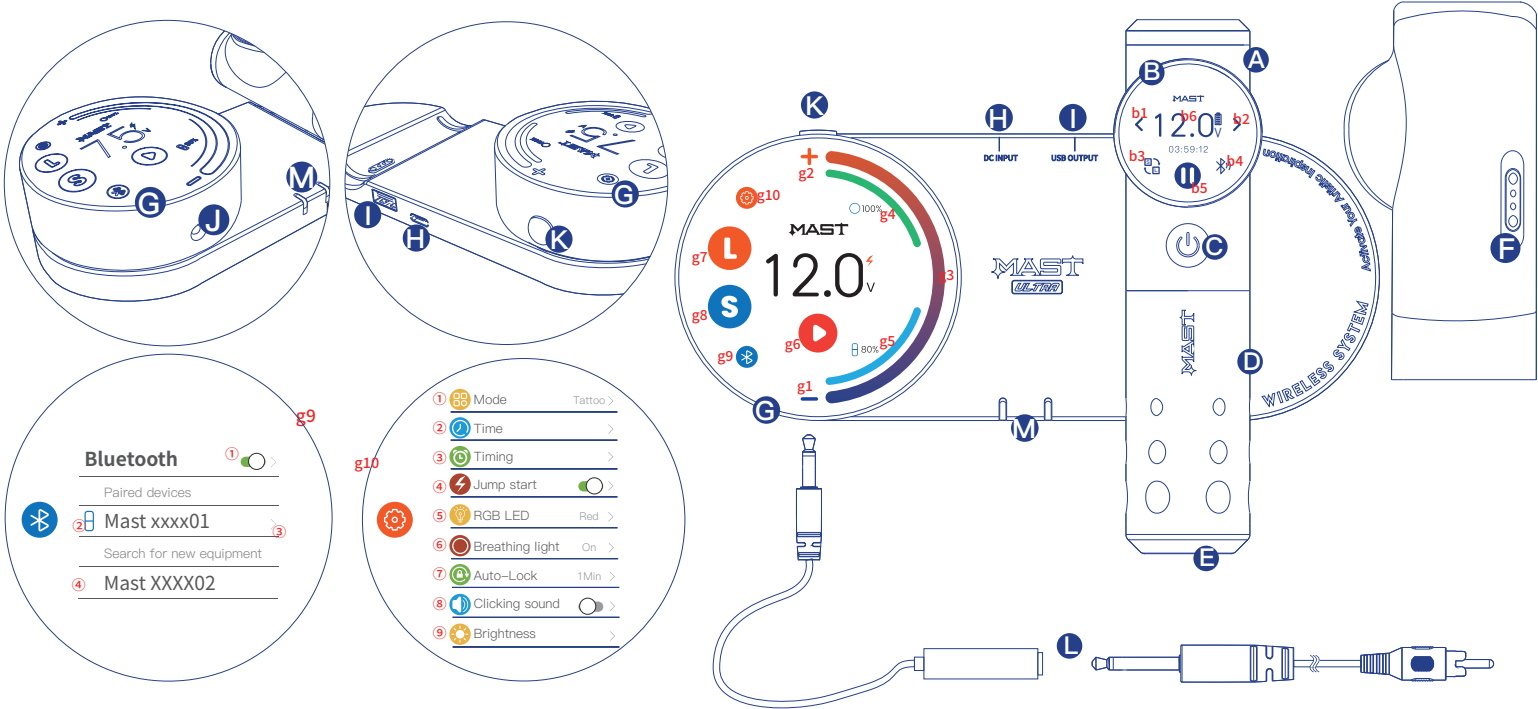


Model: WQP-051

MAST

Activate Your Artistic Inspiration

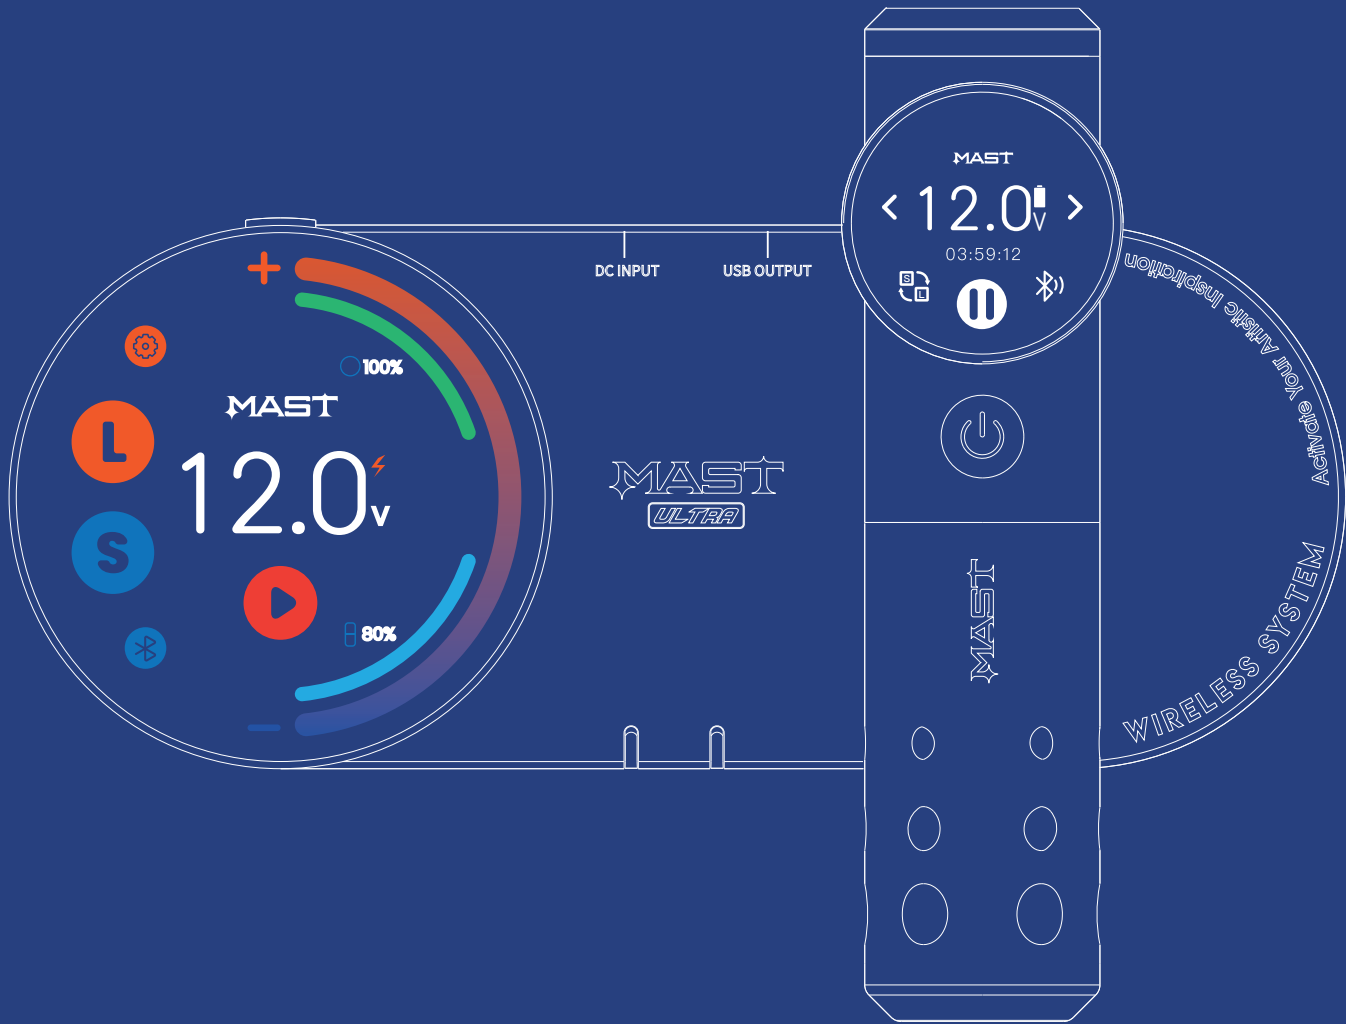

A. Tattoo pen Battery Module

B. Tattoo Pen Screen Function Module

- b1. Button to decrease voltage by 0.1V
- b2. Button to increase voltage by 0.1V
- b3. Can switch between L/S modes
- b4. Bluetooth connection function switch option
- b5. Click to start or pause
- b6. Voltage display: Touch the screen to display the voltage value, and slide up or down to increase/decrease the voltage in increments of 1.0V.

C. Tattoo Pen Start/Stop Button

Long press the button: power on/off
Click to run/pause when powered on

D. Tattoo Pen Grip

Rotate the grip to adjust the length of the needle.

E. Tattoo Pen Cartridges Interface

Insert the cartridges into the round port (E) and tighten it clockwise.

F. Tattoo Pen Charging Interface

G. ULTRA Smart Power Supply

- g1. Click to decrease voltage by 0.1V
- g2. Click to increase voltage by 0.1V
- g3. Drag the slider to quickly adjust the voltage
- g4. Remaining battery power of the Smart Power Supply (G)
- g5. Remaining battery power of the paired pen machine currently in use
- g6. Click the button to start/pause
- g7, g8. Two memory voltage settings in tattoo mode, can switch to permanent makeup mode in g10-1 Mode
- Permanent makeup mode comes with three selectable memory settings
- g9. Bluetooth connection function:
 - 1. Bluetooth function switch
 - 2. Connection successful icon prompt
 - 3. Click the expansion arrow to delete the current saved device name
 - 4. Search for nearby unlinked products; click the product name to connect
- g10. The settings panel allows customization of product functions:
 - 1. Mode selection, can switch between permanent makeup and tattoo modes
 - 2. Time display, can manually calibrate with local time, displays when entering standby mode
 - 3. Timing function: After powering on, press the run button to start timing; timing pauses during standby. Powering off resets the timer, or it can be manually reset here.
 - 4. Instant start-up mode: right-side button selects the strong start switch
 - 5. Change the atmosphere light color, with various colors available to choose from
 - 6. Atmosphere light display mode switching, can switch between constant light, breathing light, and light off
 - 7. Standby option, can set the duration for entering standby mode
 - 8. Button touch feedback sound switch, can be turned on or off with the right-side button
 - 9. Power screen brightness adjustment

H. Type-C power input interface, can be used to charge the power and pen machine via the charging pad

I.USB output interface: After connecting, it can charge mobile devices

J. Power output interface, can connect with a dedicated adapter cable for use with other wired products

K. Long press the button to power on/off the smart power

L. Output adapter cable, can be used with other wired machines

M. Charging indicator: Green indicates charging, Blue indicates fully charged or no device connected

The bottom of the smart power supply features a magnetic adhesive pad for attaching the smart power supply to other iron surfaces for use.

