



# FCC TEST REPORT

## FCC ID: 2A4B9-WP14

### Maximum Permissible Exposure (MPE)

Product Name	:	Wireless charger
Model Name	:	WP14,WP12,WP13,WP15,WP16
Brand Name	:	《HT》 HT
Report No.	:	PTC21101502201E-FC02
Sample ID	:	PTC21101502201-1#

#### Prepared for

Guangdong HT Technologies Co.,Ltd

No. 1, Xiangxing West Second Street, Huangsiwei, Shijie Town,  
Dongguan Guangdong China

#### Prepared by

Precise Testing & Certification Co., Ltd

Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China



## 1 TEST RESULT CERTIFICATION

Applicant's name : Guangdong HT Technologies Co.,Ltd  
Address : No. 1, Xiangxing West Second Street, Huangsiwei, Shijie Town, Dongguan Guangdong China  
Manufacturer's name : Guangdong HT Technologies Co.,Ltd  
Address : No. 1, Xiangxing West Second Street, Huangsiwei, Shijie Town, Dongguan Guangdong China  
Product name : Wireless charger  
Model name : WP14,WP12,WP13,WP15,WP16  
Standards : FCC CRF 47 PART 1, §1.1310  
Test procedure : KDB 680106 v03 r01  
Test Date : Dec.29, 2021-Jan.14 2022  
Date of Issue : Jan.17 2022  
Test Result : Pass

This device described above has been tested by PTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of PTC, this document may be altered or revised by PTC, personal only, and shall be noted in the revision of the document.

Test Engineer:

A handwritten signature in black ink that reads 'Leo Yang'.

Leo Yang / Engineer

Technical Manager:

A handwritten signature in black ink that reads 'Chris Du'.

Chris Du /Manager



## Contents

	Page
<b>1 TEST RESULT CERTIFICATION.....</b>	<b>2</b>
<b>2 TEST SUMMARY.....</b>	<b>4</b>
2.1 INSTRUMENT LIST.....	5
<b>3 TEST FACILITY.....</b>	<b>7</b>
<b>4 GENERAL INFORMATION.....</b>	<b>8</b>
4.1 GENERAL DESCRIPTION OF E.U.T.....	8
<b>5 RF EXPOSURE EVALUATION.....</b>	<b>10</b>
5.1 LIMITS.....	10
5.2 TEST CONFIGURATION.....	10
5.3 RF EXPOSURE TEST RESULT.....	10



## 2 Test Summary

Test	Test Requirement	Test Method	Limit / Severity	Result
RF Exposure	FCC CRF 47 PART 1, §1.1310	KDB 680106 v03 r01	1.1310	PASS

Remark:

N/A: Not Applicable

RF: In this whole report RF means Radio Frequency.

A.M. Amplitude Modulation.

P.M. Pulse Modulation.



## 2.1 Instrument list

Name of Equipment	Manufacturer	Model	Characteristics	Calibration Due	interval time
Exposure Level Tester	Narda	ELT-400	Aug. 21, 2021	Aug. 20, 2022	1 year
H-Field probe	Narda	HF-3061	Aug. 21, 2021	Aug. 20, 2022	1 year
E-Field probe	Narda	EF0691	Aug. 21, 2021	Aug. 20, 2022	1 year



## 2.2 Support Units

Equipment	Model No.	Series No.
Mobile Phone	Samsung S9	N/A
Mobile Phone	iPhone 13 Pro	N/A
Apple Watch	Series 7	N/A
Adapter	GaN Mini I	N/A



Report No.:PTC21101502201E-FC02

### 3 TEST FACILITY

Precise Testing & Certification Co., Ltd

Address: Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China

A2LA Certificate No.: 4408.01

FCC Registration Number: 790290

FCC Designation Number: CN1219

IC Registration Number: 12191A-1

CAB identifier: CN0080



## 4 General Information

### 4.1 General Description of E.U.T.

Product Name	:	Wireless charger
Model Name	:	WP14,WP12,WP13,WP15,WP16
Operating frequency	:	111-205KHz
Antenna Type	:	Coil Antenna
Power supply	:	DC 12V 3A via adapter input AC 100-240V 50Hz 0.8A MAX (Model: GaN Mini I)
Output(Stand)	:	9V/1.66A(15W)
Output(Pad)	:	9V/1.66A~5V/1A(15~5W)
Output(Watch)	:	5V/0.5A(2.5W)
Hardware Version	:	V1.0
Software Version	:	V1.0



## Test model:

Pretest Mode	Description
Mode 1	Stand charging mode(9V/1.66A,no load, half load, full load)
Mode 2	Pad charging mode(9V/1.66A,no load, half load, full load)
Mode 3	Pad charging mode(5V/1A,no load, half load, full load)
Mode 4	Watch charging mode(no load, half load, full load)
Mode 5	Stand+pad charging mode(half load, full load)
Mode 6	Stand+watch charging mode(half load, full load)
Mode 7	Pad+watch charging mode(half load, full load)
Mode 8	Stand+pad+watch charging mode(no load,half load, full load)
Remark:All model are pretested and the worst case is record(Stand+pad+watch full load charging mode).	

## 5 RF Exposure Evaluation

### 5.1 Limits

Limits for General Population/Uncontrolled Exposure


Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm <sup>2</sup> )	Averaging Time  E <sup>2</sup> ,  H <sup>2</sup> or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f <sup>2</sup> )*	30
30-300	27.5	0.073	0.2	30
300-1500	--	--	f/150	30
1500-100,000	--	--	1.0	30

f = frequency in MHz

\*Plane-wave equivalent power density

- A. The RF exposure test was performed in anechoic chamber.
- B. E and H field measurements should be made with the center of the probe at distance of 15cm surrounding the EUT and 20cm above the top surface of the primary/client pair.
- C. The highest emission level was recorder and compared with limit.
- D. The EUT was measured according to the dictates of KDB 680106 v03r01.

### 5.2 Test Configuration

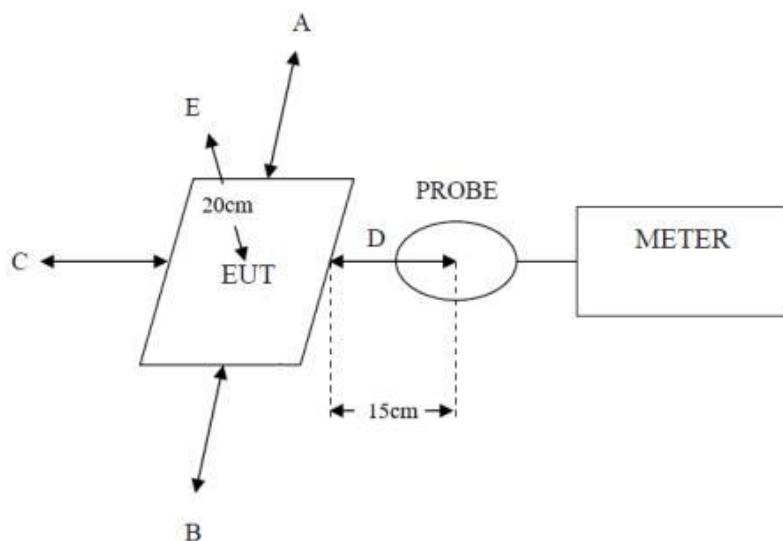

### 5.3 RF Exposure test result



Temperature: 24 °C

Relative Humidity: 53%

EUT was tested with empty load, half load and full load, the full load is the worst case and we listed the results in the report.

Test result of Magnetic Field Strength:

Test Position	Test distance (cm)	Reading result ( uT)	Test result (A/m)	50% Limit (A/m)	Limit (A/m)	Result
A: Right	15	0.0591	0.0473	0.815	1.63	Passed
B: Left	15	0.0595	0.0476	0.815	1.63	
C: Front	15	0.0664	0.0531	0.815	1.63	
D: Back	15	0.0859	0.0687	0.815	1.63	
E: Top	20	0.1134	0.0907	0.815	1.63	

Note: A/m = uT/1.25

Test result of Electric Field Strength:

Test Position	Test distance (cm)	Test result (V/m)	Limit (V/m)	Result
A: Right	15	2.33	614	Passed
B: Left	15	2.12	614	
C: Front	15	2.35	614	
D: Back	15	2.61	614	
E: Top	20	2.81	614	

## 5.4 Result appraise



(1) Power transfer frequency is less than 1 MHz

--Yes. it's 111-205KHz.

(2) Output power from each primary coil is less than or equal to 15 watts.

--Yes. It is max power 15W.

(3) The system may consist of more than one source primary coils, charging one or more clients. If more than one primary coil is present, the coil pairs may be powered on at the same time.

--it is more than one source primary coils, the coil pairs may be powered on at the same time.

(4) Client device is placed directly in contact with the transmitter.

--Yes. Client device is placed directly.

(5) Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).

--Yes. it is mobile production.

(6) The aggregate H-field strengths anywhere at or beyond 15 cm surrounding the device, and 20 cm away from the surface from all coils that by design can simultaneously transmit, and while those coils are simultaneously energized, are demonstrated to be less than 50% of the applicable MPE limit.

--Yes, it is meet the requirement.

## 6 Test Photo



\*\*\*\*\*THE END REPORT\*\*\*\*\*