


Manufacturer's name: SHENZHEN
HENGXIANGTONG ANTENNA TECNOLOGY CO., LTD.

Add: 606, Building E, Enterprise
Aviation Technology Innovation Research
and Development Industrial Park, No. 1008,
Songbai Road, Sunshine Community, Xili
Street, Nanshan District. Shenzhen

Notes for antenna installation

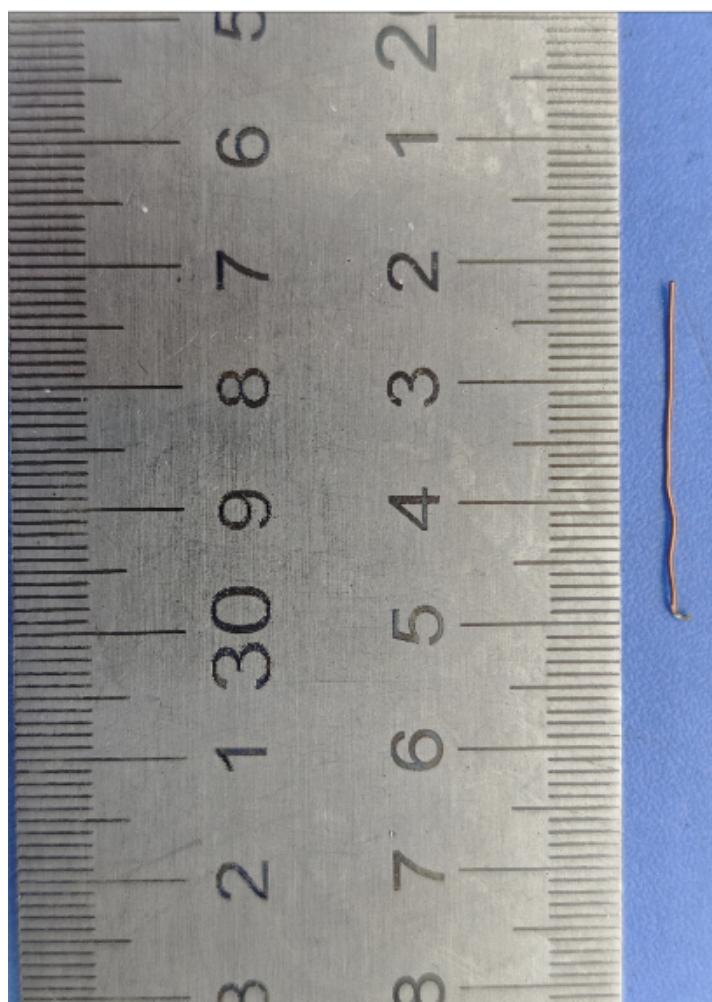


Notes for antenna installation

Electronic wire installation recommendations :

- 1: The electron line length is in the 24.60mm.
- 2: The electronic wire is installed on the side of the horn.
- 3: The end of the electronic wire is fixed with adhesive paper to make the consistency of the batch production good.

Antenna parameters

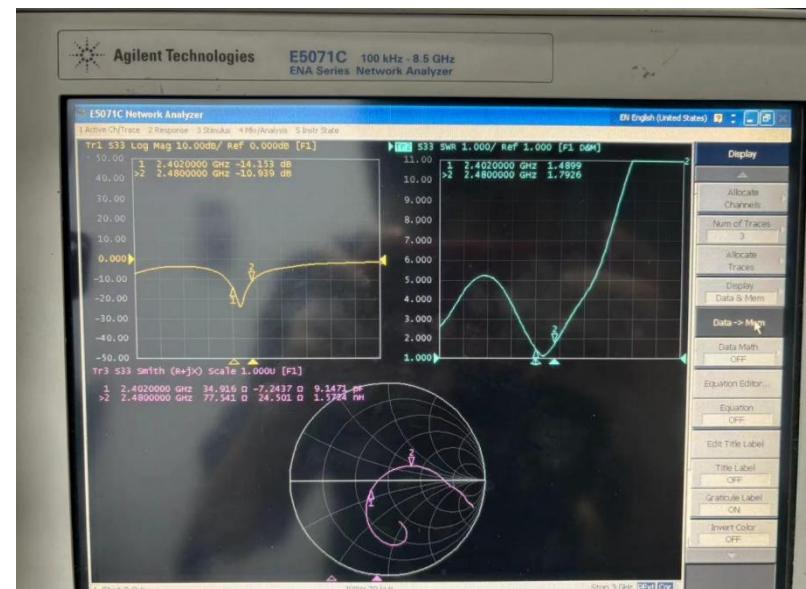


Freq	2.4GHz	2.5GHz	spce
VSWR	1.48	1.79	<2
Log Mag	-14.15	-10.93	<-10

Antenna parameters

Frequency/Mhz	Efficiency / %	Gain/dBi
2400	4.2	-7.13
2410	4.21	-7.3
2420	4.33	-7.43
2430	4.38	-7.69
2440	4.4	-7.9
2450	4.66	-7.84
2460	4.8	-7.75
2470	5.01	-7.56
2480	4.7	-7.7
2490	4.65	-7.62
2500	4.29	-7.99

3D radiation pattern diagram

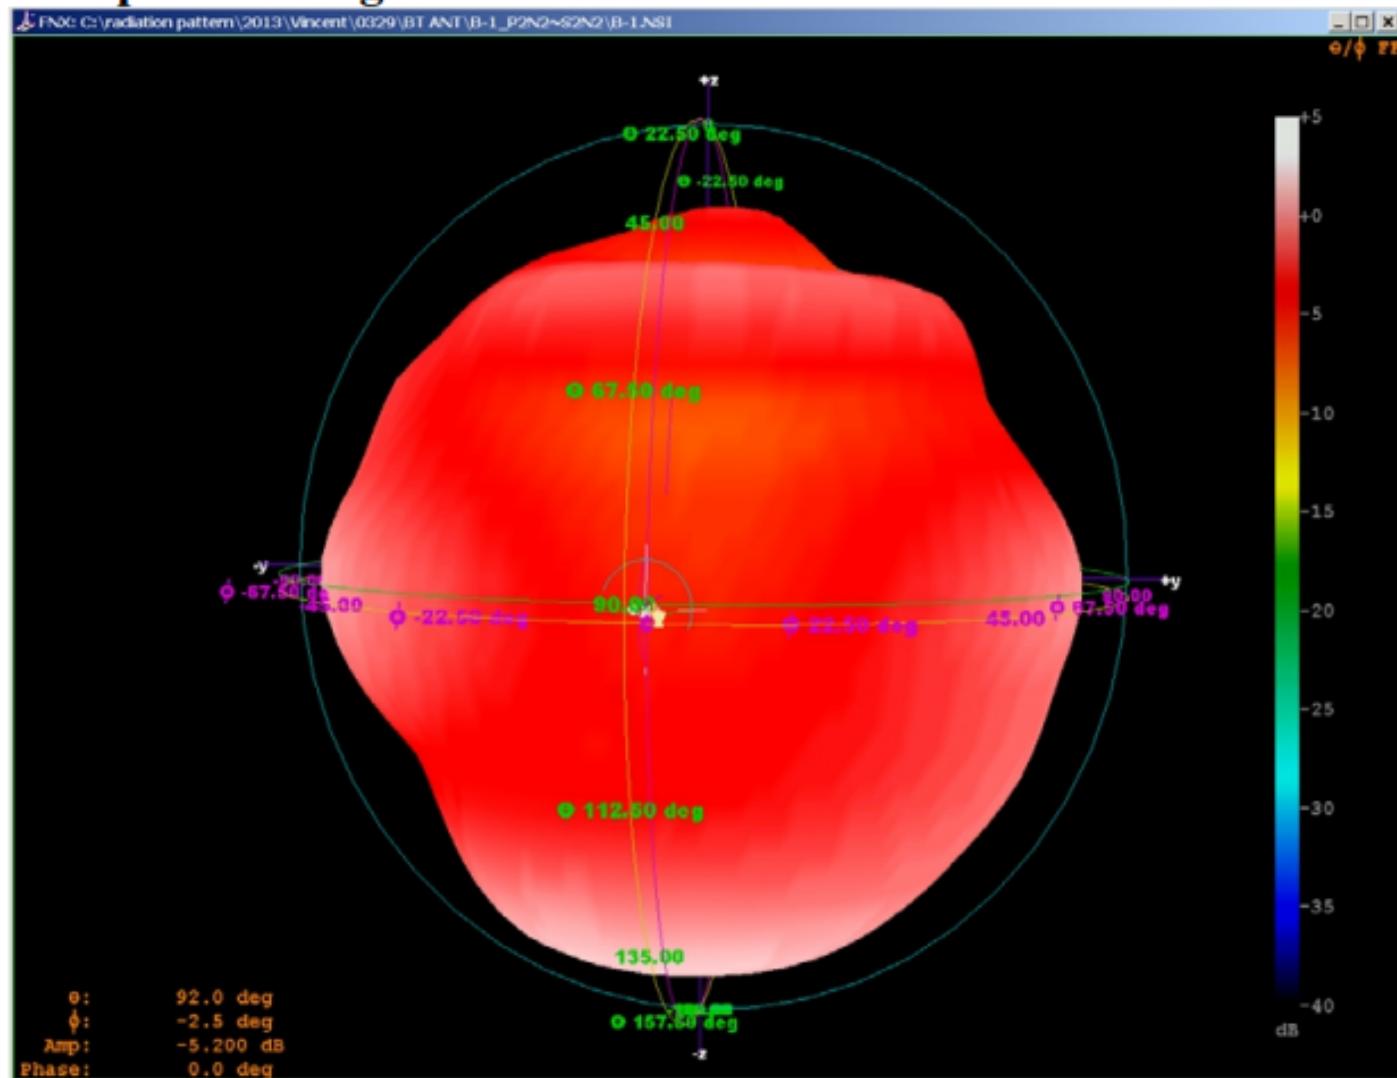

XY-plane

XZ-plane

YZ-plane

The measured distance on the roof of the building

Project	T11-N	Test date	2024.5.9	
Software release		Test location	The measured distance on the roof of the building	
Model	Measuring distance	Metal watchband	Non-metallic watchband	
IOS	Positive effective distance (≥15m)	18	17	
	Back effective distance (≥10m)	10	6	
Android	Positive effective distance (≥15m)	18	18	
	Back effective distance (≥10m)	9	9	

谢谢，合作愉快！

Thank You!

The Concepts National Income And National Product Have Roughly The
Same Value And Can Be Used Interchangeably If Our Interest Is In
Their

