

**FCC Test Report**

Report Reference No.:

HK2502080448-4E

FCC ID:

2BDI3-F

Compiled by

(position+printed name+signature) : Testing Engineer Len Liao

Supervised by

(position+printed name+signature) : Technical Manager Sliver Wan

Approved by

(position+printed name+signature) : Authorized Signatory Jason Zhou

Date of issue : Apr. 11, 2025

Testing Laboratory Name : Shenzhen HUAKE Testing Technology Co., Ltd.Address : 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park,
Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China**Applicant's name : Shenzhen Haimeilan Technology Co., LTD.**Address : 9V777, East 9th Floor, Building 2, SEG Science Park, Huaqiang North
Street, Futian District, Shenzhen, 518000 China**Test specification..... :**Standard : **FCC Part 22: PUBLIC MOBILE SERVICES****FCC Part 24: PERSONAL COMMUNICATIONS SERVICES****Shenzhen HUAKE Testing Technology Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAKE Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAKE Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description..... : Smart Phone

Trade Mark..... : N/A

Model/Type reference : S25 mini

Series Models : RE6 mini, MT 30 mini, C37 mini, C73 Mini, G37 mini, G73 mini, E55 Mini, H88 mini, C3 mini, C7 mini, G3 mini, G7 mini, Polaris7 mini, Echo8 mini, Sirius9 mini, Alpha10 mini, Zero5 mini, Gear20 mini, Vista16 mini, Viral11 mini, E-on33 mini, Rise77 mini, Opus33 mini, Acro77 mini, RE1 mini, Mt10 mini, C6 mini, C20 mini, G6 mini, C10 mini, C30 mini, Polaris8 mini, Echo9 mini, Sirius40 mini, Alpha1 mini, Zero 60 mini, Gear70 mini, Vista10 mini, Viral20 mini, A16 mini, I15 mini, I16 mini, S24 mini, S26 mini, H50 Mini, T3 Ultra, Reno 12 mini, POP 9 mini, P70 Ultra

Ratings : DC5V From Type-C or DC3.8V From Battery

Modulation : GMSK

GPRS : Supported

Hardware version : V1.0

Software version : V1.0

Frequency : GSM 850MHz; PCS 1900MHz;

Result..... : **PASS**



TEST REPORT

Test Report No. :	HK2502080448-4E	Apr. 11, 2025
		Date of issue

Equipment under Test : Smart Phone

Model /Type : S25 mini

Series Models : RE6 mini, MT 30 mini, C37 mini, C73 Mini, G37 mini, G73 mini, E55 Mini, H88 mini, C3 mini, C7 mini, G3 mini, G7 mini, Polaris7 mini, Echo8 mini, Sirius9 mini, Alpha10 mini, Zero5 mini, Gear20 mini, Vista16 mini, Viral11 mini, E-on33 mini, Rise77 mini, Opus33 mini, Acro77 mini, RE1 mini, Mt10 mini, C6 mini, C20 mini, G6 mini, C10 mini, C30 mini, Polaris8 mini, Echo9 mini, Sirius40 mini, Alpha1 mini, Zero 60 mini, Gear70 mini, Vista10 mini, Viral20 mini, A16 mini, I15 mini, I16 mini, S24 mini, S26 mini, H50 Mini, T3 Ultra, Reno 12 mini, POP 9 mini, P70 Ultra

Applicant : Shenzhen Haimeilan Technology Co., LTD.

Address : 9V777, East 9th Floor, Building 2, SEG Science Park, Huaqiang North Street, Futian District, Shenzhen, 518000 China

Manufacturer : Shenzhen Haimeilan Technology Co., LTD.

Address : 9V777, East 9th Floor, Building 2, SEG Science Park, Huaqiang North Street, Futian District, Shenzhen, 518000 China

Test Result:	PASS
--------------	------

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.



Contents

1	Test Standards	5
2	Summary	6
2.1	General Remarks	6
2.2	Product Description	6
2.3	Equipment Under Test	7
2.4	Short Description of The Equipment Under Test (EUT)	8
2.5	EUT Configuration	8
2.6	Related Submittal(s) / Grant (s)	8
2.7	Modifications	8
2.8	General Test Conditions/Configurations	8
2.9	Modifications	8
3	Test Environment	9
3.1	Information of The Test Laboratory	9
3.2	Environmental Conditions	9
3.3	Test Description	9
3.4	Equipments Used During The Test	11
4	Test Conditions and Results	13
4.1	Output Power	13
4.2	Radiated Spurious Emission	18
4.3	Occupied Bandwidth and Emission Bandwidth	30
4.4	Band Edge Compliance	34
4.5	Spurious Emission on Antenna Port	37
4.6	Frequency Stability Test	44
4.7	Peak-to-Average Ratio (PAR)	47
5	Test Setup Photos of the EUT	49
6	Photos of the EUT	56



**** Modified History ****

Revision	Description	Issued Data	Remark
Revision 1.0	Initial Test Report Release	Apr. 11, 2025	Jason Zhou



1 Test Standards

The tests were performed according to following standards:

[FCC Part 2:](#) Frequency Allocation And Radio Treaty Matters; General Rules And Regulations.

[FCC Part 22 Subpart H:](#) Private Land Mobile Radio Services.

[FCC Part 24 Subpart E:](#) Public Mobile Services.

[ANSI/TIA-603-E-2016:](#) Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

[ANSI C63.26-2015:](#) IEEE/ANSI Standard for Compliance Testing of Transmitters Used in Licensed Radio Services.

[KDB971168 D01:v03r01](#) Measurement Guidance For Certification Of Licensed Digital Transmitters.



2 Summary

2.1 General Remarks

Date of receipt of test sample	:	Feb. 08, 2025
Testing commenced on	:	Feb. 08, 2025
Testing concluded on	:	Apr. 11, 2025

2.2 Product Description

Product Name:	Smart Phone
Model/Type reference:	S25 mini
Series Models:	RE6 mini, MT 30 mini, C37 mini, C73 Mini, G37 mini, G73 mini, E55 Mini, H88 mini, C3 mini, C7 mini, G3 mini, G7 mini, Polaris7 mini, Echo8 mini, Sirius9 mini, Alpha10 mini, Zero5 mini, Gear20 mini, Vista16 mini, Viral11 mini, E-on33 mini, Rise77 mini, Opus33 mini, Acro77 mini, RE1 mini, Mt10 mini, C6 mini, C20 mini, G6 mini, C10 mini, C30 mini, Polaris8 mini, Echo9 mini, Sirius40 mini, Alpha1 mini, Zero 60 mini, Gear70 mini, Vista10 mini, Viral20 mini, A16 mini, I15 mini, I16 mini, S24 mini, S26 mini, H50 Mini, T3 Ultra, Reno 12 mini, POP9 mini, P70 Ultra
Model Difference:	All model's the function, software and electric circuit are the same, only with a product color, appearance and model named different. Test sample model: S25 mini.
Power supply:	DC5V From Type-C or DC3.8V From Battery
Adapter Information:	DC5V From Type-C or DC3.8V From Battery
Modulation Type:	GMSK
Antenna Type:	FPC Antenna
Antenna Gain	0.86dBi
GSM/EDGE/GPRS:	Supported GPRS/GSM
GSM/GPRS Power Class:	GSM850:Power Class 4/ PCS1900:Power Class 1
GSM/GPRS Operation Frequency:	GSM850:824.2MHz-848.8MHz/PCS1900:1850.2MHz-1909.8MHz
GPRS Operation Frequency Band:	GPRS850/GPRS1900
GPRS/EDGE Multislot Class:	GPRS: Multi-slot Class 12
EGPRS Multislot Class:	/
Extreme temp. Tolerance:	-30°C to +50°C
GPRS operation mode:	Class B
Note: 1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual. 2. Antenna gain Refer to the antenna specifications. 3. The cable loss data is obtained from the supplier. 4. The test results in the report only apply to the tested sample.	



2.3 Equipment Under Test

Power supply system utilised

Power supply voltage	:	☐	120V / 60 Hz	☐	230V / 50Hz
		☐	12 V DC	☐	24 V DC
		☒	Other (specified in blank below)		

DC5V From Type-C or DC3.8V From Battery

Test frequency list

Test Mode	TX/RX	RF Channel		
		Low(L)	Middle (M)	High (H)
GSM850	TX	Channel 128	Channel 190	Channel 251
		824.2 MHz	836.6 MHz	848.8 MHz
	RX	Channel 128	Channel 190	Channel 251
		869.2 MHz	881.6 MHz	893.8 MHz
Test Mode	TX/RX	RF Channel		
		Low(L)	Middle (M)	High (H)
PCS1900	TX	Channel 512	Channel 661	Channel 810
		1850.2 MHz	1880.0 MHz	1909.8 MHz
	RX	Channel 512	Channel 661	Channel 810
		1930.2 MHz	1960.0 MHz	1989.8 MHz



2.4 Short Description of The Equipment Under Test (EUT)

This is a Smart Phone.

For more details, refer to the user's manual of the EUT.

2.5 EUT Configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab

○ /	M/N :	/
	Manufacturer:	/

2.6 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: 2BDI3-F** filing to comply with FCC Part 22 and Part 24 Rules.

2.7 Modifications

No modifications were implemented to meet testing criteria.

2.8 General Test Conditions/Configurations

2.8.1 Test Modes

NOTE: The test mode(s) are selected according to relevant radio technology specifications.

Test Mode 1	GPRS
Test Mode 2	GSM

2.8.2 Test Environment

Environment Parameter	Selected Values During Tests	
Relative Humidity	Ambient	
Temperature	TN	Ambient
Voltage	VL	4.25V
	VN	5.0V
	VH	5.75V

NOTE: VL=lower extreme test voltage VN=nominal voltage
VH=upper extreme test voltage TN=normal temperature

2.9 Modifications

No modifications were implemented to meet testing criteria.



3 Test Environment

3.1 Information of The Test Laboratory

Shenzhen HUAKE Testing Technology Co., Ltd.
Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping,
Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Testing Laboratory Authorization:

A2LA Accreditation Code is 4781.01.
FCC Designation Number is CN1229.
Canada IC CAB identifier is CN0045.
CNAS Registration Number is L9589.

3.2 Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15-35 ° C
Humidity:	30-60 %
Atmospheric pressure:	950-1050mbar

3.3 Test Description

3.3.1 Cellular Band (824-849MHz paired with 869-894MHz)

Test Item	FCC Rule No.	Requirements	Verdict
Effective(Isotropic) Radiated Output Power	§2.1046, §22.913	FCC: ERP ≤ 7W.	Pass
Modulation Characteristics	§2.1047	Digital modulation	N/A
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Pass
Band Edges Compliance	§2.1051, §22.917	≤-13dBm/1%*EBW, in 1MHz bands immediately outside and adjacent to The frequency block.	Pass
Spurious Emission at Antenna Terminals	§2.1051, §22.917	FCC: ≤ -13dBm/100kHz, from 9kHz to 10th harmonics but outside authorized operating frequency ranges.	Pass
Field Strength of Spurious Radiation	§2.1053, §22.917	FCC: ≤ -13dBm/100kHz.	Pass
Frequency Stability	§2.1055, §22.355	≤ ±2.5ppm.	Pass

NOTE 1: For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested".

**3.3.2 PCS Band (1850-1915MHz paired with 1930-1995MHz)**

Test Item	FCC Rule No.	Requirements	Verdict
Effective(Isotropic) Radiated Output Power	§2.1046, §24.232	EIRP $\leq$ 2W	Pass
Peak-Average Ratio	§2.1046, §24.232	FCC:Limit $\leq$ 13dB	Pass
Modulation Characteristics	§2.1047	Digital modulation	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Pass
Band Edges Compliance	§2.1051, §24.238	$\leq$ -13dBm/1%*EBW, In 1MHz bands immediately outside and adjacent to The frequency block.	Pass
Spurious Emission at Antenna Terminals	§2.1051, §24.238	$\leq$ -13dBm/1MHz, from 9kHz to10th harmonics but outside authorized Operating frequency ranges.	Pass
Field Strength of Spurious Radiation	§2.1053, §24.238	$\leq$ -13dBm/1MHz.	Pass
Frequency Stability	§2.1055, §24.235	FCC: within authorized frequency block.	Pass
NOTE 1: For the verdict, the "N/A" denotes "not applicable", the "N/T" de notes "not tested".			

Remark:

1. The measurement uncertainty is not included in the test result.



3.4 Equipments Used During The Test

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
1	L.I.S.N.	R&S	ENV216	HKE-002	2024/02/20	2025/02/19
2	L.I.S.N.	R&S	ENV216	HKE-059	2024/02/20	2025/02/19
3	EMI Test Receiver	R&S	ESR	HKE-005	2024/02/20	2025/02/19
4	Spectrum analyzer	Agilent	N9020A	HKE-117	2024/02/20	2025/02/19
5	Spectrum analyzer	R&S	FSV3044	HKE-126	2024/02/20	2025/02/19
6	Preamplifier	EMCI	EMC051845S	HKE-006	2024/02/20	2025/02/19
7	Preamplifier	Schwarzbeck	BBV 9743	HKE-016	2024/02/20	2025/02/19
8	Preamplifier	A.H. Systems	SAS-574	HKE-182	2024/02/20	2025/02/19
9	6dB Attenuator	Pasternack	6db	HKE-184	2024/02/20	2025/02/19
10	EMI Test Receiver	Rohde & Schwarz	ESR-7	HKE-010	2024/02/20	2025/02/19
11	Broadband Antenna	Schwarzbeck	VULB9168	HKE-167	2024/02/21	2026/02/20
12	Loop Antenna	COM-POWER	AL-130R	HKE-014	2024/02/21	2026/02/20
13	Horn Antenna	Schwarzbeck	9120D	HKE-013	2024/02/21	2026/02/20
14	EMI Test Software	Tonscend	JS32-CE 2.5.0.6	HKE-081	/	/
15	EMI Test Software	Tonscend	JS32-RE 5.0.0	HKE-082	/	/
16	RF Automatic control unit	Tonscend	JS0806-1	HKE-096	2024/02/20	2025/02/19
17	High pass filter unit	Tonscend	JS0806-F	HKE-055	2024/02/20	2025/02/19
18	Wireless Communication Test Set	R&S	CMU200	HKE-026	2024/02/20	2025/02/19
19	Wireless Communication Test Set	R&S	CMW500	HKE-027	2024/02/20	2025/02/19
20	High-low temperature chamber	Guangke	HT-80L	HKE-118	2024/06/10	2025/06/09
21	Temperature and humidity meter	Boyang	HTC-1	HKE-075	2024/06/10	2025/06/09
22	RF Test Software	Tonscend	JS1120-3 Version 3.5.39	HKE-183	/	/
23	RSE Test Software	Tonscend	JS36-RSE 5.0.0	HKE-184	/	/

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
1	L.I.S.N.	R&S	ENV216	HKE-002	2025/02/19	2026/02/18
2	L.I.S.N.	R&S	ENV216	HKE-059	2025/02/19	2026/02/18
3	EMI Test Receiver	R&S	ESR	HKE-005	2025/02/19	2026/02/18
4	Spectrum analyzer	Agilent	N9020A	HKE-117	2025/02/19	2026/02/18
5	Spectrum analyzer	R&S	FSV3044	HKE-126	2025/02/19	2026/02/18
6	Preamplifier	EMCI	EMC051845S	HKE-006	2025/02/19	2026/02/18
7	Preamplifier	Schwarzbeck	BBV 9743	HKE-016	2025/02/19	2026/02/18
8	Preamplifier	A.H. Systems	SAS-574	HKE-182	2025/02/19	2026/02/18
9	6dB Attenuator	Pasternack	6db	HKE-184	2025/02/19	2026/02/18
10	EMI Test Receiver	Rohde & Schwarz	ESR-7	HKE-010	2024/02/20	2025/02/19
11	Broadband Antenna	Schwarzbeck	VULB9168	HKE-167	2024/02/21	2026/02/20
12	Loop Antenna	COM-POWER	AL-130R	HKE-014	2024/02/21	2026/02/20
13	Horn Antenna	Schwarzbeck	9120D	HKE-013	2024/02/21	2026/02/20
14	EMI Test Software	Tonscend	JS32-CE 2.5.0.6	HKE-081	/	/
15	EMI Test Software	Tonscend	JS32-RE 5.0.0	HKE-082	/	/
16	RF Automatic control unit	Tonscend	JS0806-1	HKE-096	2025/02/19	2026/02/18
17	High pass filter unit	Tonscend	JS0806-F	HKE-055	2025/02/19	2026/02/18
18	Wireless Communication Test Set	R&S	CMU200	HKE-026	2025/02/19	2026/02/18
19	Wireless Communication Test Set	R&S	CMW500	HKE-027	2025/02/19	2026/02/18
20	High-low temperature chamber	Guangke	HT-80L	HKE-118	2024/06/10	2025/06/09
21	Temperature and humidity meter	Boyang	HTC-1	HKE-075	2024/06/10	2025/06/09
22	RF Test Software	Tonscend	JS1120-3 Version 3.5.39	HKE-183	/	/
23	RSE Test Software	Tonscend	JS36-RSE 5.0.0	HKE-184	/	/

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



4 Test Conditions and Results


4.1 Output Power

TEST APPLICABLE

During the process of testing, the EUT was controlled via R&S Digital Radio Communication tester (CMW500) to ensure max power transmission and proper modulation. This result contains output power and EIRP measurements for the EUT. In all cases, output power is within the specified limits.

4.1.1 Conducted Output Power

TEST CONFIGURATION

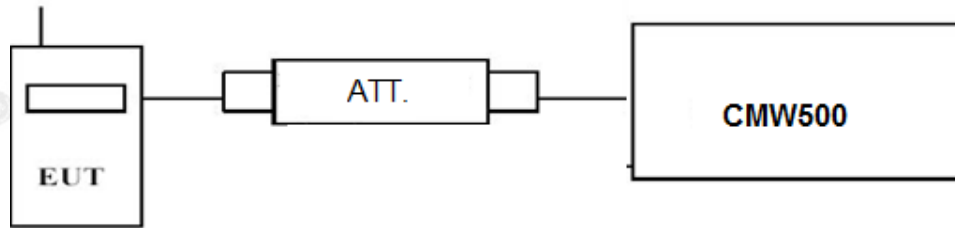

TEST PROCEDURE

Conducted Power Measurement:

- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a CMW500 by an Att.
- EUT Communicate with CMW500 then selects a channel for testing.
- Add a correction factor to the display CMW500, and then test.

GSM850				
Function	Power step	Nominal output power (dBm)	Power & Multislot class	Operation class
GSM	5	33dBm(2W)	4	/
GPRS	3	33dBm(2W)	12	B
EDGE	8	27dBm(0.5W)	12	B

PCS1900				
Function	Power step	Nominal output power (dBm)	Power & Multislot class	Operation class
GSM	0	30dBm(1W)	1	/
GPRS	3	30dBm(1W)	12	B
EDGE	2	27dBm(0.5W)	12	B

**TEST RESULTS**

GSM 850		Burst Average Conducted power (dBm)		
		Channel/Frequency(MHz)		
		128/824.2	190/836.6	251/848.8
GSM		33.88	33.63	33.49
GPRS (GMSK)	33.78	33.59	33.43	33.23
	32.95	32.83	32.76	32.76
	31.12	30.74	30.53	30.53
	30.19	29.76	29.45	29.45
PCS 1900		Burst Average Conducted power (dBm)		
		Channel/Frequency(MHz)		
		512/1850.2	661/1880.0	810/1909.8
GSM		30.19	29.85	29.56
GPRS (GMSK)	30.99	30.12	29.83	29.55
	29.54	29.29	28.90	28.55
	27.65	27.10	26.72	26.30
	27.03	26.12	25.76	25.31


4.1.2 Radiated Output Power

TEST DESCRIPTION

This is the test for the maximum radiated power from the EUT.

Rule Part 24.232(c) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(e) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage." Rule Part 22.913(a) specifies "The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."

TEST CONFIGURATION

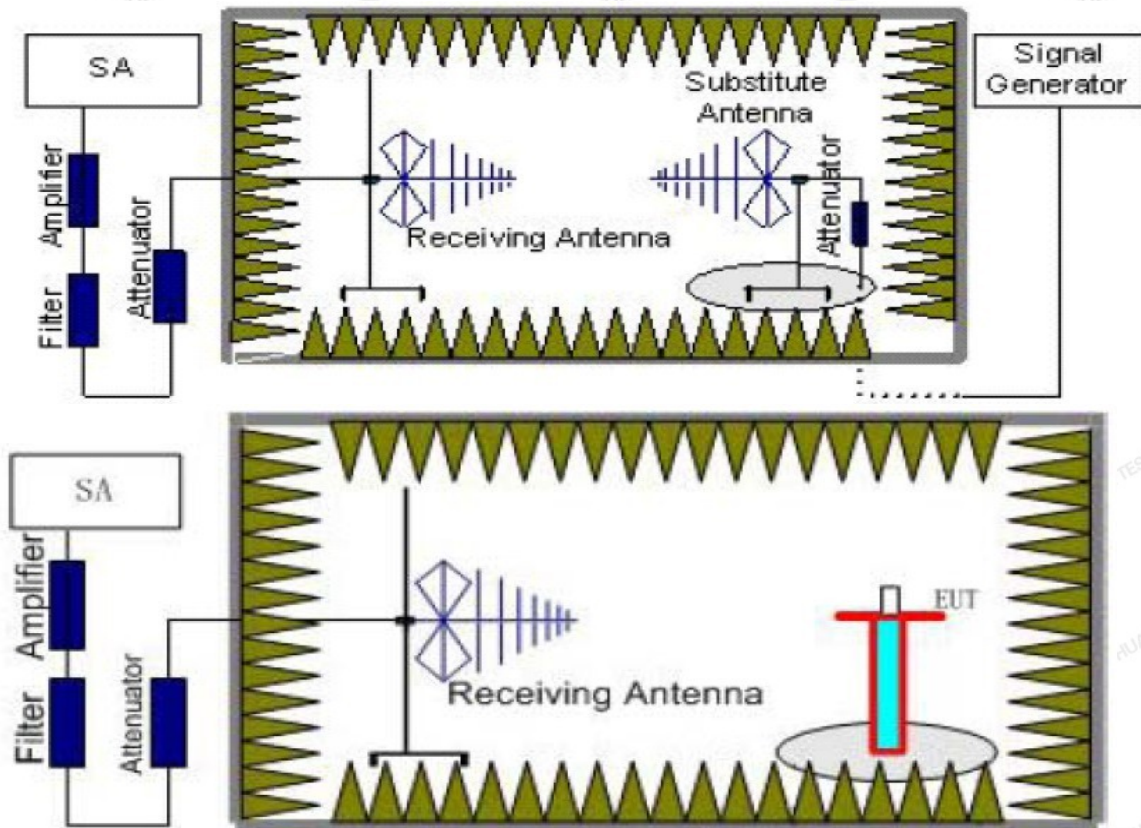

TEST PROCEDURE

1. EUT was placed on a 0.80 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 0.80m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, And the maximum value of the receiver should be recorded as (P_r).



4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (P_{cl}), the Substitution Antenna Gain (G_a) and the Amplifier Gain (P_{Ag}) should be recorded after test.

The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{Mea} - P_{Ag} - P_{cl} + G_a$$

We used SMF100A microwave signal generator which signal level can up to 33dBm, so we not used power Amplifier for substitution test; The measurement results are amend as described below:

$$\text{Power(EIRP)} = P_{Mea} - P_{cl} + G_a$$

6. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
7. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$.

TEST LIMIT

Note: We test the H direction and V direction, V direction is worse.

According to 22.913(a) and 24.232(c), the ERP should be not exceed following table limits:

GSM850(GPRS850,EDGE850)		
Function	Power Step	Burst Peak ERP (dBm)
GSM	5	$\leq 38.45\text{dBm}$ (7W)
GPRS	3	$\leq 38.45\text{dBm}$ (7W)
EDGE	8	$\leq 38.45\text{dBm}$ (7W)

PCS1900(GPRS1900,EDGE1900)		
Function	Power Step	Burst Peak EIRP (dBm)
GSM	0	$\leq 33\text{dBm}$ (2W)
GPRS	3	$\leq 33\text{dBm}$ (2W)
EDGE	5	$\leq 33\text{dBm}$ (2W)

TEST RESULTS

Remark:

1. We were tested all Configuration refer 3GPP TS151 010.
2. $EIRP = P_{Mea}(\text{dBm}) - P_{cl}(\text{dB}) + P_{Ag}(\text{dB}) + G_a(\text{dBi})$
3. $ERP = EIRP - 2.15\text{dBi}$ as EIRP by subtracting the gain of the dipole.

Note: 1. We tested Horizontal and Vertical, and Recorded the worst data at the Vertical.



GSM 850

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	Correction (dB)	P _{Ag} (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
824.20	-14.87	2.42	8.45	2.15	36.82	25.83	38.45	12.62	V
836.60	-13.89	2.46	8.45	2.15	36.82	26.77	38.45	11.68	V
848.80	-15.54	2.53	8.36	2.15	36.82	24.96	38.45	13.49	V

PCS 1900

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Ag} (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1850.20	-13.45	3.41	10.24	33.60	26.98	33.01	6.03	V
1880.00	-14.86	3.49	10.24	33.60	25.49	33.01	7.52	V
1909.80	-14.06	3.55	10.23	33.60	26.22	33.01	6.79	V

GPRS 850

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	Correction (dB)	P _{Ag} (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
824.20	-14.06	2.42	8.45	2.15	36.82	26.64	38.45	11.81	V
836.60	-15.69	2.46	8.45	2.15	36.82	24.97	38.45	13.48	V
848.80	-12.36	2.53	8.36	2.15	36.82	28.14	38.45	10.31	V

GPRS 1900


Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Ag} (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1850.20	-13.07	3.41	10.24	33.60	27.36	33.01	5.65	V
1880.00	-15.22	3.49	10.24	33.60	25.13	33.01	7.88	V
1909.80	-14.73	3.55	10.23	33.60	25.55	33.01	7.46	V

4.2 Radiated Spurious Emission

TEST APPLICABLE

According to the TIA/EIA 603D:2010 test method, The Receiver or Spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz. The resolution bandwidth is set as outlined in Part 24.238 and Part 22.917. The spectrum is scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of PCS1900 and GSM850.

TEST CONFIGURATION

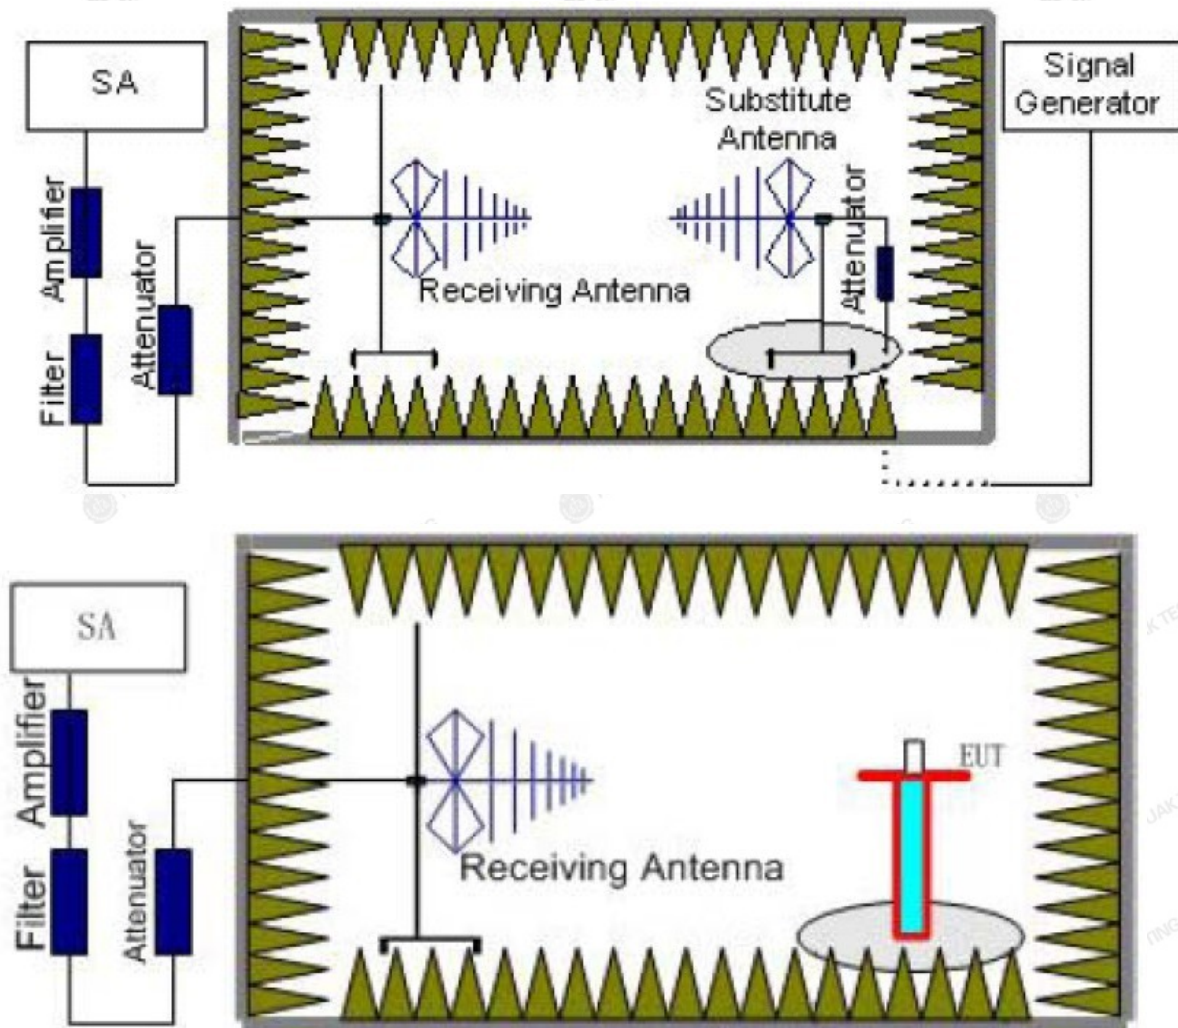

TEST PROCEDURE

1. EUT was placed on a 0.80 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 0.80m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



- The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, And the maximum value of the receiver should be recorded as (P_r).
- The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
- A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (P_{cl}), the Substitution Antenna Gain (G_a) and the Amplifier Gain (P_{Ag}) should be recorded after test.
The measurement results are obtained as described below:
 $Power(EIRP) = P_{Mea} - P_{Ag} - P_{cl} + G_a$
- This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
- ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$.
- In order to make sure test results more clearly, we set frequency range and sweep time for difference frequency range as follows table:

Working Frequency	Subrange (GHz)	RBW	VBW	Sweep time (s)
GSM 850	0.00009~0.15	1KHz	3KHz	30
	0.00015~0.03	10KHz	30KHz	10
	0.03~1	100KHz	300KHz	10
	1~2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~10	1 MHz	3 MHz	3
PCS 1900	0.00009~0.15	1KHz	3KHz	30
	0.00015~0.03	10KHz	30KHz	10
	0.03~1	100KHz	300KHz	10
	1~2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~11	1 MHz	3 MHz	3
	11~14	1 MHz	3 MHz	3
	14~18	1 MHz	3 MHz	3
	18~20	1 MHz	3 MHz	2

TEST LIMITS

According to 24.238 and 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

Frequency	Channel	Frequency Range	Verdict
GSM 850	Low	9KHz-10GHz	PASS
	Middle	9KHz -10GHz	PASS
	High	9KHz -10GHz	PASS
PCS 1900	Low	9KHz -20GHz	PASS
	Middle	9KHz -20GHz	PASS
	High	9KHz -20GHz	PASS

**TEST RESULTS**

Remark:

1. We were tested all refer 3GPP TS151 010.
2. $EIRP = P_{Mea}(dBm) - P_{cl}(dB) + G_a(dBi)$
3. We were not recorded other points as values lower than limits.
4. $Margin = Limit - EIRP$

Test Model No.: S25 mini

GSM 850 Low Channel

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	Diatance	Ga Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1648.4	-43.1	3.00	3.00	9.58	-36.52	-13.00	23.52	H
2472.6	-42.75	3.03	3.00	10.72	-35.06	-13.00	22.06	H
1648.4	-42.9	3.00	3.00	9.68	-36.22	-13.00	23.22	V
2472.6	-41.48	3.03	3.00	10.72	-33.79	-13.00	20.79	V

GSM 850 Middle Channel

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1673.2	-42.4	3.00	3.00	9.58	-35.82	-13.00	22.82	H
2509.8	-42.63	3.03	3.00	10.72	-34.94	-13.00	21.94	H
1673.2	-43.16	3.00	3.00	9.68	-36.48	-13.00	23.48	V
2509.8	-41.51	3.03	3.00	10.72	-33.82	-13.00	20.82	V

GSM 850 High Channel

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1697.6	-42.12	3.00	3.00	9.58	-35.54	-13.00	22.54	H
2546.4	-42.47	3.03	3.00	10.72	-34.78	-13.00	21.78	H
1697.6	-42.95	3.00	3.00	9.68	-36.27	-13.00	23.27	V
2546.4	-43.26	3.03	3.00	10.72	-35.57	-13.00	22.57	V

PCS1900 Low Channel

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	Diatance	Ga Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3700.4	-41.12	4.39	3.00	12.34	-33.17	-13.00	20.17	H
5550.6	-48.01	5.31	3.00	13.52	-39.8	-13.00	26.8	H
3700.4	-44.67	4.39	3.00	12.34	-36.72	-13.00	23.72	V
5550.6	-50.73	5.31	3.00	13.52	-42.52	-13.00	29.52	V

PCS1900 Middle Channel

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3760.0	-41.4	4.41	3.00	12.34	-33.47	-13.00	20.47	H
5640.0	-48.23	5.38	3.00	13.58	-40.03	-13.00	27.03	H
3760.0	-45	4.41	3.00	12.34	-37.07	-13.00	24.07	V
5640.0	-51.52	5.38	3.00	13.58	-43.32	-13.00	30.32	V

*PCS 1900_High Channel*

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3819.6	-40.91	4.45	3.00	12.45	-32.91	-13.00	19.91	H
5729.4	-48.33	5.47	3.00	13.66	-40.14	-13.00	27.14	H
3819.6	-45.07	4.45	3.00	12.45	-37.07	-13.00	24.07	V
5729.4	-51.48	5.48	3.00	13.66	-43.3	-13.00	30.3	V

GPRS 850_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	Ga Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1648.4	-42.51	3.00	3.00	9.58	-35.93	-13.00	22.93	H
2472.6	-43.3	3.03	3.00	10.72	-35.61	-13.00	22.61	H
1648.4	-43.05	3.00	3.00	9.68	-36.37	-13.00	23.37	V
2472.6	-40.89	3.03	3.00	10.72	-33.2	-13.00	20.2	V

GPRS 850_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1673.2	-42.34	3.00	3.00	9.58	-35.76	-13.00	22.76	H
2509.8	-43.13	3.03	3.00	10.72	-35.44	-13.00	22.44	H
1673.2	-42.87	3.00	3.00	9.68	-36.19	-13.00	23.19	V
2509.8	-41.16	3.03	3.00	10.72	-33.47	-13.00	20.47	V

GPRS 850_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1697.6	-41.86	3.00	3.00	9.58	-35.28	-13.00	22.28	H
2546.4	-43.23	3.03	3.00	10.72	-35.54	-13.00	22.54	H
1697.6	-42.59	3.00	3.00	9.68	-35.91	-13.00	22.91	V
2546.4	-43.4	3.03	3.00	10.72	-35.71	-13.00	22.71	V

GPRS 1900_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	Ga Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3700.4	-41.17	4.39	3.00	12.34	-33.22	-13.00	20.22	H
5550.6	-48.28	5.31	3.00	13.52	-40.07	-13.00	27.07	H
3700.4	-44.58	4.39	3.00	12.34	-36.63	-13.00	23.63	V
5550.6	-51.2	5.31	3.00	13.52	-42.99	-13.00	29.99	V

GPRS 1900_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3760.0	-41.06	4.41	3.00	12.34	-33.13	-13.00	20.13	H
5640.0	-48.61	5.38	3.00	13.58	-40.41	-13.00	27.41	H
3760.0	-44.64	4.41	3.00	12.34	-36.71	-13.00	23.71	V
5640.0	-50.84	5.38	3.00	13.58	-42.64	-13.00	29.64	V

*GPRS 1900 High Channel*

Frequency (MHz)	P _{Mea} (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3819.6	-40.88	4.45	3.00	12.45	-32.88	-13.00	19.88	H
5729.4	-48.11	5.47	3.00	13.66	-39.92	-13.00	26.92	H
3819.6	-44.66	4.45	3.00	12.45	-36.66	-13.00	23.66	V
5729.4	-50.71	5.48	3.00	13.66	-42.53	-13.00	29.53	V



Note: We tested GSM/GPRS/EGPRS mode and recorded the worst case at the GPRS mode.

Series Model No.: I16 mini

GPRS 850 Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	Ga Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1648.4	-42.61	3.00	3.00	9.58	-36.03	-13.00	23.03	H
2472.6	-43.28	3.03	3.00	10.72	-35.59	-13.00	22.59	H
1648.4	-42.7	3.00	3.00	9.68	-36.02	-13.00	23.02	V
2472.6	-41.69	3.03	3.00	10.72	-34	-13.00	21	V

GPRS 850 Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1673.2	-42.88	3.00	3.00	9.58	-36.3	-13.00	23.3	H
2509.8	-42.84	3.03	3.00	10.72	-35.15	-13.00	22.15	H
1673.2	-43.36	3.00	3.00	9.68	-36.68	-13.00	23.68	V
2509.8	-41.22	3.03	3.00	10.72	-33.53	-13.00	20.53	V

GPRS 850 High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1697.6	-41.51	3.00	3.00	9.58	-34.93	-13.00	21.93	H
2546.4	-42.62	3.03	3.00	10.72	-34.93	-13.00	21.93	H
1697.6	-42.45	3.00	3.00	9.68	-35.77	-13.00	22.77	V
2546.4	-43.36	3.03	3.00	10.72	-35.67	-13.00	22.67	V

GPRS 1900 Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	Ga Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3700.4	-40.92	4.39	3.00	12.34	-32.97	-13.00	19.97	H
5550.6	-48.36	5.31	3.00	13.52	-40.15	-13.00	27.15	H
3700.4	-44.89	4.39	3.00	12.34	-36.94	-13.00	23.94	V
5550.6	-50.9	5.31	3.00	13.52	-42.69	-13.00	29.69	V

GPRS 1900 Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3760.0	-40.58	4.41	3.00	12.34	-32.65	-13.00	19.65	H
5640.0	-48.48	5.38	3.00	13.58	-40.28	-13.00	27.28	H
3760.0	-44.69	4.41	3.00	12.34	-36.76	-13.00	23.76	V
5640.0	-50.52	5.38	3.00	13.58	-42.32	-13.00	29.32	V

*GPRS 1900 High Channel*

Frequency (MHz)	P _{Mea} (dBm)	P _{Cl} (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3819.6	-41.23	4.45	3.00	12.45	-33.23	-13.00	20.23	H
5729.4	-48.53	5.47	3.00	13.66	-40.34	-13.00	27.34	H
3819.6	-45.37	4.45	3.00	12.45	-37.37	-13.00	24.37	V
5729.4	-50.73	5.48	3.00	13.66	-42.55	-13.00	29.55	V

Series Model No.: H50 mini

GPRS 850 Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{Cl} (dB)	Diatance	Ga Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1648.4	-42.82	3.00	3.00	9.58	-36.24	-13.00	23.24	H
2472.6	-43.01	3.03	3.00	10.72	-35.32	-13.00	22.32	H
1648.4	-42.72	3.00	3.00	9.68	-36.04	-13.00	23.04	V
2472.6	-41.29	3.03	3.00	10.72	-33.6	-13.00	20.6	V

GPRS 850 Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{Cl} (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1673.2	-42.44	3.00	3.00	9.58	-35.86	-13.00	22.86	H
2509.8	-42.97	3.03	3.00	10.72	-35.28	-13.00	22.28	H
1673.2	-42.79	3.00	3.00	9.68	-36.11	-13.00	23.11	V
2509.8	-41.54	3.03	3.00	10.72	-33.85	-13.00	20.85	V

GPRS 850 High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{Cl} (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1697.6	-42.25	3.00	3.00	9.58	-35.67	-13.00	22.67	H
2546.4	-42.79	3.03	3.00	10.72	-35.1	-13.00	22.1	H
1697.6	-42.29	3.00	3.00	9.68	-35.61	-13.00	22.61	V
2546.4	-42.93	3.03	3.00	10.72	-35.24	-13.00	22.24	V

GPRS 1900 Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{Cl} (dB)	Diatance	Ga Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3700.4	-41.01	4.39	3.00	12.34	-33.06	-13.00	20.06	H
5550.6	-48.71	5.31	3.00	13.52	-40.5	-13.00	27.5	H
3700.4	-44.6	4.39	3.00	12.34	-36.65	-13.00	23.65	V
5550.6	-51.16	5.31	3.00	13.52	-42.95	-13.00	29.95	V

GPRS 1900 Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{Cl} (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3760.0	-40.88	4.41	3.00	12.34	-32.95	-13.00	19.95	H
5640.0	-47.9	5.38	3.00	13.58	-39.7	-13.00	26.7	H
3760.0	-44.49	4.41	3.00	12.34	-36.56	-13.00	23.56	V
5640.0	-51.08	5.38	3.00	13.58	-42.88	-13.00	29.88	V

*GPRS 1900 High Channel*

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3819.6	-40.94	4.45	3.00	12.45	-32.94	-13.00	19.94	H
5729.4	-48.1	5.47	3.00	13.66	-39.91	-13.00	26.91	H
3819.6	-44.77	4.45	3.00	12.45	-36.77	-13.00	23.77	V
5729.4	-51.21	5.48	3.00	13.66	-43.03	-13.00	30.03	V

Series Model No.: P70 Ultra

GPRS 850 Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	Ga Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1648.4	-42.9	3.00	3.00	9.58	-36.32	-13.00	23.32	H
2472.6	-42.7	3.03	3.00	10.72	-35.01	-13.00	22.01	H
1648.4	-42.62	3.00	3.00	9.68	-35.94	-13.00	22.94	V
2472.6	-41.52	3.03	3.00	10.72	-33.83	-13.00	20.83	V

GPRS 850 Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1673.2	-42.73	3.00	3.00	9.58	-36.15	-13.00	23.15	H
2509.8	-42.56	3.03	3.00	10.72	-34.87	-13.00	21.87	H
1673.2	-42.7	3.00	3.00	9.68	-36.02	-13.00	23.02	V
2509.8	-41.64	3.03	3.00	10.72	-33.95	-13.00	20.95	V

GPRS 850 High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1697.6	-42.11	3.00	3.00	9.58	-35.53	-13.00	22.53	H
2546.4	-42.77	3.03	3.00	10.72	-35.08	-13.00	22.08	H
1697.6	-43.07	3.00	3.00	9.68	-36.39	-13.00	23.39	V
2546.4	-42.97	3.03	3.00	10.72	-35.28	-13.00	22.28	V

GPRS 1900 Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	Ga Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3700.4	-40.72	4.39	3.00	12.34	-32.77	-13.00	19.77	H
5550.6	-48.42	5.31	3.00	13.52	-40.21	-13.00	27.21	H
3700.4	-45	4.39	3.00	12.34	-37.05	-13.00	24.05	V
5550.6	-51.43	5.31	3.00	13.52	-43.22	-13.00	30.22	V

GPRS 1900 Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3760.0	-41.45	4.41	3.00	12.34	-33.52	-13.00	20.52	H
5640.0	-48.52	5.38	3.00	13.58	-40.32	-13.00	27.32	H
3760.0	-44.73	4.41	3.00	12.34	-36.8	-13.00	23.8	V
5640.0	-50.69	5.38	3.00	13.58	-42.49	-13.00	29.49	V

*GPRS 1900 High Channel*

Frequency (MHz)	P _{Mea} (dBm)	P _{Cl} (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3819.6	-40.9	4.45	3.00	12.45	-32.9	-13.00	19.9	H
5729.4	-48.02	5.47	3.00	13.66	-39.83	-13.00	26.83	H
3819.6	-44.56	4.45	3.00	12.45	-36.56	-13.00	23.56	V
5729.4	-51.02	5.48	3.00	13.66	-42.84	-13.00	29.84	V

Series Model No.: Reno 12 mini

GPRS 850 Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{Cl} (dB)	Diatance	Ga Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1648.4	-43.05	3.00	3.00	9.58	-36.47	-13.00	23.47	H
2472.6	-43.48	3.03	3.00	10.72	-35.79	-13.00	22.79	H
1648.4	-42.64	3.00	3.00	9.68	-35.96	-13.00	22.96	V
2472.6	-40.95	3.03	3.00	10.72	-33.26	-13.00	20.26	V

GPRS 850 Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{Cl} (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1673.2	-42.87	3.00	3.00	9.58	-36.29	-13.00	23.29	H
2509.8	-42.94	3.03	3.00	10.72	-35.25	-13.00	22.25	H
1673.2	-43.09	3.00	3.00	9.68	-36.41	-13.00	23.41	V
2509.8	-41.96	3.03	3.00	10.72	-34.27	-13.00	21.27	V

GPRS 850 High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{Cl} (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1697.6	-42.16	3.00	3.00	9.58	-35.58	-13.00	22.58	H
2546.4	-42.49	3.03	3.00	10.72	-34.8	-13.00	21.8	H
1697.6	-42.83	3.00	3.00	9.68	-36.15	-13.00	23.15	V
2546.4	-42.62	3.03	3.00	10.72	-34.93	-13.00	21.93	V

GPRS 1900 Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{Cl} (dB)	Diatance	Ga Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3700.4	-40.89	4.39	3.00	12.34	-32.94	-13.00	19.94	H
5550.6	-48.67	5.31	3.00	13.52	-40.46	-13.00	27.46	H
3700.4	-44.79	4.39	3.00	12.34	-36.84	-13.00	23.84	V
5550.6	-50.62	5.31	3.00	13.52	-42.41	-13.00	29.41	V

GPRS 1900 Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{Cl} (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3760.0	-41.12	4.41	3.00	12.34	-33.19	-13.00	20.19	H
5640.0	-47.8	5.38	3.00	13.58	-39.6	-13.00	26.6	H
3760.0	-45.24	4.41	3.00	12.34	-37.31	-13.00	24.31	V
5640.0	-50.61	5.38	3.00	13.58	-42.41	-13.00	29.41	V

*GPRS 1900 High Channel*

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3819.6	-41.48	4.45	3.00	12.45	-33.48	-13.00	20.48	H
5729.4	-47.84	5.47	3.00	13.66	-39.65	-13.00	26.65	H
3819.6	-44.8	4.45	3.00	12.45	-36.8	-13.00	23.8	V
5729.4	-51.08	5.48	3.00	13.66	-42.9	-13.00	29.9	V

Series Model No.: T3 Ultra

GPRS 850 Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	Ga Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1648.4	-42.67	3.00	3.00	9.58	-36.09	-13.00	23.09	H
2472.6	-43.67	3.03	3.00	10.72	-35.98	-13.00	22.98	H
1648.4	-42.53	3.00	3.00	9.68	-35.85	-13.00	22.85	V
2472.6	-41.44	3.03	3.00	10.72	-33.75	-13.00	20.75	V

GPRS 850 Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1673.2	-42.33	3.00	3.00	9.58	-35.75	-13.00	22.75	H
2509.8	-42.79	3.03	3.00	10.72	-35.1	-13.00	22.1	H
1673.2	-43.12	3.00	3.00	9.68	-36.44	-13.00	23.44	V
2509.8	-41.66	3.03	3.00	10.72	-33.97	-13.00	20.97	V

GPRS 850 High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1697.6	-42.05	3.00	3.00	9.58	-35.47	-13.00	22.47	H
2546.4	-42.82	3.03	3.00	10.72	-35.13	-13.00	22.13	H
1697.6	-43.17	3.00	3.00	9.68	-36.49	-13.00	23.49	V
2546.4	-43.04	3.03	3.00	10.72	-35.35	-13.00	22.35	V

GPRS 1900 Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	Ga Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3700.4	-40.72	4.39	3.00	12.34	-32.77	-13.00	19.77	H
5550.6	-48.68	5.31	3.00	13.52	-40.47	-13.00	27.47	H
3700.4	-45.36	4.39	3.00	12.34	-37.41	-13.00	24.41	V
5550.6	-50.58	5.31	3.00	13.52	-42.37	-13.00	29.37	V

GPRS 1900 Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3760.0	-41.45	4.41	3.00	12.34	-33.52	-13.00	20.52	H
5640.0	-48.38	5.38	3.00	13.58	-40.18	-13.00	27.18	H
3760.0	-44.67	4.41	3.00	12.34	-36.74	-13.00	23.74	V
5640.0	-50.93	5.38	3.00	13.58	-42.73	-13.00	29.73	V

*GPRS 1900 High Channel*

Frequency (MHz)	P _{Mea} (dBm)	P _{Cl} (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3819.6	-40.87	4.45	3.00	12.45	-32.87	-13.00	19.87	H
5729.4	-47.82	5.47	3.00	13.66	-39.63	-13.00	26.63	H
3819.6	-45.16	4.45	3.00	12.45	-37.16	-13.00	24.16	V
5729.4	-51.35	5.48	3.00	13.66	-43.17	-13.00	30.17	V

Series Model No.: POP9 mini

GPRS 850 Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{Cl} (dB)	Diatance	Ga Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1648.4	-42.09	3.00	3.00	9.58	-35.51	-13.00	22.51	H
2472.6	-43.36	3.03	3.00	10.72	-35.67	-13.00	22.67	H
1648.4	-43.15	3.00	3.00	9.68	-36.47	-13.00	23.47	V
2472.6	-41.88	3.03	3.00	10.72	-34.19	-13.00	21.19	V

GPRS 850 Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{Cl} (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1673.2	-42.88	3.00	3.00	9.58	-36.3	-13.00	23.3	H
2509.8	-43.3	3.03	3.00	10.72	-35.61	-13.00	22.61	H
1673.2	-43.2	3.00	3.00	9.68	-36.52	-13.00	23.52	V
2509.8	-41.2	3.03	3.00	10.72	-33.51	-13.00	20.51	V

GPRS 850 High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{Cl} (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1697.6	-42.78	3.00	3.00	9.58	-36.2	-13.00	23.2	H
2546.4	-42.68	3.03	3.00	10.72	-34.99	-13.00	21.99	H
1697.6	-43	3.00	3.00	9.68	-36.32	-13.00	23.32	V
2546.4	-41.98	3.03	3.00	10.72	-34.29	-13.00	21.29	V

GPRS 1900 Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{Cl} (dB)	Diatance	Ga Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3700.4	-42.62	3.00	3.00	9.58	-36.04	-13.00	23.04	H
5550.6	-43.73	3.03	3.00	10.72	-36.04	-13.00	23.04	H
3700.4	-43.05	3.00	3.00	9.68	-36.37	-13.00	23.37	V
5550.6	-42.1	3.03	3.00	10.72	-34.41	-13.00	21.41	V

GPRS 1900 Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{Cl} (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3760.0	-43.26	3.00	3.00	9.58	-36.68	-13.00	23.68	H
5640.0	-42.93	3.03	3.00	10.72	-35.24	-13.00	22.24	H
3760.0	-43.28	3.00	3.00	9.68	-36.6	-13.00	23.6	V
5640.0	-41.38	3.03	3.00	10.72	-33.69	-13.00	20.69	V

**GPRS 1900 High Channel**

Frequency (MHz)	P _{Mea} (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3819.6	-43.07	3.00	3.00	9.58	-36.49	-13.00	23.49	H
5729.4	-42.95	3.03	3.00	10.72	-35.26	-13.00	22.26	H
3819.6	-43.06	3.00	3.00	9.68	-36.38	-13.00	23.38	V
5729.4	-42.03	3.03	3.00	10.72	-34.34	-13.00	21.34	V




4.3 Occupied Bandwidth and Emission Bandwidth

TEST APPLICABLE

Similar to conducted emissions; occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of PCS1900 band and GSM850 band. The table below lists the measured 99% Bandwidth and -26dBc Bandwidth.

TEST CONFIGURATION

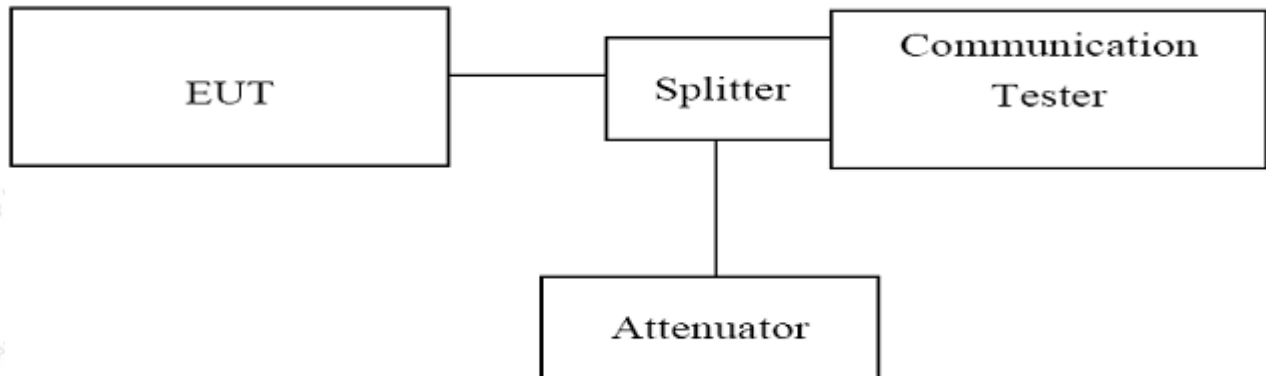

TEST PROCEDURE

1. The EUT was set up for the max output power with pseudo random data modulation;
2. The Occupied bandwidth and Emission Bandwidth were measured with Agilent Spectrum Analyzer N9020A (peak);
3. Set RBW=5.1KHz, VBW=15KHz, Span=1MHz, SWT=100ms;
4. Set SPA Max hold and View, Set 99% Occupied Bandwidth/ Set -26dBc Occupied Bandwidth;
5. These measurements were done at 3 frequencies, 1850.20 MHz, 1880.00 MHz and 1909.80 MHz for PCS1900 band; 824.20MHz, 836.60 MHz and 848.80 MHz for GSM850 band. (Low, middle and high of operational frequency range).

TEST RESULTS


GSM 850				
Channel Number	Frequency (MHz)	Occupied Bandwidth (99% BW) (kHz)	Emission Bandwidth (26 dBc BW) (kHz)	Verdict
128	824.20	244.92	314.7	PASS
190	836.60	243.65	312.2	PASS
251	848.80	247.71	321.5	PASS

PCS 1900				
Channel Number	Frequency (MHz)	Occupied Bandwidth (99% BW) (kHz)	Emission Bandwidth (26 dBc BW) (kHz)	Verdict
512	1850.20	247.65	315.5	PASS
661	1880.00	248.8	311.6	PASS
810	1909.80	245.33	310.6	PASS



GPRS 850				
Channel Number	Frequency (MHz)	Occupied Bandwidth (99% BW) (kHz)	Emission Bandwidth (26 dBc BW) (kHz)	Verdict
128	824.20	243.05	315.2	PASS
190	836.60	243.66	313.5	PASS
251	848.80	246.56	319	PASS


GPRS 1900				
Channel Number	Frequency (MHz)	Occupied Bandwidth (99% BW) (kHz)	Emission Bandwidth (26 dBc BW) (kHz)	Verdict
512	1850.20	244.68	314.1	PASS
661	1880.00	248.37	314.9	PASS
810	1909.80	244.18	310.6	PASS

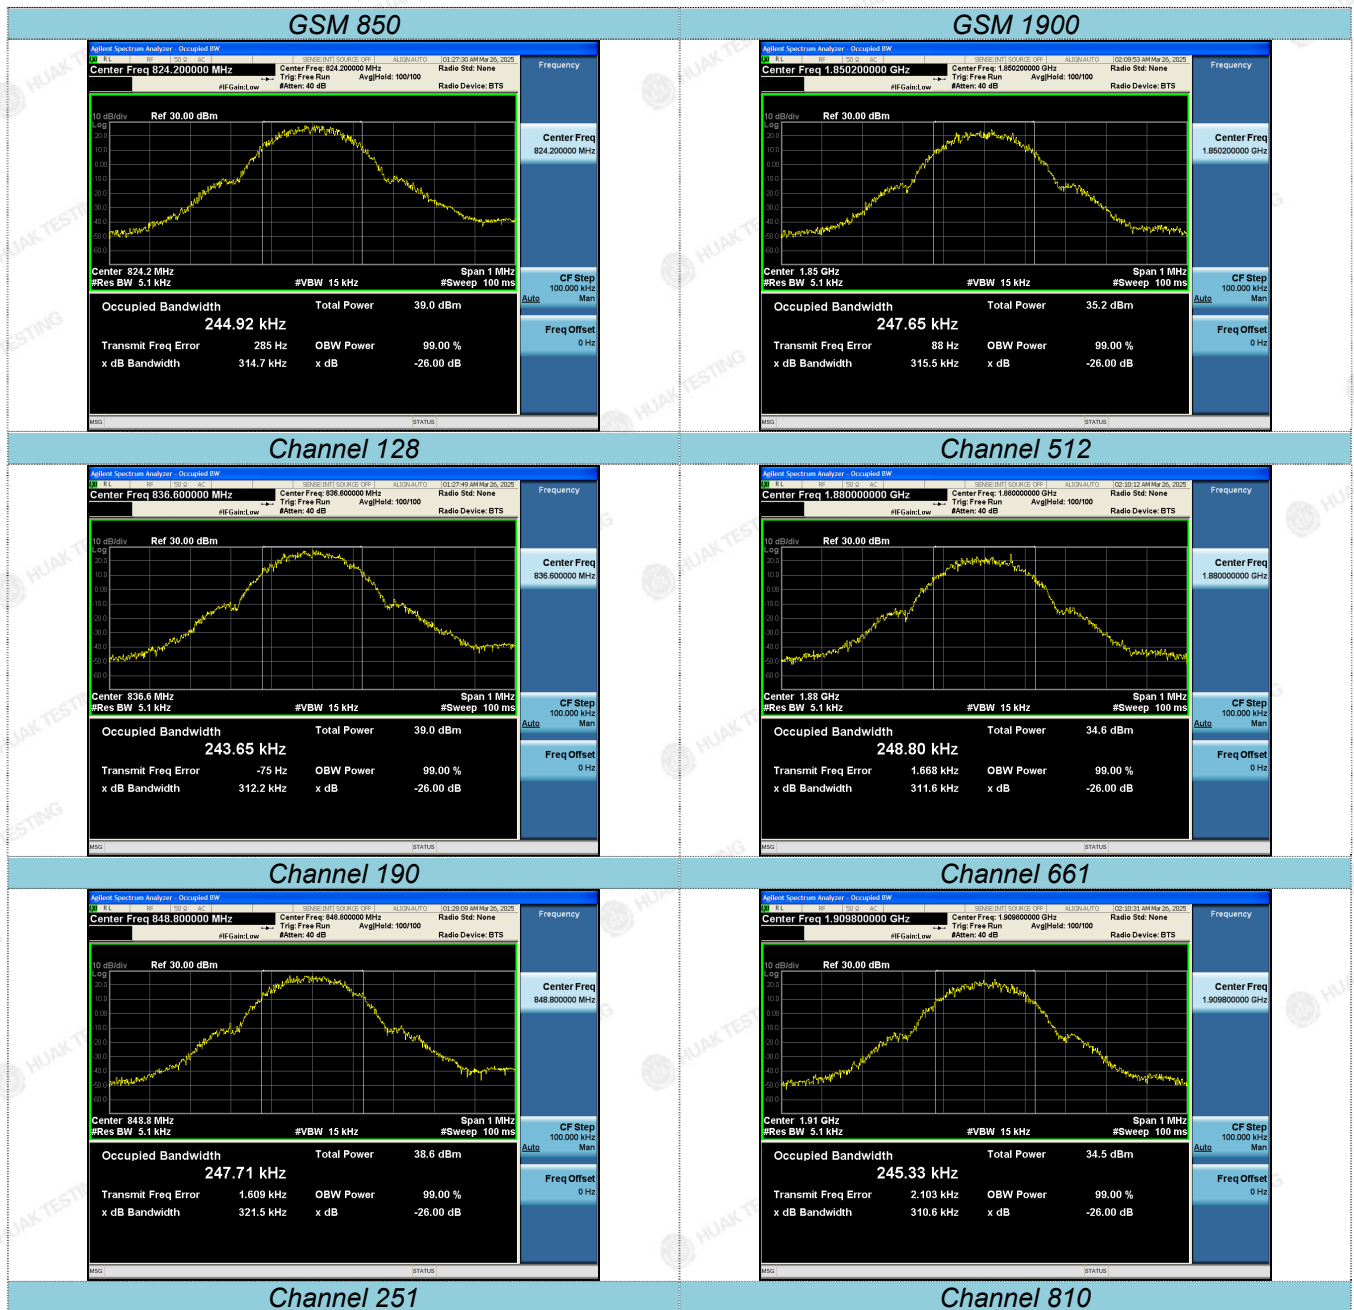

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

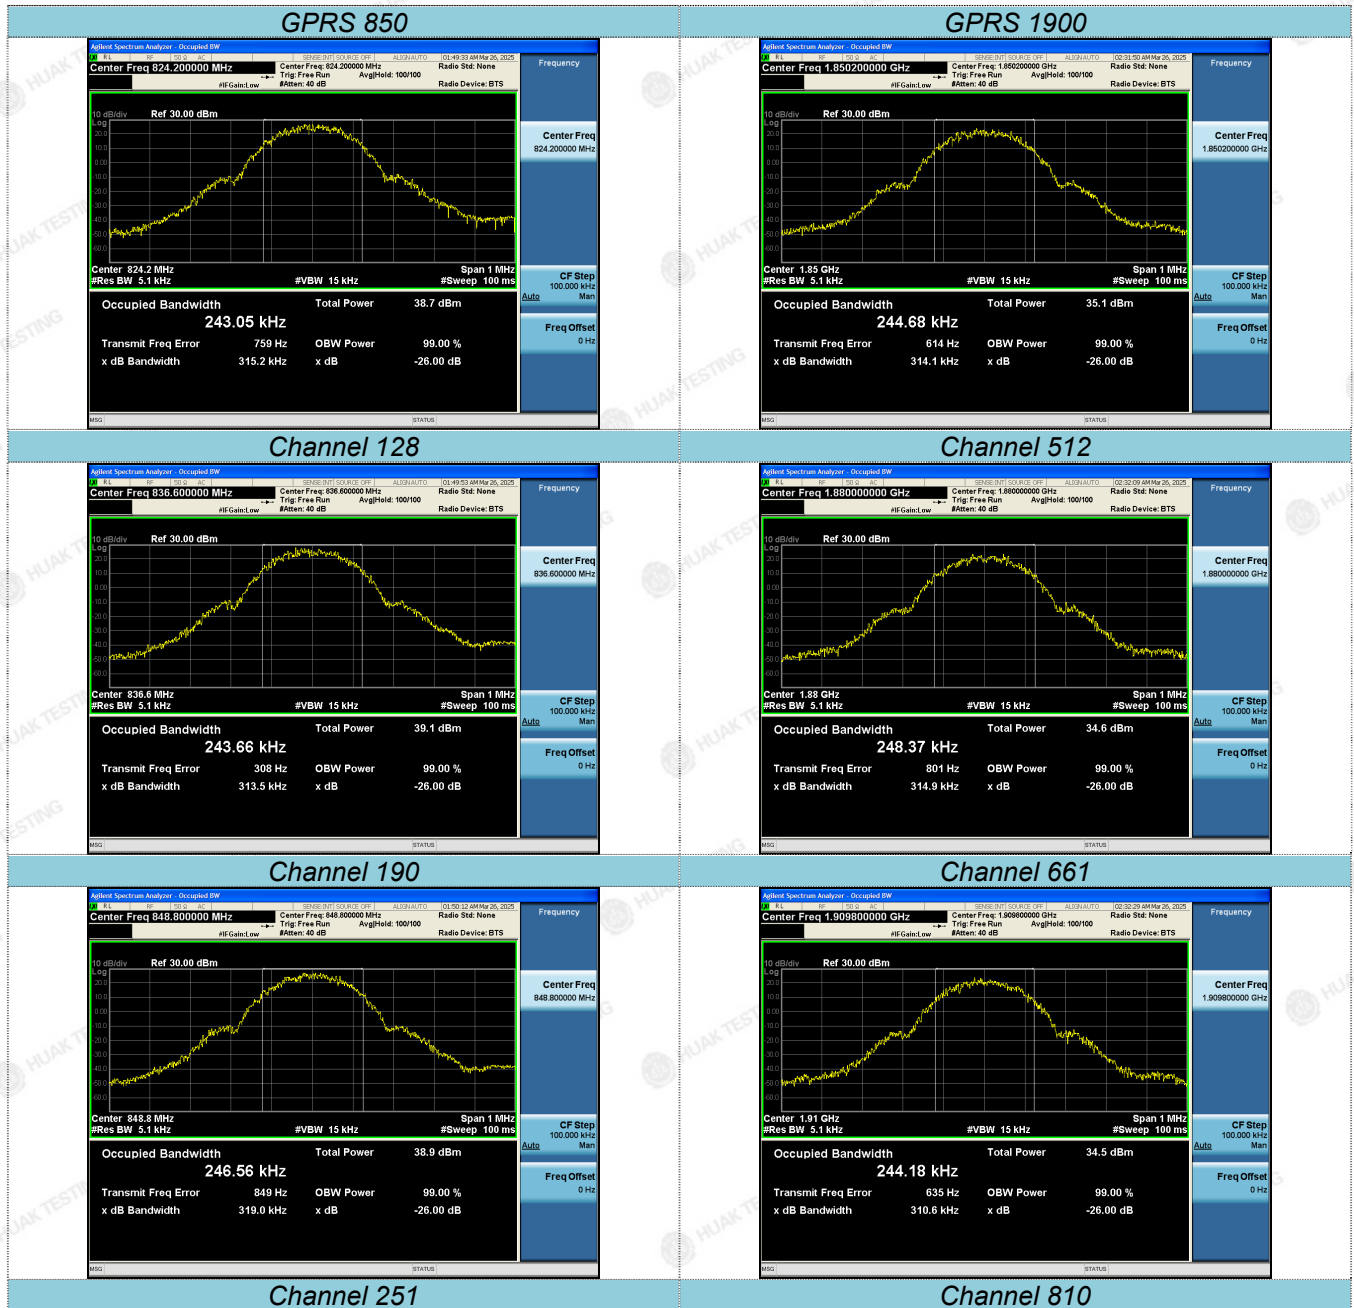

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China




4.4 Band Edge Compliance

TEST APPLICABLE

During the process of testing, the EUT was controlled via Agilent Digital Radio Communication tester (CMW500) to ensure max power transmission and proper modulation.

TEST CONFIGURATION

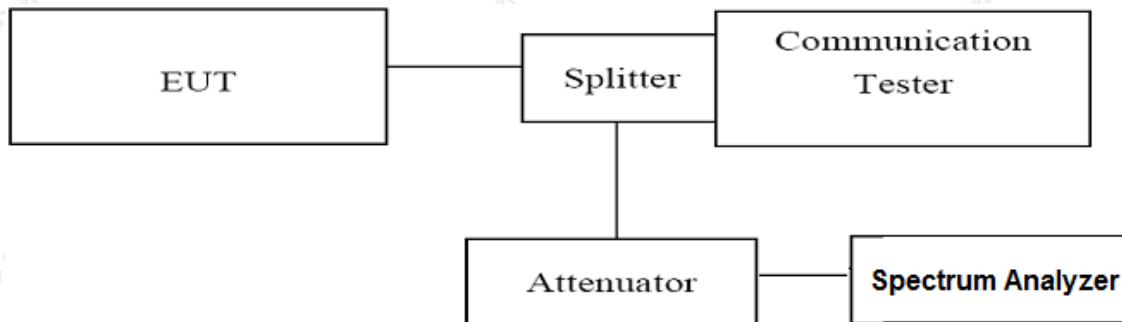

TEST PROCEDURE

1. The EUT was set up for the max output power with pseudo random data modulation;
2. The power was measured with Agilent Spectrum Analyzer N9020A;
3. Set RBW=5.1KHz, VBW=15KHz, Span=2MHz, SWT=100ms, Detector: RMS;
4. These measurements were done at 3 frequencies, 1850.20 MHz, 1880.00 MHz and 1909.80 MHz for PCS1900 band; 824.20 MHz, 836.60 MHz and 848.80 MHz for GSM850 band. (bottom, middle and top of operational frequency range).

TEST RESULTS


GSM 850					
Channel Number	Frequency (MHz)	Measurement Results		Limit (dBm)	Verdict
		Frequency (MHz)	Values (dBm)		
128	824.20	823.98	-24.91	-13.00	PASS
251	848.80	849.03	-24.42	-13.00	PASS


PCS 1900					
Channel Number	Frequency (MHz)	Measurement Results		Limit (dBm)	Verdict
		Frequency (MHz)	Values (dBm)		
512	1850.20	1849.98	-29.19	-13.00	PASS
810	1909.80	1910.02	-27.08	-13.00	PASS

GPRS 850					
Channel Number	Frequency (MHz)	Measurement Results		Limit (dBm)	Verdict
		Frequency (MHz)	Values (dBm)		
128	824.20	823.98	-24.60	-13.00	PASS
251	848.80	849.02	-23.07	-13.00	PASS

GPRS 1900					
Channel Number	Frequency (MHz)	Measurement Results		Limit (dBm)	Verdict
		Frequency (MHz)	Values (dBm)		
512	1850.20	1849.98	-28.30	-13.00	PASS
810	1909.80	1910.01	-29.98	-13.00	PASS

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

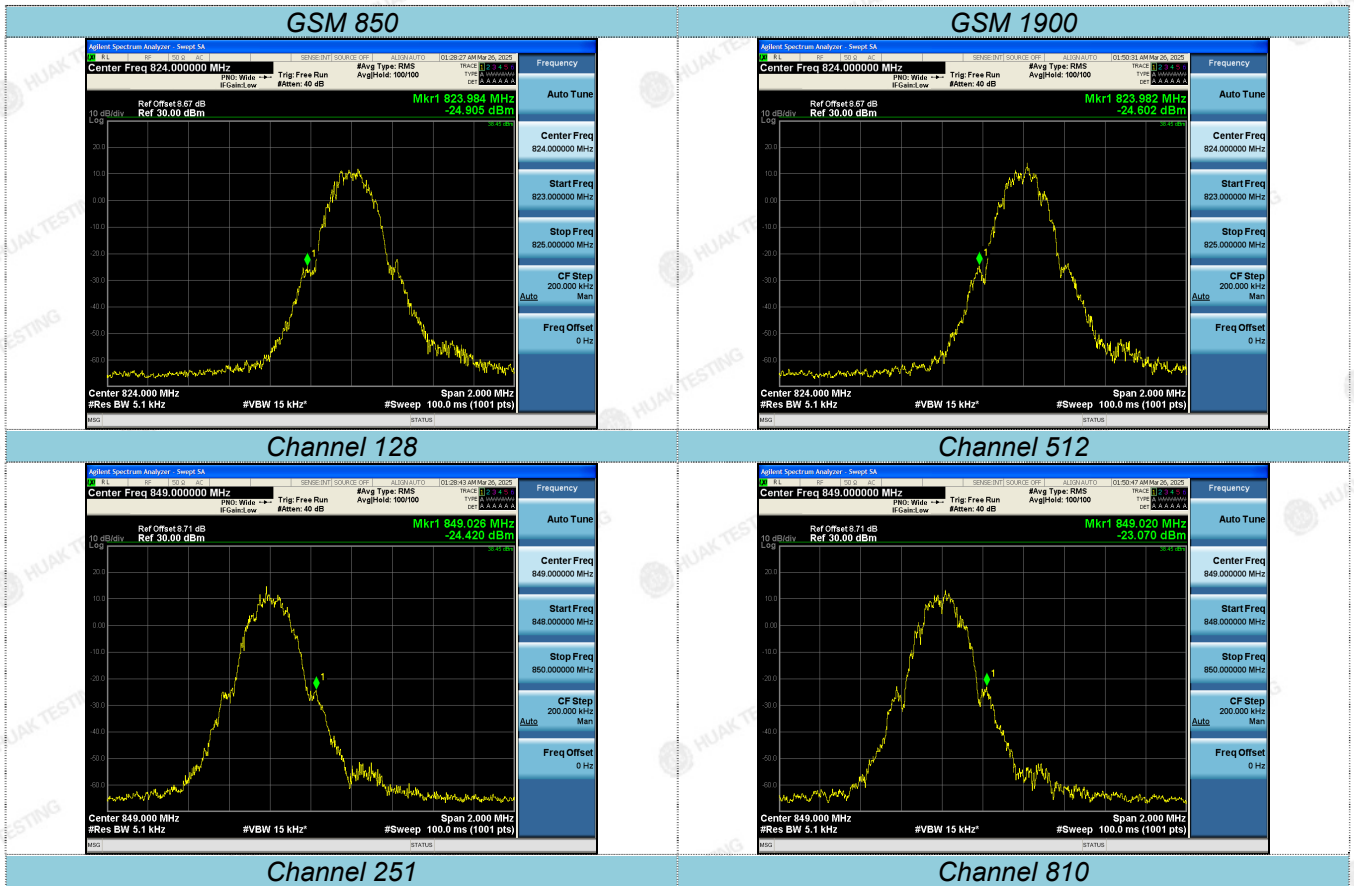

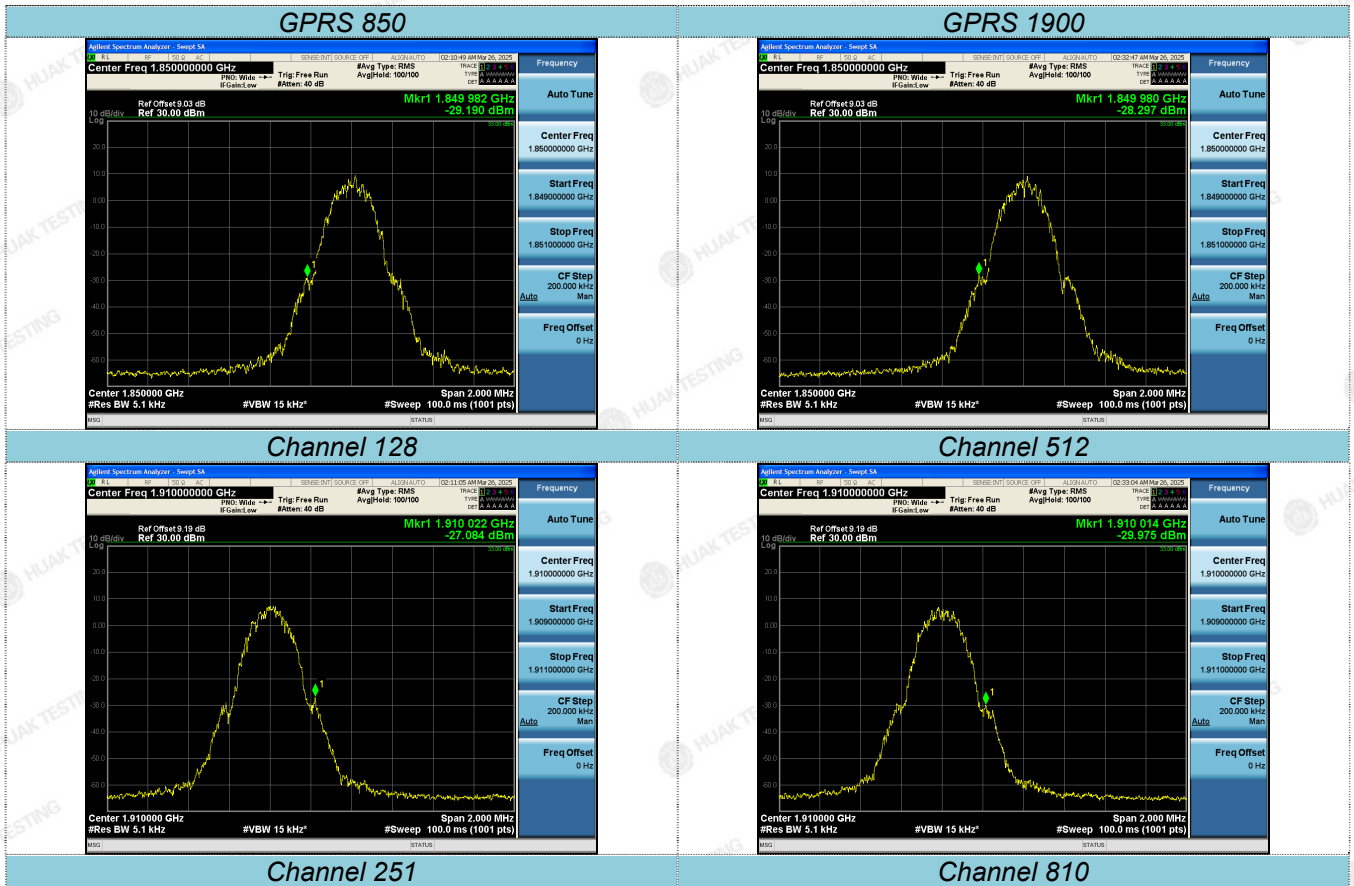




4.5 Spurious Emission on Antenna Port

TEST APPLICABLE

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of PCS1900 band, this equates to a frequency range of 9 KHz to 19.1 GHz, data taken from 9 KHz to 25 GHz. For GSM850, data taken from 9 KHz to 9 GHz.
2. The sweep time is set automatically by instrument itself. That should be the optimal sweep time for the span and the RBW. If the sweep time is too short, that is sweep is too fast, the sweep result is not accurate; if the sweep time is too long, that is sweep is too low, some frequency components may be lost. The instrument will give an optimal sweep time according the selected span and RBW.
3. The procedure to get the conducted spurious emission is as follows:
The trace mode is set to MaxHold to get the highest signal at each frequency;
Wait 25 seconds;
Get the result.
4. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

TEST CONFIGURATION

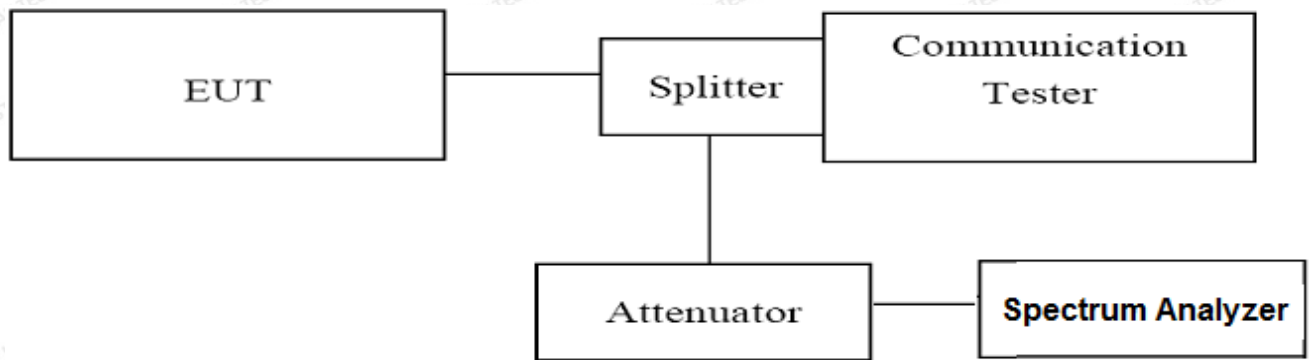

TEST PROCEDURE

1. The EUT was set up for the max output power with pseudo random data modulation;
2. The power was measured with Agilent Spectrum Analyzer N9020A (peak);
3. These measurements were done at 3 frequencies, 1850.20 MHz, 1880.00 MHz and 1909.80 MHz for PCS1900 band; 824.20 MHz, 836.60 MHz and 848.80 MHz for GSM850 band. (Low, middle and high of operational frequency range).

TEST LIMIT

Part 24.238 and Part 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

TEST RESULTS

Note: We tested GSM/GPRS/EGPRS mode and recorded the worst case at the GPRS mode.



4.5.1 For GPRS 850 Test Results

A. Test Verdict

Test Mode/ Channel	Frequency (MHz)	Frequency Range	Limit (dBm)	Verdict
GPRS 850 /128	824.20	150KHz-30MHz	-13.00	PASS
		30MHz-1GHz	-13.00	PASS
		1GHz-3GHz	-13.00	PASS
		3GHz-10GHz	-13.00	PASS
GPRS 850 /190	836.60	150KHz-30MHz	-13.00	PASS
		30MHz-1GHz	-13.00	PASS
		1GHz-3GHz	-13.00	PASS
		3GHz-10GHz	-13.00	PASS
GPRS 850 /251	848.80	150KHz-30MHz	-13.00	PASS
		30MHz-1GHz	-13.00	PASS
		1GHz-3GHz	-13.00	PASS
		3GHz-10GHz	-13.00	PASS

Note:

1. In general, the worse case attenuation requirement shown above was applied.
2. “---” means that the emission level is too low to be measured or at least 20 dB down than the limit.

B. Test Plots




Test Mode: GPRS


Test channel : 128

Test Mode: GPRS


Test channel : 190

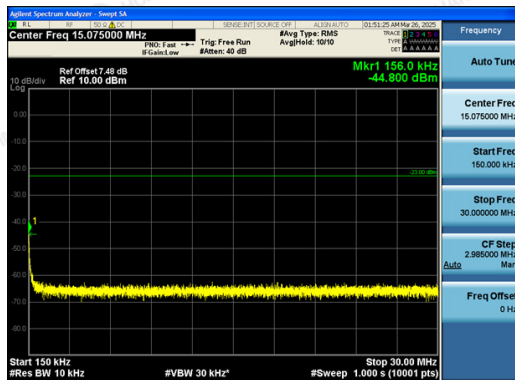


0.15~30MHz

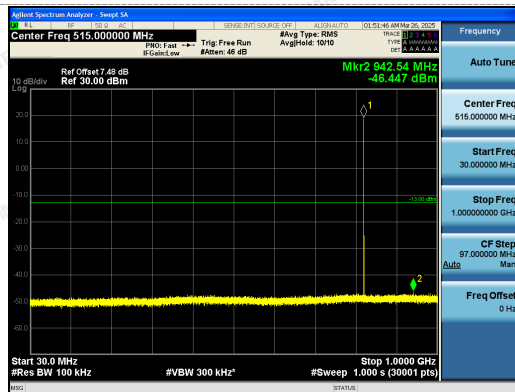


30MHz~1GHz

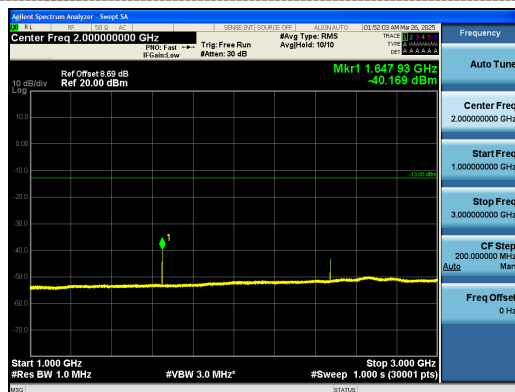


1GHz~3GHz

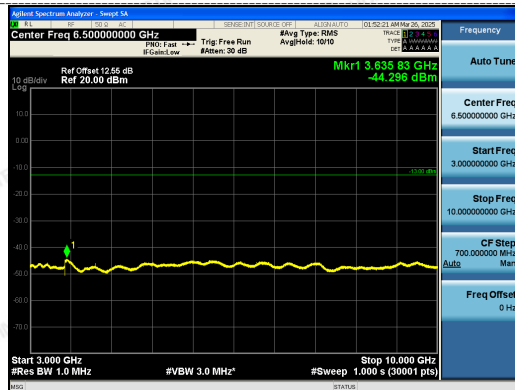


3GHz~10GHz

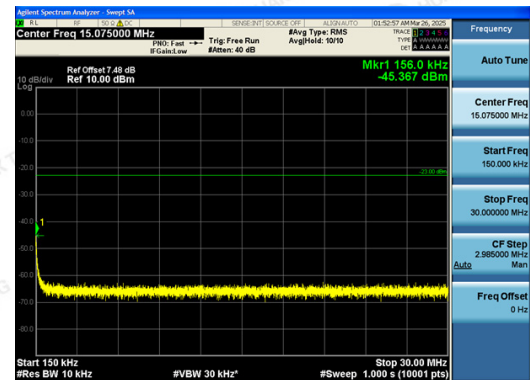


0.15~30MHz

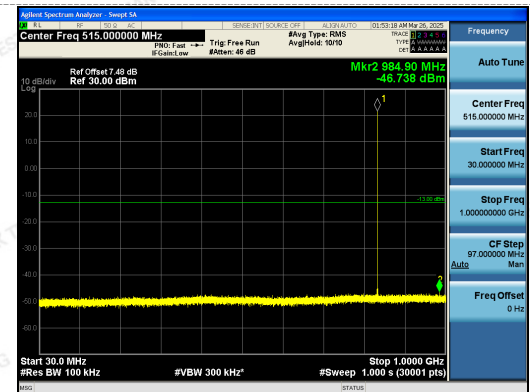

30MHz~1GHz

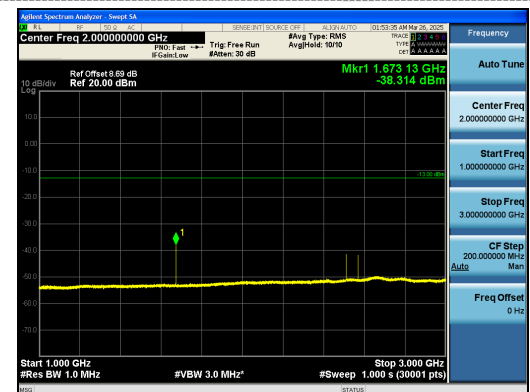

1GHz~3GHz

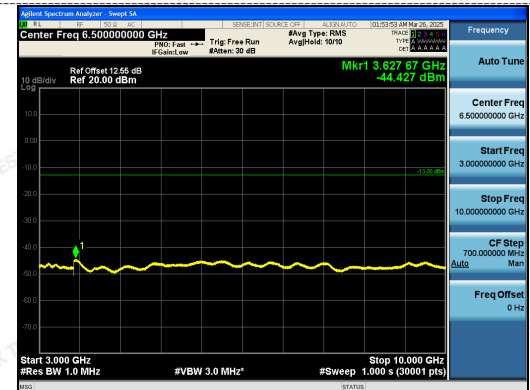


3GHz~10GHz




Test Mode: GPRS


Test channel : 251

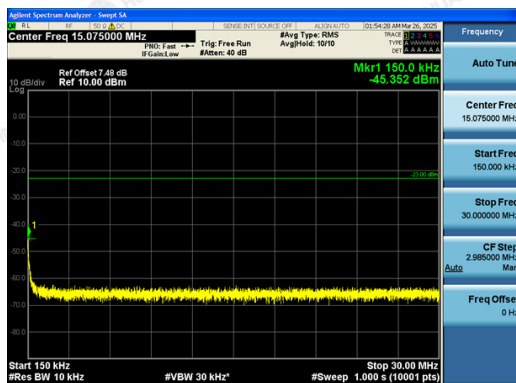


0.15~30MHz

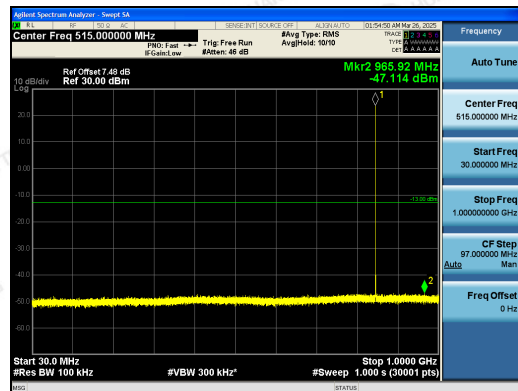

30MHz~1GHz

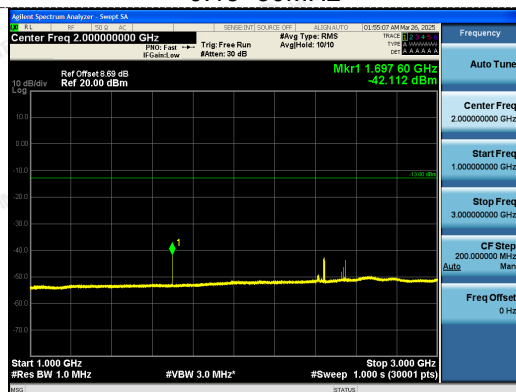

1GHz~3GHz

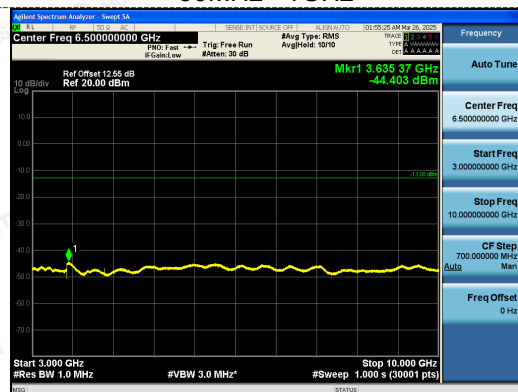

3GHz~10GHz

**4.5.2 For GPRS 1900 Test Results****A. Test Verdict**

Test Mode/ Channel	Frequency (MHz)	Frequency Range	Limit (dBm)	Verdict
GPRS 1900 /512	1850.20	150KHz-30MHz	-13.00	PASS
		30MHz-1GHz	-13.00	PASS
		1GHz-3GHz	-13.00	PASS
		3GHz-10GHz	-13.00	PASS
GPRS 1900 /661	1880.00	150KHz-30MHz	-13.00	PASS
		30MHz-1GHz	-13.00	PASS
		1GHz-3GHz	-13.00	PASS
		3GHz-10GHz	-13.00	PASS
GPRS 1900 /810	1909.80	150KHz-30MHz	-13.00	PASS
		30MHz-1GHz	-13.00	PASS
		1GHz-3GHz	-13.00	PASS
		3GHz-10GHz	-13.00	PASS

Note:

1. In general, the worse case attenuation requirement shown above was applied.
2. “---” means that the emission level is too low to be measured or at least 20 dB down than the limit.

B. Test Plots




Test Mode: GPRS


Test channel : 512

Test Mode: GPRS


Test channel : 661

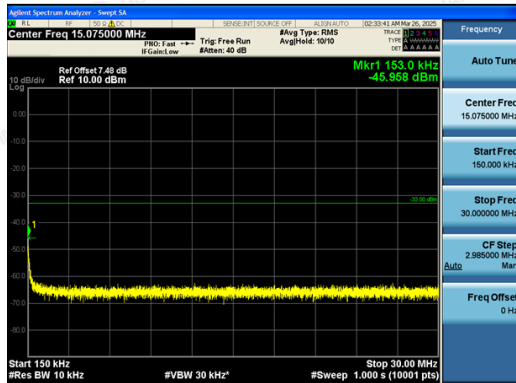


0.15~30MHz

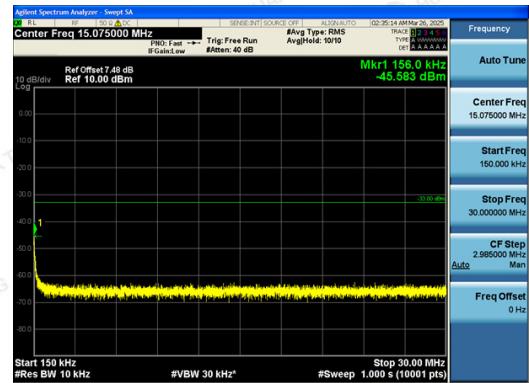


0.15~30MHz

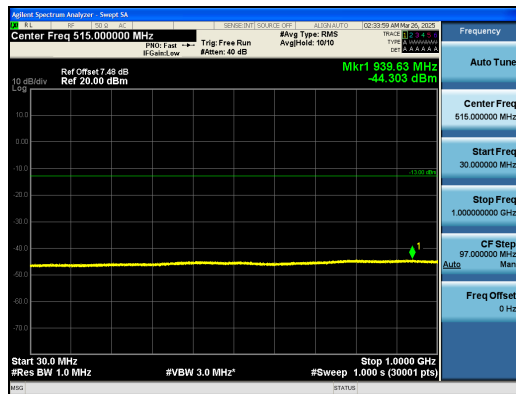


30MHz~1GHz

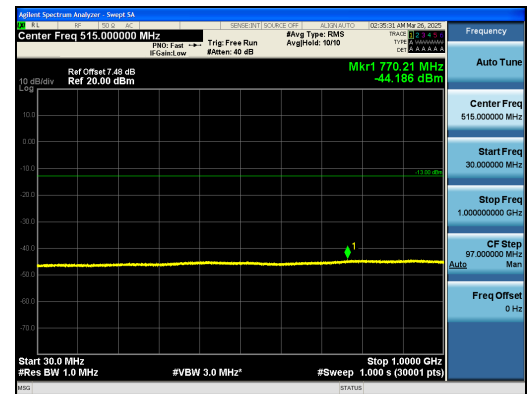


30MHz~1GHz

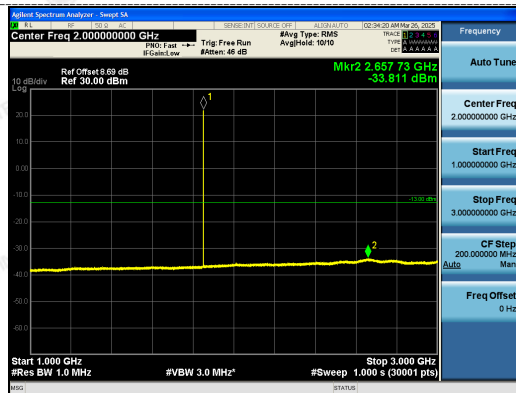


1GHz~3GHz

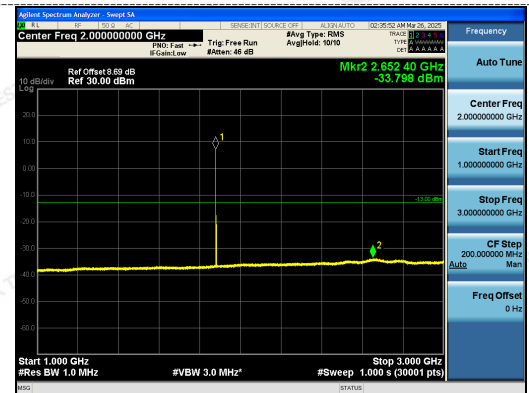

1GHz~3GHz

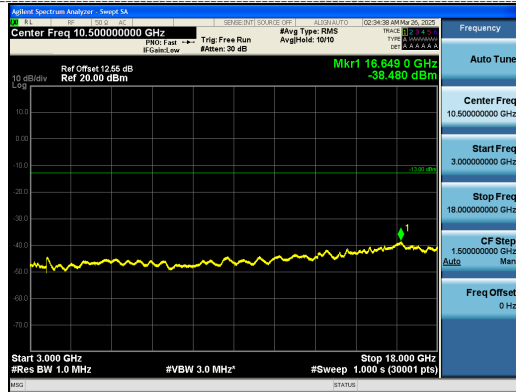

3GHz~18GHz

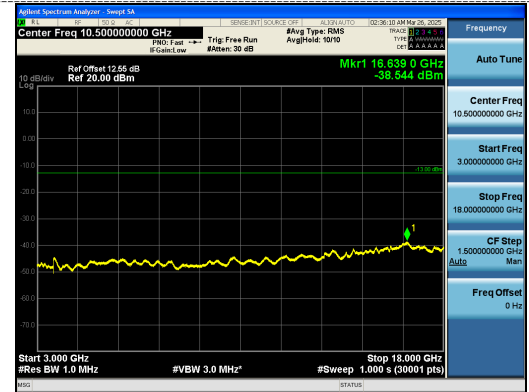


3GHz~18GHz




Test Mode: GPRS


Test channel : 810

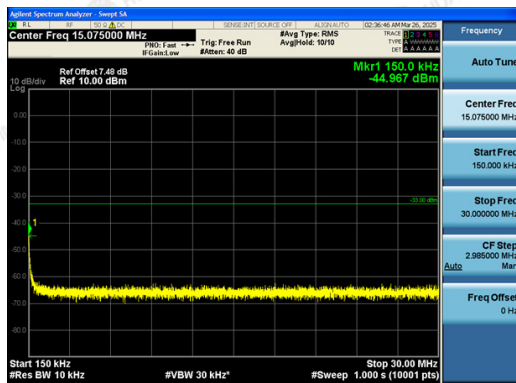


0.15~30MHz

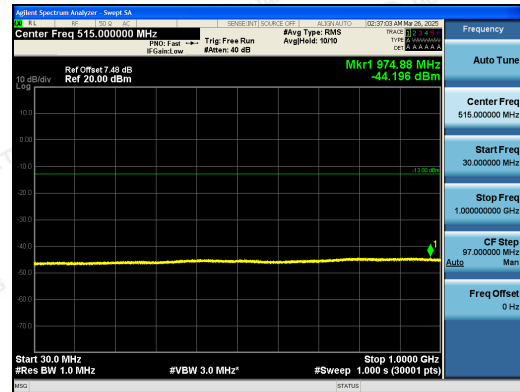

30MHz~1GHz

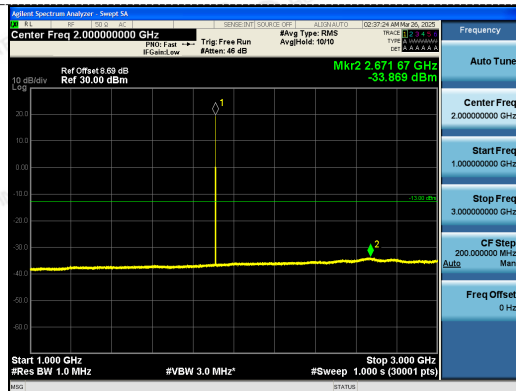

1GHz ~3GHz

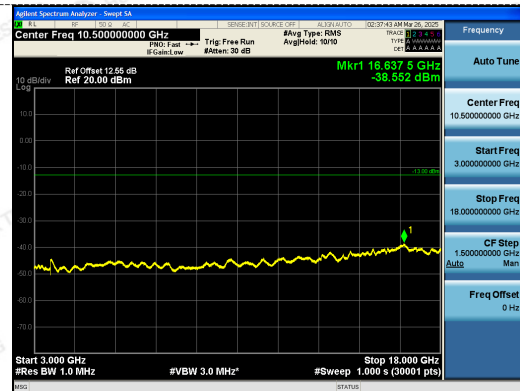

3GHz ~18GHz



4.6 Frequency Stability Test

TEST APPLICABLE


1. According to FCC Part 2 Section 2.1055 (a)(1), the frequency stability shall be measured with variation of ambient temperature from -30°C to +50°C centigrade.
2. According to FCC Part 2 Section 2.1055 (E) (2), for battery powered equipment, the frequency stability shall be measured with reducing primary supply voltage to the battery operating end point, which is specified by the manufacture.
3. Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried voltage equipment and the end voltage point was 10.8V.

TEST PROCEDURE

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU200 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature;
2. Subject the EUT to overnight soak at -30°C;
3. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on middle channel of PCS 1900 and GSM850, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming;
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 0.5 hours at each temperature, unpowered, before making measurements;
5. Remeasure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments remeasuring carrier frequency at each voltage. Pause at nominal voltage for 0.5 hours unpowered, to allow any self-heating to stabilize, before continuing;
6. Subject the EUT to overnight soak at +50°C;
7. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming;
8. Repeat the above measurements at 10°C increments from +50°C to -30°C. Allow at least 0.5 hours at each temperature, unpowered, before making measurements;
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure;

TEST CONFIGURATION

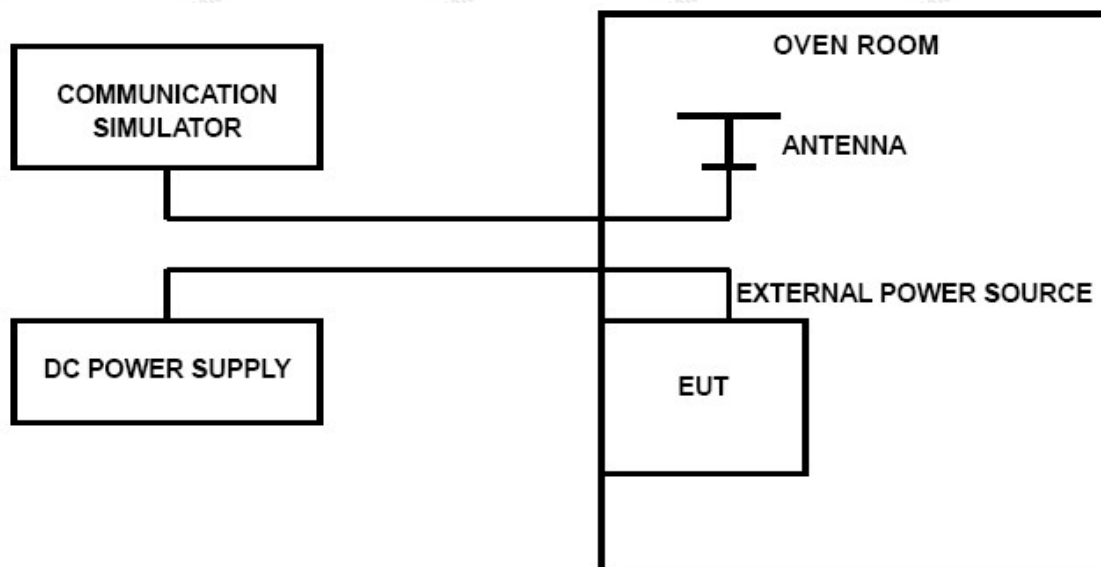

**TEST LIMITS****For Hand carried battery powered equipment**

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.40VDC and 4.20VDC, with a nominal voltage of 3.80 DC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -10 % and +12.5 %. For the purposes of measuring frequency stability these voltage limits are to be used.

For equipment powered by primary supply voltage

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

TEST RESULTS

GPRS 850 Middle channel=190 channel=836.6MHz					
DC Power	Temperature (°C)	Frequency error(Hz)	Frequency error(ppm)	Limit (ppm)	Verdict
4.25	25	-1.10	-0.001335	2.50	PASS
5.0	25	11.56	0.014026	2.50	PASS
5.75	25	9.46	0.011478	2.50	PASS
5.0	-30	10.49	0.012727	2.50	PASS
5.0	-20	12.62	0.015312	2.50	PASS
5.0	-10	10.56	0.012812	2.50	PASS
5.0	0	8.62	0.010459	2.50	PASS
5.0	10	1.68	0.002038	2.50	PASS
5.0	20	2.81	0.003409	2.50	PASS
5.0	30	3.81	0.004554	2.50	PASS
5.0	40	7.81	0.009335	2.50	PASS
5.0	50	8.52	0.010184	2.50	PASS

GPRS 1900 Middle channel=661 channel=1880MHz					
DC Power	Temperature (°C)	Frequency error(Hz)	Frequency error(ppm)	Limit (ppm)	Verdict
4.25	25	8.17	0.004416	2.50	PASS
5.0	25	32.35	0.017485	2.50	PASS
5.75	25	30.03	0.016231	2.50	PASS
5.0	-30	17.50	0.009458	2.50	PASS
5.0	-20	20.70	0.011188	2.50	PASS
5.0	-10	20.11	0.010869	2.50	PASS
5.0	0	14.33	0.007745	2.50	PASS
5.0	10	22.44	0.012128	2.50	PASS
5.0	20	12.46	0.006734	2.50	PASS
5.0	30	9.46	0.005032	2.50	PASS
5.0	40	12.72	0.006766	2.50	PASS
5.0	50	4.49	0.002388	2.50	PASS



GSM 850 Middle channel=190 channel=836.6MHz					
DC Power	Temperature (°C)	Frequency error(Hz)	Frequency error(ppm)	Limit (ppm)	Verdict
4.25	25	7.36	0.008930	2.50	PASS
5.0	25	7.72	0.009367	2.50	PASS
5.75	25	5.13	0.006224	2.50	PASS
5.0	-30	5.78	0.007013	2.50	PASS
5.0	-20	1.26	0.001529	2.50	PASS
5.0	-10	6.62	0.008032	2.50	PASS
5.0	0	-1.55	-0.001881	2.50	PASS
5.0	10	8.01	0.009719	2.50	PASS
5.0	20	7.01	0.008505	2.50	PASS
5.0	30	6.55	0.007829	2.50	PASS
5.0	40	9.52	0.011379	2.50	PASS
5.0	50	9.91	0.011846	2.50	PASS

PCS 1900 Middle channel=661 channel=1880MHz					
DC Power	Temperature (°C)	Frequency error(Hz)	Frequency error(ppm)	Limit (ppm)	Verdict
4.25	25	11.14	0.006021	2.50	PASS
5.0	25	16.85	0.009107	2.50	PASS
5.75	25	18.34	0.009912	2.50	PASS
5.0	-30	1.97	0.001065	2.50	PASS
5.0	-20	-5.94	-0.003210	2.50	PASS
5.0	-10	20.44	0.011047	2.50	PASS
5.0	0	18.34	0.009912	2.50	PASS
5.0	10	8.72	0.004713	2.50	PASS
5.0	20	14.98	0.008096	2.50	PASS
5.0	30	6.81	0.003622	2.50	PASS
5.0	40	9.46	0.005032	2.50	PASS
5.0	50	25.31	0.013463	2.50	PASS




4.7 Peak-to-Average Ratio (PAR)

LIMIT

The Peak-to-Average Ratio (PAR) of the transmission may not exceed 13 dB.

TEST CONFIGURATION

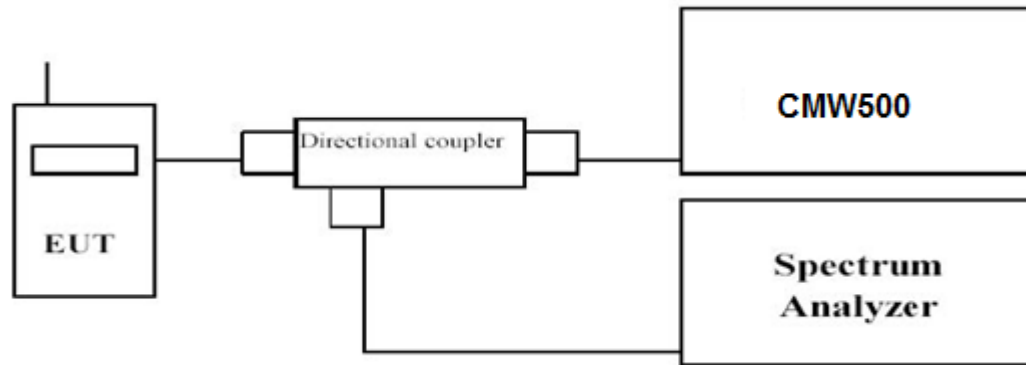

TEST PROCEDURE

Use spectrum to measure the total peak power and record as P_{Pk} . Use spectrum to measure the total average power and record as P_{Avg} . Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm).

Determine the PAPR from:

$$PAPR (dB) = P_{Pk} (dBm) - P_{Avg} (dBm).$$

TEST RESULTS

Note: We tested EGPRS/GPRS/GSM mode and recorded the worst case at the GPRS mode.

Frequency (MHz)	GPRS 850		
	Peak power	AV power	Measured (dB)
824.20	33.72	23.63	9.74
836.60	34.43	23.75	9.64
848.80	40.08	23.78	9.60

Frequency (MHz)	GPRS 1900		
	Peak power	AV power	Measured (dB)
1850.20	30.52	19.94	9.53
1880.00	43.87	19.81	9.50
1909.80	29.53	19.50	9.48



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China