




HUAK TESTING
HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

Vertical

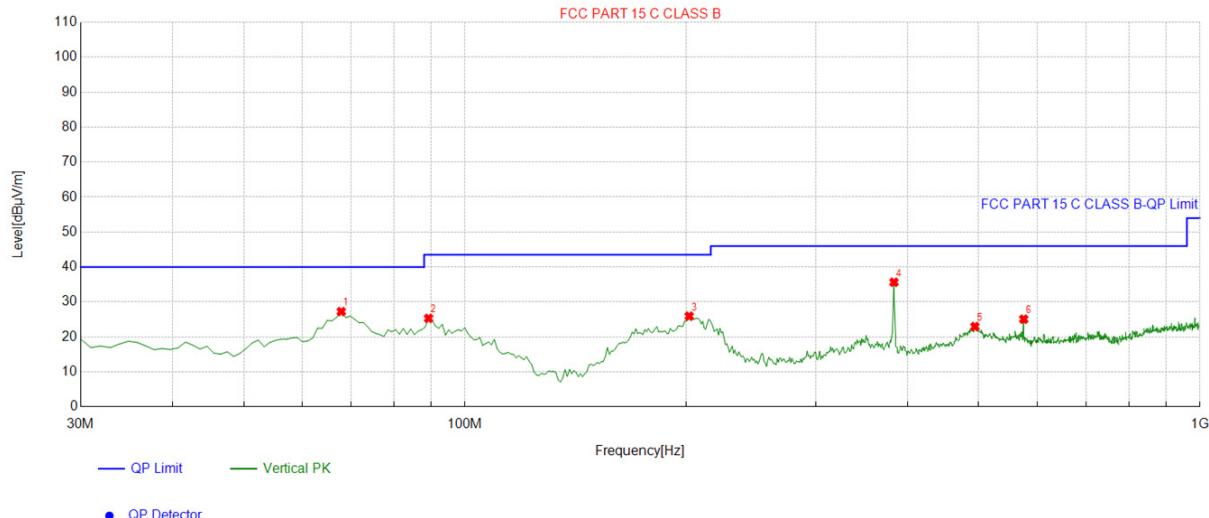

Suspected List

NO.	Freq. [MHz]	Factor [dB]	Reading [dB μ V/m]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	67.867868	-16.02	43.26	27.24	40.00	12.76	100	62	Vertical
2	89.229229	-16.75	42.06	25.31	43.50	18.19	100	273	Vertical
3	201.86186	-15.19	41.12	25.93	43.50	17.57	100	25	Vertical
4	383.43343	-9.11	44.75	35.64	46.00	10.36	100	255	Vertical
5	494.12412	-7.84	30.80	22.96	46.00	23.04	100	311	Vertical
6	575.68568	-5.53	30.60	25.07	46.00	20.93	100	252	Vertical

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit – Level

Harmonics and Spurious Emissions

Frequency Range (9kHz-30MHz)

Frequency (MHz)	Level@3m (dB μ V/m)	Limit@3m (dB μ V/m)
--	--	--
--	--	--
--	--	--
--	--	--

Note: 1. Emission Level=Reading+ Cable loss-Antenna factor-Amp factor.

2. The emission levels are 20 dB below the limit value, which are not reported. It is deemed to comply with the requirement.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



HUAK TESTING

HUAK TESTING

Radiated Emission Test

LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4824	52.82	-3.64	49.18	74	-24.82	peak
4824	41.24	-3.64	37.6	54	-16.4	AVG
7236	50.72	-0.95	49.77	74	-24.23	peak
7236	40.83	-0.95	39.88	54	-14.12	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.

Vertical:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4824	53.69	-3.64	50.05	74	-23.95	peak
4824	41.49	-3.64	37.85	54	-16.15	AVG
7236	51.73	-0.95	50.78	74	-23.22	peak
7236	39.32	-0.95	38.37	54	-15.63	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

**HUAK TESTING**

HUAK TESTING

HUAK TESTING

HUAK TESTING

Horizontal:**MID CH6 (802.11b Mode)/2437****Horizontal:**

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874	52.06	-3.51	48.55	74	-25.45	peak
4874	42.13	-3.51	38.62	54	-15.38	AVG
7311	50.11	-0.82	49.29	74	-24.71	peak
7311	39.17	-0.82	38.35	54	-15.65	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874	53.95	-3.51	50.44	74	-23.56	peak
4874	43.23	-3.51	39.72	54	-14.28	AVG
7311	50.57	-0.82	49.75	74	-24.25	peak
7311	39.65	-0.82	38.83	54	-15.17	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.

**HUAK TESTING**

HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4924	53.08	-3.43	49.65	74	-24.35	peak
4924	42.33	-3.43	38.9	54	-15.1	AVG
7386	51.42	-0.75	50.67	74	-23.33	peak
7386	40.13	-0.75	39.38	54	-14.62	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4924	53.11	-3.43	49.68	74	-24.32	peak
4924	44.46	-3.43	41.03	54	-12.97	AVG
7386	51.39	-0.75	50.64	74	-23.36	peak
7386	41.07	-0.75	40.32	54	-13.68	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency; "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) The emissions are attenuated more than 20dB below the permissible limits are not recorded in the report.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dB μ V/m(PK Value) < 93.98(AV Limit), at harmonic 53.20 dB μ V/m(PK Value) < 54dB μ V/m(AV Limit), the Average Detected not need to completed.



HUAK TESTING

LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4824	54.13	-3.64	50.49	74	-23.51	peak
4824	41.06	-3.64	37.42	54	-16.58	AVG
7236	51.12	-0.95	50.17	74	-23.83	peak
7236	38.85	-0.95	37.9	54	-16.1	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.

Vertical:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4824	52.95	-3.64	49.31	74	-24.69	peak
4824	44.76	-3.64	41.12	54	-12.88	AVG
7236	50.16	-0.95	49.21	74	-24.79	peak
7236	42.18	-0.95	41.23	54	-12.77	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.



HUAK TESTING
HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874	54.31	-3.51	50.8	74	-23.2	peak
4874	41.67	-3.51	38.16	54	-15.84	AVG
7311	51.04	-0.82	50.22	74	-23.78	peak
7311	40.78	-0.82	39.96	54	-14.04	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874	54.29	-3.51	50.78	74	-23.22	peak
4874	41.99	-3.51	38.48	54	-15.52	AVG
7311	51.32	-0.82	50.5	74	-23.5	peak
7311	40.19	-0.82	39.37	54	-14.63	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

**HUAK TESTING**

HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4924	53.02	-3.43	49.59	74	-24.41	peak
4924	43.09	-3.43	39.66	54	-14.34	AVG
7386	51.15	-0.75	50.4	74	-23.6	peak
7386	41.71	-0.75	40.96	54	-13.04	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4924	52.91	-3.43	49.48	74	-24.52	peak
4924	41.84	-3.43	38.41	54	-15.59	AVG
7386	50.11	-0.75	49.36	74	-24.64	peak
7386	39.95	-0.75	39.2	54	-14.8	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency; "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) The emissions are attenuated more than 20dB below the permissible limits are not recorded in the report.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dB μ V/m(PK Value) < 93.98(AV Limit), at harmonic 53.20 dB μ V/m(PK Value) < 54dB μ V/m(AV Limit), the Average Detected not need to completed.

**HUAK TESTING**

LOW CH1 (802.11n/HT20 Mode)/2412

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4824	53.86	-3.64	50.22	74	-23.78	peak
4824	41.68	-3.64	38.04	54	-15.96	AVG
7236	50.99	-0.95	50.04	74	-23.96	peak
7236	39.86	-0.95	38.91	54	-15.09	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4824	54.28	-3.64	50.64	74	-23.36	peak
4824	42.92	-3.64	39.28	54	-14.72	AVG
7236	50.12	-0.95	49.17	74	-24.83	peak
7236	40.13	-0.95	39.18	54	-14.82	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.



HUAK TESTING

MID CH6 (802.11n/HT20 Mode)/2437

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874	54.25	-3.51	50.74	74	-23.26	peak
4874	42.70	-3.51	39.19	54	-14.81	AVG
7311	53.20	-0.82	52.38	74	-21.62	peak
7311	38.56	-0.82	37.74	54	-16.26	AVG

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874	55.19	-3.51	51.68	74	-22.32	peak
4874	42.70	-3.51	39.19	54	-14.81	AVG
7311	53.54	-0.82	52.72	74	-21.28	peak
7311	38.95	-0.82	38.13	54	-15.87	AVG

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel : +86-0755-2302 9901 E-mail: info@huak.com Web : www.huak.com

Add : 1-2/F, Building B2, Junfeng Zhongcheng Zhibao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China. Tel: +86-0755-2522 5501 E-mail: info@nuak.com Web: www.nuak.com



HUAK TESTING

HIGH CH11 (802.11n/HT20 Mode)/2462

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type HUAK TESTING
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4924	54.28	-3.43	50.85	74	-23.15	peak
4924	43.75	-3.43	40.32	54	-13.68	AVG
7386	52.58	-0.75	51.83	74	-22.17	peak
7386	40.11	-0.75	39.36	54	-14.64	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level - limit

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4924	54.72	-3.43	51.29	74	-22.71	peak
4924	42.34	-3.43	38.91	54	-15.09	AVG
7386	52.95	-0.75	52.2	74	-21.8	peak
7386	40.57	-0.75	39.82	54	-14.18	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit



HUAK TESTING

LOW CH3 (802.11n/HT40 Mode)/2422

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4844	53.16	-3.63	49.53	74	-24.47	peak
4844	40.60	-3.63	36.97	54	-17.03	AVG
7266	51.05	-0.94	50.11	74	-23.89	peak
7266	39.71	-0.94	38.77	54	-15.23	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level - limit

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4844	53.31	-3.63	49.68	74	-24.32	peak
4844	42.01	-3.63	38.38	54	-15.62	AVG
7266	50.7	-0.94	49.76	74	-24.24	peak
7266	38.55	-0.94	37.61	54	-16.39	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.



HUAK TESTING

MID CH6 (802.11n/HT40 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type HUAK TESTING
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874	53.22	-3.51	49.71	74	-24.29	peak
4874	42.02	-3.51	38.51	54	-15.49	AVG
7311	51.42	-0.82	50.6	74	-23.4	peak
7311	38.92	-0.82	38.1	54	-15.9	AVG

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4874	54.43	-3.51	50.92	74	-23.08	peak
4874	40.48	-3.51	36.97	54	-17.03	AVG
7311	52.04	-0.82	51.22	74	-22.78	peak
7311	39.74	-0.82	38.92	54	-15.08	AVG

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel : +86-0755-2302 9901 E-mail: info@huak.com Web : www.huak.com

Add : 1-2/F, Building B2, Junfeng Zhongcheng Zhibao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Futian Street, Bao'an District, Shenzhen, Guangdong, China



HIGH CH9 (802.11n/HT40 Mode)/2452

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4904	53.45	-3.43	50.02	74	-23.98	peak
4904	42.43	-3.43	39	54	-15	AVG
7356	51.76	-0.75	51.01	74	-22.99	peak
7356	40.62	-0.75	39.87	54	-14.13	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4904	52.56	-3.43	49.13	74	-24.87	peak
4904	41.98	-3.43	38.55	54	-15.45	AVG
7356	50.44	-0.75	49.69	74	-24.31	peak
7356	38.9	-0.75	38.15	54	-15.85	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency; "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) The emissions are attenuated more than 20dB below the permissible limits are not recorded in the report.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dB μ V/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dB μ V/m(PK Value) <54 dB μ V/m(AV Limit), the Average Detected not need to completed.

**HUAK TESTING**

Series Model No.: S26 Ultra
LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4824	52.94	-3.64	49.3	74	-24.7	peak
4824	41.2	-3.64	37.56	54	-16.44	AVG
7236	51.32	-0.95	50.37	74	-23.63	peak
7236	40.35	-0.95	39.4	54	-14.6	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.

Vertical:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4824	52.09	-3.64	48.45	74	-25.55	peak
4824	41.93	-3.64	38.29	54	-15.71	AVG
7236	51.69	-0.95	50.74	74	-23.26	peak
7236	38.17	-0.95	37.22	54	-16.78	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.



HUAK TESTING

MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4874	52.89	-3.51	49.38	74	-24.62	peak
4874	43.12	-3.51	39.61	54	-14.39	AVG
7311	50.22	-0.82	49.4	74	-24.6	peak
7311	40.31	-0.82	39.49	54	-14.51	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874	53.64	-3.51	50.13	74	-23.87	peak
4874	40.72	-3.51	37.21	54	-16.79	AVG
7311	51.01	-0.82	50.19	74	-23.81	peak
7311	39.02	-0.82	38.2	54	-15.8	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit

**HUAK TESTING**

HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4924	53.78	-3.43	50.35	74	-23.65	peak
4924	40.34	-3.43	36.91	54	-17.09	AVG
7386	52.13	-0.75	51.38	74	-22.62	peak
7386	37.9	-0.75	37.15	54	-16.85	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4924	52.87	-3.43	49.44	74	-24.56	peak
4924	42.71	-3.43	39.28	54	-14.72	AVG
7386	51.05	-0.75	50.3	74	-23.7	peak
7386	40.97	-0.75	40.22	54	-13.78	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency; "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) The emissions are attenuated more than 20dB below the permissible limits are not recorded in the report.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dB μ V/m(PK Value) < 93.98(AV Limit), at harmonic 53.20 dB μ V/m(PK Value) < 54dB μ V/m(AV Limit), the Average Detected not need to completed.
- (7) All the test modes completed for test. only the worst result of Mode 1 (802.11b Mode)

**HUAK TESTING**

Series Model No.: Pixel 9
LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4824	52.53	-3.64	48.89	74	-25.11	peak
4824	41.33	-3.64	37.69	54	-16.31	AVG
7236	51.45	-0.95	50.5	74	-23.5	peak
7236	39.86	-0.95	38.91	54	-15.09	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.

Vertical:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4824	53.1	-3.64	49.46	74	-24.54	peak
4824	41.75	-3.64	38.11	54	-15.89	AVG
7236	51.21	-0.95	50.26	74	-23.74	peak
7236	38.74	-0.95	37.79	54	-16.21	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.



HUAK TESTING

MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4874	53.39	-3.51	49.88	74	-24.12	peak
4874	42.52	-3.51	39.01	54	-14.99	AVG
7311	50.05	-0.82	49.23	74	-24.77	peak
7311	40.5	-0.82	39.68	54	-14.32	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level - limit

Vertical:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4874	53.81	-3.51	50.3	74	-23.7	peak
4874	41.97	-3.51	38.46	54	-15.54	AVG
7311	50.1	-0.82	49.28	74	-24.72	peak
7311	39.98	-0.82	39.16	54	-14.84	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level – Limit

**HUAK TESTING**

HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4924	54.53	-3.43	51.1	74	-22.9	peak
4924	40.77	-3.43	37.34	54	-16.66	AVG
7386	50.04	-0.75	49.29	74	-24.71	peak
7386	41.14	-0.75	40.39	54	-13.61	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4924	55.21	-3.43	51.78	74	-22.22	peak
4924	41.41	-3.43	37.98	54	-16.02	AVG
7386	52.03	-0.75	51.28	74	-22.72	peak
7386	39.39	-0.75	38.64	54	-15.36	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency; "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) The emissions are attenuated more than 20dB below the permissible limits are not recorded in the report.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dB μ V/m(PK Value) < 93.98(AV Limit), at harmonic 53.20 dB μ V/m(PK Value) < 54dB μ V/m(AV Limit), the Average Detected not need to completed.
- (7) All the test modes completed for test. only the worst result of Mode 1 (802.11b Mode)

**HUAK TESTING**Series Model No.: SP30 Pro
LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4824	52.76	-3.64	49.12	74	-24.88	peak
4824	41.95	-3.64	38.31	54	-15.69	AVG
7236	50.92	-0.95	49.97	74	-24.03	peak
7236	39.99	-0.95	39.04	54	-14.96	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.

Vertical:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4824	54.06	-3.64	50.42	74	-23.58	peak
4824	42.85	-3.64	39.21	54	-14.79	AVG
7236	52.01	-0.95	51.06	74	-22.94	peak
7236	39.77	-0.95	38.82	54	-15.18	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.

**HUAK TESTING**

HUAK TESTING

HUAK TESTING

HUAK TESTING

Horizontal:**MID CH6 (802.11b Mode)/2437****Horizontal:**

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874	53.56	-3.51	50.05	74	-23.95	peak
4874	42.96	-3.51	39.45	54	-14.55	AVG
7311	51.77	-0.82	50.95	74	-23.05	peak
7311	38.15	-0.82	37.33	54	-16.67	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874	53.28	-3.51	49.77	74	-24.23	peak
4874	42.43	-3.51	38.92	54	-15.08	AVG
7311	50.45	-0.82	49.63	74	-24.37	peak
7311	39.73	-0.82	38.91	54	-15.09	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.

**HUAK TESTING**

HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4924	54.04	-3.43	50.61	74	-23.39	peak
4924	42.05	-3.43	38.62	54	-15.38	AVG
7386	50.65	-0.75	49.9	74	-24.1	peak
7386	38.77	-0.75	38.02	54	-15.98	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4924	53.87	-3.43	50.44	74	-23.56	peak
4924	42.27	-3.43	38.84	54	-15.16	AVG
7386	50.38	-0.75	49.63	74	-24.37	peak
7386	39.44	-0.75	38.69	54	-15.31	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency; "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) The emissions are attenuated more than 20dB below the permissible limits are not recorded in the report.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dB μ V/m(PK Value) < 93.98(AV Limit), at harmonic 53.20 dB μ V/m(PK Value) < 54dB μ V/m(AV Limit), the Average Detected not need to completed.
- (7) All the test modes completed for test. only the worst result of Mode 1 (802.11b Mode)

**HUAK TESTING**Series Model No.: MT Ultimate
LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4824	53.08	-3.64	49.44	74	-24.56	peak
4824	42.14	-3.64	38.5	54	-15.5	AVG
7236	50.11	-0.95	49.16	74	-24.84	peak
7236	40.28	-0.95	39.33	54	-14.67	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.

Vertical:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4824	53.99	-3.64	50.35	74	-23.65	peak
4824	42.35	-3.64	38.71	54	-15.29	AVG
7236	50.98	-0.95	50.03	74	-23.97	peak
7236	38.91	-0.95	37.96	54	-16.04	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.



HUAK TESTING

MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874	53.15	-3.51	49.64	74	-24.36	peak
4874	41.74	-3.51	38.23	54	-15.77	AVG
7311	50.12	-0.82	49.3	74	-24.7	peak
7311	40.55	-0.82	39.73	54	-14.27	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level - limit

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874	55.04	-3.51	51.53	74	-22.47	peak
4874	42.44	-3.51	38.93	54	-15.07	AVG
7311	50.65	-0.82	49.83	74	-24.17	peak
7311	38.23	-0.82	37.41	54	-16.59	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit

**HUAK TESTING**

HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4924	53.27	-3.43	49.84	74	-24.16	peak
4924	42.12	-3.43	38.69	54	-15.31	AVG
7386	50.92	-0.75	50.17	74	-23.83	peak
7386	39.29	-0.75	38.54	54	-15.46	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4924	55.04	-3.43	51.61	74	-22.39	peak
4924	42.75	-3.43	39.32	54	-14.68	AVG
7386	52.41	-0.75	51.66	74	-22.34	peak
7386	38.64	-0.75	37.89	54	-16.11	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency; "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) The emissions are attenuated more than 20dB below the permissible limits are not recorded in the report.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dB μ V/m(PK Value) < 93.98(AV Limit), at harmonic 53.20 dB μ V/m(PK Value) < 54dB μ V/m(AV Limit), the Average Detected not need to completed.
- (7) All the test modes completed for test. only the worst result of Mode 1 (802.11b Mode)

**HUAK TESTING**

Series Model No.: M15 pro
LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4824	54.26	-3.64	50.62	74	-23.38	peak
4824	41.35	-3.64	37.71	54	-16.29	AVG
7236	51.8	-0.95	50.85	74	-23.15	peak
7236	39.11	-0.95	38.16	54	-15.84	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.

Vertical:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4824	52.67	-3.64	49.03	74	-24.97	peak
4824	41.98	-3.64	38.34	54	-15.66	AVG
7236	50.12	-0.95	49.17	74	-24.83	peak
7236	38.01	-0.95	37.06	54	-16.94	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.



HUAK TESTING

MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4874	52.7	-3.51	49.19	74	-24.81	peak
4874	40.84	-3.51	37.33	54	-16.67	AVG
7311	50.31	-0.82	49.49	74	-24.51	peak
7311	39.38	-0.82	38.56	54	-15.44	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit

Vertical:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4874	53.08	-3.51	49.57	74	-24.43	peak
4874	43.66	-3.51	40.15	54	-13.85	AVG
7311	52.04	-0.82	51.22	74	-22.78	peak
7311	42.18	-0.82	41.36	54	-12.64	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit

**HUAK TESTING**

HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4924	52.01	-3.43	48.58	74	-25.42	peak
4924	40.02	-3.43	36.59	54	-17.41	AVG
7386	50.12	-0.75	49.37	74	-24.63	peak
7386	39.87	-0.75	39.12	54	-14.88	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4924	52.42	-3.43	48.99	74	-25.01	peak
4924	43.3	-3.43	39.87	54	-14.13	AVG
7386	50.12	-0.75	49.37	74	-24.63	peak
7386	40.3	-0.75	39.55	54	-14.45	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency; "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) The emissions are attenuated more than 20dB below the permissible limits are not recorded in the report.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dB μ V/m(PK Value) < 93.98(AV Limit), at harmonic 53.20 dB μ V/m(PK Value) < 54dB μ V/m(AV Limit), the Average Detected not need to completed.
- (7) All the test modes completed for test. only the worst result of Mode 1 (802.11b Mode)



Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.50	52.89	-5.81	47.08	74	-26.92	peak
2483.50	40.92	-5.81	35.11	54	-18.89	AVG
2500.00	51.86	-6.06	45.8	74	-28.2	peak
2500.00	39.87	-6.06	33.81	54	-20.19	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.50	52.71	-5.81	46.9	74	-27.1	peak
2483.50	40.38	-5.81	34.57	54	-19.43	AVG
2500.00	51.94	-6.06	45.88	74	-28.12	peak
2500.00	38.82	-6.06	32.76	54	-21.24	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

**HUAK TESTING**

HUAK TESTING

Operation Mode: 802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2310.00	53.12	-5.81	47.31	74	-26.69	peak
2310.00	43.75	-5.81	37.94	54	-16.06	AVG
2390.00	50.22	-5.84	44.38	74	-29.62	peak
2390.00	39.74	-5.84	33.9	54	-20.1	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2310.00	52.75	-5.81	46.94	74	-27.06	peak
2310.00	44.98	-5.81	39.17	54	-14.83	AVG
2390.00	50.41	-5.84	44.57	74	-29.43	peak
2390.00	41.09	-5.84	35.25	54	-18.75	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

**HUAK TESTING**

HUAK TESTING

Horizontal**Operation Mode: TX CH High (2462MHz)**

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.50	53.25	-5.65	47.6	74	-26.4	peak
2483.50	43.12	-5.65	37.47	54	-16.53	AVG
2500.00	50.4	-5.65	44.75	74	-29.25	peak
2500.00	41.2	-5.65	35.55	54	-18.45	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.

Vertical:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.50	52.87	-5.65	47.22	74	-26.78	peak
2483.50	41.89	-5.65	36.24	54	-17.76	AVG
2500.00	51.03	-5.65	45.38	74	-28.62	peak
2500.00	39.91	-5.65	34.26	54	-19.74	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

**HUAK TESTING**

HUAK TESTING

Operation Mode: 802.11n/HT20 Mode TX CH Low (2412MHz)

Horizontal

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2310.00	54.92	-5.81	49.11	74	-24.89	peak
2310.00	40.6	-5.81	34.79	54	-19.21	AVG
2390.00	51.23	-5.84	45.39	74	-28.61	peak
2390.00	38.45	-5.84	32.61	54	-21.39	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2310.00	54.97	-5.81	49.16	74	-24.84	peak
2310.00	41.32	-5.81	35.51	54	-18.49	AVG
2390.00	50.26	-5.84	44.42	74	-29.58	peak
2390.00	40.15	-5.84	34.31	54	-19.69	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



HUAK TESTING

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.50	51.67	-5.65	46.02	74	-27.98	peak
2483.50	42.93	-5.65	37.28	54	-16.72	AVG
2500.00	50.12	-5.65	44.47	74	-29.53	peak
2500.00	38.99	-5.65	33.34	54	-20.66	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.50	52.53	-5.65	46.88	74	-27.12	peak
2483.50	41.35	-5.65	35.7	54	-18.3	AVG
2500.00	50.36	-5.65	44.71	74	-29.29	peak
2500.00	39.84	-5.65	34.19	54	-19.81	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

**HUAK TESTING**

HUAK TESTING

Horizontal**Operation Mode: 802.11n/HT40 Mode TX CH Low (2422MHz)****Horizontal**

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2310.00	55.32	-5.81	49.51	74	-24.49	peak
2310.00	/	-5.81	/	54	/	AVG
2390.00	53.19	-5.84	47.35	74	-26.65	peak
2390.00	/	-5.84	/	54	/	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2310.00	56.32	-5.81	50.51	74	-23.49	peak
2310.00	/	-5.81	/	54	/	AVG
2390.00	54.75	-5.84	48.91	74	-25.09	peak
2390.00	/	-5.84	/	54	/	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



HUAK TESTING

HUAK TESTING

Operation Mode: TX CH High (2452MHz)

Horizontal

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.50	54.29	-5.65	48.64	74	-25.36	peak
2483.50	/	-5.65	/	54	/	AVG
2500.00	52.74	-5.65	47.09	74	-26.91	peak
2500.00	/	-5.65	/	54	/	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.50	53.62	-5.65	47.97	74	-26.03	peak
2483.50	/	-5.65	/	54	/	AVG
2500.00	52.48	-5.65	46.83	74	-27.17	peak
2500.00	/	-5.65	/	54	/	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



HUAK TESTING

All the test modes completed for test. only the worst result of Mode 1(802.11b Mode)
Series Model No.: S26 Ultra

Operation Mode: 802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2310.00	52.69	-5.81	46.88	74	-27.12	peak
2310.00	40.66	-5.81	34.85	54	-19.15	AVG
2390.00	50.14	-5.84	44.3	74	-29.7	peak
2390.00	38.45	-5.84	32.61	54	-21.39	AVG

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2310.00	52.52	-5.81	46.71	74	-27.29	peak
2310.00	41.97	-5.81	36.16	54	-17.84	AVG
2390.00	51.42	-5.84	45.58	74	-28.42	peak
2390.00	38.98	-5.84	33.14	54	-20.86	AVG

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd., Tel : +86-0755-2302 9901 E-mail: info@huak.com Web : www.huak.com

Add : 1-2/F, Building B2, Junfeng Zhongcheng Zhibao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Futian Street, Bao'an District, Shenzhen, Guangdong, China

**HUAK TESTING**

HUAK TESTING

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.50	52.14	-5.81	46.33	74	-27.67	peak
2483.50	43.4	-5.81	37.59	54	-16.41	AVG
2500.00	50.78	-6.06	44.72	74	-29.28	peak
2500.00	40.72	-6.06	34.66	54	-19.34	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.50	52.95	-5.81	47.14	74	-26.86	peak
2483.50	40.97	-5.81	35.16	54	-18.84	AVG
2500.00	50.31	-6.06	44.25	74	-29.75	peak
2500.00	37.48	-6.06	31.42	54	-22.58	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



HUAK TESTING

HUAK TESTING Series Model No.: Pixel 9

Operation Mode: 802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2310.00	52.95	-5.81	47.14	74	-26.86	peak
2310.00	40.97	-5.81	35.16	54	-18.84	AVG
2390.00	50.31	-5.84	44.47	74	-29.53	peak
2390.00	37.48	-5.84	31.64	54	-22.36	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level - limit

Vertical:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2310.00	53.05	-5.81	47.24	74	-26.76	peak
2310.00	42.88	-5.81	37.07	54	-16.93	AVG
2390.00	51.34	-5.84	45.5	74	-28.5	peak
2390.00	39.46	-5.84	33.62	54	-20.38	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.



HUAK TESTING
HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.50	52.09	-5.81	46.28	74	-27.72	peak
2483.50	42.84	-5.81	37.03	54	-16.97	AVG
2500.00	50.67	-6.06	44.61	74	-29.39	peak
2500.00	41.53	-6.06	35.47	54	-18.53	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.50	51.24	-5.81	45.43	74	-28.57	peak
2483.50	40.56	-5.81	34.75	54	-19.25	AVG
2500.00	50.07	-6.06	44.01	74	-29.99	peak
2500.00	39.72	-6.06	33.66	54	-20.34	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

**HUAK TESTING**

Series Model No.: SP30 Pro

Operation Mode: 802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2310.00	53.46	-5.81	47.65	74	-26.35	peak
2310.00	42.11	-5.81	36.3	54	-17.7	AVG
2390.00	51.8	-5.84	45.96	74	-28.04	peak
2390.00	40.55	-5.84	34.71	54	-19.29	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2310.00	52.44	-5.81	46.63	74	-27.37	peak
2310.00	43.65	-5.81	37.84	54	-16.16	AVG
2390.00	50.41	-5.84	44.57	74	-29.43	peak
2390.00	39.8	-5.84	33.96	54	-20.04	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.

**HUAK TESTING**

HUAK TESTING

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.50	53.33	-5.81	47.52	74	-26.48	peak
2483.50	42.11	-5.81	36.3	54	-17.7	AVG
2500.00	52.31	-6.06	46.25	74	-27.75	peak
2500.00	41.17	-6.06	35.11	54	-18.89	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.50	52.97	-5.81	47.16	74	-26.84	peak
2483.50	41.25	-5.81	35.44	54	-18.56	AVG
2500.00	50.32	-6.06	44.26	74	-29.74	peak
2500.00	38.33	-6.06	32.27	54	-21.73	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

**HUAK TESTING**

HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

Series Model No.: MT Ultimate

Operation Mode: 802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2310.00	53.29	-5.81	47.48	74	-26.52	peak
2310.00	42.05	-5.81	36.24	54	-17.76	AVG
2390.00	52.43	-5.84	46.59	74	-27.41	peak
2390.00	41.07	-5.84	35.23	54	-18.77	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2310.00	52.26	-5.81	46.45	74	-27.55	peak
2310.00	43.11	-5.81	37.3	54	-16.7	AVG
2390.00	50.75	-5.84	44.91	74	-29.09	peak
2390.00	40.14	-5.84	34.3	54	-19.7	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



HUAK TESTING
HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.50	53.43	-5.81	47.62	74	-26.38	peak
2483.50	44.12	-5.81	38.31	54	-15.69	AVG
2500.00	50.78	-6.06	44.72	74	-29.28	peak
2500.00	40.05	-6.06	33.99	54	-20.01	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.50	52.72	-5.81	46.91	74	-27.09	peak
2483.50	41.03	-5.81	35.22	54	-18.78	AVG
2500.00	50.11	-6.06	44.05	74	-29.95	peak
2500.00	39.62	-6.06	33.56	54	-20.44	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

**HUAK TESTING**

Series Model No.: M15 pro

Operation Mode: 802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2310.00	52.12	-5.81	46.31	74	-27.69	peak
2310.00	41.31	-5.81	35.5	54	-18.5	AVG
2390.00	50.94	-5.84	45.1	74	-28.9	peak
2390.00	39.41	-5.84	33.57	54	-20.43	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2310.00	51.72	-5.81	45.91	74	-28.09	peak
2310.00	41.98	-5.81	36.17	54	-17.83	AVG
2390.00	50.62	-5.84	44.78	74	-29.22	peak
2390.00	38.34	-5.84	32.5	54	-21.5	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.



HUAK TESTING
HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.50	52.38	-5.81	46.57	74	-27.43	peak
2483.50	43.11	-5.81	37.3	54	-16.7	AVG
2500.00	51.42	-6.06	45.36	74	-28.64	peak
2500.00	40.2	-6.06	34.14	54	-19.86	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.50	55.32	-5.81	49.51	74	-24.49	peak
2483.50	41.96	-5.81	36.15	54	-17.85	AVG
2500.00	53.18	-6.06	47.12	74	-26.88	peak
2500.00	39.95	-6.06	33.89	54	-20.11	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Remark:

1. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.
2. In restricted bands of operation, the spurious emissions below the permissible value more than 20dB.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. All the test modes completed for test. only the worst result of Mode 1 (802.11b Mode)



HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING



HUAK TESTING

HUAK TESTING

HUAK TESTING

5. Test Setup Photos of the EUT

Test Model No.: I16 Pro max
Radiated Emissions

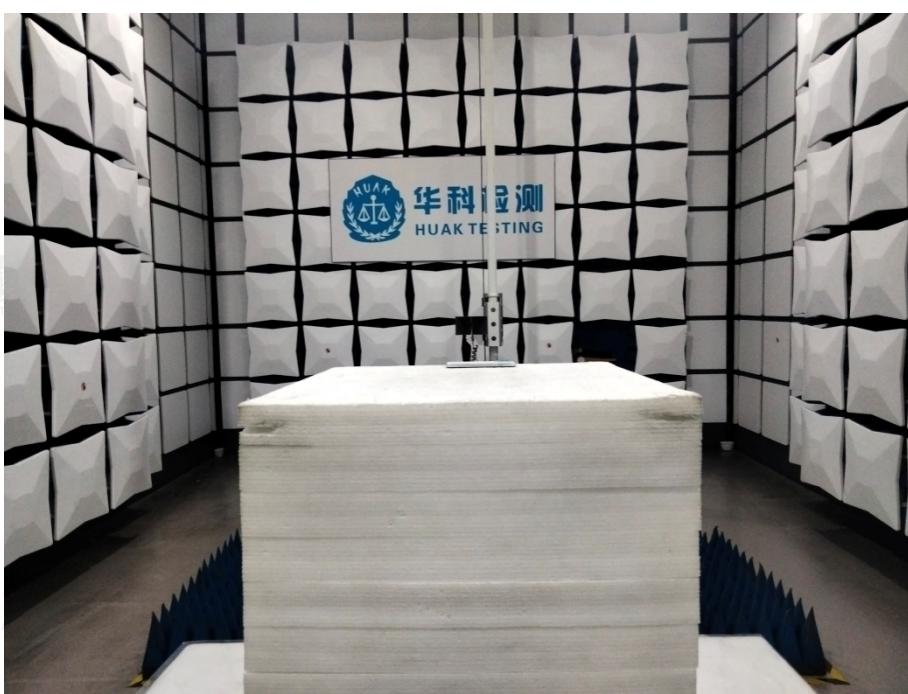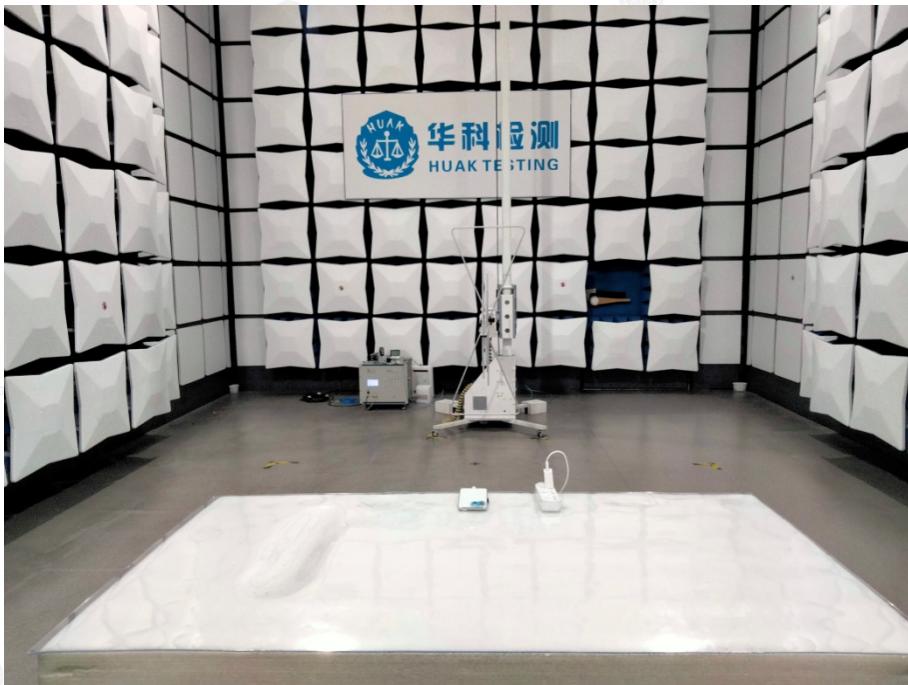

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China




HUAK TESTING

HUAK TESTING

AC Conducted Emission



RF Conducted Emission

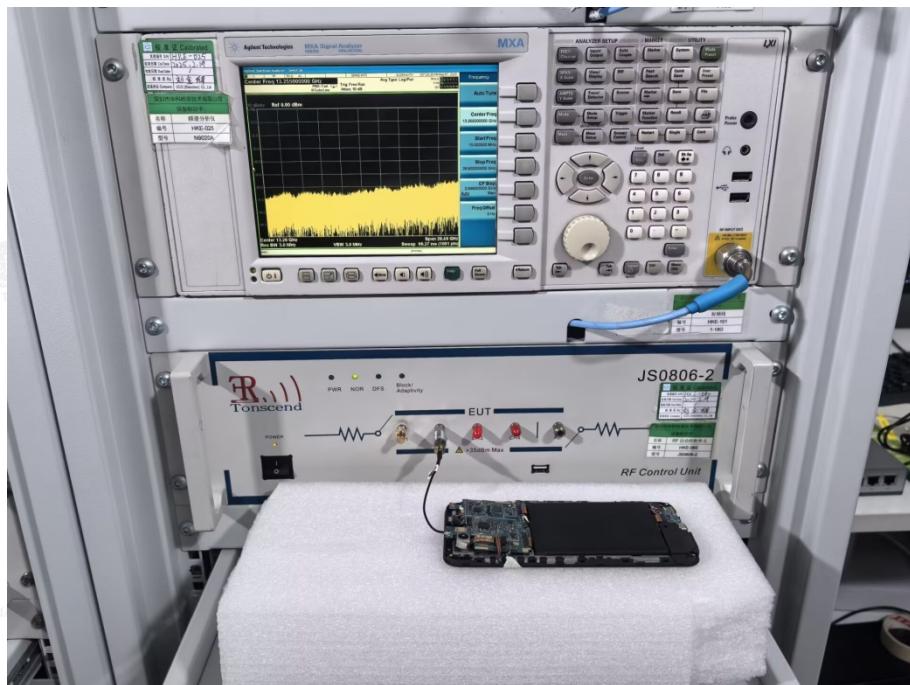

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com



Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



HUAK TESTING

HUAK TESTING

Series Model No.: S26 Ultra
Radiated Emissions

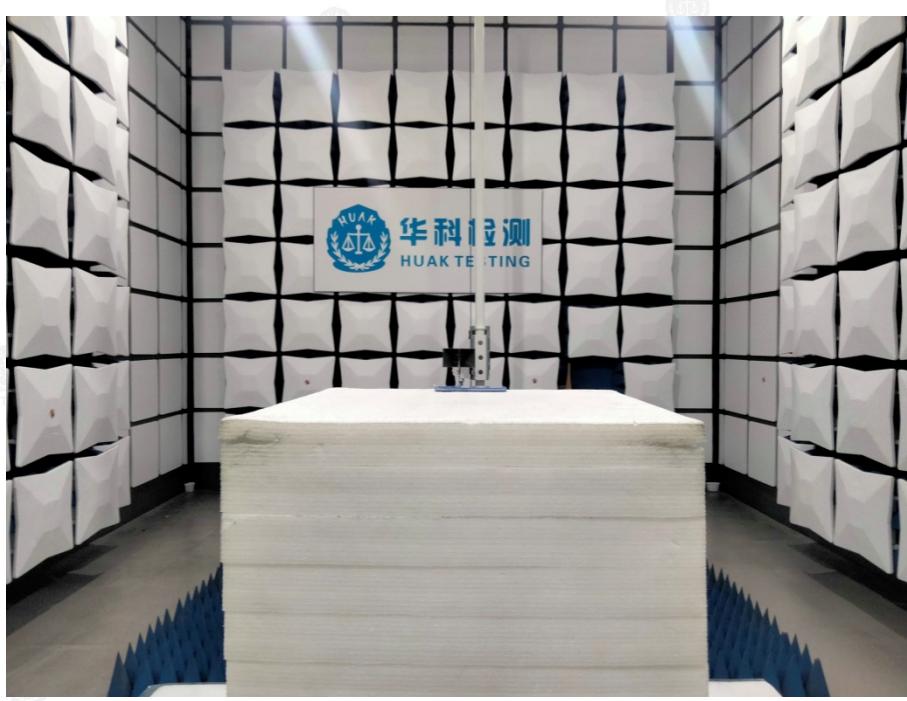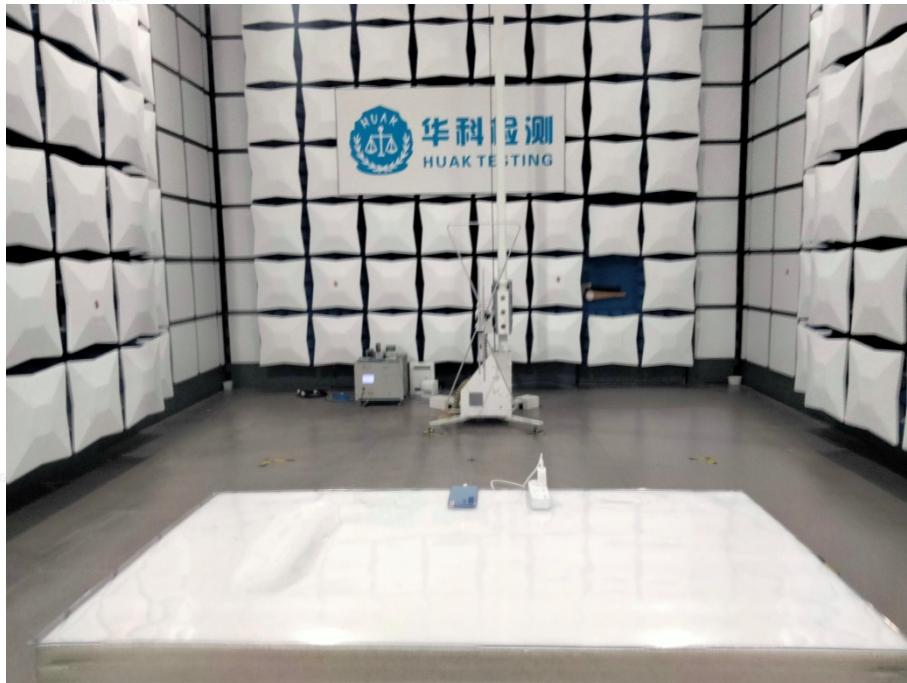

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

Conducted Emission



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

Conducted Emission



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com



Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



HUAK TESTING

HUAK TESTING

Series Model No.: SP30 Pro
Radiated Emissions

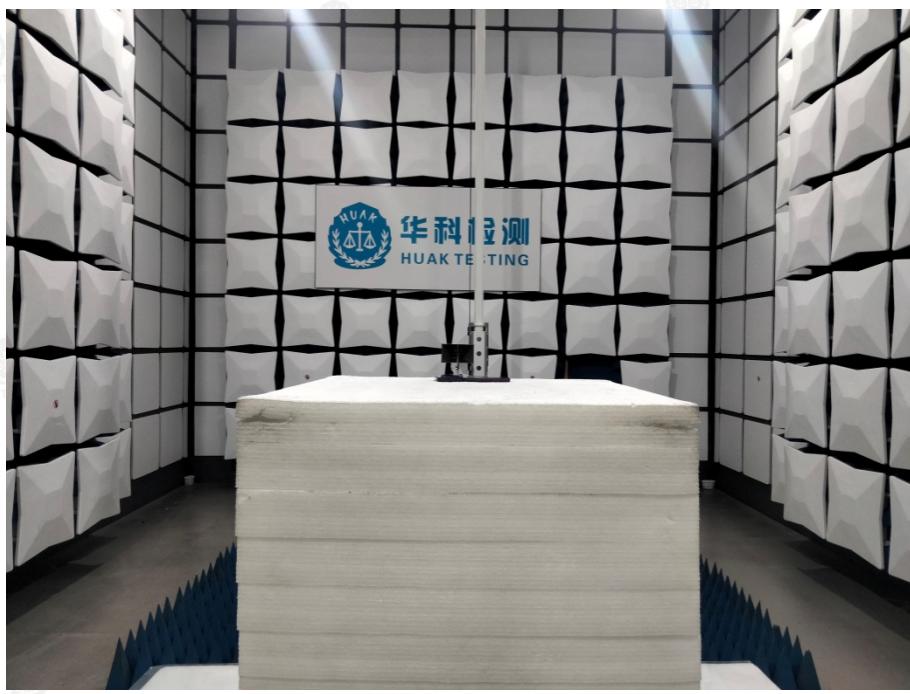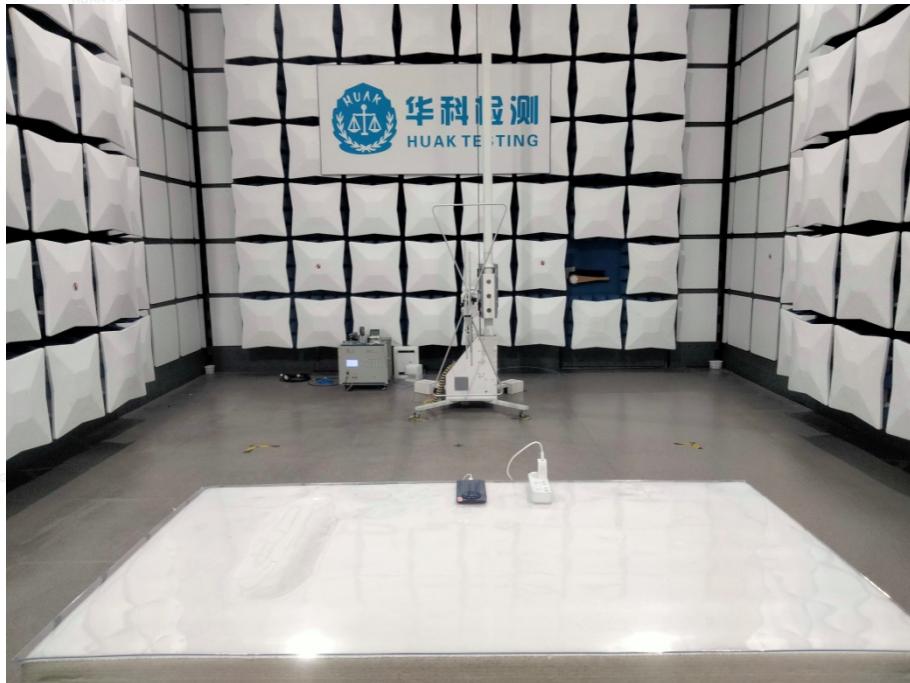

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China




HUAK TESTING

HUAK TESTING

Conducted Emission



Series Model No.: MT Ultimate
Radiated Emissions

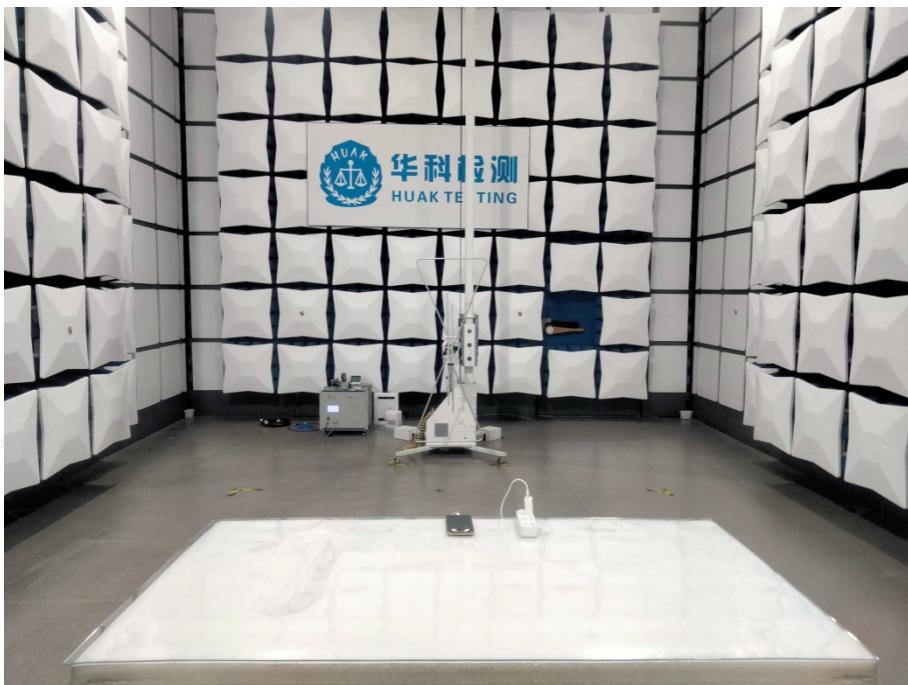

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



HUAK TESTING

HUAK TESTING

Conducted Emission







HUAK TESTING

HUAK TESTING

Series Model No.: M15 pro
Radiated Emissions

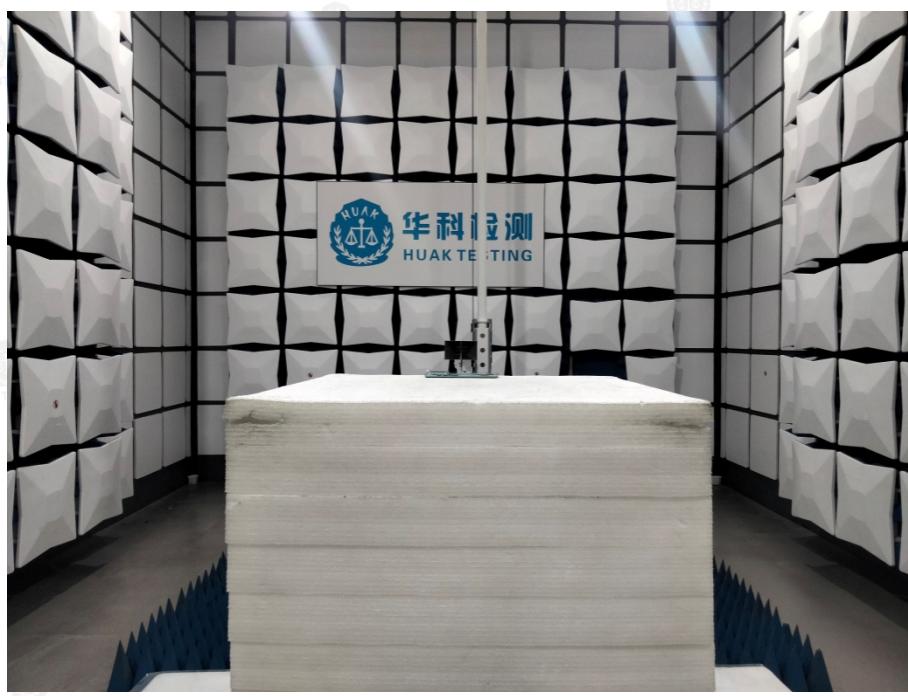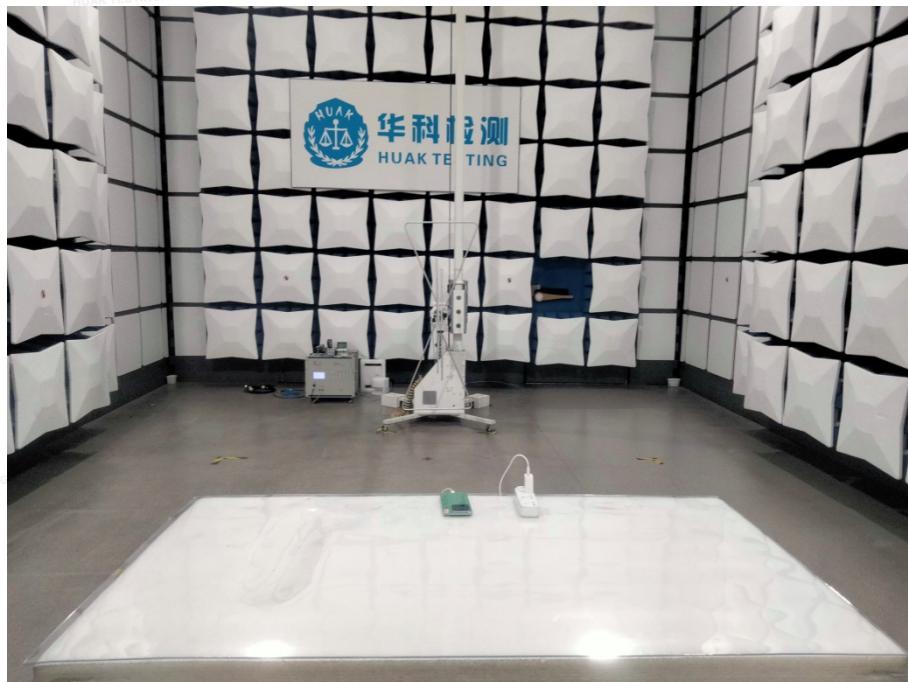

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



HUAK TESTING

HUAK TESTING

Conducted Emission





HUAK TESTING

6. Photos of the EUT

Reference to the report: ANNEX A of external photos and ANNEX B of internal photos.

-----End of test report-----