



Appendix F

RF Test Data for 5.8GWIFI (Conducted Measurement)

Product Name: Tablet

Test Model: HPAD-T80

Environmental Conditions

|                    |           |
|--------------------|-----------|
| Temperature:       | 24.1°C    |
| Relative Humidity: | 53.4%     |
| ATM Pressure:      | 100.0 kPa |
| Test Engineer:     | Can Kun   |
| Supervised by:     | Nick Peng |





## F.1 -6dB Bandwidth


| Condition | Mode | Frequency (MHz) | Antenna | -6 dB Bandwidth (MHz) | Limit -6 dB Bandwidth (MHz) | Verdict |
|-----------|------|-----------------|---------|-----------------------|-----------------------------|---------|
| NVNT      | a    | 5745            | Ant1    | 16.351                | $\geq 0.5$                  | Pass    |
| NVNT      | a    | 5785            | Ant1    | 16.335                | $\geq 0.5$                  | Pass    |
| NVNT      | a    | 5825            | Ant1    | 16.345                | $\geq 0.5$                  | Pass    |
| NVNT      | n20  | 5745            | Ant1    | 17.128                | $\geq 0.5$                  | Pass    |
| NVNT      | n20  | 5785            | Ant1    | 17.191                | $\geq 0.5$                  | Pass    |
| NVNT      | n20  | 5825            | Ant1    | 17.261                | $\geq 0.5$                  | Pass    |
| NVNT      | n40  | 5755            | Ant1    | 36.039                | $\geq 0.5$                  | Pass    |
| NVNT      | n40  | 5795            | Ant1    | 35.601                | $\geq 0.5$                  | Pass    |
| NVNT      | ac20 | 5745            | Ant1    | 17.374                | $\geq 0.5$                  | Pass    |
| NVNT      | ac20 | 5785            | Ant1    | 17.245                | $\geq 0.5$                  | Pass    |
| NVNT      | ac20 | 5825            | Ant1    | 17.375                | $\geq 0.5$                  | Pass    |
| NVNT      | ac40 | 5755            | Ant1    | 35.885                | $\geq 0.5$                  | Pass    |
| NVNT      | ac40 | 5795            | Ant1    | 35.808                | $\geq 0.5$                  | Pass    |
| NVNT      | ac80 | 5775            | Ant1    | 75.509                | $\geq 0.5$                  | Pass    |






## Test Graphs

-6dB Bandwidth NVNT a 5745MHz Ant1

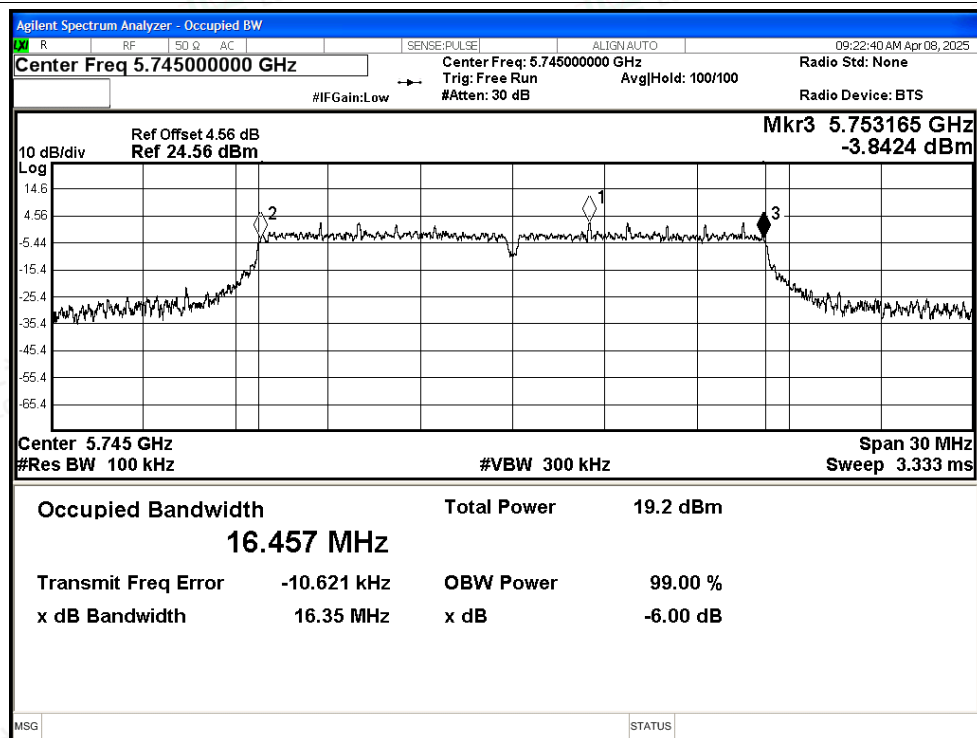

-6dB Bandwidth NVNT a 5785MHz Ant1

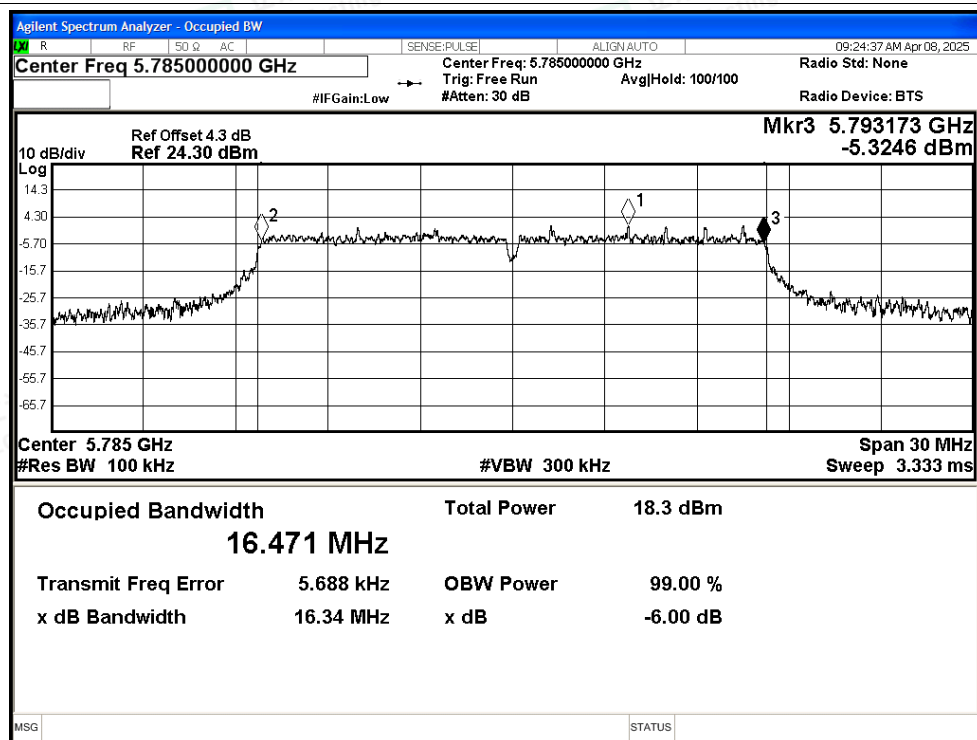

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## -6dB Bandwidth NVNT a 5825MHz Ant1

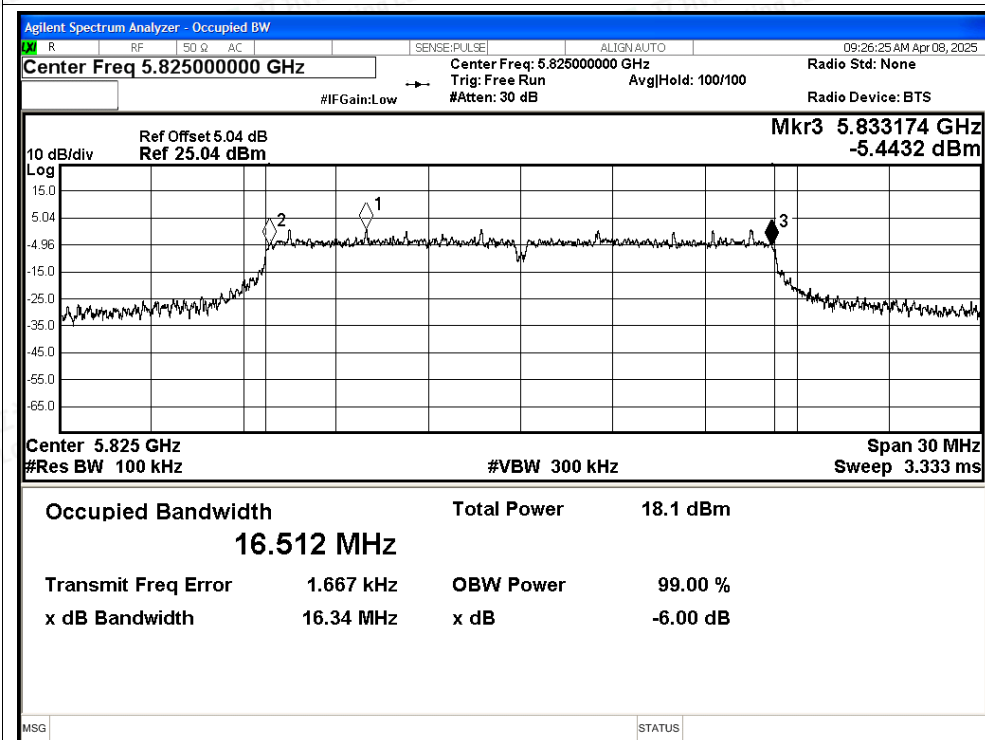

## -6dB Bandwidth NVNT n20 5745MHz Ant1

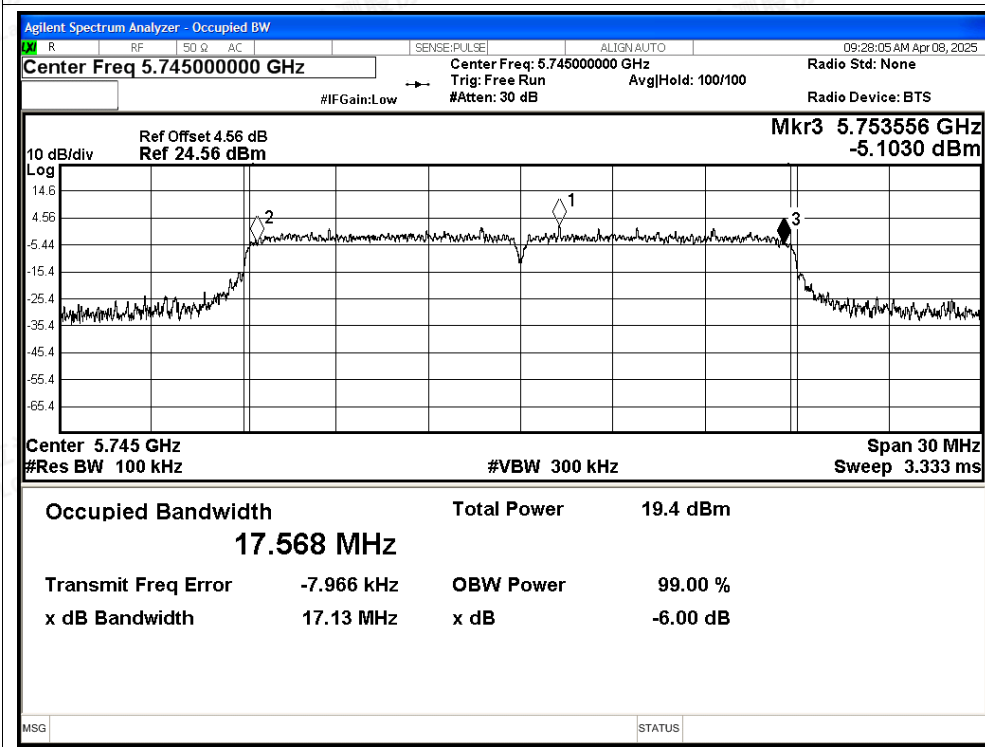

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



-6dB Bandwidth NVNT n20 5785MHz Ant1

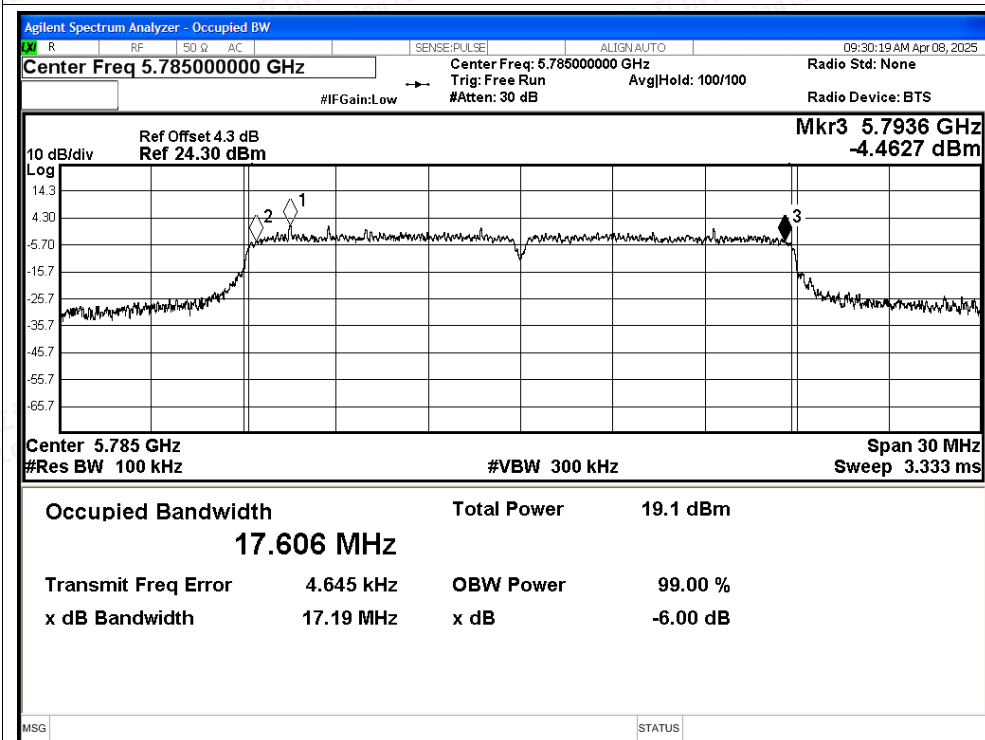

-6dB Bandwidth NVNT n20 5825MHz Ant1

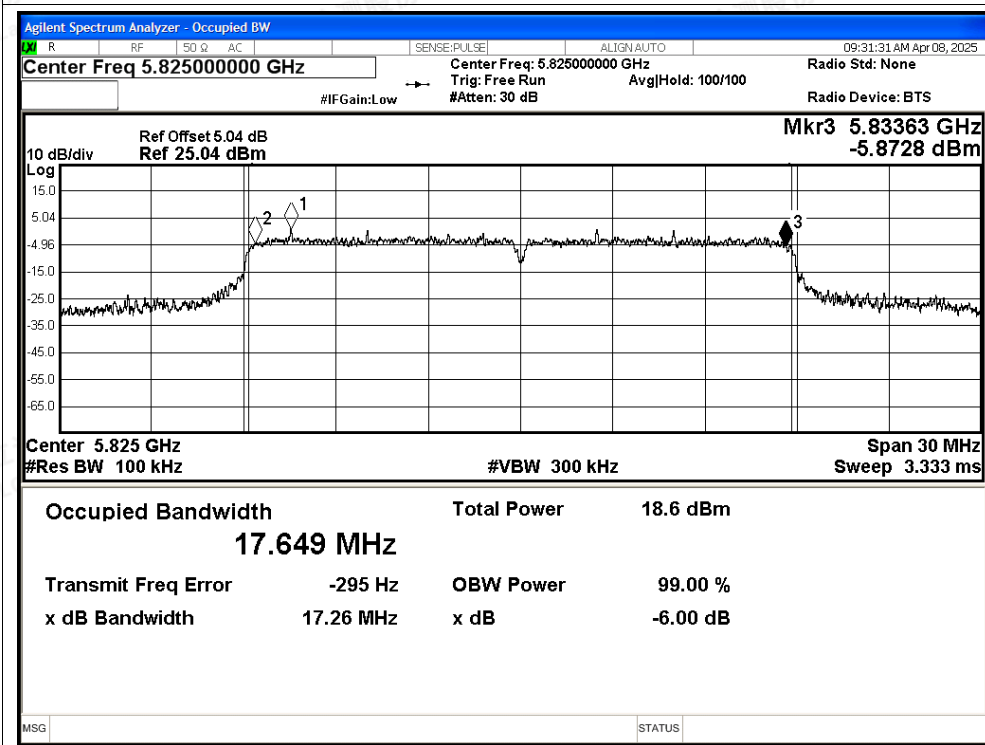

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



-6dB Bandwidth NVNT n40 5755MHz Ant1

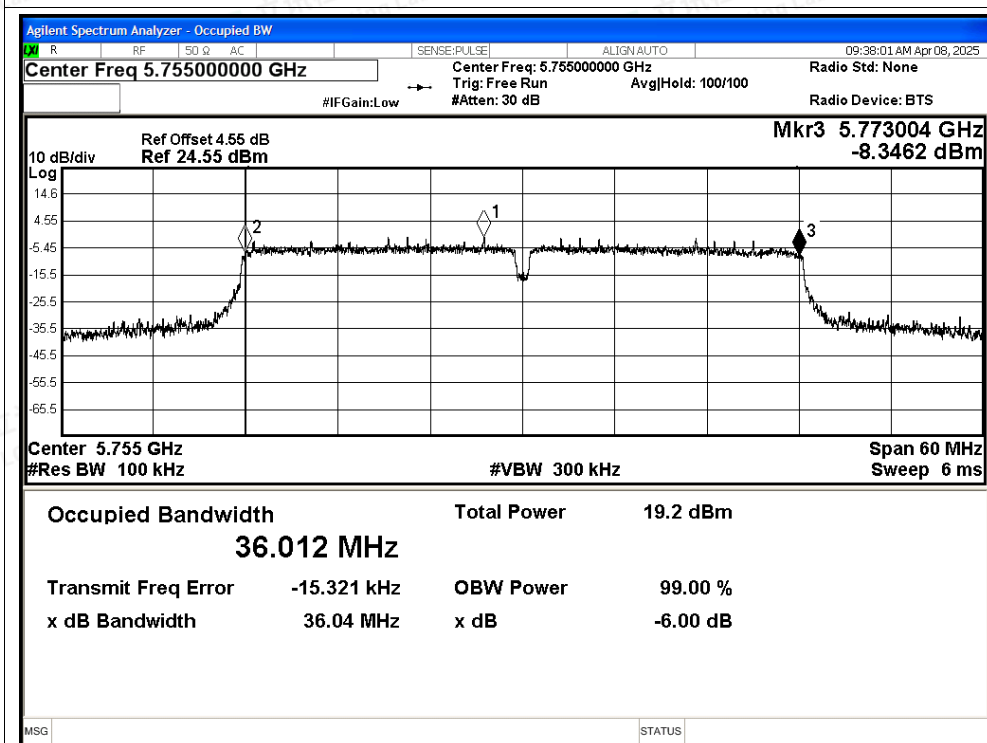

-6dB Bandwidth NVNT n40 5795MHz Ant1

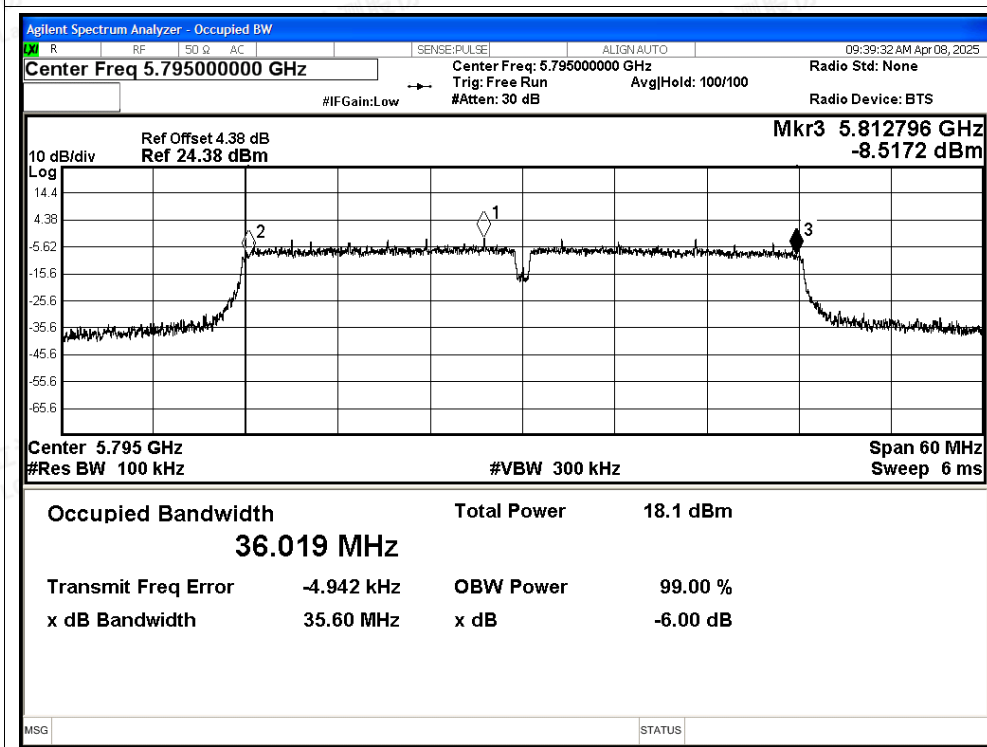

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## -6dB Bandwidth NVNT ac20 5745MHz Ant1

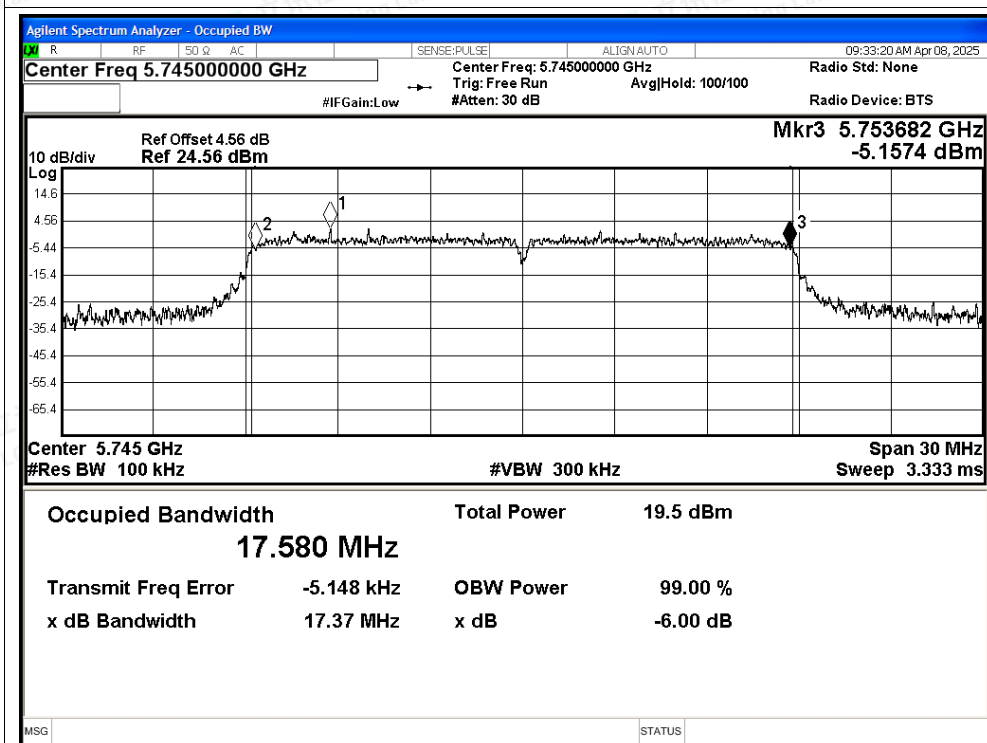

## -6dB Bandwidth NVNT ac20 5785MHz Ant1

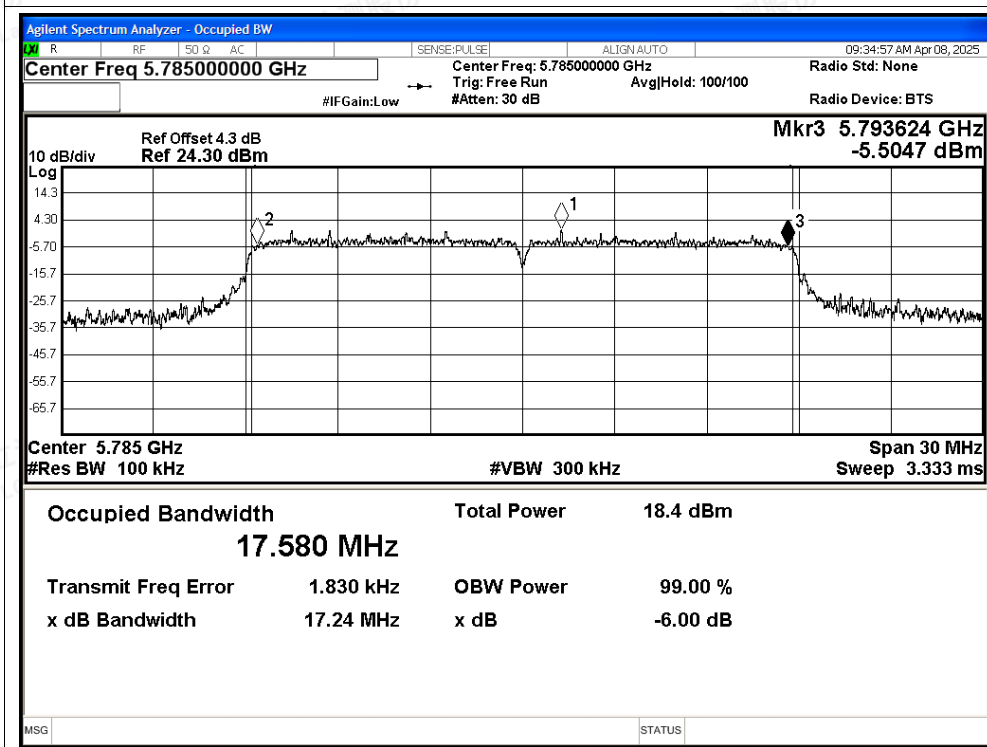

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## -6dB Bandwidth NVNT ac20 5825MHz Ant1

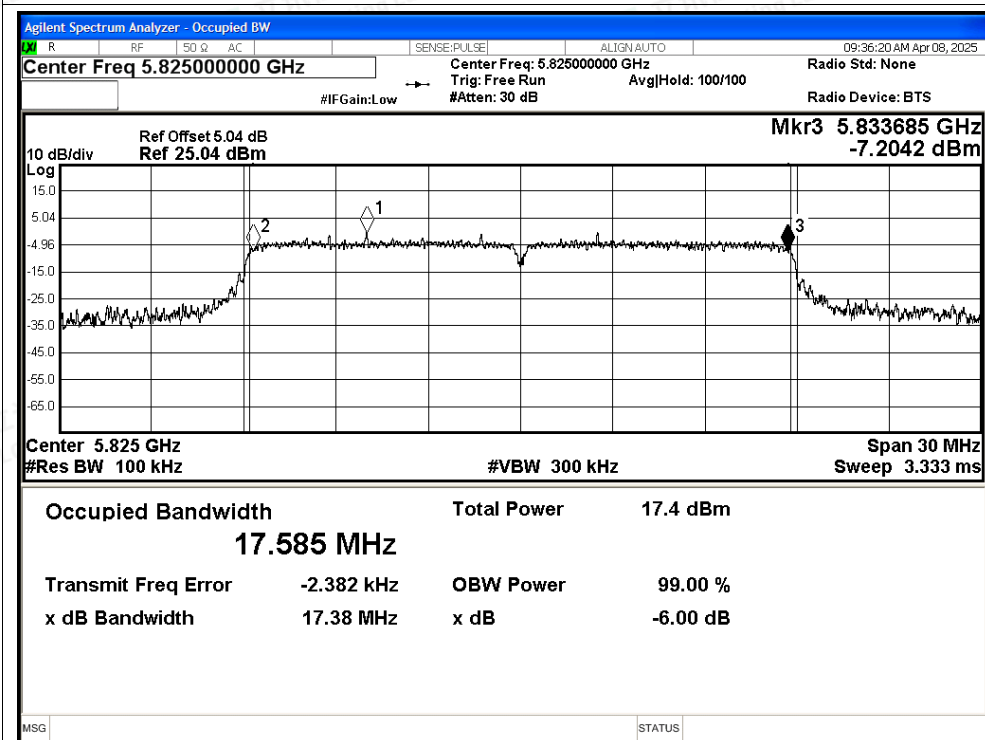

## -6dB Bandwidth NVNT ac40 5755MHz Ant1

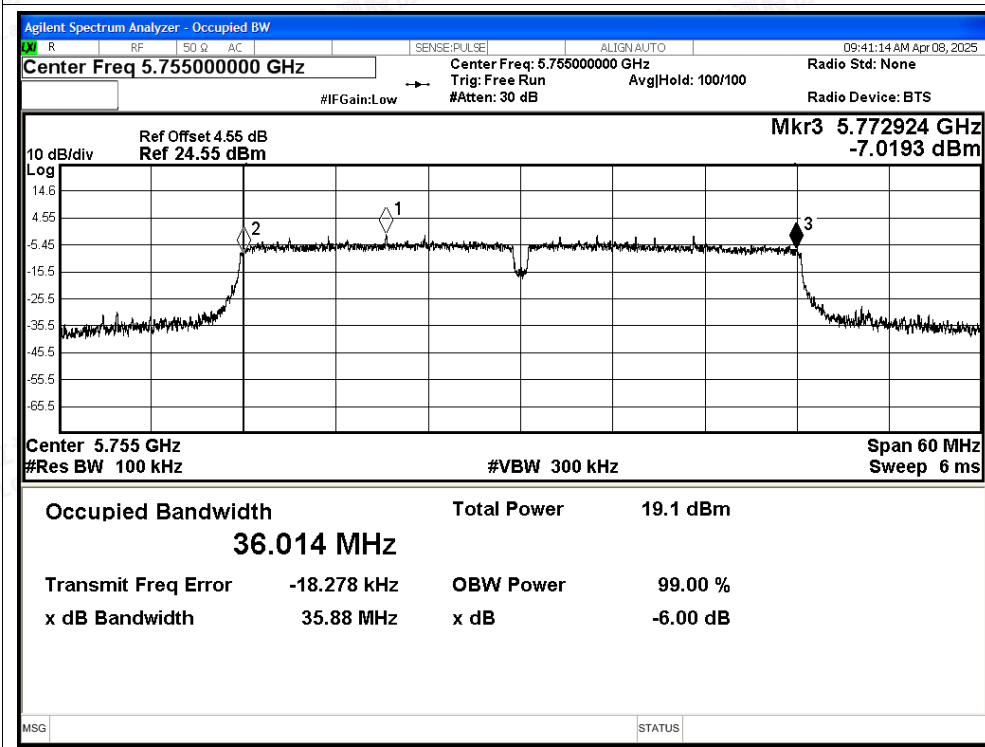

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## -6dB Bandwidth NVNT ac40 5795MHz Ant1

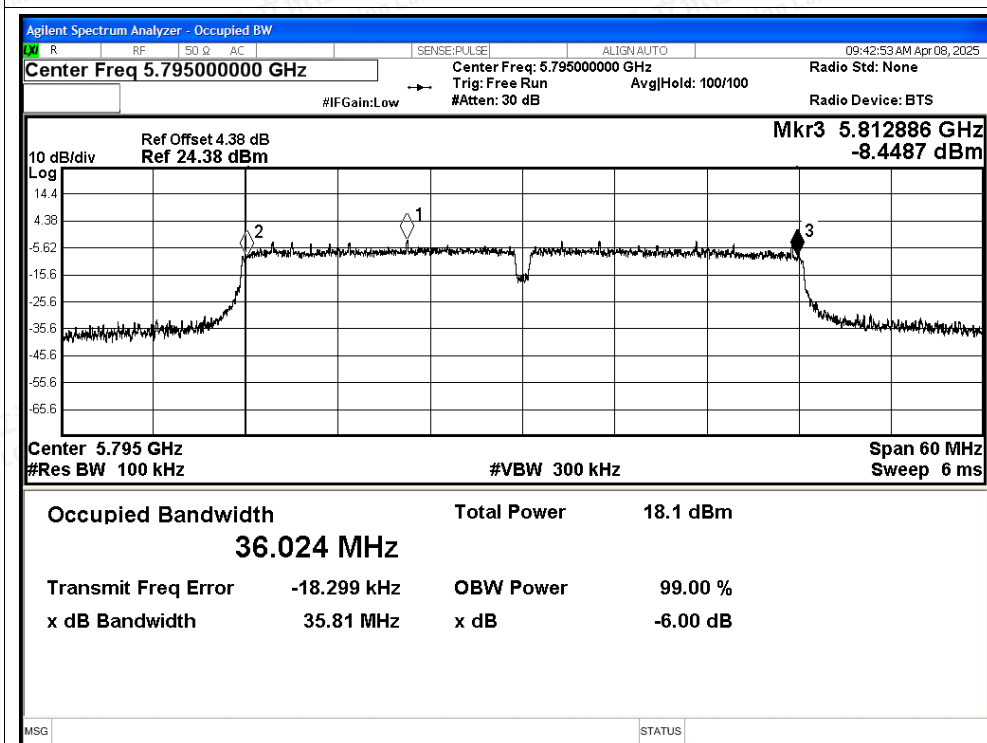

## -6dB Bandwidth NVNT ac80 5775MHz Ant1

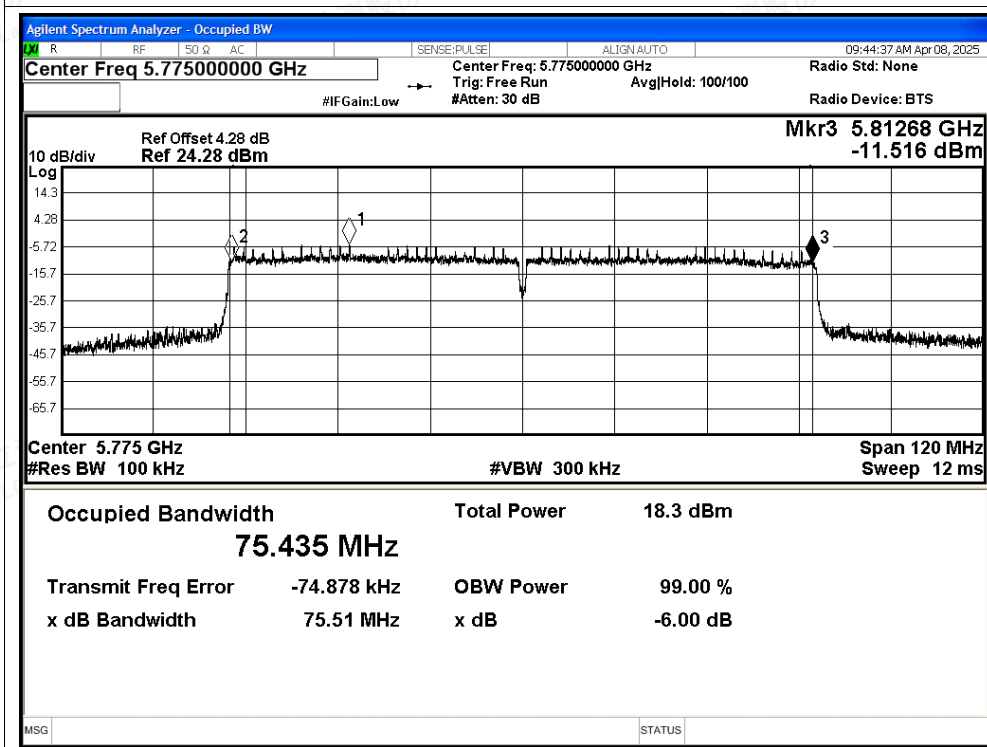

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



## F.2 Maximum Conducted Output Power

| Condition | Mode | Frequency (MHz) | Antenna | Conducted Power (dBm) | Duty Factor (dB) | Total Power (dBm) | Limit (dBm) | Verdict |
|-----------|------|-----------------|---------|-----------------------|------------------|-------------------|-------------|---------|
| NVNT      | a    | 5745            | Ant1    | 13.19                 | 0.24             | 13.43             | 30          | Pass    |
| NVNT      | a    | 5785            | Ant1    | 12.21                 | 0.24             | 12.45             | 30          | Pass    |
| NVNT      | a    | 5825            | Ant1    | 12.09                 | 0.24             | 12.33             | 30          | Pass    |
| NVNT      | n20  | 5745            | Ant1    | 13.22                 | 0.12             | 13.34             | 30          | Pass    |
| NVNT      | n20  | 5785            | Ant1    | 12.92                 | 0.12             | 13.04             | 30          | Pass    |
| NVNT      | n20  | 5825            | Ant1    | 12.45                 | 0.12             | 12.57             | 30          | Pass    |
| NVNT      | n40  | 5755            | Ant1    | 12.61                 | 0.24             | 12.85             | 30          | Pass    |
| NVNT      | n40  | 5795            | Ant1    | 11.11                 | 0.24             | 11.35             | 30          | Pass    |
| NVNT      | ac20 | 5745            | Ant1    | 13.31                 | 0.12             | 13.43             | 30          | Pass    |
| NVNT      | ac20 | 5785            | Ant1    | 12.1                  | 0.12             | 12.22             | 30          | Pass    |
| NVNT      | ac20 | 5825            | Ant1    | 11.24                 | 0.12             | 11.36             | 30          | Pass    |
| NVNT      | ac40 | 5755            | Ant1    | 12.58                 | 0.24             | 12.82             | 30          | Pass    |
| NVNT      | ac40 | 5795            | Ant1    | 11.53                 | 0.23             | 11.76             | 30          | Pass    |
| NVNT      | ac80 | 5775            | Ant1    | 11                    | 0.47             | 11.47             | 30          | Pass    |





### F.3 Maximum Power Spectral Density Level


| Condition | Mode | Frequency (MHz) | Antenna | Conducted PSD (dBm/500KHz) | Duty Factor (dB) | Total PSD (dBm/500KHz) | Limit (dBm/500KHz) | Verdict |
|-----------|------|-----------------|---------|----------------------------|------------------|------------------------|--------------------|---------|
| NVNT      | a    | 5745            | Ant1    | -0.28                      | 0.24             | -0.04                  | 30                 | Pass    |
| NVNT      | a    | 5785            | Ant1    | -1.31                      | 0.24             | -1.07                  | 30                 | Pass    |
| NVNT      | a    | 5825            | Ant1    | -1.19                      | 0.24             | -0.95                  | 30                 | Pass    |
| NVNT      | n20  | 5745            | Ant1    | -0.61                      | 0.12             | -0.49                  | 30                 | Pass    |
| NVNT      | n20  | 5785            | Ant1    | -0.98                      | 0.12             | -0.86                  | 30                 | Pass    |
| NVNT      | n20  | 5825            | Ant1    | -1.4                       | 0.12             | -1.28                  | 30                 | Pass    |
| NVNT      | n40  | 5755            | Ant1    | -4.19                      | 0.24             | -3.95                  | 30                 | Pass    |
| NVNT      | n40  | 5795            | Ant1    | -5.32                      | 0.24             | -5.08                  | 30                 | Pass    |
| NVNT      | ac20 | 5745            | Ant1    | -0.15                      | 0.12             | -0.03                  | 30                 | Pass    |
| NVNT      | ac20 | 5785            | Ant1    | -1.63                      | 0.12             | -1.51                  | 30                 | Pass    |
| NVNT      | ac20 | 5825            | Ant1    | -2.74                      | 0.12             | -2.62                  | 30                 | Pass    |
| NVNT      | ac40 | 5755            | Ant1    | -4.3                       | 0.24             | -4.06                  | 30                 | Pass    |
| NVNT      | ac40 | 5795            | Ant1    | -5.32                      | 0.23             | -5.09                  | 30                 | Pass    |
| NVNT      | ac80 | 5775            | Ant1    | -8.25                      | 0.47             | -7.78                  | 30                 | Pass    |






## Test Graphs

PSD NVNT a 5745MHz Ant1

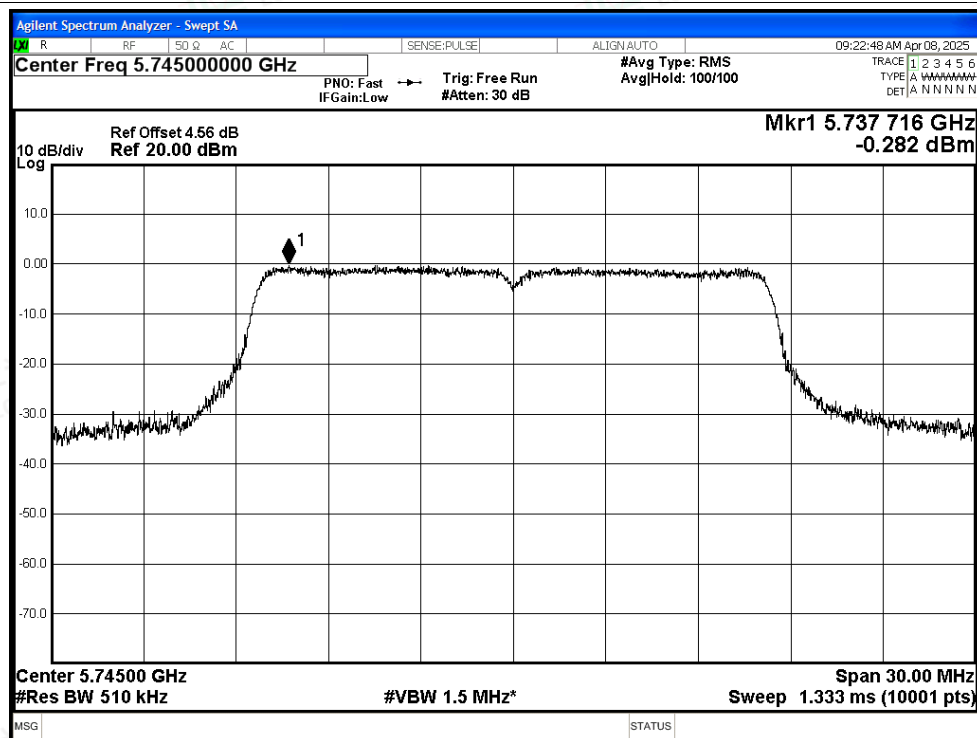


PSD NVNT a 5785MHz Ant1

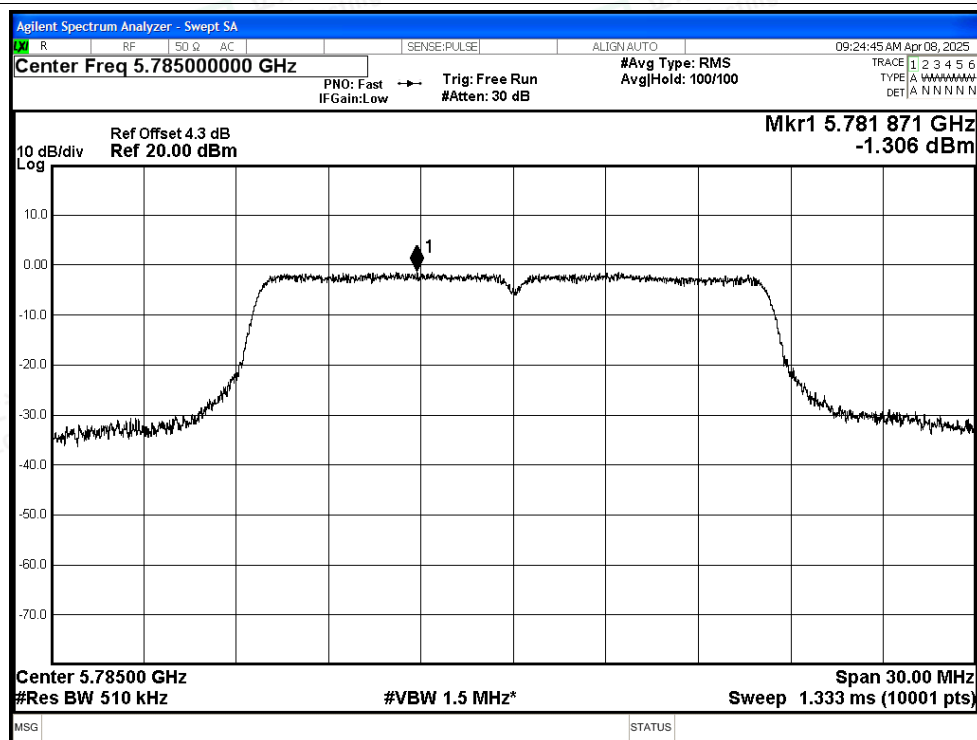








PSD NVNT a 5825MHz Ant1


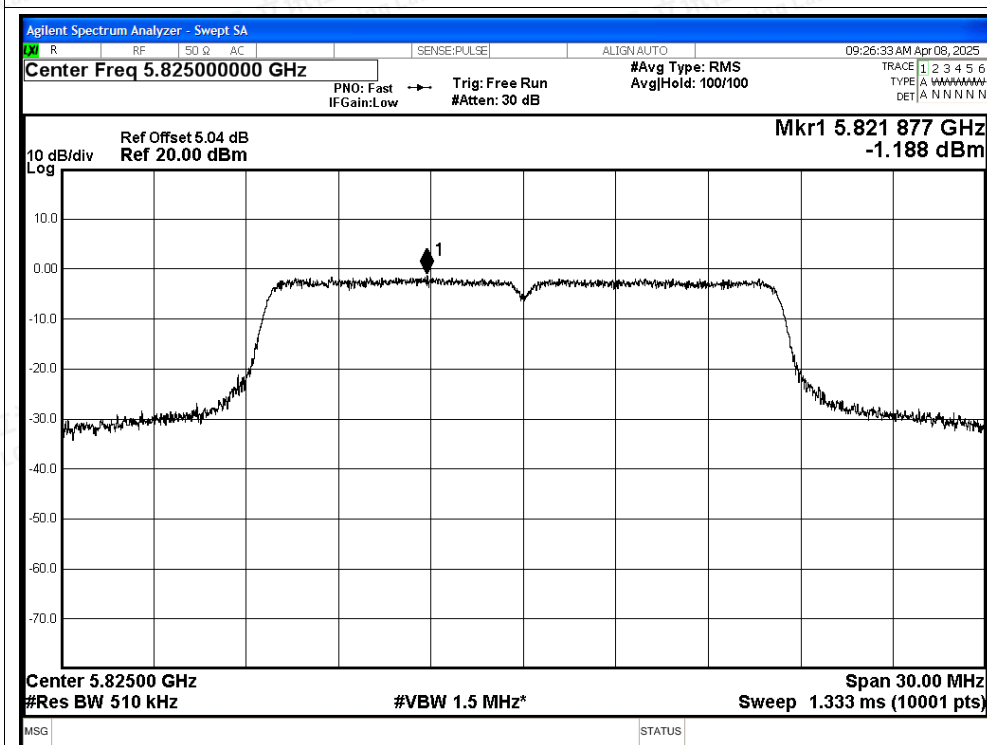




PSD NVNT n20 5745MHz Ant1


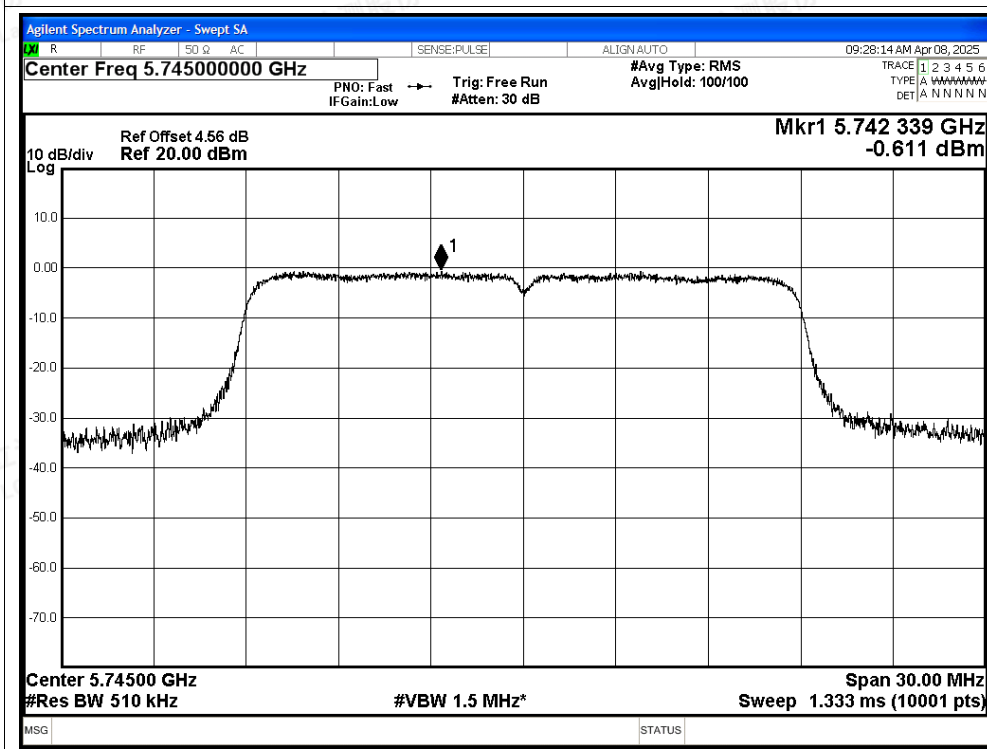


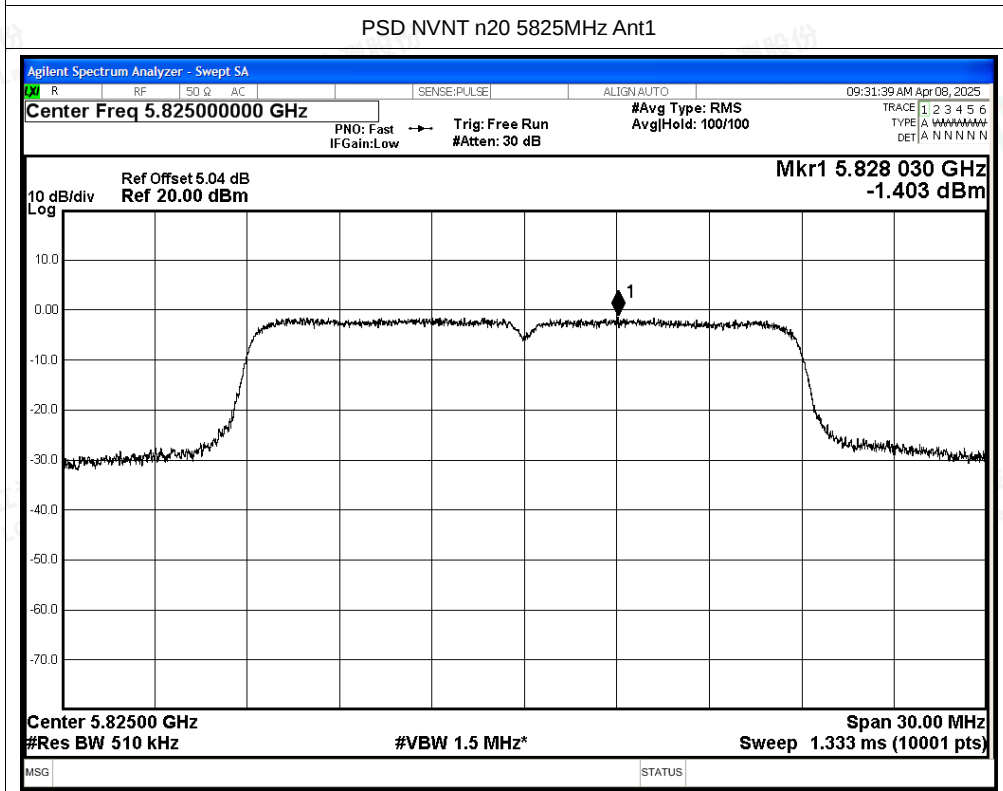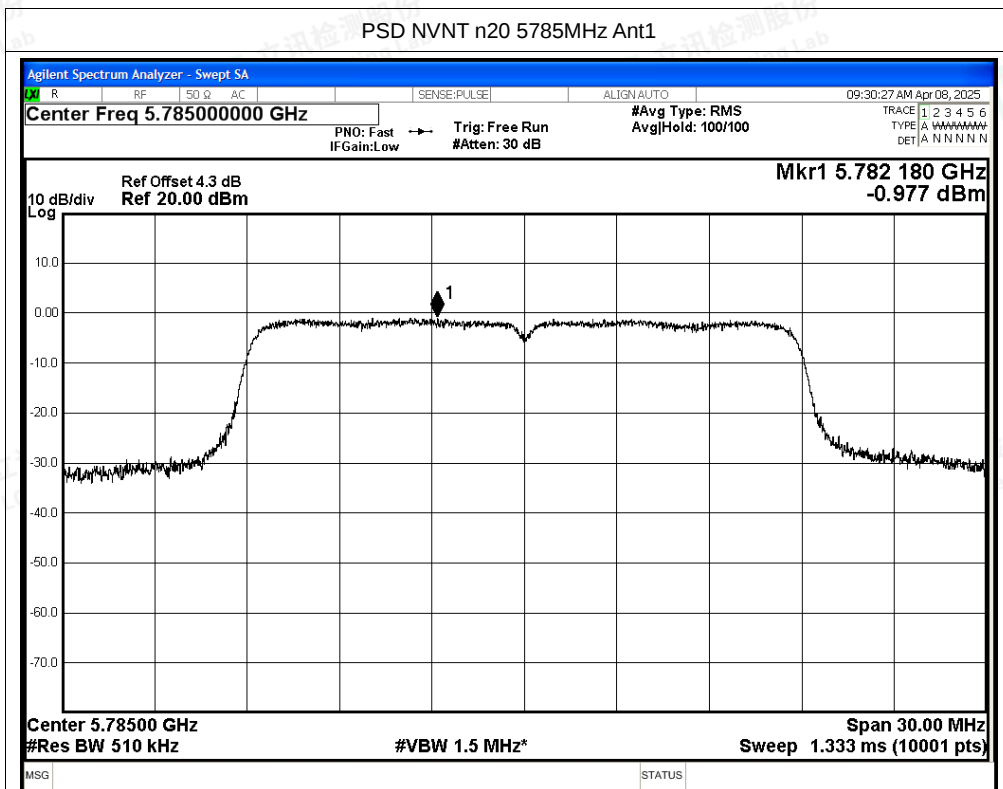

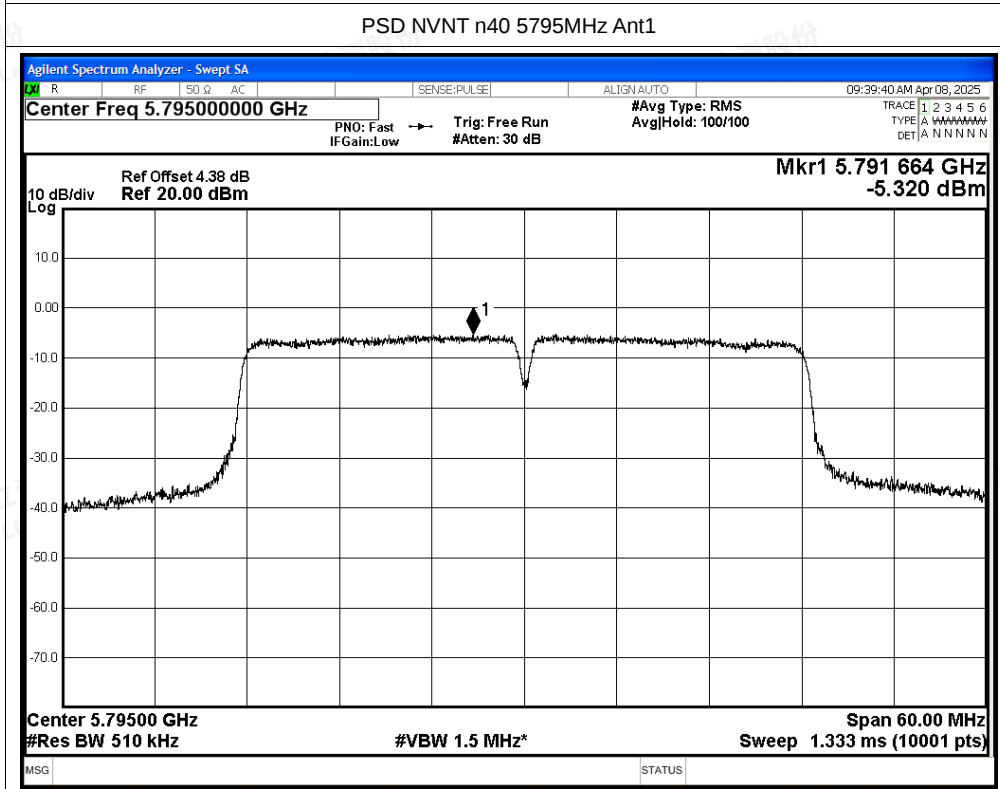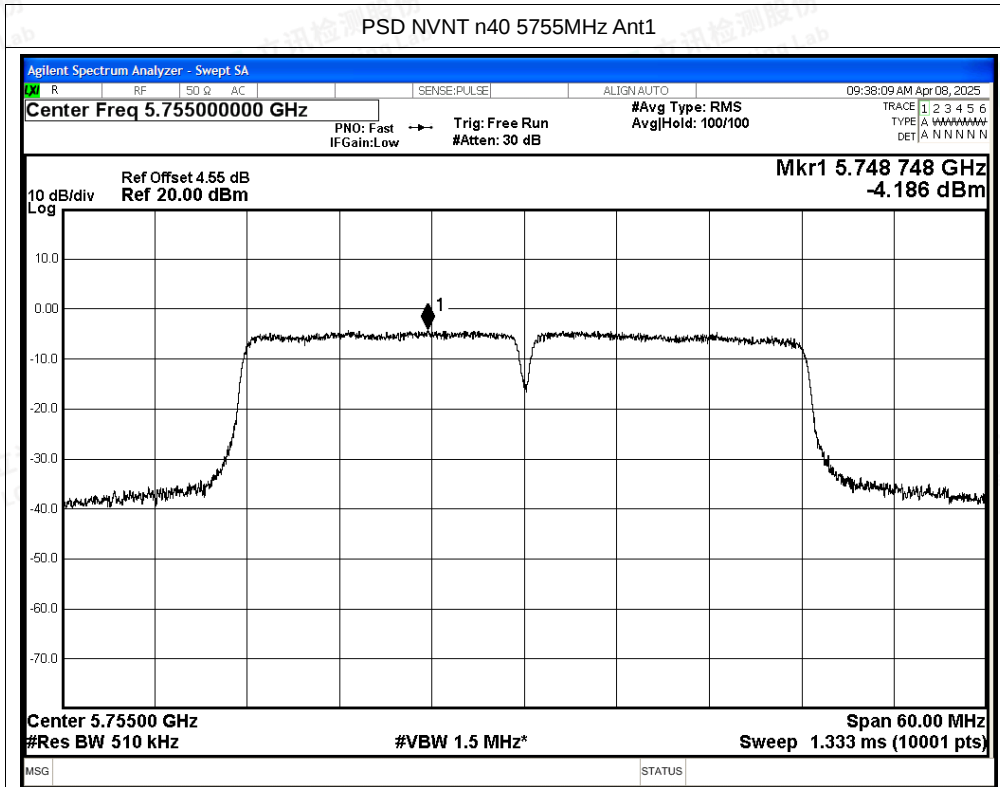

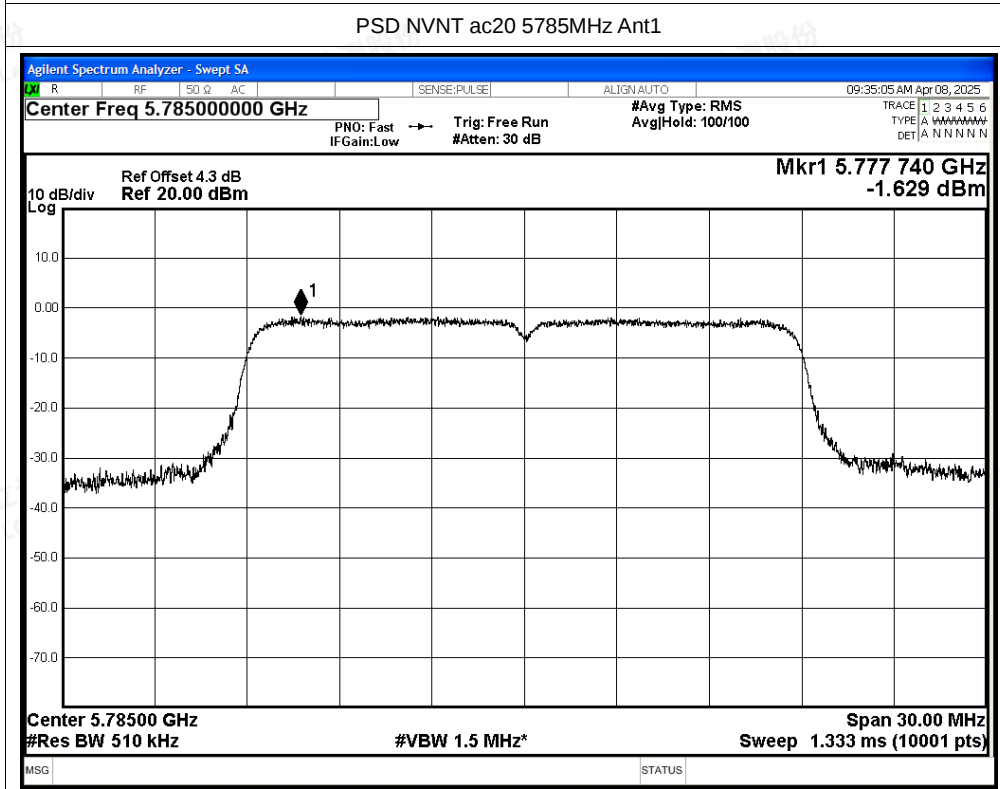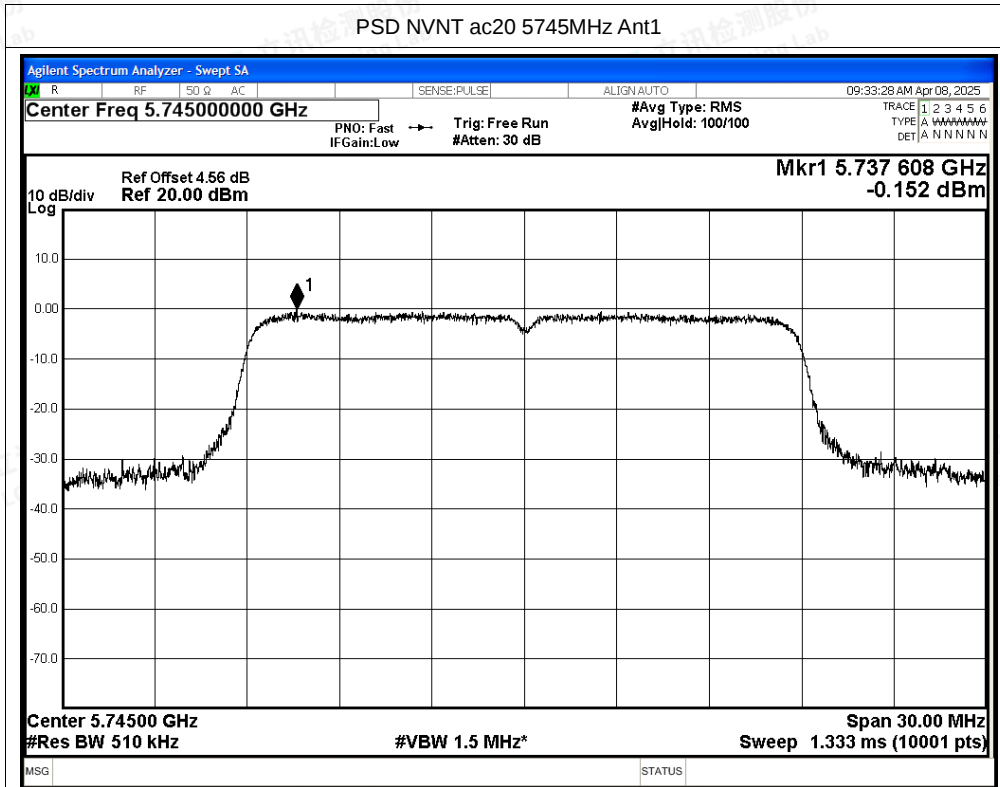

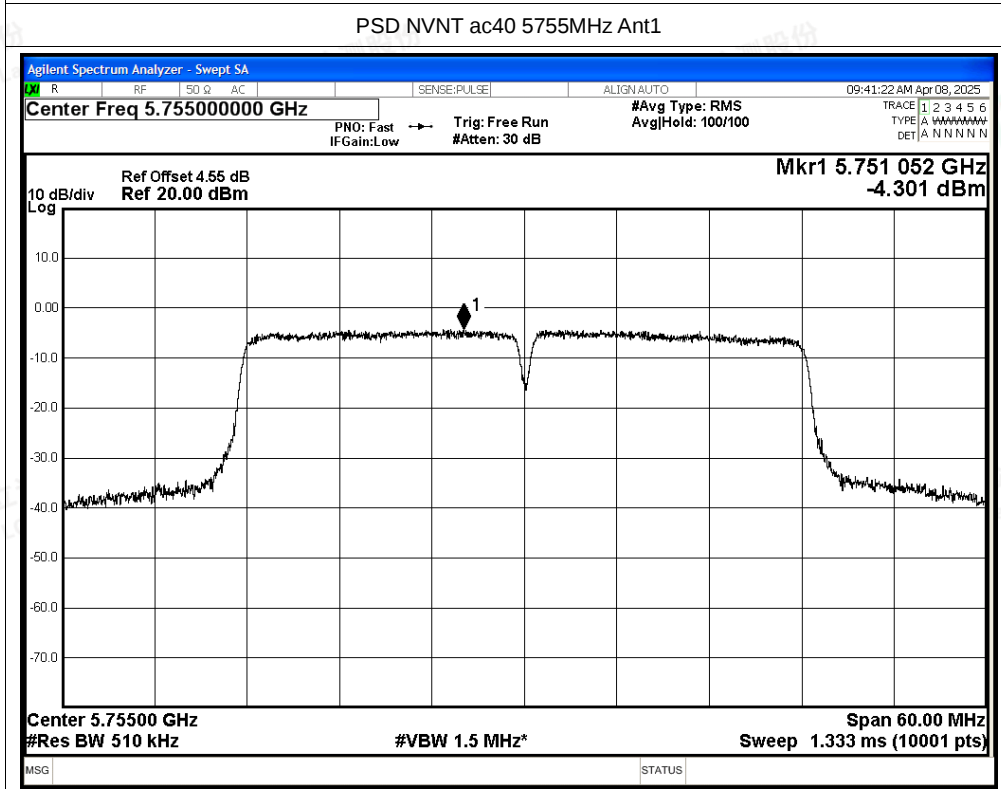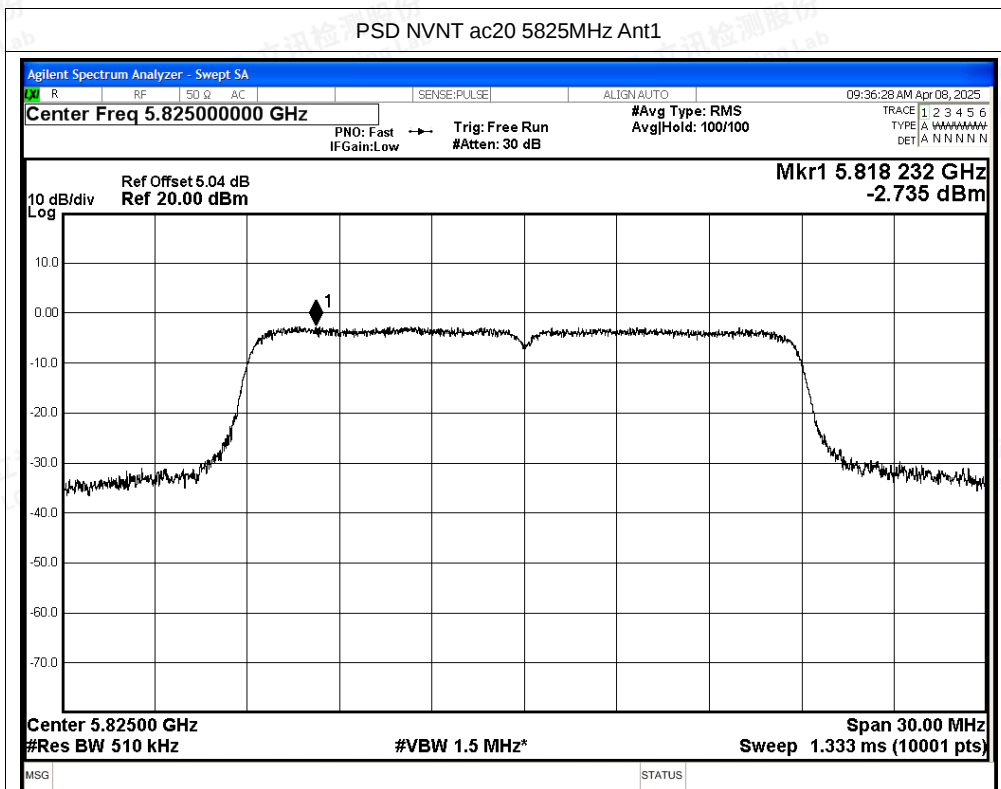

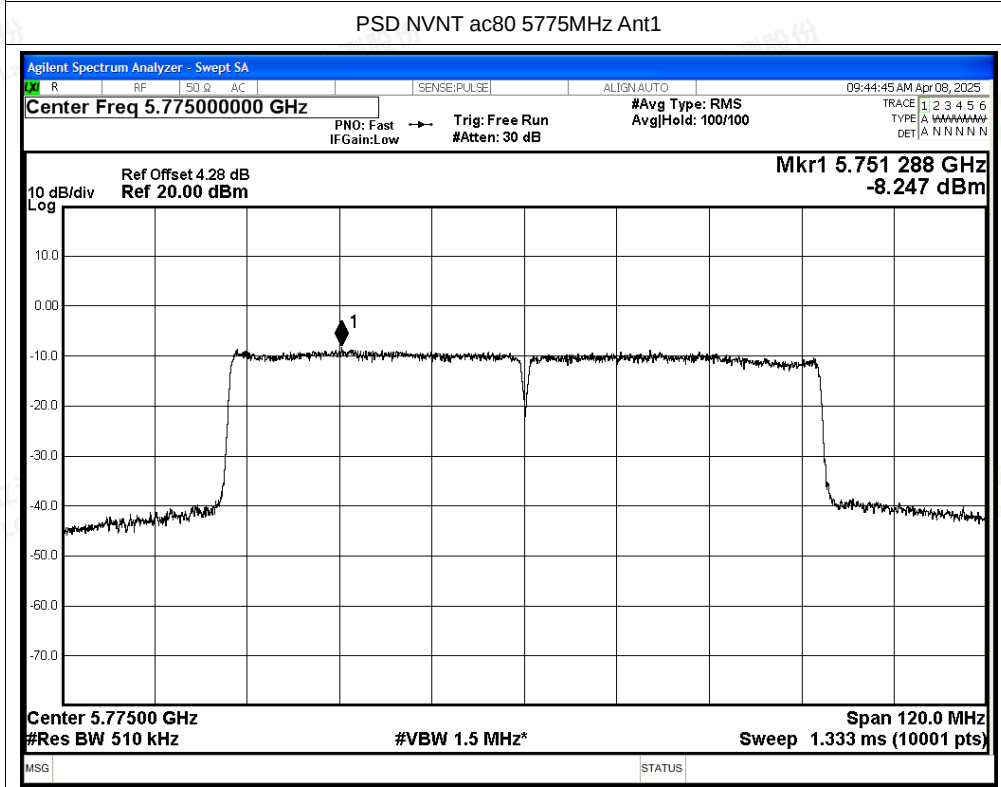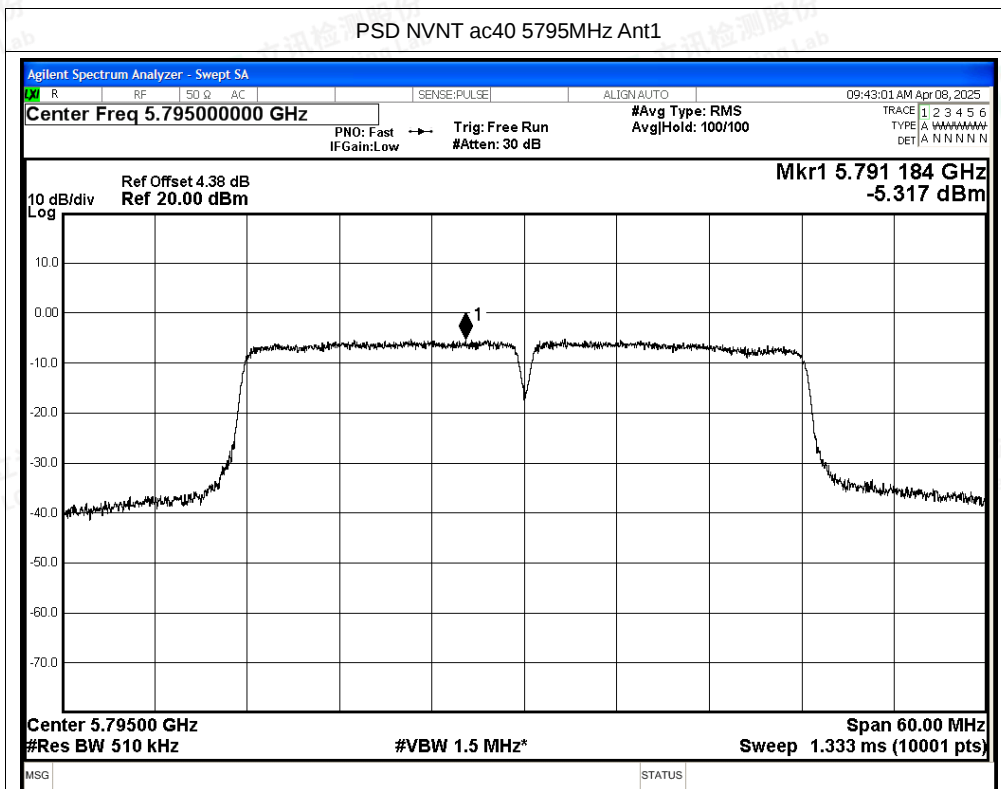



## F.4 Restrict Band

| Condition | Mode | Frequency (MHz) | Antenna | Spur Freq (MHz) | Power (dBm) | Gain (dBi) | Duty Factor (dB) | EIRP Power (dBm) | Detector | Limit (dBm) | Verdict |
|-----------|------|-----------------|---------|-----------------|-------------|------------|------------------|------------------|----------|-------------|---------|
| NVNT      | a    | 5745            | Ant1    | 5650            | -48.03      | 2.68       | -                | -27.06           | Peak     | -27         | Pass    |
| NVNT      | a    | 5745            | Ant1    | 5650            | -55.49      | 2.68       | 0.24             | -40.37           | Average  | -27         | Pass    |
| NVNT      | a    | 5745            | Ant1    | 5700            | -43.37      | 2.68       | -                | -20.7            | Peak     | 10          | Pass    |
| NVNT      | a    | 5745            | Ant1    | 5700            | -53.7       | 2.68       | 0.24             | -33.57           | Average  | 10          | Pass    |
| NVNT      | a    | 5745            | Ant1    | 5720            | -29.74      | 2.68       | -                | -30.55           | Peak     | 15.6        | Pass    |
| NVNT      | a    | 5745            | Ant1    | 5720            | -43.29      | 2.68       | 0.24             | -42.33           | Average  | 15.6        | Pass    |
| NVNT      | a    | 5745            | Ant1    | 5725            | -23.38      | 2.68       | -                | -35.52           | Peak     | 27          | Pass    |
| NVNT      | a    | 5745            | Ant1    | 5725            | -36.49      | 2.68       | 0.24             | -45.74           | Average  | 27          | Pass    |
| NVNT      | a    | 5825            | Ant1    | 5850            | -33.23      | 2.68       | -                | -42.01           | Peak     | 27          | Pass    |
| NVNT      | a    | 5825            | Ant1    | 5850            | -45.25      | 2.68       | 0.24             | -51.52           | Average  | 27          | Pass    |
| NVNT      | a    | 5825            | Ant1    | 5855            | -38.2       | 2.68       | -                | -43.49           | Peak     | 15.6        | Pass    |
| NVNT      | a    | 5825            | Ant1    | 5855            | -48.66      | 2.68       | 0.24             | -52.42           | Average  | 15.6        | Pass    |
| NVNT      | a    | 5825            | Ant1    | 5875            | -44.69      | 2.68       | -                | -45.34           | Peak     | 10          | Pass    |
| NVNT      | a    | 5825            | Ant1    | 5875            | -54.44      | 2.68       | 0.24             | -52.8            | Average  | 10          | Pass    |
| NVNT      | a    | 5825            | Ant1    | 5925            | -46.17      | 2.68       | -                | -39.85           | Peak     | -27         | Pass    |
| NVNT      | a    | 5825            | Ant1    | 5925            | -55.34      | 2.68       | 0.24             | -50.01           | Average  | -27         | Pass    |
| NVNT      | n20  | 5745            | Ant1    | 5650            | -48.02      | 2.68       | -                | -29.36           | Peak     | -27         | Pass    |
| NVNT      | n20  | 5745            | Ant1    | 5650            | -55.6       | 2.68       | 0.12             | -40.1            | Average  | -27         | Pass    |
| NVNT      | n20  | 5745            | Ant1    | 5700            | -42.53      | 2.68       | -                | -14.8            | Peak     | 10          | Pass    |
| NVNT      | n20  | 5745            | Ant1    | 5700            | -52.81      | 2.68       | 0.12             | -34.1            | Average  | 10          | Pass    |
| NVNT      | n20  | 5745            | Ant1    | 5720            | -32.04      | 2.68       | -                | -40.12           | Peak     | 15.6        | Pass    |
| NVNT      | n20  | 5745            | Ant1    | 5720            | -42.9       | 2.68       | 0.12             | -51.92           | Average  | 15.6        | Pass    |
| NVNT      | n20  | 5745            | Ant1    | 5725            | -17.48      | 2.68       | -                | -45.15           | Peak     | 27          | Pass    |
| NVNT      | n20  | 5745            | Ant1    | 5725            | -36.9       | 2.68       | 0.12             | -52.89           | Average  | 27          | Pass    |
| NVNT      | n20  | 5825            | Ant1    | 5850            | -42.8       | 2.68       | -                | -45.77           | Peak     | 27          | Pass    |
| NVNT      | n20  | 5825            | Ant1    | 5850            | -54.72      | 2.68       | 0.12             | -53.35           | Average  | 27          | Pass    |
| NVNT      | n20  | 5825            | Ant1    | 5855            | -47.83      | 2.68       | -                | -44.23           | Peak     | 15.6        | Pass    |
| NVNT      | n20  | 5825            | Ant1    | 5855            | -55.69      | 2.68       | 0.12             | -53.05           | Average  | 15.6        | Pass    |
| NVNT      | n20  | 5825            | Ant1    | 5875            | -48.45      | 2.68       | -                | -45.62           | Peak     | 10          | Pass    |
| NVNT      | n20  | 5825            | Ant1    | 5875            | -56.15      | 2.68       | 0.12             | -52.4            | Average  | 10          | Pass    |
| NVNT      | n20  | 5825            | Ant1    | 5925            | -46.91      | 2.68       | -                | -38.4            | Peak     | -27         | Pass    |
| NVNT      | n20  | 5825            | Ant1    | 5925            | -55.85      | 2.68       | 0.12             | -46.14           | Average  | -27         | Pass    |
| NVNT      | n40  | 5755            | Ant1    | 5650            | -48.3       | 2.68       | -                | -25.03           | Peak     | -27         | Pass    |
| NVNT      | n40  | 5755            | Ant1    | 5650            | -55.32      | 2.68       | 0.24             | -35.61           | Average  | -27         | Pass    |
| NVNT      | n40  | 5755            | Ant1    | 5700            | -41.08      | 2.68       | -                | -24.26           | Peak     | 10          | Pass    |
| NVNT      | n40  | 5755            | Ant1    | 5700            | -49.06      | 2.68       | 0.24             | -34.17           | Average  | 10          | Pass    |



Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity



|      |      |      |      |      |        |      |      |        |         |      |      |
|------|------|------|------|------|--------|------|------|--------|---------|------|------|
| NVNT | n40  | 5755 | Ant1 | 5720 | -27.71 | 2.68 | -    | -35.96 | Peak    | 15.6 | Pass |
| NVNT | n40  | 5755 | Ant1 | 5720 | -38.53 | 2.68 | 0.24 | -46.68 | Average | 15.6 | Pass |
| NVNT | n40  | 5755 | Ant1 | 5725 | -26.94 | 2.68 | -    | -37.29 | Peak    | 27   | Pass |
| NVNT | n40  | 5755 | Ant1 | 5725 | -37.09 | 2.68 | 0.24 | -48.56 | Average | 27   | Pass |
| NVNT | n40  | 5795 | Ant1 | 5850 | -38.64 | 2.68 | -    | -43.68 | Peak    | 27   | Pass |
| NVNT | n40  | 5795 | Ant1 | 5850 | -49.6  | 2.68 | 0.24 | -52.63 | Average | 27   | Pass |
| NVNT | n40  | 5795 | Ant1 | 5855 | -39.97 | 2.68 | -    | -46.62 | Peak    | 15.6 | Pass |
| NVNT | n40  | 5795 | Ant1 | 5855 | -51.48 | 2.68 | 0.24 | -53.83 | Average | 15.6 | Pass |
| NVNT | n40  | 5795 | Ant1 | 5875 | -46.36 | 2.68 | -    | -45.16 | Peak    | 10   | Pass |
| NVNT | n40  | 5795 | Ant1 | 5875 | -55.55 | 2.68 | 0.24 | -52.28 | Average | 10   | Pass |
| NVNT | n40  | 5795 | Ant1 | 5925 | -49.3  | 2.68 | -    | -41.5  | Peak    | -27  | Pass |
| NVNT | n40  | 5795 | Ant1 | 5925 | -56.75 | 2.68 | 0.24 | -50.51 | Average | -27  | Pass |
| NVNT | ac20 | 5745 | Ant1 | 5650 | -47.84 | 2.68 | -    | -26.73 | Peak    | -27  | Pass |
| NVNT | ac20 | 5745 | Ant1 | 5650 | -55.08 | 2.68 | 0.12 | -38.97 | Average | -27  | Pass |
| NVNT | ac20 | 5745 | Ant1 | 5700 | -44.18 | 2.68 | -    | -18.27 | Peak    | 10   | Pass |
| NVNT | ac20 | 5745 | Ant1 | 5700 | -53.31 | 2.68 | 0.12 | -33.03 | Average | 10   | Pass |
| NVNT | ac20 | 5745 | Ant1 | 5720 | -29.41 | 2.68 | -    | -30.65 | Peak    | 15.6 | Pass |
| NVNT | ac20 | 5745 | Ant1 | 5720 | -41.77 | 2.68 | 0.12 | -42.26 | Average | 15.6 | Pass |
| NVNT | ac20 | 5745 | Ant1 | 5725 | -20.95 | 2.68 | -    | -35.65 | Peak    | 27   | Pass |
| NVNT | ac20 | 5745 | Ant1 | 5725 | -35.83 | 2.68 | 0.12 | -46.93 | Average | 27   | Pass |
| NVNT | ac20 | 5825 | Ant1 | 5850 | -33.33 | 2.68 | -    | -43.49 | Peak    | 27   | Pass |
| NVNT | ac20 | 5825 | Ant1 | 5850 | -45.06 | 2.68 | 0.12 | -52.28 | Average | 27   | Pass |
| NVNT | ac20 | 5825 | Ant1 | 5855 | -38.33 | 2.68 | -    | -44.36 | Peak    | 15.6 | Pass |
| NVNT | ac20 | 5825 | Ant1 | 5855 | -49.73 | 2.68 | 0.12 | -52.76 | Average | 15.6 | Pass |
| NVNT | ac20 | 5825 | Ant1 | 5875 | -46.17 | 2.68 | -    | -44.82 | Peak    | 10   | Pass |
| NVNT | ac20 | 5825 | Ant1 | 5875 | -55.08 | 2.68 | 0.12 | -52.23 | Average | 10   | Pass |
| NVNT | ac20 | 5825 | Ant1 | 5925 | -47.04 | 2.68 | -    | -37.31 | Peak    | -27  | Pass |
| NVNT | ac20 | 5825 | Ant1 | 5925 | -55.56 | 2.68 | 0.12 | -45.47 | Average | -27  | Pass |
| NVNT | ac40 | 5755 | Ant1 | 5650 | -47.5  | 2.68 | -    | -25.46 | Peak    | -27  | Pass |
| NVNT | ac40 | 5755 | Ant1 | 5650 | -55.15 | 2.68 | 0.24 | -35.51 | Average | -27  | Pass |
| NVNT | ac40 | 5755 | Ant1 | 5700 | -39.99 | 2.68 | -    | -21.5  | Peak    | 10   | Pass |
| NVNT | ac40 | 5755 | Ant1 | 5700 | -48.39 | 2.68 | 0.24 | -33.18 | Average | 10   | Pass |
| NVNT | ac40 | 5755 | Ant1 | 5720 | -28.14 | 2.68 | -    | -34.56 | Peak    | 15.6 | Pass |
| NVNT | ac40 | 5755 | Ant1 | 5720 | -38.43 | 2.68 | 0.24 | -46.9  | Average | 15.6 | Pass |
| NVNT | ac40 | 5755 | Ant1 | 5725 | -24.18 | 2.68 | -    | -40.15 | Peak    | 27   | Pass |
| NVNT | ac40 | 5755 | Ant1 | 5725 | -36.1  | 2.68 | 0.24 | -48.55 | Average | 27   | Pass |
| NVNT | ac40 | 5795 | Ant1 | 5850 | -37.24 | 2.68 | -    | -44.68 | Peak    | 27   | Pass |
| NVNT | ac40 | 5795 | Ant1 | 5850 | -49.81 | 2.68 | 0.23 | -52.3  | Average | 27   | Pass |
| NVNT | ac40 | 5795 | Ant1 | 5855 | -42.83 | 2.68 | -    | -45.77 | Peak    | 15.6 | Pass |
| NVNT | ac40 | 5795 | Ant1 | 5855 | -51.46 | 2.68 | 0.23 | -53.92 | Average | 15.6 | Pass |
| NVNT | ac40 | 5795 | Ant1 | 5875 | -47.36 | 2.68 | -    | -42.24 | Peak    | 10   | Pass |



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



|      |      |      |      |      |        |      |      |        |         |      |      |
|------|------|------|------|------|--------|------|------|--------|---------|------|------|
| NVNT | ac40 | 5795 | Ant1 | 5875 | -55.21 | 2.68 | 0.23 | -50.06 | Average | 10   | Pass |
| NVNT | ac40 | 5795 | Ant1 | 5925 | -48.45 | 2.68 | -    | -30.23 | Peak    | -27  | Pass |
| NVNT | ac40 | 5795 | Ant1 | 5925 | -56.83 | 2.68 | 0.23 | -38.93 | Average | -27  | Pass |
| NVNT | ac80 | 5775 | Ant1 | 5650 | -44.92 | 2.68 | -    | -26.32 | Peak    | -27  | Pass |
| NVNT | ac80 | 5775 | Ant1 | 5650 | -53.21 | 2.68 | 0.47 | -36.12 | Average | -27  | Pass |
| NVNT | ac80 | 5775 | Ant1 | 5700 | -32.91 | 2.68 | -    | -22.35 | Peak    | 10   | Pass |
| NVNT | ac80 | 5775 | Ant1 | 5700 | -42.08 | 2.68 | 0.47 | -34.77 | Average | 10   | Pass |
| NVNT | ac80 | 5775 | Ant1 | 5720 | -29    | 2.68 | -    | -26.56 | Peak    | 15.6 | Pass |
| NVNT | ac80 | 5775 | Ant1 | 5720 | -39.27 | 2.68 | 0.47 | -37.91 | Average | 15.6 | Pass |
| NVNT | ac80 | 5775 | Ant1 | 5725 | -25.03 | 2.68 | -    | -31.11 | Peak    | 27   | Pass |
| NVNT | ac80 | 5775 | Ant1 | 5725 | -37.92 | 2.68 | 0.47 | -38.6  | Average | 27   | Pass |
| NVNT | ac80 | 5775 | Ant1 | 5850 | -29.24 | 2.68 | -    | -37.11 | Peak    | 27   | Pass |
| NVNT | ac80 | 5775 | Ant1 | 5850 | -41.06 | 2.68 | 0.47 | -44.05 | Average | 27   | Pass |
| NVNT | ac80 | 5775 | Ant1 | 5855 | -33.79 | 2.68 | -    | -45.14 | Peak    | 15.6 | Pass |
| NVNT | ac80 | 5775 | Ant1 | 5855 | -41.75 | 2.68 | 0.47 | -52.87 | Average | 15.6 | Pass |
| NVNT | ac80 | 5775 | Ant1 | 5875 | -39.79 | 2.68 | -    | -27.06 | Peak    | 10   | Pass |
| NVNT | ac80 | 5775 | Ant1 | 5875 | -47.2  | 2.68 | 0.47 | -40.37 | Average | 10   | Pass |
| NVNT | ac80 | 5775 | Ant1 | 5925 | -47.82 | 2.68 | -    | -20.7  | Peak    | -27  | Pass |
| NVNT | ac80 | 5775 | Ant1 | 5925 | -56.02 | 2.68 | 0.47 | -33.57 | Average | -27  | Pass |



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




## Test Graphs

## Restrict Band NVNT a 5745MHz Ant1 Peak

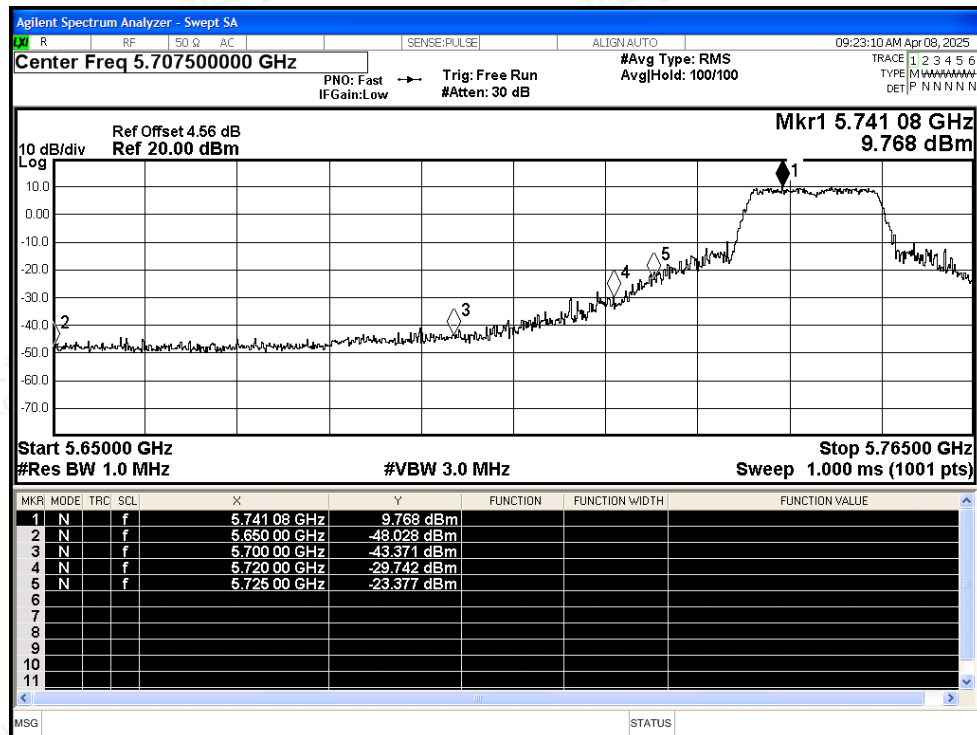


## Restrict Band NVNT a 5745MHz Ant1 Average

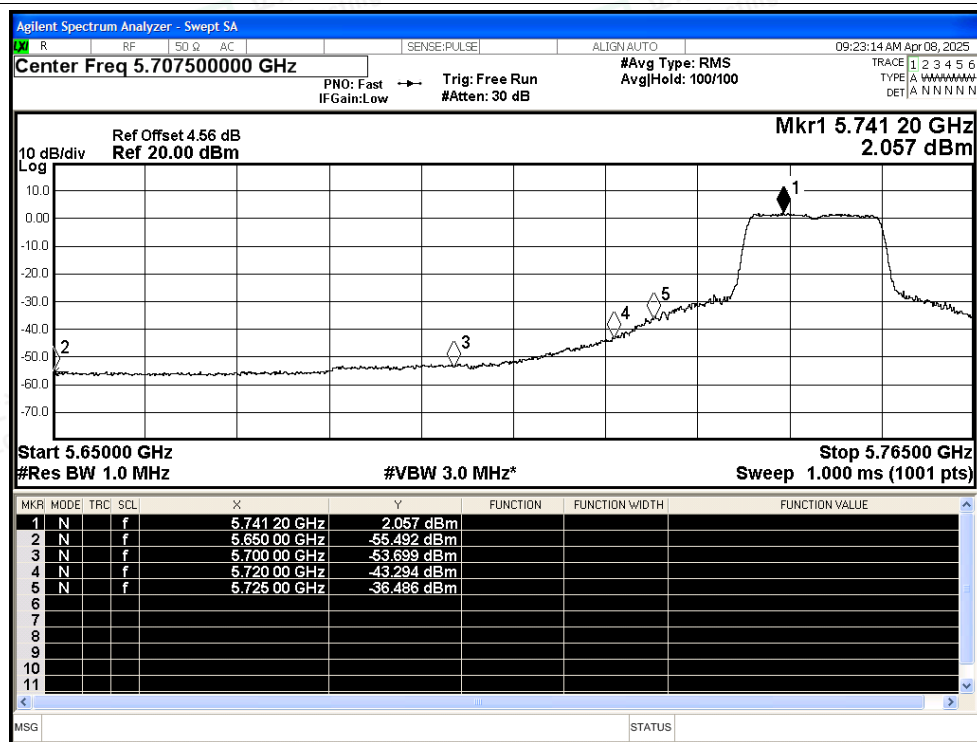




## Restrict Band NVNT a 5825MHz Ant1 Peak

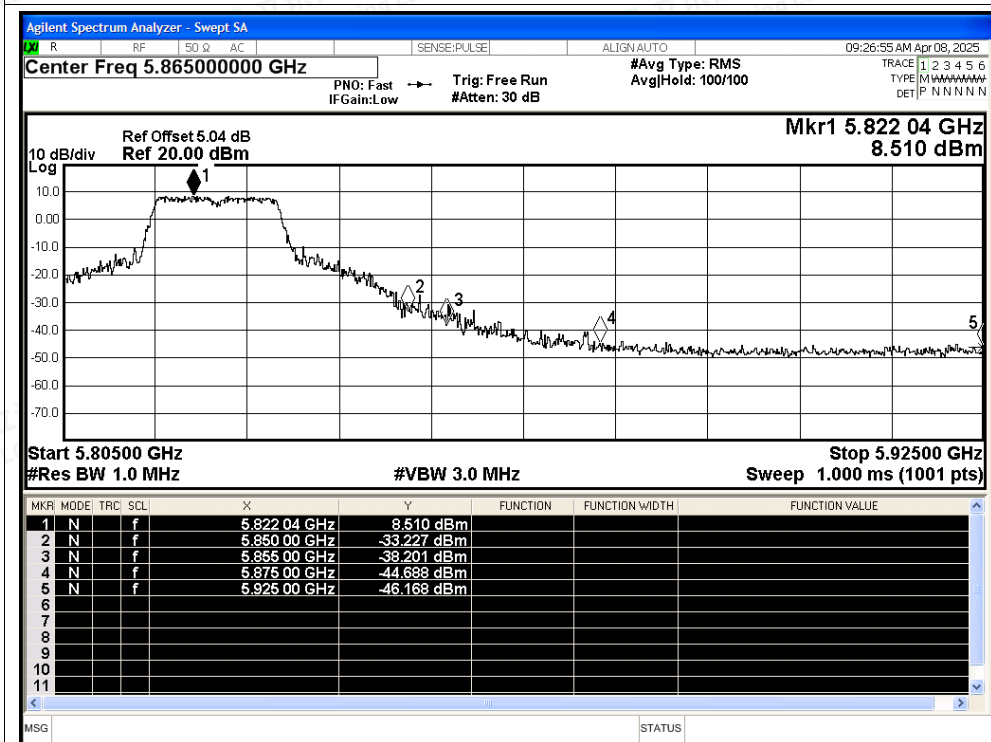


## Restrict Band NVNT a 5825MHz Ant1 Average

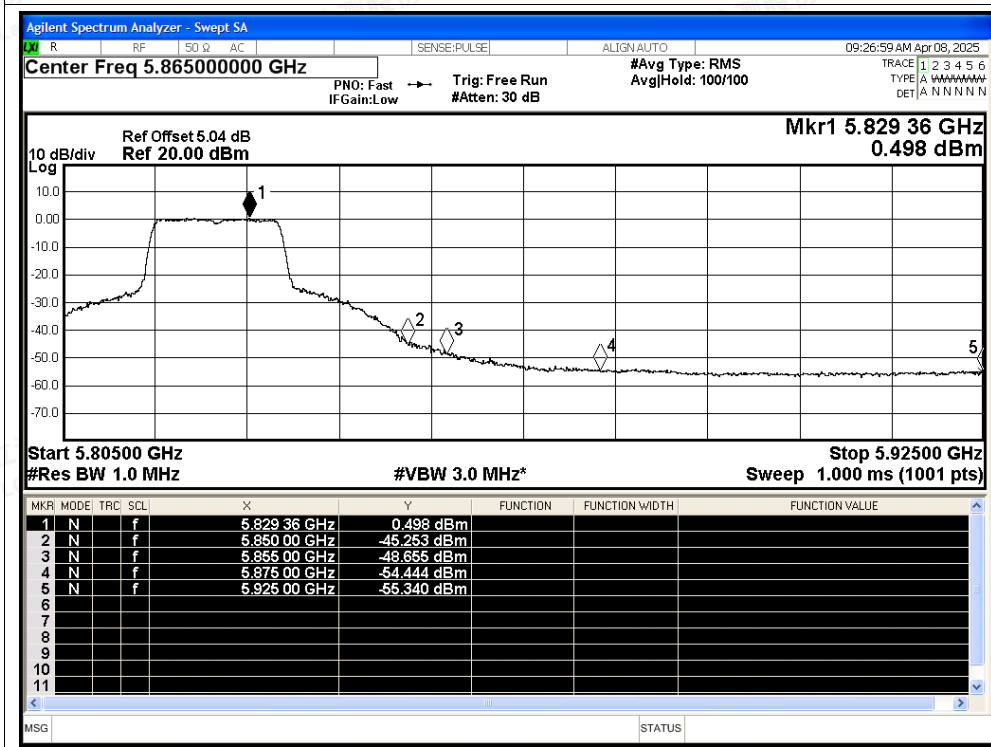




## Restrict Band NVNT n20 5745MHz Ant1 Peak

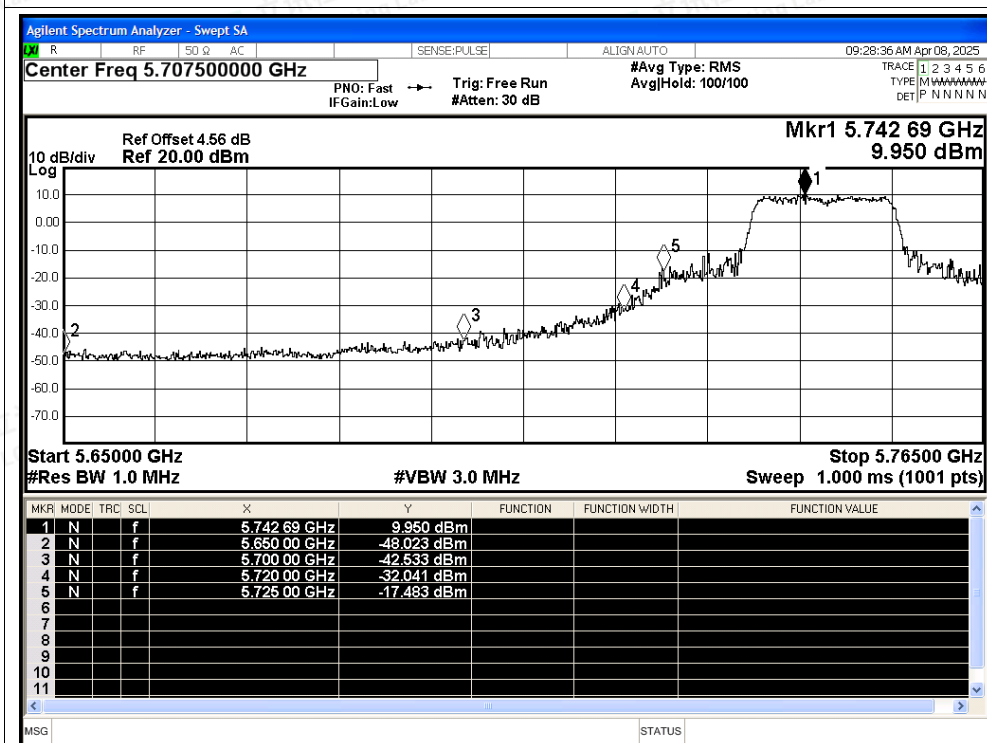

## Restrict Band NVNT n20 5745MHz Ant1 Average

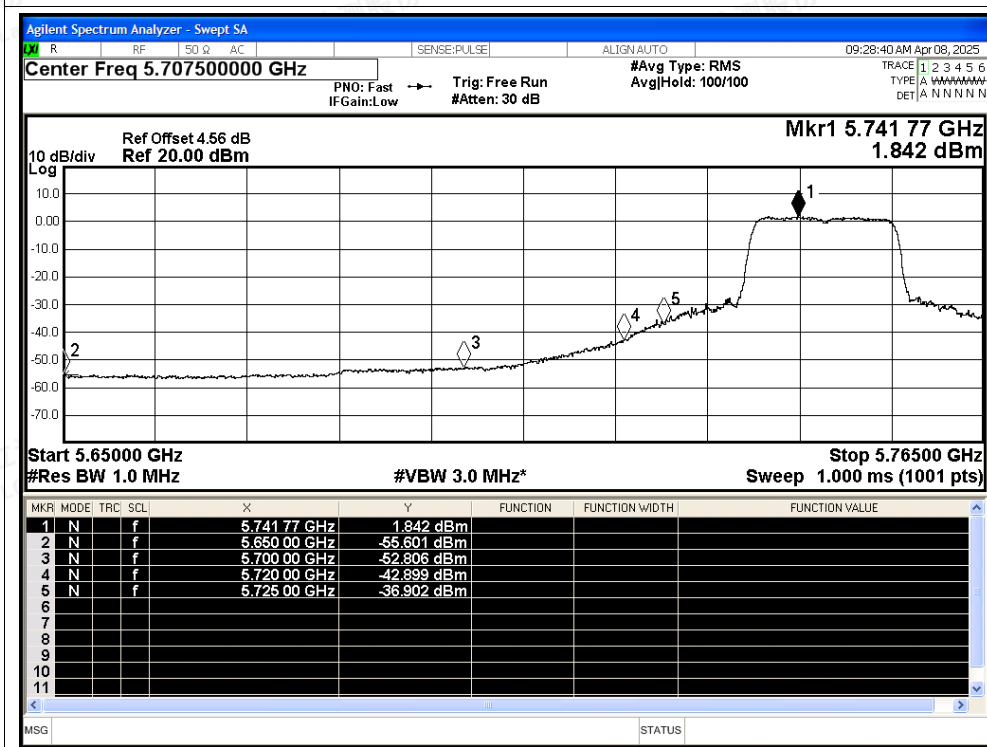

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT n20 5825MHz Ant1 Peak

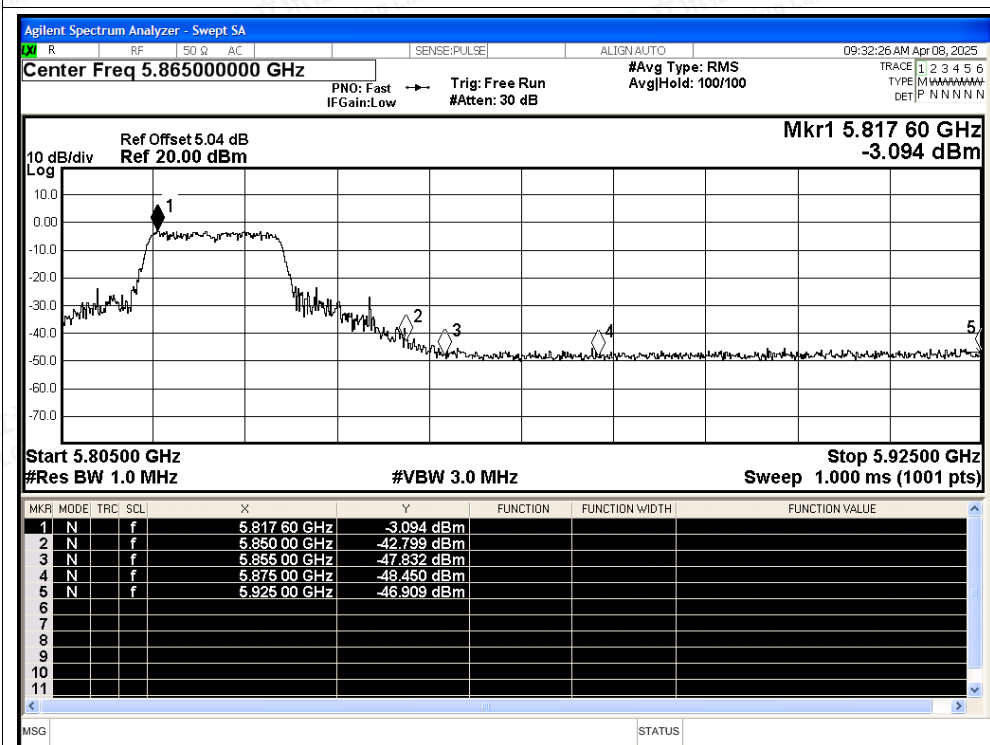

## Restrict Band NVNT n20 5825MHz Ant1 Average

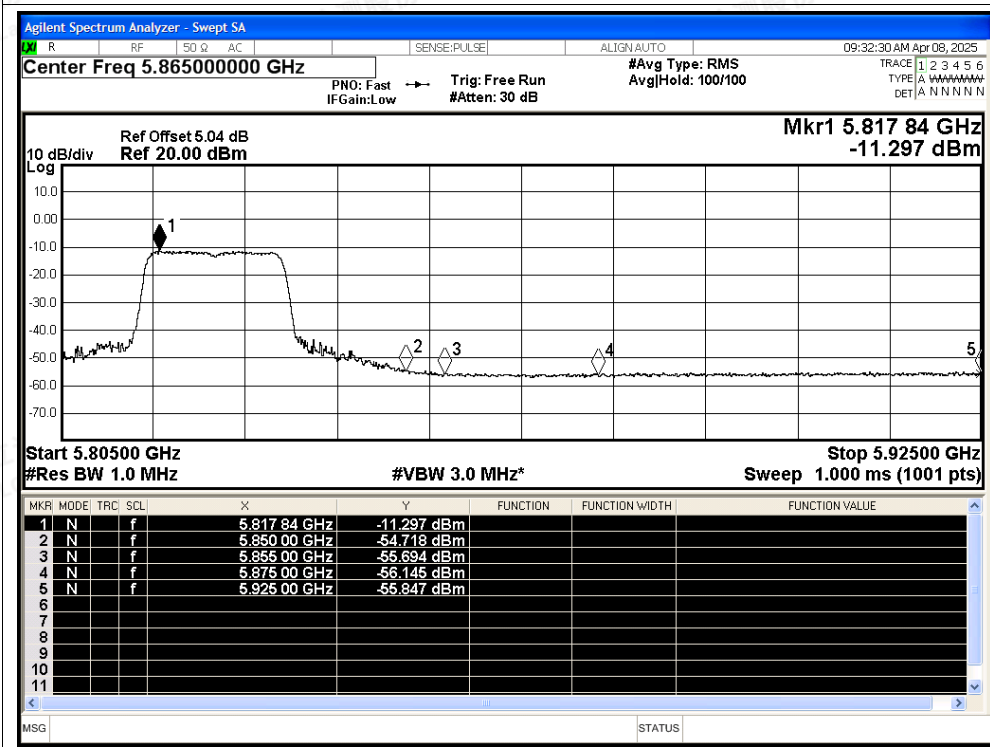

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT n40 5755MHz Ant1 Peak

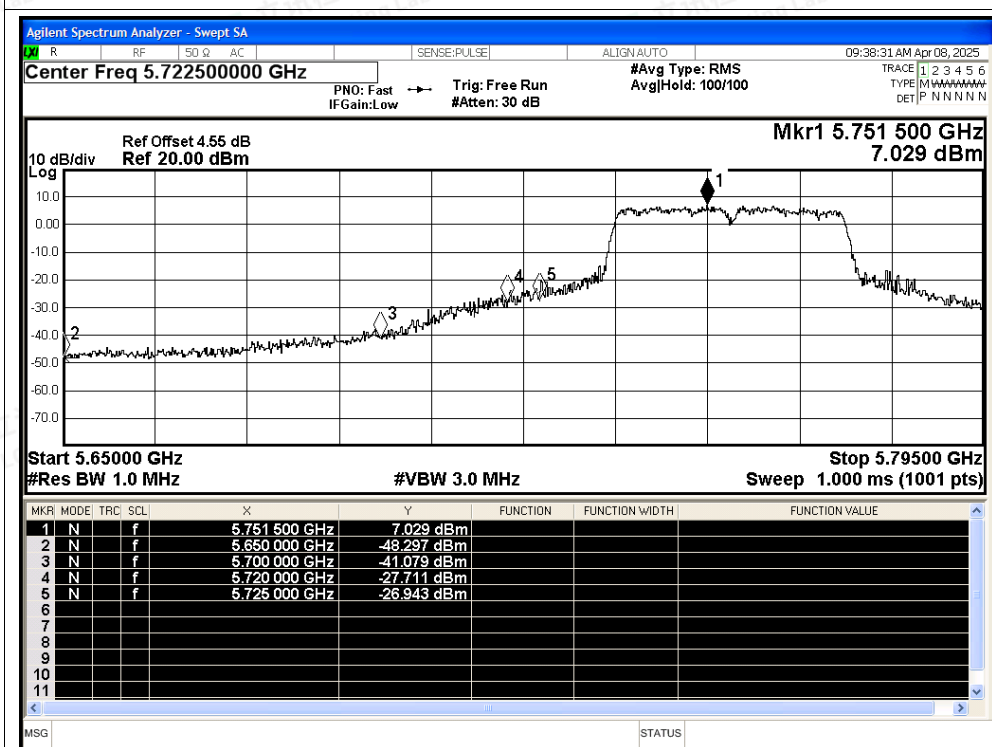

## Restrict Band NVNT n40 5755MHz Ant1 Average

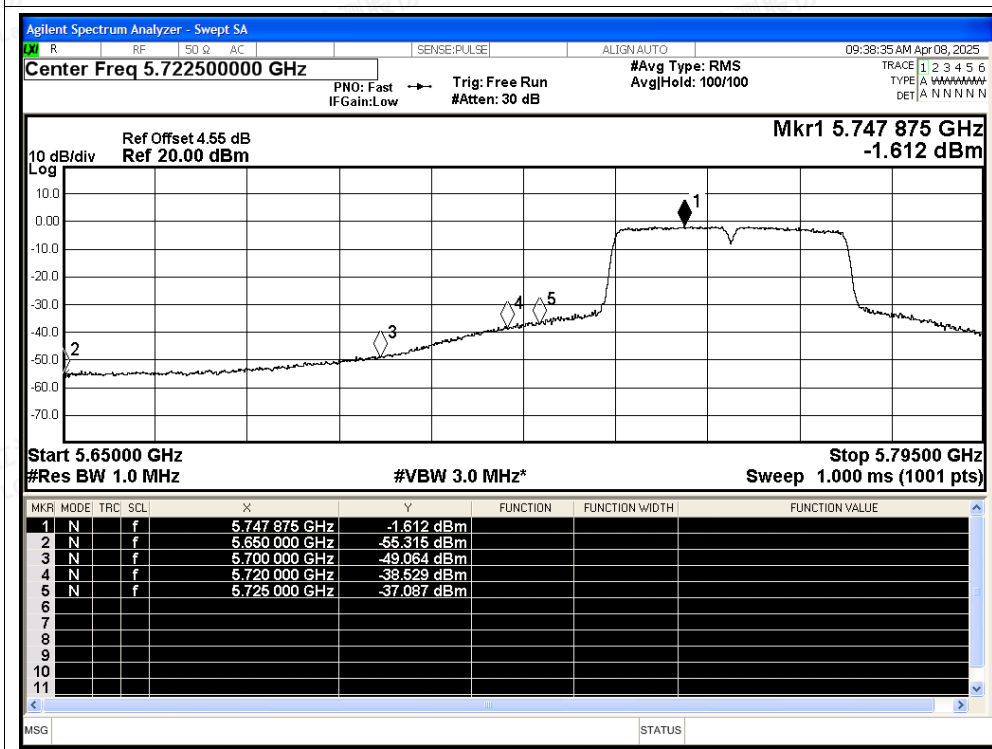

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT n40 5795MHz Ant1 Peak

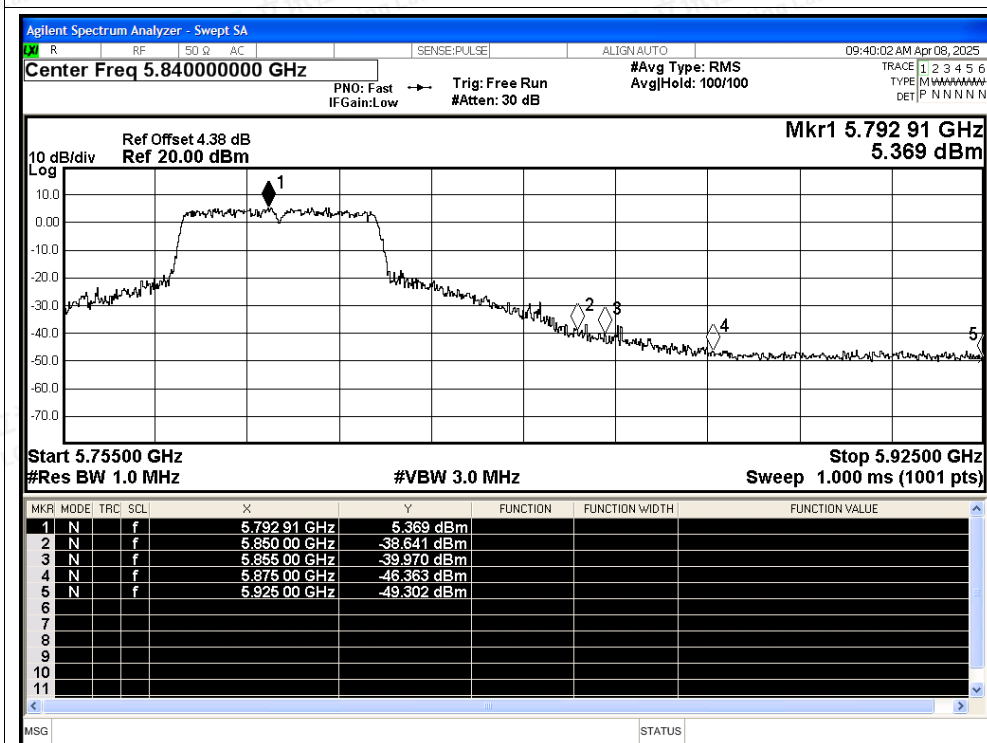

## Restrict Band NVNT n40 5795MHz Ant1 Average

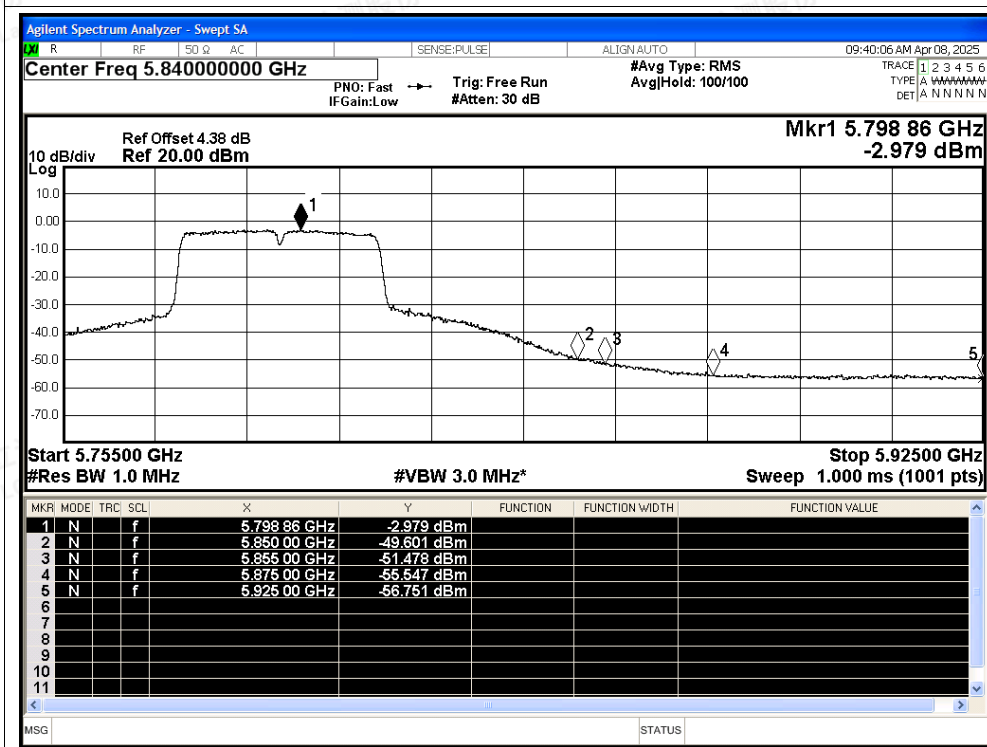

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT ac20 5745MHz Ant1 Peak

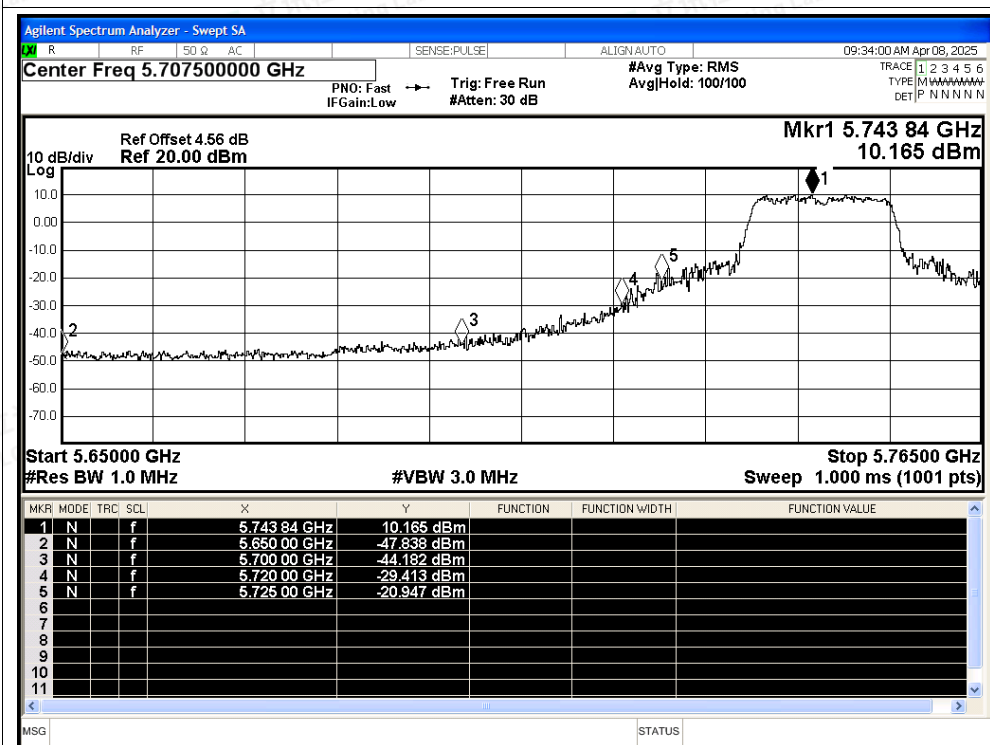

## Restrict Band NVNT ac20 5745MHz Ant1 Average

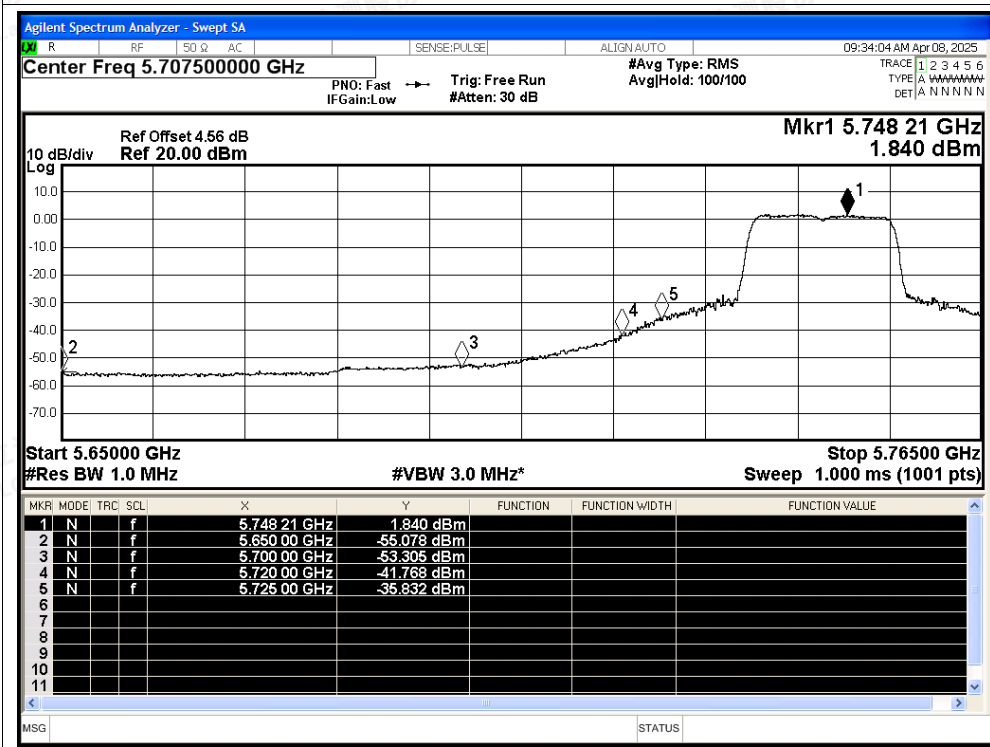

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT ac20 5825MHz Ant1 Peak

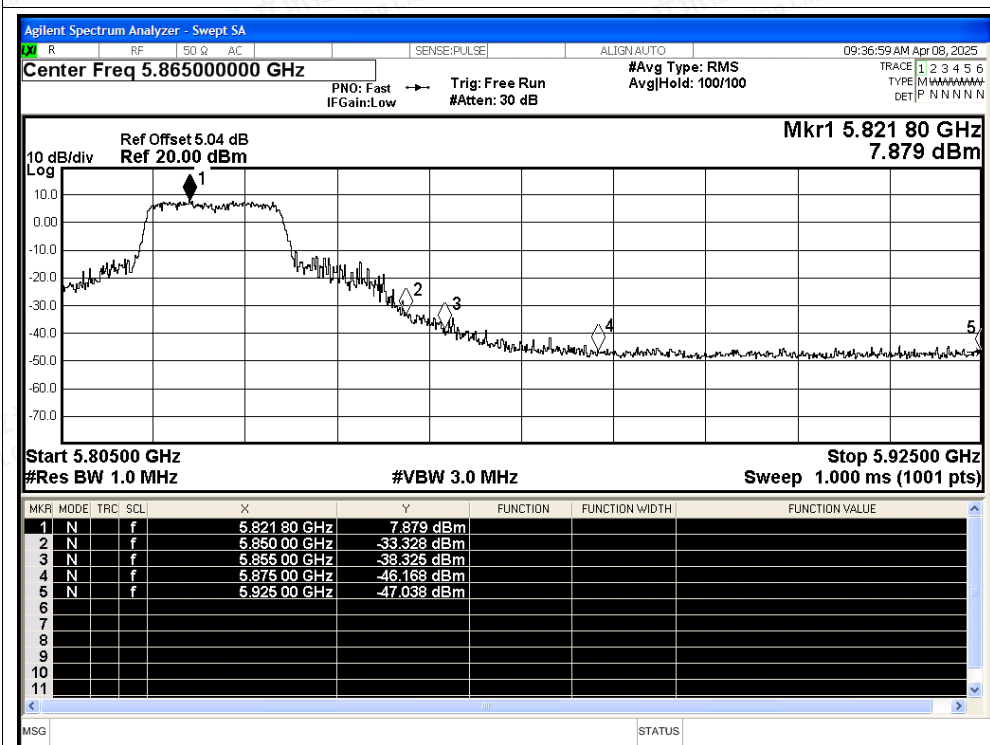

## Restrict Band NVNT ac20 5825MHz Ant1 Average

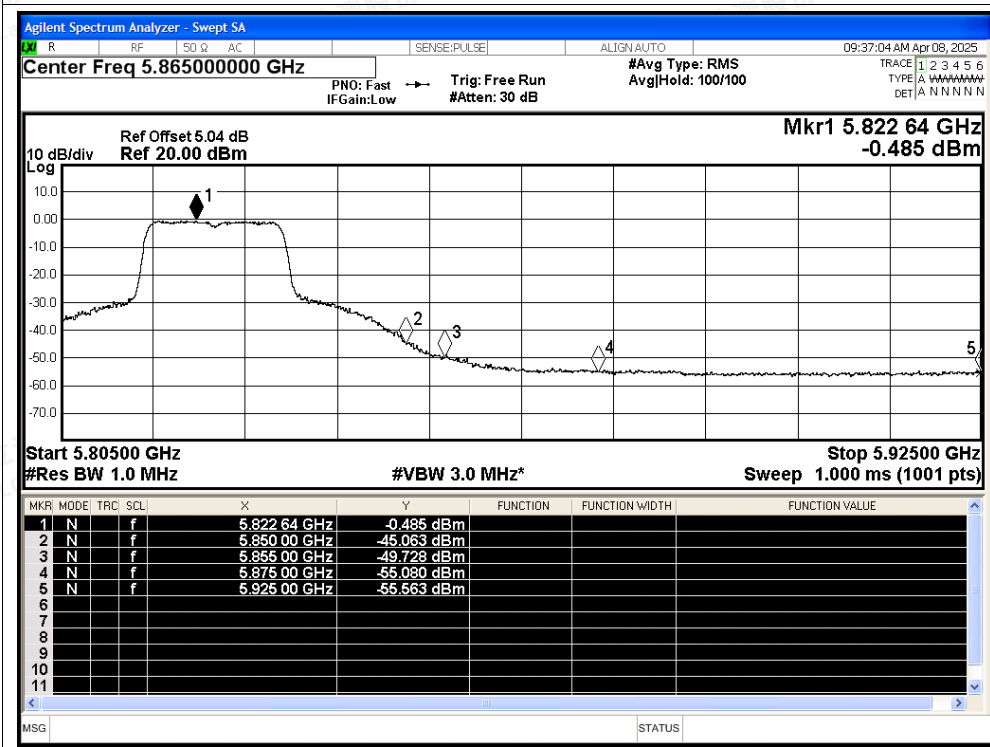

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT ac40 5755MHz Ant1 Peak

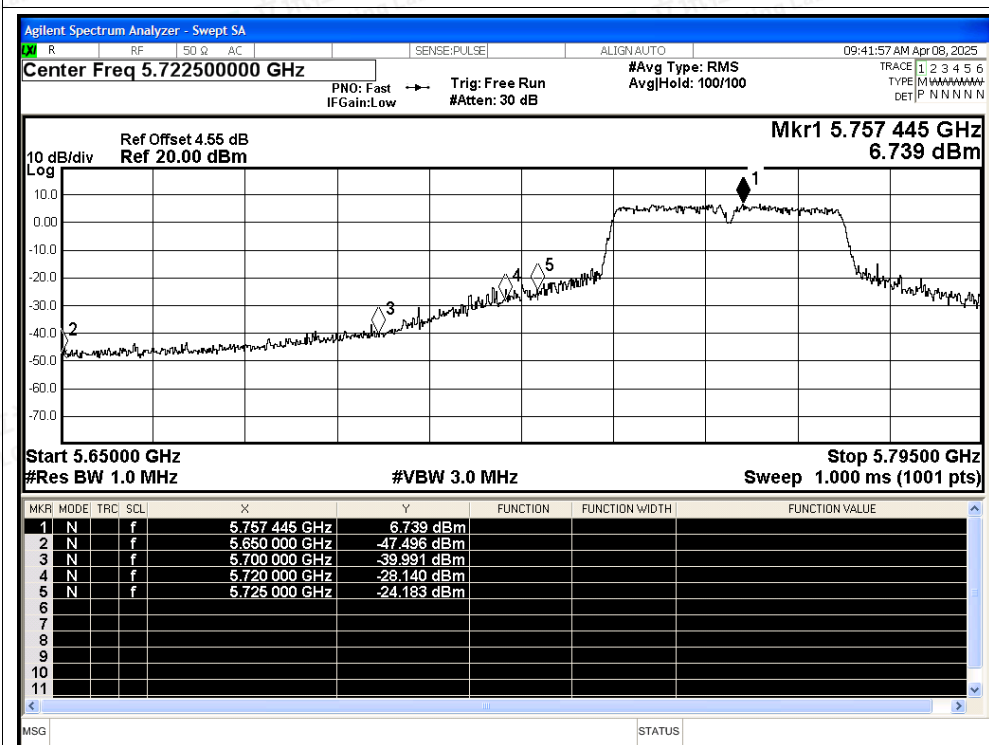

## Restrict Band NVNT ac40 5755MHz Ant1 Average

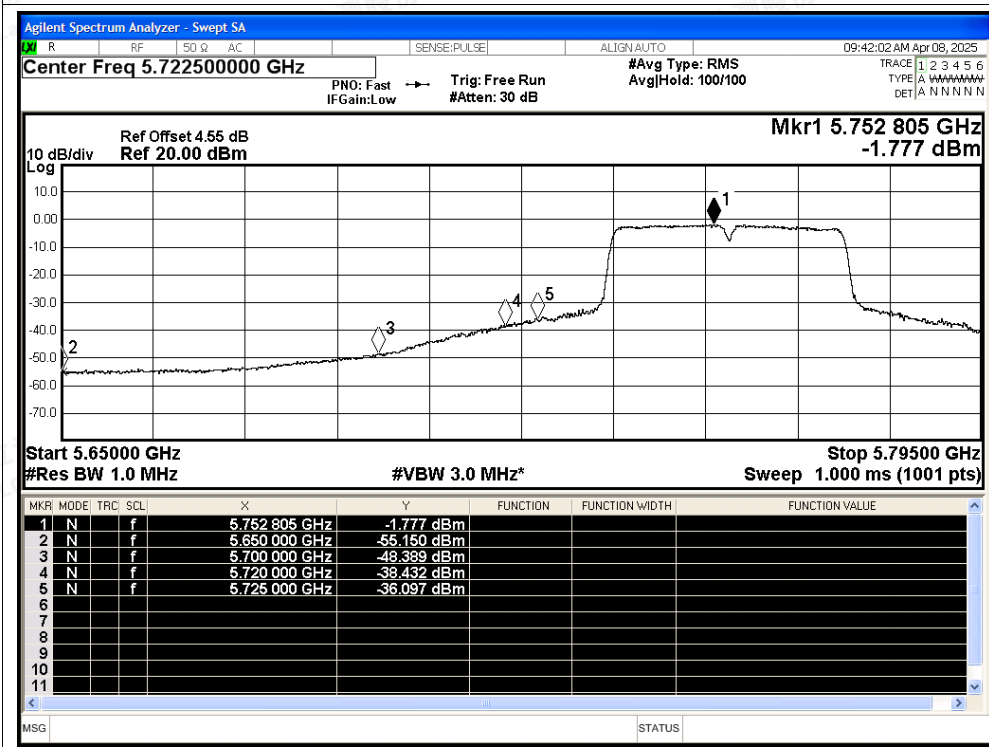

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT ac40 5795MHz Ant1 Peak

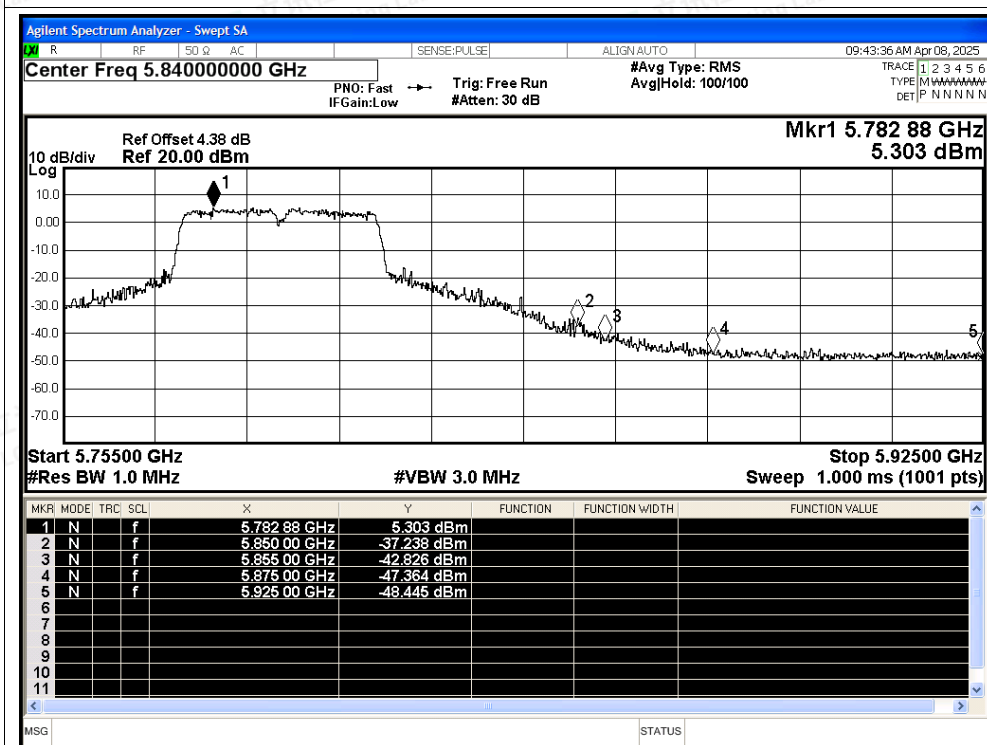

## Restrict Band NVNT ac40 5795MHz Ant1 Average

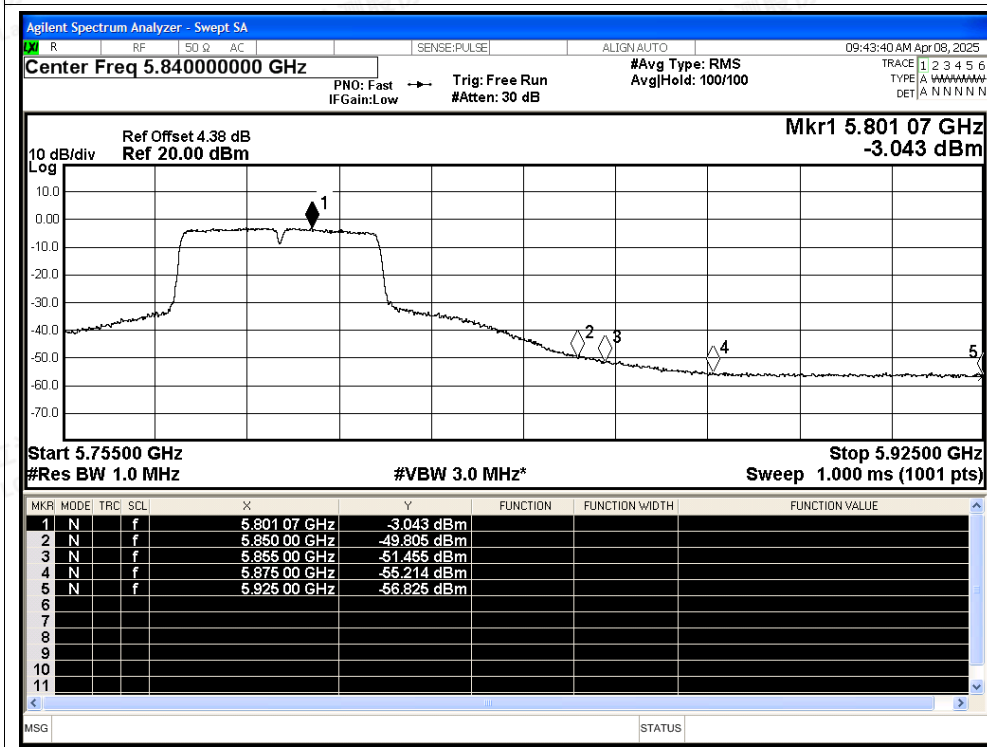

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT ac80 5775MHz Ant1 Peak

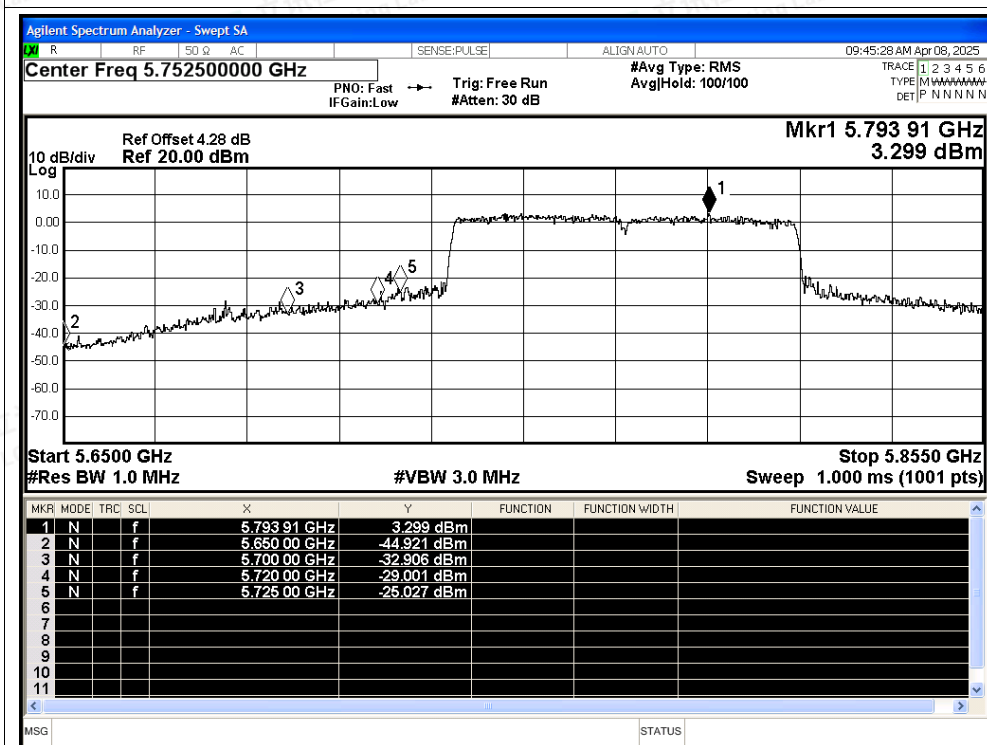

## Restrict Band NVNT ac80 5775MHz Ant1 Average

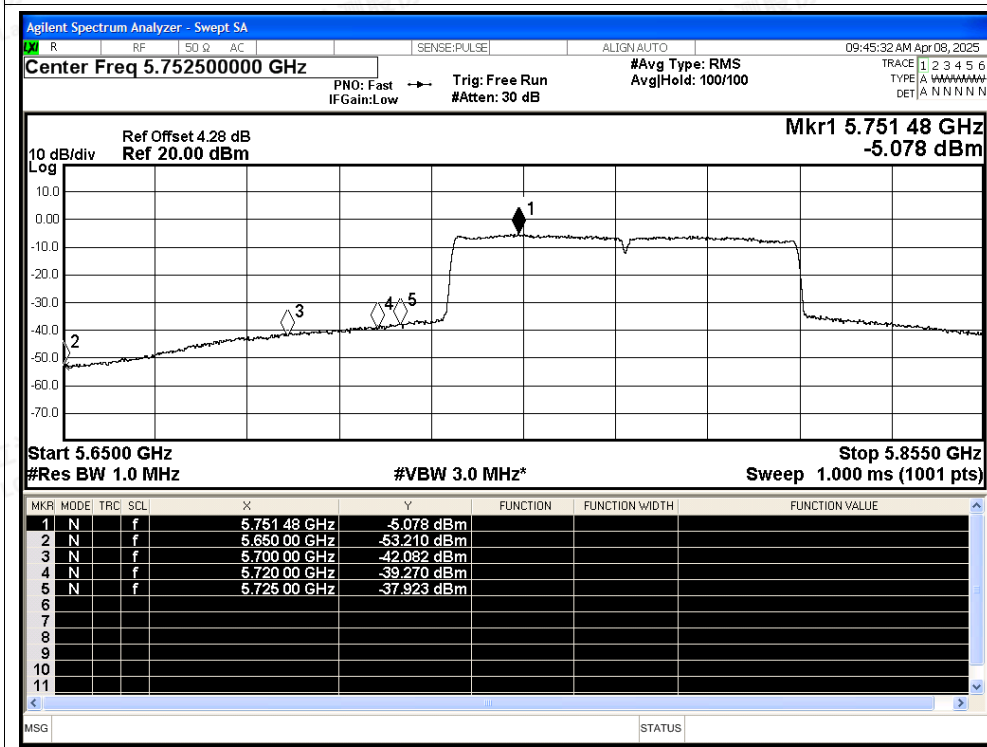

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT ac80 5775MHz Ant1 Peak

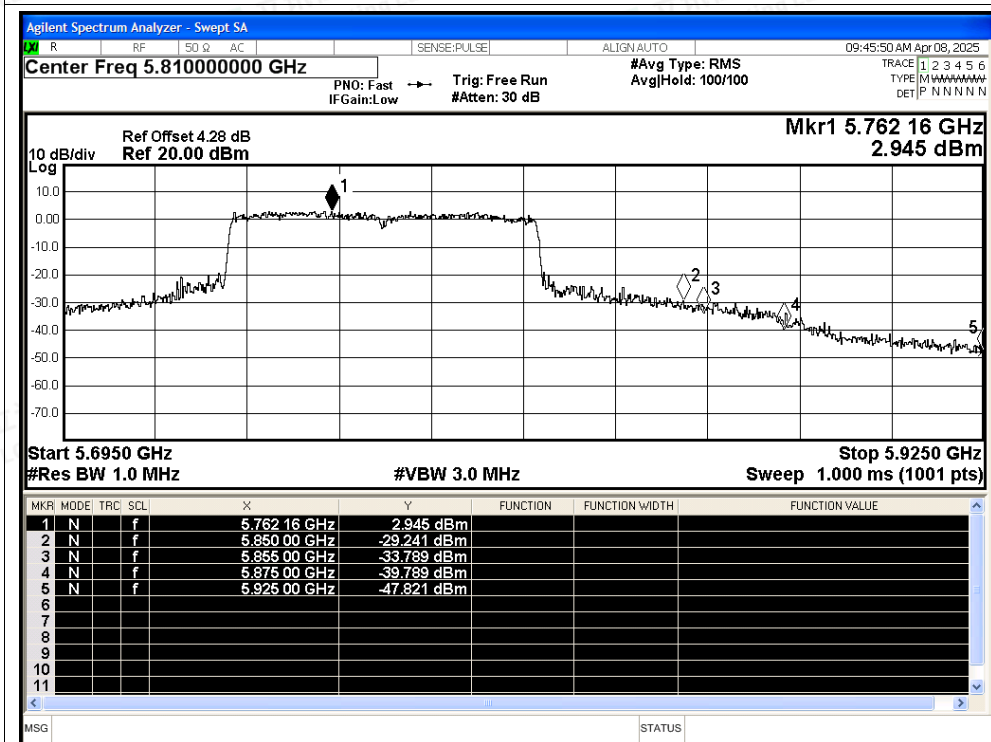

## Restrict Band NVNT ac80 5775MHz Ant1 Average

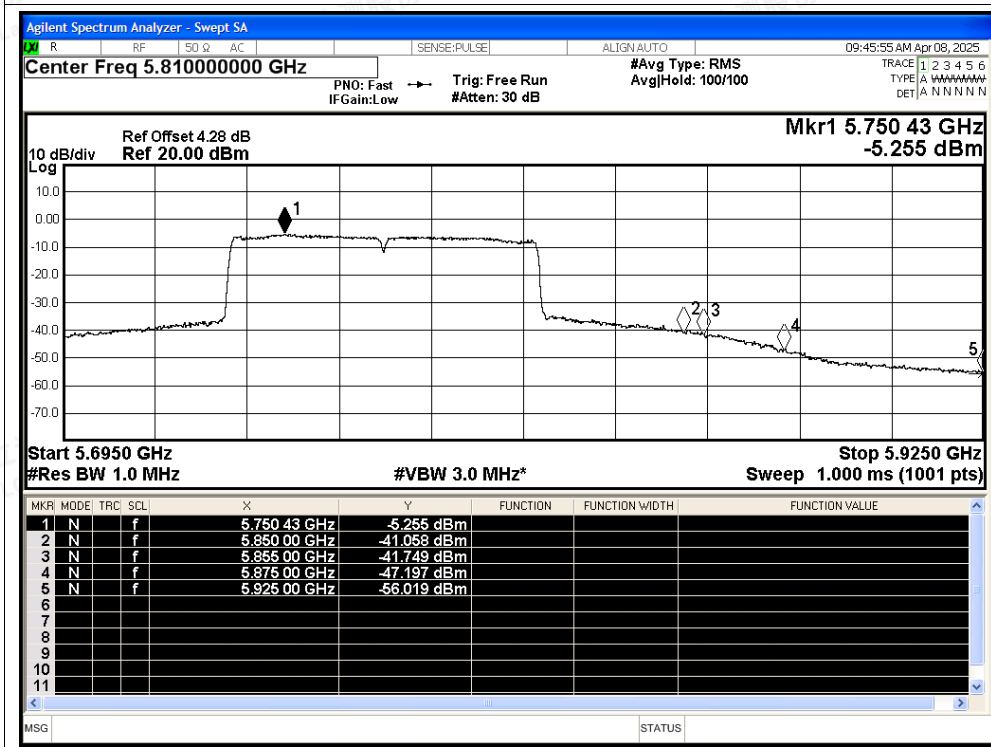



## F.5 Frequency Stability


| Condition | Mode | Frequency (MHz) | Antenna | Measured Frequency (MHz) | Frequency Error (Hz) | Deviation (ppm) | Limit (ppm) | Verdict |
|-----------|------|-----------------|---------|--------------------------|----------------------|-----------------|-------------|---------|
| NVNT      | a    | 5745            | Ant1    | 5744.98                  | -20000               | -3.48           | 25          | Pass    |
| NVNT      | a    | 5785            | Ant1    | 5784.98                  | -20000               | -3.46           | 25          | Pass    |
| NVNT      | a    | 5825            | Ant1    | 5825                     | 0                    | 0               | 25          | Pass    |
| NVNT      | n20  | 5745            | Ant1    | 5744.96                  | -40000               | -6.96           | 25          | Pass    |
| NVNT      | n20  | 5785            | Ant1    | 5784.98                  | -20000               | -3.46           | 25          | Pass    |
| NVNT      | n20  | 5825            | Ant1    | 5824.98                  | -20000               | -3.43           | 25          | Pass    |
| NVNT      | n40  | 5755            | Ant1    | 5755                     | 0                    | 0               | 25          | Pass    |
| NVNT      | n40  | 5795            | Ant1    | 5794.96                  | -40000               | -6.9            | 25          | Pass    |
| NVNT      | ac20 | 5745            | Ant1    | 5745                     | 0                    | 0               | 25          | Pass    |
| NVNT      | ac20 | 5785            | Ant1    | 5784.98                  | -20000               | -3.46           | 25          | Pass    |
| NVNT      | ac20 | 5825            | Ant1    | 5824.98                  | -20000               | -3.43           | 25          | Pass    |
| NVNT      | ac40 | 5755            | Ant1    | 5755                     | 0                    | 0               | 25          | Pass    |
| NVNT      | ac40 | 5795            | Ant1    | 5795                     | 0                    | 0               | 25          | Pass    |
| NVNT      | ac80 | 5775            | Ant1    | 5775                     | 0                    | 0               | 25          | Pass    |






## Test Graphs

## Freq. Stability NVNT a 5745MHz Ant1

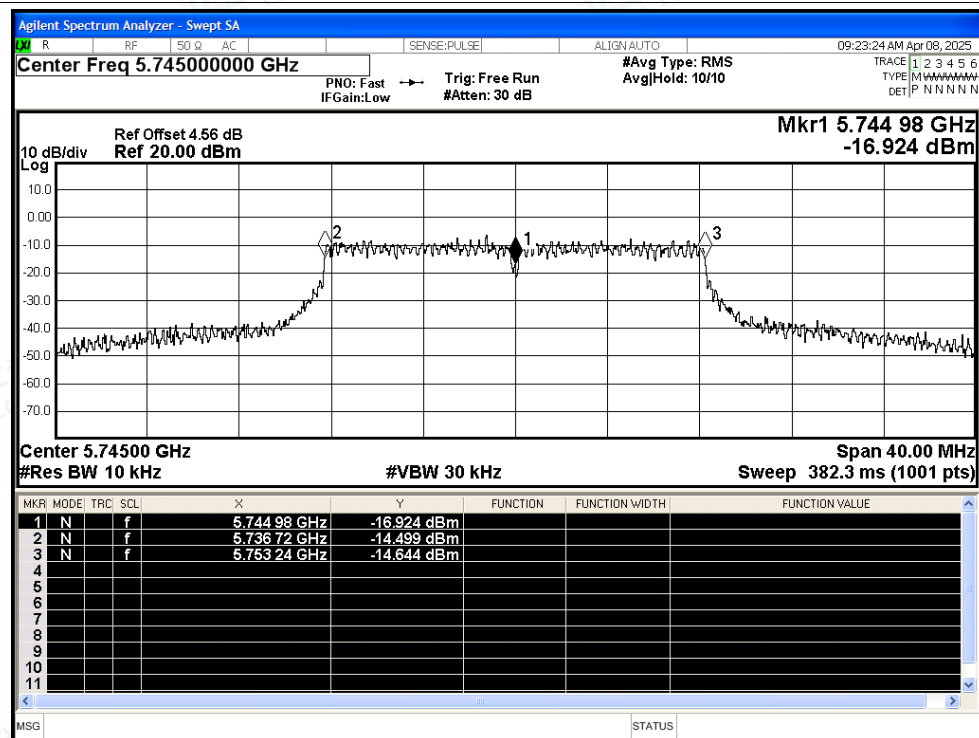

## Freq. Stability NVNT a 5785MHz Ant1

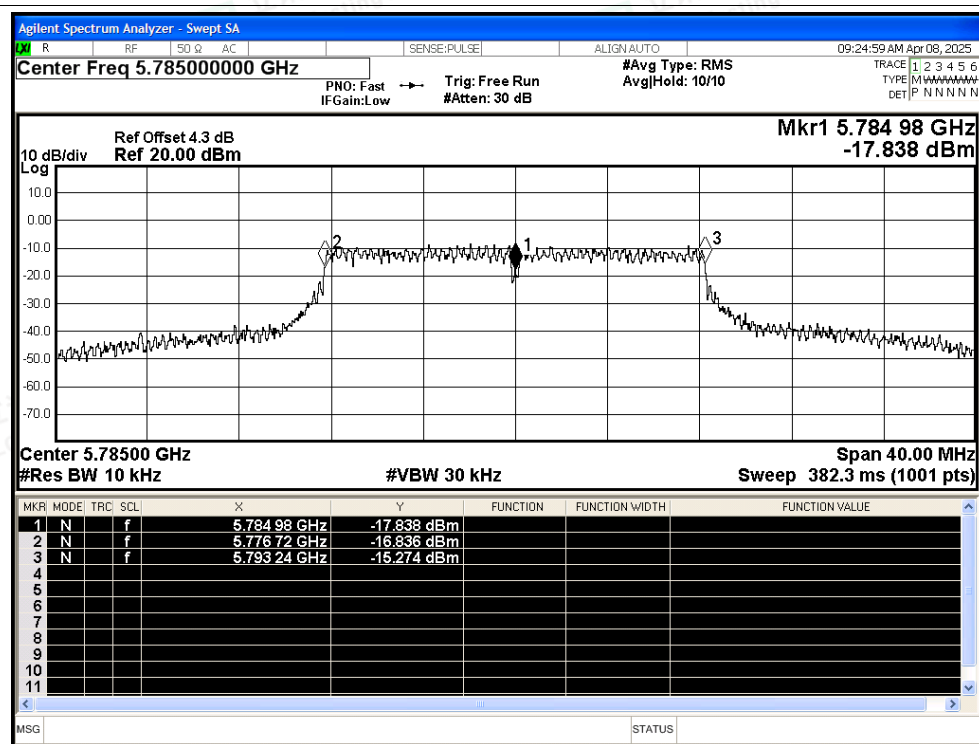

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Freq. Stability NVNT a 5825MHz Ant1

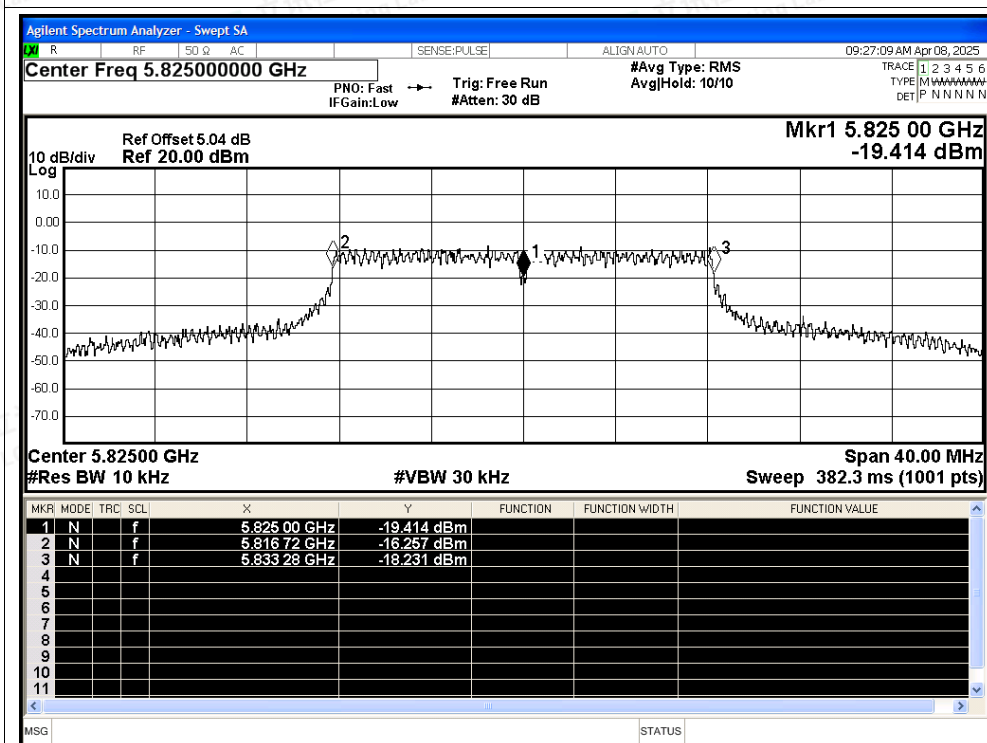


## Freq. Stability NVNT n20 5745MHz Ant1

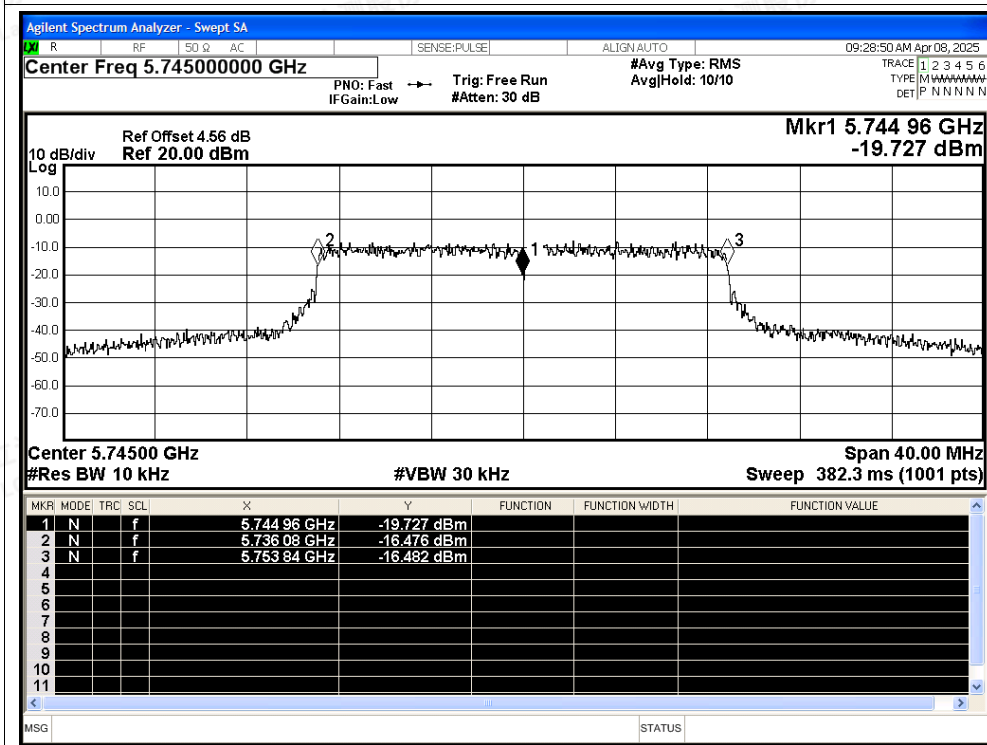




## Freq. Stability NVNT n20 5785MHz Ant1

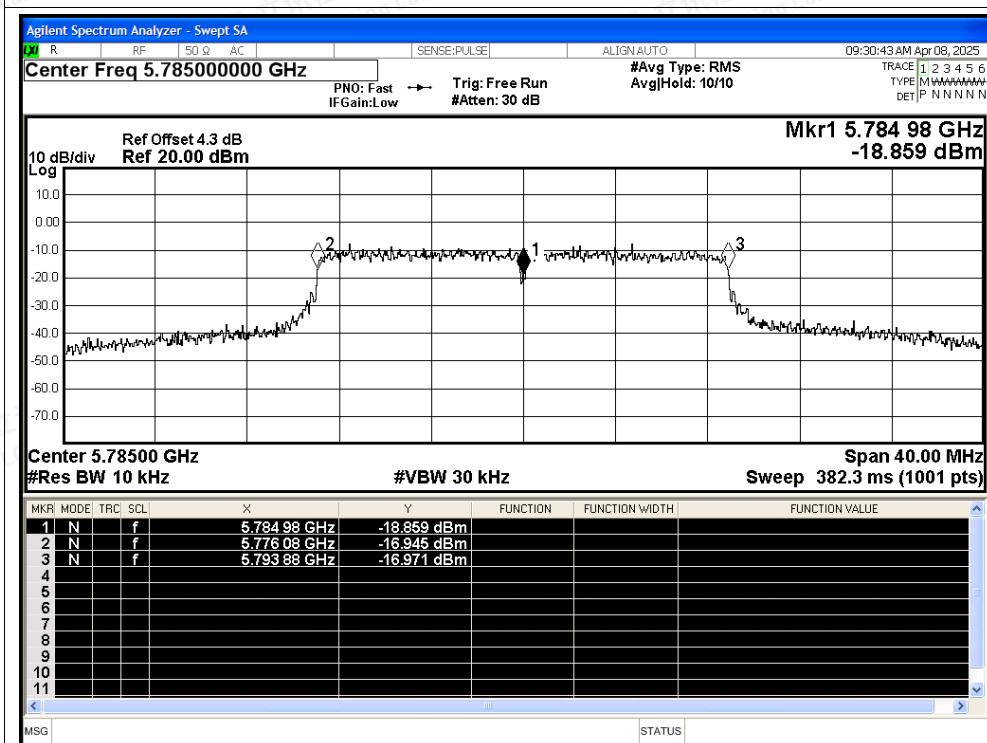


## Freq. Stability NVNT n20 5825MHz Ant1

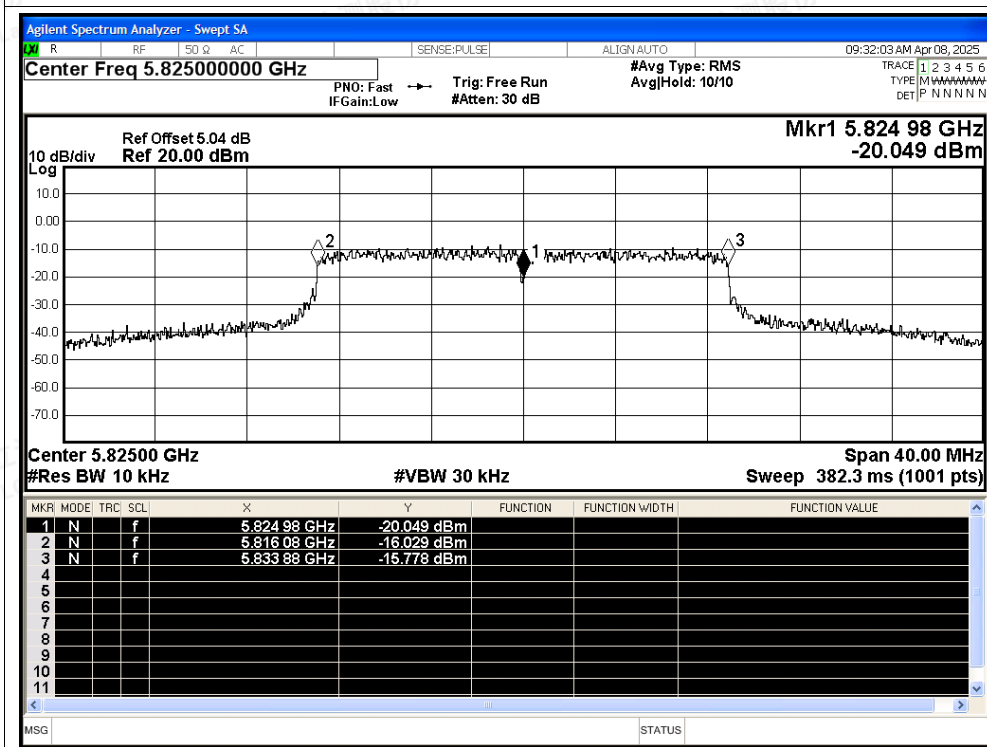




## Freq. Stability NVNT n40 5755MHz Ant1

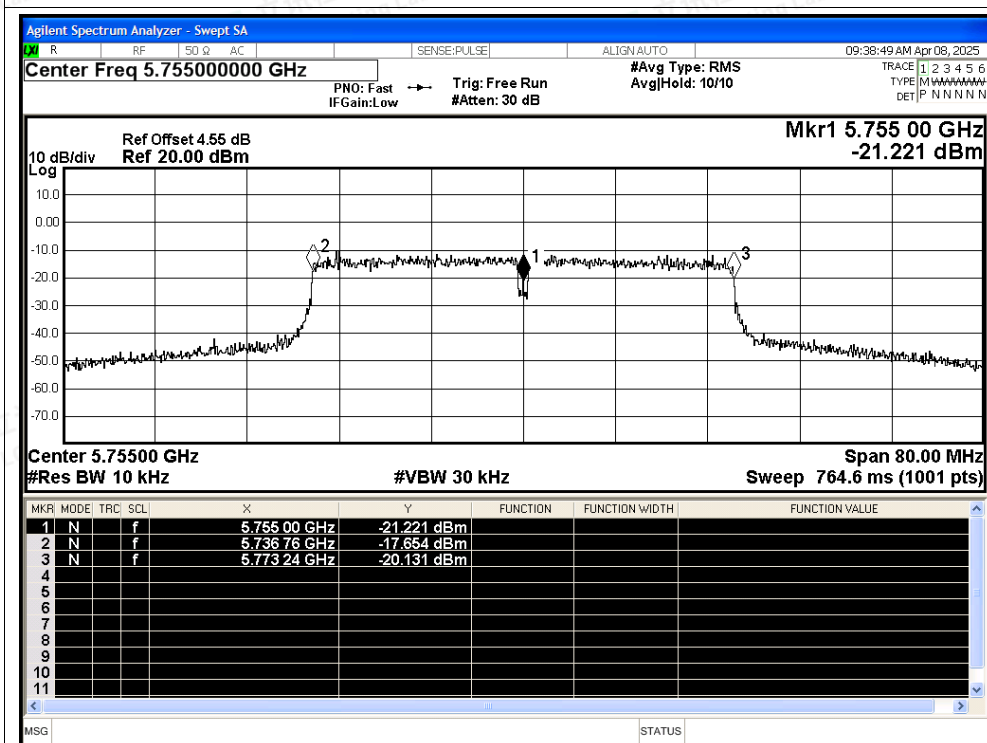

## Freq. Stability NVNT n40 5795MHz Ant1

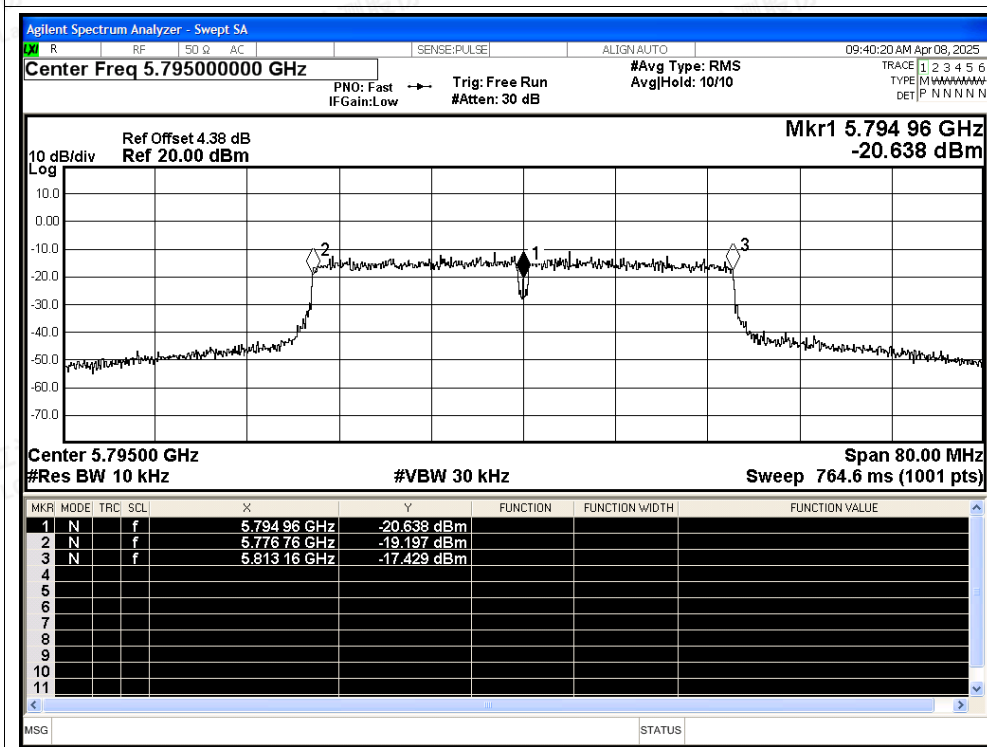

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Freq. Stability NVNT ac20 5745MHz Ant1

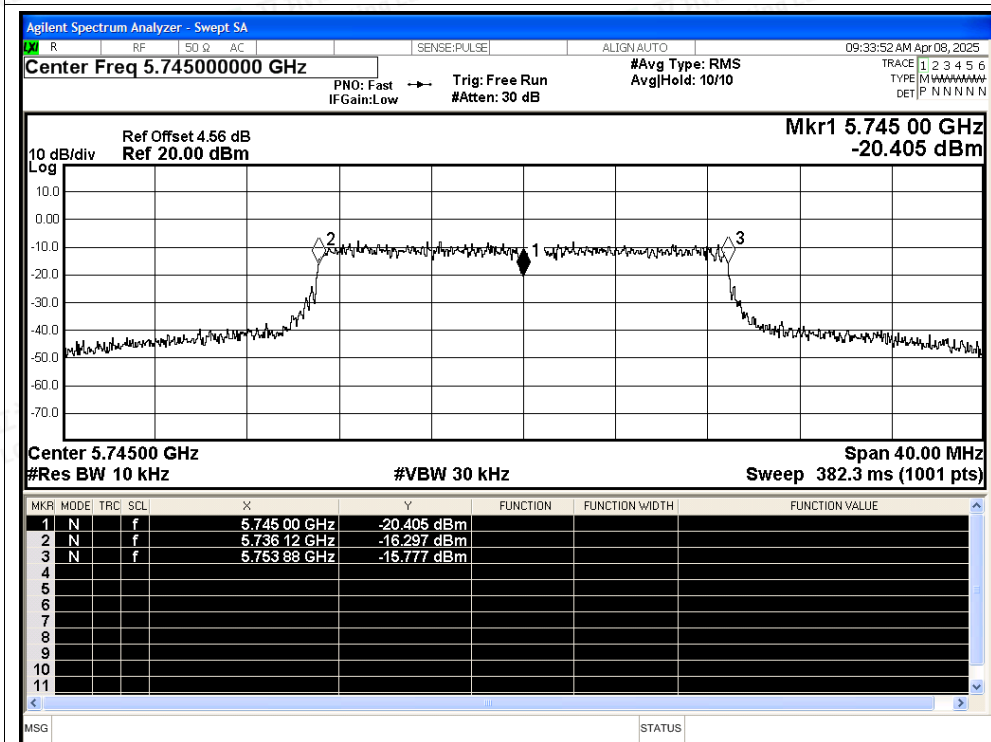


## Freq. Stability NVNT ac20 5785MHz Ant1

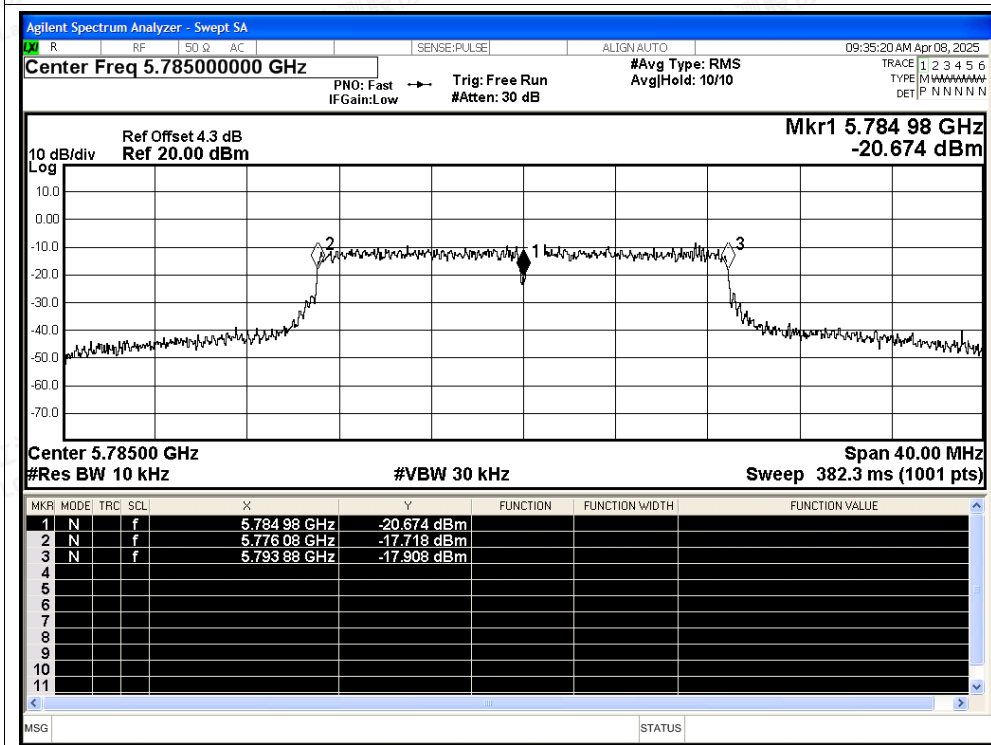




## Freq. Stability NVNT ac20 5825MHz Ant1

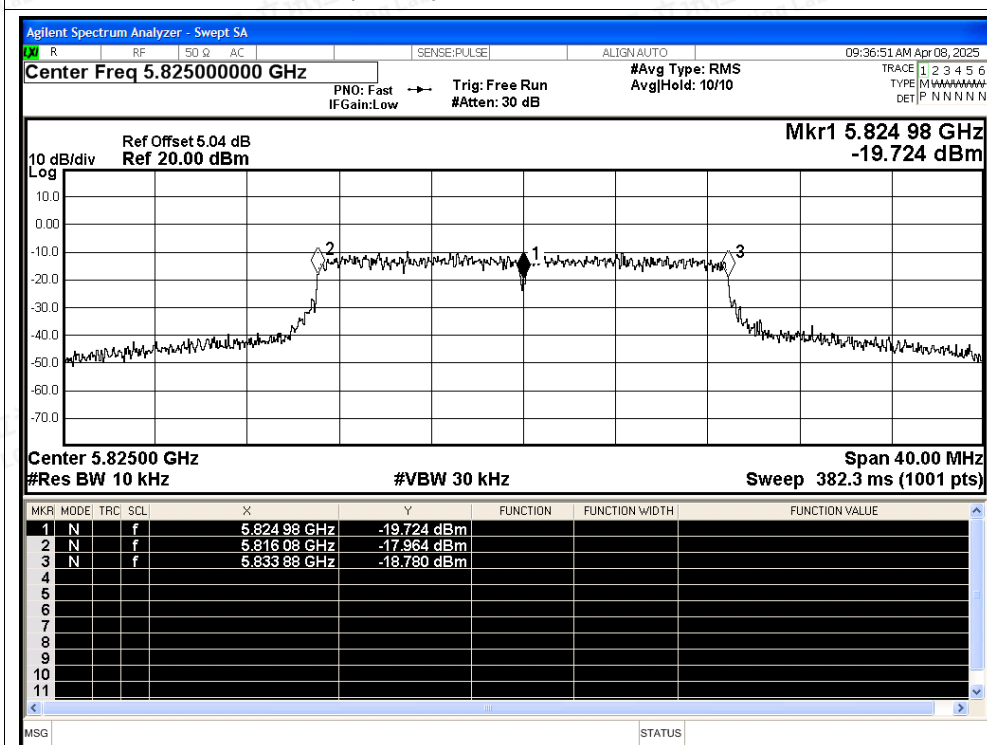

## Freq. Stability NVNT ac40 5755MHz Ant1

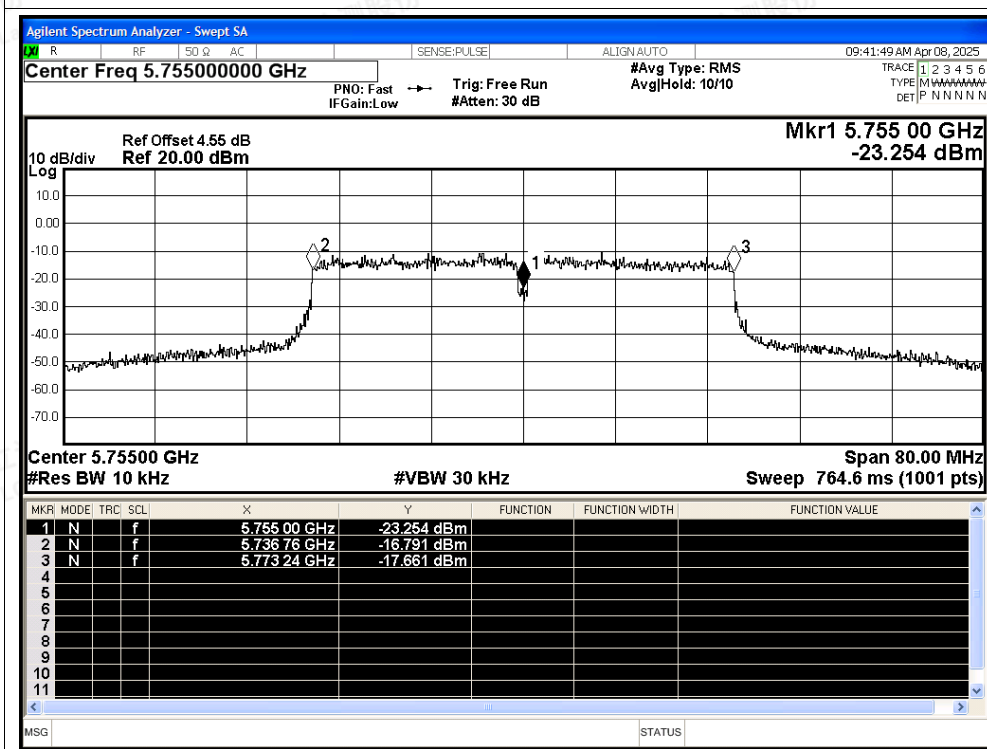

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Freq. Stability NVNT ac40 5795MHz Ant1

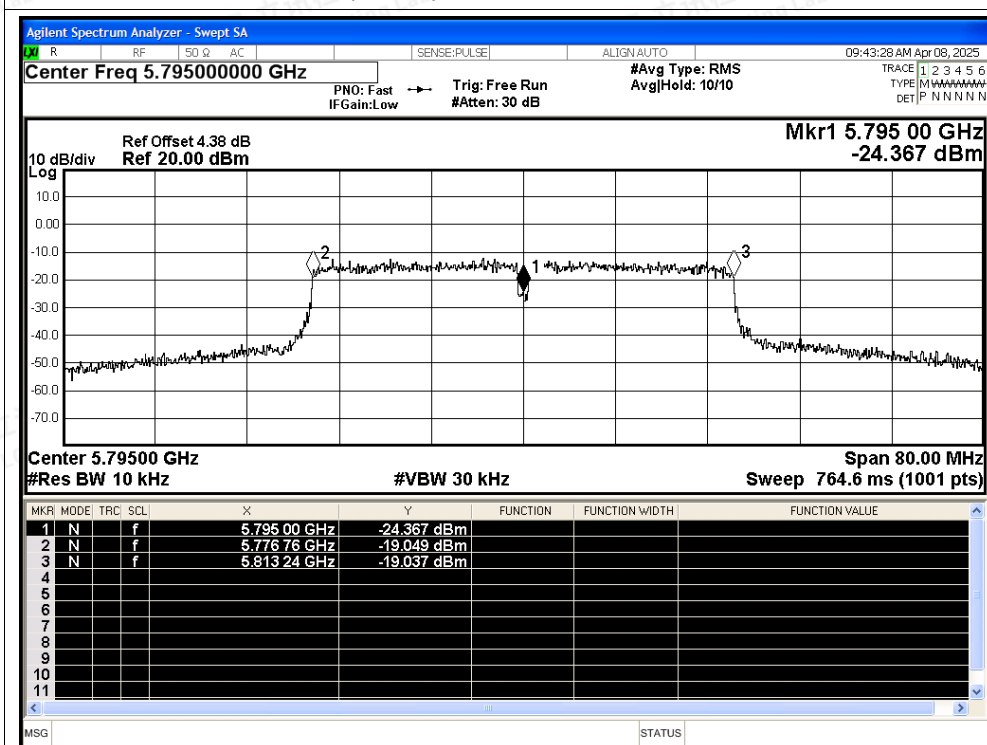

## Freq. Stability NVNT ac80 5775MHz Ant1

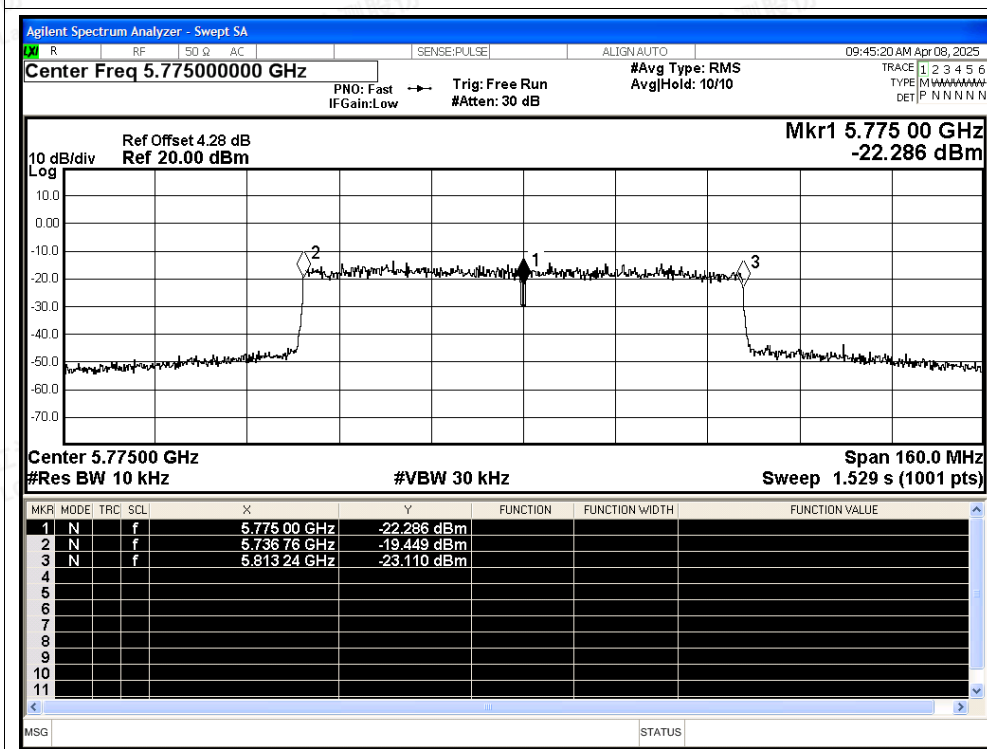



## F.6 Duty Cycle


| Condition | Mode | Frequency (MHz) | Antenna | Duty Cycle (%) | Correction Factor (dB) | 1/T (kHz) |
|-----------|------|-----------------|---------|----------------|------------------------|-----------|
| NVNT      | a    | 5745            | Ant1    | 94.65          | 0.24                   | 0.91      |
| NVNT      | a    | 5785            | Ant1    | 94.56          | 0.24                   | 0.91      |
| NVNT      | a    | 5825            | Ant1    | 94.56          | 0.24                   | 0.91      |
| NVNT      | n20  | 5745            | Ant1    | 97.29          | 0.12                   | 0.44      |
| NVNT      | n20  | 5785            | Ant1    | 97.29          | 0.12                   | 0.44      |
| NVNT      | n20  | 5825            | Ant1    | 97.29          | 0.12                   | 0.44      |
| NVNT      | n40  | 5755            | Ant1    | 94.71          | 0.24                   | 0.9       |
| NVNT      | n40  | 5795            | Ant1    | 94.71          | 0.24                   | 0.9       |
| NVNT      | ac20 | 5745            | Ant1    | 97.34          | 0.12                   | 0.44      |
| NVNT      | ac20 | 5785            | Ant1    | 97.34          | 0.12                   | 0.44      |
| NVNT      | ac20 | 5825            | Ant1    | 97.34          | 0.12                   | 0.44      |
| NVNT      | ac40 | 5755            | Ant1    | 94.72          | 0.24                   | 0.9       |
| NVNT      | ac40 | 5795            | Ant1    | 94.81          | 0.23                   | 0.9       |
| NVNT      | ac80 | 5775            | Ant1    | 89.65          | 0.47                   | 1.86      |






## Test Graphs

## Duty Cycle NVNT a 5745MHz Ant1

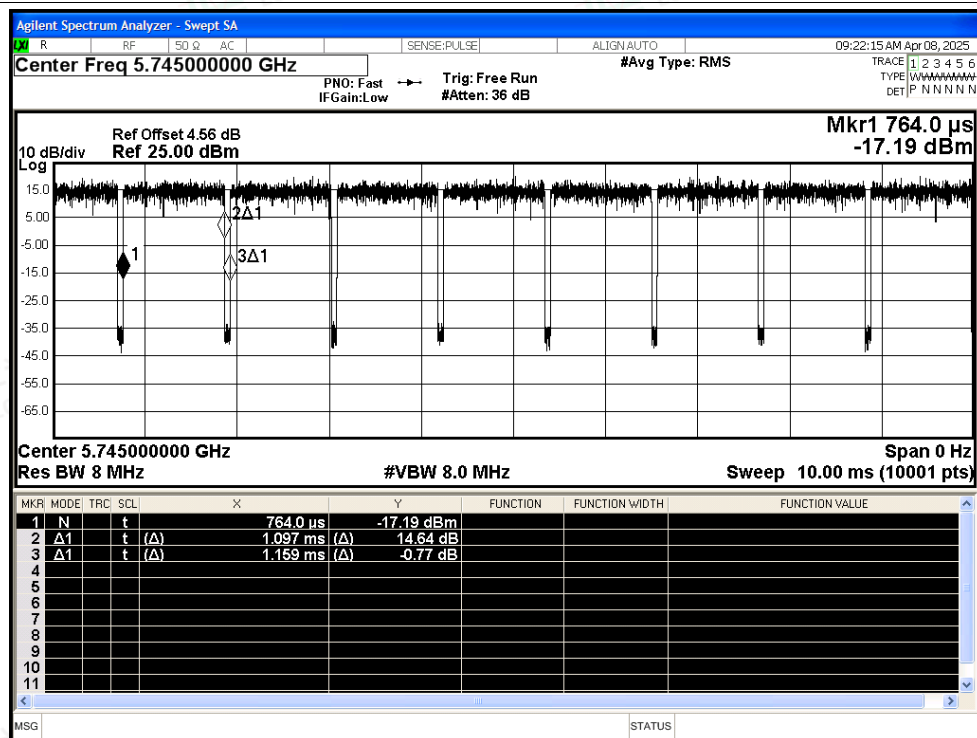

## Duty Cycle NVNT a 5785MHz Ant1

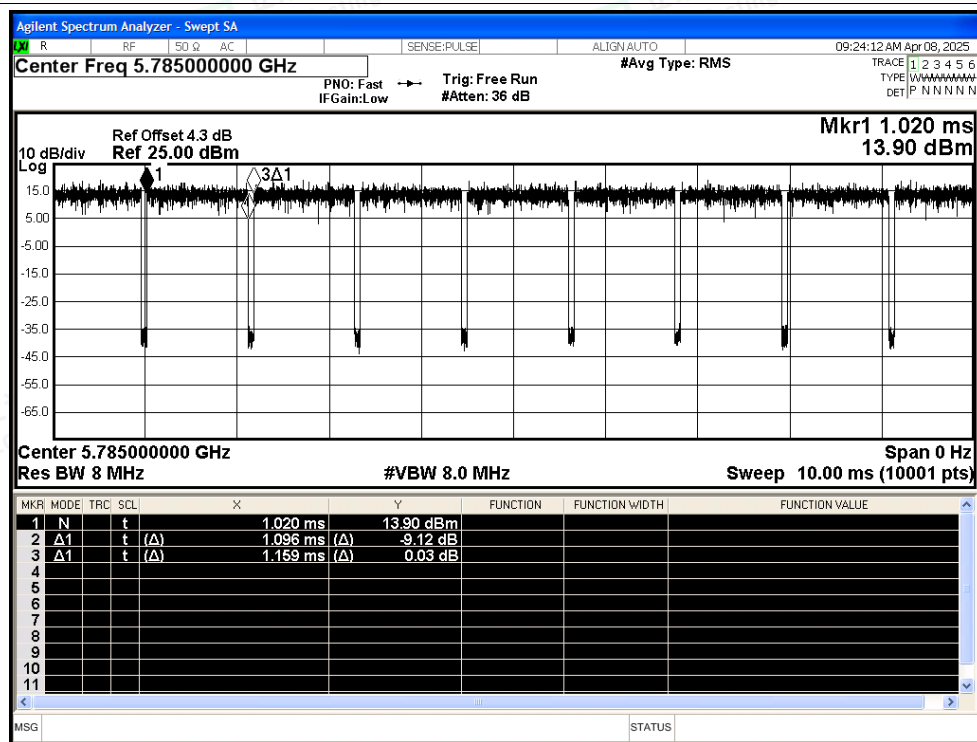

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Duty Cycle NVNT a 5825MHz Ant1

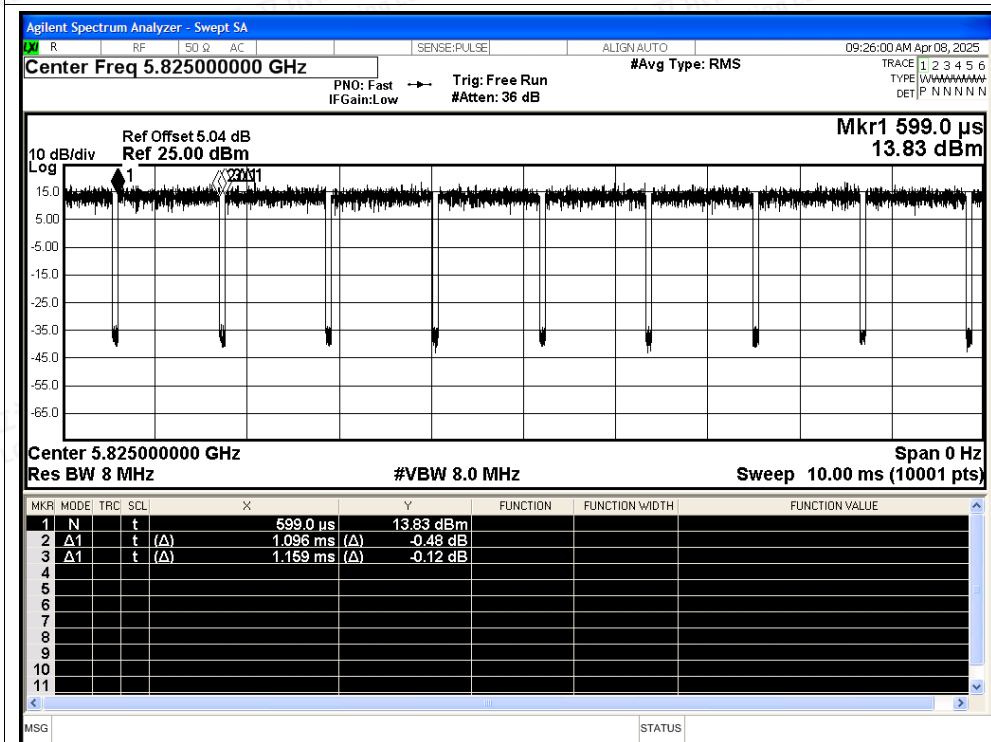


## Duty Cycle NVNT n20 5745MHz Ant1

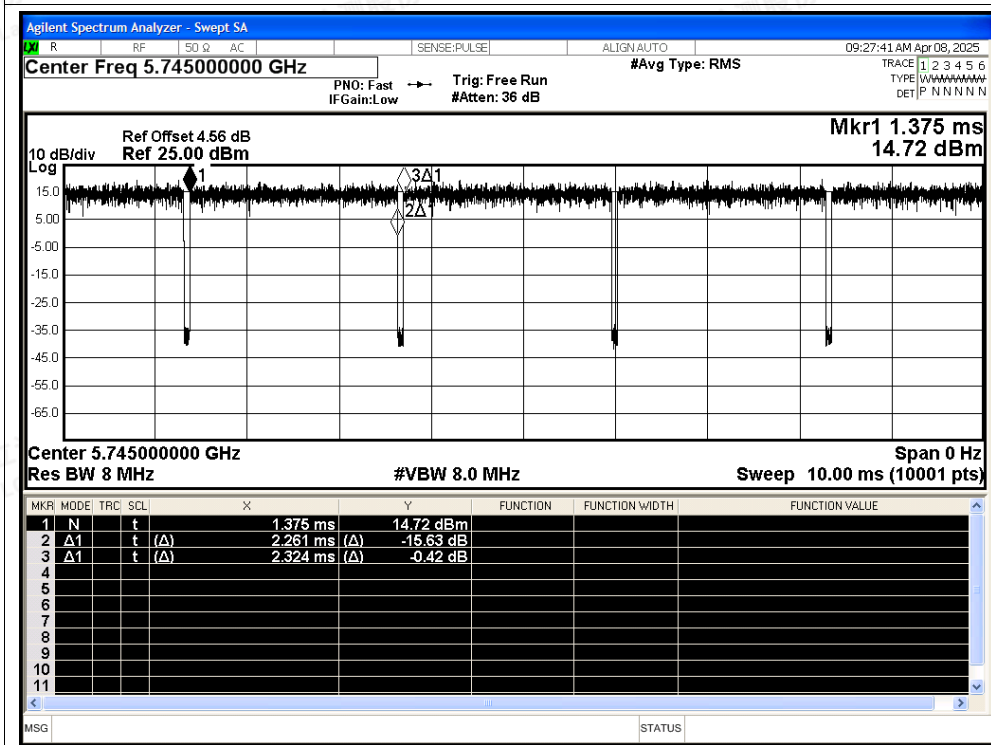




## Duty Cycle NVNT n20 5785MHz Ant1

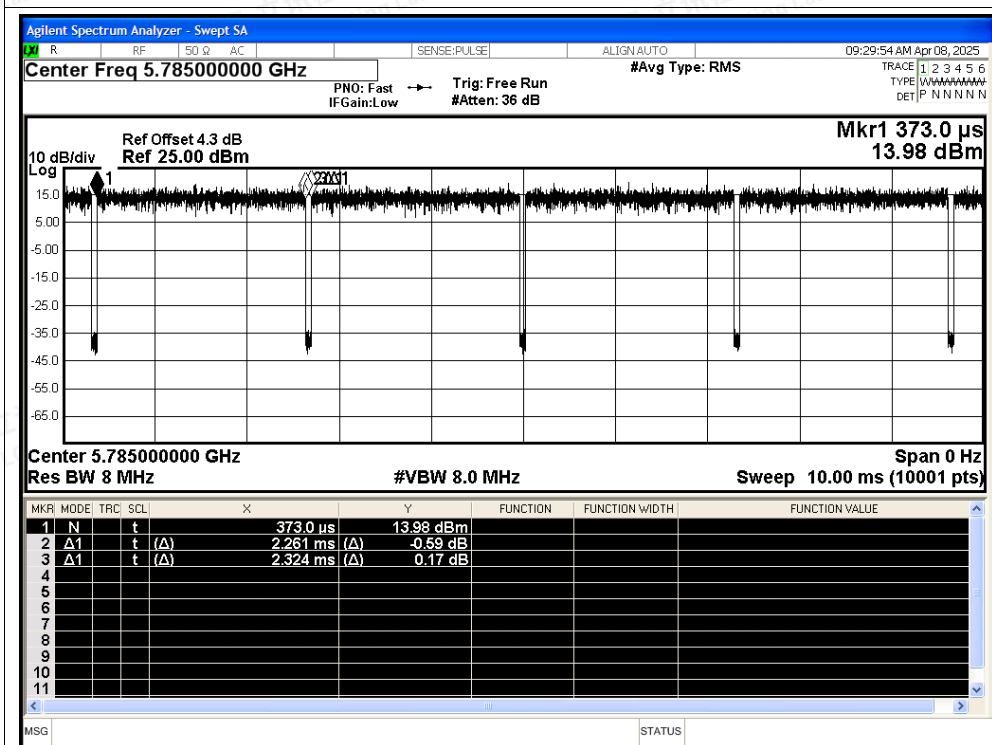

## Duty Cycle NVNT n20 5825MHz Ant1

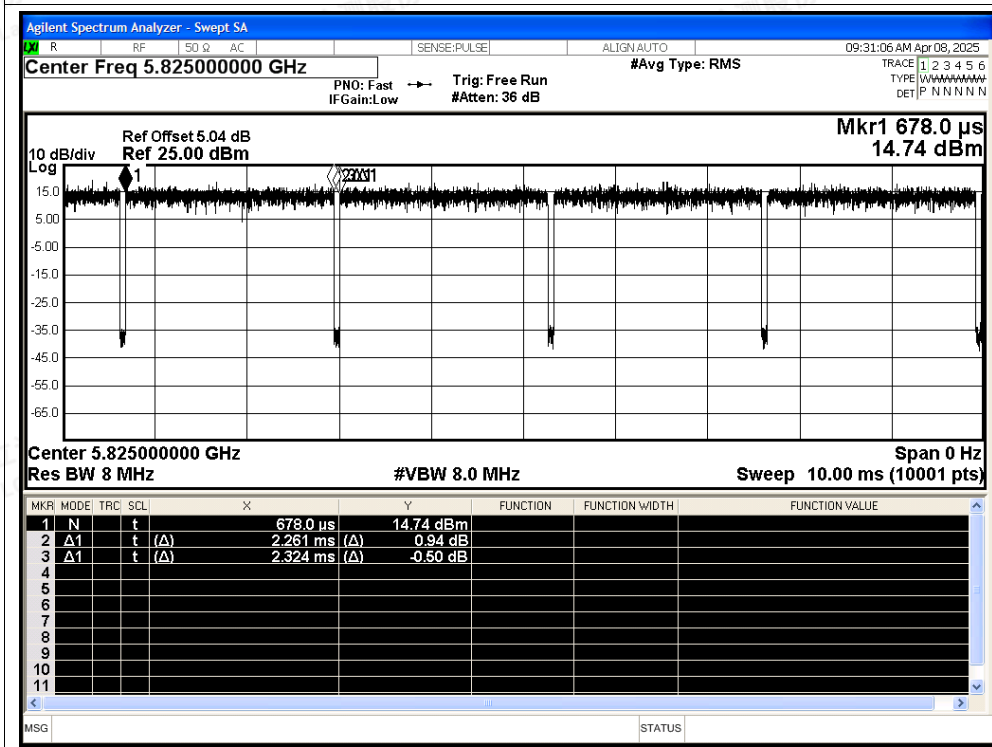

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Duty Cycle NVNT n40 5755MHz Ant1

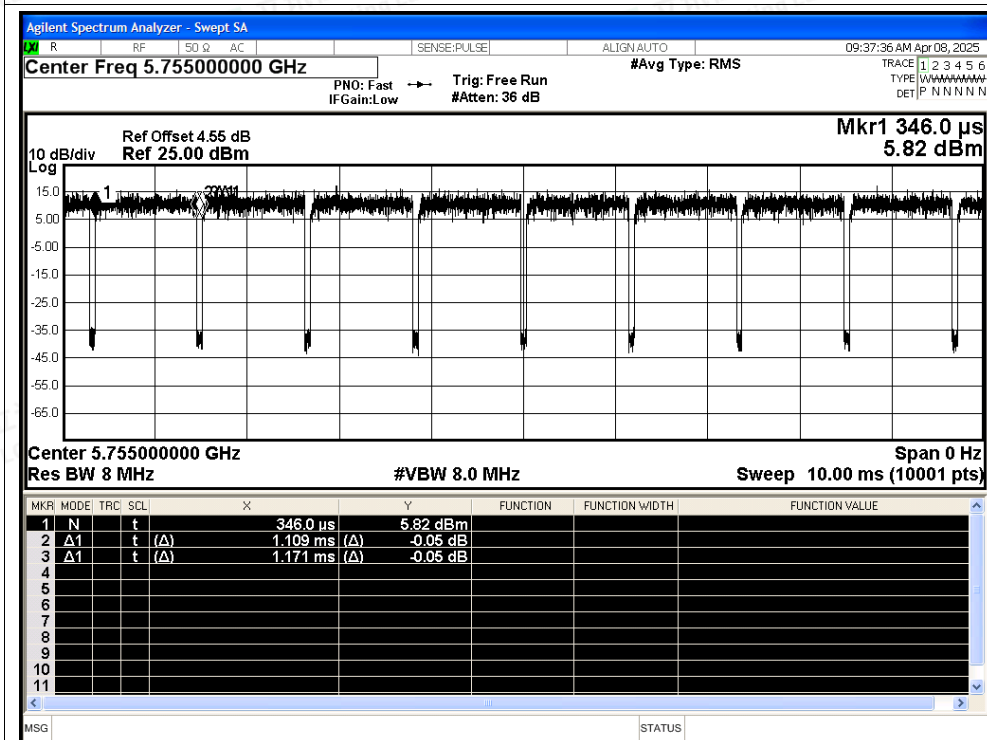

## Duty Cycle NVNT n40 5795MHz Ant1

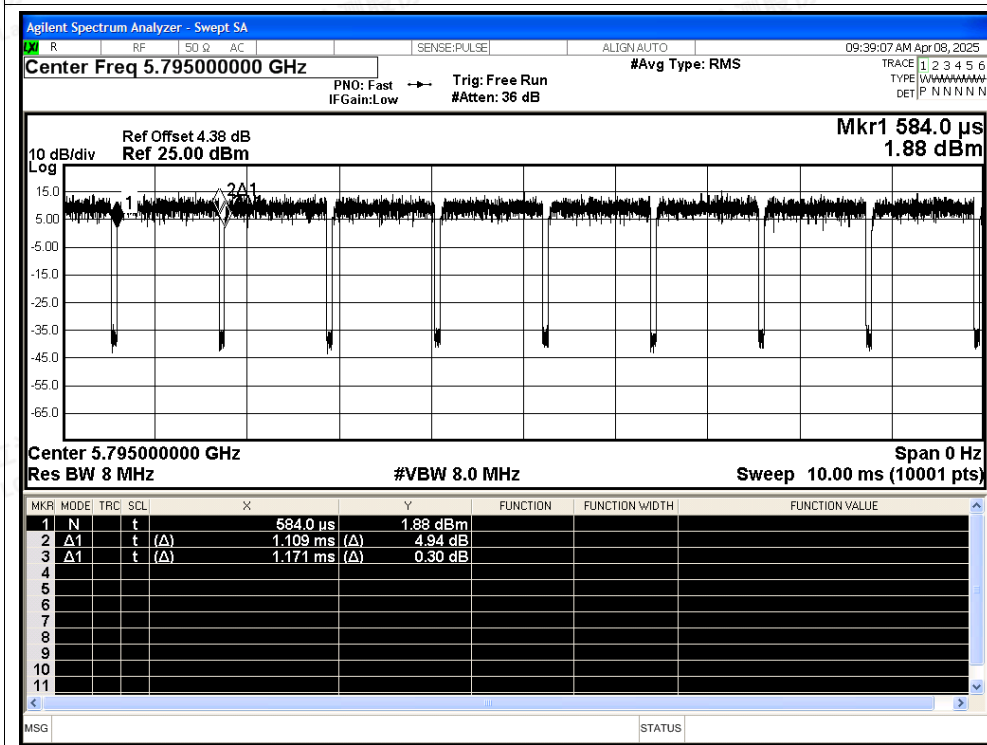

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Duty Cycle NVNT ac20 5745MHz Ant1

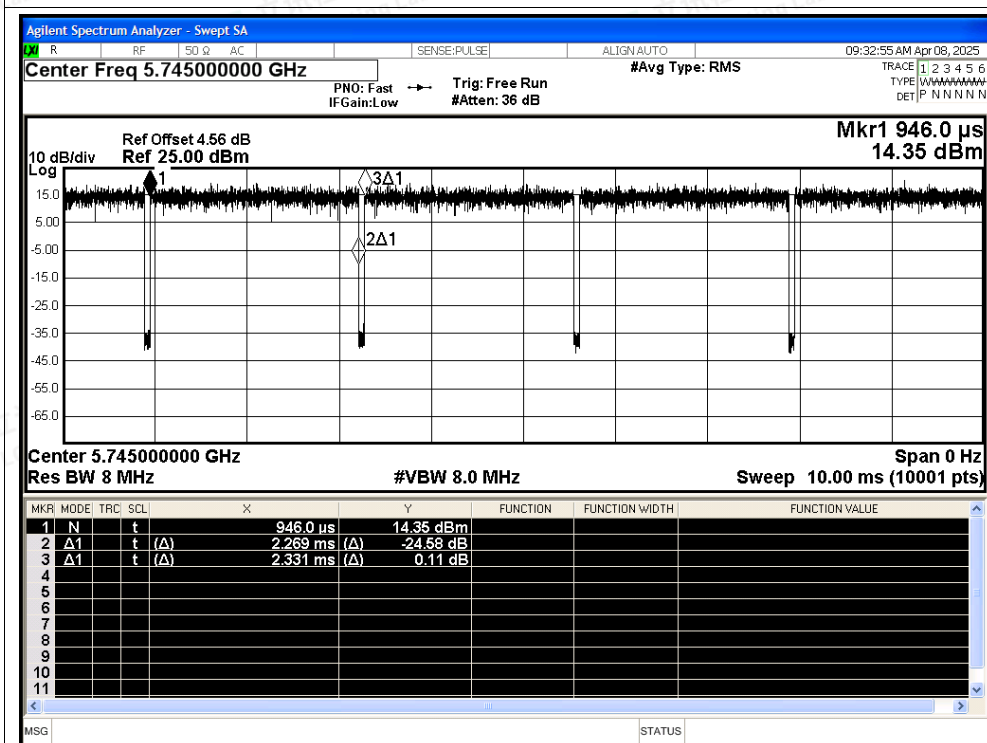

## Duty Cycle NVNT ac20 5785MHz Ant1

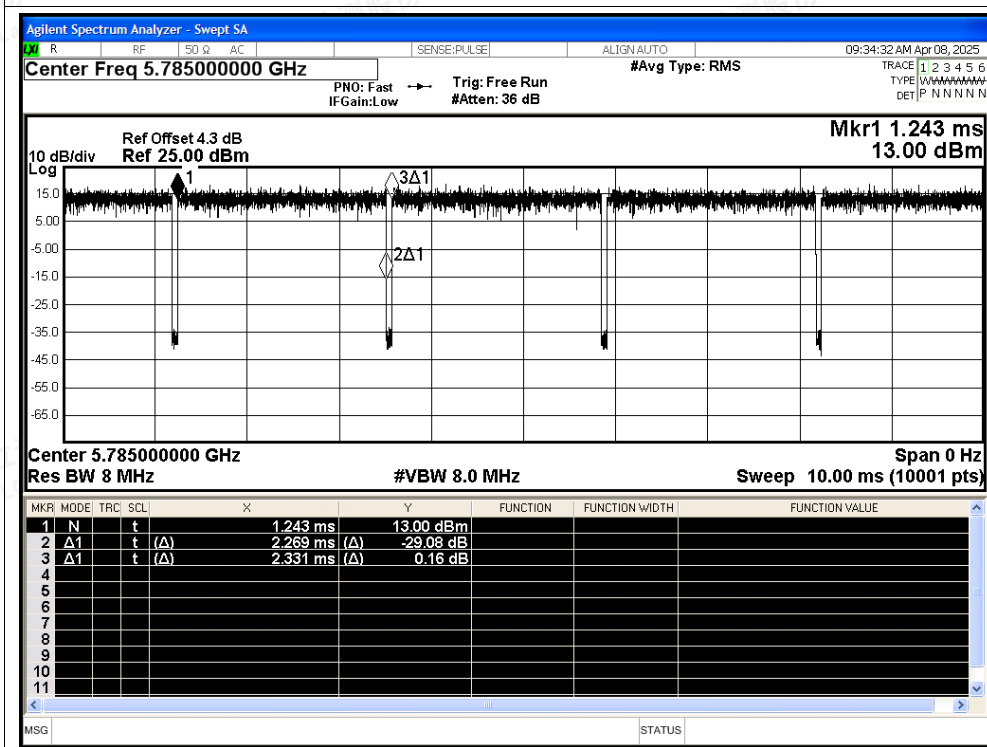

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Duty Cycle NVNT ac20 5825MHz Ant1

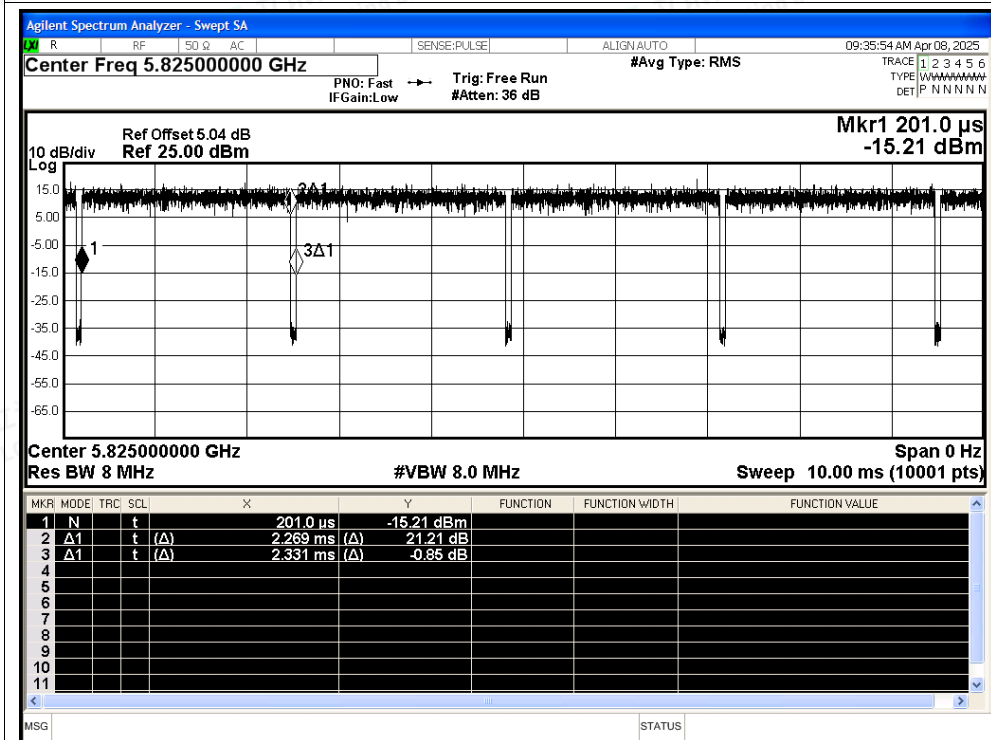


## Duty Cycle NVNT ac40 5755MHz Ant1

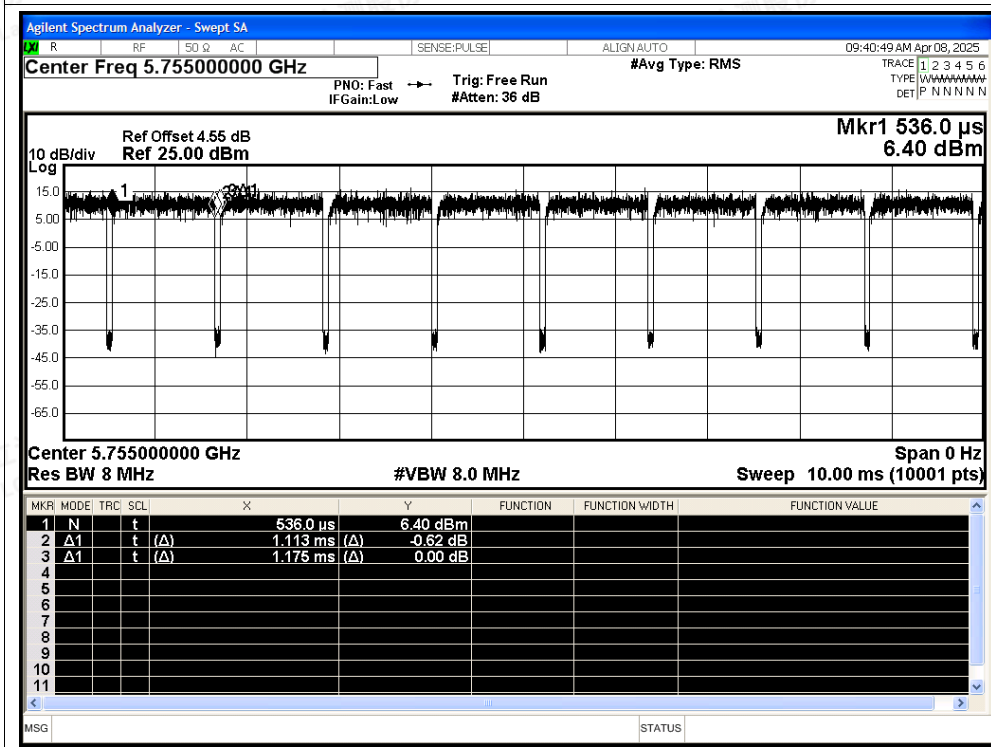




## Duty Cycle NVNT ac40 5795MHz Ant1

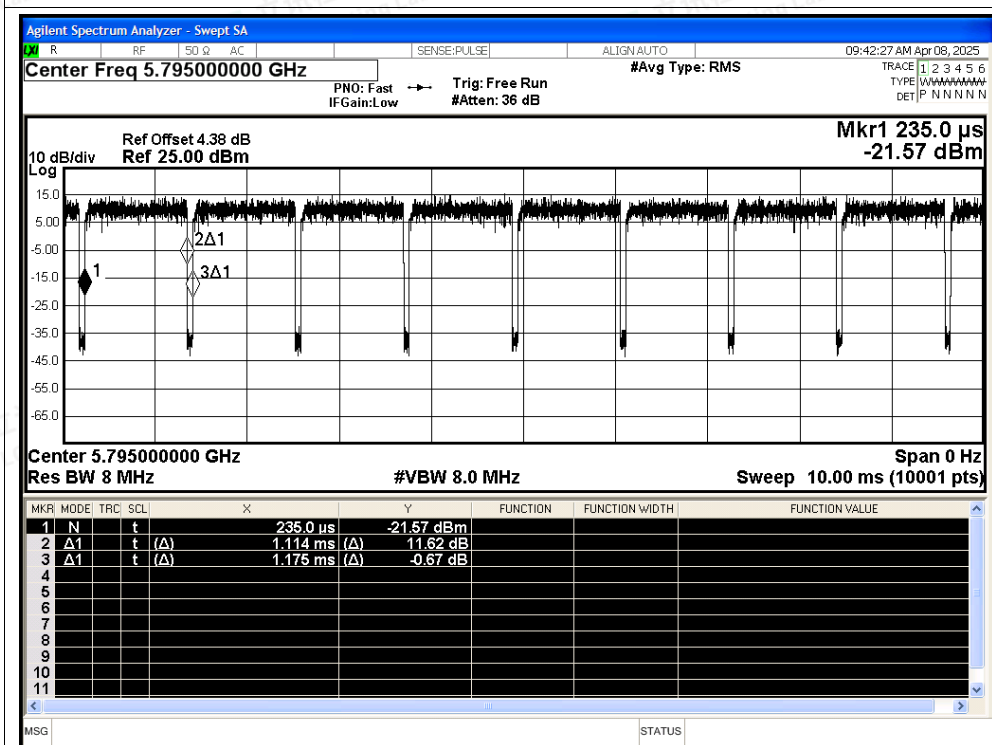

## Duty Cycle NVNT ac80 5775MHz Ant1

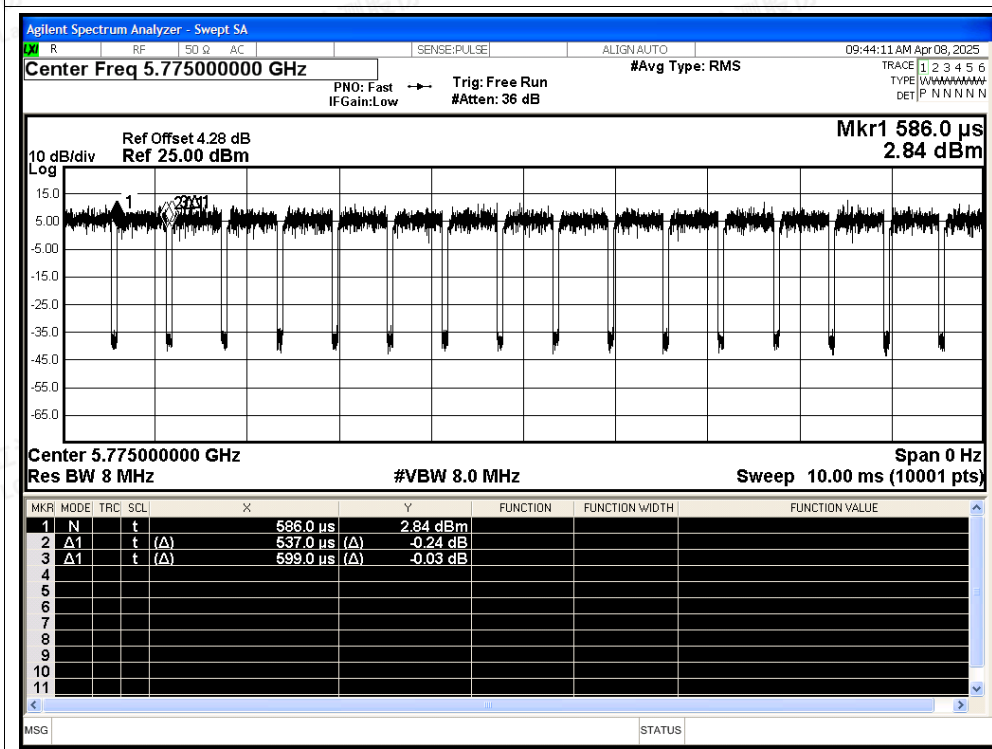

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity