

Table of Contents


1. -6dB Emission Bandwidth	2
2. -26dB and 99% Emission Bandwidth	10
3. Duty Cycle	25
4. Maximum Conducted Output Power	33
5. Power Spectral Density	41
6. Bandedge	49
8. Frequency Stability	56

FCC ID WIFI5.8

FCC_5.8G_WIFI (Part15.407) Test Data

1. -6dB Emission Bandwidth

Condition	Antenna	Mode	Frequency(MHz)	-6dB_Emission_Bandwidth(MHz)	Limit(MHz)	Result
NVNT	ANT1	LCH	5745.00	16.368	0.500	Pass
NVNT	ANT1	MCH	5785.00	16.349	0.500	Pass
NVNT	ANT1	HCH	5825.00	16.332	0.500	Pass
NVNT	ANT1	LCH	5745.00	17.275	0.500	Pass
NVNT	ANT1	MCH	5785.00	17.134	0.500	Pass
NVNT	ANT1	HCH	5825.00	17.305	0.500	Pass
NVNT	ANT1	LCH	5745.00	17.422	0.500	Pass
NVNT	ANT1	MCH	5785.00	17.037	0.500	Pass
NVNT	ANT1	HCH	5825.00	17.313	0.500	Pass
NVNT	ANT1	LCH	5755.00	35.736	0.500	Pass
NVNT	ANT1	HCH	5795.00	35.641	0.500	Pass
NVNT	ANT1	LCH	5755.00	35.702	0.500	Pass
NVNT	ANT1	HCH	5795.00	35.616	0.500	Pass
NVNT	ANT1	MCH	5775.00	75.469	0.500	Pass

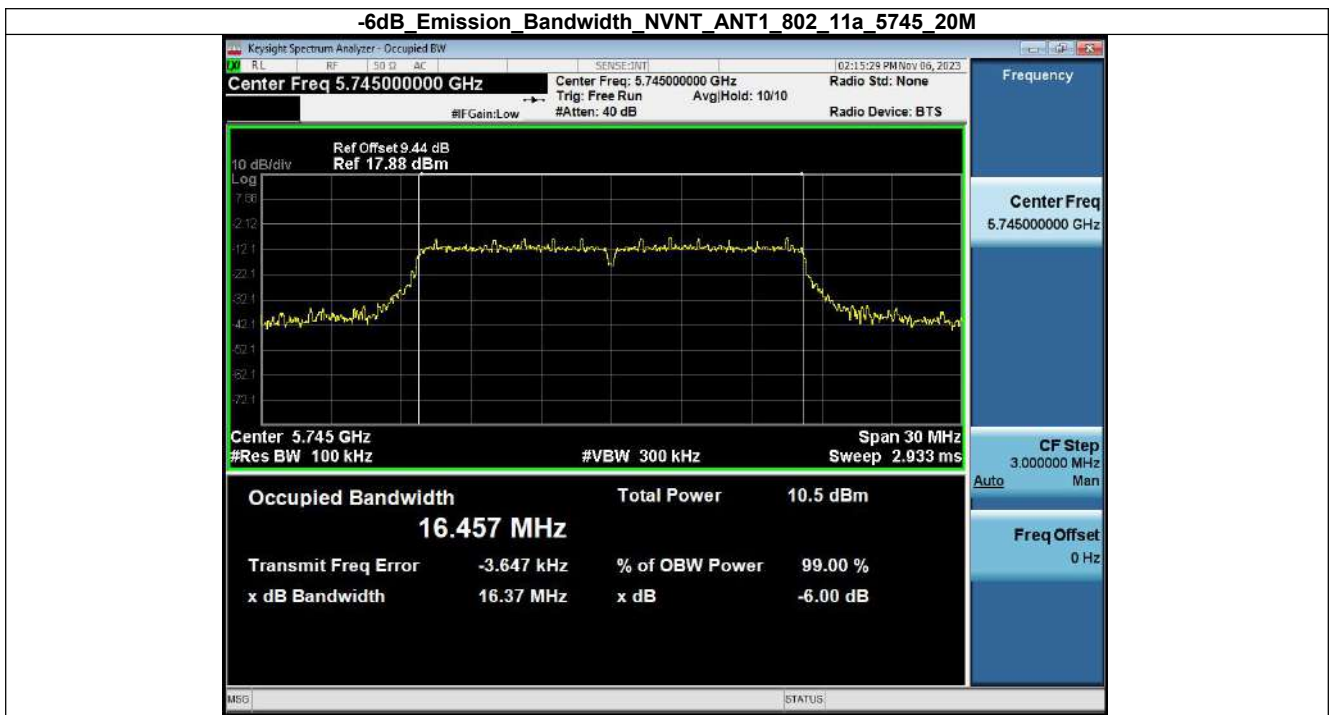

-6dB_Emission_Bandwidth_NVNT_ANT1_802_11a_5785_20M



-6dB Emission Bandwidth NVNT_ANT1_802_11a_5825_20M



-6dB Emission Bandwidth NVNT_ANT1_802_11n(HT20)_5745_20M



-6dB Emission Bandwidth NVNT ANT1 802_11n(HT20) 5785 20M



-6dB Emission Bandwidth NVNT ANT1 802_11n(HT20) 5825 20M



-6dB Emission Bandwidth NVNT_ANT1_802_11ac(VHT20)_5745_20M



-6dB Emission Bandwidth NVNT_ANT1_802_11ac(VHT20)_5785_20M



-6dB Emission Bandwidth NVNT_ANT1_802_11ac(VHT20)_5825_20M



-6dB Emission Bandwidth NVNT_ANT1_802_11n(HT40)_5755_40M



-6dB Emission Bandwidth NVNT ANT1 802 11n(HT40) 5795 40M



-6dB Emission Bandwidth NVNT ANT1 802 11ac(VHT40) 5755 40M



-6dB Emission Bandwidth NVNT_ANT1_802_11ac(VHT40)_5795_40M




-6dB Emission Bandwidth NVNT_ANT1_802_11ac(VHT80)_5775_80M



2. -26dB and 99% Emission Bandwidth

Condition	Antenna	Modulation	Frequency(MHz)	- 26dB_Emission_Bandwidth(MHz)	Occupied Bandwidth(MHz)
NVNT	ANT1	802.11a	5745.00	30.50	16.56
NVNT	ANT1	802.11a	5785.00	30.52	16.52
NVNT	ANT1	802.11a	5825.00	31.59	16.55
NVNT	ANT1	802.11n(HT20)	5745.00	33.05	17.65
NVNT	ANT1	802.11n(HT20)	5785.00	28.75	17.63
NVNT	ANT1	802.11n(HT20)	5825.00	32.64	17.72
NVNT	ANT1	802.11ac(VHT20)	5745.00	32.01	17.65
NVNT	ANT1	802.11ac(VHT20)	5785.00	31.72	17.69
NVNT	ANT1	802.11ac(VHT20)	5825.00	33.34	17.74
NVNT	ANT1	802.11n(HT40)	5755.00	46.05	36.12
NVNT	ANT1	802.11n(HT40)	5795.00	54.72	36.17
NVNT	ANT1	802.11ac(VHT40)	5755.00	48.83	36.10
NVNT	ANT1	802.11ac(VHT40)	5795.00	56.68	36.23
NVNT	ANT1	802.11ac(VHT80)	5775.00	98.35	75.69

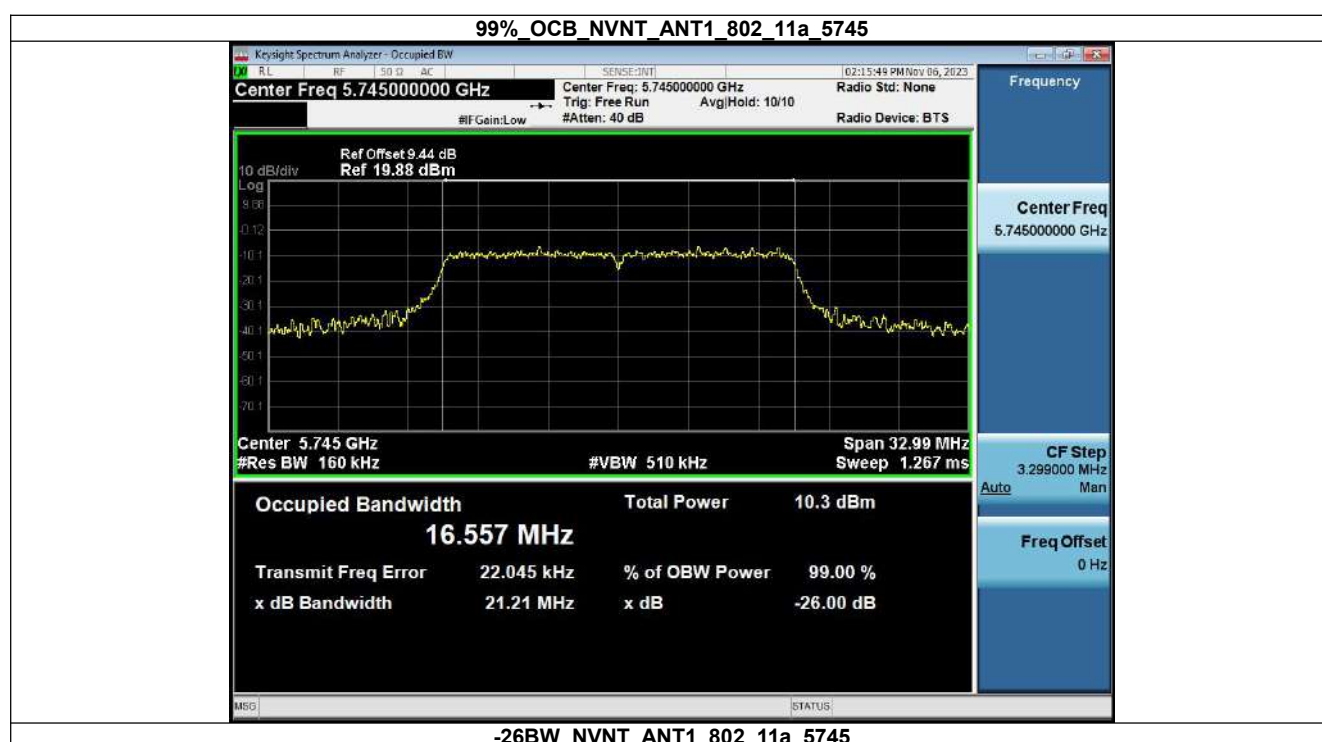



99% OCB NVNT_ANT1_802_11a_5785




-26BW_NVNT_ANT1_802_11a_5785



99% OCB NVNT_ANT1_802_11a_5825



-26BW_NVNT_ANT1_802_11a_5825

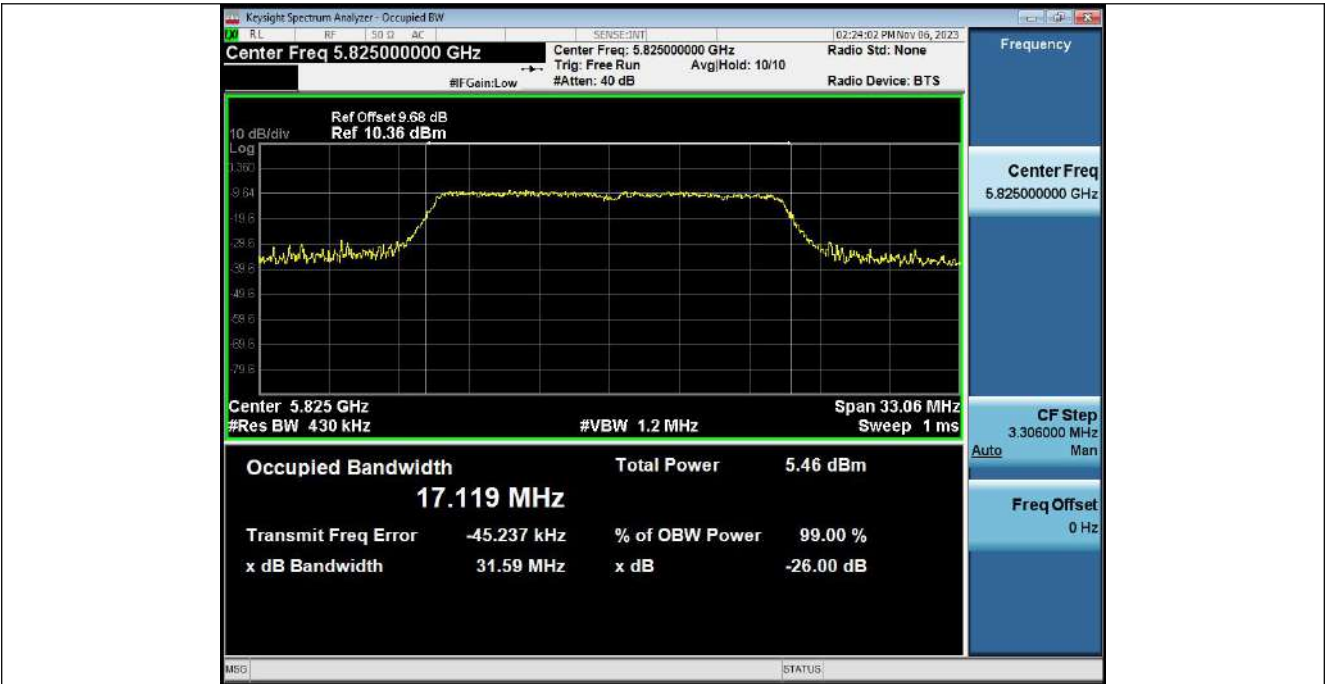

99%_OCB_NVNT_ANT1_802_11n(HT20)_5745



-26BW_NVNT_ANT1_802_11n(HT20)_5745



99%_OCB_NVNT_ANT1_802_11n(HT20)_5785



-26BW_NVNT_ANT1_802_11n(HT20)_5785



99%_OCB_NVNT_ANT1_802_11n(HT20)_5825



-26BW_NVNT_ANT1_802_11n(HT20)_5825



99% OCB NVNT ANT1 802_11ac(VHT20) 5745




-26BW_NVNT_ANT1_802_11ac(VHT20)_5745



99% OCB NVNT ANT1 802 11ac(VHT20) 5785



-26BW NVNT ANT1 802 11ac(VHT20) 5785

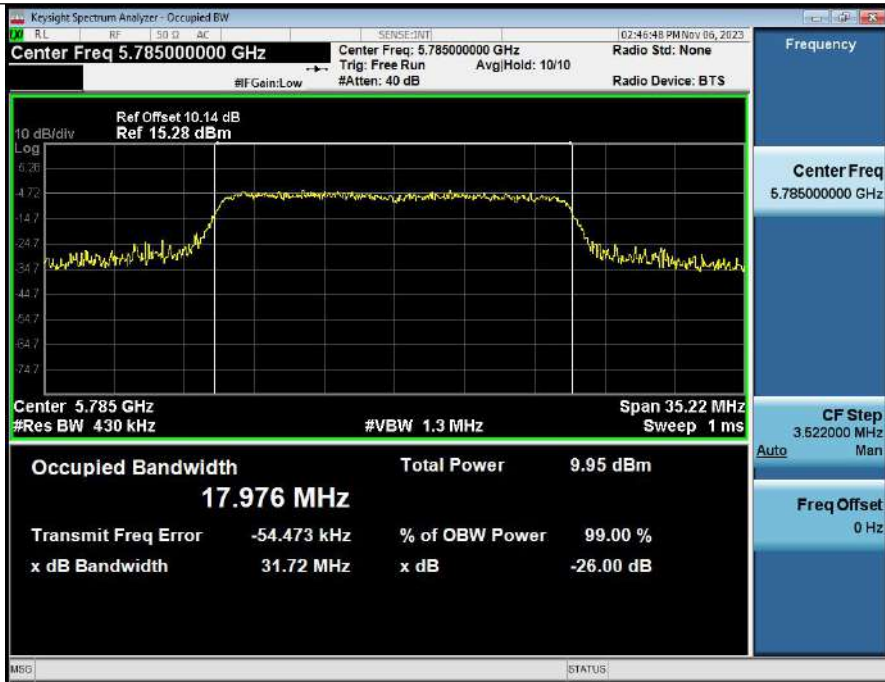

99% OCB NVNT ANT1 802 11ac(VHT20) 5825



-26BW NVNT ANT1 802 11ac(VHT20) 5825



99%_OCB_NVNT_ANT1_802_11n(HT40)_5755



-26BW_NVNT_ANT1_802_11n(HT40)_5755



99%_OCB_NVNT_ANT1_802_11n(HT40)_5795



-26BW_NVNT_ANT1_802_11n(HT40)_5795



99% OCB NVNT ANT1 802 11ac(VHT40) 5755



-26BW NVNT ANT1 802 11ac(VHT40) 5755




99% OCB NVNT_ANT1_802_11ac(VHT40)_5795



-26BW_NVNT_ANT1_802_11ac(VHT40)_5795




99% OCB_NVNT_ANT1_802_11ac(VHT80)_5775

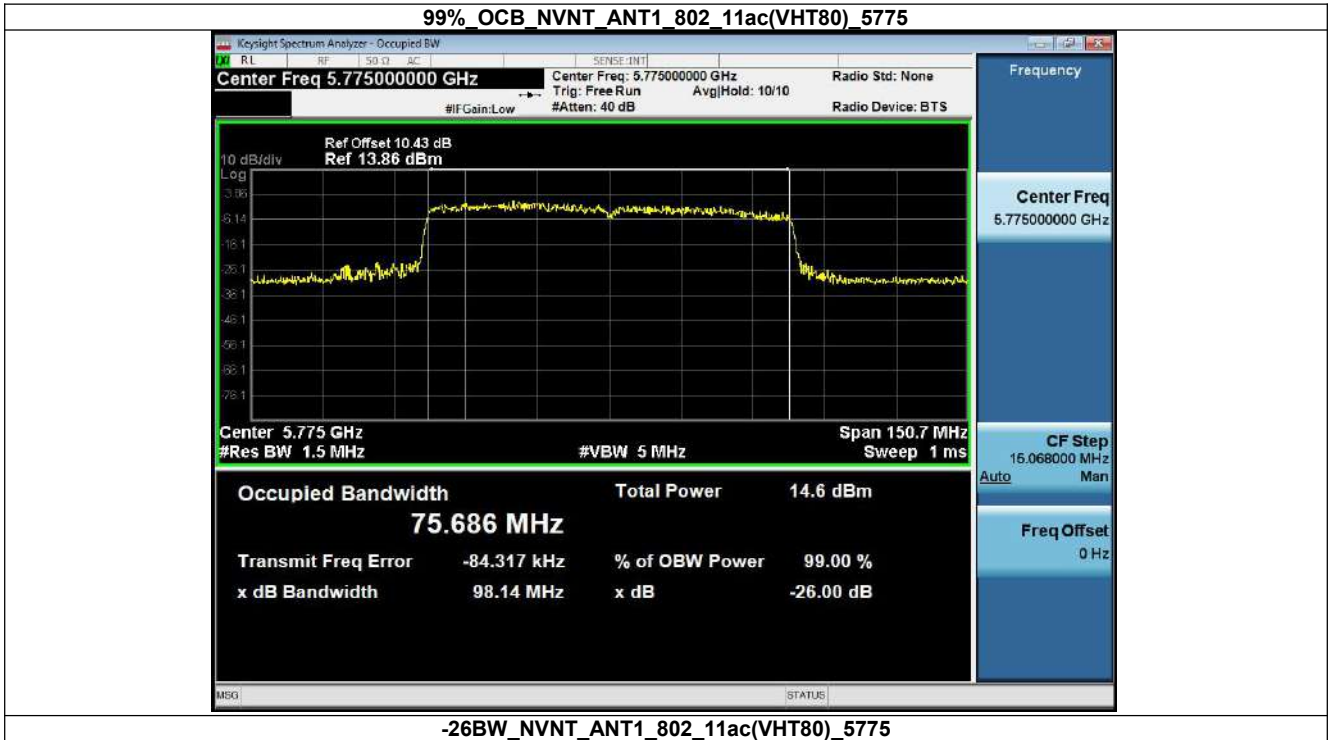




3. Duty Cycle


Condition	Antenna	Modulation	Frequency (MHz)	Duty cycle(%)	Duty_factor
NVNT	ANT1	802.11a	5745.00	90.91	0.41
NVNT	ANT1	802.11a	5785.00	90.91	0.41
NVNT	ANT1	802.11a	5825.00	90.91	0.41
NVNT	ANT1	802.11n(HT20)	5745.00	88.06	0.55
NVNT	ANT1	802.11n(HT20)	5785.00	88.06	0.55
NVNT	ANT1	802.11n(HT20)	5825.00	88.06	0.55
NVNT	ANT1	802.11ac(VHT20)	5745.00	89.55	0.48
NVNT	ANT1	802.11ac(VHT20)	5785.00	85.51	0.68
NVNT	ANT1	802.11ac(VHT20)	5825.00	88.06	0.55
NVNT	ANT1	802.11n(HT40)	5755.00	81.08	0.91
NVNT	ANT1	802.11n(HT40)	5795.00	78.38	1.06
NVNT	ANT1	802.11ac(VHT40)	5755.00	81.08	0.91
NVNT	ANT1	802.11ac(VHT40)	5795.00	78.95	1.03
NVNT	ANT1	802.11ac(VHT80)	5775.00	68.18	1.66

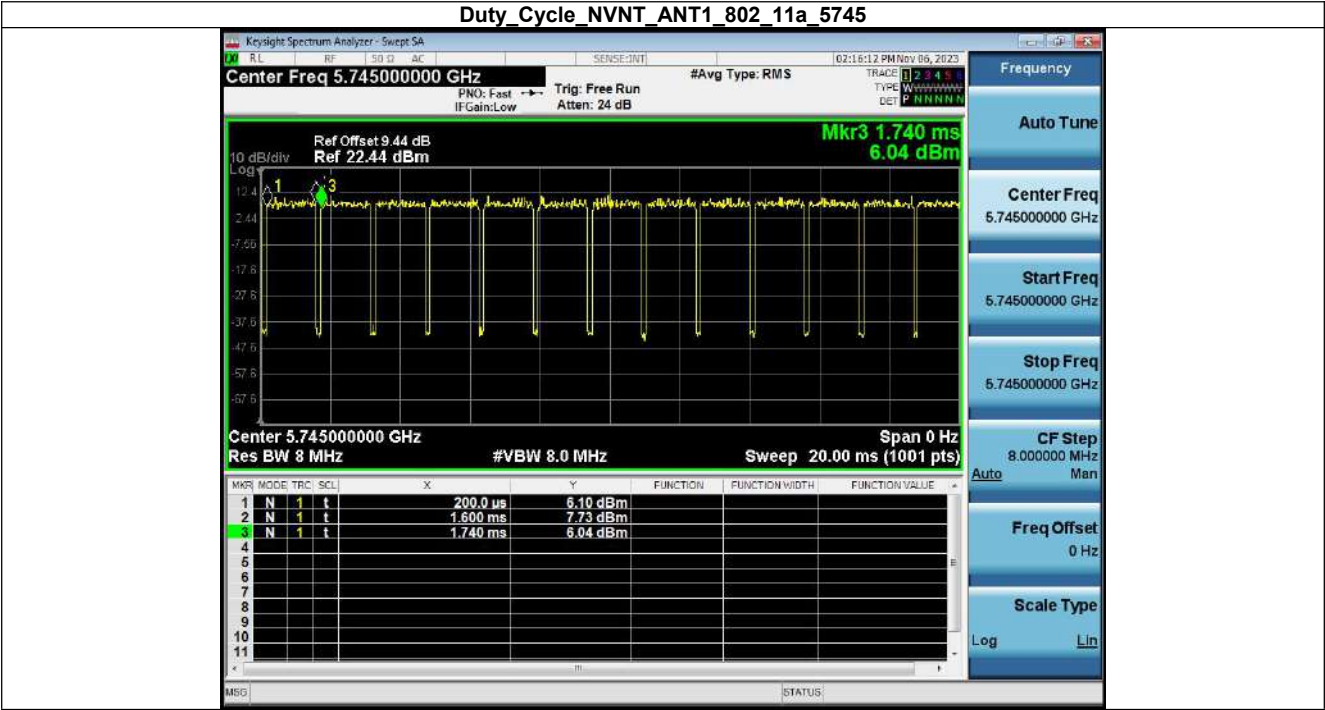


Duty Cycle_NVNT_ANT1_802_11a_5785

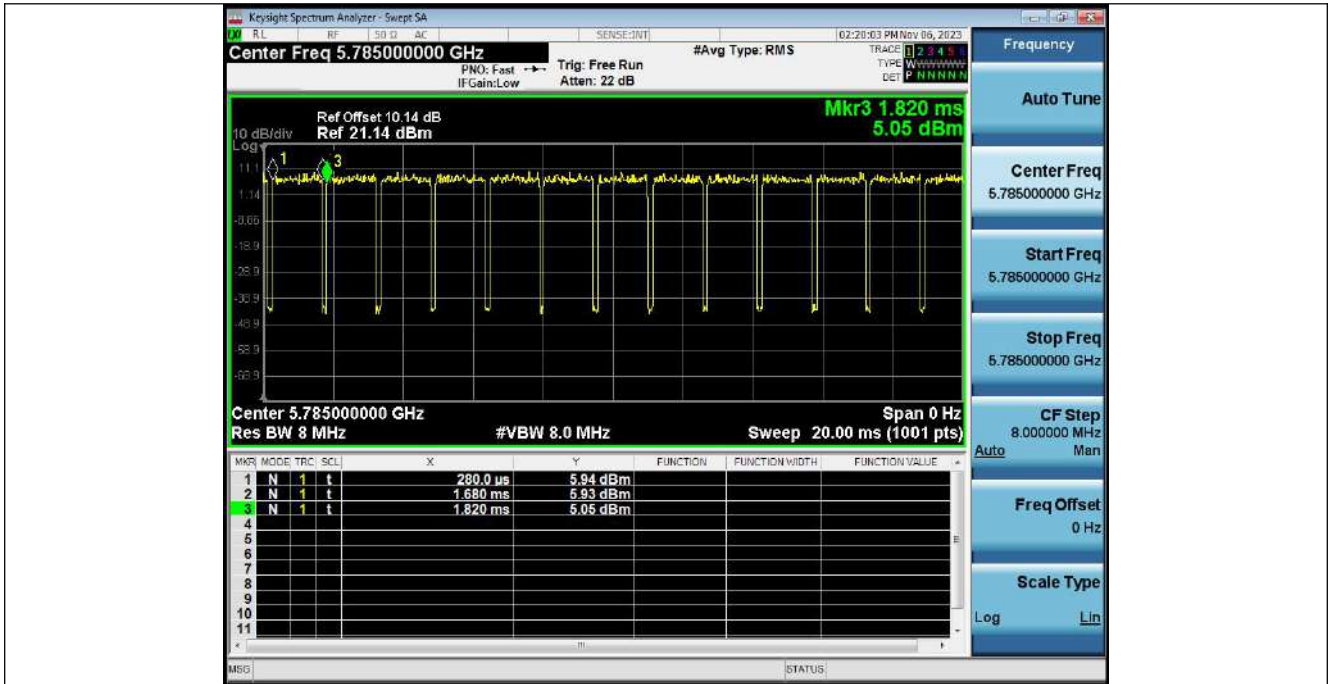


Duty_Cycle_NVNT_ANT1_802_11a_5825

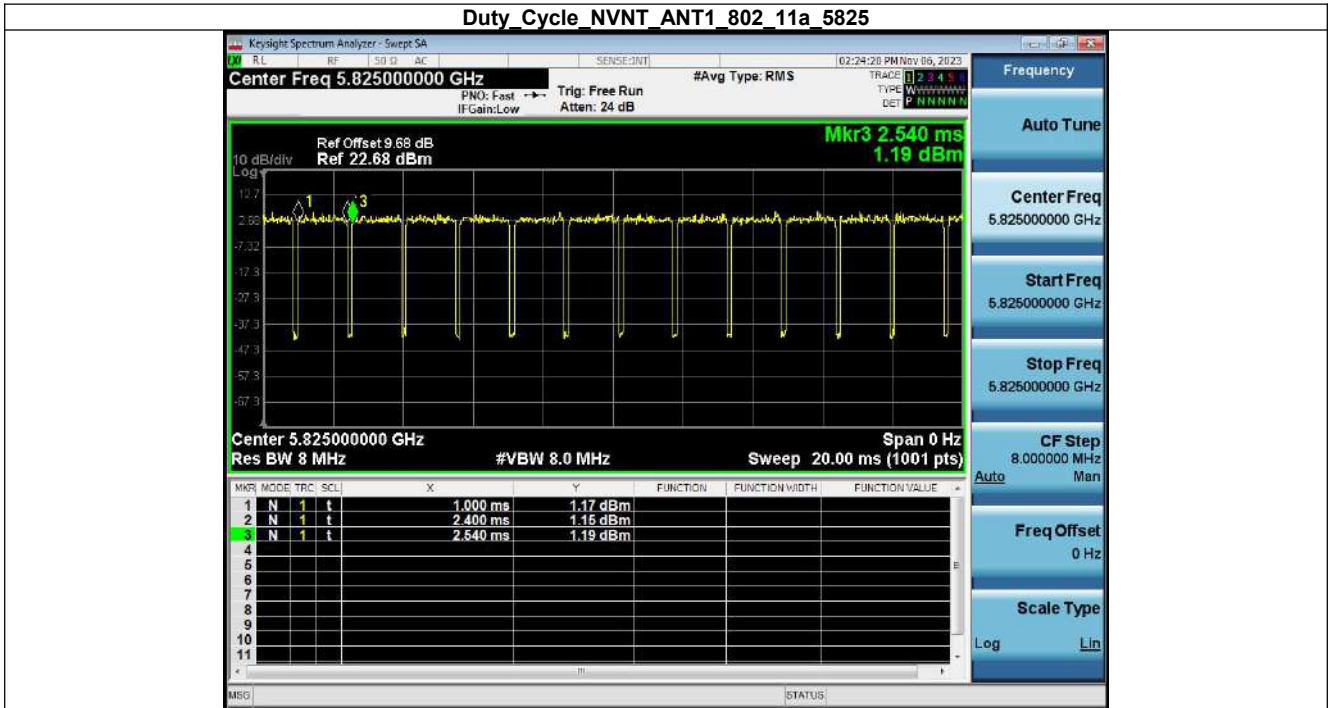


Duty_Cycle_NVNT_ANT1_802_11n(HT20)_5745

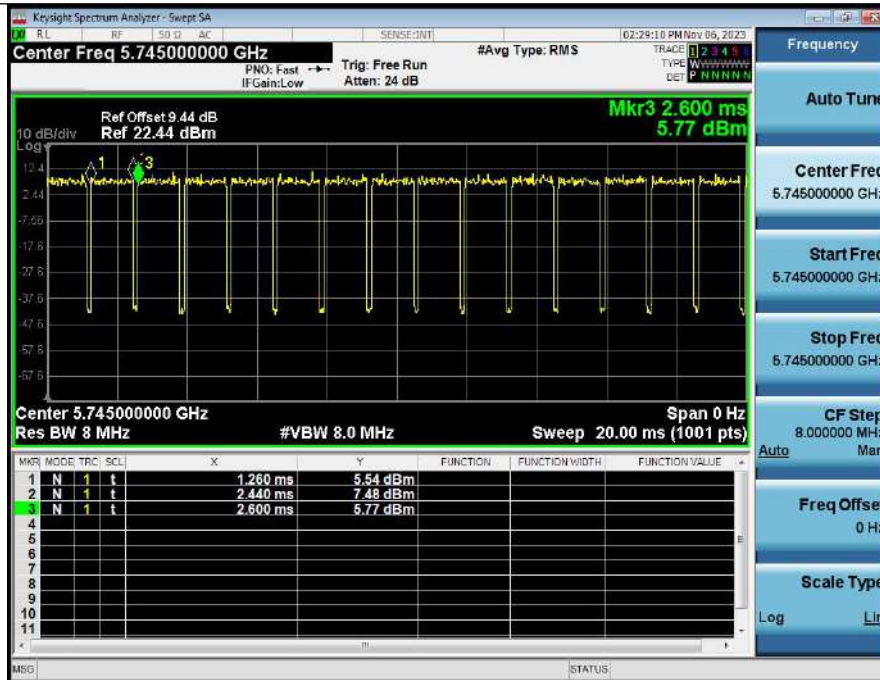


Duty_Cycle_NVNT_ANT1_802_11n(HT20)_5785

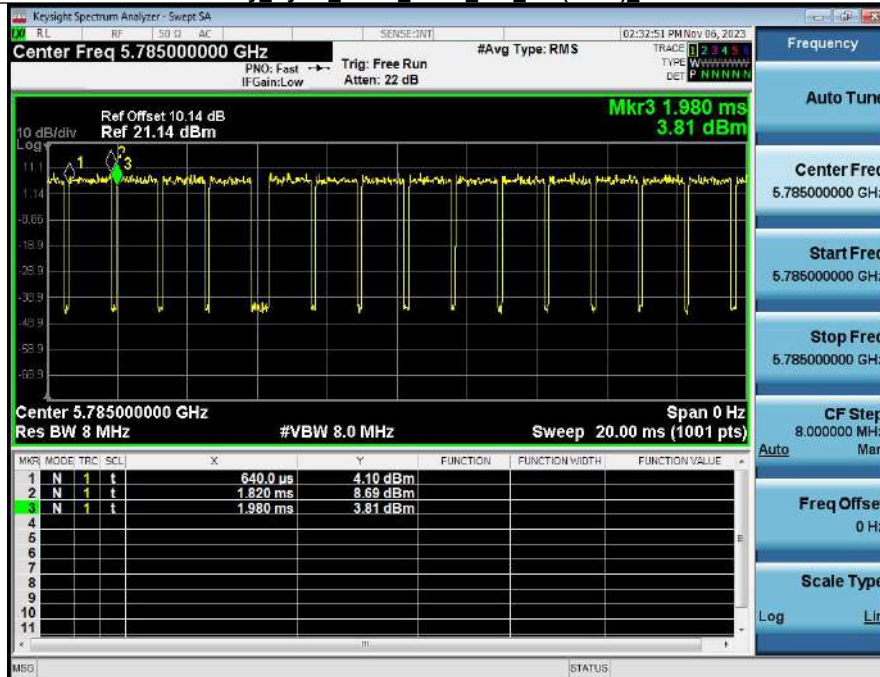


Duty_Cycle_NVNT_ANT1_802_11n(HT20)_5825

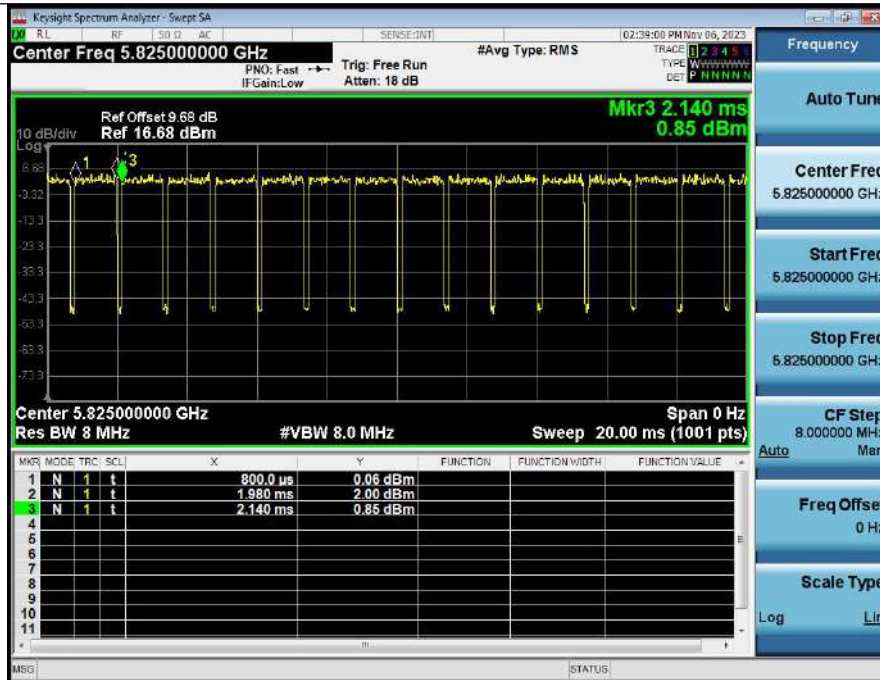


Duty_Cycle_NVNT_ANT1_802_11ac(VHT20)_5745

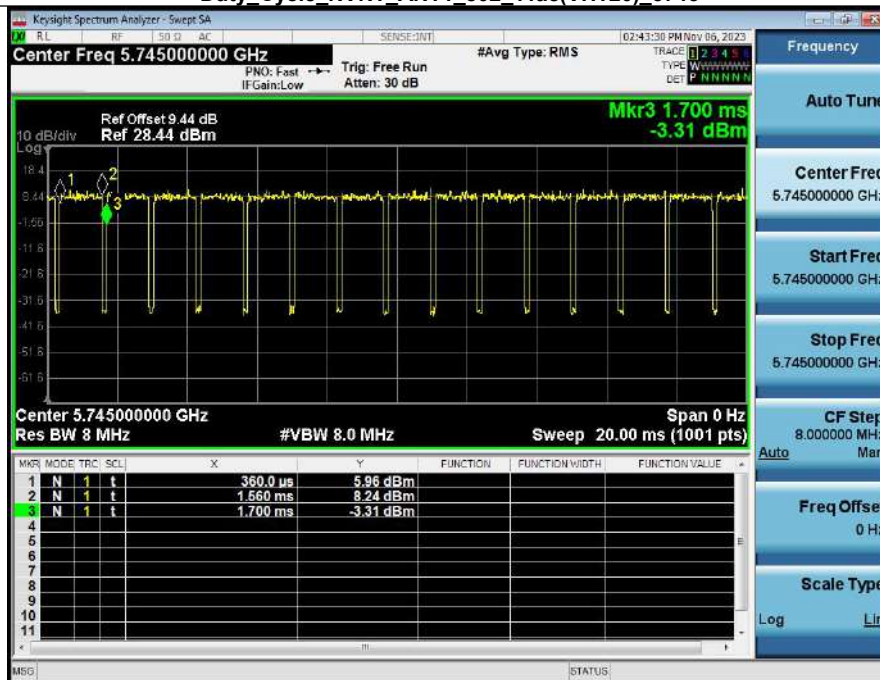


Duty_Cycle_NVNT_ANT1_802_11ac(VHT20)_5785

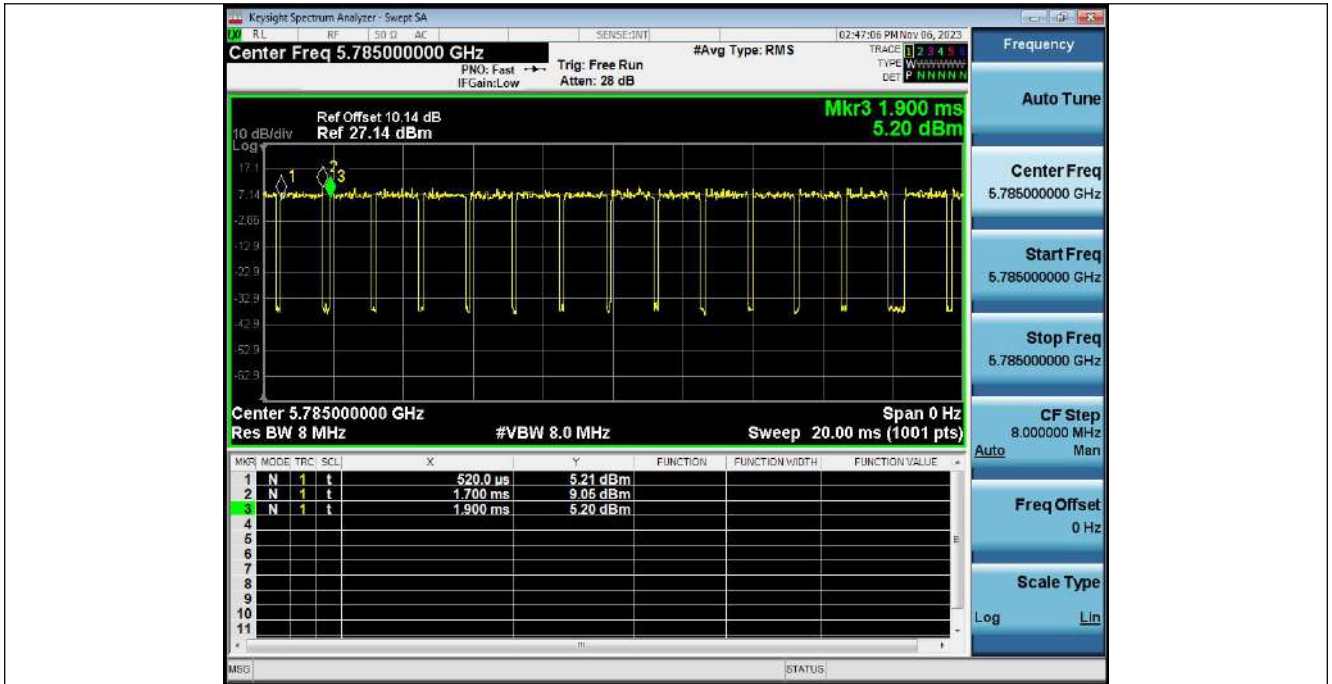


Duty_Cycle_NVNT_ANT1_802_11ac(VHT20)_5825

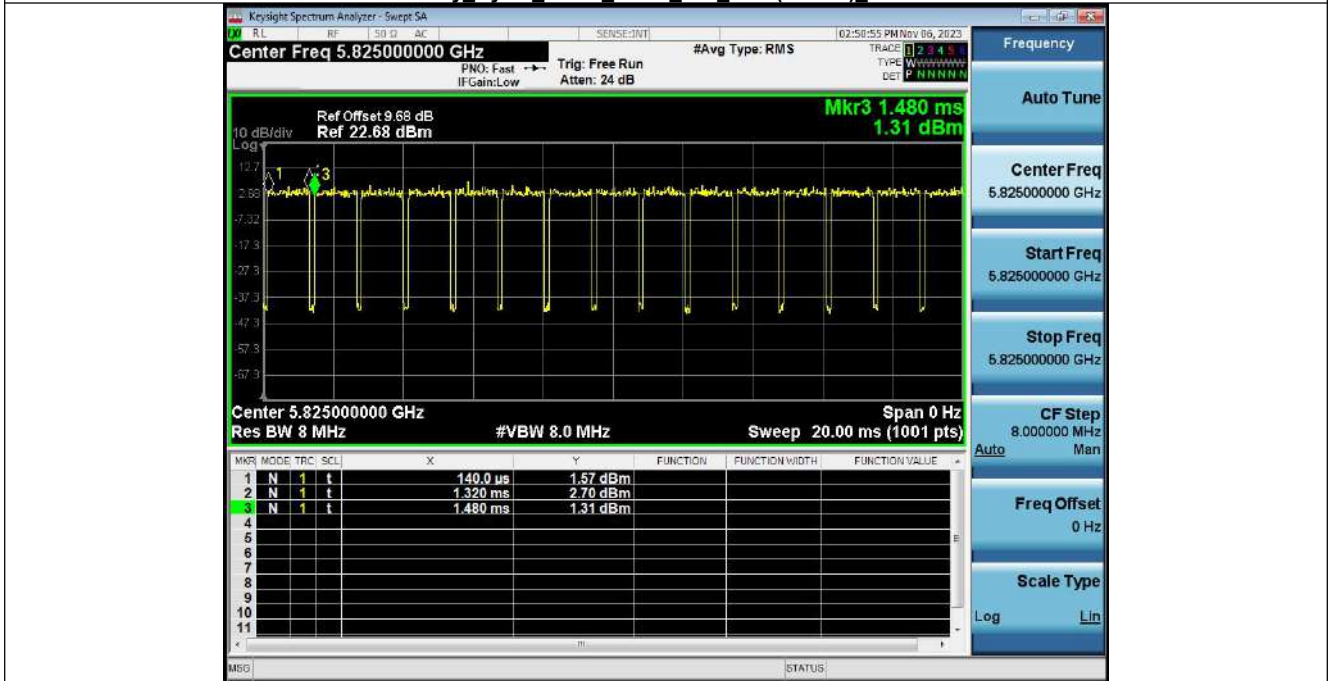


Duty_Cycle_NVNT_ANT1_802_11n(HT40)_5755

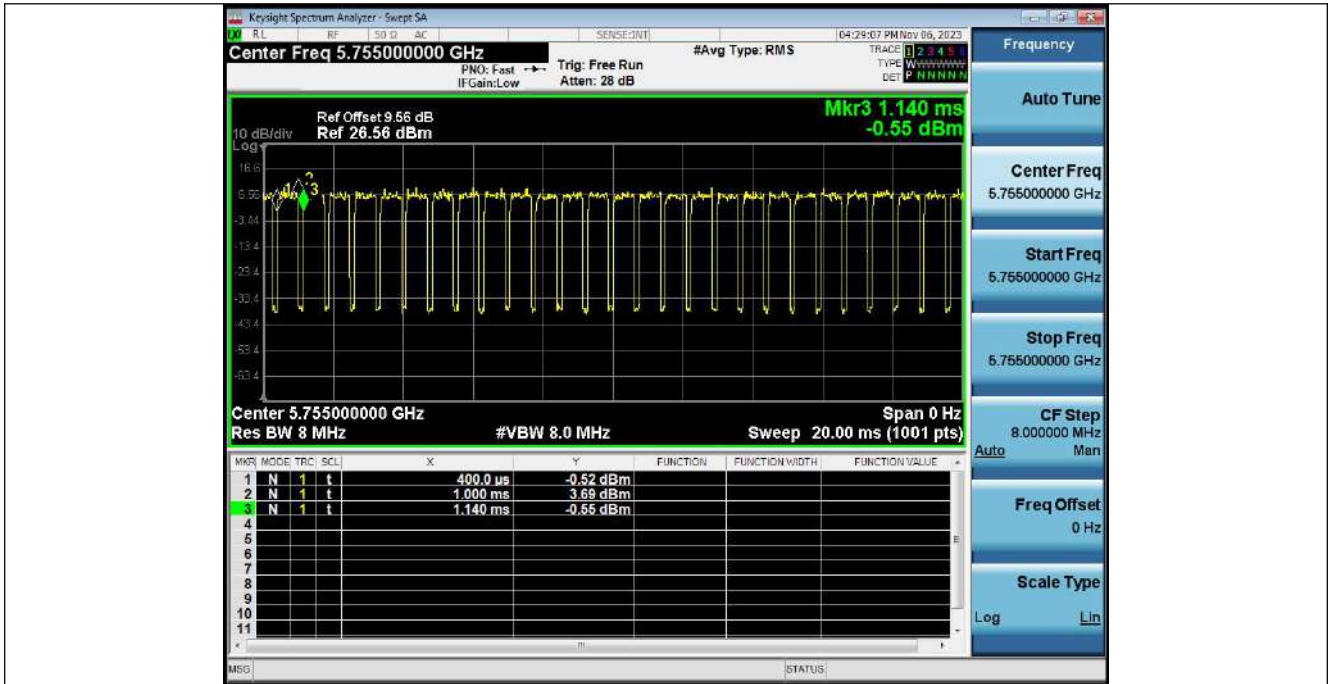


Duty_Cycle_NVNT_ANT1_802_11n(HT40)_5795

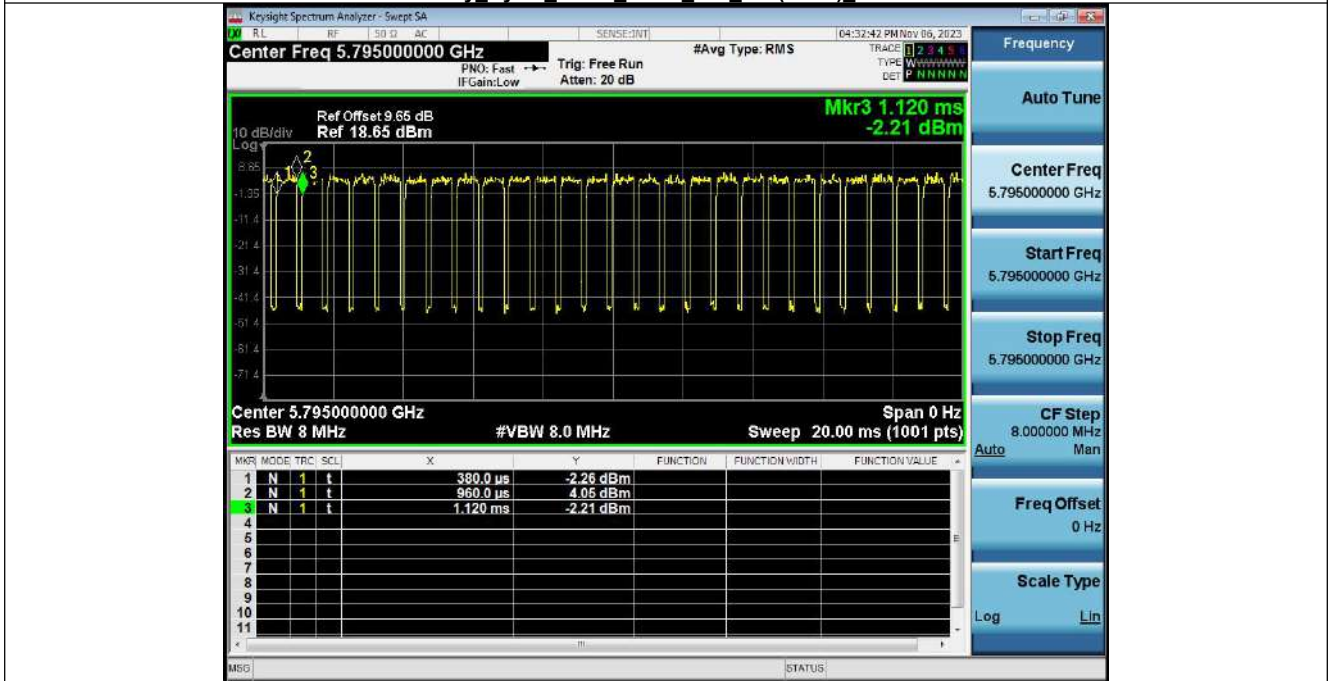


Duty_Cycle_NVNT_ANT1_802_11ac(VHT40)_5755

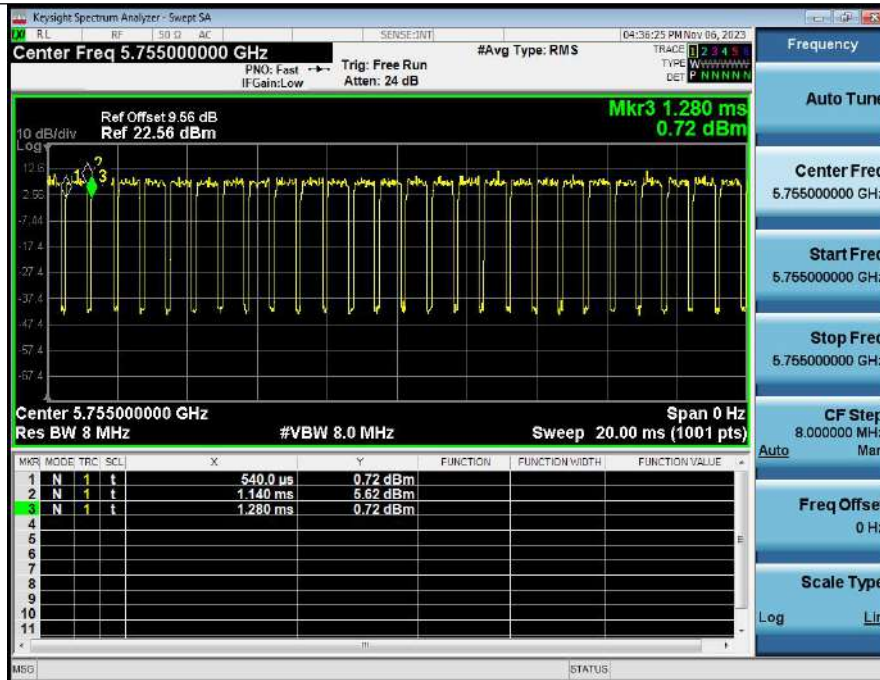

Duty_Cycle_NVNT_ANT1_802_11ac(VHT40)_5795

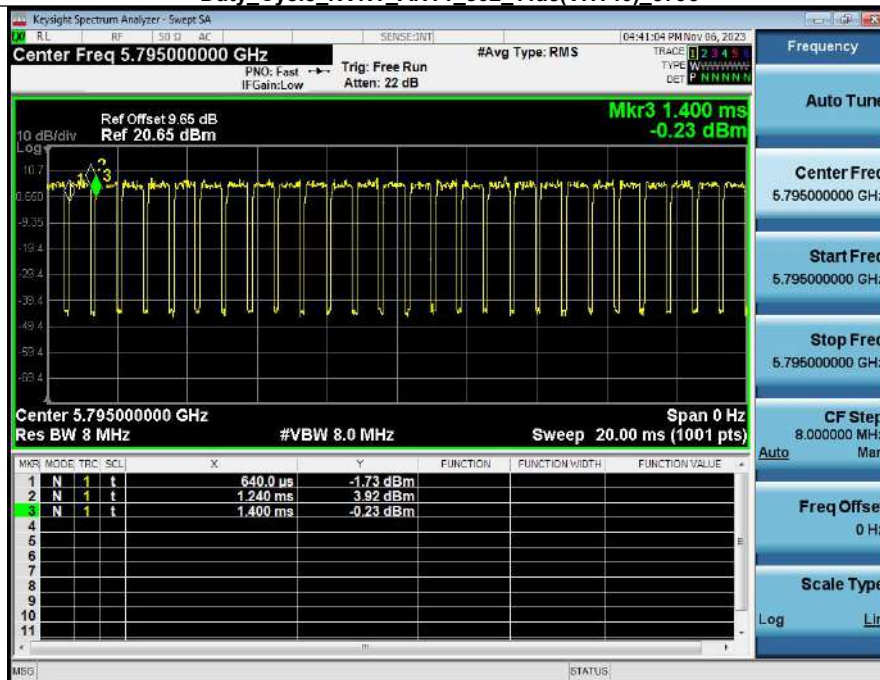


Duty_Cycle_NVNT_ANT1_802_11ac(VHT80)_5775

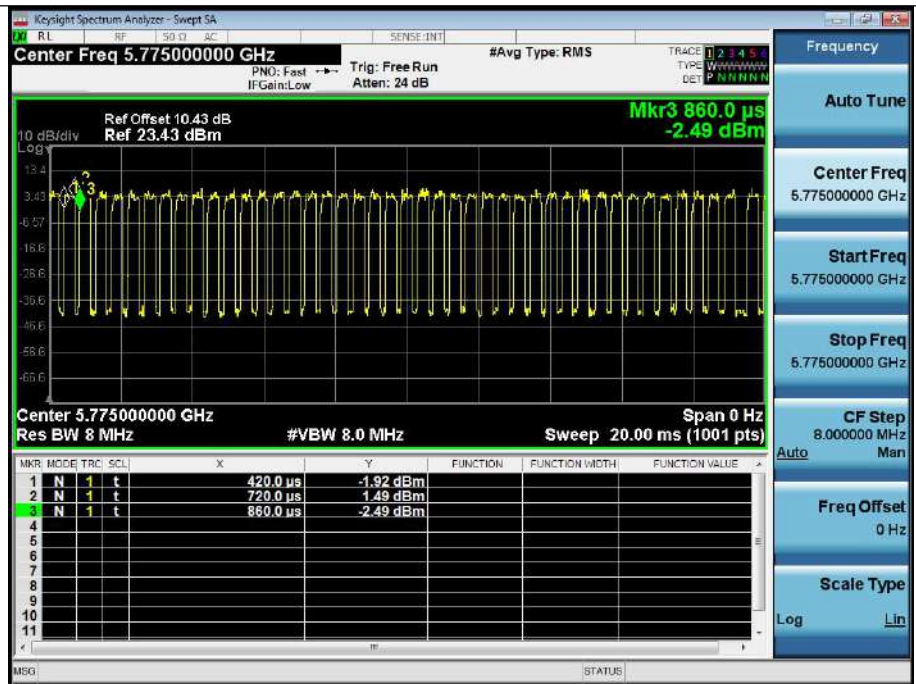


4. Maximum Conducted Output Power

Condition	Antenna	Modulation	Frequency (MHz)	Conducted Power(dBm)	Duty factor(dB)	Total Power(dBm)	limit(dBm)	Result
NVNT	ANT1	802.11a	5745.00	3.56	0.41	3.97	30	Pass
NVNT	ANT1	802.11a	5785.00	2.53	0.41	2.94	30	Pass
NVNT	ANT1	802.11a	5825.00	1.22	0.41	1.63	30	Pass
NVNT	ANT1	802.11n(HT20)	5745.00	3.32	0.55	3.87	30	Pass
NVNT	ANT1	802.11n(HT20)	5785.00	2.08	0.55	2.63	30	Pass
NVNT	ANT1	802.11n(HT20)	5825.00	2.02	0.55	2.57	30	Pass
NVNT	ANT1	802.11ac(VHT20)	5745.00	4.31	0.48	4.79	30	Pass
NVNT	ANT1	802.11ac(VHT20)	5785.00	2.81	0.68	3.49	30	Pass
NVNT	ANT1	802.11ac(VHT20)	5825.00	1.16	0.55	1.71	30	Pass
NVNT	ANT1	802.11n(HT40)	5755.00	4.25	0.91	5.16	30	Pass
NVNT	ANT1	802.11n(HT40)	5795.00	2.17	1.06	3.23	30	Pass
NVNT	ANT1	802.11ac(VHT40)	5755.00	5.42	0.91	6.33	30	Pass
NVNT	ANT1	802.11ac(VHT40)	5795.00	3.75	1.03	4.78	30	Pass
NVNT	ANT1	802.11ac(VHT80)	5775.00	2.28	1.66	3.94	30	Pass


Maximum_Conducted_Output_Power_NVNT_ANT1_802_11a_5745_20M

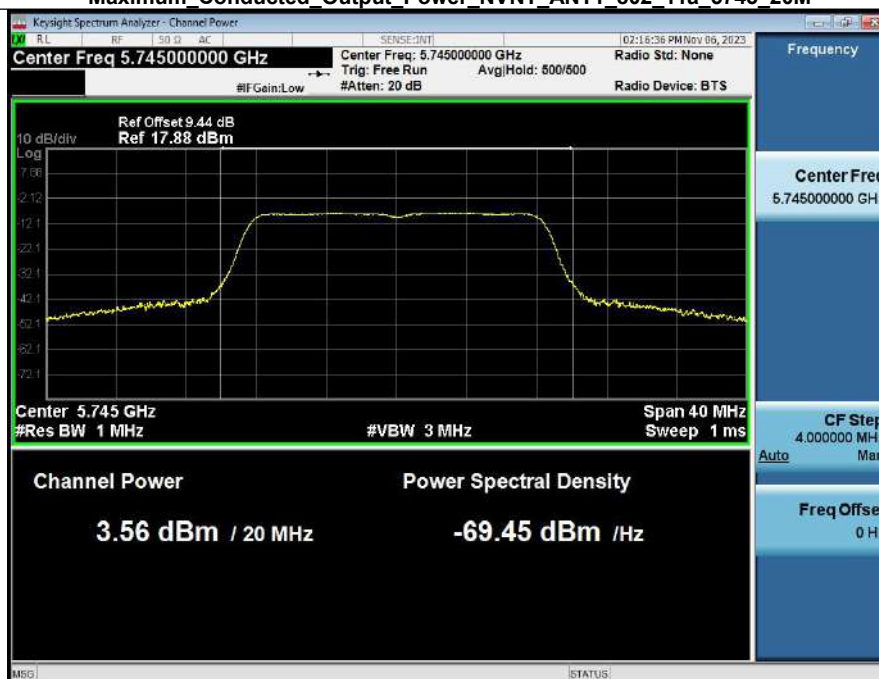


Maximum_Conducted_Output_Power_NVNT_ANT1_802_11a_5785_20M

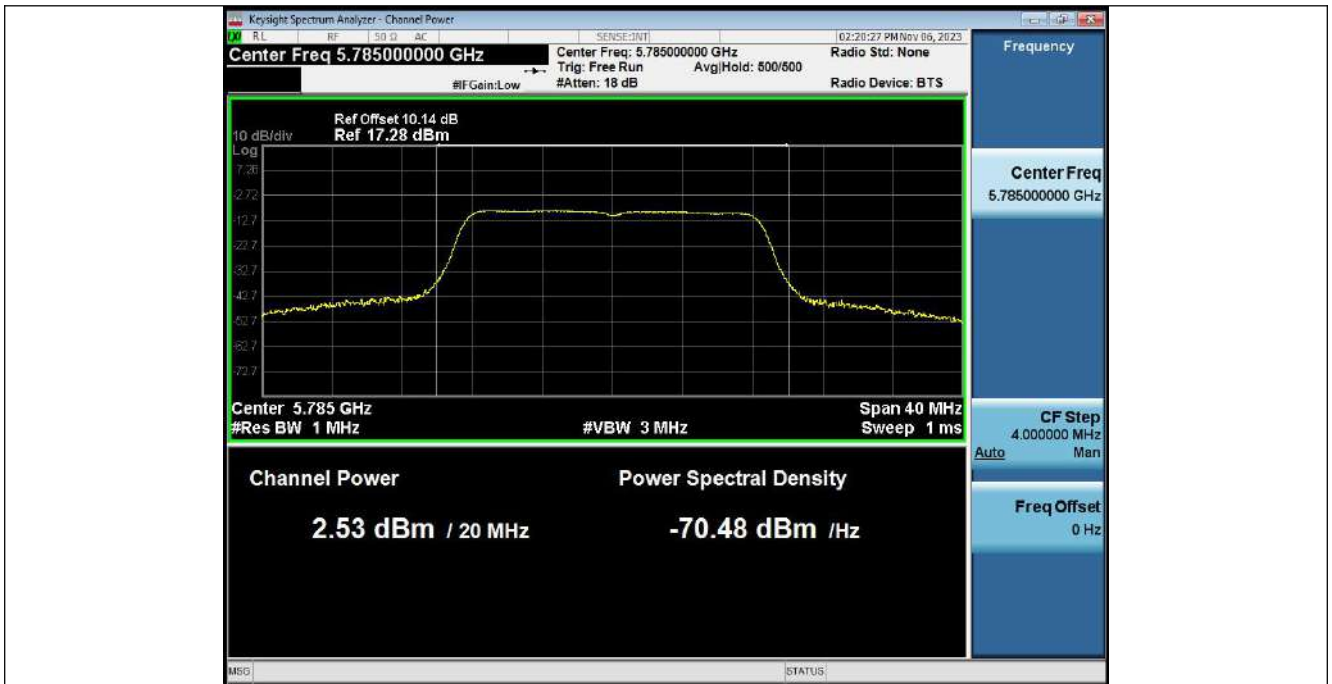

Maximum_Conducted_Output_Power_NVNT_ANT1_802_11a_5825_20M

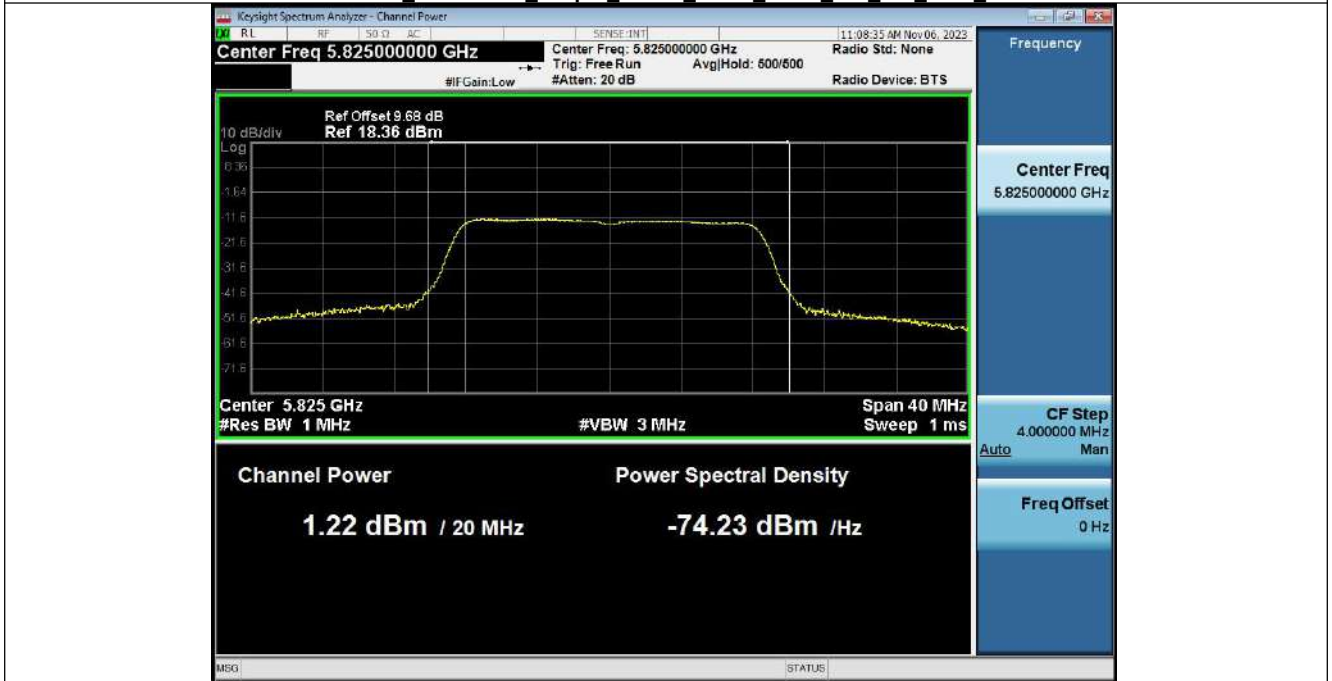

Maximum_Conducted_Output_Power_NVNT_ANT1_802_11n(HT20)_5745_20M

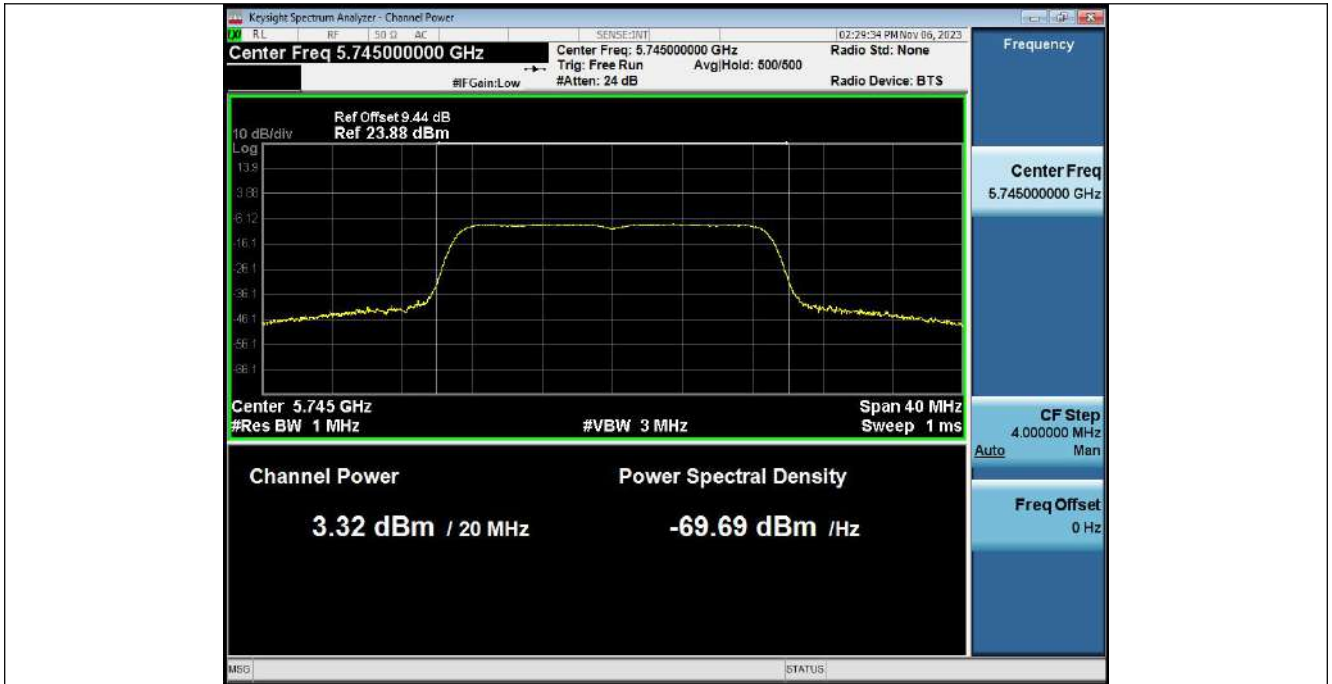

Maximum_Conducted_Output_Power_NVNT_ANT1_802_11n(HT20)_5785_20M



Maximum_Conducted_Output_Power_NVNT_ANT1_802_11n(HT20)_5825_20M




Maximum_Conducted_Output_Power_NVNT_ANT1_802_11ac(VHT20)_5745_20M



Maximum_Conducted_Output_Power_NVNT_ANT1_802_11ac(VHT20)_5785_20M



Maximum_Conducted_Output_Power_NVNT_ANT1_802_11ac(VHT20)_5825_20M

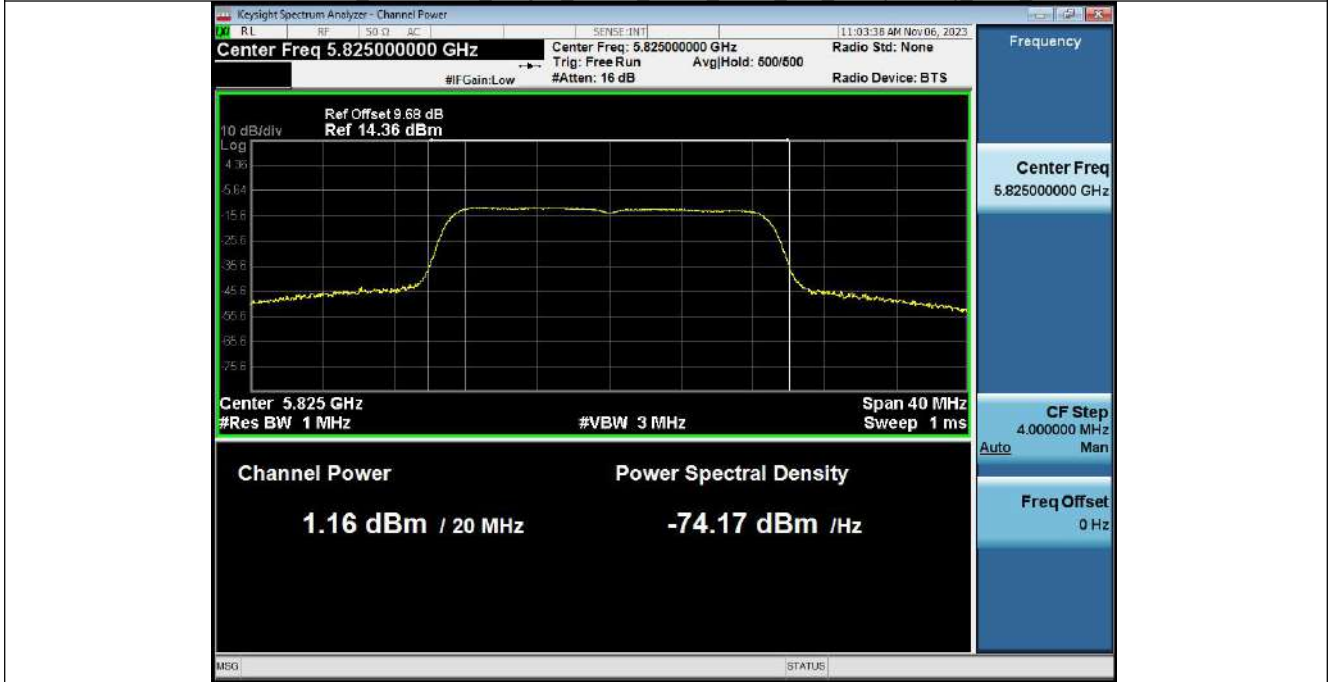

Maximum_Conducted_Output_Power_NVNT_ANT1_802_11n(HT40)_5755_40M



Maximum_Conducted_Output_Power_NVNT_ANT1_802_11n(HT40)_5795_40M




Maximum_Conducted_Output_Power_NVNT_ANT1_802_11ac(VHT40)_5755_40M



Maximum_Conducted_Output_Power_NVNT_ANT1_802_11ac(VHT40)_5795_40M



Maximum_Conducted_Output_Power_NVNT_ANT1_802_11ac(VHT80)_5775_80M

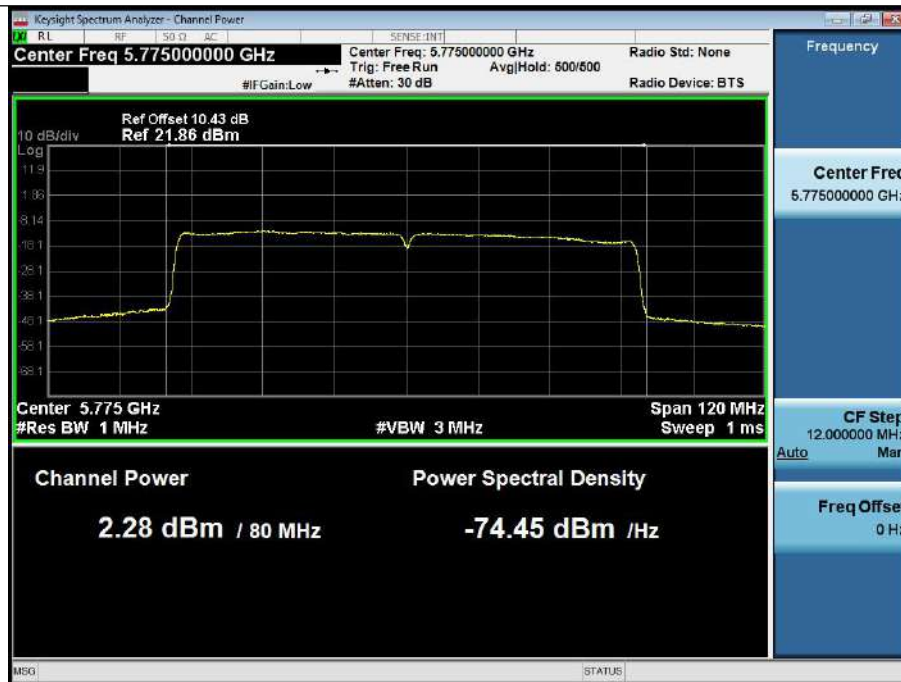

5. Power Spectral Density

Condition	Antenna	Modulation	Frequency (MHz)	PSD_SA(dBm/RBW)	Duty factor(dB)	RB factor(dB)	PSD(dBm/500kHz)	limit(dBm/500kHz)	Result
NVNT	ANT1	802.11a	5745.00	-10.66	0.41	-0	-10.34	30	Pass
NVNT	ANT1	802.11a	5785.00	-11.24	0.41	-0	-10.91	30	Pass
NVNT	ANT1	802.11a	5825.00	-14.93	0.41	-0	-14.60	30	Pass
NVNT	ANT1	802.11n(HT20)	5745.00	-10.94	0.55	-0	-10.47	30	Pass
NVNT	ANT1	802.11n(HT20)	5785.00	-11.95	0.55	-0	-11.49	30	Pass
NVNT	ANT1	802.11n(HT20)	5825.00	-16.05	0.55	-0	-15.58	30	Pass
NVNT	ANT1	802.11ac(VHT20)	5745.00	-9.95	0.48	-0	-9.56	30	Pass
NVNT	ANT1	802.11ac(VHT20)	5785.00	-11.19	0.68	-0	-10.59	30	Pass
NVNT	ANT1	802.11ac(VHT20)	5825.00	-15.22	0.55	-0	-14.76	30	Pass
NVNT	ANT1	802.11n(HT40)	5755.00	-12.49	0.91	-0	-11.67	30	Pass
NVNT	ANT1	802.11n(HT40)	5795.00	-14.84	1.06	-0	-13.87	30	Pass
NVNT	ANT1	802.11ac(VHT40)	5755.00	-11.24	0.91	-0	-10.42	30	Pass
NVNT	ANT1	802.11ac(VHT40)	5795.00	-13.64	1.03	-0	-12.69	30	Pass
NVNT	ANT1	802.11ac(VHT80)	5775.00	-14.72	1.66	-0	-13.15	30	Pass



Power Spectral Density NVNT ANT1 802 11a 5785



Power_Spectral_Density_NVNT_ANT1_802_11a_5825



Power_Spectral_Density_NVNT_ANT1_802_11n(HT20)_5745



Power Spectral Density_NVNT_ANT1_802_11n(HT20)_5785



Power Spectral Density_NVNT_ANT1_802_11n(HT20)_5825




Power_Spectral_Density_NVNT_ANT1_802_11ac(VHT20)_5745



Power_Spectral_Density_NVNT_ANT1_802_11ac(VHT20)_5785



Power Spectral Density NVNT_ANT1_802_11n(HT40)_5755

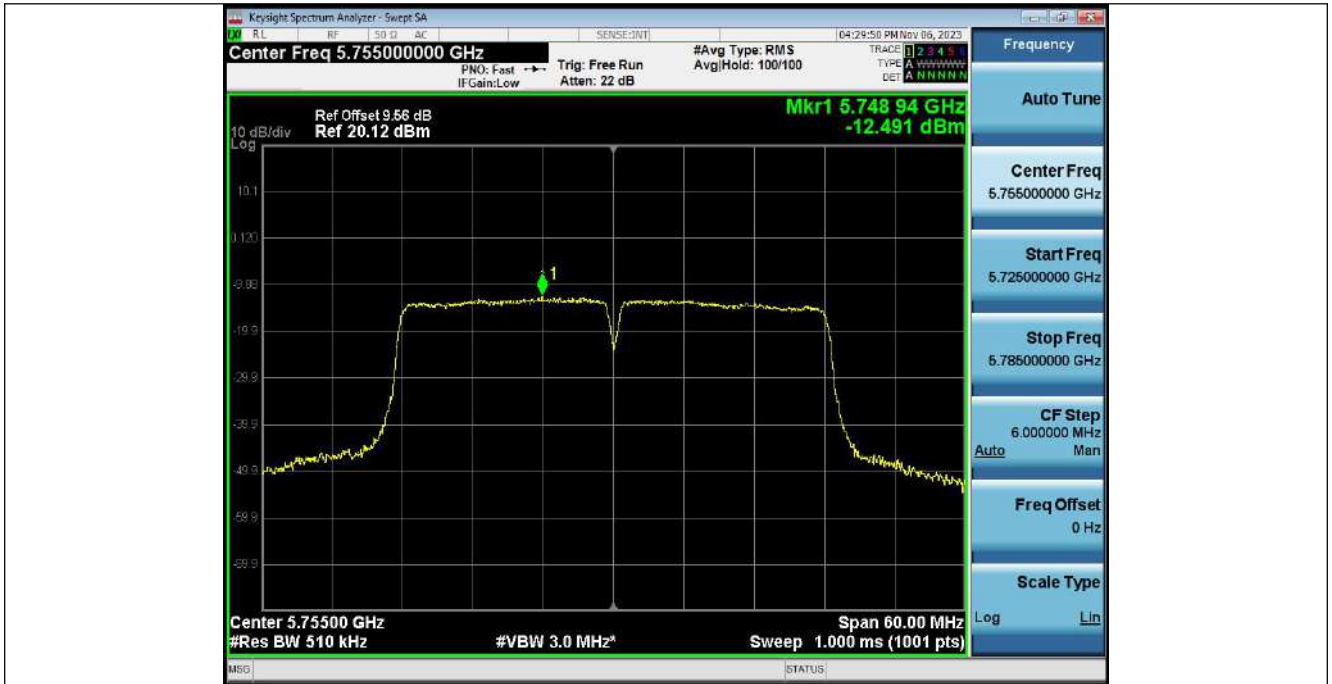

Power_Spectral_Density_NVNT_ANT1_802_11n(HT40)_5795



Power_Spectral_Density_NVNT_ANT1_802_11ac(VHT40)_5755



Power_Spectral_Density_NVNT_ANT1_802_11ac(VHT40)_5795



Power_Spectral_Density_NVNT_ANT1_802_11ac(VHT80)_5775




6. Bandedge

Condition	Antenna	Modulation	TX_Frequency (MHz)	Frequency Area(MHz)	Frequency(MHz)	Amplitude(dBm)	Limit(dBm)	Result
NVNT	ANT1	802.11a	LCH	5565-5655	5605.950	-45.98	-27.00	Pass
NVNT	ANT1	802.11a	LCH	5655-5700	5657.970	-47.30	-24.56	Pass
NVNT	ANT1	802.11a	LCH	5700-5720	5708.100	-47.00	12.27	Pass
NVNT	ANT1	802.11a	LCH	5720-5725	5722.290	-42.43	20.82	Pass
NVNT	ANT1	802.11a	HCH	5850-5855	5854.225	-47.28	17.37	Pass
NVNT	ANT1	802.11a	HCH	5855-5875	5874.340	-46.78	10.18	Pass
NVNT	ANT1	802.11a	HCH	5875-5920	5918.110	-46.79	-25.45	Pass
NVNT	ANT1	802.11a	HCH	5920-6005	5941.080	-42.04	-27.00	Pass
NVNT	ANT1	802.11n(HT20)	LCH	5565-5655	5575.980	-46.30	-27.00	Pass
NVNT	ANT1	802.11n(HT20)	LCH	5655-5700	5655.990	-47.59	-26.19	Pass
NVNT	ANT1	802.11n(HT20)	LCH	5700-5720	5718.820	-44.73	15.27	Pass
NVNT	ANT1	802.11n(HT20)	LCH	5720-5725	5723.595	-35.94	23.80	Pass
NVNT	ANT1	802.11n(HT20)	HCH	5850-5855	5853.905	-46.80	18.10	Pass
NVNT	ANT1	802.11n(HT20)	HCH	5855-5875	5873.800	-47.08	10.34	Pass
NVNT	ANT1	802.11n(HT20)	HCH	5875-5920	5918.605	-47.10	-25.85	Pass
NVNT	ANT1	802.11n(HT20)	HCH	5920-6005	5930.370	-41.24	-27.00	Pass
NVNT	ANT1	802.11ac(VHT20)	LCH	5565-5655	5646.360	-46.75	-27.00	Pass
NVNT	ANT1	802.11ac(VHT20)	LCH	5655-5700	5656.215	-46.67	-26.00	Pass
NVNT	ANT1	802.11ac(VHT20)	LCH	5700-5720	5718.760	-44.96	15.25	Pass
NVNT	ANT1	802.11ac(VHT20)	LCH	5720-5725	5723.795	-38.35	24.25	Pass
NVNT	ANT1	802.11ac(VHT20)	HCH	5850-5855	5854.560	-47.06	16.60	Pass
NVNT	ANT1	802.11ac(VHT20)	HCH	5855-5875	5871.680	-47.05	10.93	Pass
NVNT	ANT1	802.11ac(VHT20)	HCH	5875-5920	5918.245	-45.89	-25.56	Pass
NVNT	ANT1	802.11ac(VHT20)	HCH	5920-6005	5963.605	-41.98	-27.00	Pass
NVNT	ANT1	802.11n(HT40)	LCH	5595-5655	5597.460	-46.46	-27.00	Pass
NVNT	ANT1	802.11n(HT40)	LCH	5655-5700	5658.195	-47.17	-24.37	Pass
NVNT	ANT1	802.11n(HT40)	LCH	5700-5720	5716.640	-41.41	14.66	Pass
NVNT	ANT1	802.11n(HT40)	LCH	5720-5725	5720.955	-39.78	17.78	Pass
NVNT	ANT1	802.11n(HT40)	HCH	5850-5855	5854.125	-47.13	17.59	Pass
NVNT	ANT1	802.11n(HT40)	HCH	5855-5875	5867.080	-46.60	12.22	Pass
NVNT	ANT1	802.11n(HT40)	HCH	5875-5920	5918.470	-47.15	-25.74	Pass
NVNT	ANT1	802.11n(HT40)	HCH	5920-5955	5942.400	-41.81	-27.00	Pass
NVNT	ANT1	802.11ac(VHT40)	LCH	5595-5655	5622.600	-46.80	-27.00	Pass
NVNT	ANT1	802.11ac(VHT40)	LCH	5655-5700	5688.255	-47.04	0.34	Pass
NVNT	ANT1	802.11ac(VHT40)	LCH	5700-5720	5719.660	-39.09	15.50	Pass
NVNT	ANT1	802.11ac(VHT40)	LCH	5720-5725	5721.640	-36.86	19.34	Pass
NVNT	ANT1	802.11ac(VHT40)	HCH	5850-5855	5854.710	-46.99	16.26	Pass
NVNT	ANT1	802.11ac(VHT40)	HCH	5855-5875	5874.280	-46.81	10.20	Pass
NVNT	ANT1	802.11ac(VHT40)	HCH	5875-5920	5918.245	-47.01	-25.56	Pass
NVNT	ANT1	802.11ac(VHT40)	HCH	5920-5955	5953.040	-43.04	-27.00	Pass
NVNT	ANT1	802.11ac(VHT80)	MCH	5650-5655	5650.965	-45.70	-27.00	Pass
NVNT	ANT1	802.11ac(VHT80)	MCH	5655-5700	5688.345	-43.88	0.42	Pass
NVNT	ANT1	802.11ac(VHT80)	MCH	5700-5720	5719.820	-37.70	15.55	Pass
NVNT	ANT1	802.11ac(VHT80)	MCH	5720-5725	5720.140	-37.13	15.92	Pass
NVNT	ANT1	802.11ac(VHT80)	MCH	5850-5855	5854.820	-46.45	16.01	Pass
NVNT	ANT1	802.11ac(VHT80)	MCH	5855-5875	5874.060	-45.92	10.26	Pass
NVNT	ANT1	802.11ac(VHT80)	MCH	5875-5920	5916.175	-46.43	-23.86	Pass
NVNT	ANT1	802.11ac(VHT80)	MCH	5920-5925	5920.955	-41.45	-27.00	Pass

Note: Antenna gain has been added to the spectrum for evaluation.


Bandedge_NVNT_ANT1_802_11a_5745

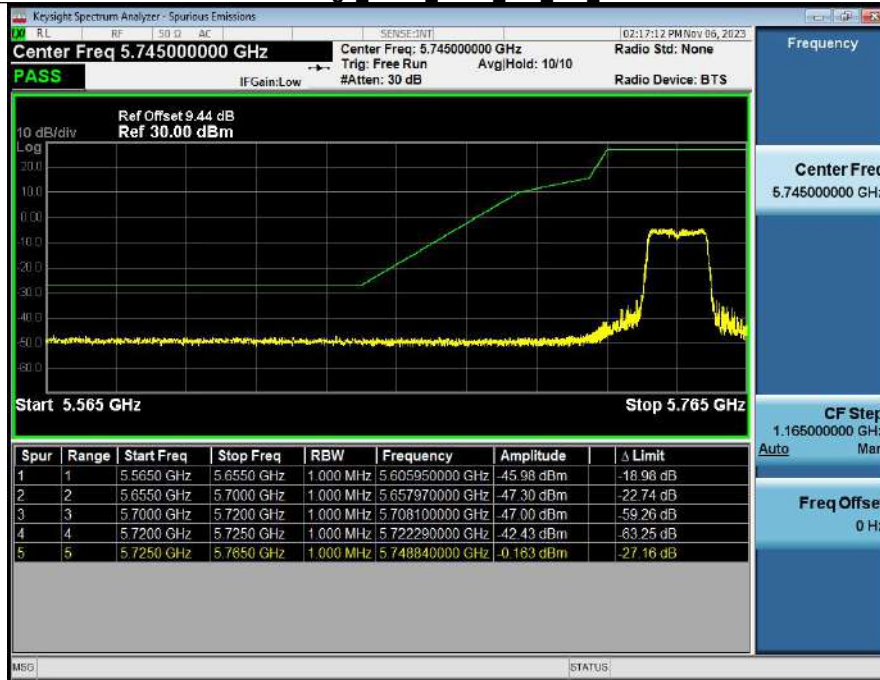

Bandedge_NVNT_ANT1_802_11a_5825




Bandedge_NVNT_ANT1_802_11n(HT20)_5745

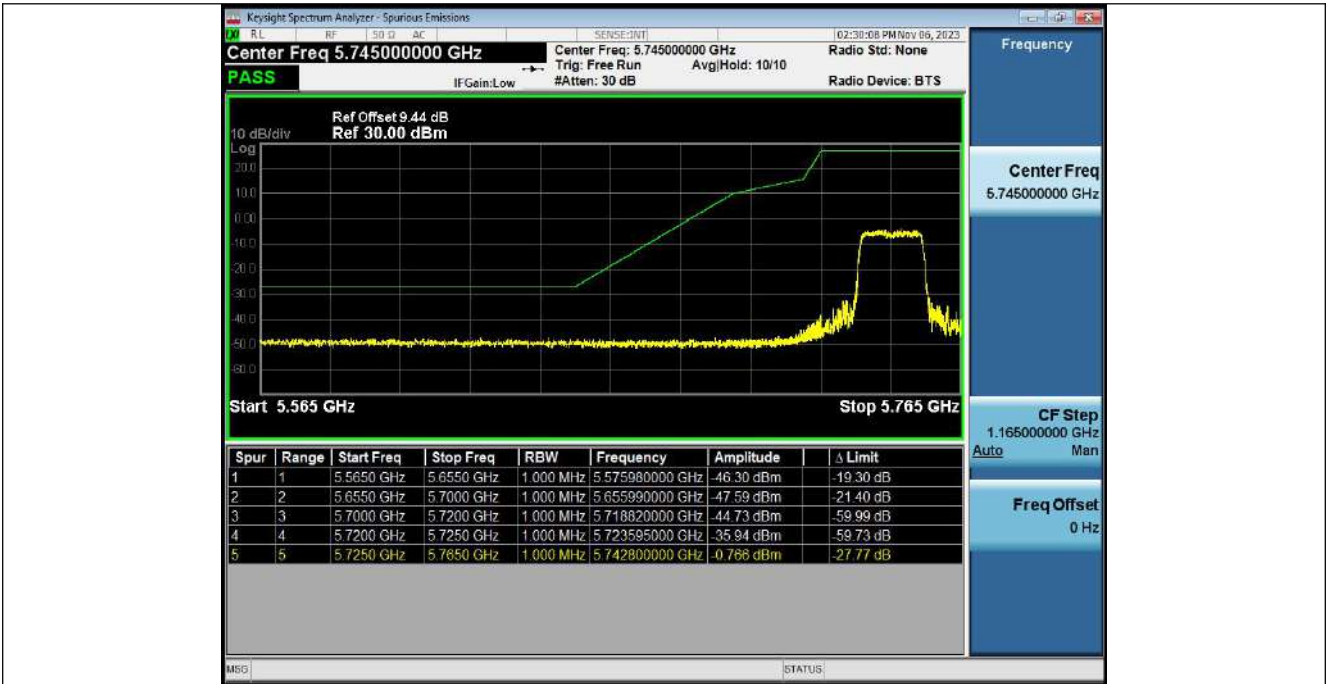


Bandedge_NVNT_ANT1_802_11n(HT20)_5825




Bandedge_NVNT_ANT1_802_11ac(VHT20)_5745

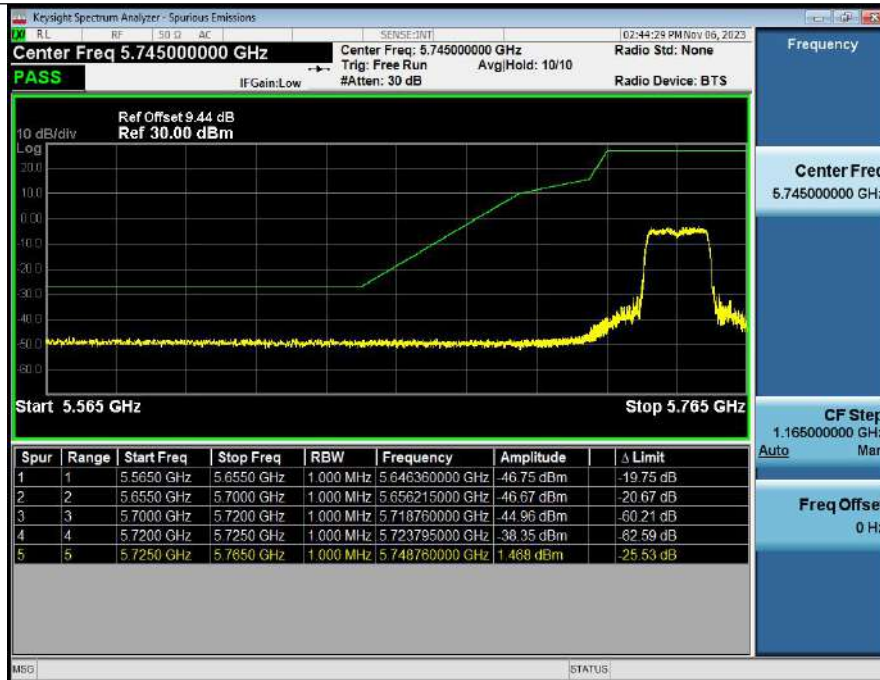


Bandedge_NVNT_ANT1_802_11ac(VHT20)_5825

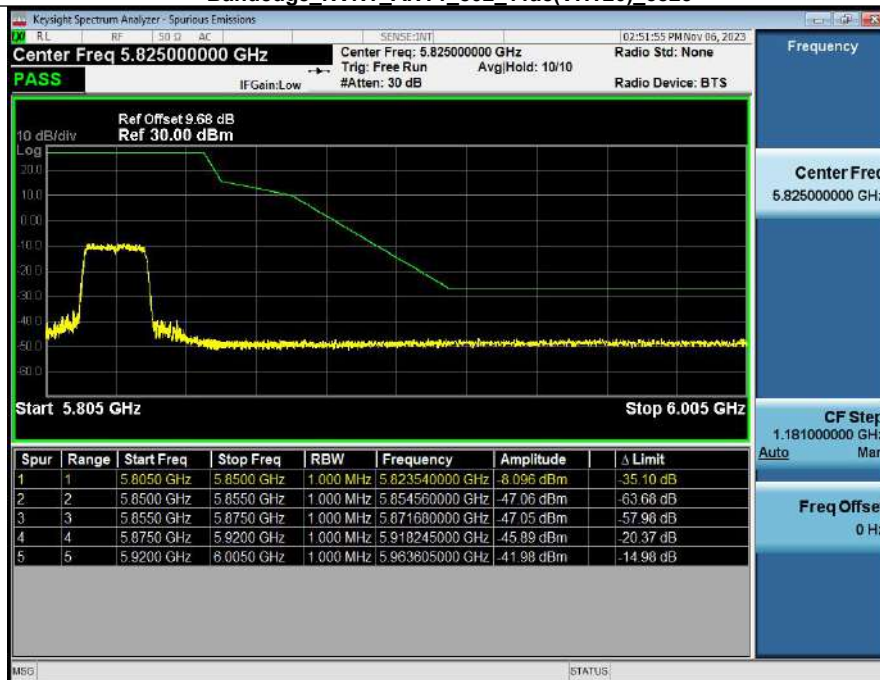


Bandedge_NVNT_ANT1_802_11n(HT40)_5755

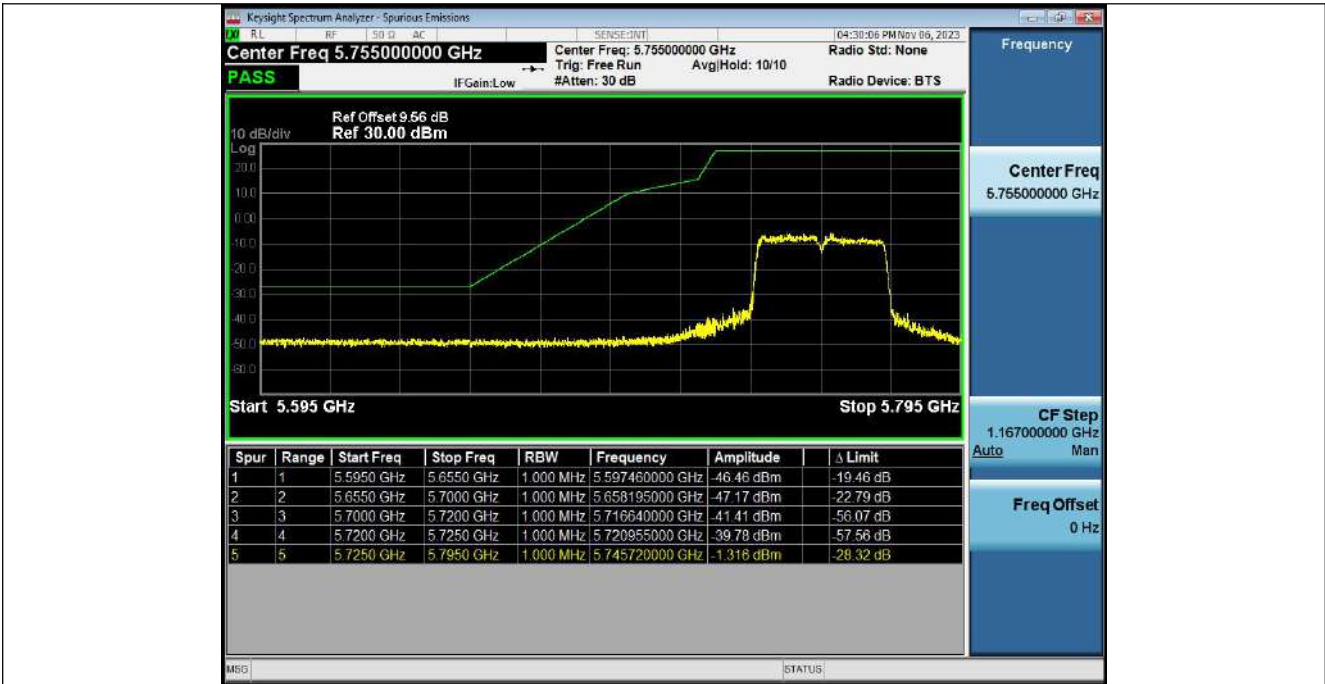


Bandedge_NVNT_ANT1_802_11n(HT40)_5795

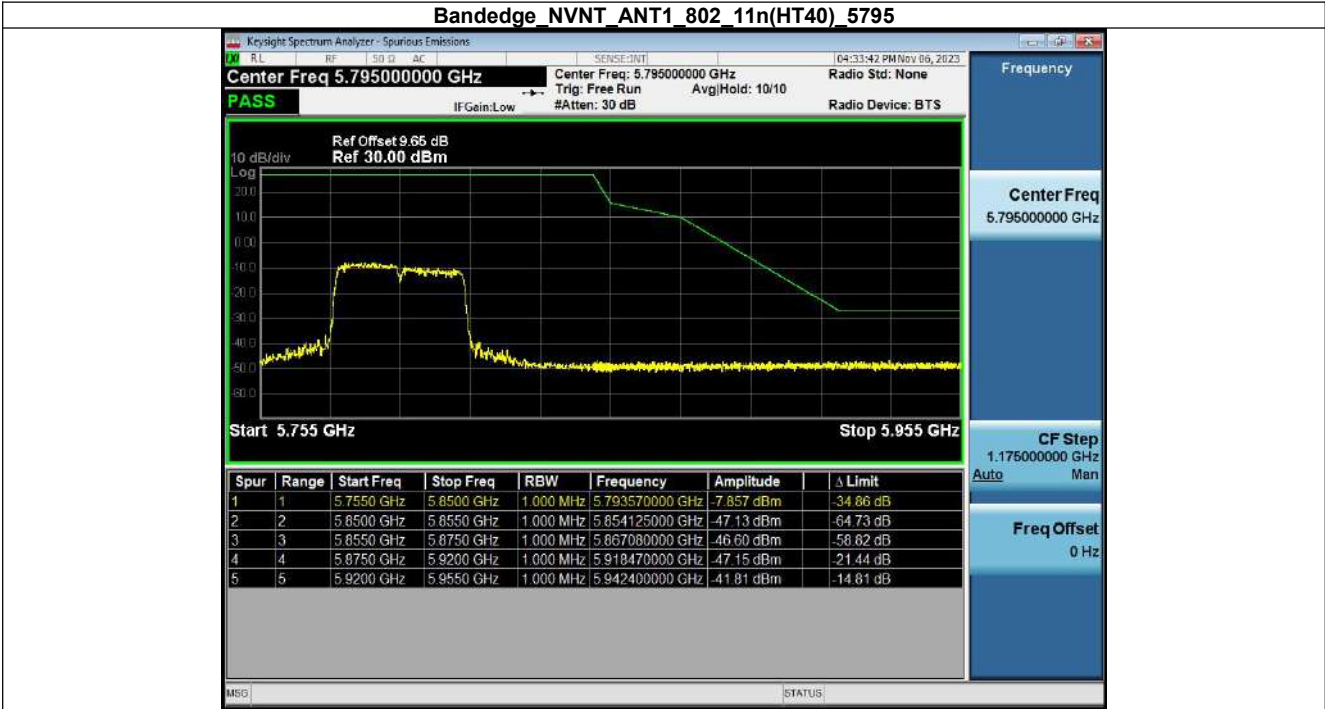

Bandedge_NVNT_ANT1_802_11ac(VHT40)_5755

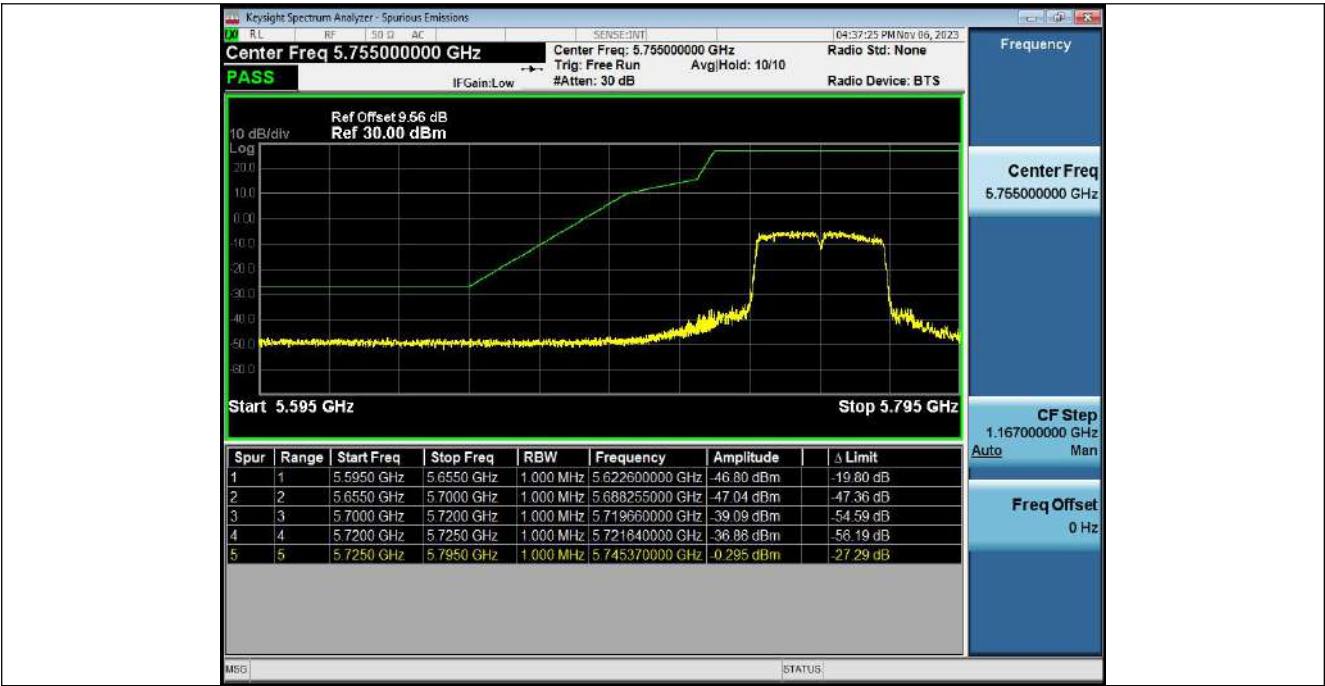

Bandedge_NVNT_ANT1_802_11ac(VHT40)_5795

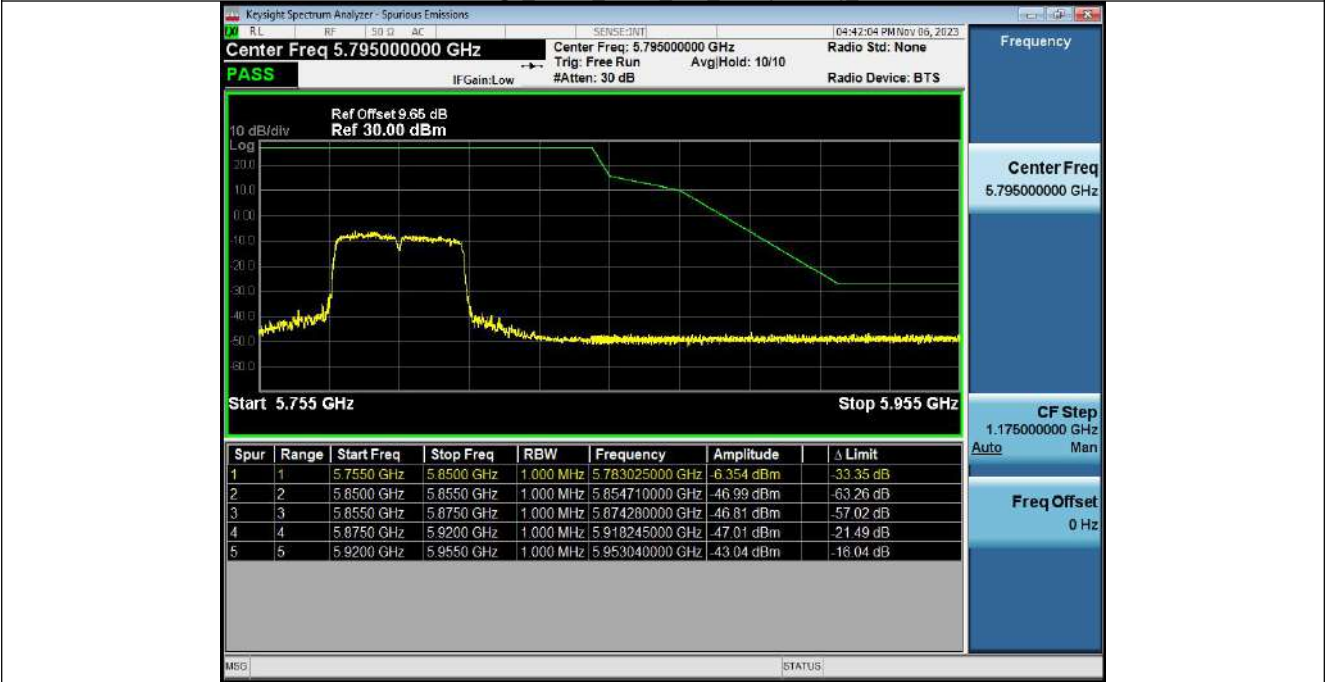

Bandedge_NVNT_ANT1_802_11ac(VHT80)_5775_low



Bandedge_NVNT_ANT1_802_11ac(VHT80)_5775_up



8. Frequency Stability


Condition	Antenna	Modulation	Frequency (MHz)	Fc(MHz)	Fl(MHz)	Fh(MHz)	Limit(MHz)	Result
NVNT	ANT1	802.11a	5745.00	5745.028	5736.396	5753.660	5725~5850	Pass
NVNT	ANT1	802.11a	5785.00	5784.944	5776.256	5793.632	5725~5850	Pass
NVNT	ANT1	802.11a	5825.00	5824.978	5816.340	5833.616	5725~5850	Pass
NVNT	ANT1	802.11n(HT20)	5745.00	5745.018	5735.904	5754.132	5725~5850	Pass
NVNT	ANT1	802.11n(HT20)	5785.00	5784.996	5775.892	5794.100	5725~5850	Pass
NVNT	ANT1	802.11n(HT20)	5825.00	5824.974	5815.852	5834.096	5725~5850	Pass
NVNT	ANT1	802.11ac(VHT20)	5745.00	5745.024	5735.876	5754.172	5725~5850	Pass
NVNT	ANT1	802.11ac(VHT20)	5785.00	5784.994	5775.856	5794.132	5725~5850	Pass
NVNT	ANT1	802.11ac(VHT20)	5825.00	5824.962	5815.816	5834.108	5725~5850	Pass
NVNT	ANT1	802.11n(HT40)	5755.00	5755.032	5736.800	5773.264	5725~5850	Pass
NVNT	ANT1	802.11n(HT40)	5795.00	5795.032	5776.792	5813.272	5725~5850	Pass
NVNT	ANT1	802.11ac(VHT40)	5755.00	5755.048	5736.800	5773.296	5725~5850	Pass
NVNT	ANT1	802.11ac(VHT40)	5795.00	5795.012	5776.744	5813.280	5725~5850	Pass
NVNT	ANT1	802.11ac(VHT80)	5775.00	5775.048	5737.092	5813.004	5725~5850	Pass




Frequency Stability NVNT ANT1 802_11a_5785




Frequency Stability_NVNT_ANT1_802_11a_5825

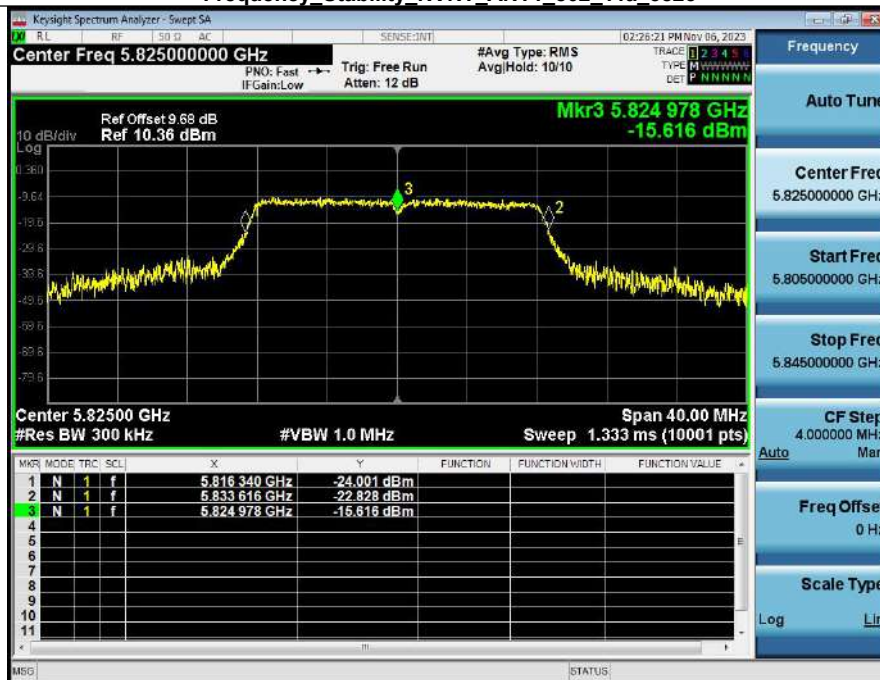


Frequency Stability_NVNT_ANT1_802_11n(HT20)_5745

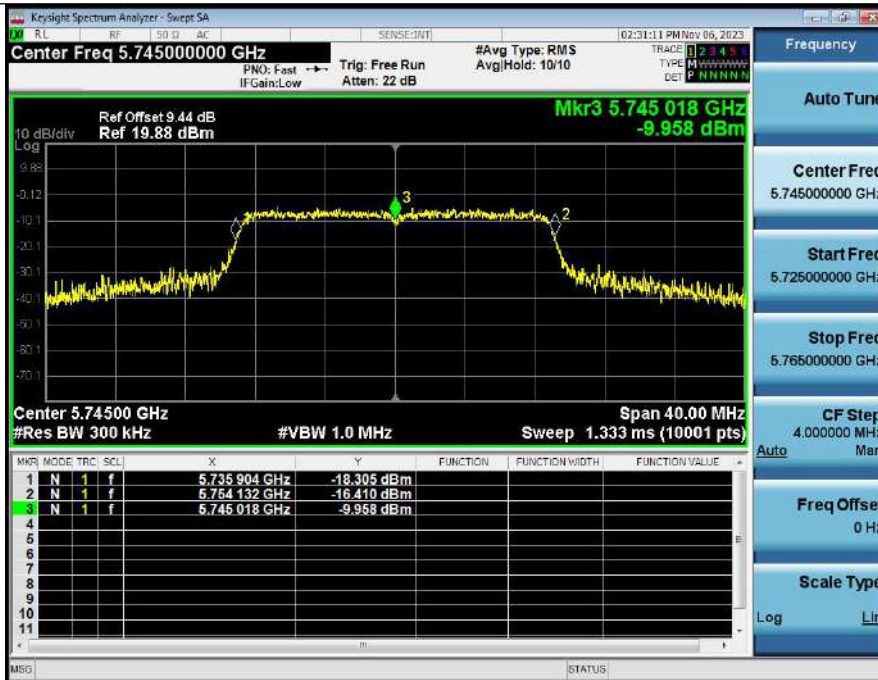


Frequency Stability_NVNT_ANT1_802_11n(HT20)_5785

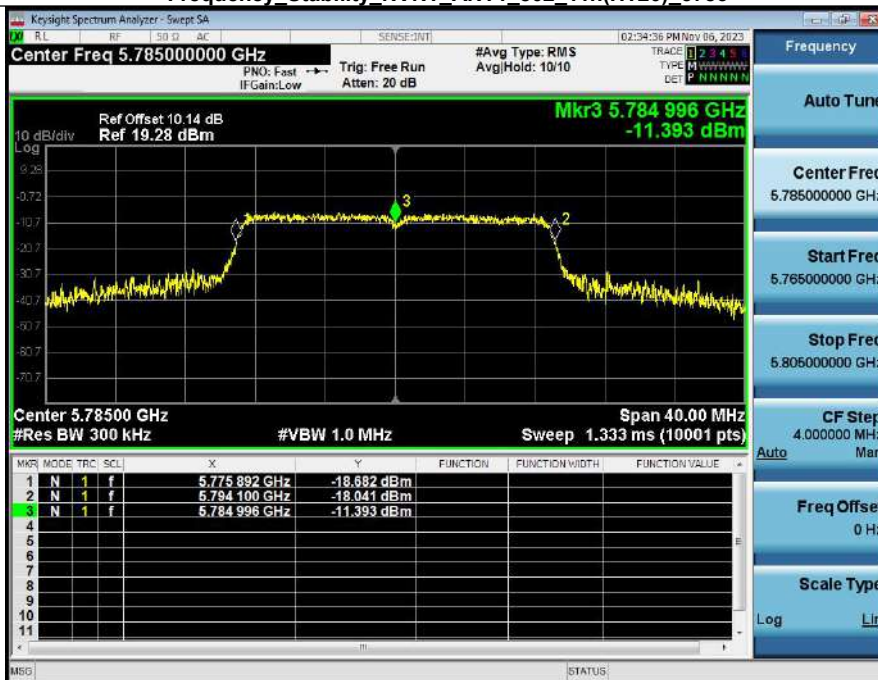


Frequency Stability_NVNT_ANT1_802_11n(HT20)_5825

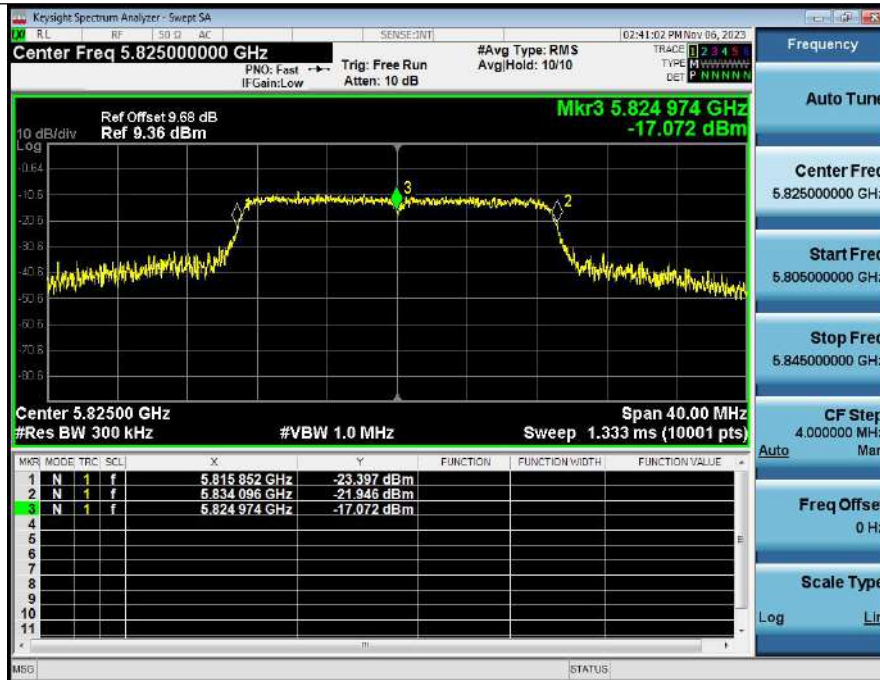


Frequency Stability NVNT_ANT1_802_11ac(VHT20)_5745

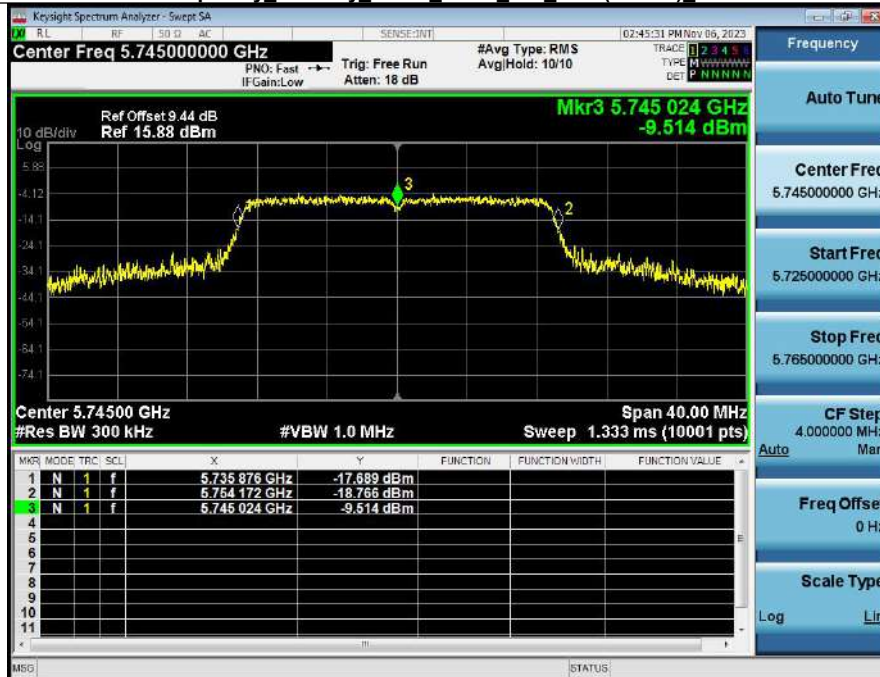

Frequency Stability NVNT_ANT1_802_11ac(VHT20)_5785

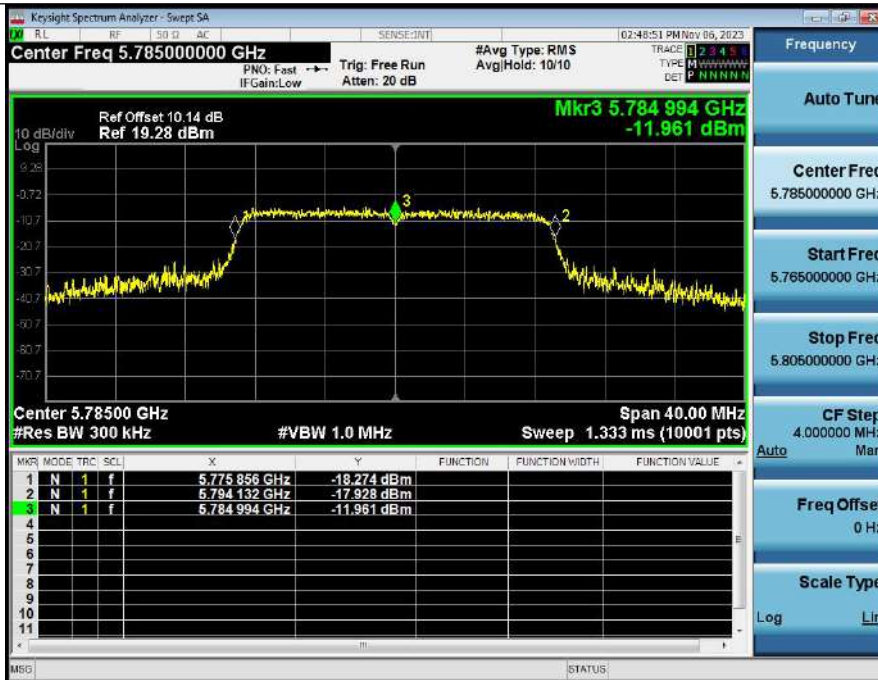


Frequency Stability NVNT_ANT1_802_11ac(VHT20)_5825

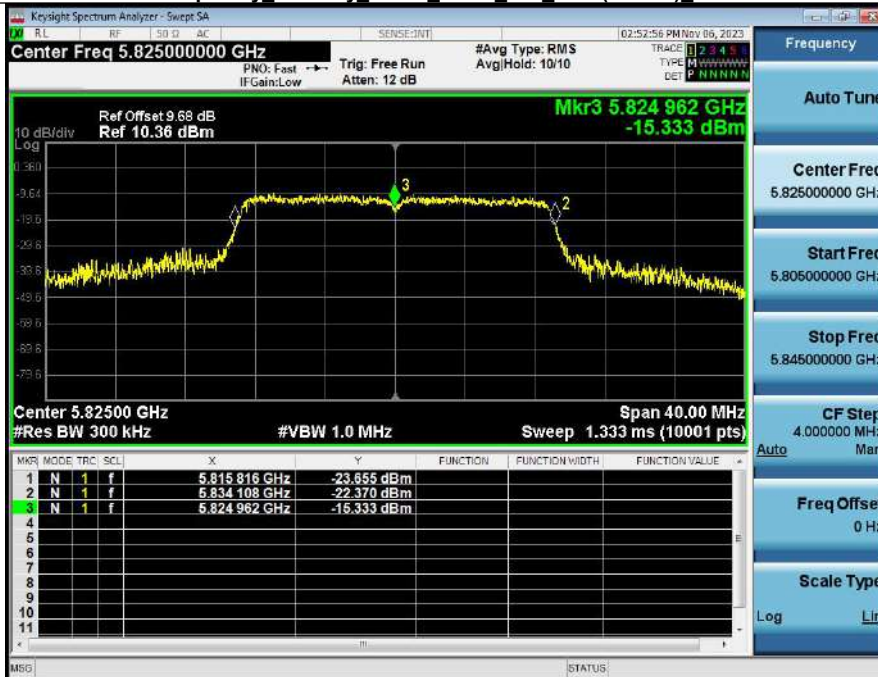

Frequency Stability NVNT_ANT1_802_11n(HT40)_5755




Frequency_Stability_NVNT_ANT1_802_11n(HT40)_5795

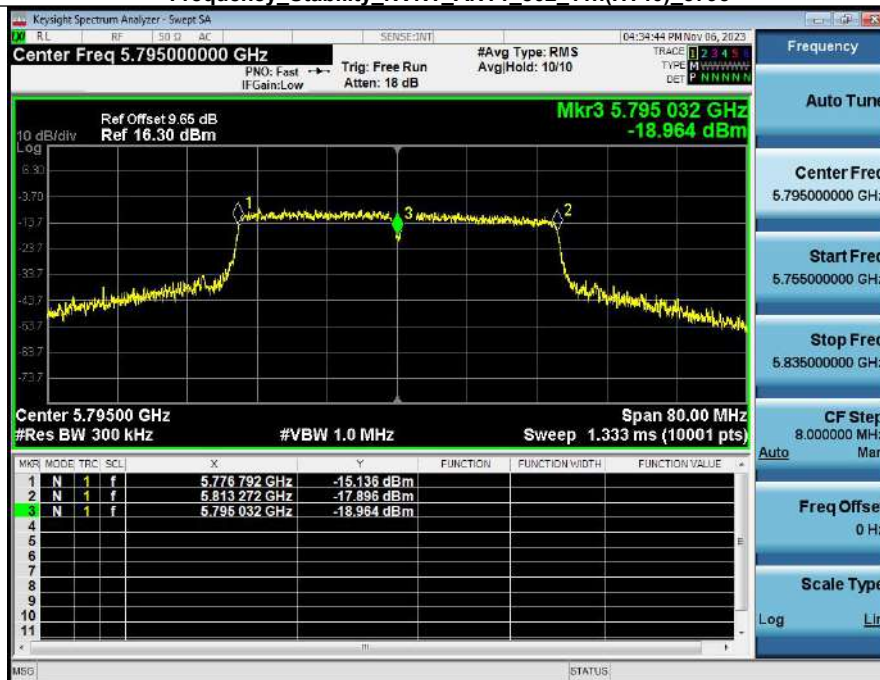

Frequency_Stability_NVNT_ANT1_802_11ac(VHT40)_5755



Frequency_Stability_NVNT_ANT1_802_11ac(VHT40)_5795

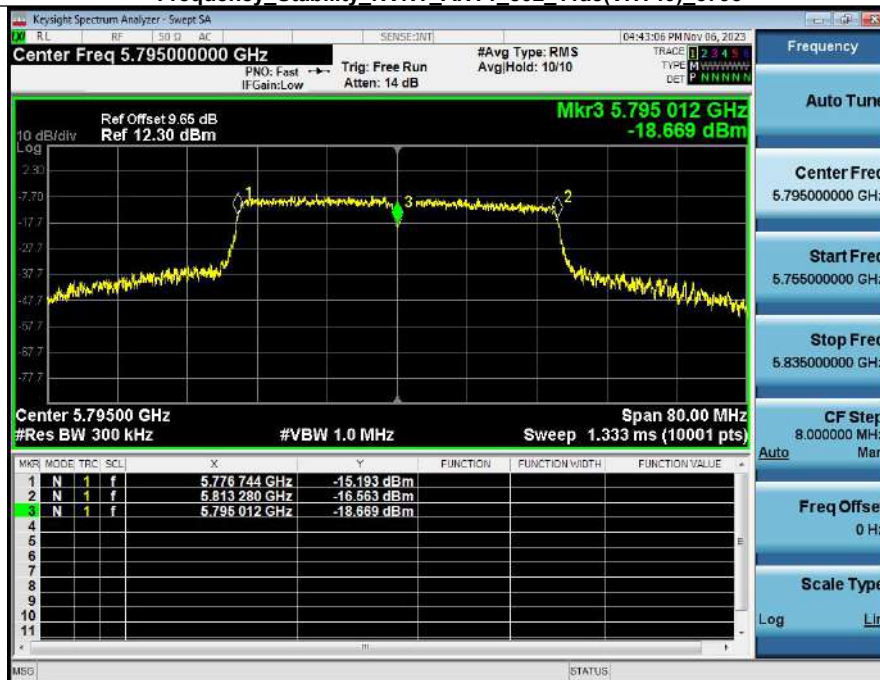

Frequency_Stability_NVNT_ANT1_802_11ac(VHT80)_5775

