

Twist stunt car instruction manual

Cross-country climbing four-wheel drive power two forms to adapt to multi-terrain



Thank you for using the company's toy products, in order to make you have a better understanding of this product, please use before Read the following instructions thoroughly, which will bring you a different sense of operating experience.

Note: The remote control car products in this manual are for reference only, and the product shape is subject to the actual object!

- **Electronic control product**

This product is suitable for children aged 8 years and older, and is assembled/charged by adults before being played with by children.

Use the product under adult supervision.

- **Warning: Please do not disassemble or modify this product without 'authorization', any change may cause the product to be incorrect Use it often.**

This manual applies to a series of product introductions of the company, each product configuration is different, specific configuration please

Look at the configuration of the box.

1. One rechargeable battery is used in the car body. See the battery room battery diagram for the volts.

The remote control uses 2 1.5V AAA non-rechargeable batteries;

2. The battery should be taken out and loaded according to the polarity and voltage of the toy battery room;

3. Non-rechargeable batteries are not rechargeable;

4. Rechargeable batteries must be charged under adult supervision;

5. The rechargeable battery should be removed from the toy before charging;

6. Different types of batteries or old and new batteries can not be mixed;

7. Only batteries with the same or equivalent recommended battery can be used;

8. The battery should be taken out from the toy: if it is not used for a long time, please remove the battery from the toy;

9. Do not short circuit the power terminal;
10. Unscrew the battery compartment cover with a screwdriver and insert the battery with the correct positive and negative polarity Unscrew the battery compartment cover and remove the battery;
11. Maintenance and maintenance: This product is composed of plastic, hardware and electronic components, shall not enter the water or long-term When placed or used in a humid environment, check wires, plugs, housings and other components regularly for defects. When the defect is found, the use should be stopped until the repair is complete.

2.4G automatic code alignment description

1. The remote control is installed with the battery, the remote control light begins to blink, the remote control car is installed with the battery to open the switch, start Enter the connection state, when the connection is successful, the remote control light is off; Note: The connection is not successful, please repeat Operation on.
2. Each remote control can only be connected with one remote control car, when the connection is successful, each car does not interfere with each other; Note: Multiple vehicles cannot be connected at the same time
3. The remote control did not find the 2.4G signal sent by the remote control car power after one minute, and the power indicator was blinking. Need to restart the power switch to match the frequency.
4. when you need to pair other remote control or remote control car of the same model, you need to turn off the power of the remote control car to re-pair.

How to install batteries

① Remote Control



1. Open the battery cover of the remote control, and follow the battery compartment of the remote control The positive and negative electrodes are indicated to load the AA battery.

2. Cover the battery

② Remote control car

1. Open the battery cover under the car, connect the rechargeable battery pack to the power socket and load it into the car Bottom battery compartment.


2. Close the battery cover and tighten it with a screwdriver.

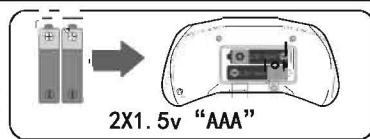

How to charge

1. This new battery pack needs to be charged before it can be used.
2. First plug the battery pack wire into the plug of the charger, and then plug the chargerHead in socket.
3. Use the charger, the battery needs 2 hours to be fully charged, and the charging plug is with Charging indicator light, the red light is on during charging, and the red light is on when it is full. Do not overfill Electricity, too long charging will not increase the power.

Figure 1



FCC Statement

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

RF Exposure Information

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.