






2DH5_Ant1_2402

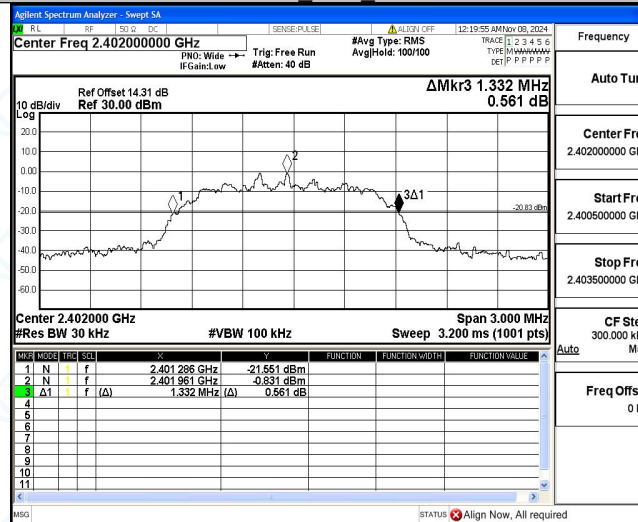

2DH5_Ant1_2441

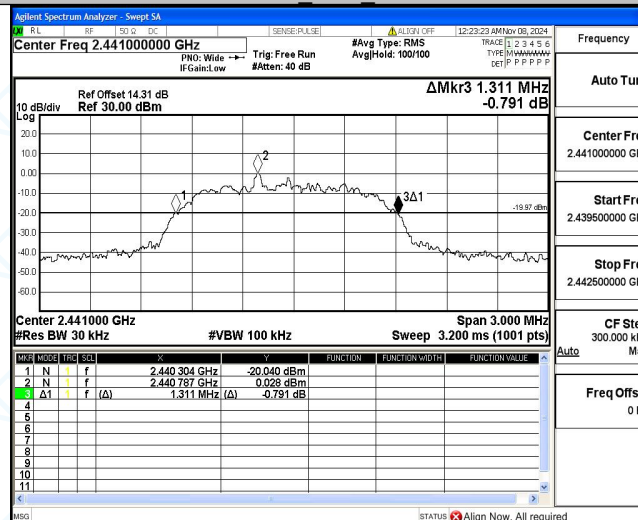


2DH5_Ant1_2480

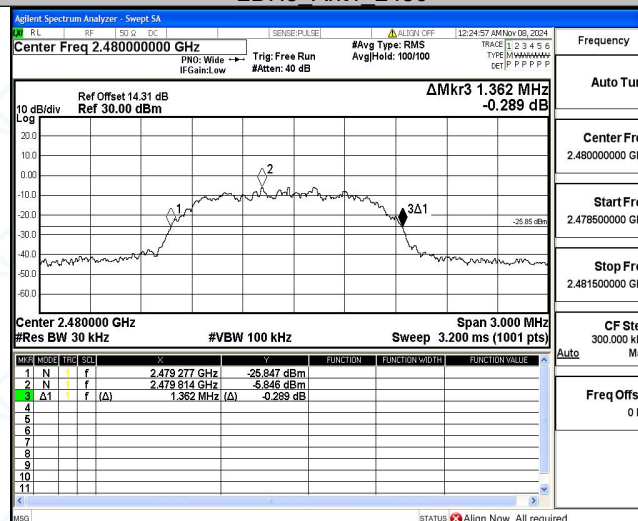





3DH5_Ant1_2402

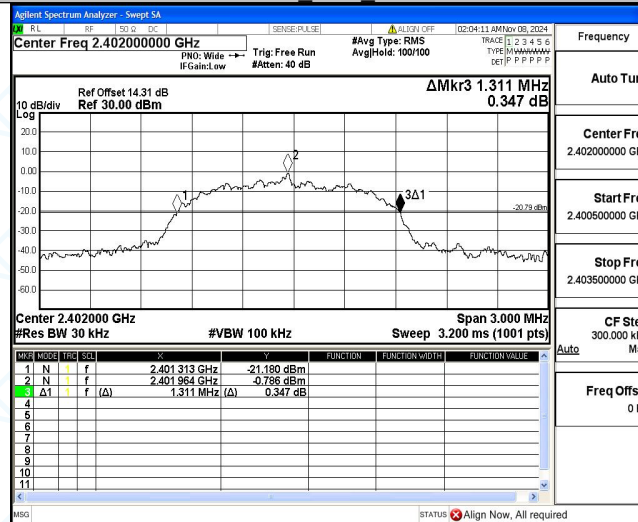

3DH5_Ant1_2441

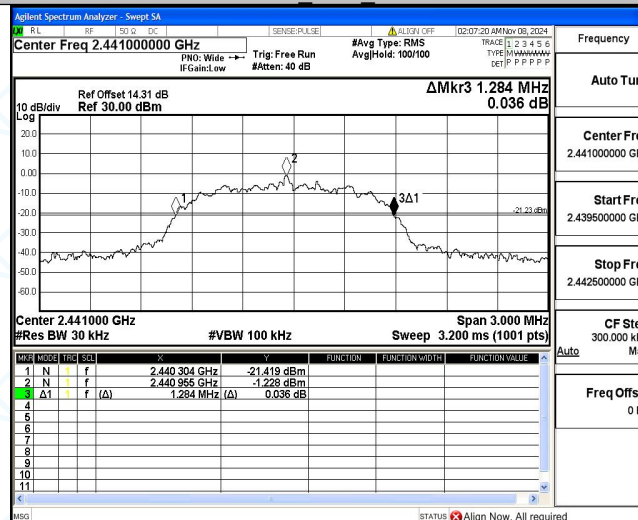

3DH5_Ant1_2480

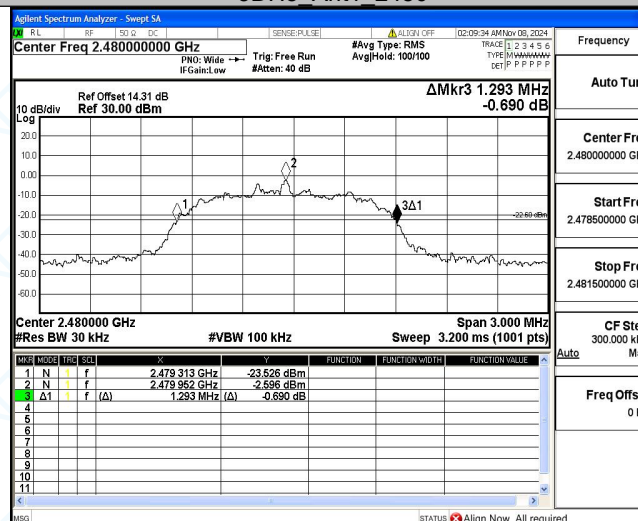



Appendix B: Maximum conducted output power


Test Result

Test Mode	Antenna	Freq(MHz)	Conducted Peak Power[dBm]	Conducted Limit[dBm]	Verdict
DH5	Ant1	2402	2.53	≤20.97	PASS
		2441	2.85	≤20.97	PASS
		2480	0.26	≤20.97	PASS
2DH5	Ant1	2402	3.09	≤20.97	PASS
		2441	3.49	≤20.97	PASS
		2480	0.96	≤20.97	PASS
3DH5	Ant1	2402	3.57	≤20.97	PASS
		2441	3.87	≤20.97	PASS
		2480	1.33	≤20.97	PASS




Test Graphs


DH5_Ant1_2402

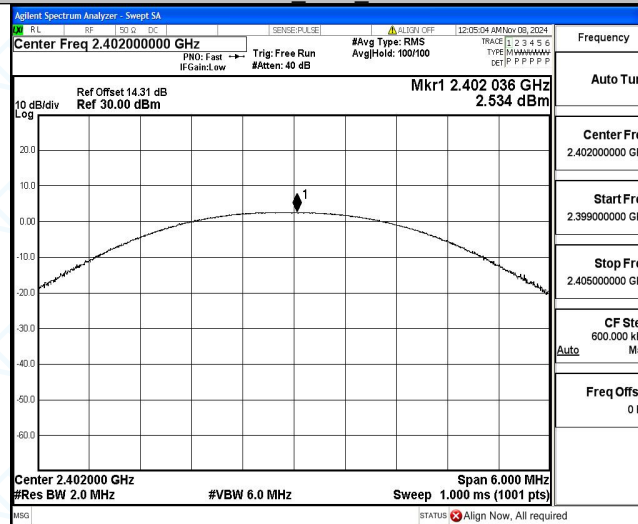

DH5_Ant1_2441

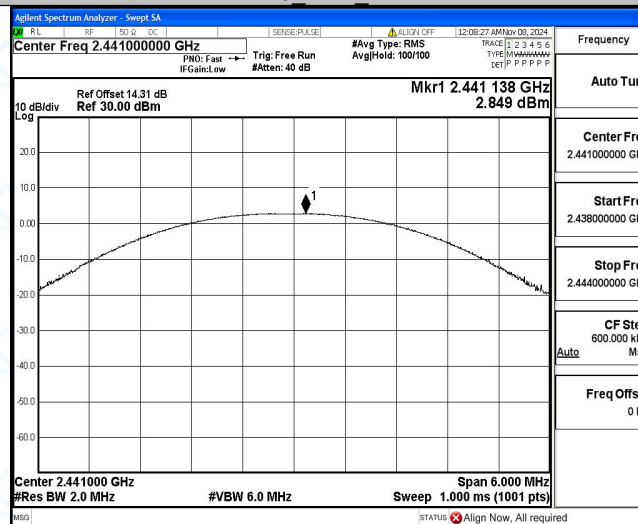


DH5_Ant1_2480

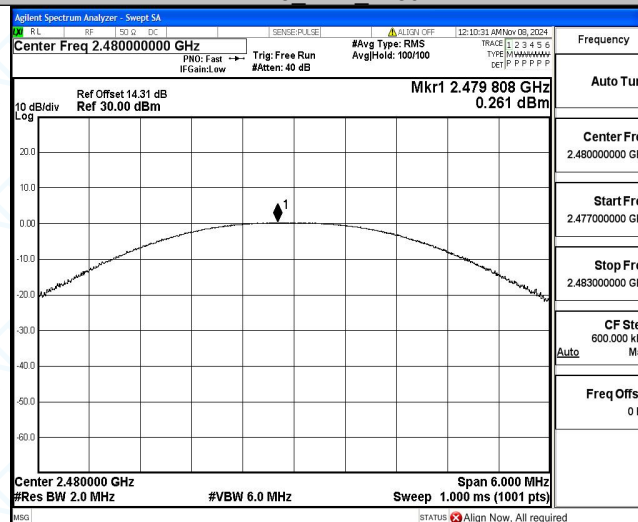





2DH5_Ant1_2402

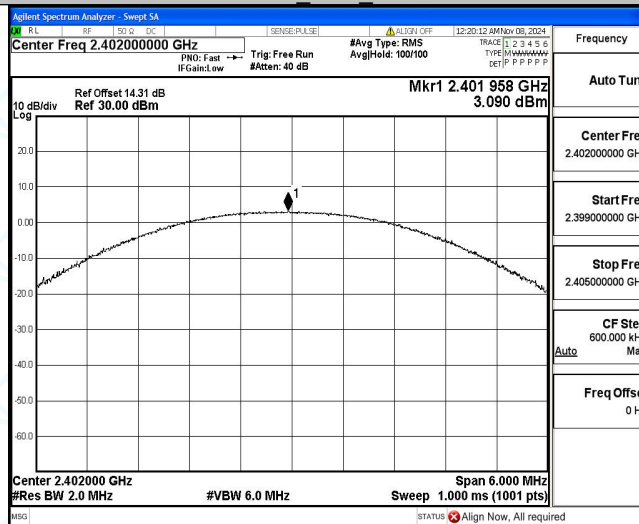

2DH5_Ant1_2441

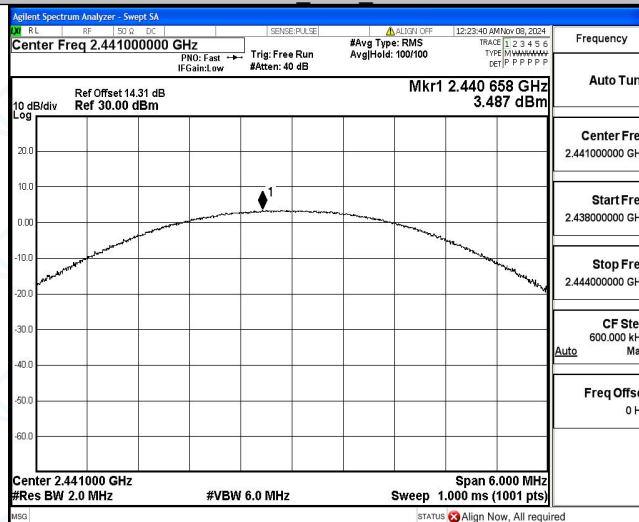


2DH5_Ant1_2480

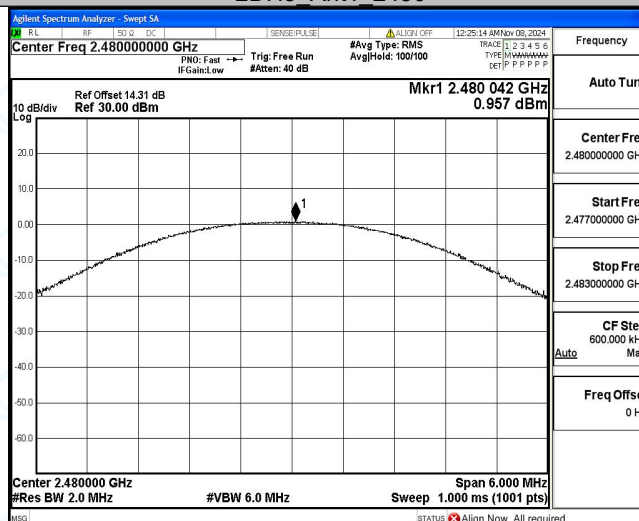





3DH5_Ant1_2402

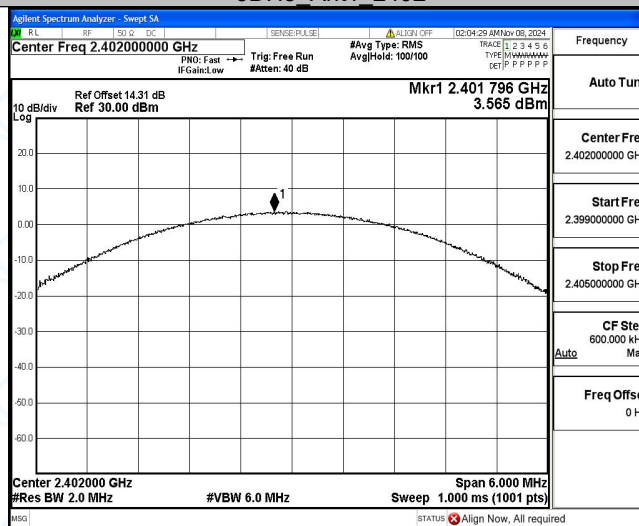

3DH5_Ant1_2441

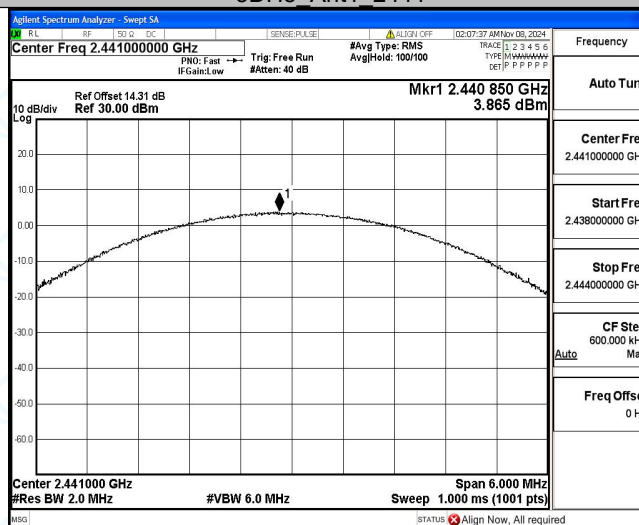

3DH5_Ant1_2480

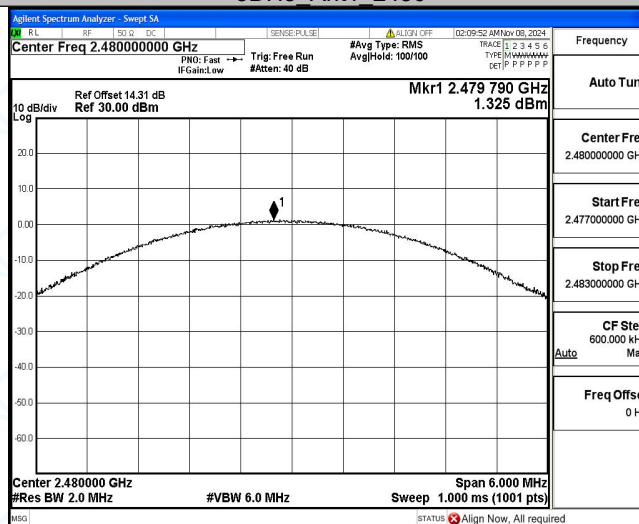



Appendix C: Carrier frequency separation


Test Result

Test Mode	Antenna	Freq(MHz)	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	0.976	≥0.684	PASS
2DH5	Ant1	Hop	1.158	≥0.908	PASS
3DH5	Ant1	Hop	1.012	≥0.874	PASS




Test Graphs


DH5_Ant1_Hop

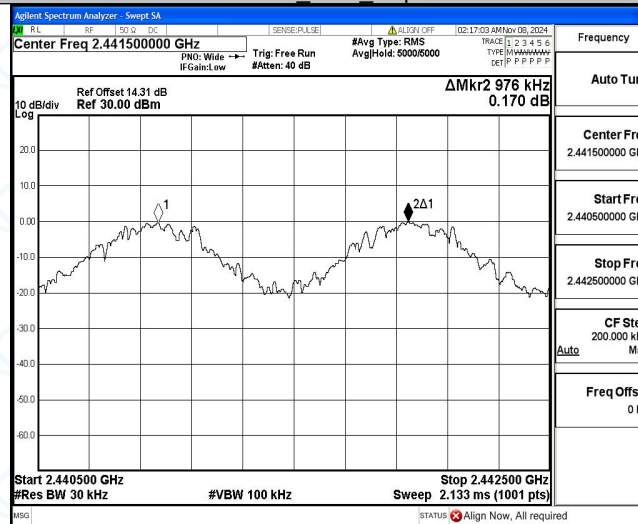

2DH5_Ant1_Hop

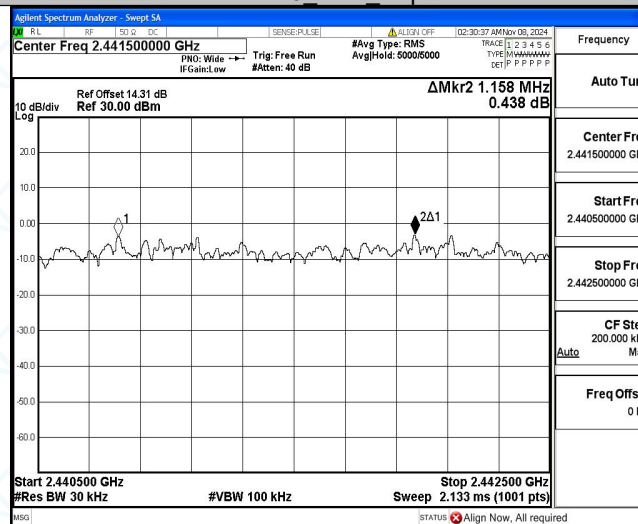

3DH5_Ant1_Hop

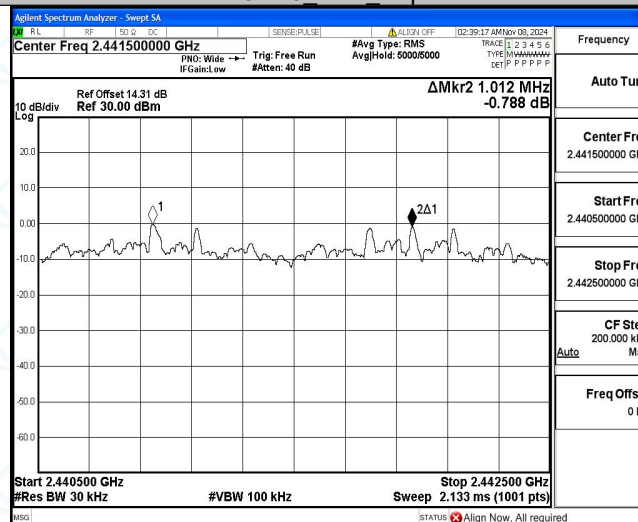



Appendix D: Dwell Time


Test Result

Test Mode	Antenna	Freq(MHz)	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.383	320	0.123	≤0.4	PASS
DH3	Ant1	Hop	1.638	160	0.262	≤0.4	PASS
DH5	Ant1	Hop	2.887	106.67	0.308	≤0.4	PASS
2DH1	Ant1	Hop	0.391	320	0.125	≤0.4	PASS
2DH3	Ant1	Hop	1.643	160	0.263	≤0.4	PASS
2DH5	Ant1	Hop	2.891	106.67	0.308	≤0.4	PASS
3DH1	Ant1	Hop	0.390	320	0.125	≤0.4	PASS
3DH3	Ant1	Hop	1.642	160	0.263	≤0.4	PASS
3DH5	Ant1	Hop	2.892	106.67	0.308	≤0.4	PASS




Test Graphs


DH1_Ant1_Hop

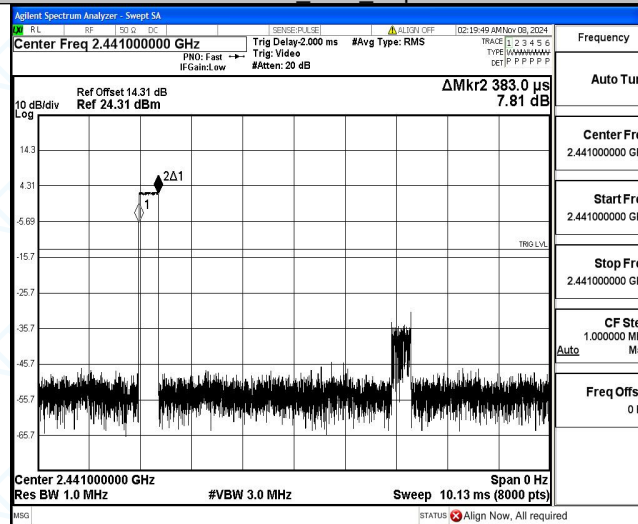

DH3_Ant1_Hop

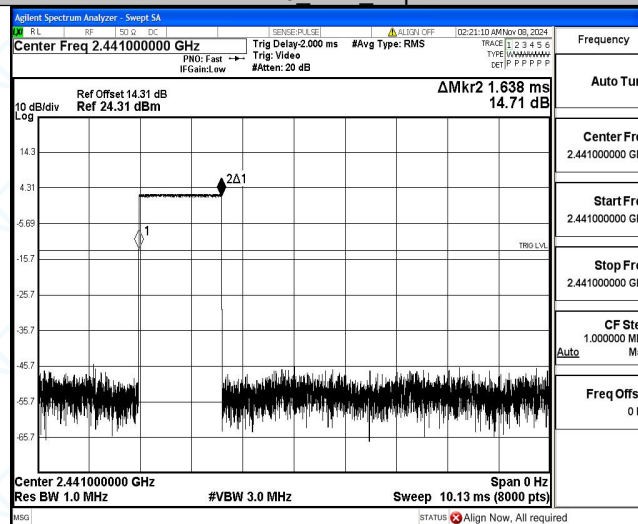


DH5_Ant1_Hop

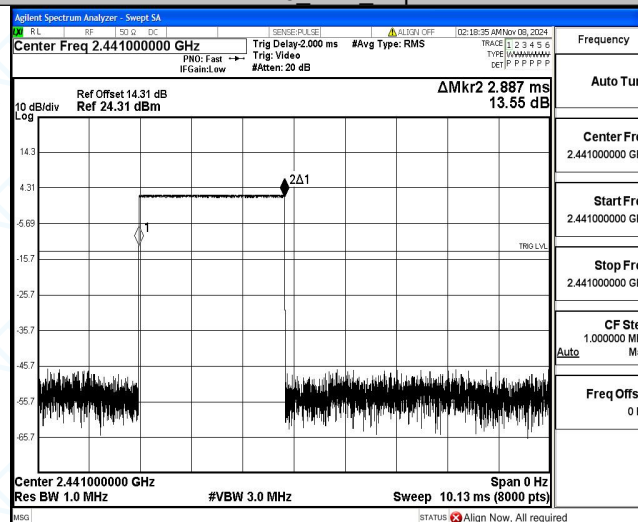





2DH1 Ant1 Hop

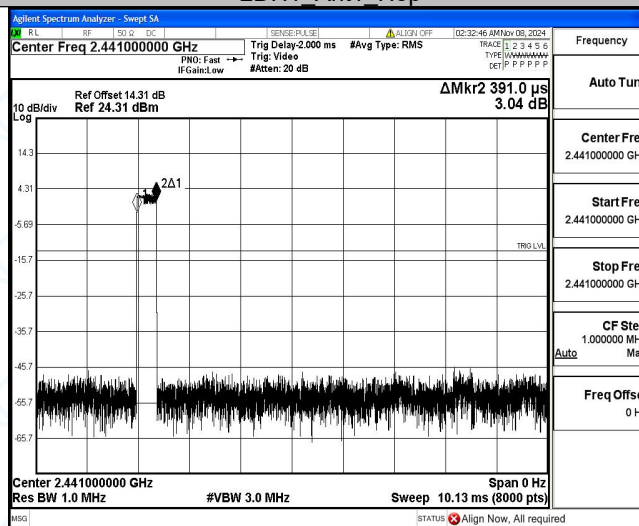

2DH3 Ant1 Hop

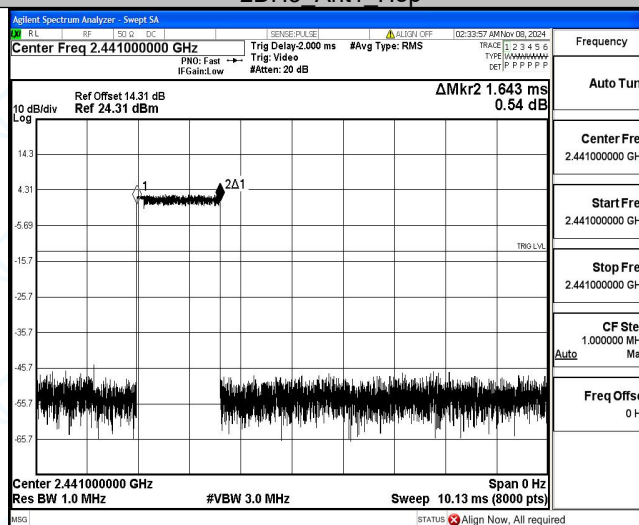


2DH5 Ant1 Hop

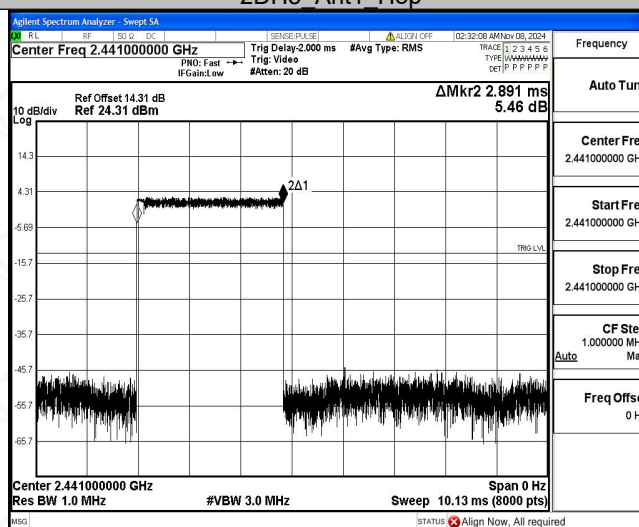





3DH1 Ant1 Hop

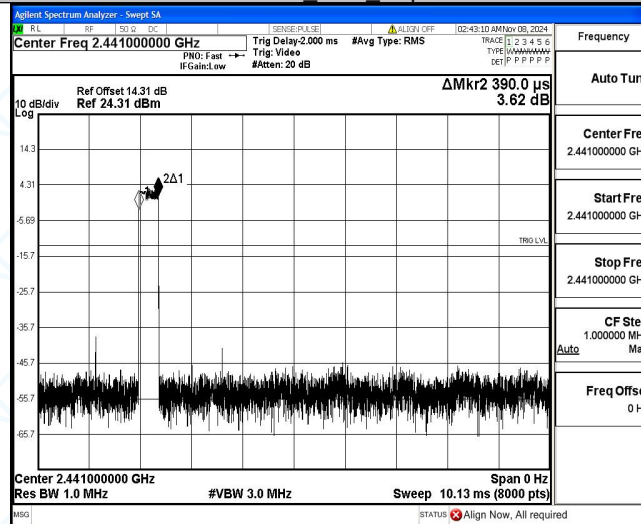

3DH3 Ant1 Hop

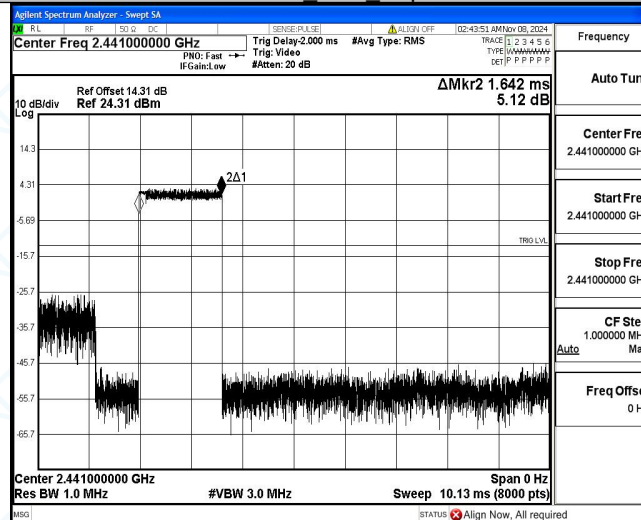

3DH5 Ant1 Hop

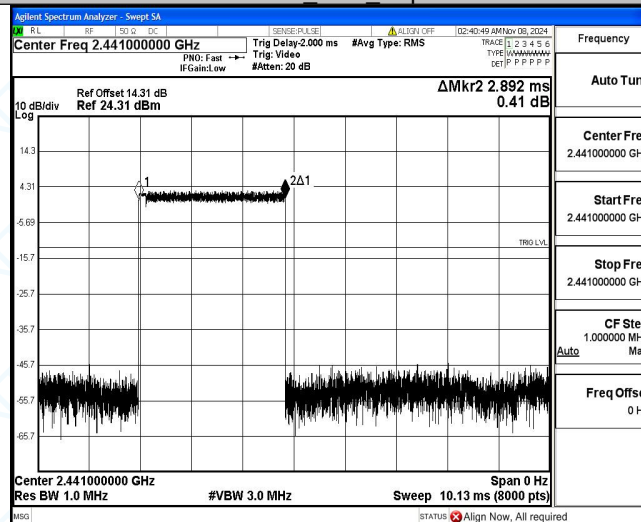



Appendix F: Number of hopping channels


Test Result

TestMode	Antenna	Freq(MHz)	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS
2DH5	Ant1	Hop	79	≥15	PASS
3DH5	Ant1	Hop	79	≥15	PASS




Test Graphs


DH5_Ant1_Hop

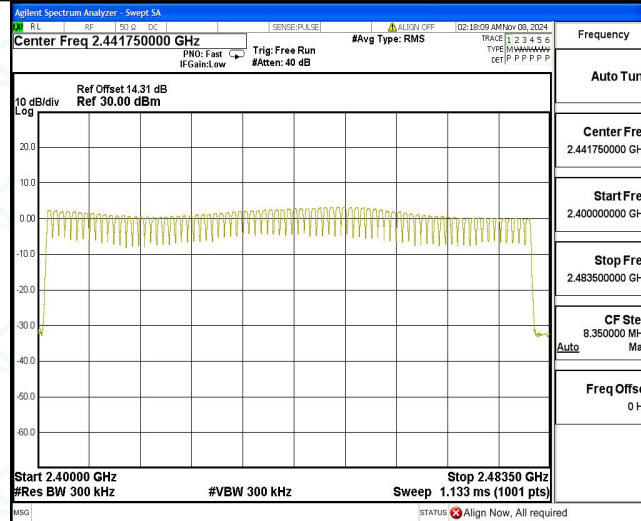

2DH5_Ant1_Hop

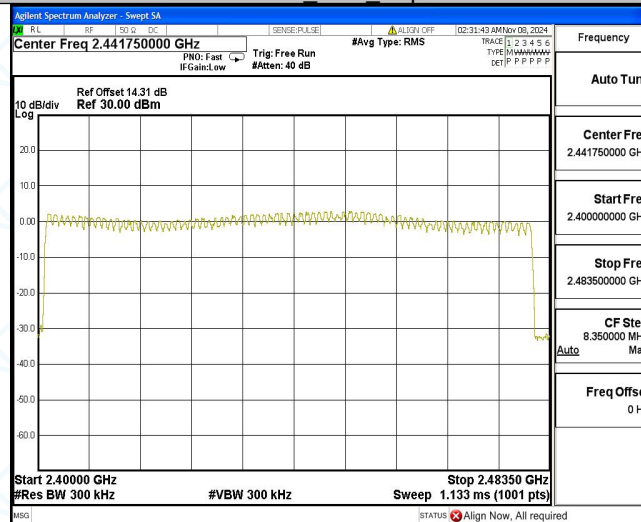

3DH5_Ant1_Hop

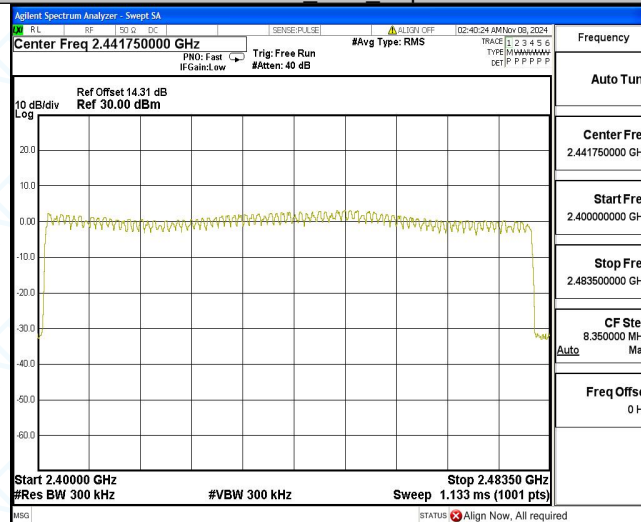



Appendix F: Band edge measurements

Test Result

Test Mode	Antenna	Ch Name	Freq(MHz)	Ref Level [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	0.03	-49.17	≤-19.97	PASS
		High	2480	-2.72	-49.91	≤-22.72	PASS
		Low	Hop_2402	-1.38	-49.73	≤-21.38	PASS
		High	Hop_2480	-2.72	-49.94	≤-22.72	PASS
2DH5	Ant1	Low	2402	-0.11	-50.06	≤-20.11	PASS
		High	2480	-2.47	-50.13	≤-22.47	PASS
		Low	Hop_2402	-2.58	-50.15	≤-22.58	PASS
		High	Hop_2480	-2.54	-48.5	≤-22.54	PASS
3DH5	Ant1	Low	2402	-0.20	-49.94	≤-20.2	PASS
		High	2480	-4.07	-49.78	≤-24.07	PASS
		Low	Hop_2402	-5.34	-50.53	≤-25.34	PASS
		High	Hop_2480	-2.97	-49.54	≤-22.97	PASS