

P&F Brother Ind. Corp.

TEST REPORT

SCOPE OF WORK:

47 CFR FCC Part 15.247 – Radio Spectrum report

Model:

RIS-K106

REPORT NUMBER

220200016THC-001

ISSUE DATE

Apr. 07, 2022

PAGES

47

DOCUMENT CONTROL NUMBER

GFT-OP-10h (28-Nov-2018)

© 2020 Intertek



Radio Spectrum TEST REPORT

Applicant:	P&F Brother Ind. Corp. No.12, Gongyequ 6th Rd., Xitun Dist., Taichung City 407, Taiwan
Product:	Console
Model No.:	RIS-K106
FCC ID:	2A4ES0031944689
Test Method/ Standard:	47 CFR FCC Part 15.247 & ANSI C63.10 2013 KDB 558074 D01 v05r02
Test By:	Intertek Testing Services Taiwan Ltd., Hsinchu Laboratory No. 11, Lane 275, Ko-Nan 1 Street, Chia-Tung Li, Shiang-Shan District, Hsinchu City, Taiwan



Zero Chen

Zero Chen
Engineer

Rico Deng

Rico Deng
Reviewer

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

TEST REPORT**Revision History**

Report No.	Issue Date	Revision Summary
220200016THC-001	Apr. 07, 2022	Original report

Table of Contents

1. General Information	6
1.1 Identification of the EUT	6
1.2 Antenna description	6
1.3 Operation mode	7
1.4 Peripherals equipment	7
2. 20dB Bandwidth Test.....	8
2.1 Test Setup & Procedure	8
2.2 Operating Environment Condition	8
2.3 Test Results	8
3. Carrier Frequency Separation Test	12
3.1 Test Setup & Procedure	12
3.2 Operating Environment Condition	12
3.3 Test Results	12
4. Number of Hopping Frequencies Test.....	16
4.1 Test Setup & Procedure	16
4.2 Operating Environment Condition	16
4.3 Test Results	16
5. Time of Occupancy (Dwell Time).....	18
5.1 Test Setup & Procedure	18
5.2 Operating Environment Condition	18
5.3 Test Results	18
6. Maximum Output Power Test	22
6.1 Test Setup & Procedure	22
6.2 Operating Environment Condition	22
6.3 Test Results	22
7. RF Antenna Conducted Spurious Test	23
7.1 Test Setup & Procedure	23
7.2 Operating Environment Condition	23
7.3 Test Results	24
8. Emissions in Restricted Frequency Bands (Radiated emission measurements)	33
8.1 Instrument Setting.....	33
8.2 Test setup & procedure	33
8.3 Limit.....	35
8.4 Operating Environment Condition	35
8.5 Test Result.....	36
8.5.1 Measurement results: frequencies 9kHz to 30MHz.....	36
8.5.2 Measurement results: frequencies below 1 GHz	37
8.5.3 Measurement results: frequency above 1GHz to 25GHz.....	38

9. Emission on Band Edge.....	39
9.1 Instrument Setting.....	39
9.2 Test Procedure	39
9.3 Operating Environment Condition	39
9.4 Test Results	40
10. AC Power Line Conducted Emission	45
Appendix A: Test equipment list.....	46
Appendix B: Measurement Uncertainty.....	47

Summary of Test Data

Test Requirement	Applicable Rule (Section 15.247)	Result
20dB Bandwidth Test	15.247(a)(1)	Pass
Carrier Frequency Separation Test	15.247(a)(1)	Pass
Number of Hopping Frequencies Test	15.247(a)(1)	Pass
Time of Occupancy (Dwell Time) Test	15.247(a)(1)(iii)	Pass
Maximum Output Power Test	15.247(b)	Pass
RF Antenna Conducted Spurious Test	15.247(d)	Pass
Radiated Spurious Emission Test	15.205, 15.209	Pass
Emission on the Band Edge Test	15.247(d)	Pass
AC Power Line Conducted Emission Test	15.207	N/A
Antenna Requirement	15.203	Pass

Note: Please note that the test results with statement of conformity, the decision rules which are based on: Safety Testing: the specification, standard or IEC Guide 115.

Other Testing: the specification, standard and not taking into account the measurement uncertainty.

1. General Information

1.1 Identification of the EUT

Product:	Console
Model No.:	RIS-K106
Operating Frequency:	2402 MHz ~ 2480 MHz
Channel Number:	79 channels
Frequency of Each Channel:	2402+1 k, k=0 ~ 78
Rated Power:	DC 12V
Power Cord:	N/A
Sample receiving date:	2022/01/27
Sample condition:	Workable
Test Date(s):	2022/02/17 ~ 2022/2/21

1.2 Antenna description

Antenna Gain : 3 dBi
 Antenna Type : PCB Antenna
 Connector Type : I-Pex

1.3 Operation mode

The EUT was supplied with DC 12 V from DC Power Support.

Connected to Notebook via USB Cable, executing "CMD" enter command and open " RF Test Tool APP Ver6.1" to select different frequency and modulation.

1.4 Peripherals equipment

Peripherals	Brand	Model No.	Serial No.	Data cable
Notebook PC	HP	HP ProBook 440 G3	5CD8021S9H	Micro USB Cable 0.8 m
DC Power Supply	Twintex	TP-1603C	N/A	DC power supply Cable 0.8 m

2. 20dB Bandwidth Test

2.1 Test Setup & Procedure

The test procedure was according to FCC measurement guidelines DA 00-705.

The 20dB bandwidth per FCC §15.247(a)(1) was measured using a 50 ohm spectrum analyzer with the resolutions bandwidth set $\geq 1\%$ of 20dB Bandwidth, the video bandwidth $\geq$ RBW, and the SPAN may equal to approximately 2 to 3 times the 20dB bandwidth. The test was performed at 3 channels (lowest, middle and highest channel). The maximum 20dB modulation bandwidth is in the following Table.


2.2 Operating Environment Condition

Temperature (°C) :	16
Relative Humidity (%) :	62


2.3 Test Results

Mode	Channel	Frequency (MHz)	20dB Bandwidth (MHz)
DH5	0	2402	0.912
	39	2441	0.912
	78	2480	0.913
2DH5	0	2402	1.208
	39	2441	1.213
	78	2480	1.213
3DH5	0	2402	1.211
	39	2441	1.211
	78	2480	1.222


Chain0 : 20dB @ 1DH5 Mode Ch 0

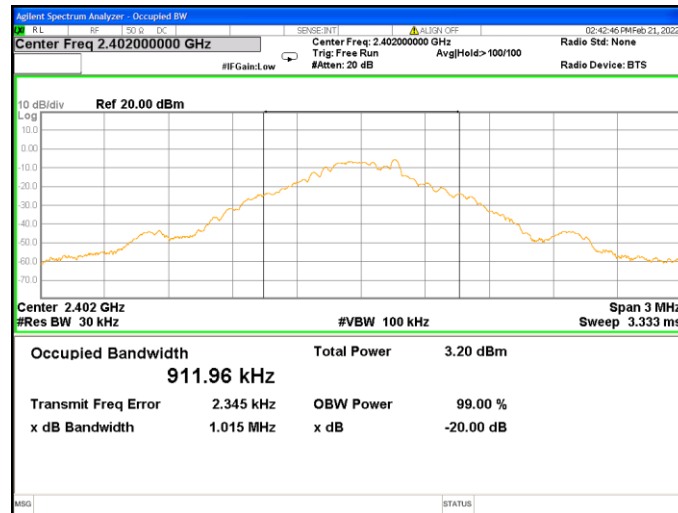


Chain0 : 20dB @ 1DH5 Mode Ch 39

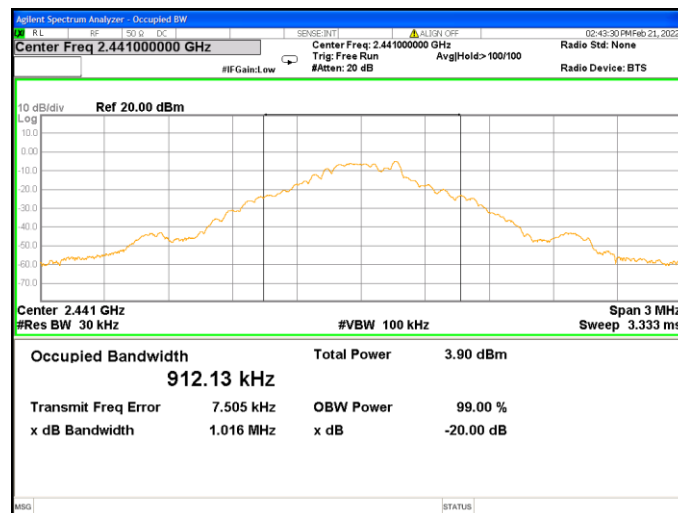


Chain0 : 20dB @ 1DH5 Mode Ch 78

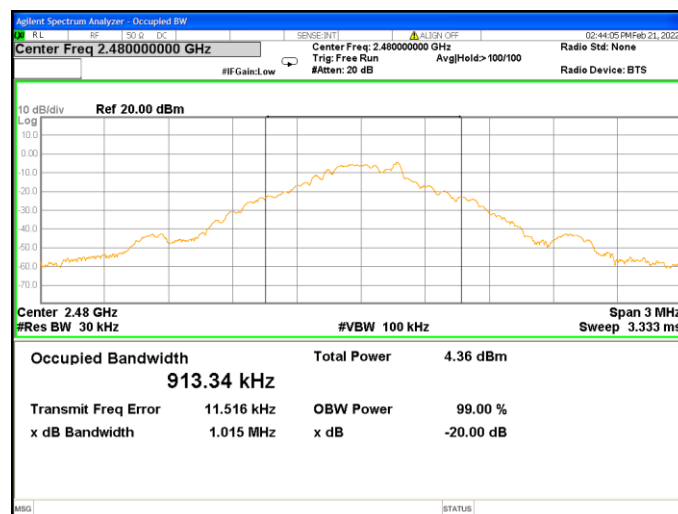


Chain0 : 20dB @ 2DH5 Mode Ch 0

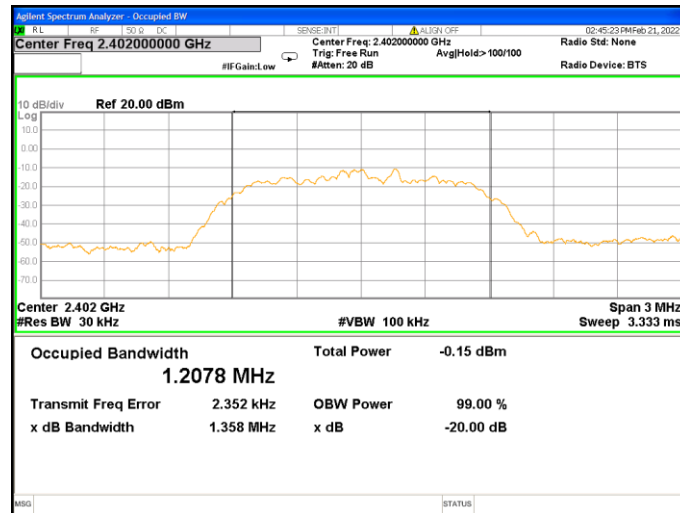


Chain0 : 20dB @ 2DH5 Mode Ch 39

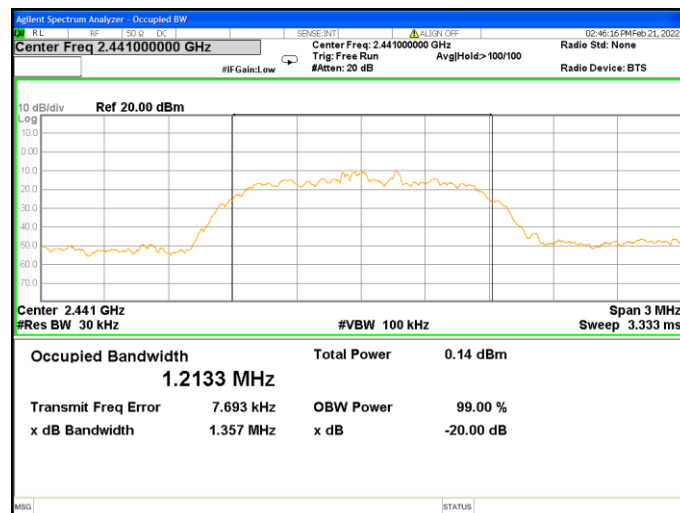


Chain0 : 20dB @ 2DH5 Mode Ch 78

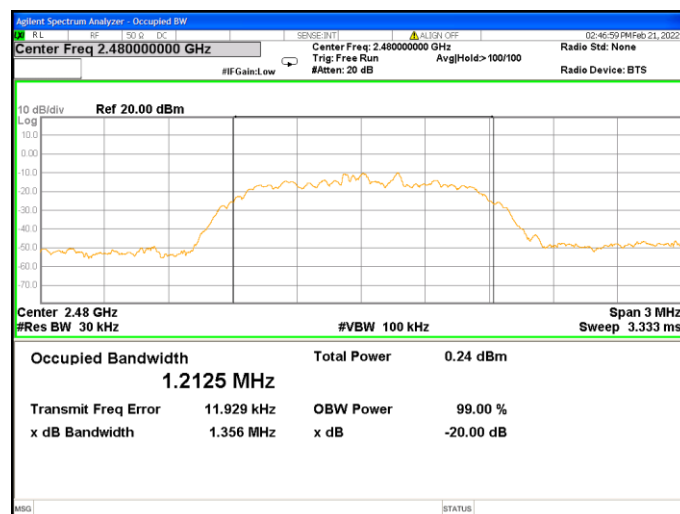


Chain0 : 20dB @ 3DH5 Mode Ch 0

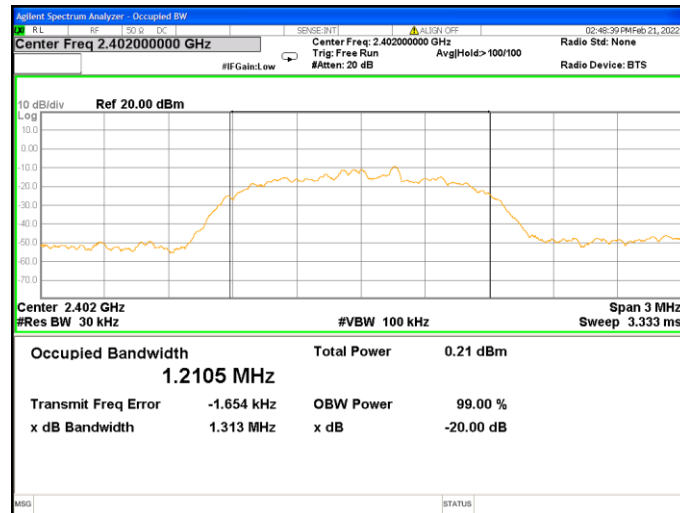

Chain0 : 20dB @ 3DH5 Mode Ch 39

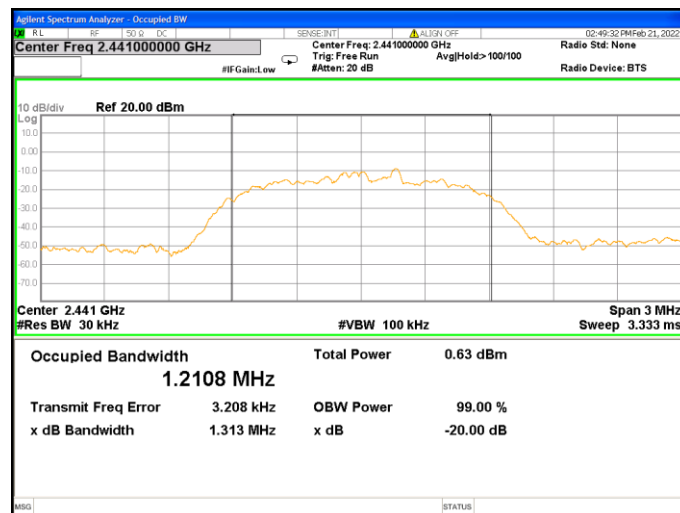

Chain0 : 20dB @ 3DH5 Mode Ch 78

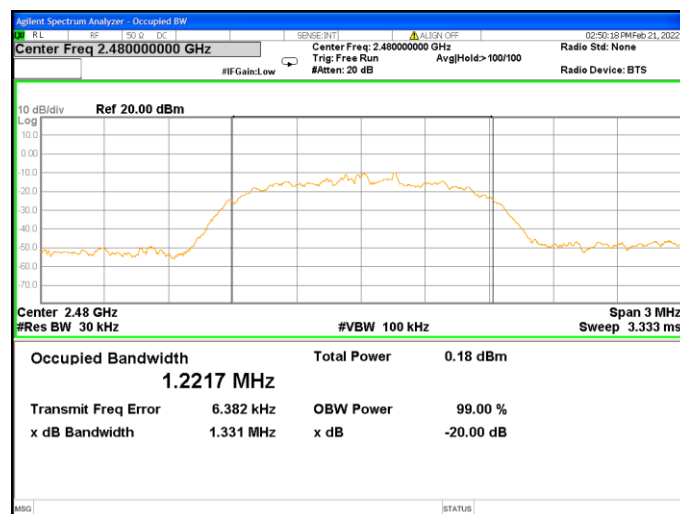

3. Carrier Frequency Separation Test

3.1 Test Setup & Procedure

The test procedure was according to FCC measurement guidelines DA 00-705.

The carrier frequency separation per FCC §15.247(a)(1) was measured using a 50 ohm spectrum analyzer with the resolutions bandwidth set at $\geq 1\%$ of the span, the video bandwidth $\geq$ RBW, and the SPAN was wide enough to capture the peaks of two adjacent channels. The carrier frequency separation result is in the following Table.


3.2 Operating Environment Condition

Temperature (°C) :	16
Relative Humidity (%) :	62


3.3 Test Results

Mode	Channel	Frequency (MHz)	Adjacent channel separation (MHz)	>Limit (MHz)	Results
DH5	0	2402	0.846	0.608	Pass
	39	2441	0.989	0.608	Pass
	78	2480	0.904	0.609	Pass
2DH5	0	2402	0.868	0.805	Pass
	39	2441	1.014	0.809	Pass
	78	2480	0.988	0.808	Pass
3DH5	0	2402	0.972	0.807	Pass
	39	2441	0.977	0.807	Pass
	78	2480	0.869	0.814	Pass


Chain0 : Frequency Separation @ 1DH5 Mode Ch 0

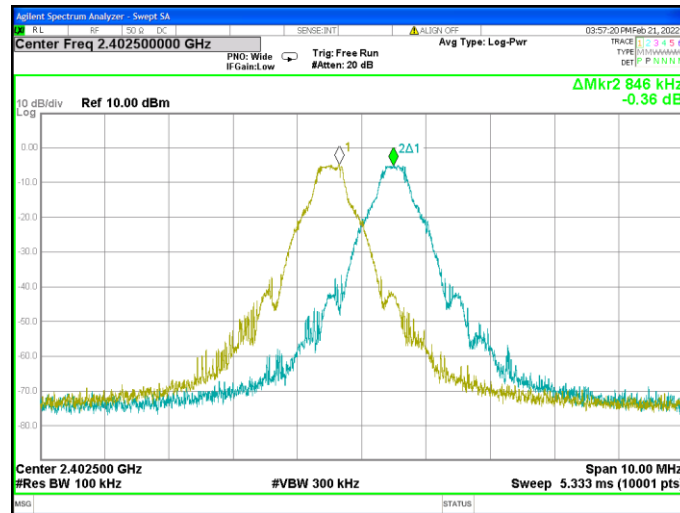


Chain0 : Frequency Separation @ 1DH5 Mode Ch 39

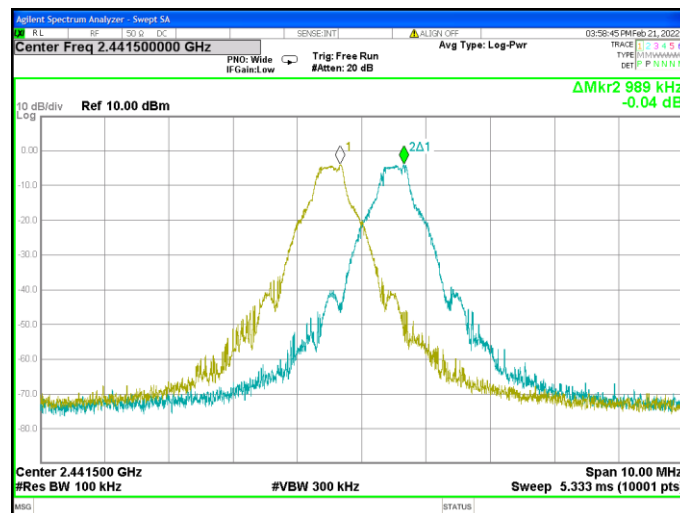


Chain0 : Frequency Separation @ 1DH5 Mode Ch 78

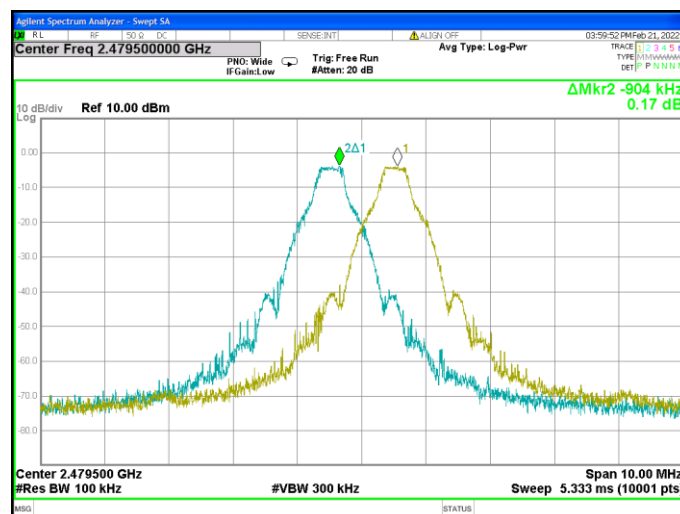


Chain0 : Frequency Separation @ 2DH5 Mode Ch 0

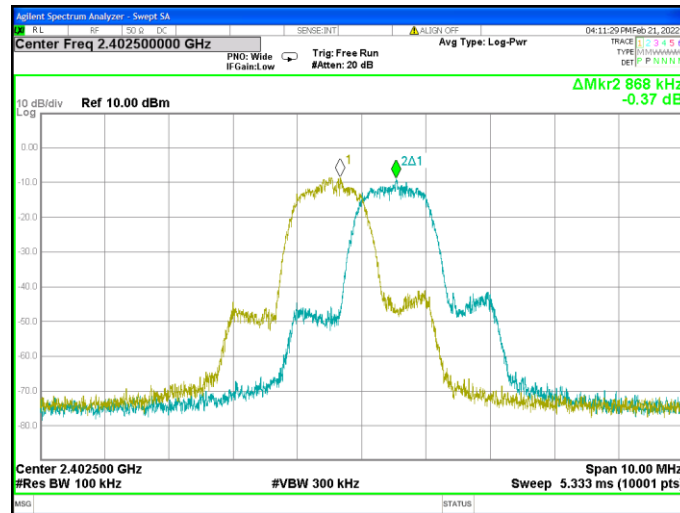


Chain0 : Frequency Separation @ 2DH5 Mode Ch 39

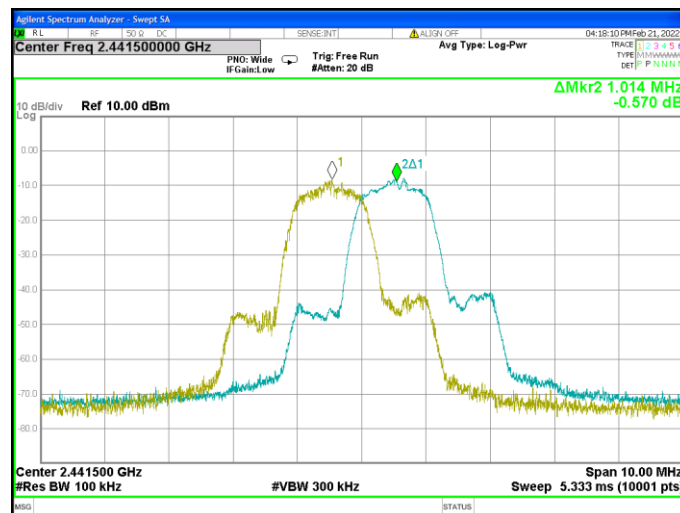


Chain0 : Frequency Separation @ 2DH5 Mode Ch 78

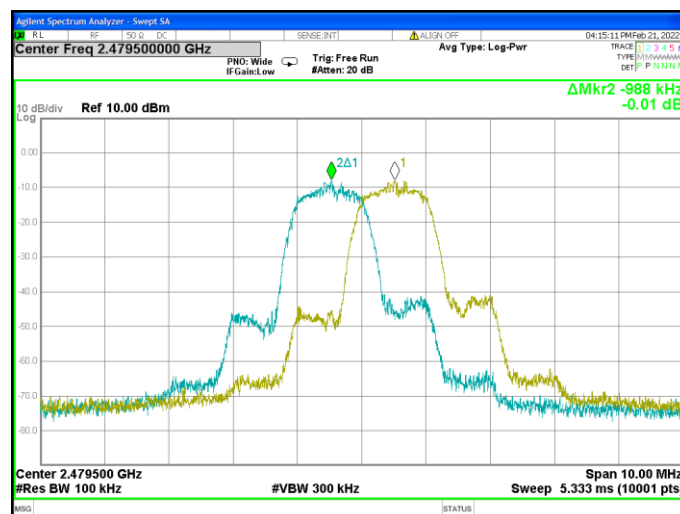


Chain0 : Frequency Separation @ 3DH5 Mode Ch 0

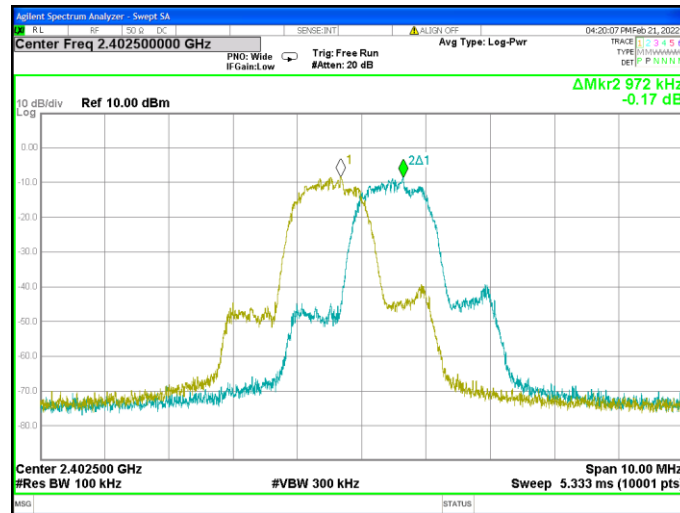

Chain0 : Frequency Separation @ 3DH5 Mode Ch 39

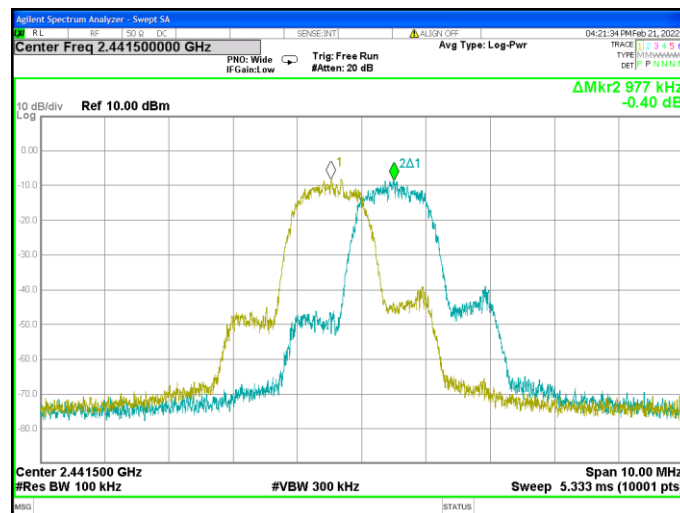

Chain0 : Frequency Separation @ 3DH5 Mode Ch 78

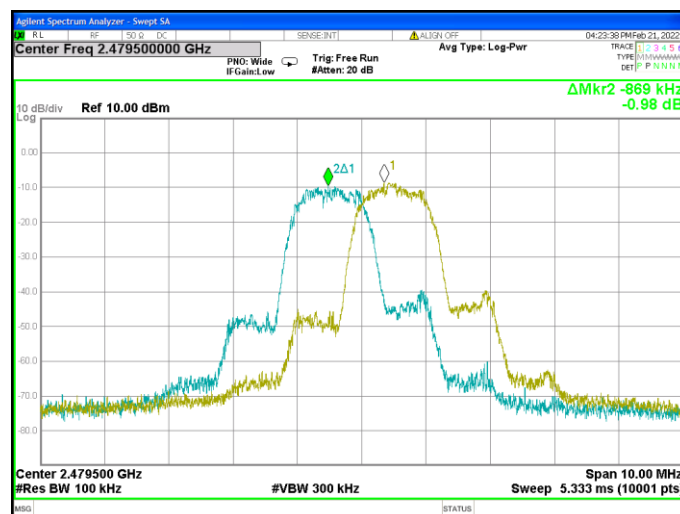

4. Number of Hopping Frequencies Test

4.1 Test Setup & Procedure

The test procedure was according to FCC measurement guidelines DA 00-705.

The number of hopping frequencies per FCC §15.247(a)(1) was measured using a 50 ohm spectrum analyzer with the resolutions bandwidth set at $\geq 1\%$ of the span, the video bandwidth $\geq$ RBW, and the SPAN was the frequency band of operation. The carrier frequency separation result is in the following Table.


4.2 Operating Environment Condition

Temperature (°C) :	16
Relative Humidity (%) :	62

4.3 Test Results

Frequency Range (MHz)	Hopping Channels
2402~2480	79

Number of Hopping Frequencies @ DH5 Hopping Mode

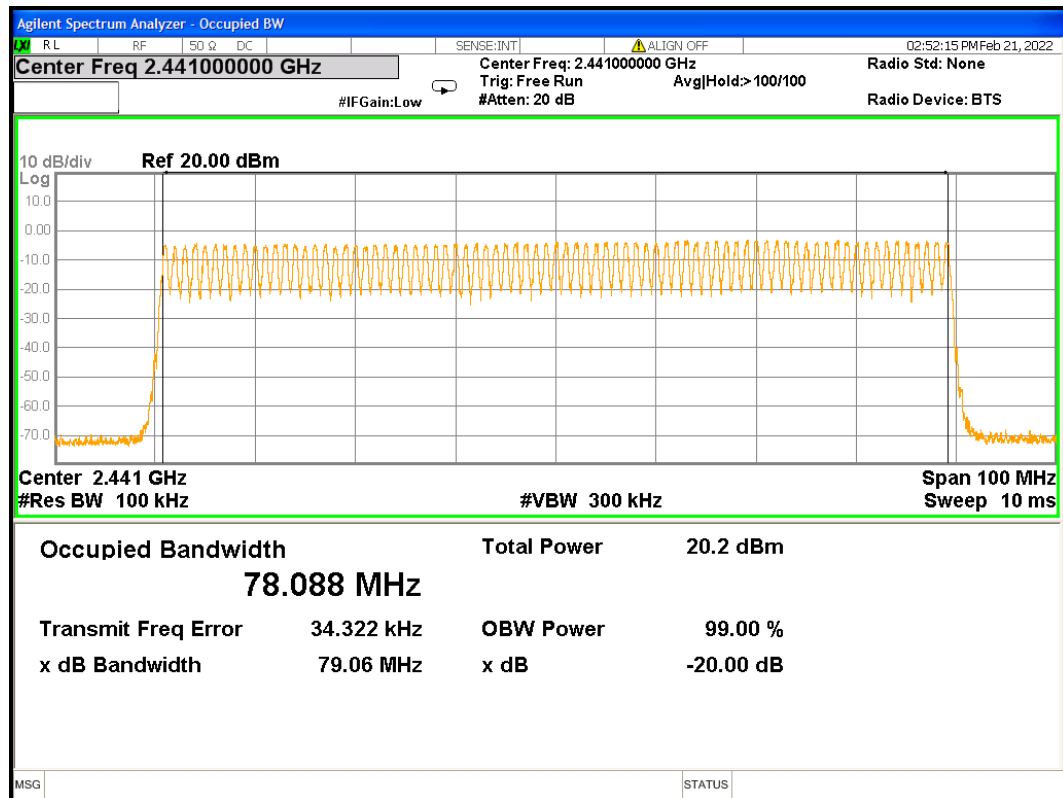

5. Time of Occupancy (Dwell Time)

5.1 Test Setup & Procedure

The test procedure was according to FCC measurement guidelines DA 00-705.

The time of occupancy (dwell time) per FCC §15.247(a)(1) was measured using a 50 ohm spectrum analyzer with the resolutions bandwidth set at 1MHz, the video bandwidth $\geq$ RBW, and the zero span function of spectrum analyzer was enable. The EUT has its hopping function enable.

5.2 Operating Environment Condition

Temperature (°C) :	16
Relative Humidity (%) :	62

5.3 Test Results

The total sweep time is $0.4 \times 79 \text{ Channels} = 31.6 \text{ seconds}$


Due to the number of hops in the 31.6s sweep, we determined to reduce the sweep time to 5s, count the number of hops and multiply by 6.32. The total number of hops will be multiplied by the measured time of one pulse.

Mode	Packet type	Pulse duration (ms)	Measure time (s)	Dwell time (s)	<Limit (s)	Results
GFSK	DH1	0.383	31.6	0.123	0.4	Pass
	DH3	1.639	31.6	0.262	0.4	Pass
	DH5	2.887	31.6	0.308	0.4	Pass
$\pi/4$ -DQPSK	2DH1	0.388	31.6	0.124	0.4	Pass
	2DH3	1.639	31.6	0.262	0.4	Pass
	2DH5	2.883	31.6	0.308	0.4	Pass
8-DPSK	3DH1	0.388	31.6	0.124	0.4	Pass
	3DH3	1.637	31.6	0.262	0.4	Pass
	3DH5	2.890	31.6	0.308	0.4	Pass

Note:

- (1) $\text{Dwell time} = 1600 \div (79 \times N) \times \text{Pulse duration} \times \text{Measure time}$
- (2) DH1, N=2
DH3, N=4
DH5, N=6

Chain0 : Dwell time @ 1DH1 Mode Ch 39

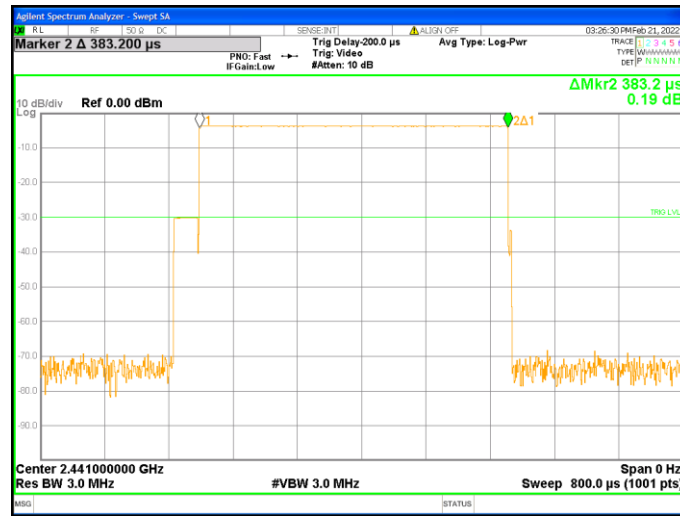


Chain0 : Dwell time @ 1DH3 Mode Ch 39




Chain0 : Dwell time @ 1DH5 Mode Ch 39




Chain0 : Dwell time @ 2DH1 Mode Ch 39

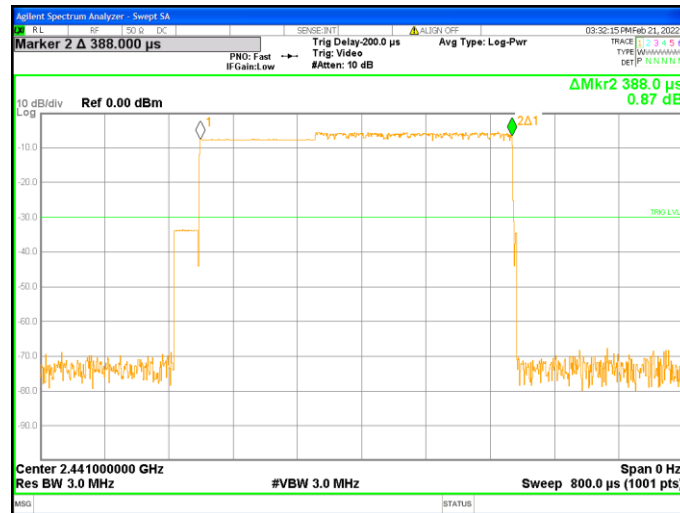


Chain0 : Dwell time @ 2DH3 Mode Ch 39

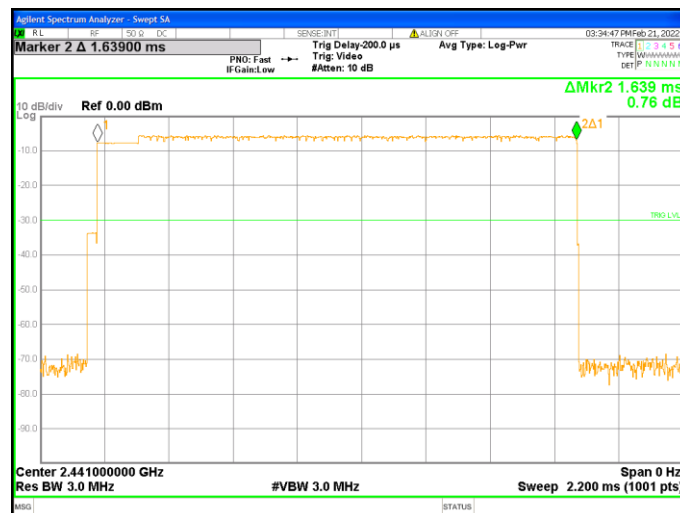


Chain0 : Dwell time @ 2DH5 Mode Ch 39

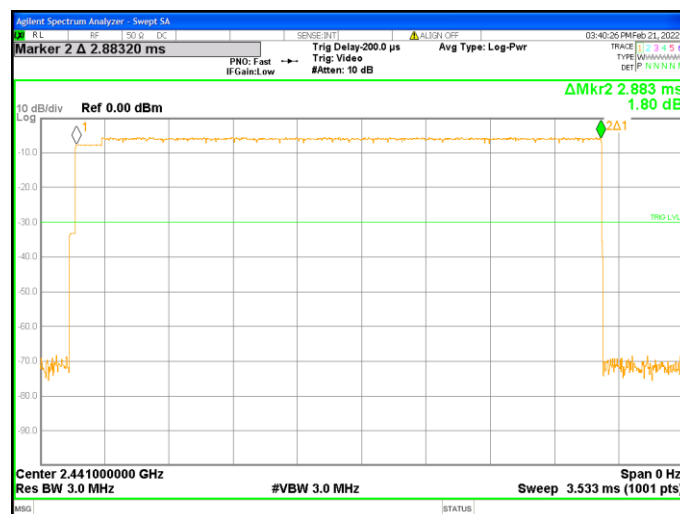

Chain0 : Dwell time @ 3DH1 Mode Ch 39

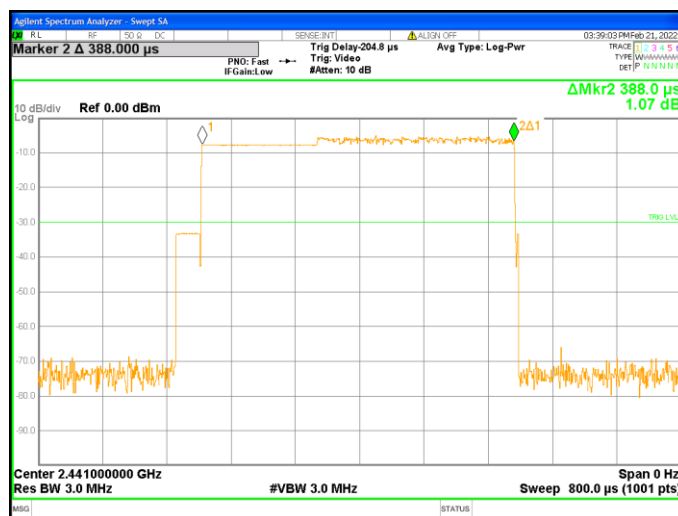

Chain0 : Dwell time @ 3DH3 Mode Ch 39

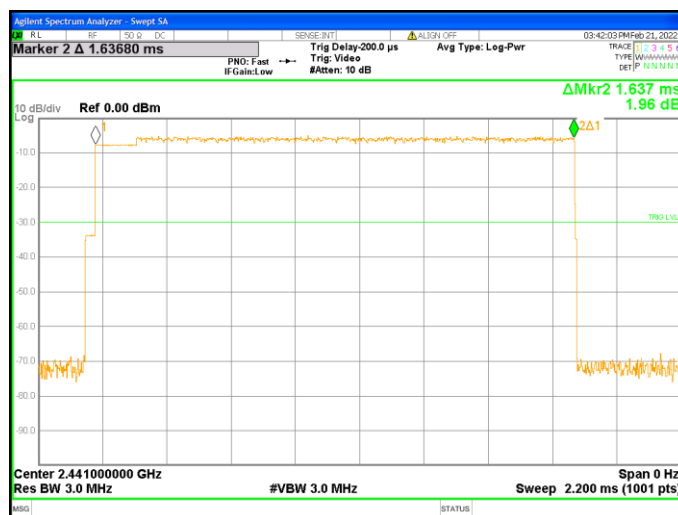

Chain0 : Dwell time @ 3DH5 Mode Ch 39



6. Maximum Output Power Test

6.1 Test Setup & Procedure

The test procedure was according to FCC measurement guidelines DA 00-705.

The power output per FCC §15.247(b) was measured on the EUT using a 50 ohm SMA cable connected to peak power meter via power sensor. Power was read directly and cable loss correction (2 dB) was added to the reading to obtain power at the EUT antenna terminals. The test was performed at 3 channels (lowest, middle and highest channel).

6.2 Operating Environment Condition

Temperature (°C) :	16
Relative Humidity (%) :	62

6.3 Test Results

Mode	Channel	Frequency (MHz)	Output Power [AV] (dBm)	Total Power [AV] (mW)	Maximun power [PK] (dBm)	Maximun power [PK] (mW)	Limit (dBm)	Margin (dB)
DH5	0	2402	7.83	6.07	8.18	6.58	30	-21.82
	39	2441	8.54	7.14	8.83	7.64	30	-21.17
	78	2480	9.10	8.13	9.37	8.65	30	-20.63
2DH5	0	2402	4.19	2.62	6.52	4.49	21	-14.48
	39	2441	4.64	2.91	7.26	5.32	21	-13.74
	78	2480	4.86	3.06	7.05	5.07	21	-13.95
3DH5	0	2402	4.17	2.61	6.74	4.72	21	-14.26
	39	2441	4.66	2.92	7.14	5.18	21	-13.86
	78	2480	4.83	3.04	7.56	5.70	21	-13.44

7. RF Antenna Conducted Spurious Test

7.1 Test Setup & Procedure

The test procedure was according to FCC measurement guidelines DA 00-705.

The measurements were performed from 30MHz to 25GHz RF antenna conducted per FCC 15.247 (c) was measured from the EUT antenna port using a 50ohm spectrum analyzer with the resolution bandwidth set at 100 kHz, and the video bandwidth set at 100 kHz.


Harmonics and spurious noise must be at least 20dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.

7.2 Operating Environment Condition


Temperature (°C) :	16
Relative Humidity (%) :	62

7.3 Test Results


Chain0 : Conducted Spurious @ GFSK Mode Ch 0

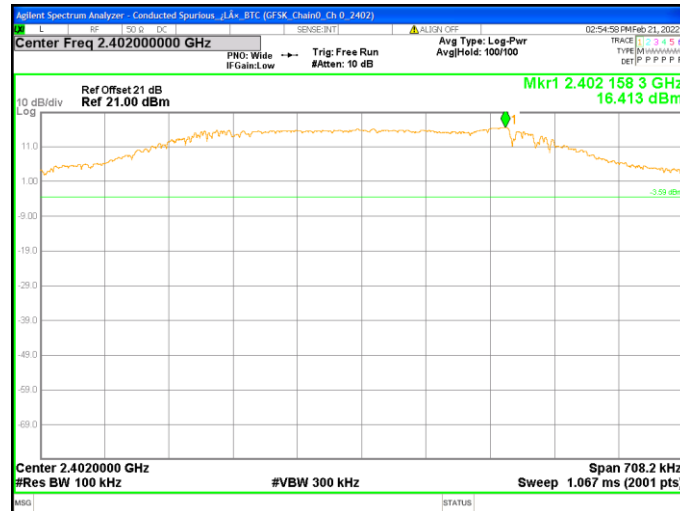


Chain0 : Conducted Spurious @ GFSK Mode Ch 0

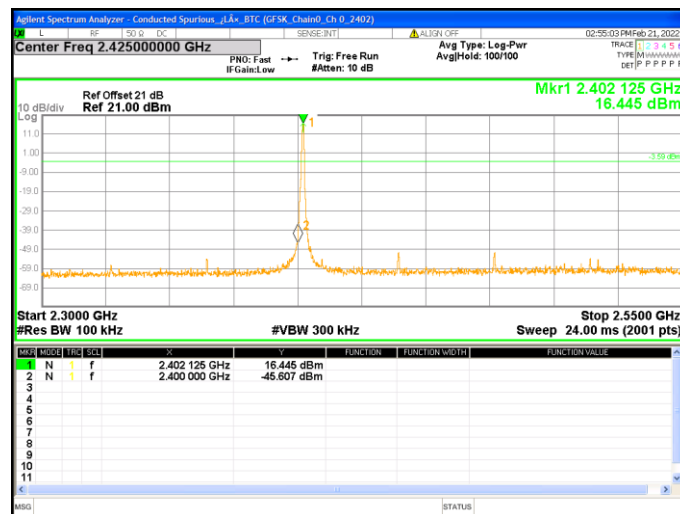


Chain0 : Conducted Spurious @ GFSK Mode Ch 0

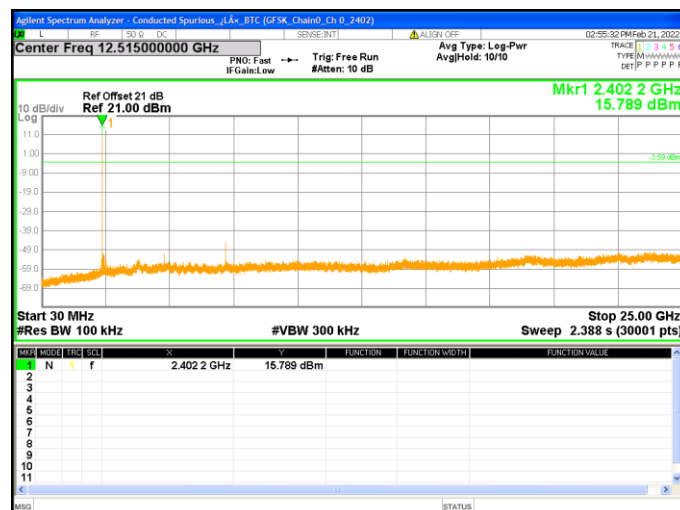


Chain0 : Conducted Spurious @ GFSK Mode Ch 39

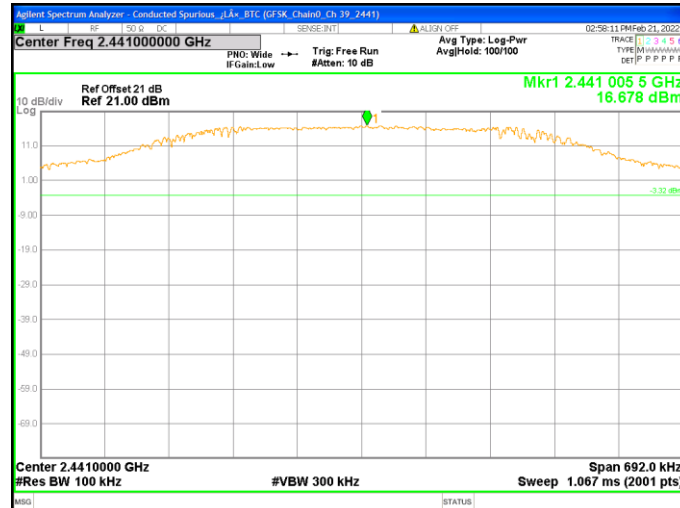


Chain0 : Conducted Spurious @ GFSK Mode Ch 39

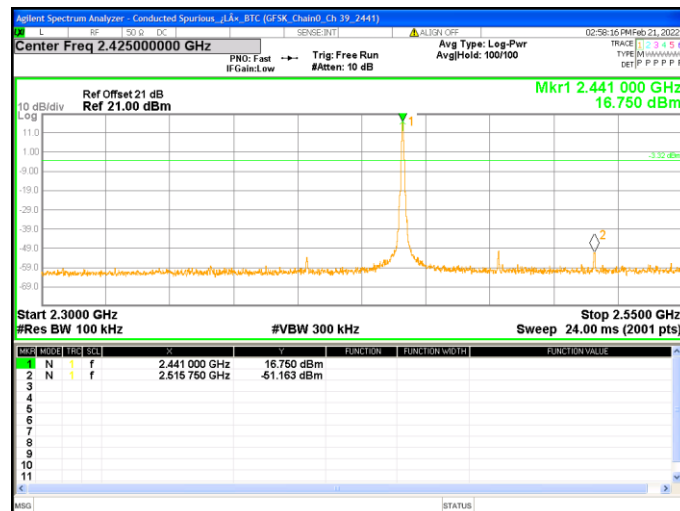


Chain0 : Conducted Spurious @ GFSK Mode Ch 39

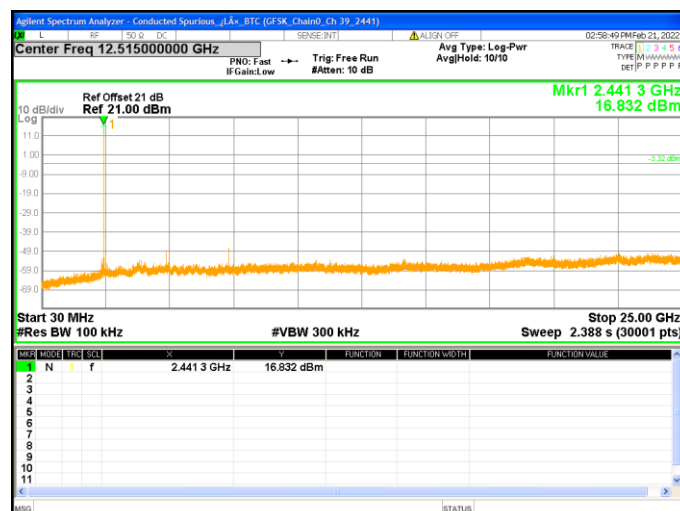


Chain0 : Conducted Spurious @ GFSK Mode Ch 78

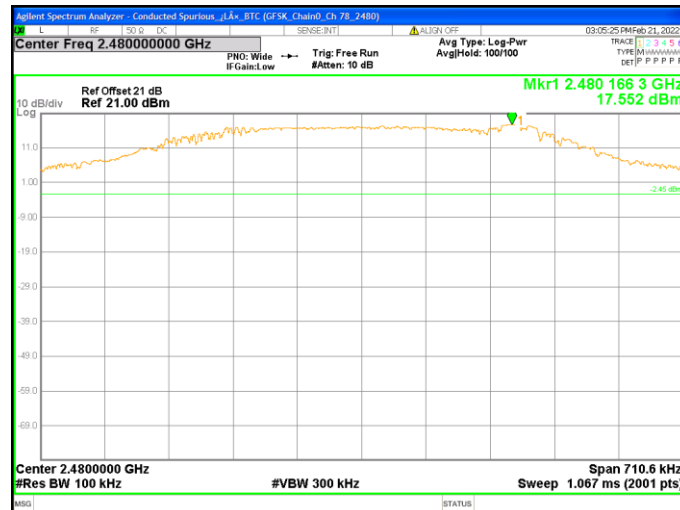


Chain0 : Conducted Spurious @ GFSK Mode Ch 78

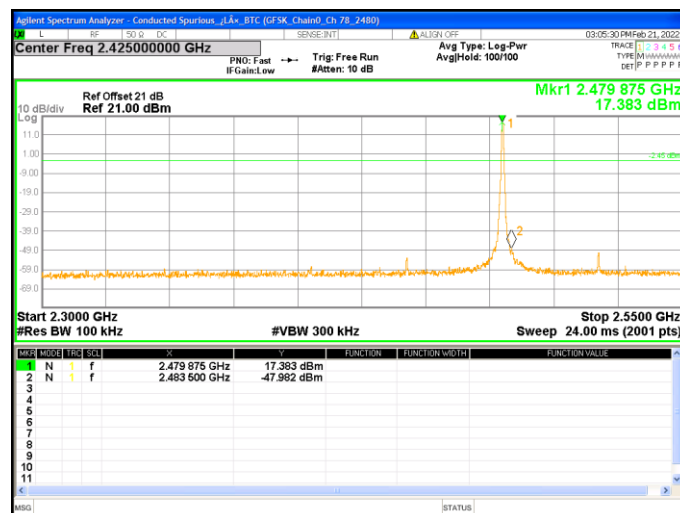


Chain0 : Conducted Spurious @ GFSK Mode Ch 78

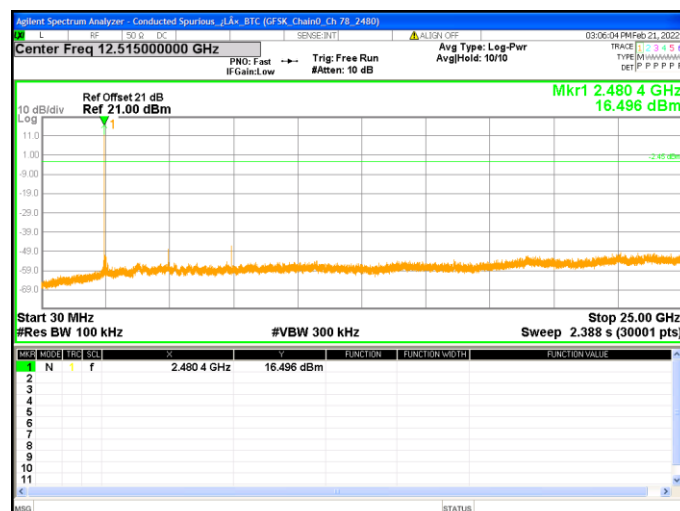


Chain0 : Conducted Spurious @ Pi/4 DQPSK Mode Ch 0

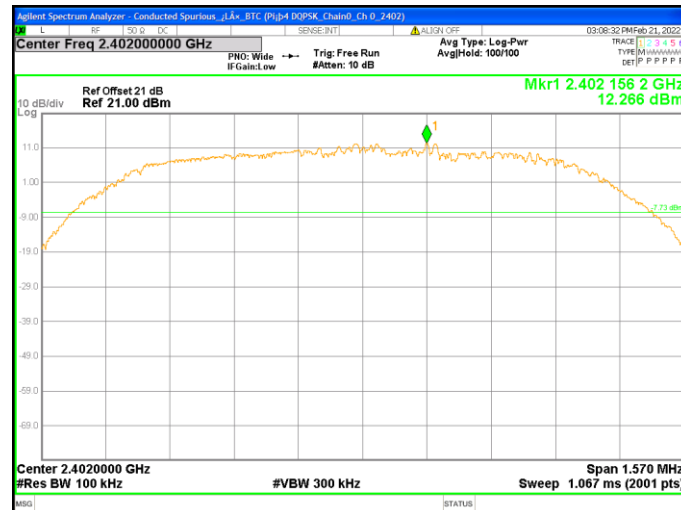


Chain0 : Conducted Spurious @ Pi/4 DQPSK Mode Ch 0

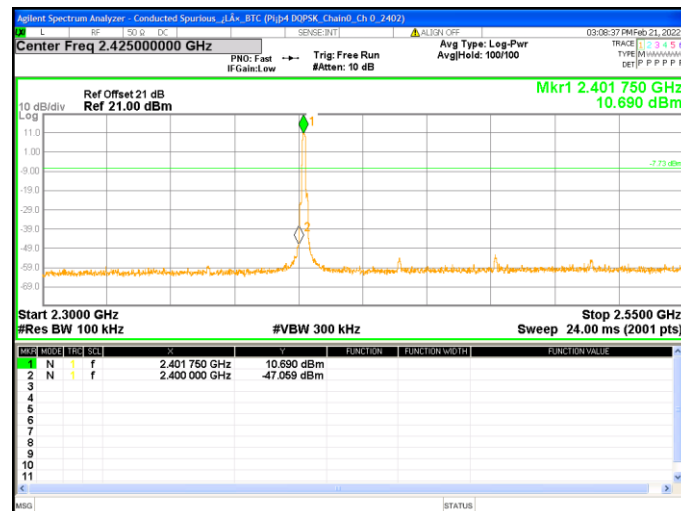


Chain0 : Conducted Spurious @ Pi/4 DQPSK Mode Ch 0

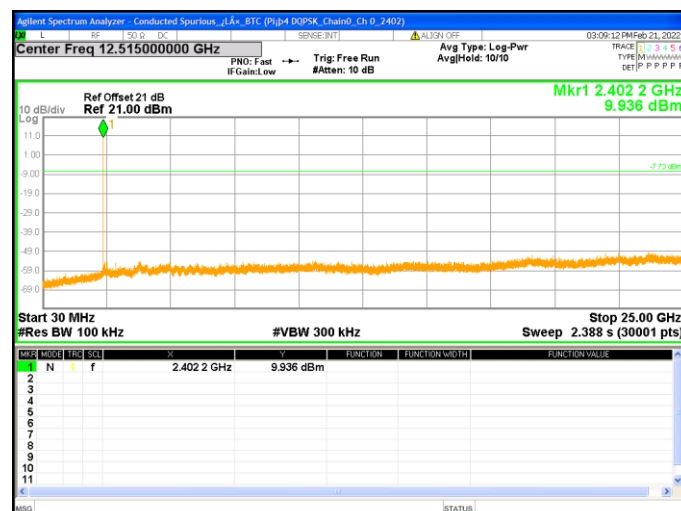


Chain0 : Conducted Spurious @ Pi/4 DQPSK Mode Ch 39

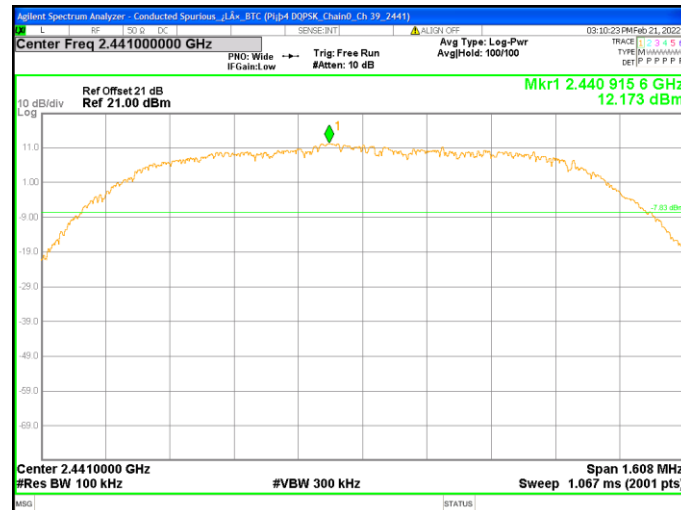


Chain0 : Conducted Spurious @ Pi/4 DQPSK Mode Ch 39

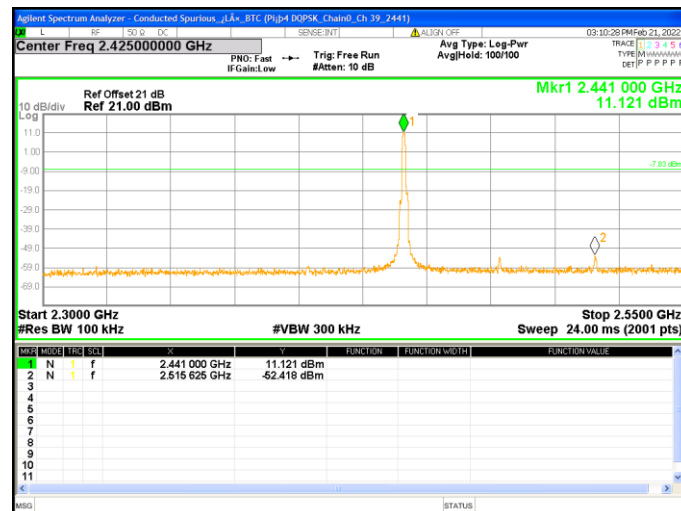


Chain0 : Conducted Spurious @ Pi/4 DQPSK Mode Ch 39

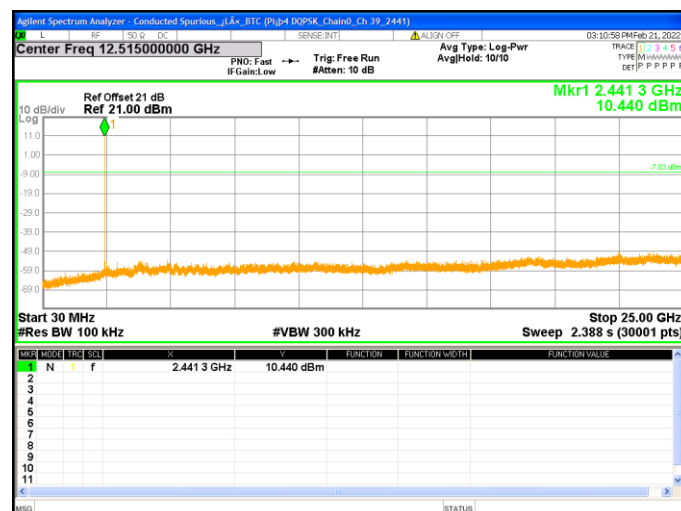


Chain0 : Conducted Spurious @ Pi/4 DQPSK Mode Ch 78

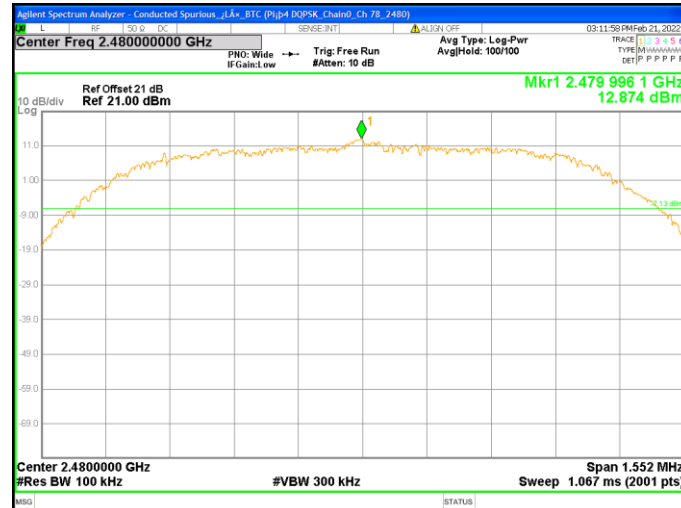


Chain0 : Conducted Spurious @ Pi/4 DQPSK Mode Ch 78

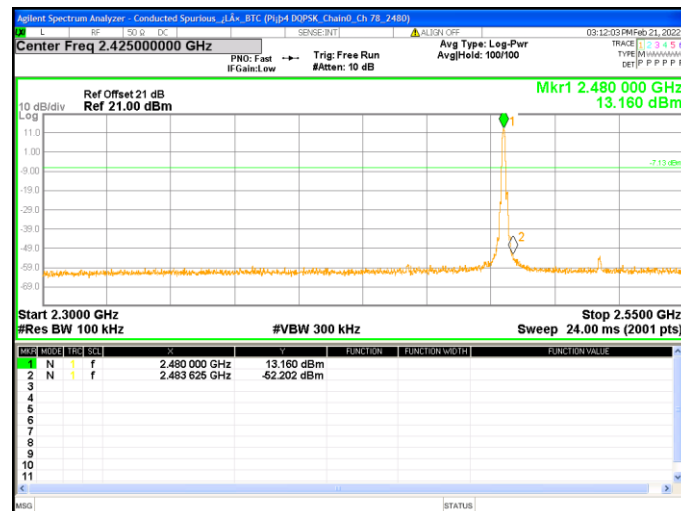


Chain0 : Conducted Spurious @ Pi/4 DQPSK Mode Ch 78

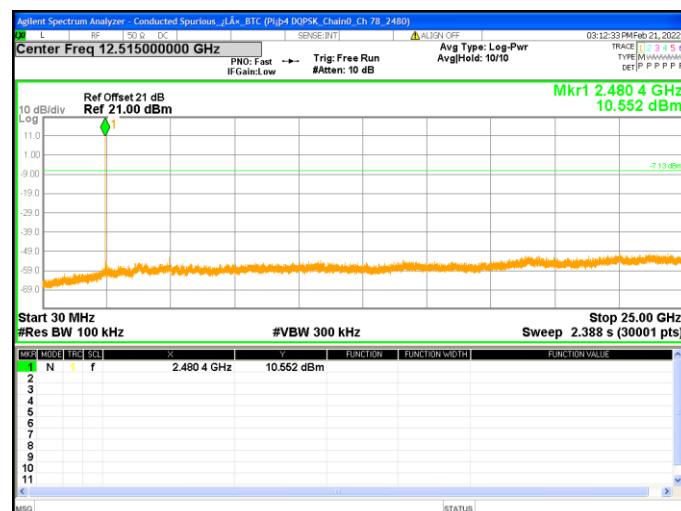


Chain0 : Conducted Spurious @ 8DPSK Mode Ch 0

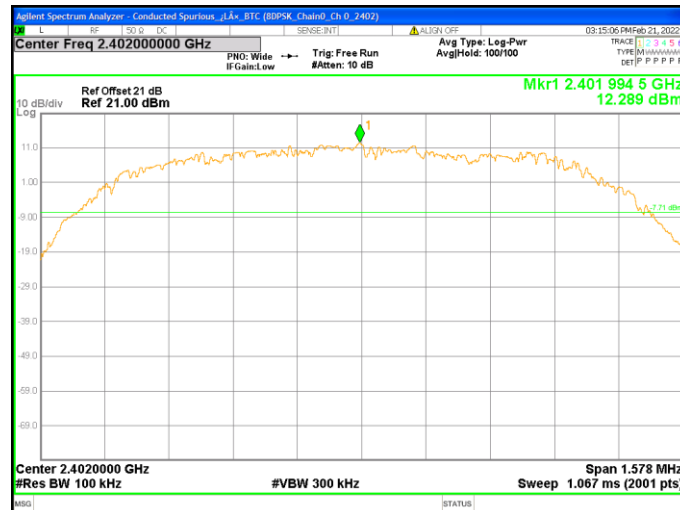


Chain0 : Conducted Spurious @ 8DPSK Mode Ch 0

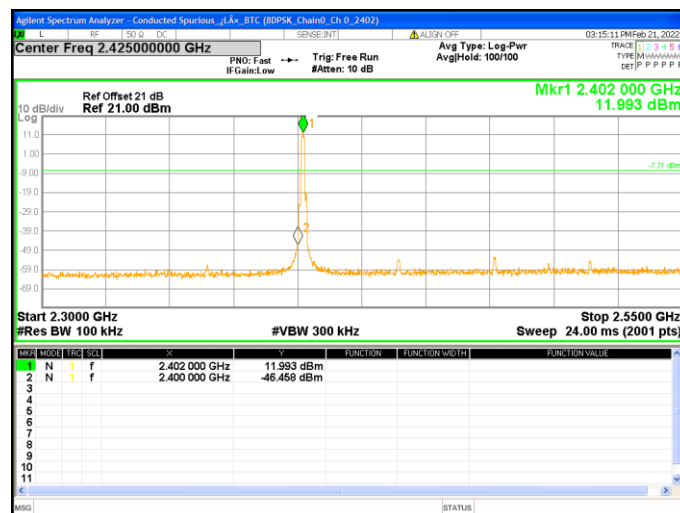


Chain0 : Conducted Spurious @ 8DPSK Mode Ch 0

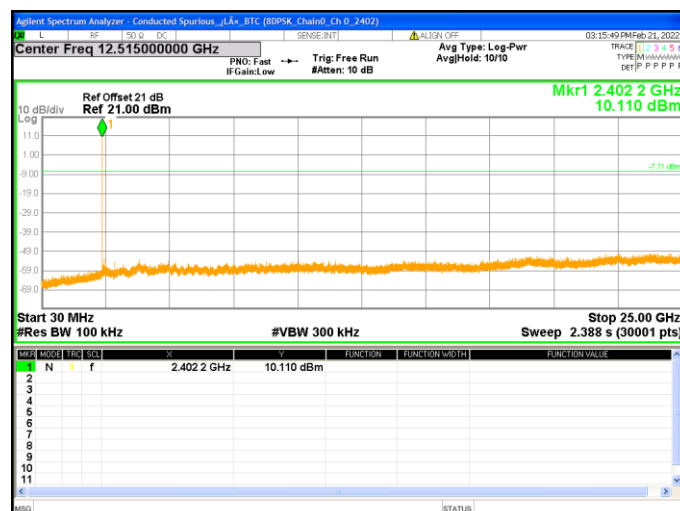


Chain0 : Conducted Spurious @ 8DPSK Mode Ch 39

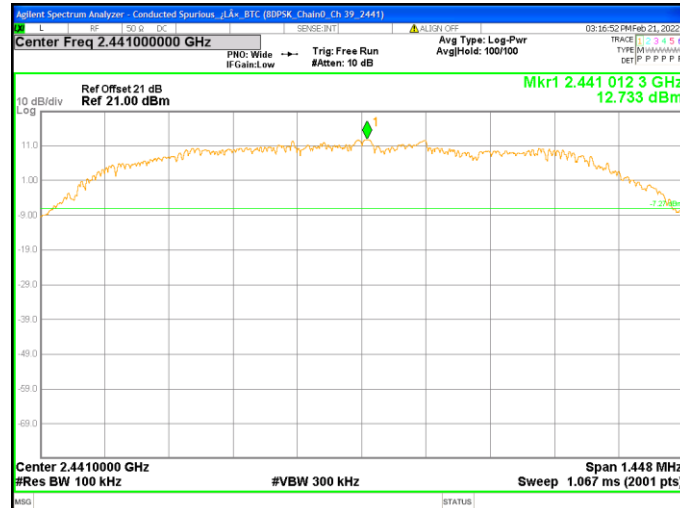


Chain0 : Conducted Spurious @ 8DPSK Mode Ch 39

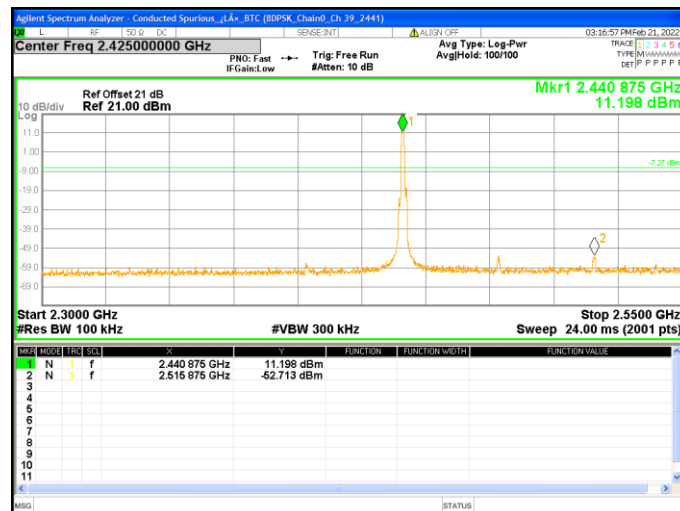


Chain0 : Conducted Spurious @ 8DPSK Mode Ch 39

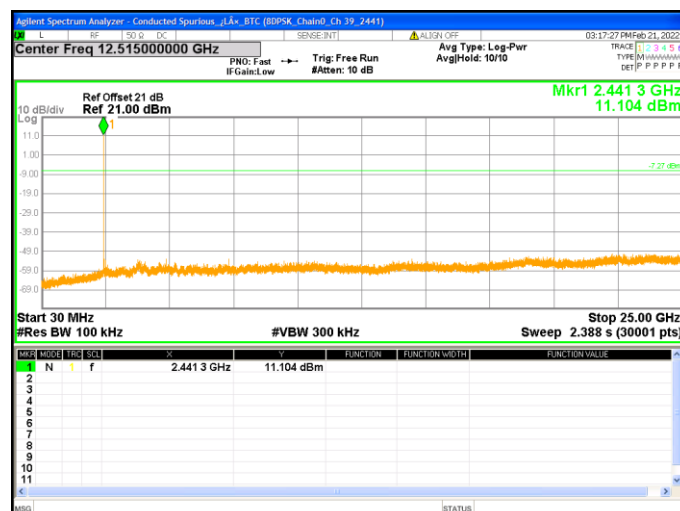


Chain0 : Conducted Spurious @ 8DPSK Mode Ch 78

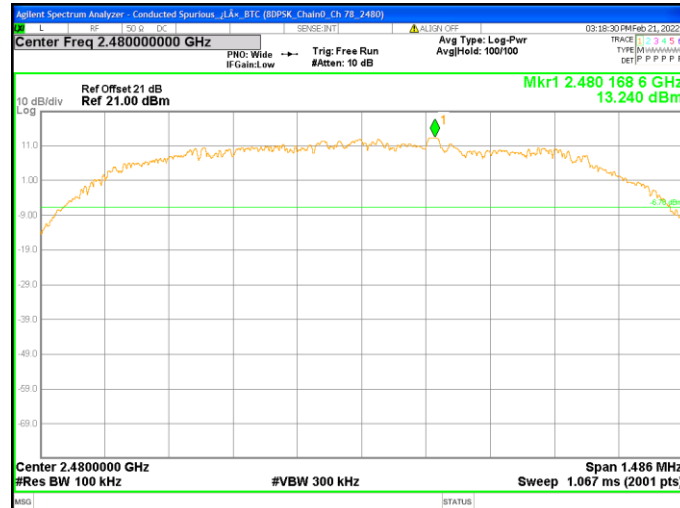

Chain0 : Conducted Spurious @ 8DPSK Mode Ch 78

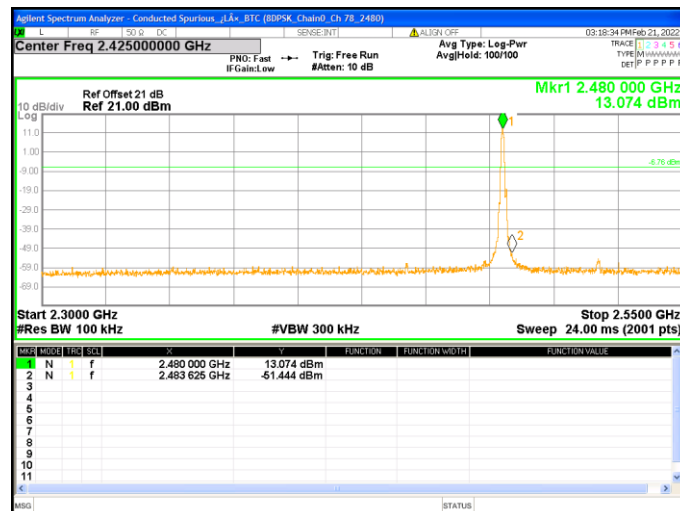

Chain0 : Conducted Spurious @ 8DPSK Mode Ch 78

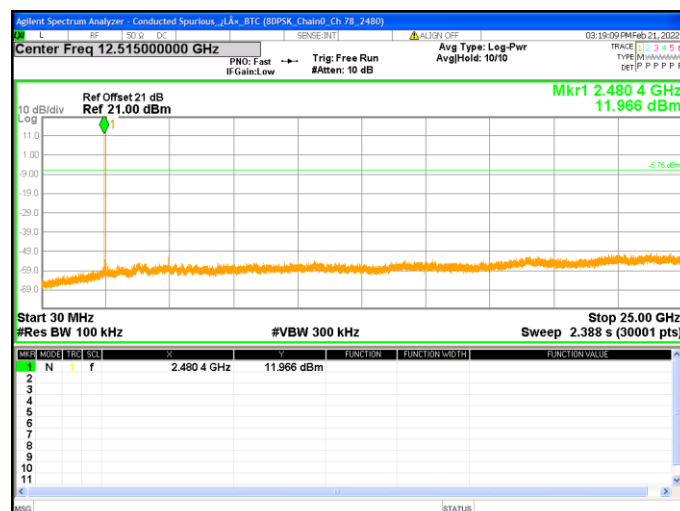


8. Emissions in Restricted Frequency Bands (Radiated emission measurements)

8.1 Instrument Setting


Receiver Function	Setting (Below 1GHz)	Setting (Above 1GHz)
Detector	QP	Peak and Average
RBW	9-150 kHz ; 200-300 Hz 0.15-30 MHz; 9-10 kHz 30-1000 MHz; 100-120 kHz	1MHz
VBW	$\geq 3 \times \text{RBW}$	3MHz & 1/T Minimum VBW
Sweep	Auto couple	Auto couple
Start Frequency	9 kHz	1GHz
Stop Frequency	1 GHz	Tenth harmonic
Attenuation	Auto	Auto

8.2 Test setup & procedure


Radiated emission from 9kHz to 30MHz uses Loop Antenna:

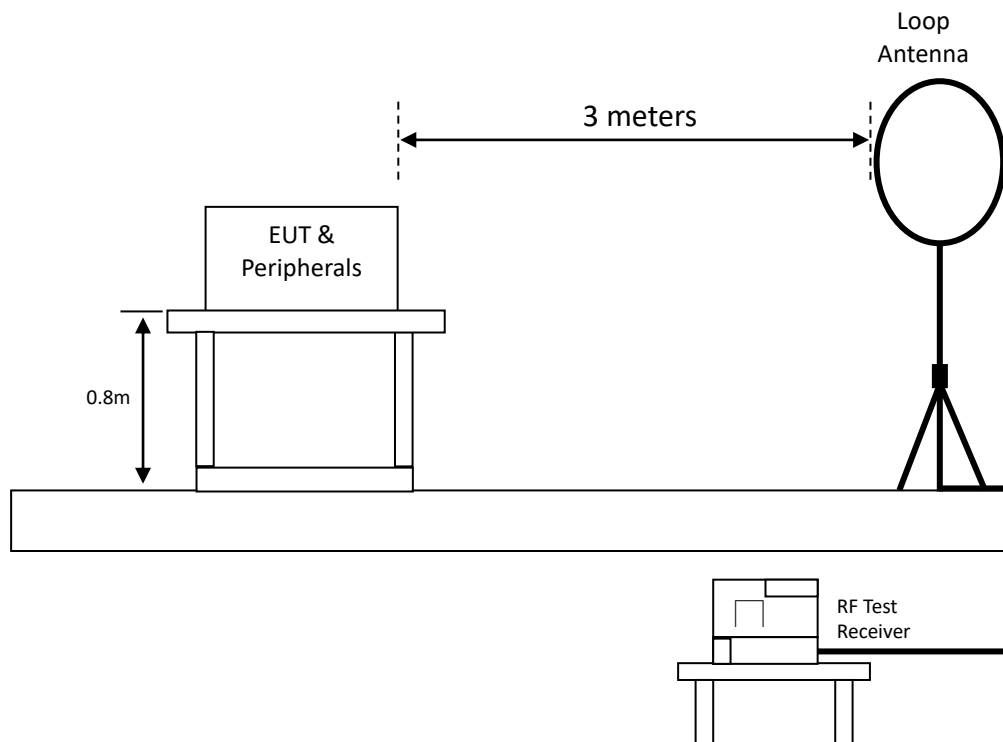

Radiated emission below 1GHz using Bilog Antenna

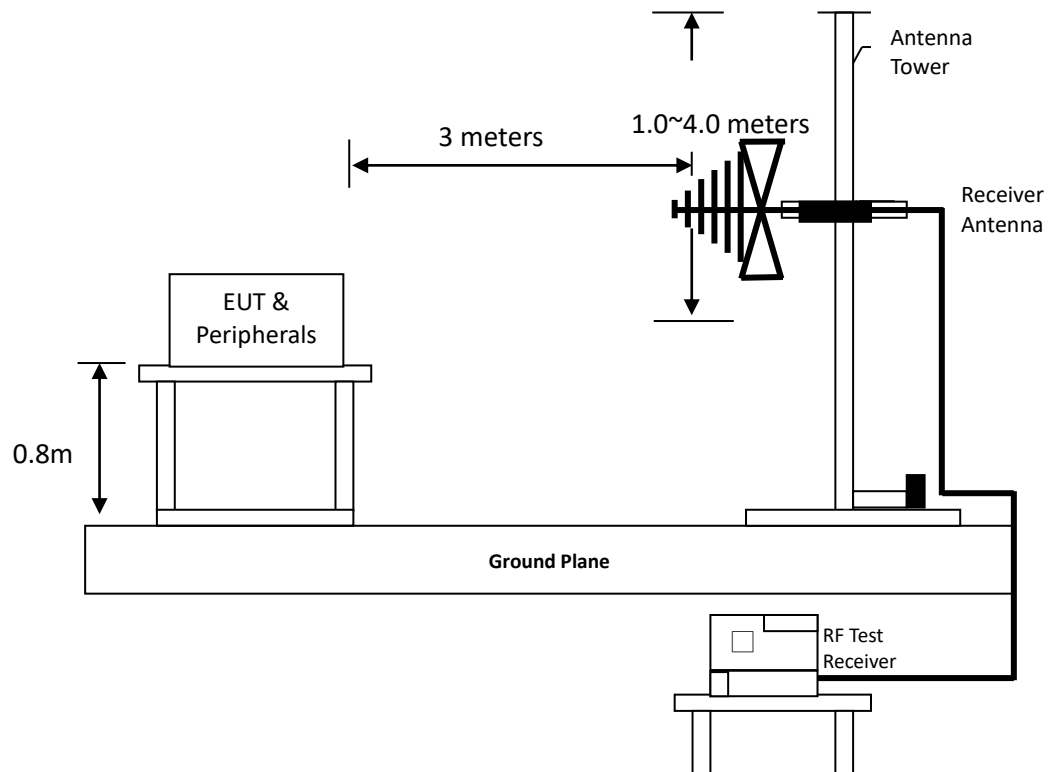

Radiated emission above 1GHz using Horn Antenna

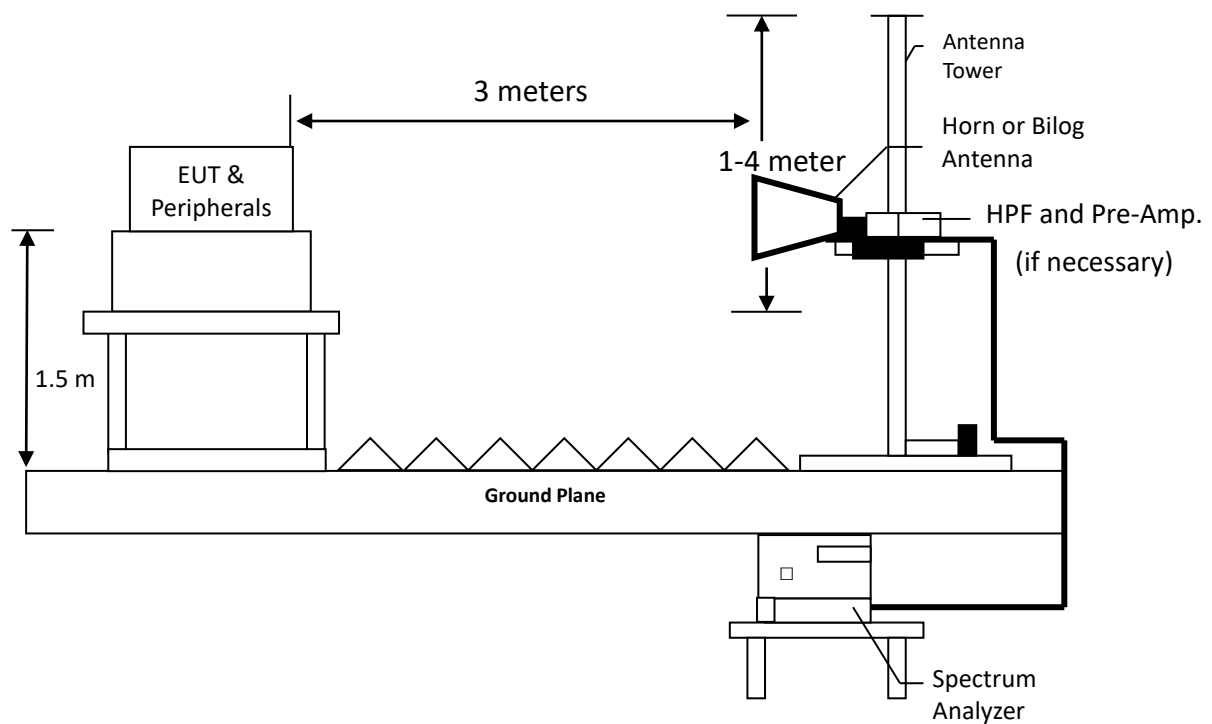

TEST REPORT

Radiated emissions were investigated cover the frequency range from 30MHz to 1000MHz using a receiver RBW of 120kHz record QP reading, and the frequency over 1GHz using a spectrum analyzer RBW of 1MHz and 10Hz VBW record Average reading. (15.209 paragraph), the Peak reading (1 MHz RBW/ 3 MHz VBW) recorded also on the report.

The EUT for testing is arranged on a turntable. If some peripherals apply to the EUT, the peripherals will be connected to EUT and the whole system. During the test, all cables were arranged to produce worst-case emissions. The signal is maximized through rotation. The height of antenna and polarization is changing constantly for exploring for maximum signal level. The height of antenna can be up to 4 meters and down to 1 meter.

The measurement for radiated emission will be done at the distance of three meters unless the signal level is too low to measure at that distance. In the case of the reading under noise floor, a pre-amplifier is used and/or the test is conducted at a closer distance. And then all readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance.

8.3 Limit

Frequency(MHz)	Field Strength($\mu\text{V/m}$)	Measurement distance(m)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark:

1. In the above table, the tighter limit applies at the band edges.
2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system

8.4 Operating Environment Condition

Temperature ($^{\circ}\text{C}$) :	17
Relative Humidity (%) :	64

TEST REPORT

8.5 Test Result

8.5.1 Measurement results: frequencies 9kHz to 30MHz

The test was performed on EUT under continuously transmitting mode. The worst case occurred at 1DH5 Ch 0.

Antenna Polarity	Frequency (MHz)	Detector	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
Perpendicular	0.069	AV	19.08	52.53	71.61	114.73	-43.12
Perpendicular	0.219	AV	18.75	46.91	65.66	100.85	-35.19
Perpendicular	0.339	AV	18.76	41.97	60.73	97.02	-36.29
Perpendicular	0.609	QP	19.34	35.22	54.56	71.93	-17.37
Perpendicular	1.209	QP	19.49	26.87	46.36	65.96	-19.60
Perpendicular	1.808	QP	19.46	22.69	42.15	69.54	-27.39

Antenna Polarity	Frequency (MHz)	Detector	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
Parallel	0.159	AV	18.57	50.90	69.47	103.63	-34.16
Parallel	0.339	AV	18.76	44.65	63.41	97.02	-33.61
Parallel	0.489	AV	19.34	40.29	59.63	93.82	-34.19
Parallel	1.209	QP	19.49	25.48	44.97	65.96	-20.99
Parallel	1.748	QP	19.47	20.29	39.76	69.54	-29.78
Parallel	2.408	QP	19.49	19.22	38.71	69.54	-30.83

Antenna Polarity	Frequency (MHz)	Detector	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
Ground-parallel	0.219	AV	18.75	47.56	66.31	100.85	-34.54
Ground-parallel	0.279	AV	18.72	45.62	64.34	98.73	-34.39
Ground-parallel	0.489	AV	19.34	39.67	59.01	93.82	-34.81
Ground-parallel	0.729	QP	19.54	30.19	49.73	70.43	-20.70
Ground-parallel	0.819	QP	19.65	21.55	41.20	69.36	-28.16
Ground-parallel	1.209	QP	19.49	19.46	38.95	65.96	-27.01

Remark: Corr. Factor = Antenna Factor + Cable Loss

TEST REPORT

8.5.2 Measurement results: frequencies below 1 GHz

The test was performed on EUT under continuously transmitting mode. The worst case occurred at 1DH5 Ch 0.

Ant Polarity (H/V)	Frequency (MHz)	Spectrum Analyzer Detector	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
Horizontal	40.67	QP	20.13	8.16	28.29	40.00	-11.71
Horizontal	74.62	QP	17.77	11.11	28.88	40.00	-11.12
Horizontal	150.28	QP	20.91	9.46	30.37	43.50	-13.13
Horizontal	225.94	QP	18.39	16.44	34.83	46.00	-11.17
Horizontal	301.60	QP	22.05	9.18	31.23	46.00	-14.77
Horizontal	377.26	QP	24.17	14.79	38.96	46.00	-7.04

Ant Polarity (H/V)	Frequency (MHz)	Spectrum Analyzer Detector	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
Vertical	45.52	QP	20.92	9.56	30.48	40.00	-9.52
Vertical	150.28	QP	20.91	10.48	31.39	43.50	-12.11
Vertical	225.94	QP	18.39	14.97	33.36	46.00	-12.64
Vertical	301.60	QP	22.05	9.38	31.43	46.00	-14.57
Vertical	377.26	QP	24.17	14.04	38.21	46.00	-7.79
Vertical	452.92	QP	26.19	6.11	32.30	46.00	-13.70

Remark: Corr. Factor = Antenna Factor + Cable Loss

TEST REPORT

8.5.3 Measurement results: frequency above 1GHz to 25GHz

Mode	Frequency (MHz)	Spectrum Analyzer Detector	Ant. Pol. (H/V)	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
DH5_Ch0	4804	PK	V	13.69	30.40	44.09	74	-29.91
	4804	PK	H	13.69	32.52	46.21	74	-27.79
DH5_Ch39	4882	PK	V	14.09	29.30	43.39	74	-30.61
	4882	PK	H	14.09	32.82	46.91	74	-27.09
DH5_Ch78	4960	PK	V	14.05	45.12	59.17	74	-14.83
	4960	PK	H	14.05	30.40	44.45	74	-29.55
2DH5_Ch0	4804	PK	V	13.69	30.41	44.10	74	-29.90
	4804	PK	H	13.69	31.20	44.89	74	-29.11
2DH5_Ch39	4882	PK	V	14.09	30.15	44.24	74	-29.76
	4882	PK	H	14.09	30.11	44.20	74	-29.80
2DH5_Ch78	4960	PK	V	14.05	27.98	42.03	74	-31.97
	4960	PK	H	14.05	29.15	43.20	74	-30.80
3DH5_Ch0	4804	PK	V	13.69	31.21	44.90	74	-29.10
	4804	PK	H	13.69	31.83	45.52	74	-28.48
3DH5_Ch39	4882	PK	V	14.09	28.72	42.81	74	-31.19
	4882	PK	H	14.09	30.23	44.32	74	-29.68
3DH5_Ch78	4960	PK	V	14.05	28.84	42.89	74	-31.11
	4960	PK	H	14.05	29.81	43.86	74	-30.14

Remark: Correction Factor = Antenna Factor + Cable Loss + High Pass Filter Loss - Pre_Amplifier Gain

9. Emission on Band Edge

9.1 Instrument Setting

Spectrum Function	Setting
Detector	Peak and Average
RBW	1MHz
VBW	3MHz & 1/T Minimum VBW
Sweep	Auto couple
Restrict bands	2310 MHz ~ 2390 MHz 2483.5 MHz ~ 2500 MHz
Attenuation	Auto

9.2 Test Procedure

The test procedure is the same as Emissions in Restricted Frequency Bands (Radiated emission measurements).

9.3 Operating Environment Condition


Temperature (°C) :	16
Relative Humidity (%) :	62

9.4 Test Results


Mode	Frequency (MHz)	Spectrum Analyzer Detector	Ant. Pol. (H/V)	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)	Restricted band (MHz)
DH5	2336.60	PK	H	34.94	13.40	48.34	74	-25.66	2310~2390
	2364.53	AV	H	34.78	2.32	37.10	54	-16.90	
	2483.50	PK	H	34.77	14.36	49.13	74	-24.87	2483.5~2500
	2483.50	AV	H	34.77	3.92	38.69	54	-15.31	
2DH5	2377.26	PK	H	34.70	13.20	47.90	74	-26.10	2310~2390
	2344.96	AV	H	34.90	2.13	37.03	54	-16.97	
	2492.40	PK	H	34.84	12.89	47.73	74	-26.27	2483.5~2500
	2483.50	AV	H	34.77	3.00	37.77	54	-16.23	
3DH5	2340.02	PK	H	34.93	13.20	48.13	74	-25.87	2310~2390
	2353.89	AV	H	34.86	2.03	36.89	54	-17.11	
	2490.88	PK	H	34.84	13.46	48.30	74	-25.70	2483.5~2500
	2483.50	AV	H	34.77	3.35	38.12	54	-15.88	

Remark: Correction Factor = Antenna Factor + Cable Loss


Chain0 : Restricted Band Bandedge @ BTC 1DH5 Ch0 PK

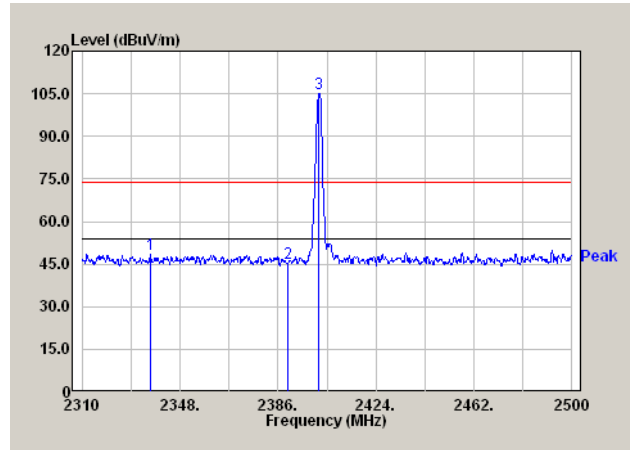


Chain0 : Restricted Band Bandedge @ BTC 1DH5 Ch0 AV

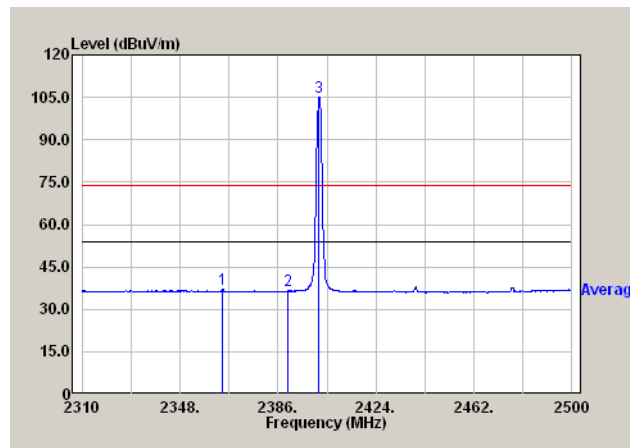


Chain0 : Restricted Band Bandedge @ 1DH5 Ch78 PK

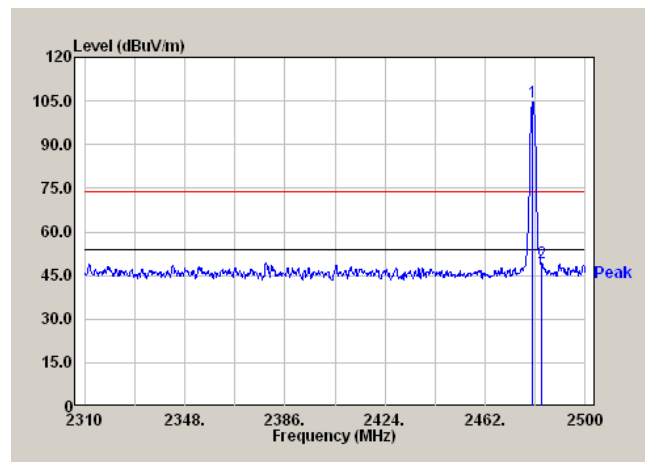


Chain0 : Restricted Band Bandedge @ 1DH5 Ch78 AV

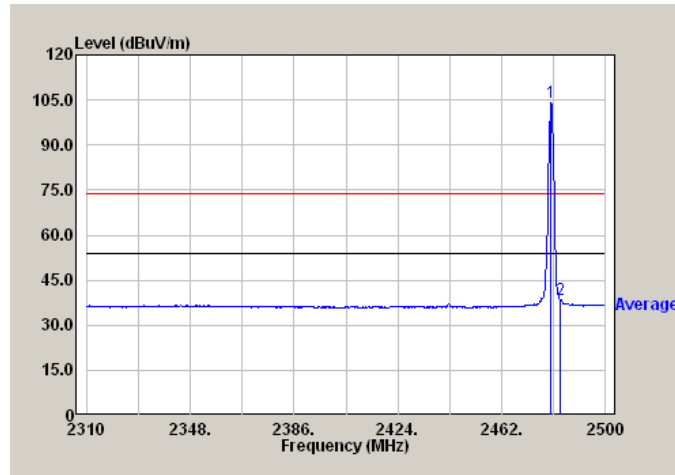


Chain0 : Restricted Band Bandedge @ Bandedge BTC 2DH5 Ch0 PK

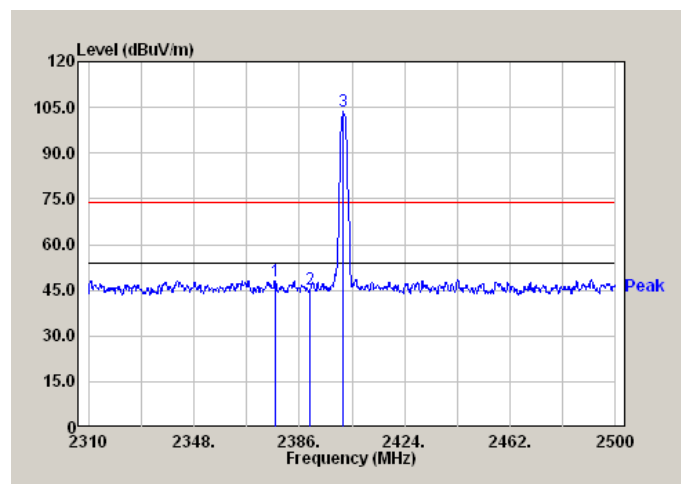


Chain0 : Restricted Band Bandedge @ Bandedge BTC 2DH5 Ch0 AV

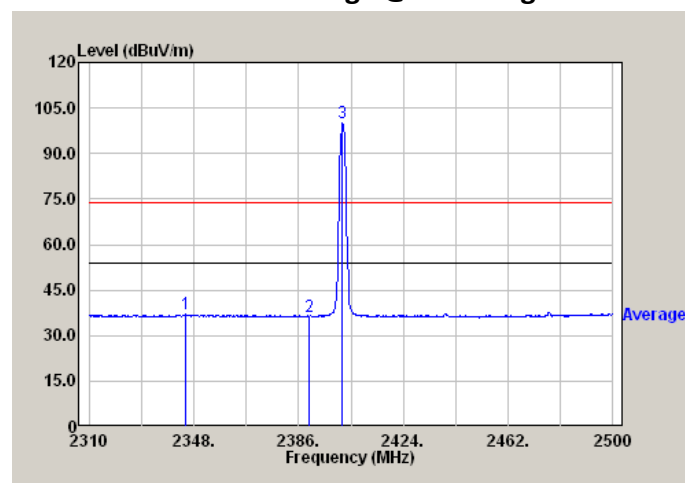


Chain0 : Restricted Band Bandedge @ 2DH5 Ch78 PK

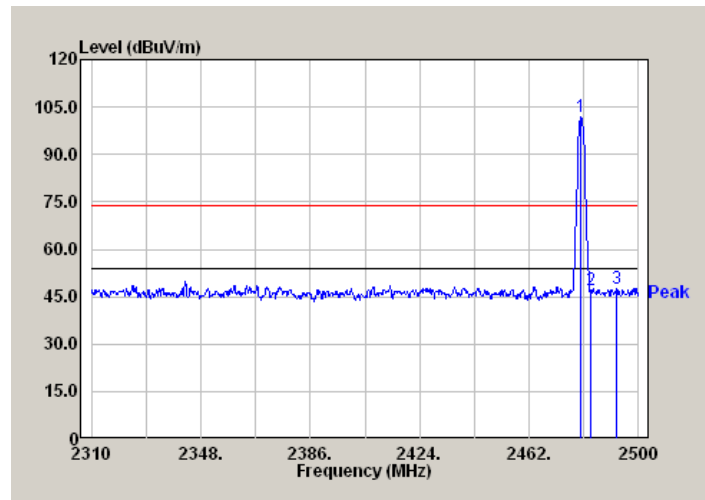


Chain0 : Restricted Band Bandedge @ 2DH5 Ch78 AV

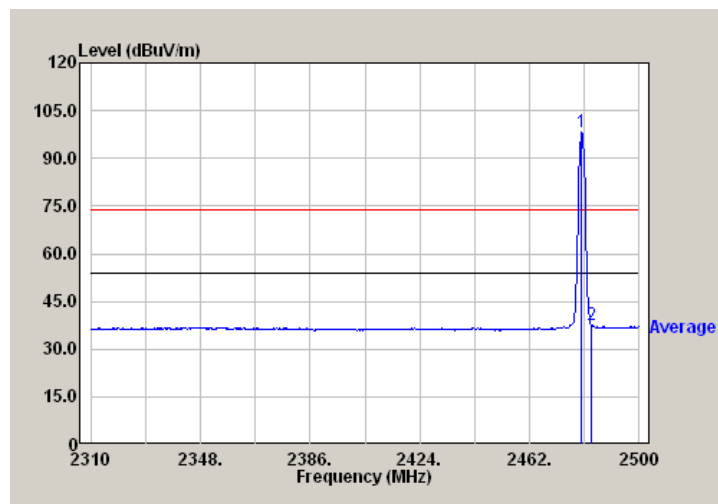


Chain0 : Restricted Band Bandedge @ 3DH5 Ch0 PK

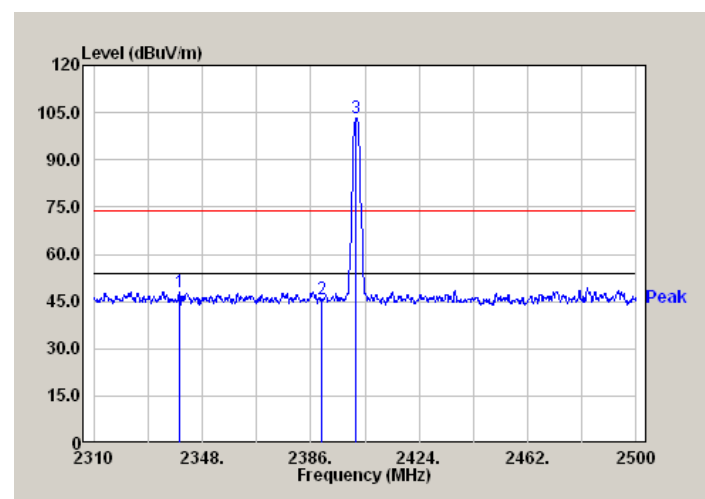


Chain0 : Restricted Band Bandedge @ 3DH5 Ch0 AV

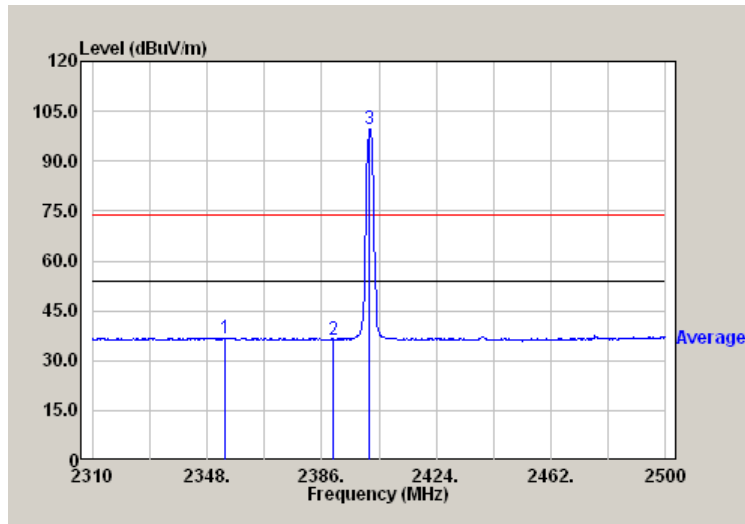

Chain0 : Restricted Band Bandedge @ 3DH5 Ch0 PK

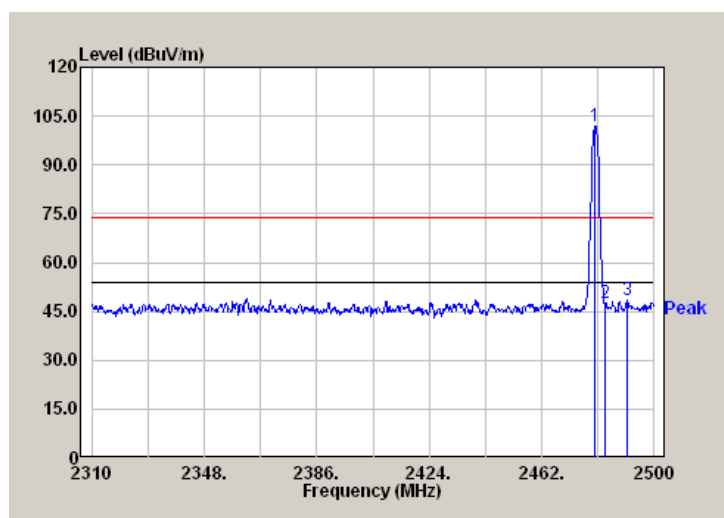

Chain0 : Restricted Band Bandedge @ 3DH5 Ch0 AV

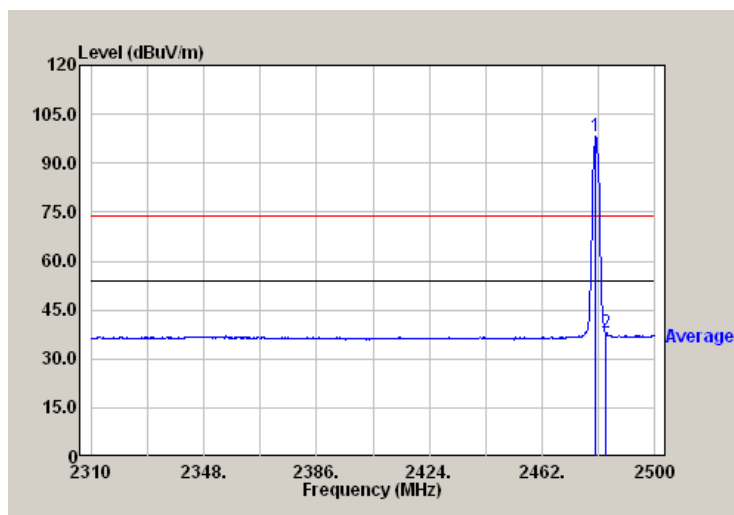

10. AC Power Line Conducted Emission

Since the EUT is not connected to AC source, therefore, the test can be waived.

TEST REPORT

Appendix A: Test equipment list

Test Equipment/ Test site	Brand	Model No.	Serial No.	Calibration Date	Next Calibration Date
EMI Test Receiver	Rohde & Schwarz	ESR7	101822	2021/08/16	2022/08/15
Signal Analyzer	Agilent	N9030A	MY51380492	2021/08/17	2022/08/16
Active Loop Antenna	SCHWARZBECK MESS-ELEKTRONIC	FMZB1519	1519-067	2021/04/14	2022/04/13
Broadband Antenna	SHWARZBECK	VULB 9168	9168-172	2022/01/20	2023/01/19
Horn Antenna	EMCO	BBHA 9120 D	9120D-456	2022/01/21	2023/01/20
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170159	2021/04/08	2022/04/07
Microwave Amplifier	HP	8348A	3111A00567	2021/10/19	2022/10/18
Pre-amplifier	SGH	SGH184	20201124-1	2021/12/06	2022/12/05
Power Meter	Anritsu	ML2495A	0844001	2021/10/17	2022/10/16
Power Sensor	Anritsu	MA2411B	0738452	2021/10/17	2022/10/16
966-2(A) Cable	SUHNER	SMA / EX 100	N/A	2021/03/08	2022/03/07
966-2(B) Cable	SUHNER	SUCOFLEX 104P	CB0005	2021/03/08	2022/03/07
966-2 Cable	SUHNER	SUCOFLEX 104P	9403/4P	2021/11/30	2022/11/29
RF Cable	SUHNER	SUCOFLEX 104P	CB0006	2021/04/29	2022/04/28
966-2_3m Semi-Anechoic Chamber	966_2	CEM-966_2	N/A	2022/01/14	2023/01/13
20dB Attenuator	Mini-Circuits	BW-S20W5+	N/A	2021/05/26	2022/05/25
Test software	Audix	e3	V9	NCR	NCR

Note: No Calibration Required (NCR)

Appendix B: Measurement Uncertainty

This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level using a coverage factor of k=2.

Item	Uncertainty
Vertically polarized radiated disturbances from 30MHz~1GHz in a semi-anechoic chamber at a distance of 3m	5.16 dB
Horizontally polarized radiated disturbances from 30MHz~1GHz in a semi-anechoic chamber at a distance of 3m	5.02 dB
Radiated disturbances from 1GHz~18GHz in a semi-anechoic chamber at a distance of 3m	5.17 dB
Vertically polarized Radiated disturbances from 18GHz~26.5GHz in a semi-anechoic chamber at a distance of 1m	2.39 dB
Horizontally polarized Radiated disturbances from 18GHz~26.5GHz in a semi-anechoic chamber at a distance of 1m	2.39 dB
Radiated disturbances from 9kHz~30MHz in a semi-anechoic chamber at a distance of 3m	3.70 dB
Emission on the Band Edge Test	4.32 dB
Occupied Bandwidth	7.78 %
Maximum Peak Conducted Output Power	0.44 dB
Power Spectral Density	1.27 dB
Emissions In Non-Restricted Frequency Bands	1.27 dB
AC Power Line Conducted Emission	3.08 dB