

P&F Brother Ind. Corp.

TEST REPORT

SCOPE OF WORK:

47 CFR FCC Part 15.247 – Radio Spectrum report

Model:

RIS-K106

REPORT NUMBER

220200207THC-001

ISSUE DATE

Apr. 07, 2022


PAGES

55

DOCUMENT CONTROL NUMBER

GFT-OP-10h (28-Nov-2018)

© 2020 Intertek

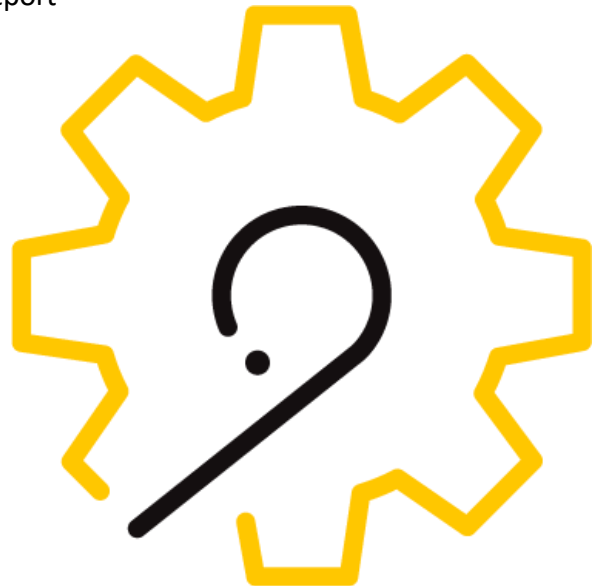

Radio Spectrum TEST REPORT

Applicant:	P&F Brother Ind. Corp. No.12, Gongyequ 6th Rd., Xitun Dist., Taichung City 407, Taiwan
Product:	Console
Model No.:	RIS-K106
FCC ID:	2A4ES0031944689
Test Method/ Standard:	47 CFR FCC Part 15.247 & ANSI C63.10 2013 KDB 558074 D01 v05r02
Test By:	Intertek Testing Services Taiwan Ltd., Hsinchu Laboratory No. 11, Lane 275, Ko-Nan 1 Street, Chia-Tung Li, Shiang-Shan District, Hsinchu City, Taiwan



Zero Chen

Zero Chen
Engineer

Rico Deng

Rico Deng
Reviewer

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

TEST REPORT

Revision History

Report No.	Issue Date	Revision Summary
220200207THC-001	Apr. 07, 2022	Original report

Table of Contents

1. General Information	6
1.1 Identification of the EUT	6
1.2 Antenna description	6
1.3 Operation mode	6
1.4 Peripherals equipment	7
2. Minimum 6 dB Bandwidth	8
2.1 Instrument Setting.....	8
2.2 Test Procedure	8
2.3 Test Diagram	8
2.4 Limit	8
2.5 Test Results	9
3. Maximum Peak Conducted Output Power	14
3.1 Instrument Setting.....	14
3.2 Test Procedure	14
3.3 Test Diagram	14
3.4 Limit	14
3.5 Test Results	15
4. Power Spectral Density.....	16
4.1 Instrument Setting.....	16
4.2 Test Procedure	16
4.3 Test Diagram	16
4.4 Limit	16
4.5 Test Results	17
5. Emissions in Non-Restricted Frequency Bands	22
5.1 Instruments Setting	22
5.2 Test Procedure	22
5.3 Test Diagram	22
5.4 Limit	22
5.5 Test Results	23
6. Emissions in Restricted Frequency Bands (Radiated emission measurements)	36
6.1 Instrument Setting.....	36
6.2 Test setup & procedure	36
6.3 Limit	38
6.4 Test Result.....	39
7. Emission on Band Edge.....	43
7.1 Instrument Setting.....	43
7.2 Test Procedure	43
7.3 Test Results	44

8. AC Power Line Conducted Emission	53
Appendix A: Test equipment list.....	54
Appendix B: Measurement Uncertainty.....	55

Summary of Test Data

Test Requirement	Applicable Rule (Section 15.247)	Result
Minimum 6 dB Bandwidth	15.247(a)(2)	Pass
Maximum Peak Conducted Output Power	15.247(b)(3)	Pass
Power Spectral Density	15.247(e)	Pass
Emissions In Non-Restricted Frequency Bands	15.247(d)	Pass
Emissions In Restricted Frequency Bands (Radiated emission measurements)	15.247(d), 15.205, 15.209	Pass
Emission On The Band Edge	15.247(d), 15.205	Pass
AC Power Line Conducted Emission	15.207	N/A
Antenna Requirement	15.203	Pass

Note: Please note that the test results with statement of conformity, the decision rules which are based on: Safety Testing: the specification, standard or IEC Guide 115.

Other Testing: the specification, standard and not taking into account the measurement uncertainty.

1. General Information

1.1 Identification of the EUT

Product:	Console
Model No.:	RIS-K106
Operating Frequency:	2412 MHz ~ 2462 MHz
Frequency of Each Channel:	2412+5k, k = 0~10, for 802.11b/g/n(HT20) 2422+5k, k = 0~6, for 802.11n(HT40)
Rated Power:	DC 12V
Power Cord:	N/A
Sample receiving date:	2022/01/27
Sample condition:	Workable
Test Date(s):	2022/02/17 ~ 2022/03/28

1.2 Antenna description

Antenna Gain : 3 dBi
Antenna Type : PCB Antenna
Connector Type : I-Pex

1.3 Operation mode

The EUT was supplied with DC 12 V from DC Power Support.

Connected to Notebook via USB Cable, executing "CMD" enter command and open " RF Test Tool APP Ver6.1" to select different frequency and modulation.

With individual verifying, the maximum output power were found out 1 Mbps data rate for 802.11b mode, 6 Mbps data rate for 802.11g mode, 6.5 Mbps data rate for 802.11n(HT20) mode, 13.5 Mbps data rate for 802.11n(HT40) mode the final tests were executed under these conditions recorded in this report individually.

Mode	Channel	Frequency (MHz)	Data rate	Signal on time(ms)	Signal on & off time(ms)	Duty cycle	Duty Cycle factor
802.11b	6	2437	1	8.412	8.448	0.996	0.019
802.11g	6	2437	6	1.380	1.440	0.958	0.185
802.11n(HT20)	6	2437	6.5	1.278	1.341	0.953	0.209
802.11n(HT40)	6	2437	13.5	0.644	0.748	0.861	0.649

1.4 Peripherals equipment

Peripherals	Brand	Model No.	Serial No.	Data cable
Notebook PC	HP	HP ProBook 440 G3	5CD8021S9H	Micro USB Cable 0.8 m
DC Power Supply	Twintex	TP-1603C	N/A	DC power supply Cable 0.8 m

2. Minimum 6 dB Bandwidth


2.1 Instrument Setting

Spectrum Parameter	Setting
Detector	Peak
RBW	100kHz
VBW	$\geq 3 \times \text{RBW}$
Sweep	Auto couple
Trace	Allow the trace to stabilize.
Span	Between two times and five times the occupied bandwidth
Attenuation	Auto

2.2 Test Procedure

Step 1	The transmitter output was connected to the spectrum analyzer.
Step 2	Test was performed accordance with ANSI C63.10.
Step 3	Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

2.3 Test Diagram

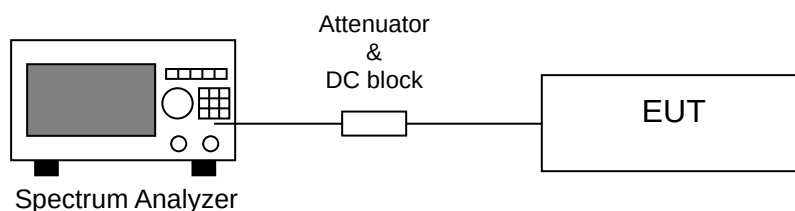

2.4 Limit

The minimum 6 dB bandwidth shall be at least 500 kHz.

2.5 Test Results


Temperature (°C) :	16
Relative Humidity (%) :	62

Mode	Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
802.11b	1	2412	8.57	>0.5	Pass
	6	2437	8.07	>0.5	Pass
	11	2462	8.06	>0.5	Pass
802.11g	1	2412	16.02	>0.5	Pass
	6	2437	14.99	>0.5	Pass
	11	2462	14.11	>0.5	Pass
802.11n(HT20)	1	2412	12.71	>0.5	Pass
	6	2437	15.92	>0.5	Pass
	11	2462	13.81	>0.5	Pass
802.11n(HT40)	3	2422	35.09	>0.5	Pass
	6	2437	35.18	>0.5	Pass
	9	2452	35.35	>0.5	Pass

Chain0 : 6dB Bandwidth @ 802.11b Mode Ch 1




Chain0 : 6dB Bandwidth @ 802.11b Mode Ch 6

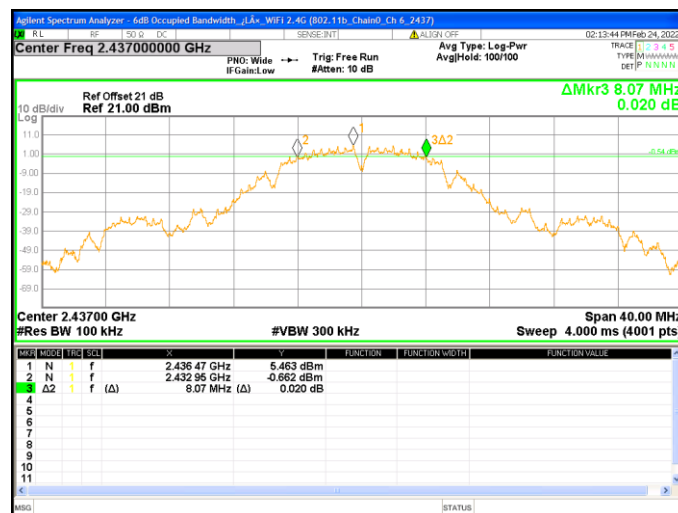

Chain0 : 6dB Bandwidth @ 802.11b Mode Ch11



Chain0 : 6dB Bandwidth @ 802.11g Mode Ch 1

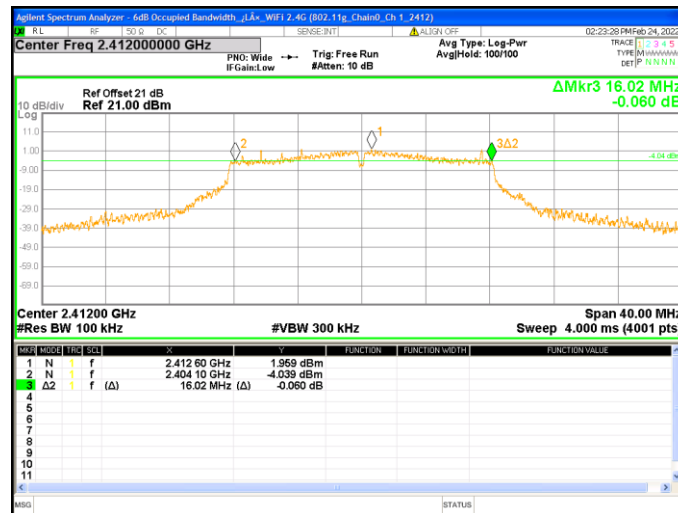

Chain0 : 6dB Bandwidth @ 802.11g Mode Ch 6




Chain0 : 6dB Bandwidth @ 802.11g Mode Ch11



Chain0 : 6dB Bandwidth @ 802.11n(HT20) Mode Ch 1



Chain0 : 6dB Bandwidth @ 802.11n(HT20) Mode Ch 6

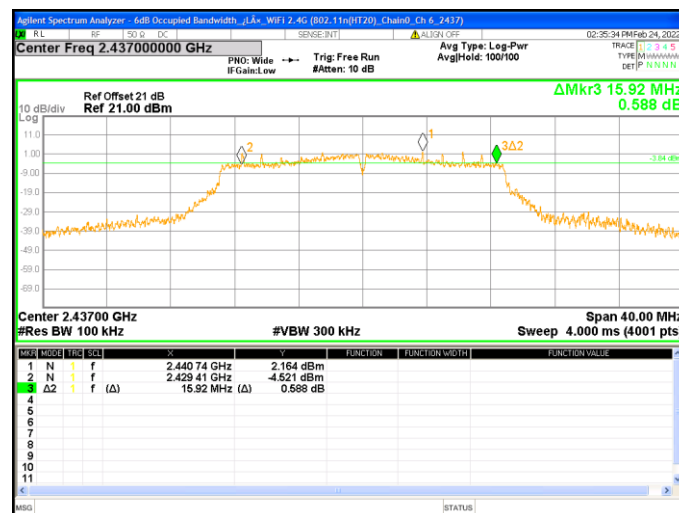


Chain0 : 6dB Bandwidth @ 802.11n(HT20) Mode Ch11




Chain0 : 6dB Bandwidth @ 802.11n(HT40) Mode Ch 3



Chain0 : 6dB Bandwidth @ 802.11n(HT40) Mode Ch 6

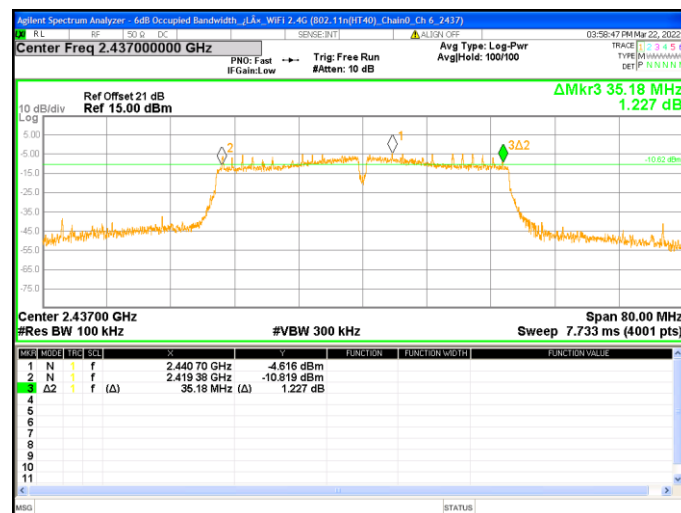

Chain0 : 6dB Bandwidth @ 802.11n(HT40) Mode Ch 9

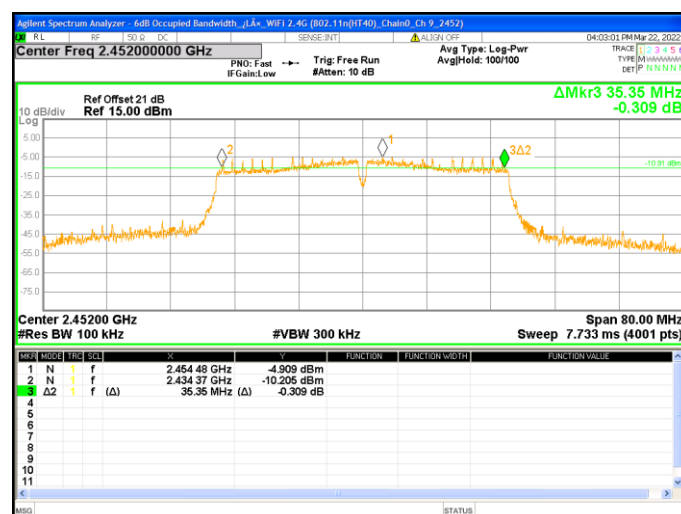

3. Maximum Peak Conducted Output Power


3.1 Instrument Setting

Power Meter Parameter	Setting
Bandwidth	65MHz bandwidth is greater than the EUT emission bandwidth
Detector	Peak & Average

3.2 Test Procedure

The preferred methodology is to use integrated average power measurements, as described in 11.9.2 and 11.13.3 of ANSI C63.10. The peak integrated band power methods of 11.9.1.2 and 11.13.3.2 of ANSI C63.10 are not applicable for FCC compliance testing purposes.

3.3 Test Diagram

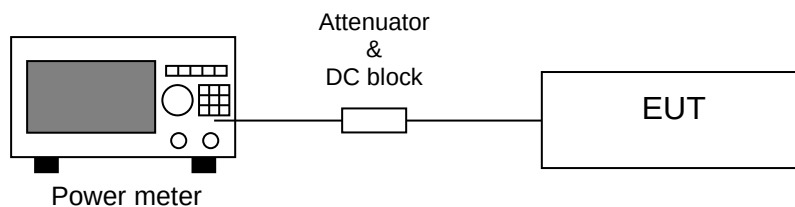

3.4 Limit

For systems using digital modulation in the 2400-2483.5 MHz: 1 Watt (30dBm)

3.5 Test Results

Temperature (°C) :	16
Relative Humidity (%) :	62

Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Output Power [AV] (dBm)	Total Power [AV] (mW)	Maximum power [PK] (dBm)	Maximum power [PK] (mW)	Limit (dBm)	Margin (dB)
802.11b	1	2412	1	15.61	36.39	18.58	72.11	30	-11.42
	6	2437		15.49	35.40	18.50	70.79	30	-11.50
	11	2462		15.79	37.93	18.79	75.68	30	-11.21
802.11g	1	2412	6	14.68	29.38	21.94	156.31	30	-8.06
	6	2437		14.60	28.84	22.37	172.58	30	-7.63
	11	2462		14.79	30.13	22.87	193.64	30	-7.13
802.11n (HT20)	1	2412	6.5	15.21	33.19	22.49	177.42	30	-7.51
	6	2437		15.27	33.65	22.88	194.09	30	-7.12
	11	2462		15.23	33.34	23.04	201.37	30	-6.96
802.11n (HT40)	3	2422	13.5	10.49	11.19	19.25	84.14	30	-10.75
	6	2437		10.60	11.48	19.29	84.92	30	-10.71
	9	2452		10.74	11.86	19.10	81.28	30	-10.90

4. Power Spectral Density


4.1 Instrument Setting

Spectrum Function	Setting
Detector	Peak
RBW	≥ 3 kHz
VBW	$\geq 3 \times$ RBW
Sweep	Auto couple
Trace	Max hold
Span	1.5 times x 6dB bandwidth
Attenuation	Auto

4.2 Test Procedure

Step 1	Test procedure refer to subclause 11.10 of ANSI C63.10.
Step 2	Using the maximum conducted output power in the fundamental emission demonstrates compliance. The EUT must be configured to transmit continuously at full power over the measurement duration.
Step 3	Use the peak marker function to determine the maximum amplitude level within the RBW.

4.3 Test Diagram

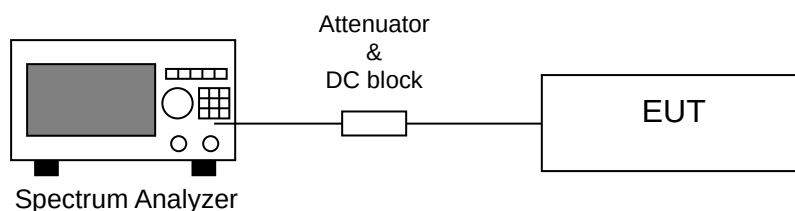

4.4 Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 10 kHz band during any time interval of continuous transmission

4.5 Test Results


Temperature (°C) :	16
Relative Humidity (%) :	62

Channel	Frequency (MHz)	PSD (dBm)	Limit (dBm)	Margin (dB)
1	2412	-2.129	8	-10.129
6	2437	-2.164	8	-10.164
11	2462	-2.638	8	-10.638
1	2412	-4.969	8	-12.969
6	2437	-4.007	8	-12.007
11	2462	-3.447	8	-11.447
1	2412	-3.308	8	-11.308
6	2437	-3.501	8	-11.501
11	2462	-4.185	8	-12.185
3	2422	-10.954	8	-18.954
6	2437	-11.656	8	-19.656
9	2452	-10.323	8	-18.323


Chain0 : Power Spectral Density @ 802.11b Mode Ch 1




Chain0 : Power Spectral Density @ 802.11b Mode Ch 6

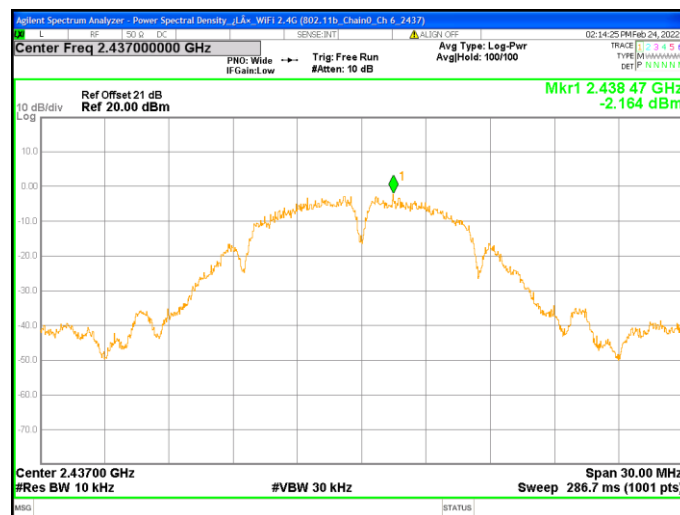


Chain0 : Power Spectral Density @ 802.11b Mode Ch11

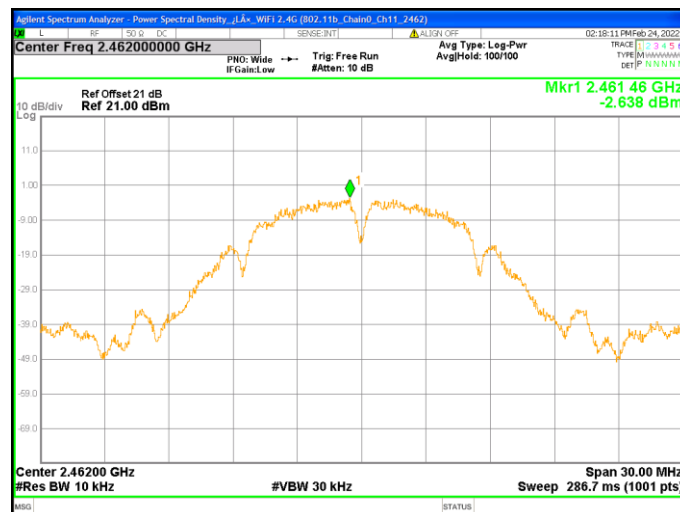


Chain0 : Power Spectral Density @ 802.11g Mode Ch 1

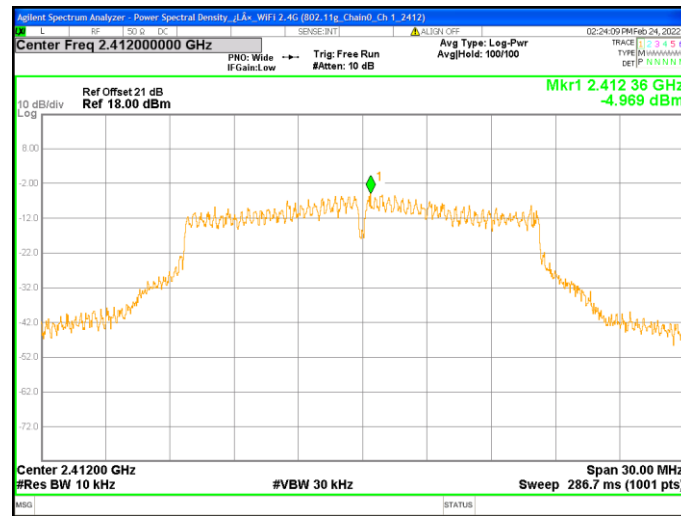


Chain0 : Power Spectral Density @ 802.11g Mode Ch 6

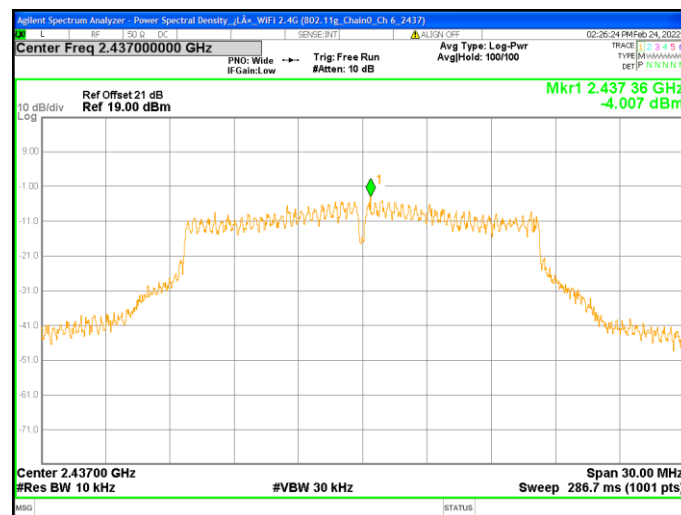


Chain0 : Power Spectral Density @ 802.11g Mode Ch11

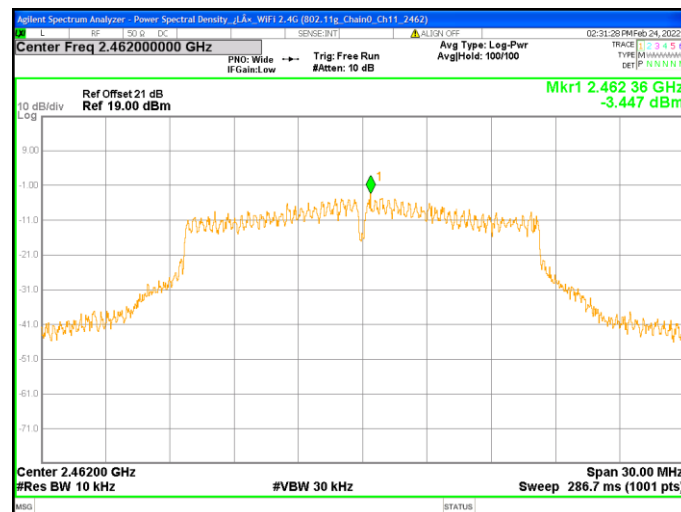


Chain0 : Power Spectral Density @ 802.11n(HT20) Mode Ch 1

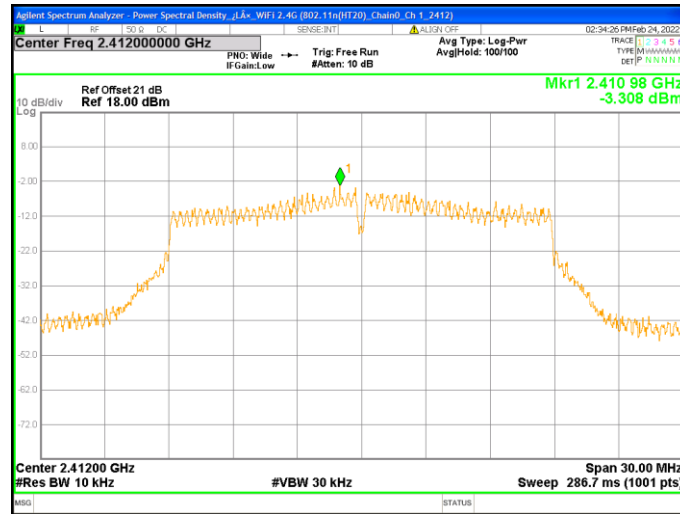


Chain0 : Power Spectral Density @ 802.11n(HT20) Mode Ch 6

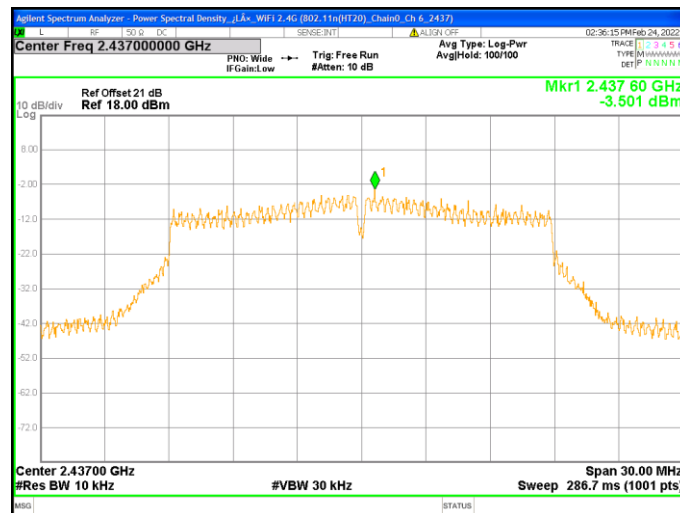


Chain0 : Power Spectral Density @ 802.11n(HT20) Mode Ch11

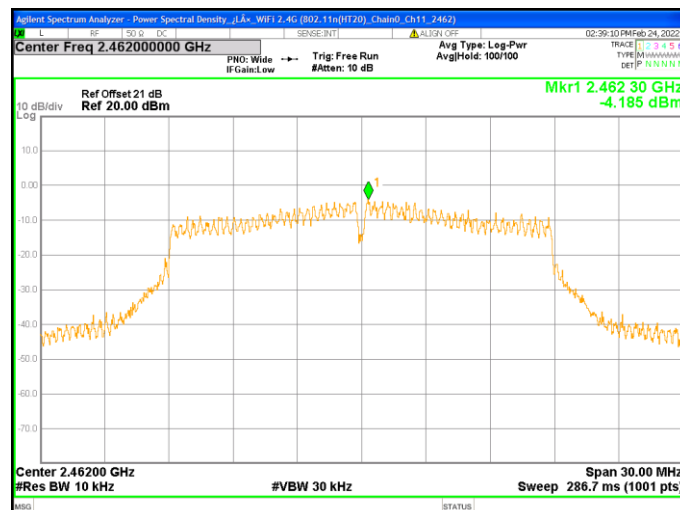


Chain0 : Power Spectral Density @ 802.11n(HT40) Mode Ch 3

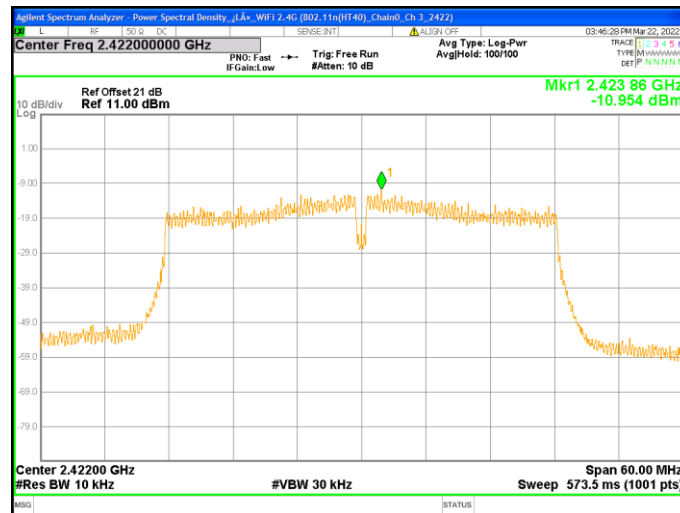

Chain0 : Power Spectral Density @ 802.11n(HT40) Mode Ch 6

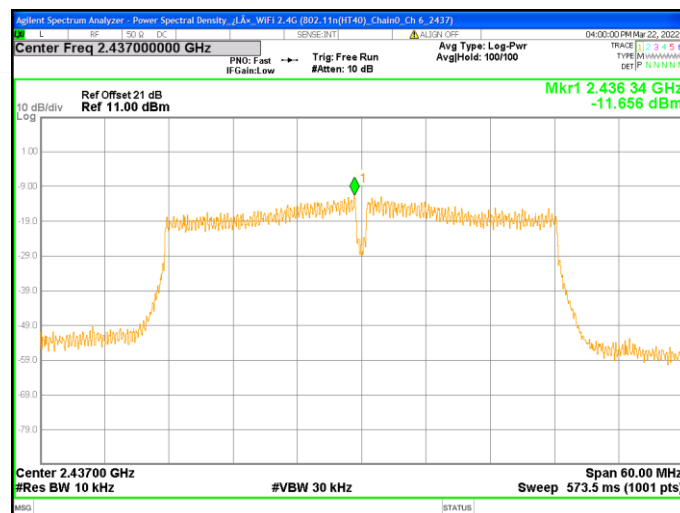

Chain0 : Power Spectral Density @ 802.11n(HT40) Mode Ch 9

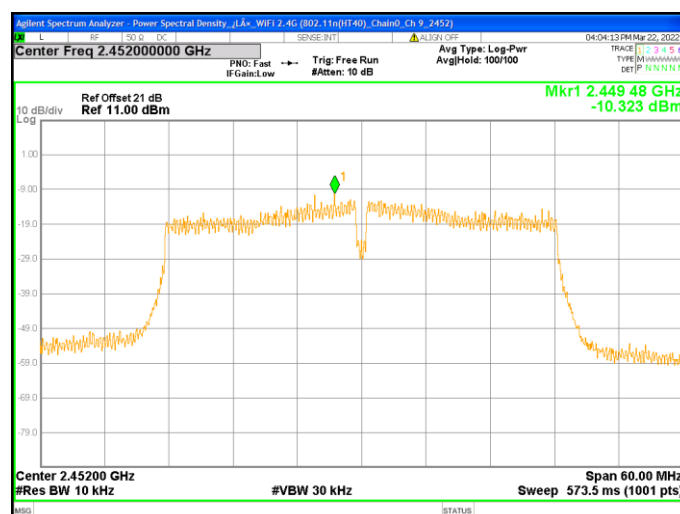

5. Emissions in Non-Restricted Frequency Bands


5.1 Instruments Setting

Spectrum Function	Setting (Reference Level)	Setting (Emission Level)
Detector	Peak	Peak
RBW	≥ 100 kHz	≥ 100 kHz
VBW	$\geq 3 \times$ RBW	$\geq 3 \times$ RBW
Sweep	Auto couple	Auto couple
Trace	Max hold	Max hold
Span	≥ 1.5 time 6dB bandwidth	
Attenuation	Auto	Auto

5.2 Test Procedure

- Step 1 The procedure was used in antenna-port conducted and connected to the spectrum analyzer.
- Step 2 Set instrument center frequency to center frequency.
- Step 3 Use the parameter configured in subclause 11.11 of ANSI C63.10 to measure.
- Step 4 Use the peak marker function to determine the maximum amplitude level.

5.3 Test Diagram

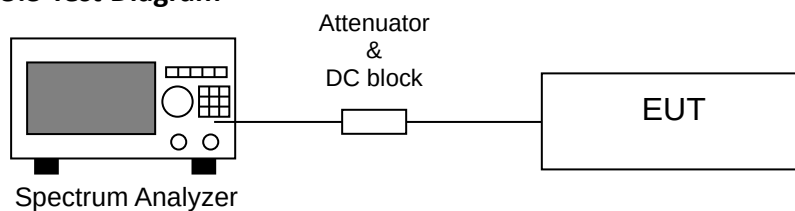


5.4 Limit

The peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz


5.5 Test Results

Temperature (°C) :	16
Relative Humidity (%) :	62


Chain0 : Conducted Spurious @ 802.11b Mode Ch 1

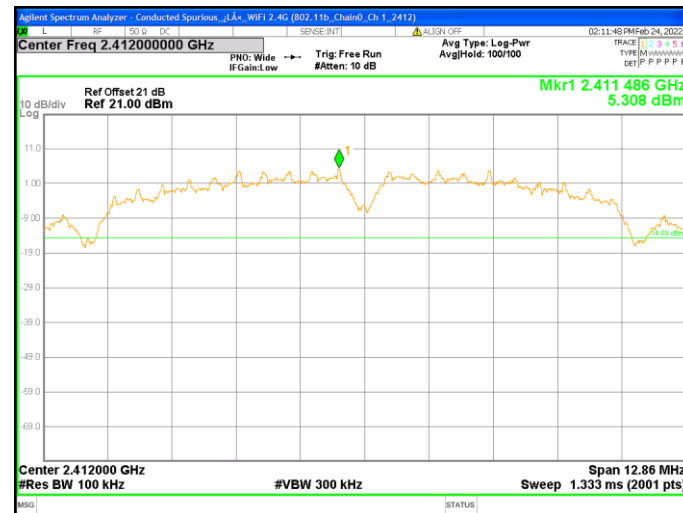


Chain0 : Conducted Spurious @ 802.11b Mode Ch 1

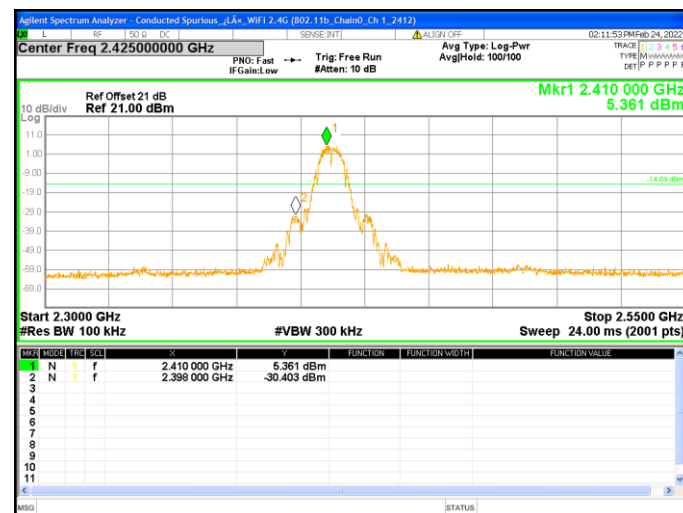


Chain0 : Conducted Spurious @ 802.11b Mode Ch 1

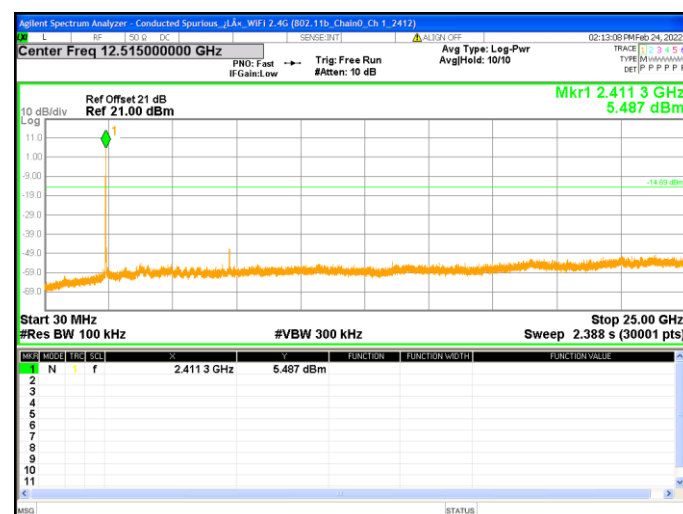


Chain0 : Conducted Spurious @ 802.11b Mode Ch 6

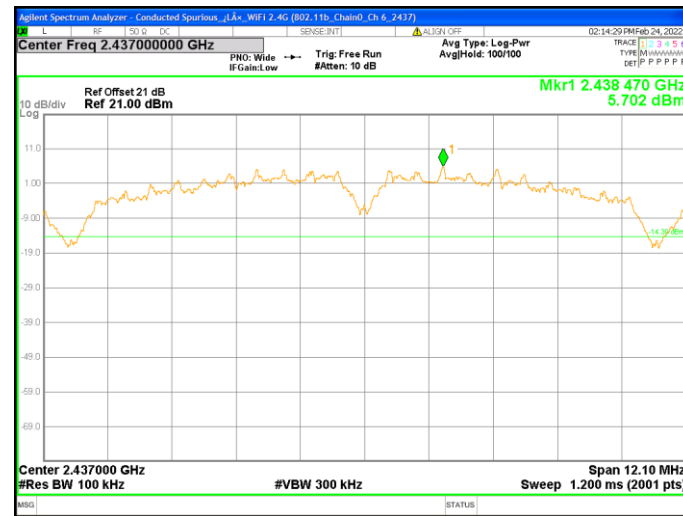


Chain0 : Conducted Spurious @ 802.11b Mode Ch 6

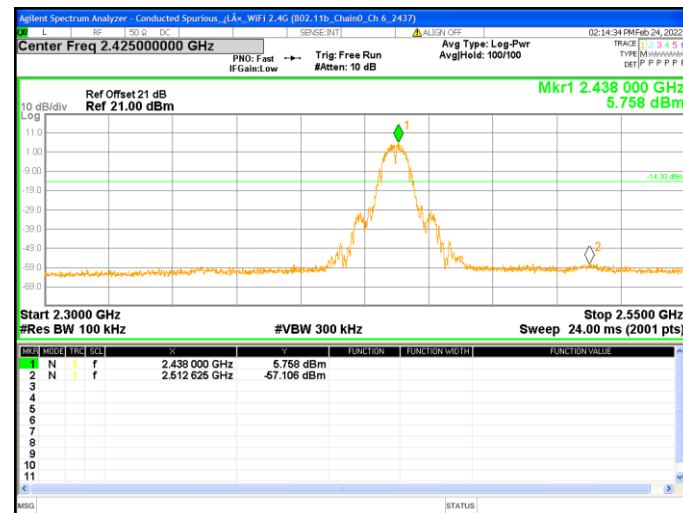


Chain0 : Conducted Spurious @ 802.11b Mode Ch 6

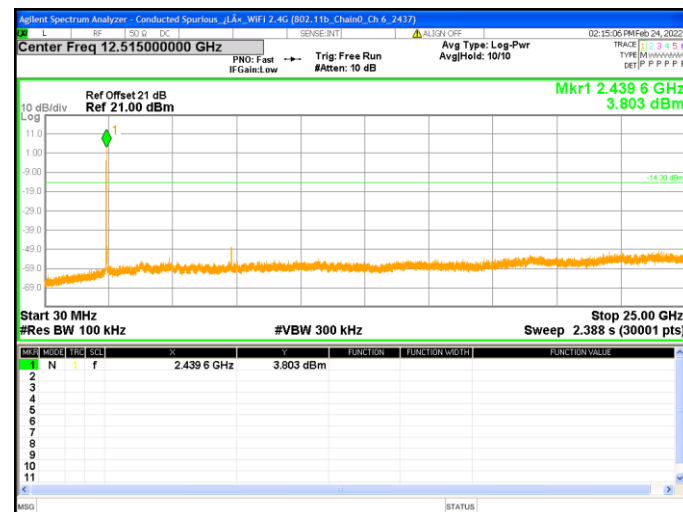


Chain0 : Conducted Spurious @ 802.11b Mode Ch11

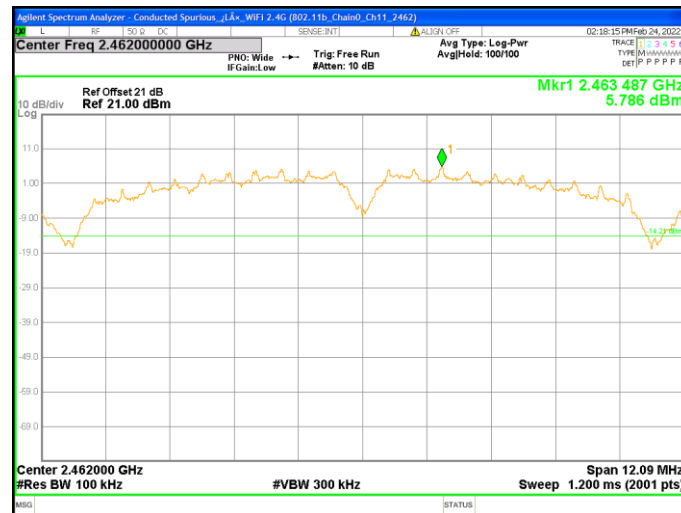


Chain0 : Conducted Spurious @ 802.11b Mode Ch11

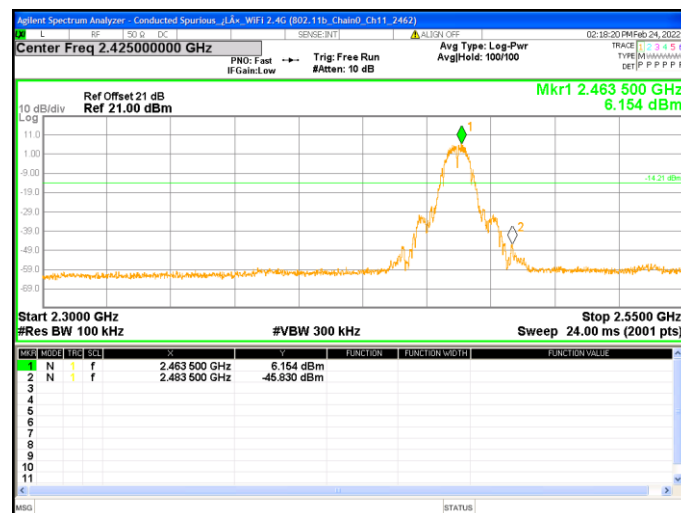


Chain0 : Conducted Spurious @ 802.11b Mode Ch11

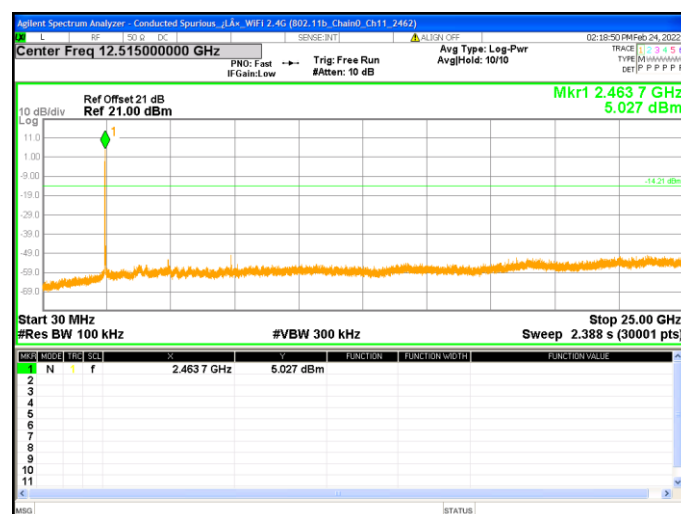


Chain0 : Conducted Spurious @ 802.11g Mode Ch 1

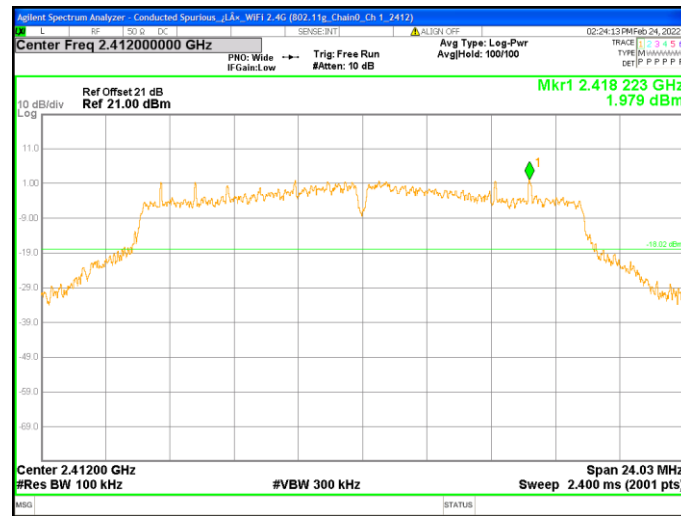


Chain0 : Conducted Spurious @ 802.11g Mode Ch 1

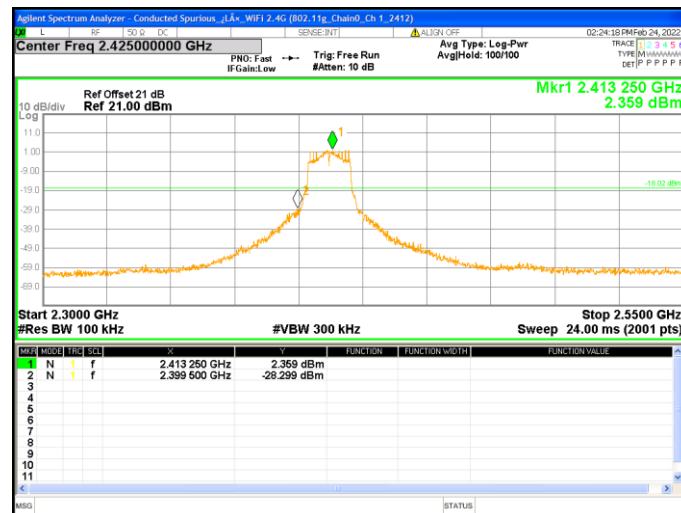


Chain0 : Conducted Spurious @ 802.11g Mode Ch 1

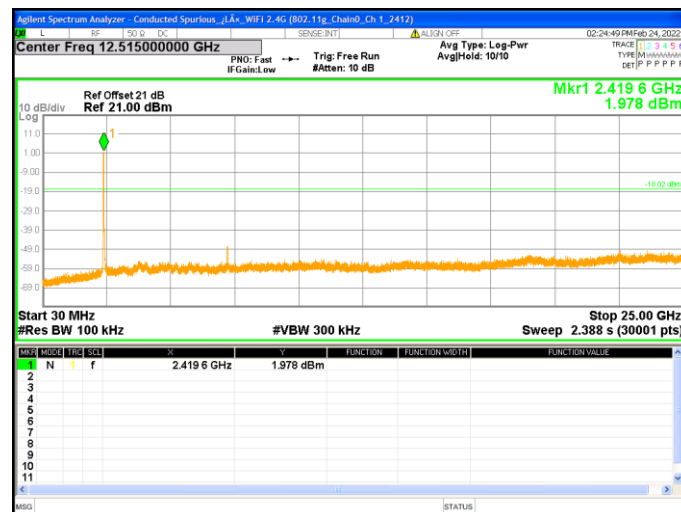


Chain0 : Conducted Spurious @ 802.11g Mode Ch 6

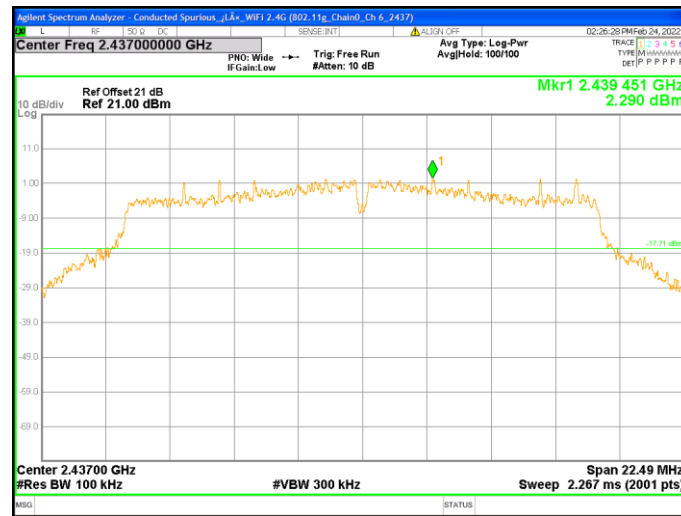


Chain0 : Conducted Spurious @ 802.11g Mode Ch 6

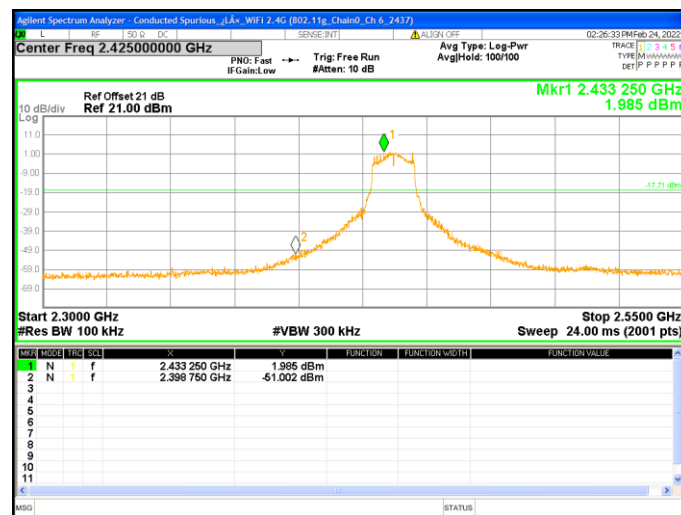


Chain0 : Conducted Spurious @ 802.11g Mode Ch 6

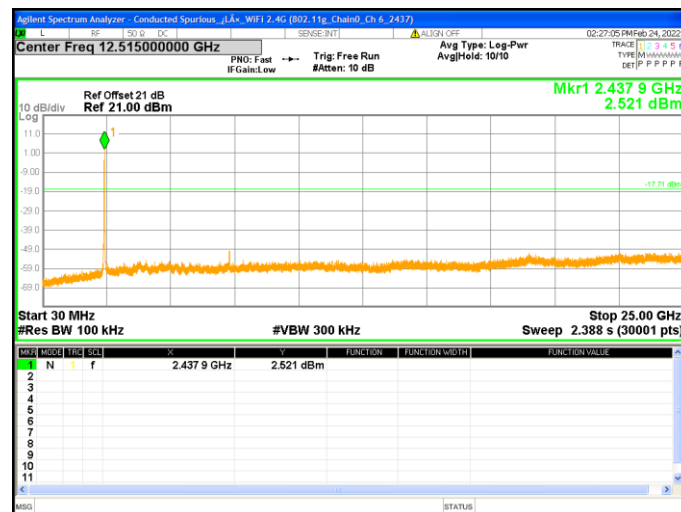


Chain0 : Conducted Spurious @ 802.11g Mode Ch11

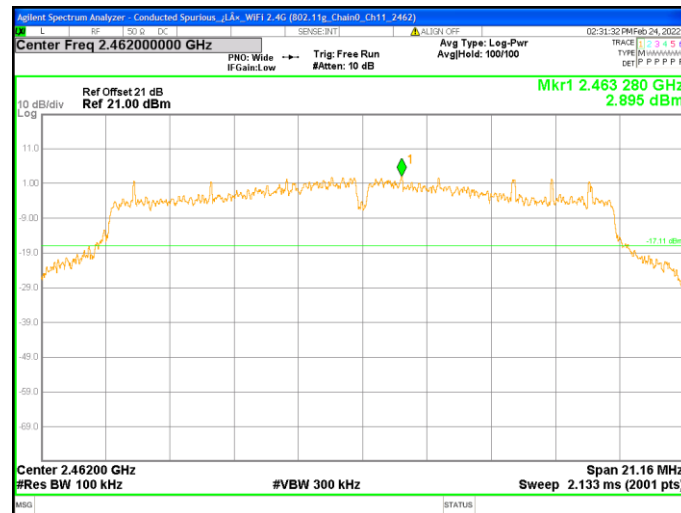


Chain0 : Conducted Spurious @ 802.11g Mode Ch11

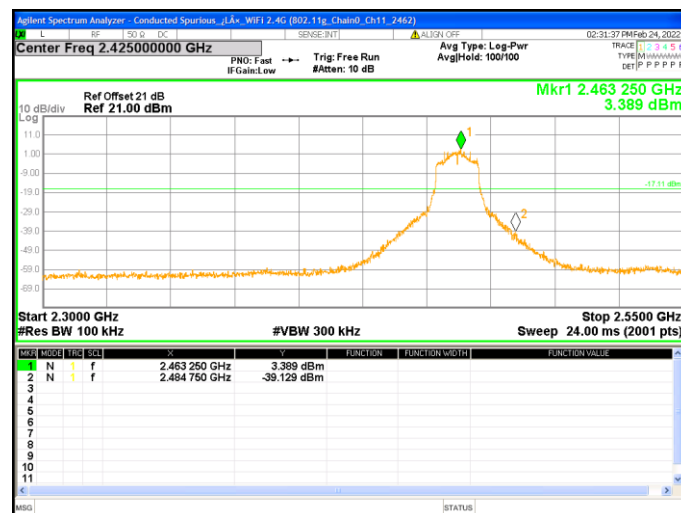


Chain0 : Conducted Spurious @ 802.11g Mode Ch11

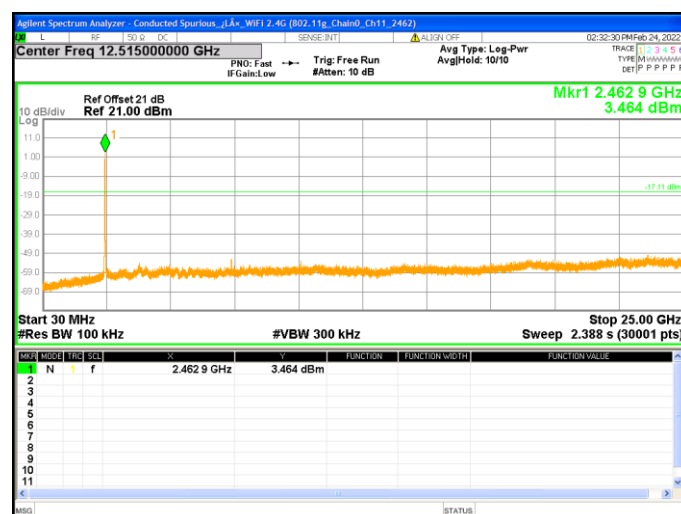


Chain0 : Conducted Spurious @ 802.11n(HT20) Mode Ch 1

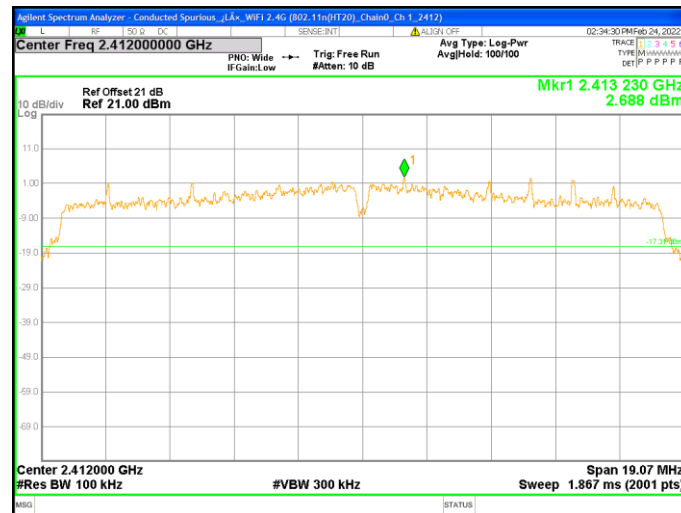


Chain0 : Conducted Spurious @ 802.11n(HT20) Mode Ch 1

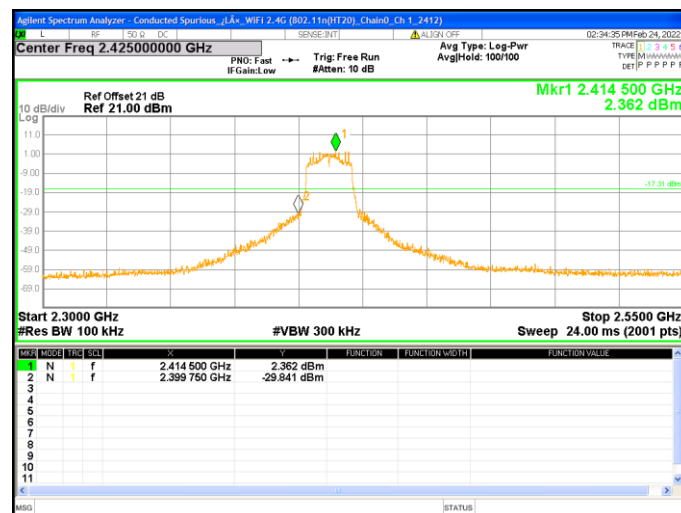


Chain0 : Conducted Spurious @ 802.11n(HT20) Mode Ch 1

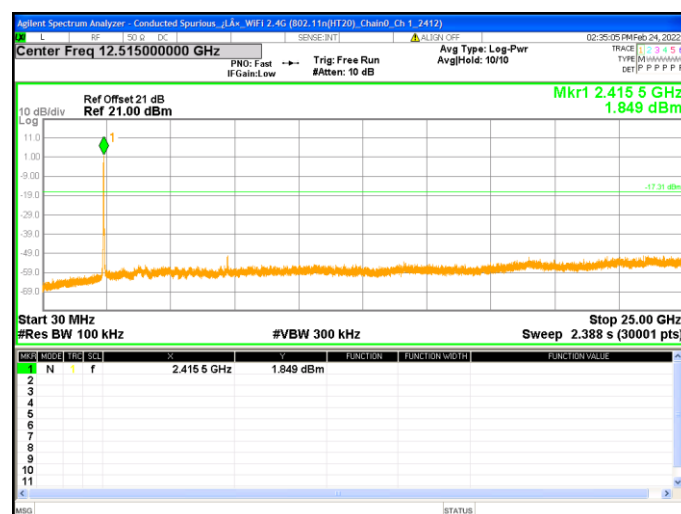


Chain0 : Conducted Spurious @ 802.11n(HT20) Mode Ch 6

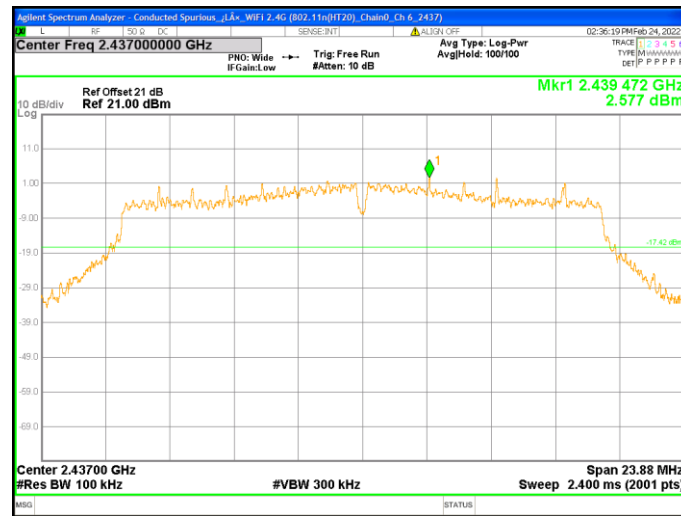


Chain0 : Conducted Spurious @ 802.11n(HT20) Mode Ch 6

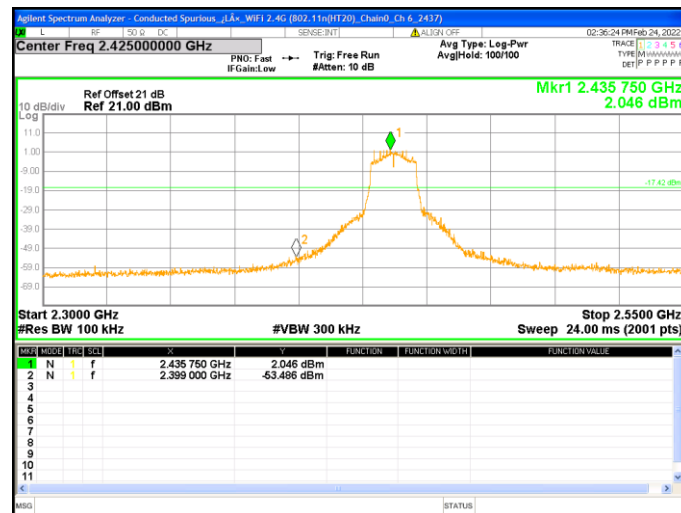


Chain0 : Conducted Spurious @ 802.11n(HT20) Mode Ch 6

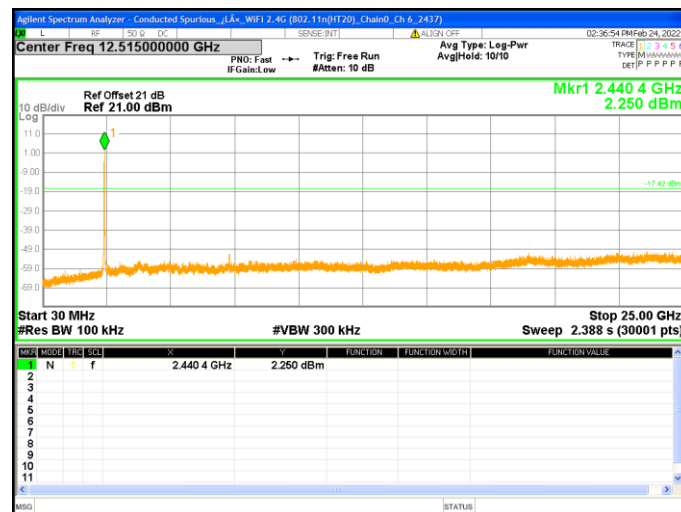


Chain0 : Conducted Spurious @ 802.11n(HT20) Mode Ch11

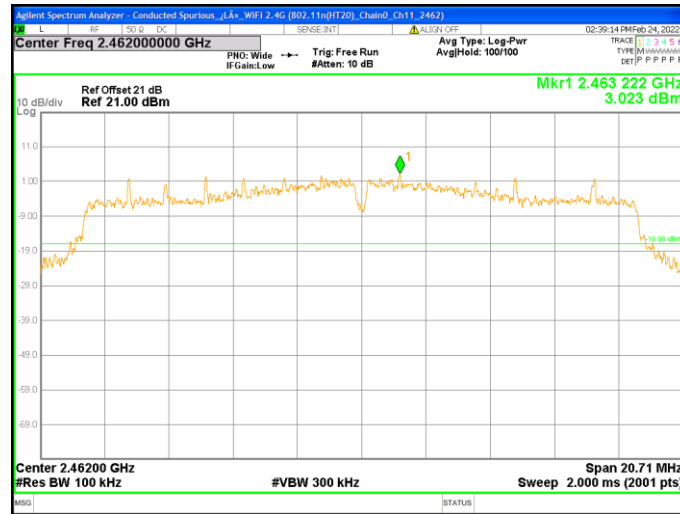


Chain0 : Conducted Spurious @ 802.11n(HT20) Mode Ch11

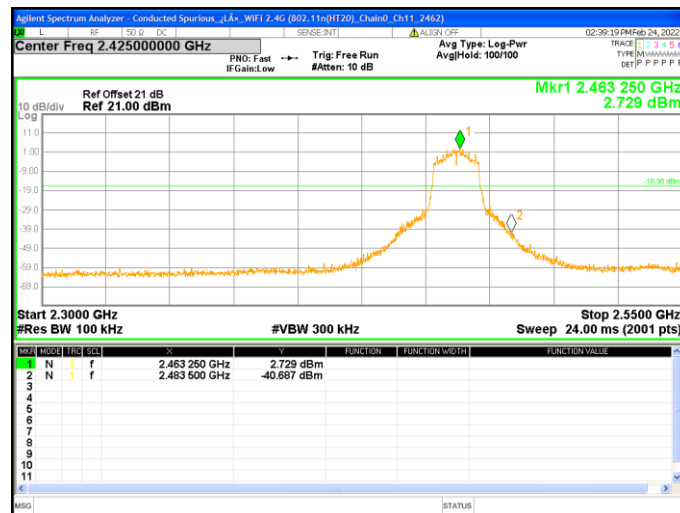


Chain0 : Conducted Spurious @ 802.11n(HT20) Mode Ch11

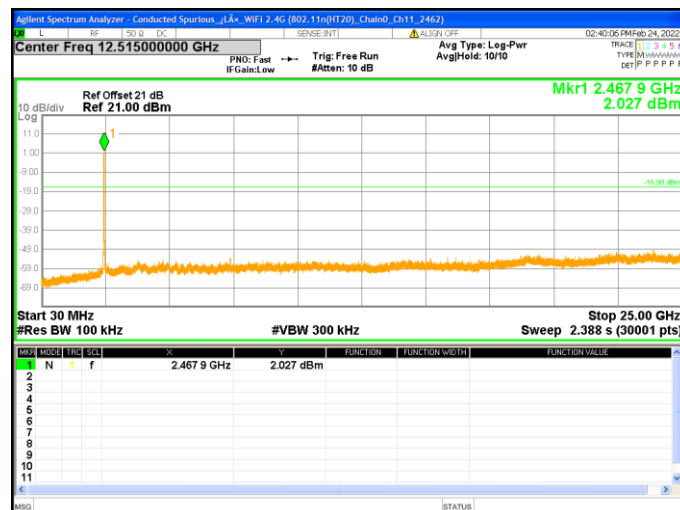


Chain0 : Conducted Spurious @ 802.11n(HT40) Mode Ch 3

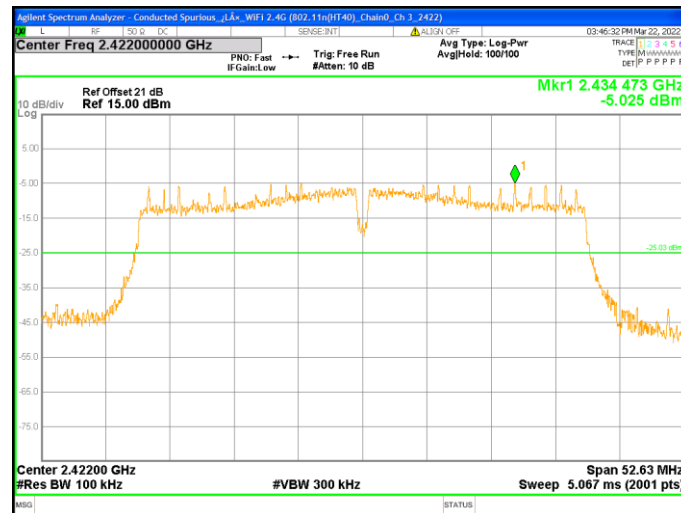


Chain0 : Conducted Spurious @ 802.11n(HT40) Mode Ch 3

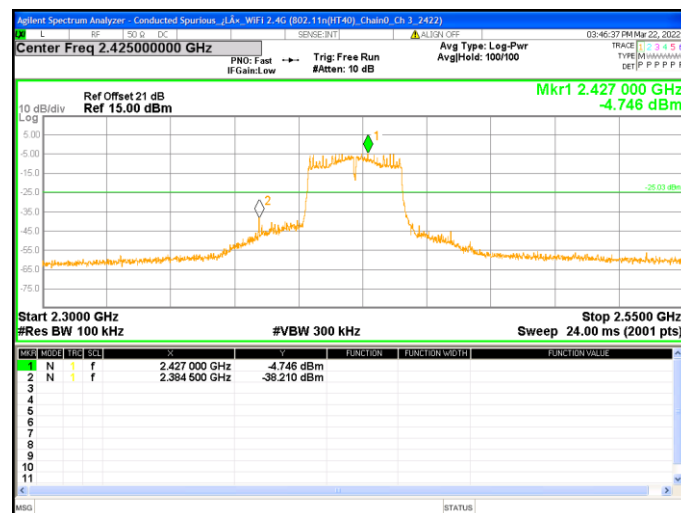


Chain0 : Conducted Spurious @ 802.11n(HT40) Mode Ch 3

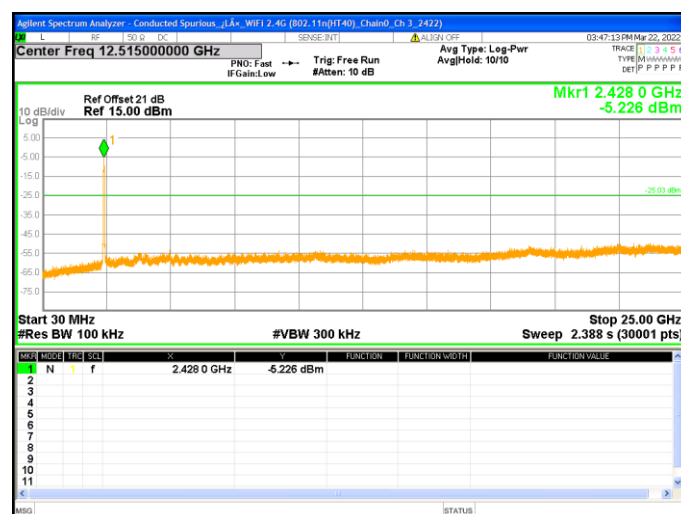


Chain0 : Conducted Spurious @ 802.11n(HT40) Mode Ch 6

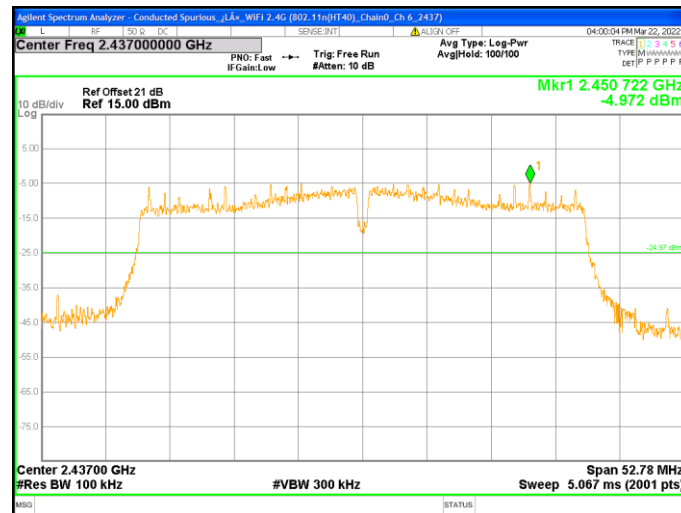


Chain0 : Conducted Spurious @ 802.11n(HT40) Mode Ch 6

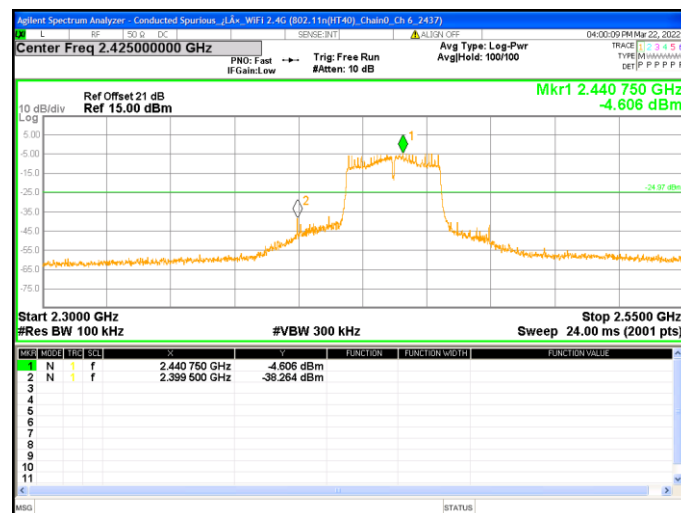


Chain0 : Conducted Spurious @ 802.11n(HT40) Mode Ch 6

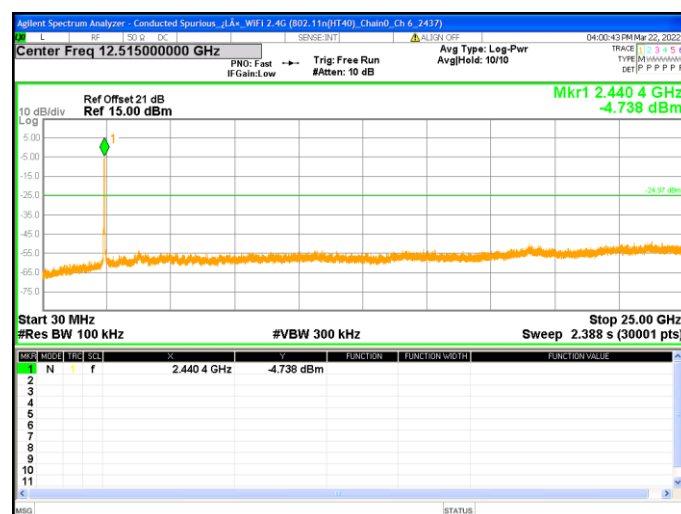


Chain0 : Conducted Spurious @ 802.11n(HT40) Mode Ch 9

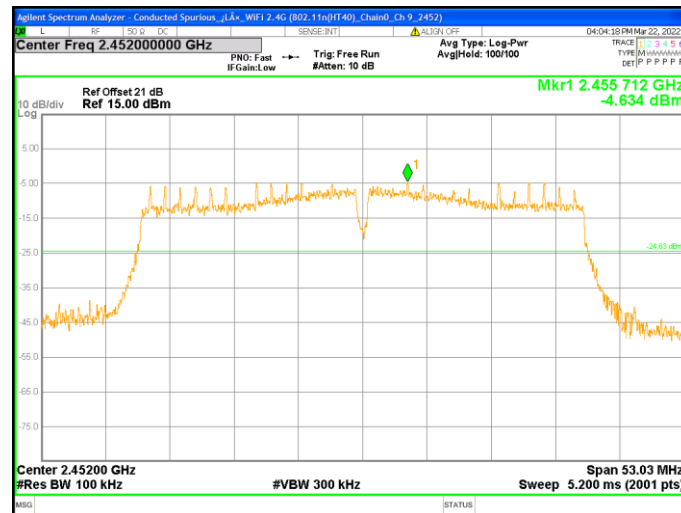

Chain0 : Conducted Spurious @ 802.11n(HT40) Mode Ch 9

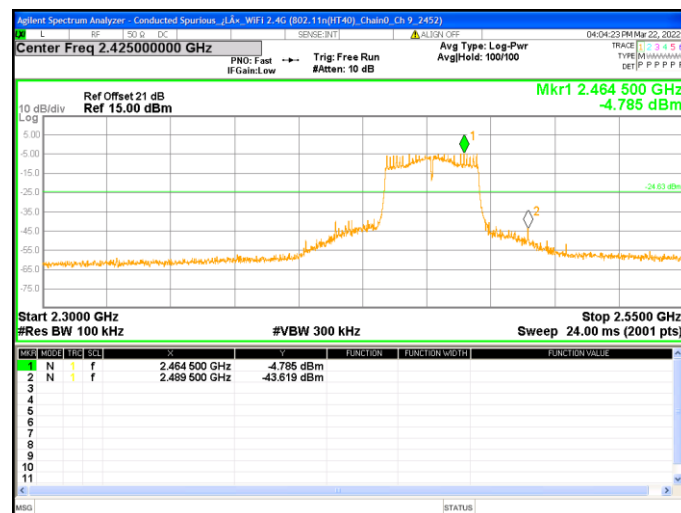

Chain0 : Conducted Spurious @ 802.11n(HT40) Mode Ch 9

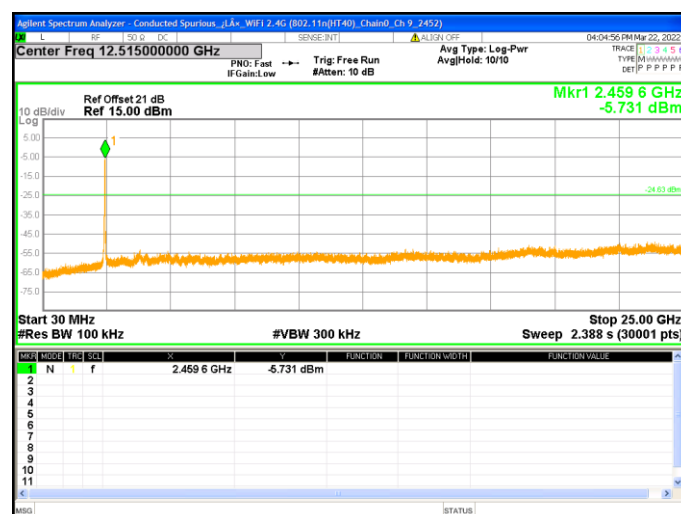


6. Emissions in Restricted Frequency Bands (Radiated emission measurements)

6.1 Instrument Setting


Receiver Function	Setting (Below 1GHz)	Setting (Above 1GHz)
Detector	QP	Peak and Average
RBW	9-150 kHz ; 200-300 Hz 0.15-30 MHz; 9-10 kHz 30-1000 MHz; 100-120 kHz	1MHz
VBW	$\geq 3 \times \text{RBW}$	3MHz & 1/T minimum kHz
Sweep	Auto couple	Auto couple
Start Frequency	9 kHz	1GHz
Stop Frequency	1 GHz	Tenth harmonic
Attenuation	Auto	Auto

6.2 Test setup & procedure


Radiated emission from 9kHz to 30MHz uses Loop Antenna:

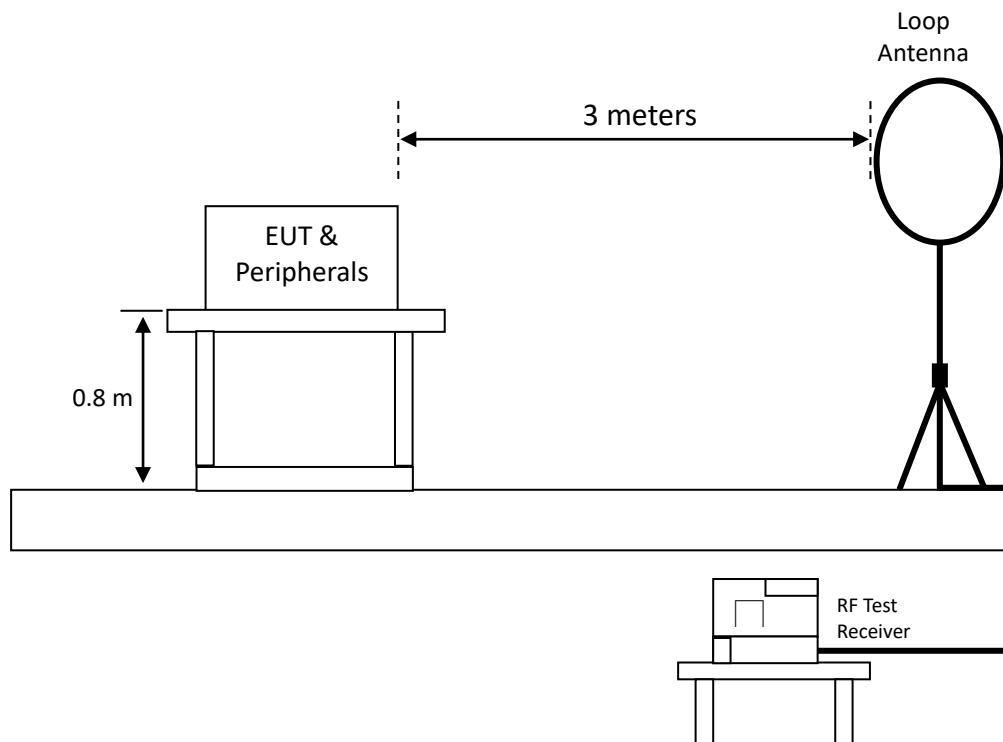

Radiated emission below 1GHz using Bilog Antenna

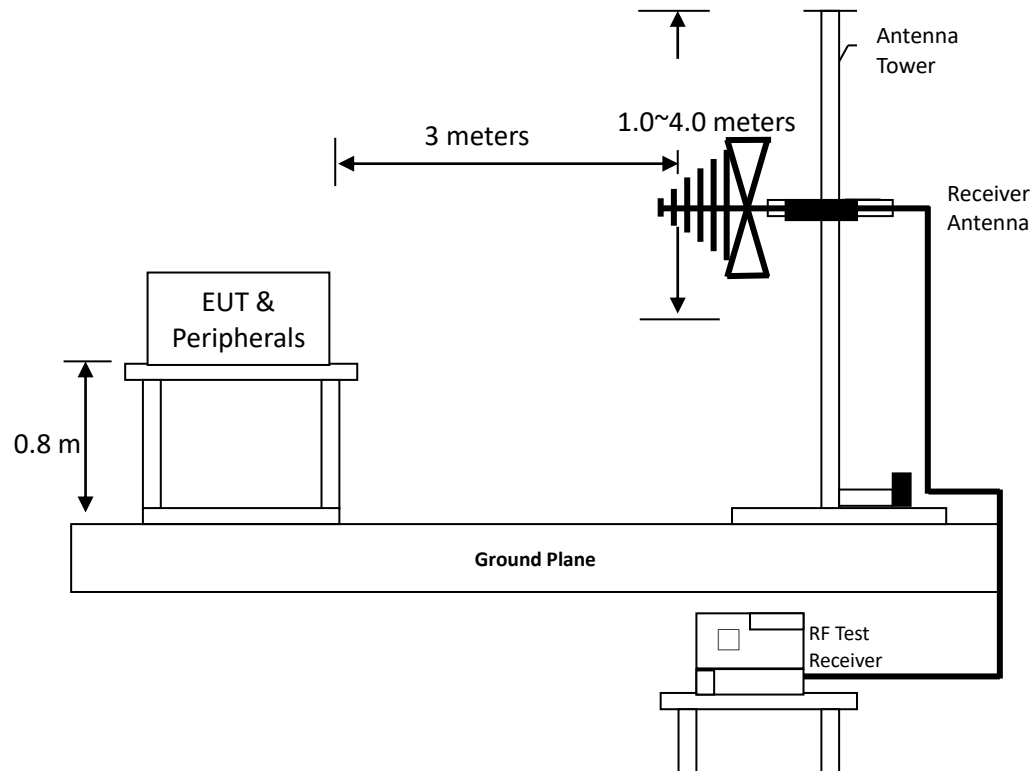

Radiated emission above 1GHz using Horn Antenna

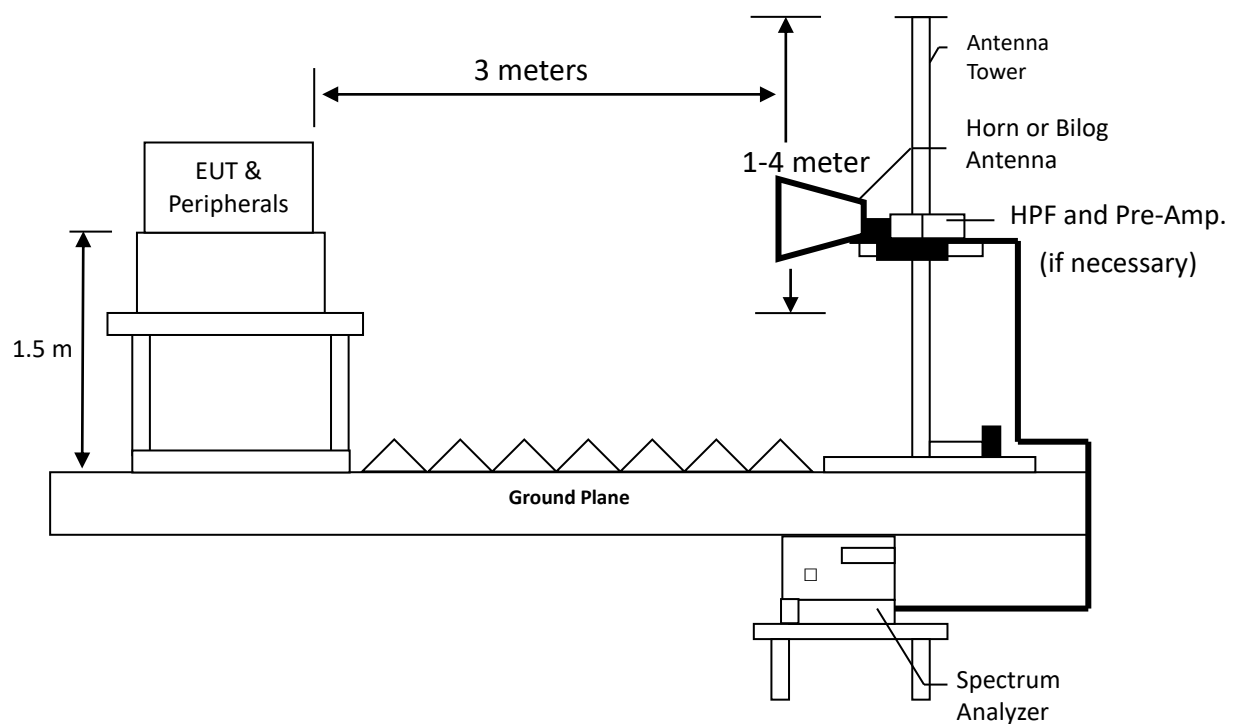

TEST REPORT

Radiated emissions were investigated cover the frequency range from 30MHz to 1000MHz using a receiver RBW of 120kHz record QP reading, and the frequency over 1GHz using a spectrum analyzer RBW of 1MHz and 1/T minimum kHz VBW record Average reading. (15.209 paragraph), the Peak reading (1 MHz RBW/ 3 MHz VBW) recorded also on the report.

The EUT for testing is arranged on a turntable. If some peripherals apply to the EUT, the peripherals will be connected to EUT and the whole system. During the test, all cables were arranged to produce worst-case emissions. The signal is maximized through rotation. The height of antenna and polarization is changing constantly for exploring for maximum signal level. The height of antenna can be up to 4 meters and down to 1 meter.

The measurement for radiated emission will be done at the distance of three meters unless the signal level is too low to measure at that distance. In the case of the reading under noise floor, a pre-amplifier is used and/or the test is conducted at a closer distance. And then all readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance.

6.3 Limit

Frequency(MHz)	Field Strength(uV/m)	Measurement distance(m)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark:

1. In the above table, the tighter limit applies at the band edges.
2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system

6.4 Test Result

6.4.1 Measurement results: frequencies 9kHz to 30MHz

Temperature (°C) :	23
Relative Humidity (%) :	62

The test was performed on EUT under continuously transmitting mode. The worst case occurred at 802.11g Channel 1.

Antenna Polarity	Frequency (MHz)	Detector	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
Perpendicular	0.159	AV	18.32	53.22	71.54	103.63	-32.09
Perpendicular	0.399	AV	18.65	43.28	61.93	95.59	-33.66
Perpendicular	0.609	QP	19.02	37.89	56.91	71.93	-15.02
Perpendicular	0.909	QP	19.31	31.83	51.14	68.49	-17.35
Perpendicular	1.209	QP	19.29	30.9	50.19	65.96	-15.77
Perpendicular	1.808	QP	19.26	26.54	45.80	69.54	-23.74

Antenna Polarity	Frequency (MHz)	Detector	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
Parallel	0.009	AV	18.11	52.63	70.74	128.52	-57.78
Parallel	0.219	AV	18.46	46.78	65.24	100.85	-35.61
Parallel	0.399	AV	18.65	41.71	60.36	95.59	-35.23
Parallel	0.549	QP	19.01	36.06	55.07	72.86	-17.79
Parallel	0.699	QP	19.15	30.28	49.43	70.81	-21.38
Parallel	1.209	QP	19.29	25.17	44.46	65.96	-21.50

Antenna Polarity	Frequency (MHz)	Detector	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
Ground-parallel	0.069	AV	18.88	51.38	70.26	114.73	-44.47
Ground-parallel	0.219	AV	18.46	47.63	66.09	100.85	-34.76
Ground-parallel	0.399	AV	18.65	41.31	59.96	95.59	-35.63
Ground-parallel	0.549	QP	19.01	35.34	54.35	72.86	-18.51
Ground-parallel	0.699	QP	19.15	31.26	50.41	70.81	-20.40
Ground-parallel	1.209	QP	19.29	22.91	42.20	65.96	-23.76

Remark: Corr. Factor = Antenna Factor + Cable Loss

6.5.2 Measurement results: frequencies below 1 GHz

Temperature (°C) :	26
Relative Humidity (%) :	55

The test was performed on EUT under continuously transmitting mode. The worst case occurred at 802.11g Channel 1.

Antenna Polarity (H/V)	Frequency (MHz)	Spectrum Analyzer Detector	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
Horizontal	110.51	QP	17.03	14.65	31.68	43.50	-11.82
Horizontal	150.28	QP	20.48	8.34	28.82	43.50	-14.68
Horizontal	225.94	QP	17.92	13.68	31.60	46.00	-14.40
Horizontal	301.60	QP	21.6	13.11	34.71	46.00	-11.29
Horizontal	377.26	QP	23.78	9.17	32.95	46.00	-13.05
Horizontal	527.61	QP	27.1	10.11	37.21	46.00	-8.79

Antenna Polarity (H/V)	Frequency (MHz)	Spectrum Analyzer Detector	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
Vertical	37.76	QP	19.3	7.51	26.81	40.00	-13.19
Vertical	136.70	QP	19.54	9.28	28.82	43.50	-14.68
Vertical	150.28	QP	20.48	11.32	31.80	43.50	-11.70
Vertical	225.94	QP	17.92	15.12	33.04	46.00	-12.96
Vertical	377.26	QP	23.78	13.19	36.97	46.00	-9.03
Vertical	452.92	QP	25.83	8.82	34.65	46.00	-11.35

Remark: Corr. Factor = Antenna Factor + Cable Loss

6.5.3 Measurement results: frequency above 1GHz to 25GHz

Temperature (°C) :	21
Relative Humidity (%) :	64

Mode	Frequency (MHz)	Spectrum Spectrum Spectrum	Ant. Pol. (H/V)	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
802.11b_Ch1	4824	PK	H	-5.54	49.97	44.43	74	-29.57
	7236	PK	H	3.41	46.36	49.77	74	-24.23
	4824	PK	V	-5.54	47.61	42.07	74	-31.93
	7236	PK	V	3.41	49.85	53.26	74	-20.74
	7236	AV	V	3.41	49.20	52.61	54	-1.39
802.11b_Ch6	4875	PK	H	-5.22	51.61	46.39	74	-27.61
	7311	PK	H	3.51	47.24	50.75	74	-23.25
	4874	PK	V	-5.23	50.32	45.09	74	-28.91
	7311	PK	V	3.51	48.64	52.15	74	-21.85
	7311	AV	V	3.51	48.40	51.91	54	-2.09
802.11b_Ch11	4924	PK	H	-5.10	47.86	42.76	74	-31.24
	7386	PK	H	3.34	47.11	50.45	74	-23.55
	4924	PK	V	-5.10	46.06	40.96	74	-33.04
	7386	PK	V	3.34	46.95	50.29	74	-23.71
802.11g_Ch1	4824	PK	H	-5.54	46.96	41.42	74	-32.58
	7236	PK	H	3.41	51.75	55.16	74	-18.84
	7236	AV	H	3.41	42.88	46.29	54	-7.71
	4824	PK	V	-5.54	45.51	39.97	74	-34.03
	7236	PK	V	3.41	50.77	54.18	74	-19.82
	7236	AV	V	3.41	41.35	44.76	54	-9.24
802.11g_Ch6	4874	PK	H	-5.23	47.03	41.80	74	-32.20
	7311	PK	H	3.51	48.80	52.31	74	-21.69
	7311	AV	H	3.51	41.10	44.61	54	-9.39
	4874	PK	V	-5.23	46.19	40.96	74	-33.04
	7311	PK	V	3.51	49.97	53.48	74	-20.52
	7311	AV	V	3.51	42.22	45.73	54	-8.27
802.11g_Ch11	4924	PK	H	-5.10	45.04	39.94	74	-34.06
	7386	PK	H	3.34	46.18	49.52	74	-24.48
	4924	PK	V	-5.10	43.47	38.37	74	-35.63
	7386	PK	V	3.34	46.32	49.66	74	-24.34

Remark: Correction Factor = Antenna Factor + Cable Loss + High Pass Filter Loss - Pre_Amplifier Gain

Mode	Frequency (MHz)	Spectrum Spectrum Spectrum	Ant. Pol. (H/V)	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
802.11n(HT20)_Ch1	4824	PK	H	-5.54	45.39	39.85	74	-34.15
	7236	PK	H	3.41	51.07	54.48	74	-19.52
	7236	AV	H	3.41	44.26	47.67	54	-6.33
	4824	PK	V	-5.54	43.84	38.30	74	-35.70
	7236	PK	V	3.41	49.00	52.41	74	-21.59
	7236	AV	V	3.41	41.81	45.22	54	-8.78
802.11n(HT20)_Ch6	4874	PK	H	-5.23	47.56	42.33	74	-31.67
	7311	PK	H	3.51	56.49	60.00	74	-14.00
	7311	AV	H	3.51	46.42	49.93	54	-4.07
	4874	PK	V	-5.23	44.42	39.19	74	-34.81
	7311	PK	V	3.51	48.61	52.12	74	-21.88
	7311	AV	V	3.51	41.13	44.64	54	-9.36
802.11n(HT20)_Ch11	4924	PK	H	-5.10	45.33	40.23	74	-33.77
	7386	AV	H	3.34	41.83	45.17	54	-8.83
	7386	PK	H	3.34	48.57	51.91	74	-22.09
	4924	PK	V	-5.10	44.89	39.79	74	-34.21
	7386	PK	V	3.34	47.84	51.18	74	-22.82
	7386	AV	V	3.34	40.05	43.39	54	-10.61
802.11n(HT40)_Ch3	4844	PK	H	-5.41	45.08	39.67	74	-34.33
	7266	PK	H	3.46	49.22	52.68	74	-21.32
	7266	AV	H	3.46	41.27	44.73	54	-9.27
	4844	PK	V	-5.41	45.46	40.05	74	-33.95
	7266	PK	V	3.46	47.14	50.60	74	-23.40
	7266	AV	V	3.46	38.83	42.29	54	-11.71
802.11n(HT40)_Ch6	4874	PK	H	-5.23	46.42	41.19	74	-32.81
	7311	PK	H	3.51	49.39	52.90	74	-21.10
	7311	AV	H	3.51	42.57	46.08	54	-7.92
	4874	PK	V	-5.23	45.50	40.27	74	-33.73
	7311	PK	V	3.51	46.40	49.91	74	-24.09
802.11n(HT40)_Ch9	4904	PK	H	-5.07	45.00	39.93	74	-34.07
	7356	PK	H	3.47	44.99	48.46	74	-25.54
	4904	PK	V	-5.07	44.72	39.65	74	-34.35
	7356	PK	V	3.47	43.75	47.22	74	-26.78

Remark: Correction Factor = Antenna Factor + Cable Loss + High Pass Filter Loss - Pre_Amplifier Gain

7. Emission on Band Edge

7.1 Instrument Setting

Spectrum Function	Setting
Detector	Peak and Average
RBW	1MHz
VBW	3MHz & 1/T minimum kHz
Sweep	Auto couple
Restrict bands	2310 MHz ~ 2390 MHz 2483.5 MHz ~ 2500 MHz
Attenuation	Auto

7.2 Test Procedure

The test procedure is the same as Emissions in Restricted Frequency Bands (Radiated emission measurements).


7.3 Test Results

Temperature (°C) :	19
Relative Humidity (%) :	64


Mode	Frequency (MHz)	Spectrum Analyzer Detector	Ant. Pol. (H/V)	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)	Restricted band (MHz)
802.11b	2390	PK	H	34.25	20.17	54.42	74	-19.58	2310~2390
	2390	AV	H	34.25	10.86	45.11	54	-8.89	
	2483.5	PK	H	34.58	20.69	55.27	74	-18.73	2483.5~2500
	2483.5	AV	H	34.58	16.16	50.74	54	-3.26	
802.11g	2387.33	PK	H	34.26	34.29	68.55	74	-5.45	2310~2390
	2390	AV	H	34.25	18.49	52.74	54	-1.26	
	2483.5	PK	H	34.58	32.58	67.16	74	-6.84	2483.5~2500
	2483.5	AV	H	34.58	16.45	51.03	54	-2.97	
802.11n (HT20)	2390	PK	H	34.25	27.13	61.38	74	-12.62	2310~2390
	2390	AV	H	34.25	16.05	50.30	54	-3.70	
	2484.61	PK	H	34.59	24.72	59.31	74	-14.69	2483.5~2500
	2483.5	AV	H	34.58	12.56	47.14	54	-6.86	
802.11n (HT40)	2388.85	PK	H	34.26	22.96	57.22	74	-16.78	2310~2390
	2390	AV	H	34.25	18.11	52.36	54	-1.64	
	2485.56	PK	H	34.59	22.53	57.12	74	-16.88	2483.5~2500
	2484.61	AV	H	34.59	11.12	45.71	54	-8.29	

Remark: Correction Factor = Antenna Factor + Cable Loss


Chain0 : Restricted Band Bandedge @ 802.11b Mode Ch1 PK

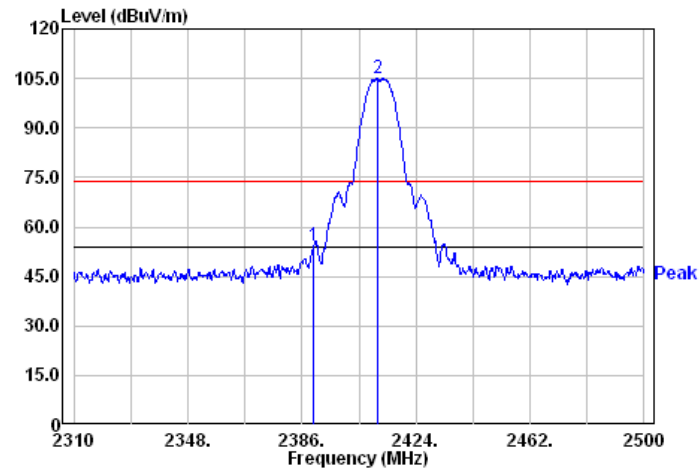


Chain0 : Restricted Band Bandedge @ 802.11b Mode Ch1 AV

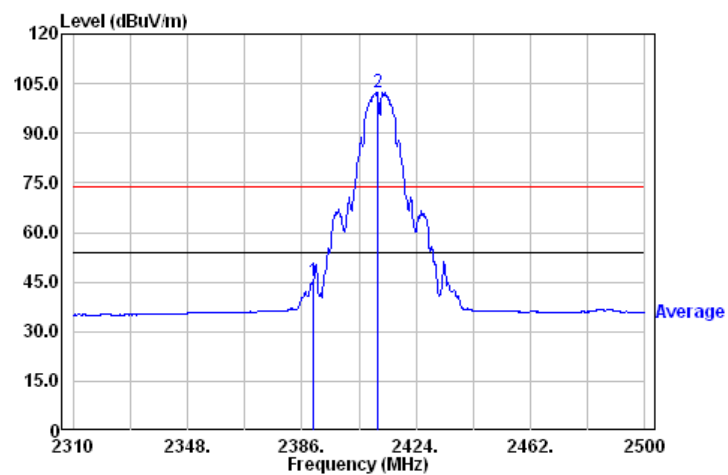


Chain0 : Restricted Band Bandedge @ 802.11b Mode Ch11 PK

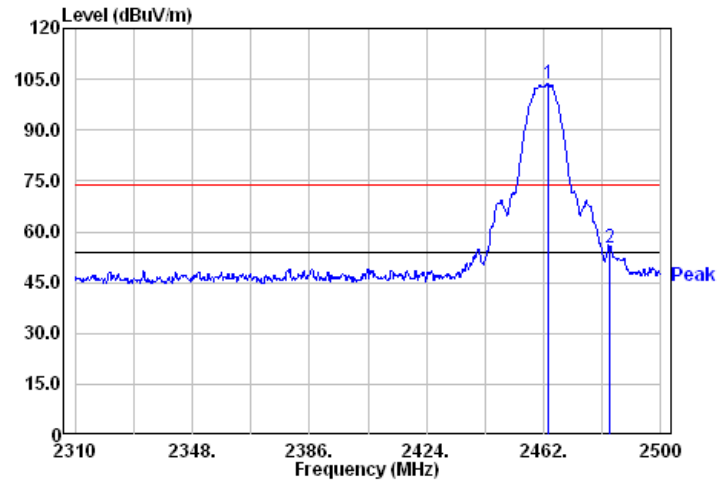


Chain0 : Restricted Band Bandedge @ 802.11b Mode Ch11 AV

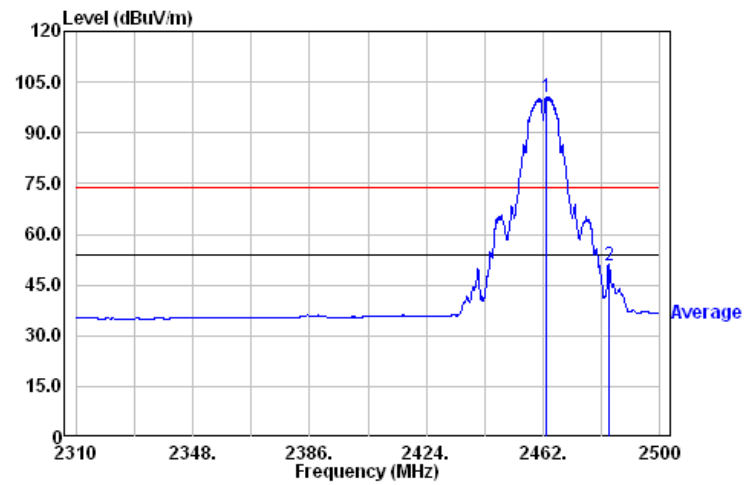


Chain0 : Restricted Band Bandedge @ 802.11g Mode Ch1 PK

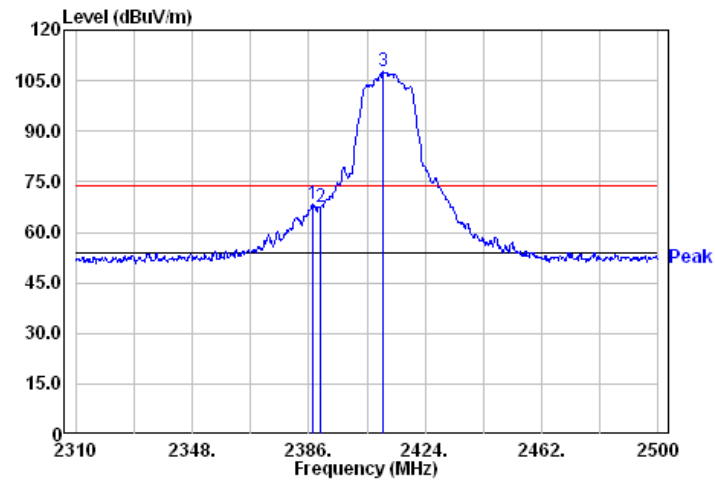


Chain0 : Restricted Band Bandedge @ 802.11g Mode Ch1 AV

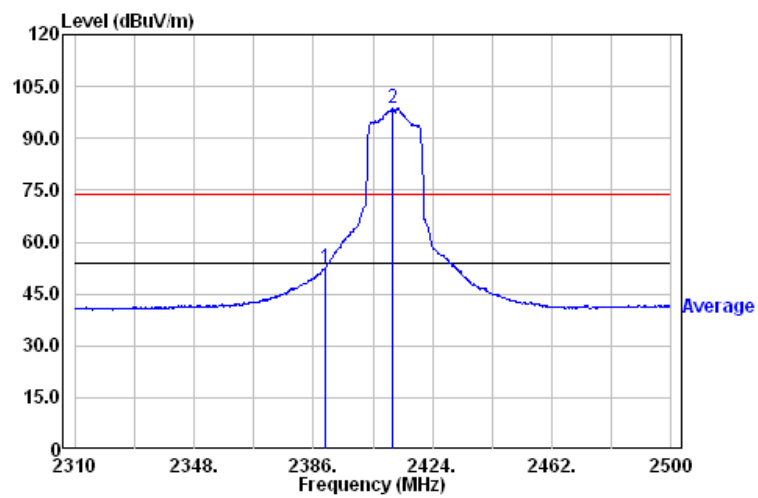


Chain0 : Restricted Band Bandedge @ 802.11g Mode Ch11 PK

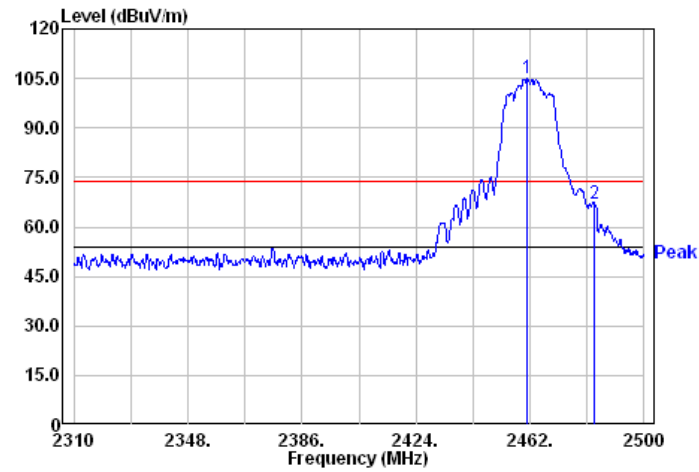


Chain0 : Restricted Band Bandedge @ 802.11g Mode Ch11 AV

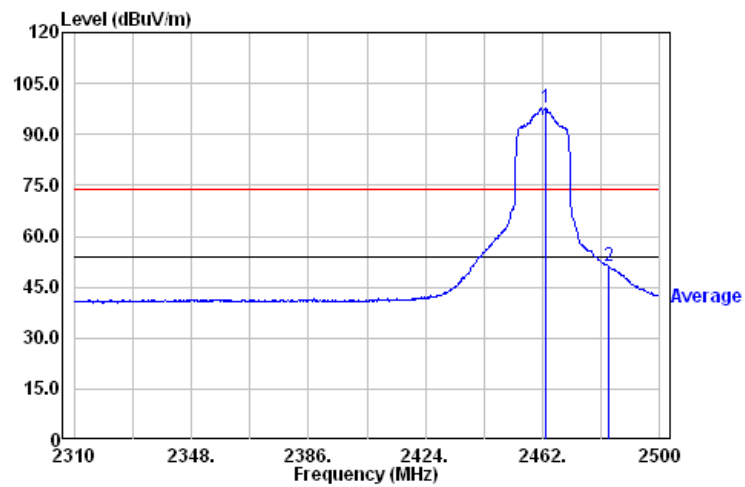


Chain0 : Restricted Band Bandedge @ 802.11n(HT20) Mode Ch1 PK

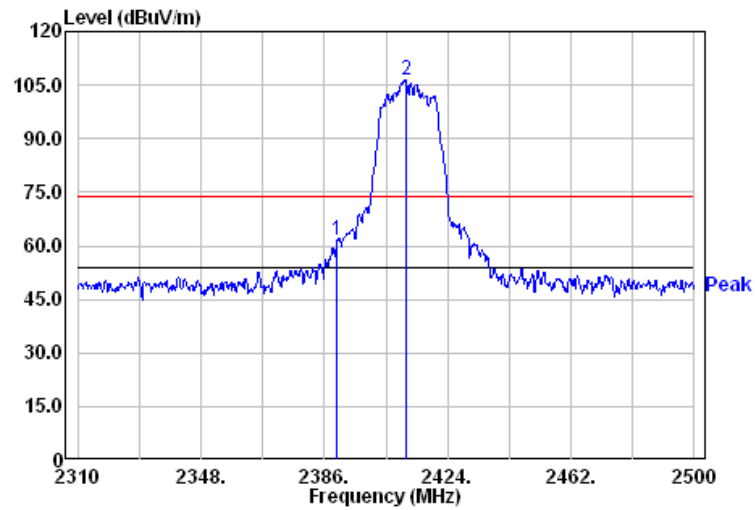


Chain0 : Restricted Band Bandedge @ 802.11n(HT20) Mode Ch1 AV

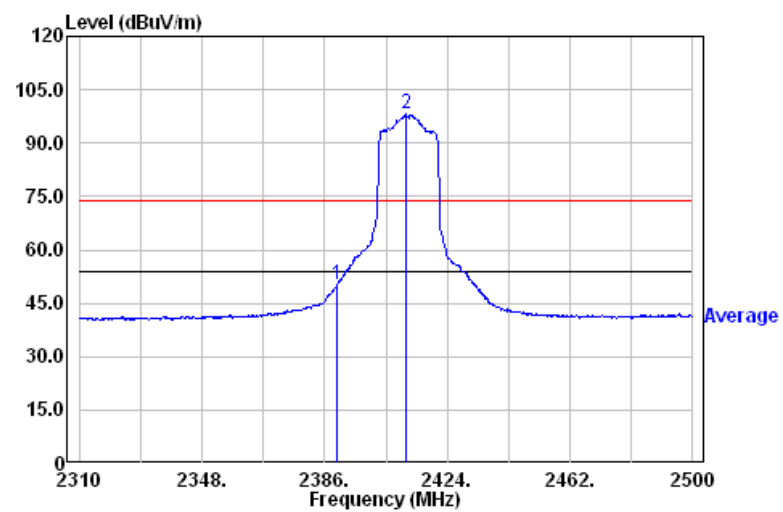


Chain0 : Restricted Band Bandedge @ 802.11n(HT20) Mode Ch11 PK

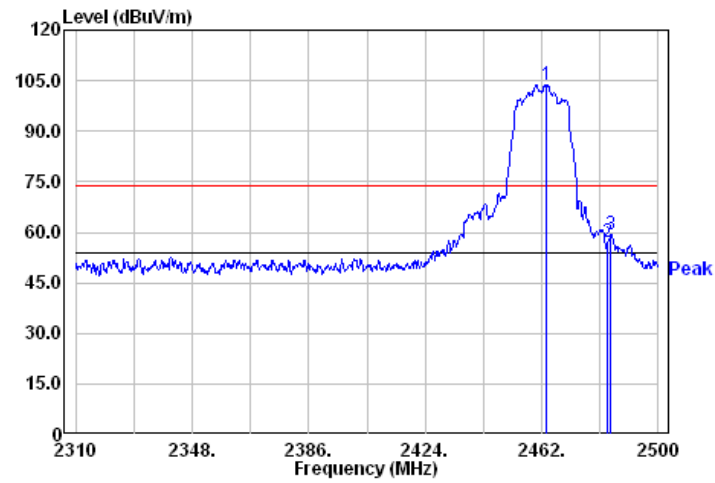


Chain0 : Restricted Band Bandedge @ 802.11n(HT20) Mode Ch11 AV

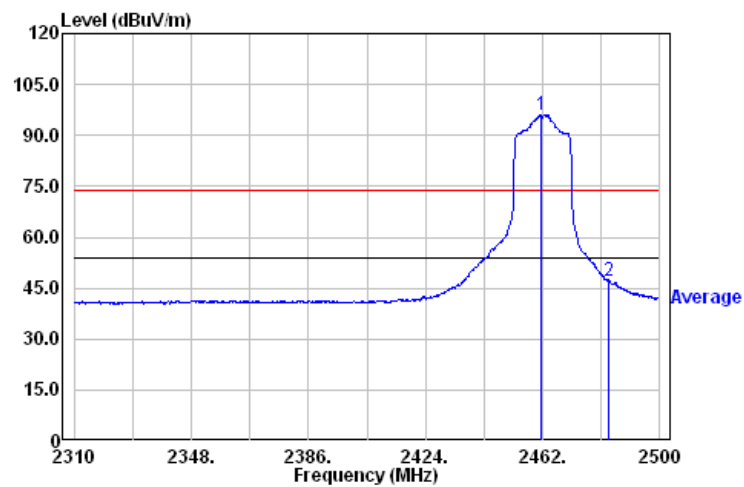


Chain0 : Restricted Band Bandedge @ 802.11n(HT40) Mode Ch3 PK

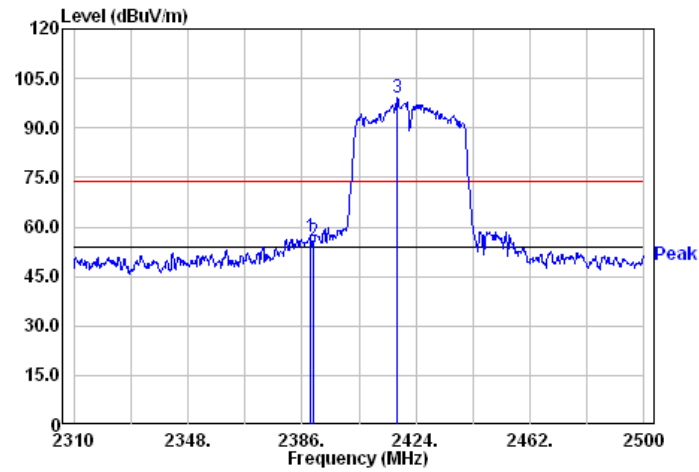


Chain0 : Restricted Band Bandedge @ 802.11n(HT40) Mode Ch3 AV

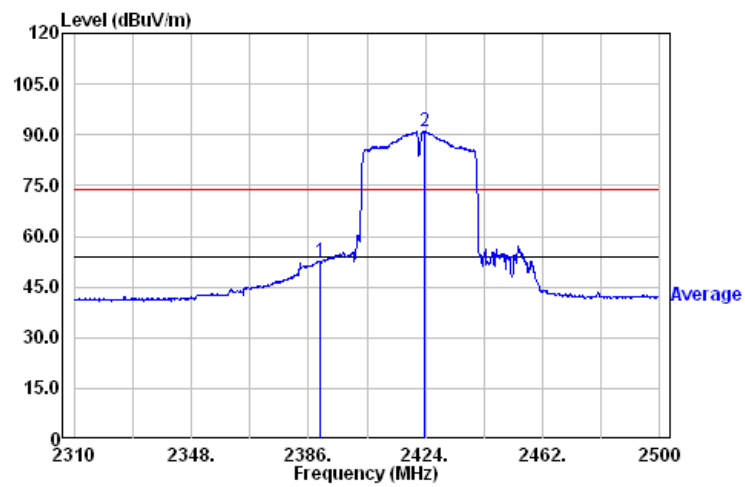

Chain0 : Restricted Band Bandedge @ 802.11n(HT40) Mode Ch9 PK

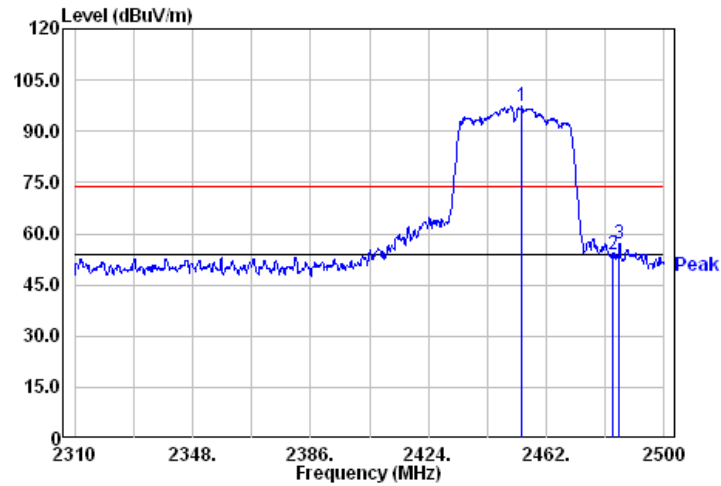

Chain0 : Restricted Band Bandedge @ 802.11n(HT40) Mode Ch9 AV

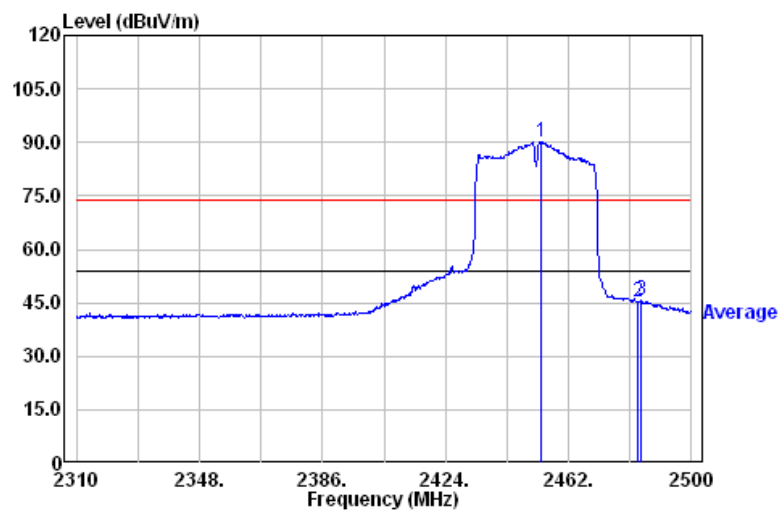

8. AC Power Line Conducted Emission

Since the EUT is not connected to AC source, therefore, the test can be waived.

TEST REPORT

Appendix A: Test equipment list

Test Equipment/ Test site	Brand	Model No.	Serial No.	Calibration Date	Next Calibration Date
EMI Test Receiver	Rohde & Schwarz	ESR7	101822	2021/08/16	2022/08/15
Signal Analyzer	Agilent	N9030A	MY51380492	2021/08/17	2022/08/16
Active Loop Antenna	SCHWARZBECK MESS-ELEKTRONIC	FMZB1519	1519-067	2021/04/14	2022/04/13
Broadband Antenna	SHWARZBECK	VULB 9168	9168-172	2022/01/20	2023/01/19
Horn Antenna	EMCO	BBHA 9120 D	9120D-456	2022/01/21	2023/01/20
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170159	2021/04/08	2022/04/07
Broadband Amplifier	SGH	SGH118(45dB)	20220105-1	2022/01/07	2023/01/06
Pre-amplifier	SGH	SGH184	20201124-1	2021/12/06	2022/12/05
Power Meter	Anritsu	ML2495A	0844001	2021/10/17	2022/10/16
Power Sensor	Anritsu	MA2411B	0738452	2021/10/17	2022/10/16
966-2(A) Cable	SUHNER	SMA / EX 100	N/A	2021/03/08	2022/03/07
966-2(A) Cable	SUHNER	SMA / EX 100	N/A	2022/03/04	2023/03/03
966-2(B) Cable	SUHNER	SUCOFLEX 104P	CB0005	2021/03/08	2022/03/07
966-2(B) Cable	SUHNER	SUCOFLEX 104P	CB0005	2022/03/04	2023/03/03
966-2 Cable	SUHNER	SUCOFLEX 104P	9403/4P	2021/11/30	2022/11/29
RF Cable	SUHNER	SUCOFLEX 104P	CB0006	2021/04/29	2022/04/28
966-2_3m Semi-Anechoic Chamber	966_2	CEM-966_2	N/A	2022/01/14	2023/01/13
20dB Attenuator	Mini-Circuits	BW-S20W5+	N/A	2021/05/26	2022/05/25
Test software	Audix	e3	V9	NCR	NCR

Note: No Calibration Required (NCR).

Appendix B: Measurement Uncertainty

This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level using a coverage factor of k=2.

Item	Uncertainty
Vertically polarized radiated disturbances from 30MHz~1GHz in a semi-anechoic chamber at a distance of 3m	5.16 dB
Horizontally polarized radiated disturbances from 30MHz~1GHz in a semi-anechoic chamber at a distance of 3m	5.02 dB
Radiated disturbances from 1GHz~18GHz in a semi-anechoic chamber at a distance of 3m	5.17 dB
Vertically polarized Radiated disturbances from 18GHz~26.5GHz in a semi-anechoic chamber at a distance of 1m	2.39 dB
Horizontally polarized Radiated disturbances from 18GHz~26.5GHz in a semi-anechoic chamber at a distance of 1m	2.39 dB
Radiated disturbances from 9kHz~30MHz in a semi-anechoic chamber at a distance of 3m	3.70 dB
Emission on the Band Edge Test	4.32 dB
Occupied Bandwidth	7.78 %
Maximum Peak Conducted Output Power	0.44 dB
Power Spectral Density	1.27 dB
Emissions In Non-Restricted Frequency Bands	1.27 dB
AC Power Line Conducted Emission	3.08 dB