




KIEL2504-YW03876

Worst case - RE(Below 1 GHz)_802.11ah(4M)_922 MHz(CH5)_ANT A

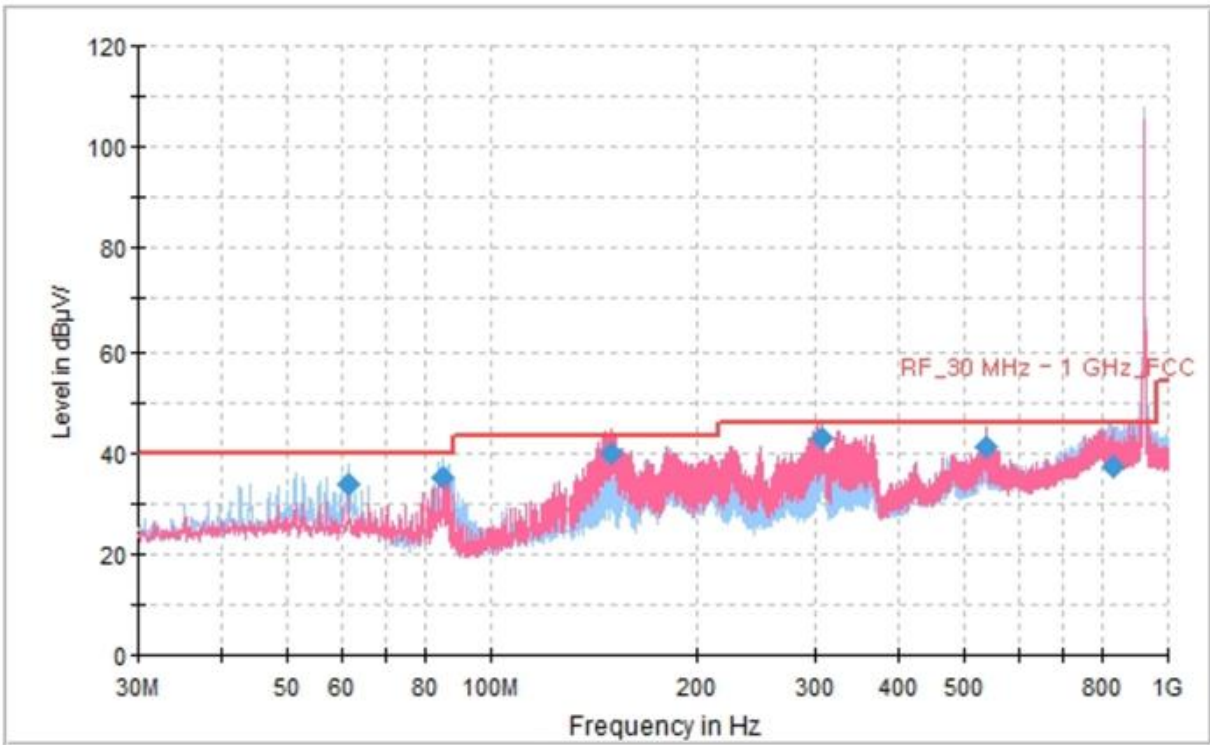


Frequency [MHz]	Quasi-Peak Reading [dBμV]	Quasi-Peak Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Pol	Azimuth [deg]	Corrction Factor [dB/m]
61.464	31.73	33.73	40.00	6.27	100	H	329	2.00
84.926	38.16	35.06	40.00	4.94	100	H	46	-3.10
149.310	37.07	39.97	43.52	3.55	200	V	234	2.90
306.329	38.44	42.94	46.02	3.08	100	V	171	4.50
536.340	30.62	41.02	46.02	5	200	V	238	10.40
829.159	21.64	37.34	46.02	8.68	200	H	14	15.70

Note)
1. Quasi Peak(dBμV/m) = Quasi Peak Reading Value(dBμV) + Correction Factor(dB/m)
2. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin(dB) = (Quasi Peak) Limit (dBμV/m) – (Quasi Peak) Result (dBμV/m).





KIEL2504-YW03876

Worst case - RE(Below 1 GHz)_802.11ah(1M)_915.5 MHz(CH13)_ANT B

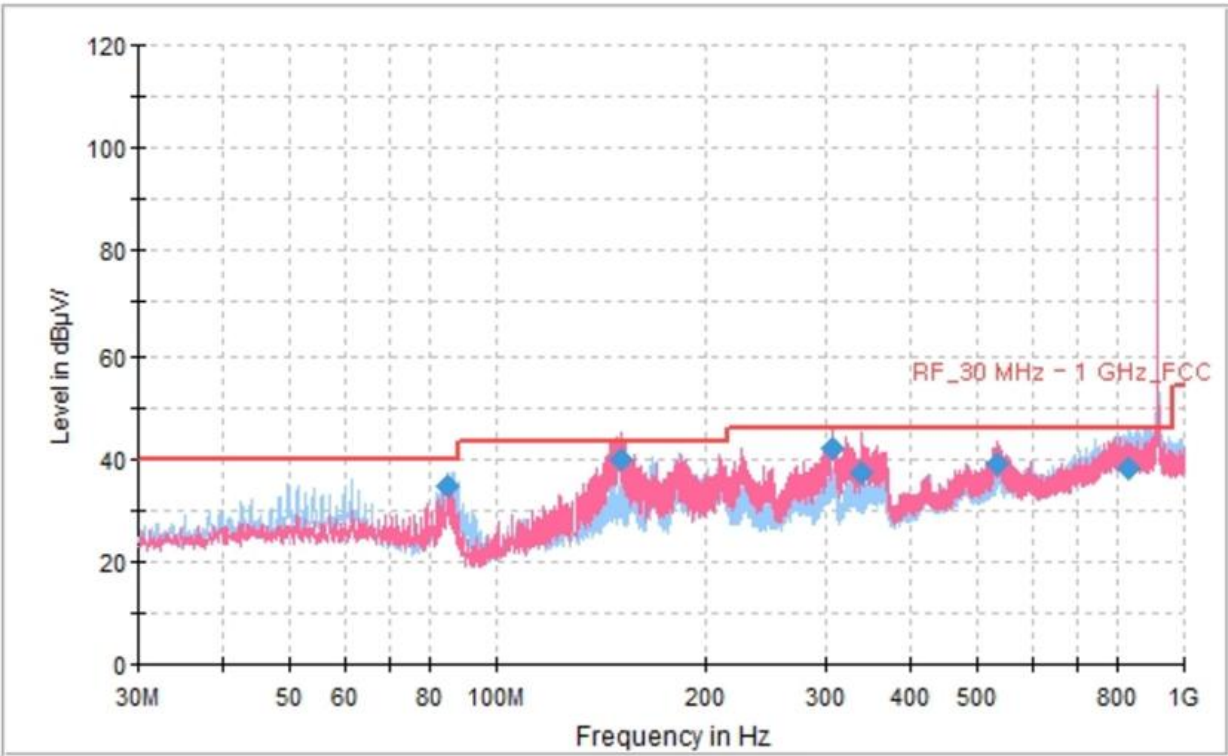


Frequency [MHz]	Quasi-Peak Reading [dBμV]	Quasi-Peak Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Pol	Azimuth [deg]	Corrcion Factor [dB/m]
84.926	37.81	34.71	40.00	5.29	100	H	148	-3.10
150.644	36.90	39.90	43.52	3.62	200	V	199	3.00
307.602	37.62	42.22	46.02	3.8	100	V	112	4.60
337.611	31.45	37.15	46.02	8.87	100	V	173	5.70
531.914	28.63	39.03	46.02	6.99	200	V	243	10.40
829.219	22.28	37.98	46.02	8.04	100	H	68	15.70

Note)
1. Quasi Peak(dBμV/m) = Quasi Peak Reading Value(dBμV) + Correction Factor(dB/m)
2. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin(dB) = (Quasi Peak) Limit (dBμV/m) – (Quasi Peak) Result (dBμV/m).




KIEL2504-YW03876

Worst case - RE(Below 1 GHz)_802.11ah(2M)_925 MHz(CH11)_ANT B

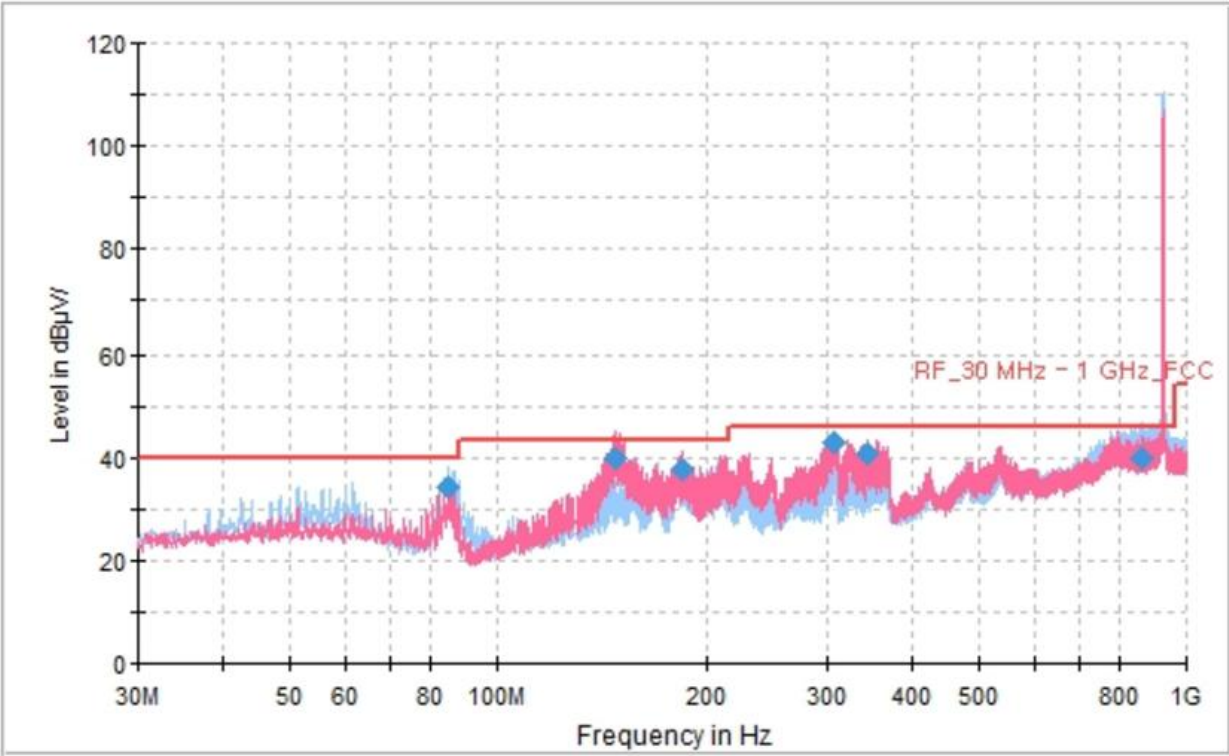


Frequency [MHz]	Quasi-Peak Reading [dBμV]	Quasi-Peak Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Pol	Azimuth [deg]	Correction Factor [dB/m]
84.866	37.25	34.15	40.00	5.85	100	H	152	-3.10
147.976	36.89	39.69	43.52	3.83	200	V	10	2.80
184.594	36.94	37.74	43.52	5.78	200	V	0	0.80
307.299	38.49	42.99	46.02	3.03	100	V	117	4.50
342.886	34.79	40.59	46.02	5.43	100	V	184	5.80
863.897	24.25	40.05	46.02	5.97	200	H	56	15.80

Note)
1. Quasi Peak(dBμV/m) = Quasi Peak Reading Value(dBμV) + Correction Factor(dB/m)
2. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin(dB) = (Quasi Peak) Limit (dBμV/m) – (Quasi Peak) Result (dBμV/m).



KIEL2504-YW03876

Worst case - RE(Below 1 GHz)_802.11ah(4M)_922 MHz(CH5)_ANT B

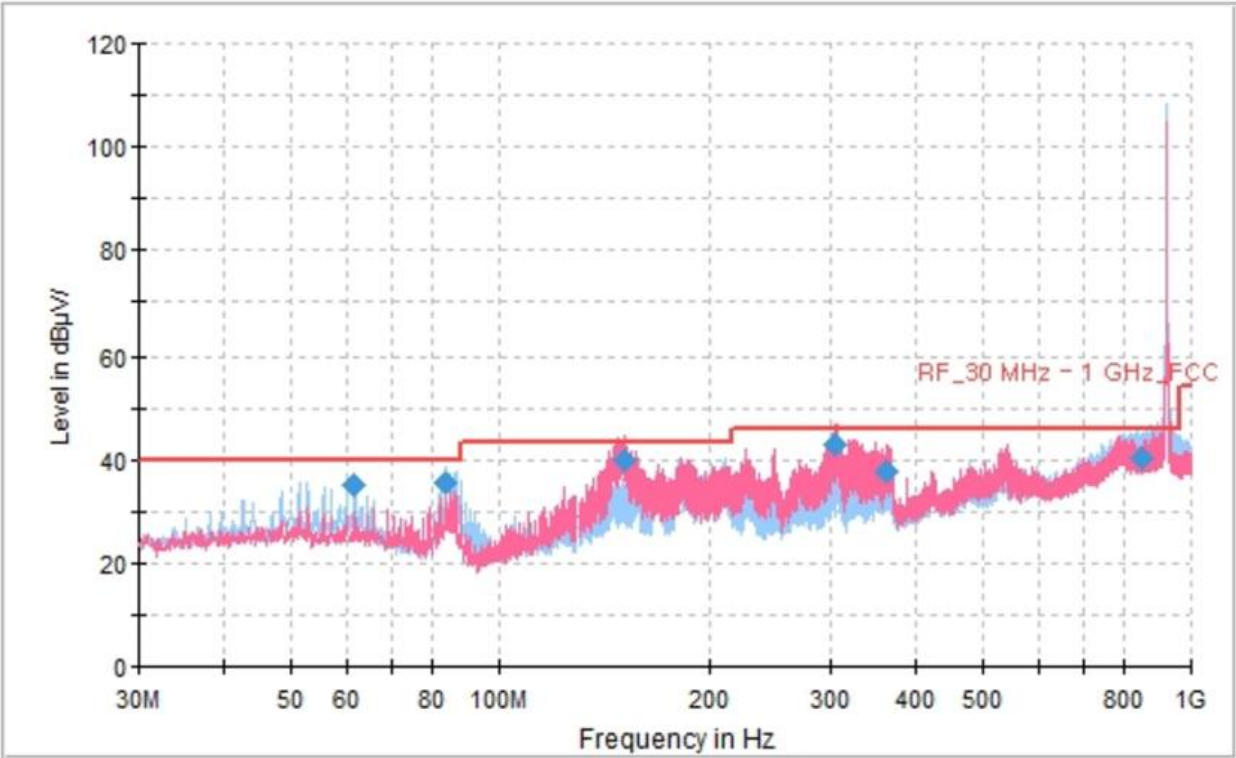

Frequency [MHz]	Quasi-Peak Reading [dBμV]	Quasi-Peak Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Pol	Azimuth [deg]	Corrction Factor [dB/m]
61.525	33.08	35.08	40.00	4.92	100	H	309	2.00
83.471	38.35	35.45	40.00	4.55	100	H	108	-2.90
150.947	36.92	39.92	43.52	3.6	200	V	184	3.00
304.995	38.47	42.97	46.02	3.05	100	V	108	4.50
363.013	31.37	37.57	46.02	8.45	100	V	172	6.20
846.619	24.69	40.39	46.02	5.63	100	H	94	15.70


Note)

1. Quasi Peak(dBμV/m) = Quasi Peak Reading Value(dBμV) + Correction Factor(dB/m)
2. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin(dB) = (Quasi Peak) Limit (dBμV/m) – (Quasi Peak) Result (dBμV/m).



KIEL2504-YW03876



Radiated Emission (Above 1 GHz)

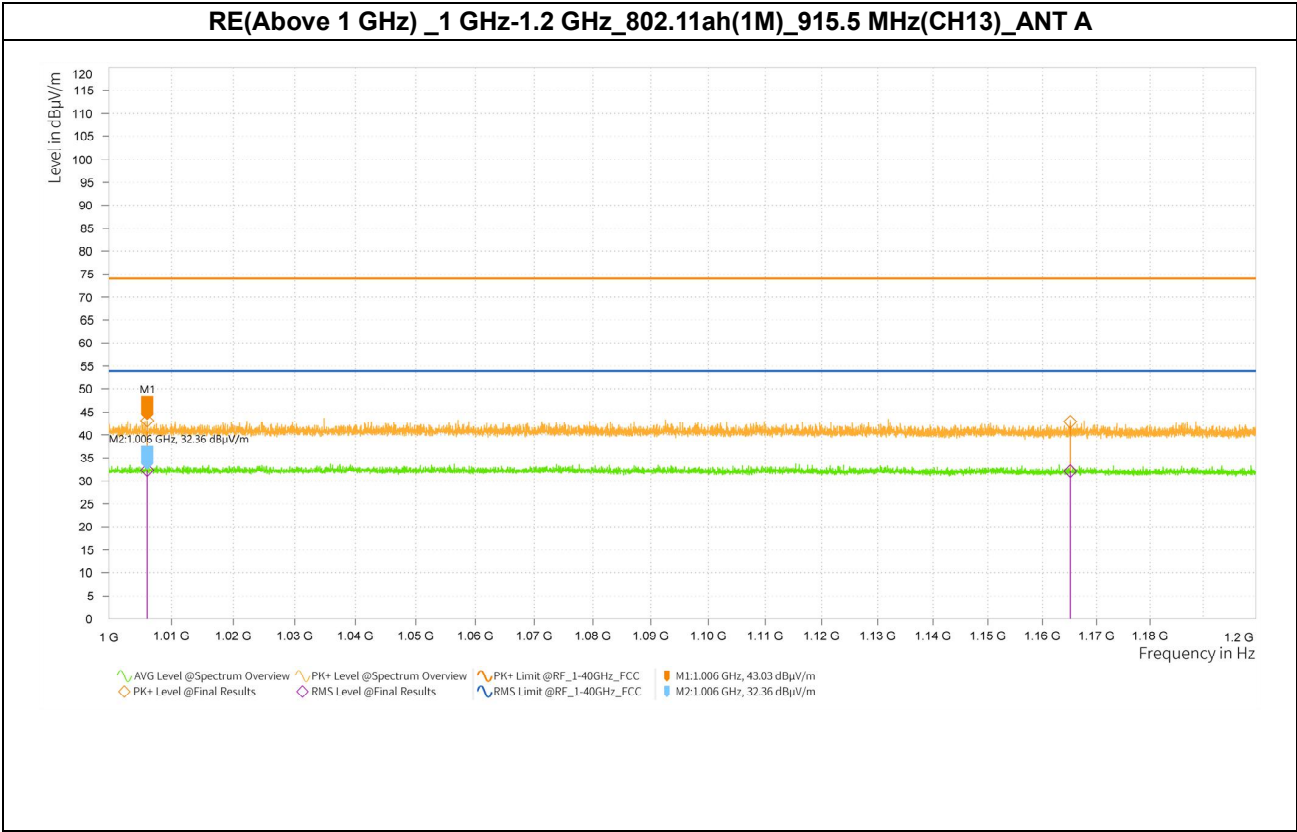

	Frequency [MHz]	Peak Reading [dBuV]	Peak Result [dBuV/m]	AVG Reading [dBuV]	AVG Result [dBuV/m]	DCCF [dB]	Height [cm]	Pol	Azimuth [deg]	Corr. [dB/m]	Peak Margin [dB]	Peak Limit [dBuV/m]	AVG Margin [dB]	AVG Limit [dBuV/m]
*	1 006.120	48.10	43.03	37.43	32.43	0.07	2.00	V	276.0	-5.07	30.97	74.00	21.57	54.00
*	1 165.140	47.66	42.83	36.96	32.20	0.07	2.00	V	204.0	-4.83	31.17	74.00	21.80	54.00


Note)

1. Peak Result(dBuV/m) = Peak Reading Value(dBuV) + Correction Factor(dB/m)
2. AVG Result(dBuV/m) = Average Reading Value (dBuV) + Correction Factor(dB/m) + DCCF
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance Factor (dB)
5. Margin(dB) = (Peak/AVG) Limit (dBuV/m) – (Peak/AVG) Result (dBuV/m)
6. * - indicates frequency in Restricted Band.





KIEL2504-YW03876

RE(Above 1 GHz) _1.2 GHz-10 GHz_802.11ah(1M)_915.5 MHz(CH13)_ANT A

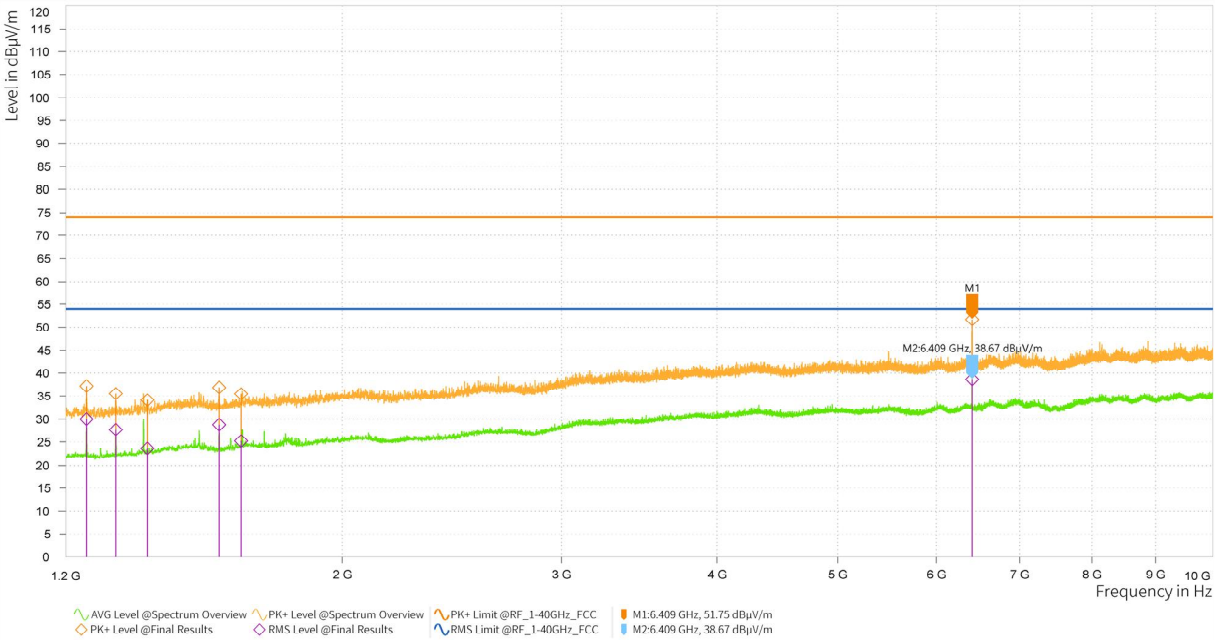


Frequency [MHz]	Peak Reading [dBuV]	Peak Result [dBuV/m]	AVG Reading [dBuV]	AVG Result [dBuV/m]	DCCF [dB]	Height [cm]	Pol	Azimuth [deg]	Corr. [dB/m]	Peak Margin [dB]	Peak Limit [dBuV/m]	AVG Margin [dB]	AVG Limit [dBuV/m]
1 247.080	51.46	37.19	44.28	30.08	0.07	2.00	H	202.4	-14.27	36.81	74.00	23.92	54.00
1 316.160	49.56	35.56	41.74	27.81	0.07	2.00	H	274.1	-14.00	38.44	74.00	26.19	54.00
1 395.360	47.52	34.09	37.01	23.65	0.07	1.00	H	360.0	-13.43	39.91	74.00	30.35	54.00
* 1 593.360	48.73	36.92	40.61	28.87	0.07	2.00	H	262.3	-11.81	37.08	74.00	25.13	54.00
1 659.800	46.84	35.48	36.56	25.27	0.07	1.00	H	18.8	-11.36	38.52	74.00	28.73	54.00
6 409.160	50.70	51.75	37.62	38.74	0.07	1.00	V	118.2	1.05	22.25	74.00	15.26	54.00

- Note)
1. Peak Result(dBuV/m) = Peak Reading Value(dBuV) + Correction Factor(dB/m)
 2. AVG Result(dBuV/m) = Average Reading Value (dBuV) + Correction Factor(dB/m) + DCCF
 3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
 4. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB) + Distance Factor (dB)
 5. Margin(dB) = (Peak/AVG) Limit (dBuV/m) - (Peak/AVG) Result (dBuV/m)
 6. * - indicates frequency in Restricted Band.




KIEL2504-YW03876

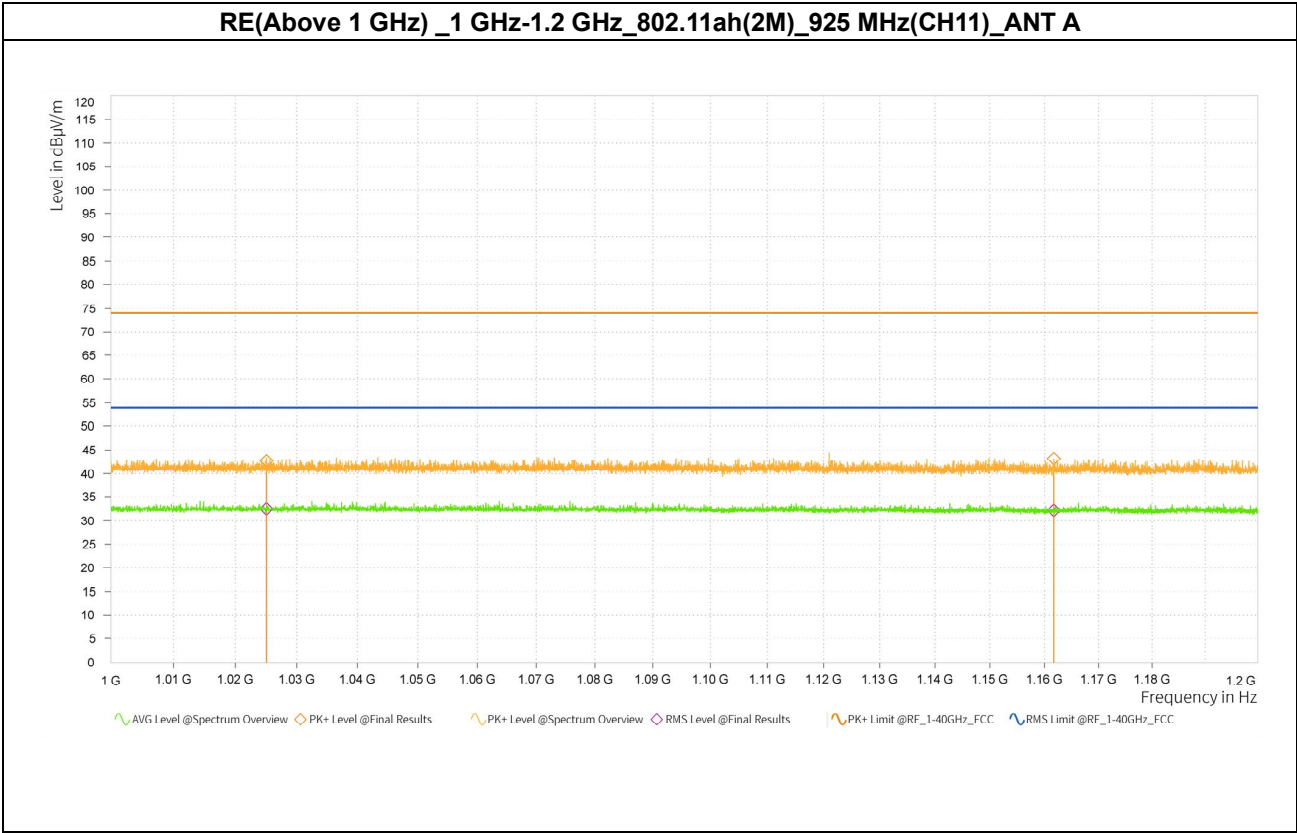


	Frequency [MHz]	Peak Reading [dBuV]	Peak Result [dBuV/m]	AVG Reading [dBuV]	AVG Result [dBuV/m]	DCCF [dB]	Height [cm]	Pol	Azimuth [deg]	Corr. [dB/m]	Peak Margin [dB]	Peak Limit [dBuV/m]	AVG Margin [dB]	AVG Limit [dBuV/m]
*	1 025.060	47.66	42.64	37.48	32.52	0.06	1.00	H	36.5	-5.02	31.36	74.00	21.48	54.00
*	1 161.720	47.91	43.08	36.99	32.22	0.06	1.00	H	12.3	-4.83	30.92	74.00	21.78	54.00

- Note)
1. Peak Result(dBuV/m) = Peak Reading Value(dBuV) + Correction Factor(dB/m)
 2. AVG Result(dBuV/m) = Average Reading Value (dBuV) + Correction Factor(dB/m) + DCCF
 3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
 4. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance Factor (dB)
 5. Margin(dB) = (Peak/AVG) Limit (dBuV/m) – (Peak/AVG) Result (dBuV/m)
 6. * - indicates frequency in Restricted Band.



KIEL2504-YW03876


RE(Above 1 GHz) _1.2 GHz-10 GHz_802.11ah(2M)_925 MHz(CH11)_ANT A

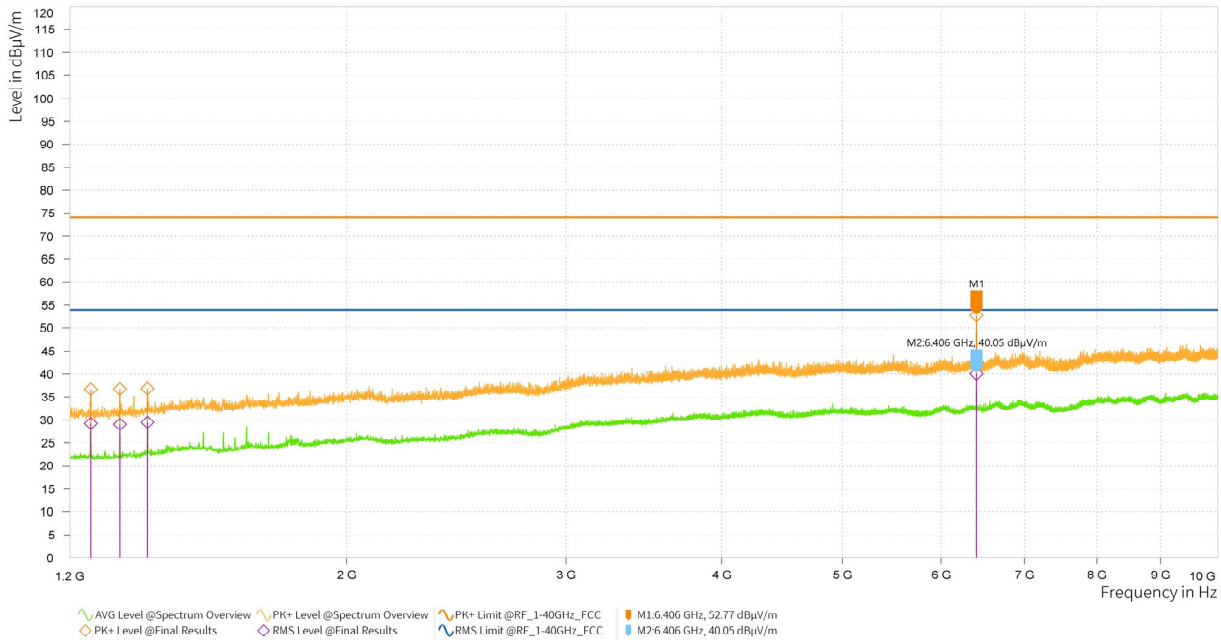

Frequency [MHz]	Peak Reading [dBuV]	Peak Result [dBuV/m]	AVG Reading [dBuV]	AVG Result [dBuV/m]	DCCF [dB]	Height [cm]	Pol	Azimuth [deg]	Corr. [dB/m]	Peak Margin [dB]	Peak Limit [dBuV/m]	AVG Margin [dB]	AVG Limit [dBuV/m]
1 247.520	51.02	36.76	43.48	29.28	0.06	1.00	H	27.9	-14.26	37.24	74.00	24.72	54.00
1 316.160	50.77	36.77	43.04	29.10	0.06	1.00	V	142.4	-14.00	37.23	74.00	24.90	54.00
1 385.240	50.44	36.90	43.05	29.57	0.06	1.00	V	322.1	-13.54	37.10	74.00	24.43	54.00
6 405.640	51.74	52.77	39.02	40.11	0.06	1.00	V	82.6	1.03	21.23	74.00	13.89	54.00


Note)

1. Peak Result(dBuV/m) = Peak Reading Value(dBuV) + Correction Factor(dB/m)
2. AVG Result(dBuV/m) = Average Reading Value (dBuV) + Correction Factor(dB/m) + DCCF
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance Factor (dB)
5. Margin(dB) = (Peak/AVG) Limit (dBuV/m) – (Peak/AVG) Result (dBuV/m)
6. * - indicates frequency in Restricted Band.




KIEL2504-YW03876

RE(Above 1 GHz) _1 GHz-1.2 GHz_802.11ah(4M)_922 MHz(CH5)_ANT A

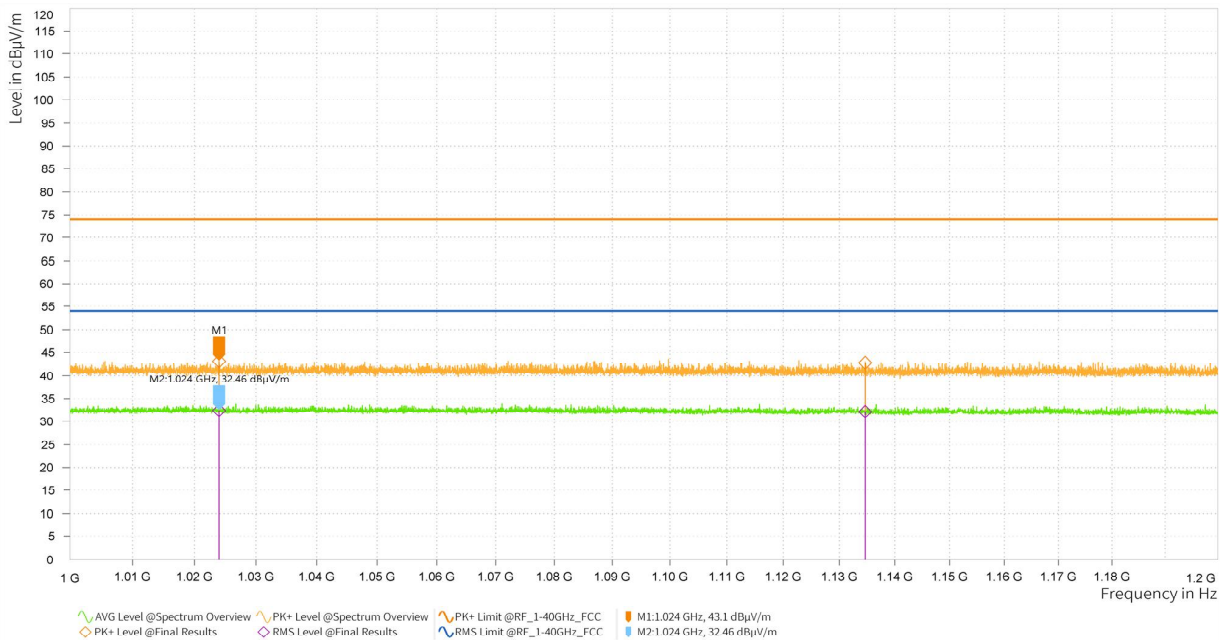


	Frequency [MHz]	Peak Reading [dBuV]	Peak Result [dBuV/m]	AVG Reading [dBuV]	AVG Result [dBuV/m]	DCCF [dB]	Height [cm]	Pol	Azimuth [deg]	Corr. [dB/m]	Peak Margin [dB]	Peak Limit [dBuV/m]	AVG Margin [dB]	AVG Limit [dBuV/m]
*	1 023.980	48.12	43.10	37.48	32.53	0.07	1.00	H	158.2	-5.02	30.90	74.00	21.47	54.00
*	1 134.640	47.63	42.77	37.05	32.26	0.07	1.00	H	128.3	-4.86	31.23	74.00	21.74	54.00

- Note)
1. Peak Result(dBuV/m) = Peak Reading Value(dBuV) + Correction Factor(dB/m)
 2. AVG Result(dBuV/m) = Average Reading Value (dBuV) + Correction Factor(dB/m) + DCCF
 3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
 4. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance Factor (dB)
 5. Margin(dB) = (Peak/AVG) Limit (dBuV/m) – (Peak/AVG) Result (dBuV/m)
 6. * - indicates frequency in Restricted Band.






KIEL2504-YW03876

RE(Above 1 GHz) _1.2 GHz-10 GHz_802.11ah(4M)_922 MHz(CH5)_ANT A

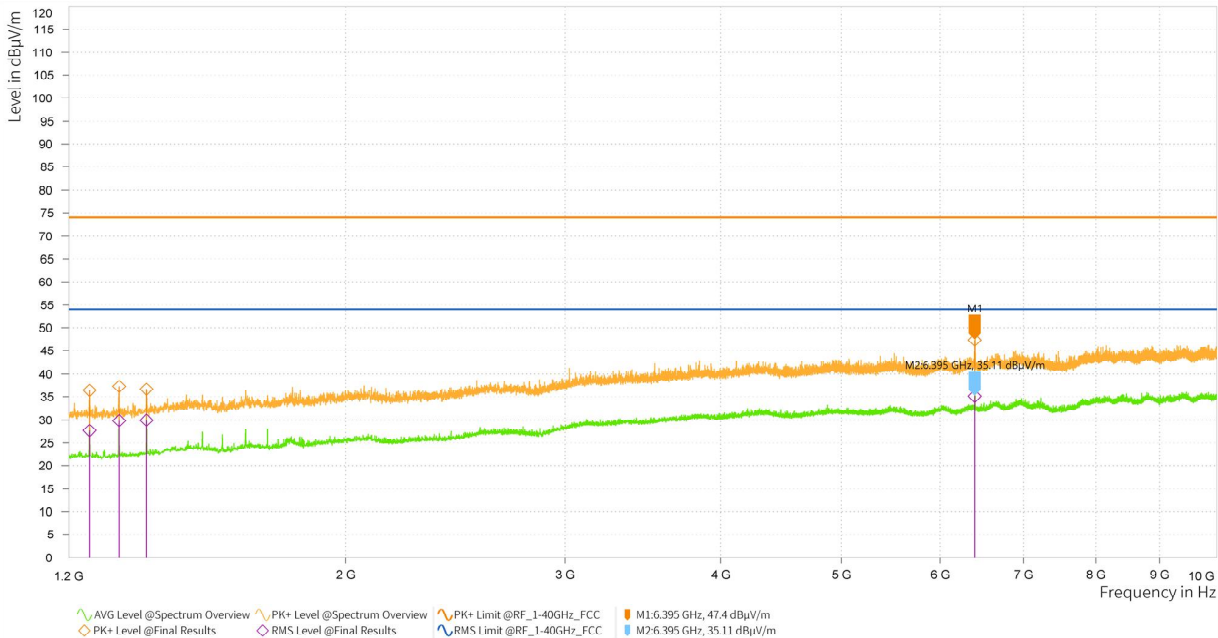


Frequency [MHz]	Peak Reading [dBuV]	Peak Result [dBuV/m]	AVG Reading [dBuV]	AVG Result [dBuV/m]	DCCF [dB]	Height [cm]	Pol	Azimuth [deg]	Corr. [dB/m]	Peak Margin [dB]	Peak Limit [dBuV/m]	AVG Margin [dB]	AVG Limit [dBuV/m]
1 246.640	50.62	36.35	41.90	27.70	0.07	2.00	H	82.4	-14.27	37.65	74.00	26.30	54.00
1 316.600	51.26	37.26	43.88	29.95	0.07	1.00	V	324.6	-14.00	36.74	74.00	24.05	54.00
1 385.240	50.20	36.66	43.49	30.02	0.07	1.00	V	157.0	-13.54	37.34	74.00	23.98	54.00
6 394.640	46.40	47.40	34.11	35.18	0.07	2.00	V	74.4	1.00	26.60	74.00	18.82	54.00

- Note)
1. Peak Result(dBuV/m) = Peak Reading Value(dBuV) + Correction Factor(dB/m)
 2. AVG Result(dBuV/m) = Average Reading Value (dBuV) + Correction Factor(dB/m) + DCCF
 3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
 4. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance Factor (dB)
 5. Margin(dB) = (Peak/AVG) Limit (dBuV/m) – (Peak/AVG) Result (dBuV/m)
 6. * - indicates frequency in Restricted Band.




KIEL2504-YW03876

RE(Above 1 GHz) _1 GHz-1.2 GHz_802.11ah(1M)_915.5 MHz(CH13)_ANT B

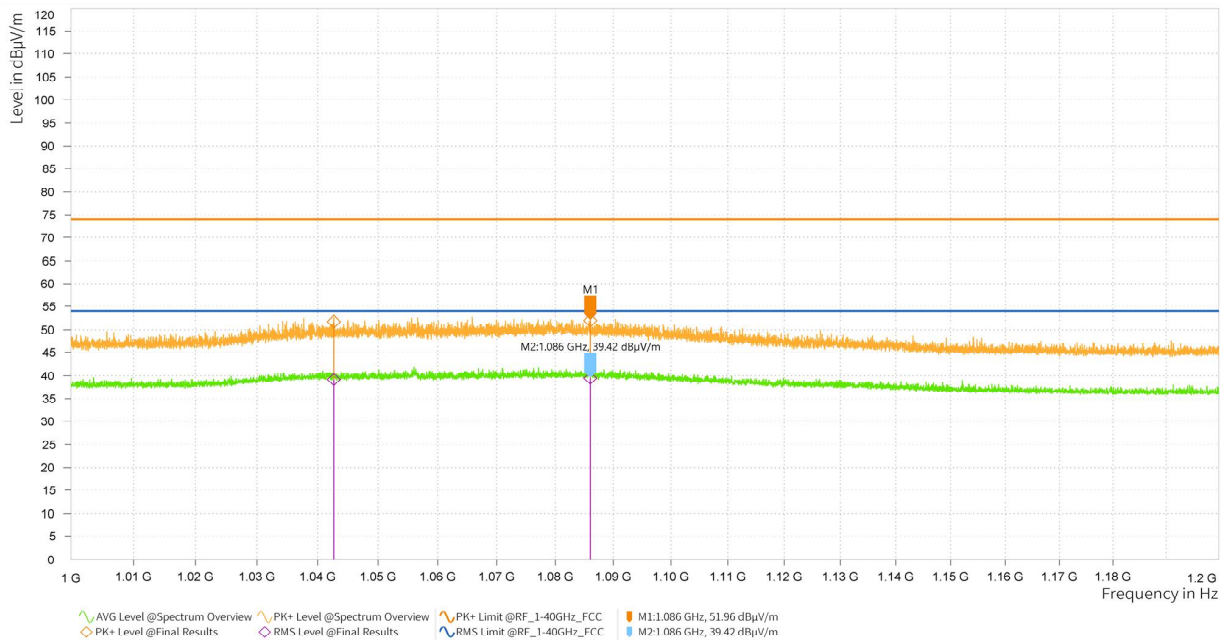


	Frequency [MHz]	Peak Reading [dBuV]	Peak Result [dBuV/m]	AVG Reading [dBuV]	AVG Result [dBuV/m]	DCCF [dB]	Height [cm]	Pol	Azimuth [deg]	Corr. [dB/m]	Peak Margin [dB]	Peak Limit [dBuV/m]	AVG Margin [dB]	AVG Limit [dBuV/m]
*	1 042.640	56.68	51.72	44.07	39.18	0.07	1.00	V	258.0	-4.96	22.28	74.00	14.82	54.00
*	1 086.020	56.87	51.96	44.33	39.49	0.07	1.00	V	112.2	-4.91	22.04	74.00	14.51	54.00

- Note)
1. Peak Result(dBuV/m) = Peak Reading Value(dBuV) + Correction Factor(dB/m)
 2. AVG Result(dBuV/m) = Average Reading Value (dBuV) + Correction Factor(dB/m) + DCCF
 3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
 4. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance Factor (dB)
 5. Margin(dB) = (Peak/AVG) Limit (dBuV/m) – (Peak/AVG) Result (dBuV/m)
 6. * - indicates frequency in Restricted Band.



KIEL2504-YW03876

RE(Above 1 GHz) _1.2 GHz-10 GHz_802.11ah(1M)_915.5 MHz(CH13)_ANT B

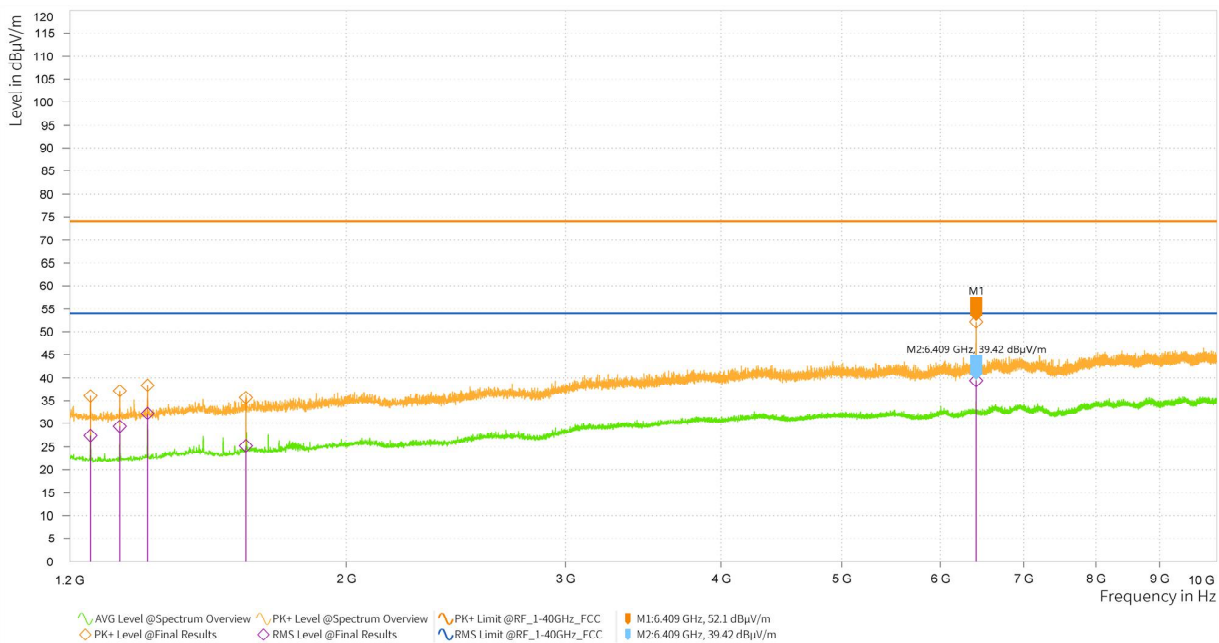


Frequency [MHz]	Peak Reading [dBuV]	Peak Result [dBuV/m]	AVG Reading [dBuV]	AVG Result [dBuV/m]	DCCF [dB]	Height [cm]	Pol	Azimuth [deg]	Corr. [dB/m]	Peak Margin [dB]	Peak Limit [dBuV/m]	AVG Margin [dB]	AVG Limit [dBuV/m]
1 246.640	50.31	36.04	41.63	27.43	0.07	1.00	H	18.7	-14.27	37.96	74.00	26.57	54.00
1 316.160	51.15	37.15	43.33	29.40	0.07	1.00	V	360.0	-14.00	36.85	74.00	24.60	54.00
1 385.680	51.93	38.39	45.80	32.33	0.07	1.00	V	34.2	-13.54	35.61	74.00	21.67	54.00
* 1 661.560	47.02	35.67	36.54	25.26	0.07	1.00	V	360.0	-11.35	38.33	74.00	28.74	54.00
6 408.720	51.05	52.10	38.37	39.49	0.07	1.00	V	106.6	1.05	21.90	74.00	14.51	54.00

- Note)
1. Peak Result(dBuV/m) = Peak Reading Value(dBuV) + Correction Factor(dB/m)
 2. AVG Result(dBuV/m) = Average Reading Value (dBuV) + Correction Factor(dB/m) + DCCF
 3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
 4. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance Factor (dB)
 5. Margin(dB) = (Peak/AVG) Limit (dBuV/m) – (Peak/AVG) Result (dBuV/m)
 6. * - indicates frequency in Restricted Band.




KIEL2504-YW03876

RE(Above 1 GHz) _1 GHz-1.2 GHz_802.11ah(2M)_925 MHz(CH11)_ANT B

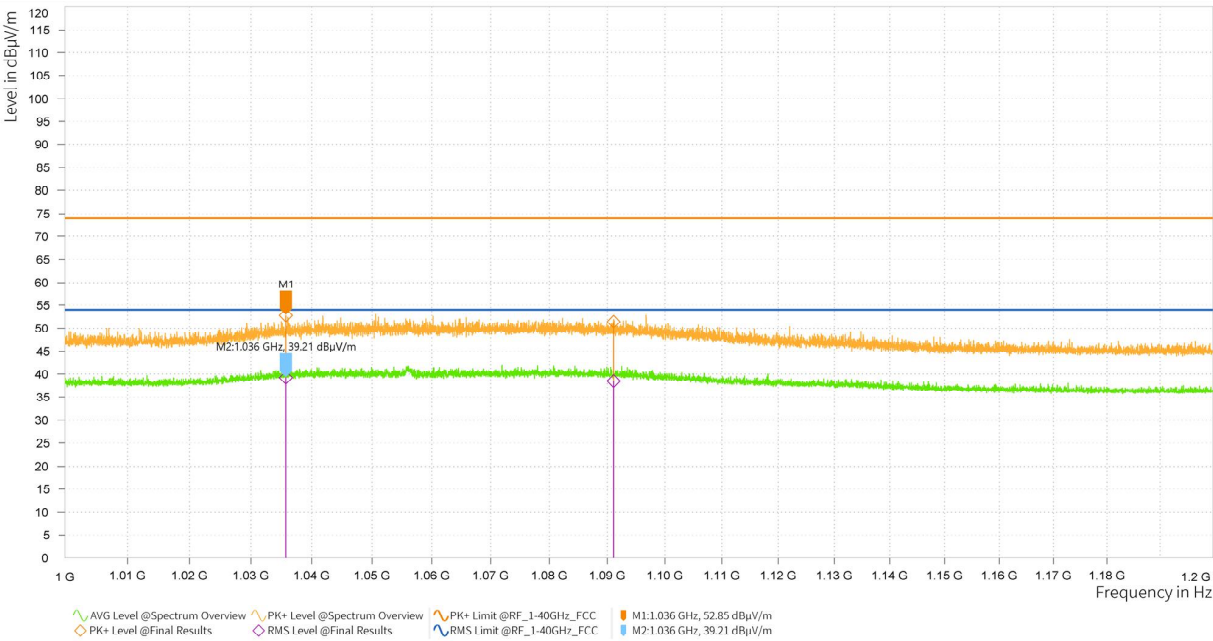


	Frequency [MHz]	Peak Reading [dBuV]	Peak Result [dBuV/m]	AVG Reading [dBuV]	AVG Result [dBuV/m]	DCCF [dB]	Height [cm]	Pol	Azimuth [deg]	Corr. [dB/m]	Peak Margin [dB]	Peak Limit [dBuV/m]	AVG Margin [dB]	AVG Limit [dBuV/m]
*	1 035.740	57.83	52.85	44.19	39.27	0.06	1.00	V	244.7	-4.98	21.15	74.00	14.73	54.00
*	1 091.080	56.38	51.47	43.42	38.57	0.06	2.00	V	48.8	-4.91	22.53	74.00	15.43	54.00

- Note)
1. Peak Result(dBuV/m) = Peak Reading Value(dBuV) + Correction Factor(dB/m)
 2. AVG Result(dBuV/m) = Average Reading Value (dBuV) + Correction Factor(dB/m) + DCCF
 3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
 4. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance Factor (dB)
 5. Margin(dB) = (Peak/AVG) Limit (dBuV/m) – (Peak/AVG) Result (dBuV/m)
 6. * - indicates frequency in Restricted Band.



KIEL2504-YW03876

RE(Above 1 GHz) _1.2 GHz-10 GHz_802.11ah(2M)_925 MHz(CH11)_ANT B

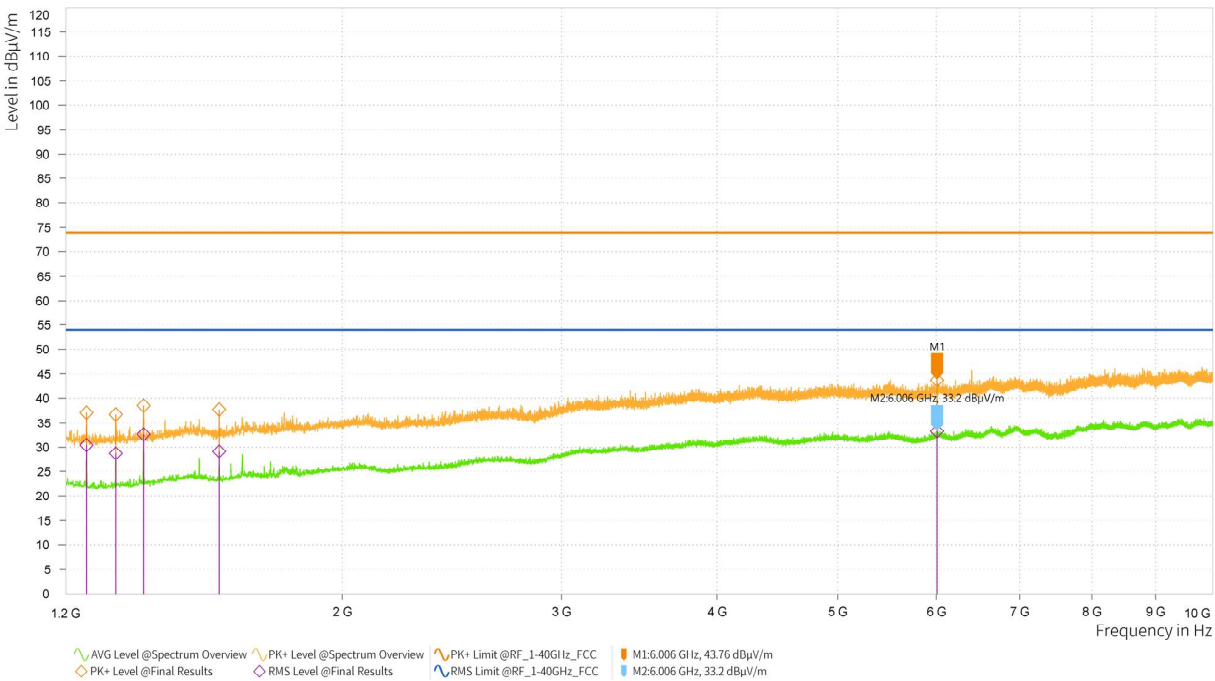

Frequency [MHz]	Peak Reading [dBuV]	Peak Result [dBuV/m]	AVG Reading [dBuV]	AVG Result [dBuV/m]	DCCF [dB]	Height [cm]	Pol	Azimuth [deg]	Corr. [dB/m]	Peak Margin [dB]	Peak Limit [dBuV/m]	AVG Margin [dB]	AVG Limit [dBuV/m]
1 247.080	51.36	37.09	44.69	30.48	0.06	1.00	H	251.7	-14.27	36.91	74.00	23.52	54.00
1 316.160	50.74	36.74	42.72	28.78	0.06	1.00	V	250.1	-14.00	37.26	74.00	25.22	54.00
1 385.680	52.03	38.49	46.14	32.66	0.06	1.00	V	238.2	-13.54	35.51	74.00	21.34	54.00
* 1 593.360	49.54	37.73	40.96	29.21	0.06	2.00	H	237.6	-11.81	36.27	74.00	24.79	54.00
6 006.120	42.97	43.76	32.41	33.26	0.06	2.00	V	40.0	0.79	30.24	74.00	20.74	54.00


Note)

1. Peak Result(dBuV/m) = Peak Reading Value(dBuV) + Correction Factor(dB/m)
2. AVG Result(dBuV/m) = Average Reading Value (dBuV) + Correction Factor(dB/m) + DCCF
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance Factor (dB)
5. Margin(dB) = (Peak/AVG) Limit (dBuV/m) – (Peak/AVG) Result (dBuV/m)
6. * - indicates frequency in Restricted Band.



KIEL2504-YW03876

RE(Above 1 GHz) _1 GHz-1.2 GHz_802.11ah(4M)_922 MHz(CH5)_ANT B

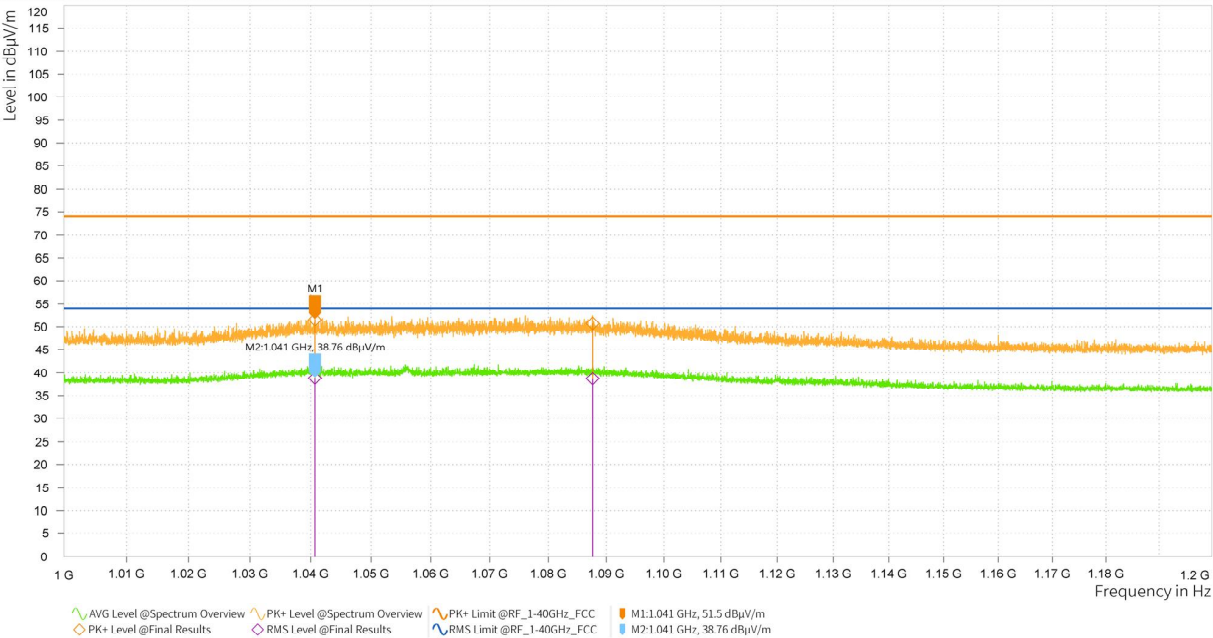


Frequency [MHz]	Peak Reading [dBuV]	Peak Result [dBuV/m]	AVG Reading [dBuV]	AVG Result [dBuV/m]	DCCF [dB]	Height [cm]	Pol	Azimuth [deg]	Corr. [dB/m]	Peak Margin [dB]	Peak Limit [dBuV/m]	AVG Margin [dB]	AVG Limit [dBuV/m]
* 1 040.700	56.47	51.50	43.73	38.83	0.07	1.00	V	235.8	-4.97	22.50	74.00	15.17	54.00
* 1 087.600	55.64	50.73	43.58	38.74	0.07	2.00	V	80.3	-4.91	23.27	74.00	15.26	54.00

- Note)
1. Peak Result(dBuV/m) = Peak Reading Value(dBuV) + Correction Factor(dB/m)
 2. AVG Result(dBuV/m) = Average Reading Value (dBuV) + Correction Factor(dB/m) + DCCF
 3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
 4. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance Factor (dB)
 5. Margin(dB) = (Peak/AVG) Limit (dBuV/m) – (Peak/AVG) Result (dBuV/m)
 6. * - indicates frequency in Restricted Band.



KIEL2504-YW03876

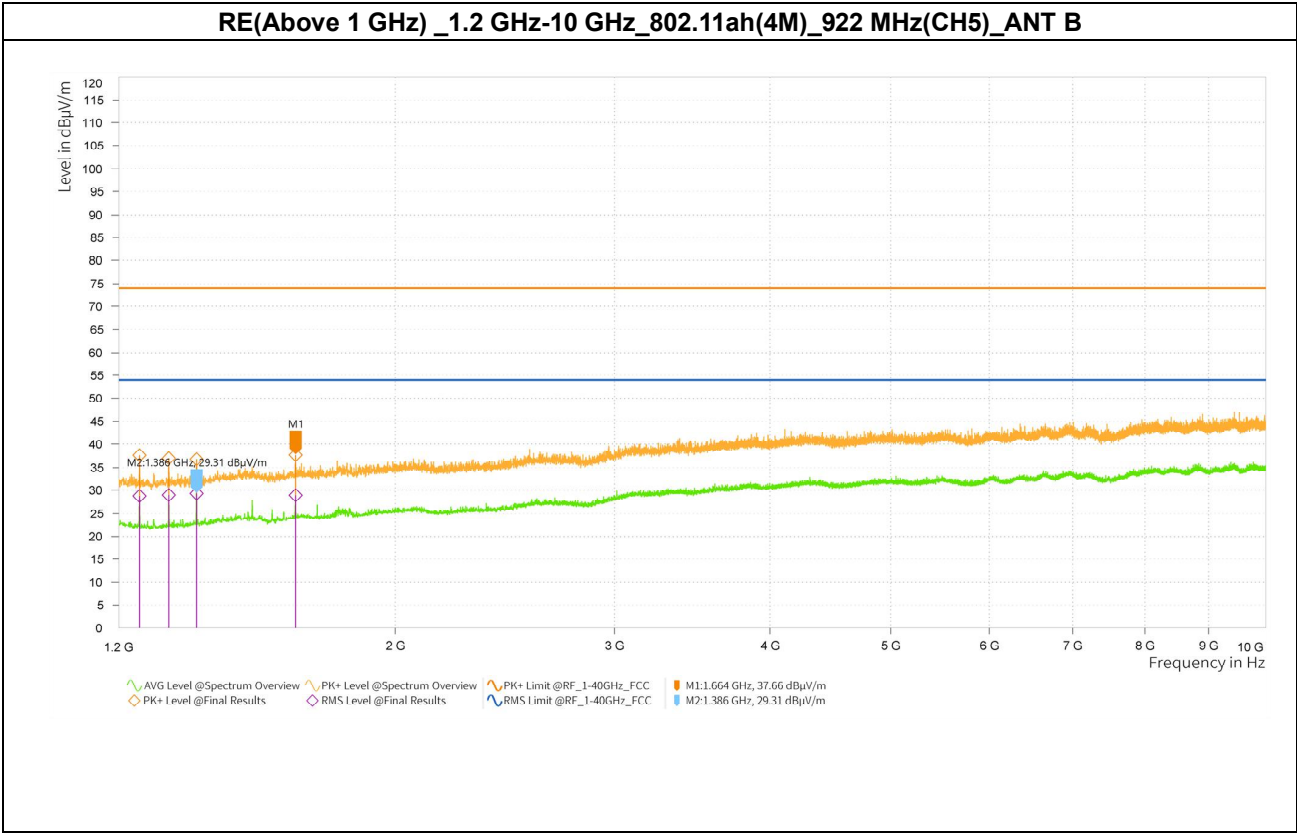

Frequency [MHz]	Peak Reading [dBuV]	Peak Result [dBuV/m]	AVG Reading [dBuV]	AVG Result [dBuV/m]	DCCF [dB]	Height [cm]	Pol	Azimuth [deg]	Corr. [dB/m]	Peak Margin [dB]	Peak Limit [dBuV/m]	AVG Margin [dB]	AVG Limit [dBuV/m]
1 247.080	51.89	37.62	43.05	28.85	0.07	2.00	V	111.1	-14.27	36.38	74.00	25.15	54.00
1 316.160	51.00	37.00	43.00	29.07	0.07	1.00	V	130.2	-14.00	37.00	74.00	24.93	54.00
1 385.680	50.33	36.79	42.85	29.38	0.07	1.00	H	52.1	-13.54	37.21	74.00	24.62	54.00
* 1 663.760	48.99	37.66	40.26	29.00	0.07	2.00	H	331.0	-11.33	36.34	74.00	25.00	54.00

- Note)
1. Peak Result(dBuV/m) = Peak Reading Value(dBuV) + Correction Factor(dB/m)
 2. AVG Result(dBuV/m) = Average Reading Value (dBuV) + Correction Factor(dB/m) + DCCF
 3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
 4. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance Factor (dB)
 5. Margin(dB) = (Peak/AVG) Limit (dBuV/m) – (Peak/AVG) Result (dBuV/m)
 6. * - indicates frequency in Restricted Band.

