



TEST REPORT

Product Name: Wireless speaker
FCC ID: 2BELX-GTS1588
Trademark: N/A
Model Number: GTS-1558, See the next page for other models.
Prepared For: Shenzhen Heiya Electronics Co., Ltd
Address: 806, Block C, Qunxing Square, Huaqiangbei, Futian District, Shenzhen, China
Manufacturer: Shenzhen Heiya Electronics Co., Ltd
Address: 806, Block C, Qunxing Square, Huaqiangbei, Futian District, Shenzhen, China
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: Dec. 21, 2023
Sample tested Date: Dec. 21, 2023 to Dec. 26, 2023
Issue Date: Dec. 26, 2023
Report No.: CTB231226035RFX
Test Standards: FCC Part15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is Bluetooth radio test report.

Compiled by:

Reviewed by:

Approved by:

Zhou kui

Arron Liu



Zhou Kui

Arron Liu

Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

Other series models:

A100, A22, A3, A7, GTS-1558, GTS-1550, GTS-1560, GTS-1346, GTS-1187, G90S, G90Q, G30, G10, G50, KTS-1096, KTS-1223, KTS-1266, KTS-1091, KTS-1711, KTS-1712, M3, M1, MT, MK-201, SC208, S34, S35, S36, S11, SY-688, YD-808, YD-802, YD-668, YD-806, YD-809, ZQS1430, ZQS1431, ZQS1480, ZQS1481, ZQS1203, ZQS4271, ZQS1215, ZQS6140, ZQS1429, ZQS6138, ZQS6142, ZQS6141, P5, P1, T2, HDY-G42, HDY-G34, JM01, BR30, BR88, BR100, BR110, G4, G600, S1, S9, S16, S22, S24, S30, S31, S34, S77, S11, S18, S19, SC211, SC212, SC215, SC218, SC219, SC318, X6, X3, Y5, EBS-705, S8, A10, DW13, N10, H11, Q1, GT101, H3, K3, KTX-1588A, P2, T1, S15, G3, Z3, A9, ZQS6138, G6, J007, KTS-1183, KTS-1018A, KTS-1018E, KTS-1018P, KTS-1102C, KTX-1055T, KTS-1057, KTS-1087, KTS-1092, KTS-1171, KTS-1093, KTS-1185, KTS-1225, KTS-1276, KTS-1236, GTS-1173, KTS-1251, KTS-1337, GTS-1345, GTS-1346, GTS-1347, GTS-1348, GTS-1349, KTS-1369, KTS-1370, KTS-1350, KTS-1335, KTS-1315, GTS-1360, GTS-1362, GTS-1363, GTS-1375, GTS-1361, KTS-1576, GTS-1523, GTS-1661, GTS-1533, KTS-1253, KTX-1586B, KTX-1586A, KTX-1586C, GTS-1546, KTS-1580, GTS-1545, GTS-1628, GTS-1629, GTS-1373, GTS-1551, GTS-1552, BTS-1321, KTS-1720, KTS-1721, GTS-1372, KTS-1437, KTS-1099, KTS-1190, KTS-1265, KTS-1296, KTS-1267, KTS-1527, GTS-1571, GTS-1557, KTS-1083, KTX-1259, KTS-1600, GTS-1309, ZQS8149, ZQS8152, E-30XX, E-33XX, E-34XX, E-35XX, E-40XX, E-13XX, E-22XX, E-50XX, E-50XXD, E-50XXT, MS-11XXBT, MS-15XXBT, MS-16XXBT, MS-17XXBT, MS-18XXBT, MS-36XXBT, MS-22XXBT

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	5
2. TEST SUMMARY	6
3. MEASUREMENT UNCERTAINTY	7
4. PRODUCT INFORMATION AND TEST SETUP	8
4.1 Product Information	8
4.2 Test Setup Configuration	8
4.3 Support Equipment	8
4.4 Channel List	9
4.5 Test Mode	9
4.6 Test Environment	9
5. TEST FACILITY AND TEST INSTRUMENT USED	10
5.1 Test Facility	10
5.2 Test Instrument Used	10
6. AC POWER LINE CONDUCTED EMISSION	12
6.1 Block Diagram Of Test Setup	12
6.2 Limit	12
6.3 Test procedure	12
6.4 Test Result	14
7. RADIATED SPURIOUS EMISSION	16
7.1 Block Diagram Of Test Setup	16
7.2 Limit	16
7.3 Test procedure	17
7.4 Test Result	18
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	27
8.1 Block Diagram Of Test Setup	27
8.2 Limit	27
8.3 Test procedure	27
8.4 Test Result	28
9. CONDUCTED PEAK OUTPUT POWER	35
9.1 Block Diagram Of Test Setup	35
9.2 Limit	35
9.3 Test procedure	35
9.4 Test Result	36
10. 20DB OCCUPIED BANDWIDTH	40
10.1 Block Diagram Of Test Setup	40
10.2 Limit	40
10.3 Test procedure	40
10.4 Test Result	40
11. CARRIER FREQUENCIES SEPARATION	44
11.1 Block Diagram Of Test Setup	44
11.2 Limit	44
11.3 Test procedure	44
11.4 Test Result	44
12. HOPPING CHANNEL NUMBER	48
12.1 Block Diagram Of Test Setup	48
12.2 Limit	48
12.3 Test procedure	48
12.4 Test Result	48
13. DWELL TIME	50

13.1	Block Diagram Of Test Setup	50
13.2	Limit	50
13.3	Test procedure	50
13.4	Test Result	51
14.	PSEUDORANDOM FREQUENCY	55
14.1	Limit	55
14.2	Test procedure	55
14.3	Test Result	56
15.	ANTENNA REQUIREMENT	57
16.	EUT TEST SETUP PHOTOGRAPHS	58

(Note: N/A means not applicable)



1. VERSION

Report No.	Issue Date	Description	Approved
CTB231226035RFX	Dec. 26, 2023	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(1)	ANSI C63.10-2013	PASS
20dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Carrier Frequencies Separation	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Hopping Channel Number	47 CFR Part 15 Subpart C Section 15.247 (b)	ANSI C63.10-2013	PASS
Dwell Time	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15 Subpart C Section 15.247(a)&TCB Exclusion List (7 July 2002)	ANSI C63.10-2013	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1093	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	54.3kHz
Conducted output power Above 1G	0.9dB
Conducted output power below 1G	0.9dB
Power Spectral Density , Conduction	0.9dB
Conduction spurious emissions	2.0dB
Out of band emission	2.0dB
3m chamber Radiated spurious emission(9KHz-30MHz)	4.8dB
3m chamber Radiated spurious emission(30MHz-1GHz)	4.6dB
3m chamber Radiated spurious emission(1GHz-18GHz)	5.1dB
3m chamber Radiated spurious emission(18GHz-40GHz)	3.4dB
humidity uncertainty	5.5%
Temperature uncertainty	0.63°C
frequency	1×10 ⁻⁷
Conducted Emission (150KHz-30MHz)	3.2 dB
Radiated Emission(30MHz ~ 1000MHz)	4.8 dB
Radiated Emission(1GHz ~6GHz)	4.9 dB

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	GTS-1558, See page 2 for other series models.
Model Description:	All the model are the same circuit and RF module, only for model name. Test sample model: GTS-1558
Bluetooth Version:	Bluetooth 5.0
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	Bluetooth: 2402-2480MHz
Max. RF output power:	Bluetooth: 4.36dBm
Type of Modulation:	Bluetooth: GFSK, $\pi/4$ DQPSK, 8DPSK
Antenna installation:	Bluetooth: PCB antenna
Antenna Gain:	Bluetooth: -0.58dBi
Ratings:	DC 5V charging from adapter DC 3.7V by battery

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	Adapter	JYIN	JY-05100C	/	/

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	79	/

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting (GFSK, $\pi/4$ DQPSK, 8DPSK)	2402MHz	2441MHz	2480MHz
Receiving (GFSK, $\pi/4$ DQPSK, 8DPSK)	2402MHz	2441MHz	2480MHz

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(DC):	3.7V
Normal Temperature($^{\circ}$ C)	23
Low Temperature($^{\circ}$ C)	0
High Temperature($^{\circ}$ C)	40

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinghe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

Item	Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	2024.07.05
2	Power Sensor	Agilent	U2021XA	MY56120032	2024.07.05
3	Power Sensor	Agilent	U2021XA	MY56120034	2024.07.05
4	Communication test set	R&S	CMW500	108058	2024.07.05
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	2024.07.05
6	Signal Generator	Agilent	N5181A	MY50140365	2024.07.05
7	Vector signal generator	Agilent	N5182A	MY47420195	2024.07.05
8	Communication test set	Agilent	E5515C	MY50102567	2024.07.06
9	2.4 GHz Filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	2024.07.05
10	5 GHz Filter	Shenxiang	MSF5150-5850 MS-1155	20181015001	2024.07.06
11	Filter	Xingbo	XBLBQ-DZA120	190821-1-1	2024.07.06
12	BT&WI-FI Automatic test software	Microwave	MTS8000	Ver. 2.0.0.0	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2024.10.30
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2024.07.05
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/
16	966 chamber	C.R.T.	966	/	2024.08.11
17	Receiver	R&S	ESPI	100362	2024.07.05
18	Amplifier	HP	8447E	2945A02747	2024.07.05
19	Amplifier	Agilent	8449B	3008A01838	2024.07.05
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2024.07.08


21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	2024.07.08
22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	2024.07.08
24	loop antenna	ZHINAN	ZN30900A	GTS534	/
25	40G Horn antenna	A/H/System	SAS-574	588	2024.10.30
26	Amplifier	AEROFLEX	Aeroflex	097	2024.07.05

Continuous disturbance					
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	LISN	ROHDE&SCHWARZ	ESH3-Z5	100318	2024.07.05
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	2024.07.05
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2024.07.05
4	Coaxial cable	ZDECL	Z302S-NJ-SMA J-12M	18091905	2024.07.05
5	ISN	Schwarzbeck	NTFM8158	183	2024.07.05
6	Communication test set	Agilent	E5515C	MY50102567	2024.07.05
7	Communication test set	R&S	CMW500	108058	2024.07.05
8	EZ-EMC	Frad	EMC-con3A1.1	/	/

Radiated emission					
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	2024.07.08
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2024.07.08
3	Amplifier	Agilent	8449B	3008A01838	2024.07.05
4	Amplifier	HP	8447E	2945A02747	2024.07.05
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2024.07.05
6	Coaxial cable	ETS	RFC-SNS-100-NMS-80 NI	/	2024.07.05
7	Coaxial cable	ETS	RFC-SNS-100-NMS-20 NI	/	2024.07.05
8	Coaxial cable	ETS	RFC-SNS-100-SMS-20 NI	/	2024.07.05
9	Coaxial cable	ETS	RFC-NNS-100-NMS-300 NI	/	2024.07.05
10	Communication test set	Agilent	E5515C	MY50102567	2024.07.05
11	Communication test set	R&S	CMW500	108058	2024.07.05
12	EZ-EMC	Frad	EMC-con3A1.1	/	/

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

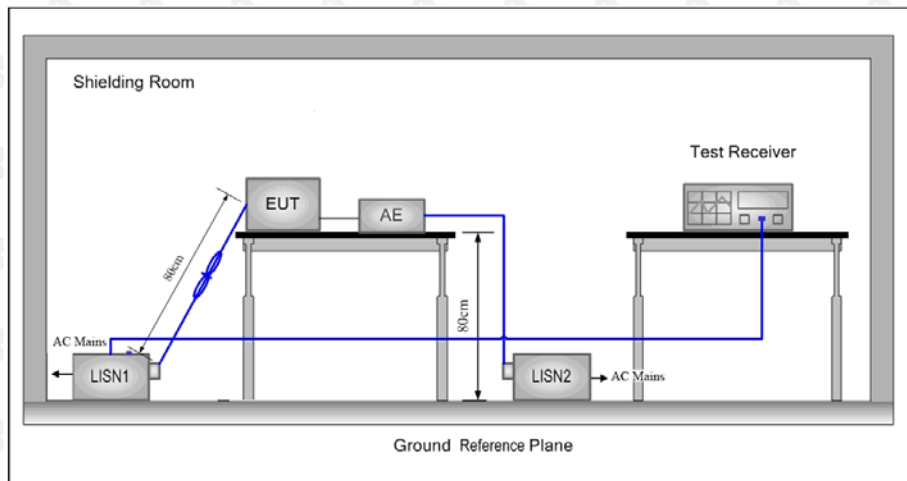

6.2 Limit

Table 4 – AC power-line conducted emissions limits

Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 Ω /50 μ H + 5 Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane.

This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.
- 6) All modes were tested at AC 120V and 240V, only the worst result of AC 120V 60Hz was reported.
- 7) If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.

6.4 Test Result

L: Worst case-GFSK(low channel)

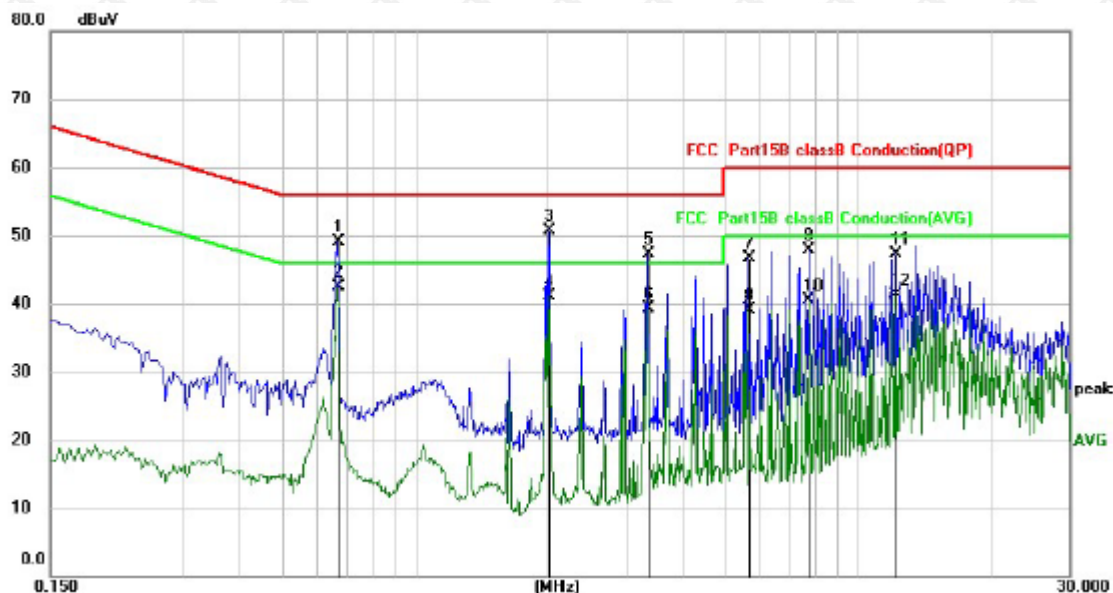


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.6700	39.12	10.02	49.14	56.00	-6.86	QP
2	*	0.6700	32.49	10.02	42.51	46.00	-3.49	AVG
3		2.0100	40.65	10.09	50.74	56.00	-5.26	QP
4		2.0100	31.00	10.09	41.09	46.00	-4.91	AVG
5		3.3500	37.07	10.22	47.29	56.00	-8.71	QP
6		3.3500	29.17	10.22	39.39	46.00	-6.61	AVG
7		5.6539	36.35	10.43	46.78	60.00	-13.22	QP
8		5.6539	28.69	10.43	39.12	50.00	-10.88	AVG
9		7.7458	37.35	10.53	47.88	60.00	-12.12	QP
10		7.7458	29.94	10.53	40.47	50.00	-9.53	AVG
11		12.1379	36.67	10.64	47.31	60.00	-12.69	QP
12		12.1379	30.65	10.64	41.29	50.00	-8.71	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

N: Worst case-GFSK(low channel)

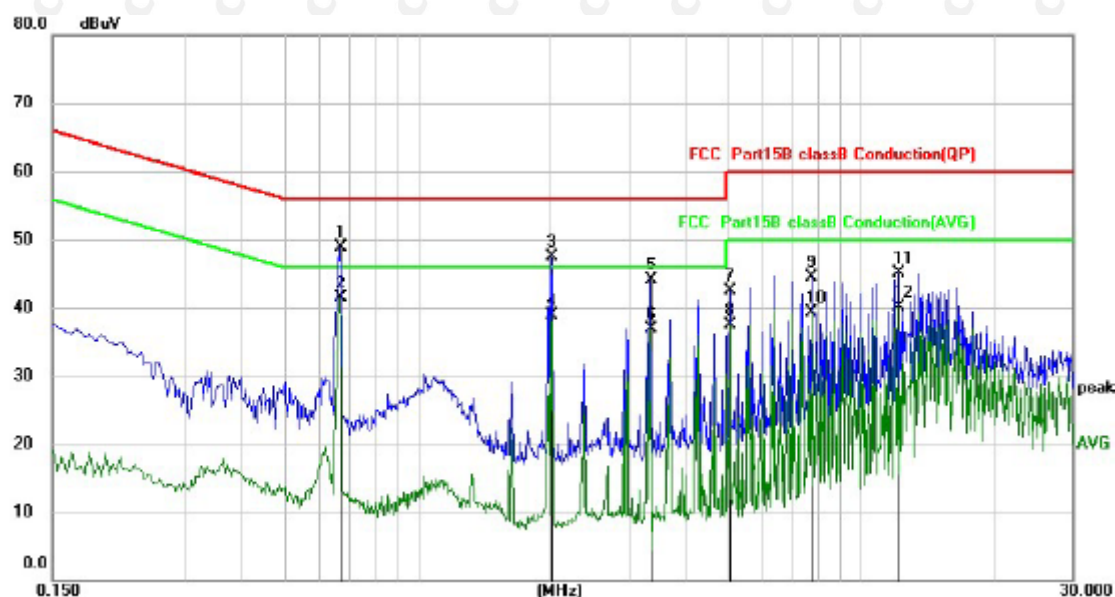

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.6700	38.86	10.02	48.88	56.00	-7.12	QP
2	*	0.6700	31.54	10.02	41.56	46.00	-4.44	AVG
3		2.0100	37.46	10.09	47.55	56.00	-8.45	QP
4		2.0100	28.81	10.09	38.90	46.00	-7.10	AVG
5		3.3500	33.79	10.22	44.01	56.00	-11.99	QP
6		3.3500	26.73	10.22	36.95	46.00	-9.05	AVG
7		5.0658	32.06	10.38	42.44	60.00	-17.56	QP
8		5.0658	27.14	10.38	37.52	50.00	-12.48	AVG
9		7.7458	33.88	10.53	44.41	60.00	-15.59	QP
10		7.7458	28.74	10.53	39.27	50.00	-10.73	AVG
11		12.1379	34.38	10.64	45.02	60.00	-14.98	QP
12		12.1379	29.43	10.64	40.07	50.00	-9.93	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

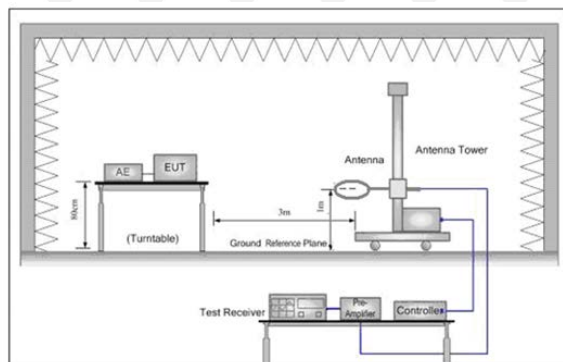


Figure 1. Below 30MHz

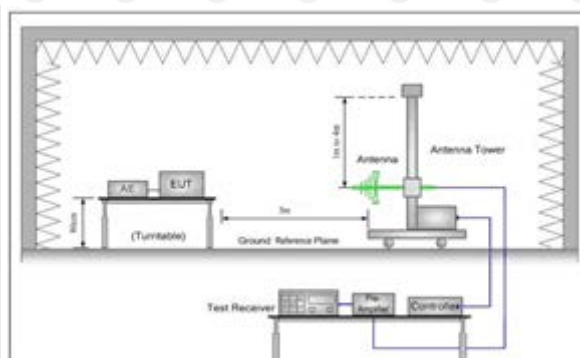


Figure 2. 30MHz to 1GHz

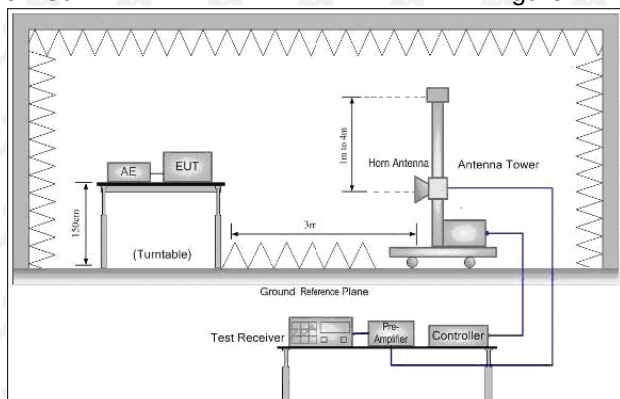


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- a.The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f.If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g.Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h.Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- i.Repeat above procedures until all frequencies measured was complete.
- j. Full battery is used during test

Receiver set:


Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

7.4 Test Result

Below 1GHz Test Results:

Antenna polarity: H


Worst case-GFSK(low channel)

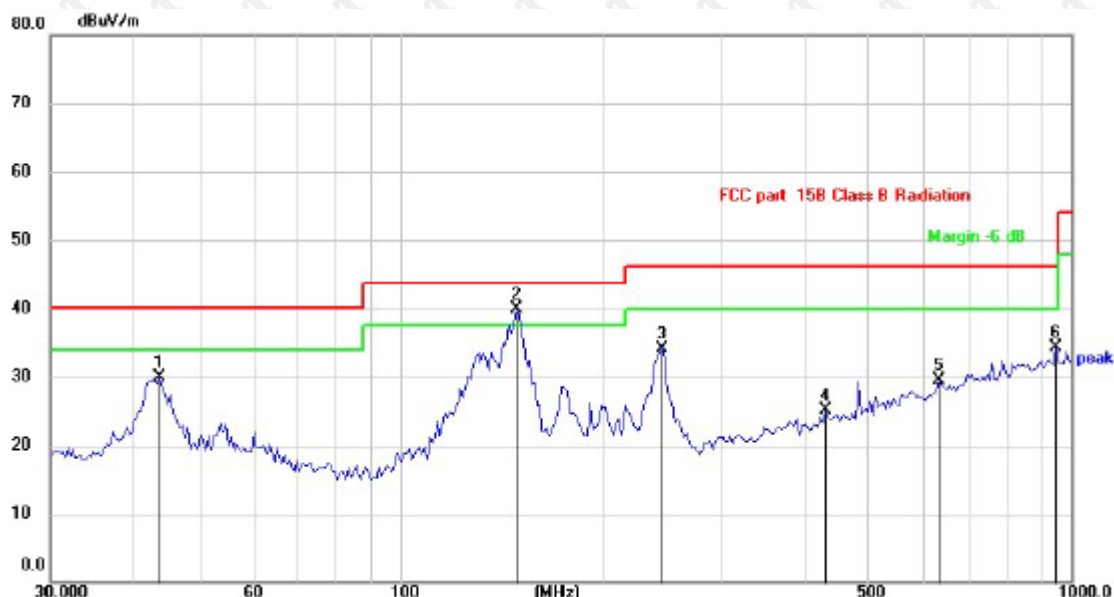

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		43.7351	35.28	-5.47	29.81	40.00	-10.19	QP
2	*	149.2238	43.17	-3.26	39.91	43.50	-3.59	QP
3		245.9508	41.14	-6.95	34.19	46.00	-11.81	QP
4		431.0314	26.65	-1.47	25.18	46.00	-20.82	QP
5		633.9072	26.18	3.28	29.46	46.00	-16.54	QP
6		948.7608	26.94	7.36	34.30	46.00	-11.70	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Antenna polarity: V
Worst case-GFSK(low channel)

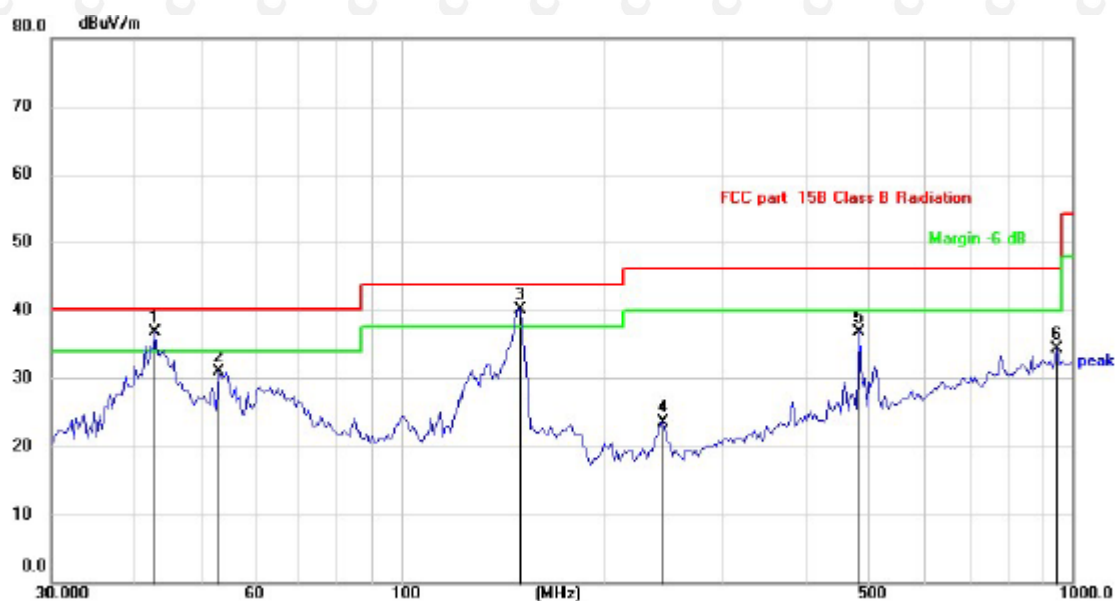

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	!	42.9750	41.95	-5.33	36.62	40.00	-3.38	QP
2		53.5052	37.54	-6.67	30.87	40.00	-9.13	QP
3	*	150.5377	43.37	-3.19	40.18	43.50	-3.32	QP
4		245.9507	30.54	-6.95	23.59	46.00	-22.41	QP
5		483.0615	37.13	-0.33	36.80	46.00	-9.20	QP
6		948.7608	27.00	7.36	34.36	46.00	-11.64	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Above 1 GHz Test Results:

CH Low (2402MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4804	57.44	-3.65	53.79	74.00	-20.21	peak
4804	50.98	-3.65	47.33	54.00	-6.67	AVG
7206	60.16	-0.95	59.21	74.00	-14.79	peak
7206	41.08	-0.95	40.13	54.00	-13.87	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4804	56.48	-3.65	52.83	74.00	-21.17	peak
4804	49.39	-3.65	45.74	54.00	-8.26	AVG
7206	59.34	-0.95	58.39	74.00	-15.61	peak
7206	42.94	-0.95	41.99	54.00	-12.01	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

CH Middle (2441MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4882.00	59.67	-3.54	56.13	74.00	-17.87	peak
4882.00	48.35	-3.54	44.81	54.00	-9.19	AVG
7323.00	55.63	-0.81	54.82	74.00	-19.18	peak
7323.00	42.42	-0.81	41.61	54.00	-12.39	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4882.00	57.23	-3.54	53.69	74.00	-20.31	peak
4882.00	48.95	-3.54	45.41	54.00	-8.59	AVG
7323.00	56.79	-0.81	55.98	74.00	-18.02	peak
7323.00	41.82	-0.81	41.01	54.00	-12.99	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

CH High (2480MHz)
Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	58.17	-3.43	54.74	74.00	-19.26	peak
4960	49.71	-3.44	46.27	54.00	-7.73	AVG
7440	60.70	-0.77	59.93	74.00	-14.07	peak
7440	40.10	-0.77	39.33	54.00	-14.67	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	58.41	-3.43	54.98	74.00	-19.02	peak
4960	48.29	-3.44	44.85	54.00	-9.15	AVG
7440	59.99	-0.77	59.22	74.00	-14.78	peak
7440	40.34	-0.77	39.57	54.00	-14.43	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report

Restricted bands around fundamental frequency (Radiated)

hopping

Operation Mode: TX CH Low (2402MHz)

Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	57.34	-5.81	51.53	74.00	-22.47	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.56	-5.84	49.72	74.00	-24.28	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	57.15	-5.81	51.34	74.00	-22.66	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	56.83	-5.84	50.99	74.00	-23.01	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	55.99	-5.81	50.18	74.00	-23.82	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	53.78	-6.06	47.72	74.00	-26.28	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	56.97	-5.81	51.16	74.00	-22.84	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.39	-6.06	48.33	74.00	-25.67	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

NO hopping

Operation Mode: TX CH Low (2402MHz)
Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	56.23	-5.81	50.42	74.00	-23.58	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	53.70	-5.84	47.86	74.00	-26.14	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	55.26	-5.81	49.45	74.00	-24.55	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	53.17	-5.84	47.33	74.00	-26.67	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	57.14	-5.81	51.33	74.00	-22.67	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	56.48	-6.06	50.42	74.00	-23.58	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						


Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	56.20	-5.81	50.39	74.00	-23.61	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.15	-6.06	48.09	74.00	-25.91	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

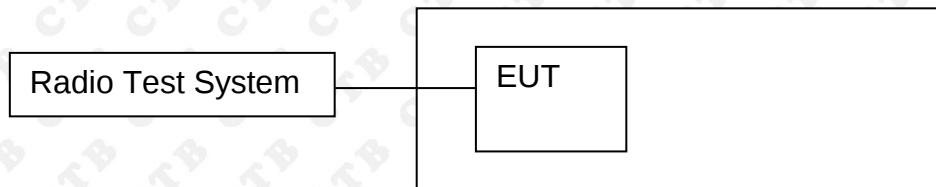

8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:

Below 30MHz:

RBW = 100kHz, VBW = 300kHz, Sweep = auto


Detector function = peak, Trace = max hold

Above 30MHz:


RBW = 100KHz, VBW = 300KHz, Sweep = auto

Detector function = peak, Trace = max hold


8.4 Test Result

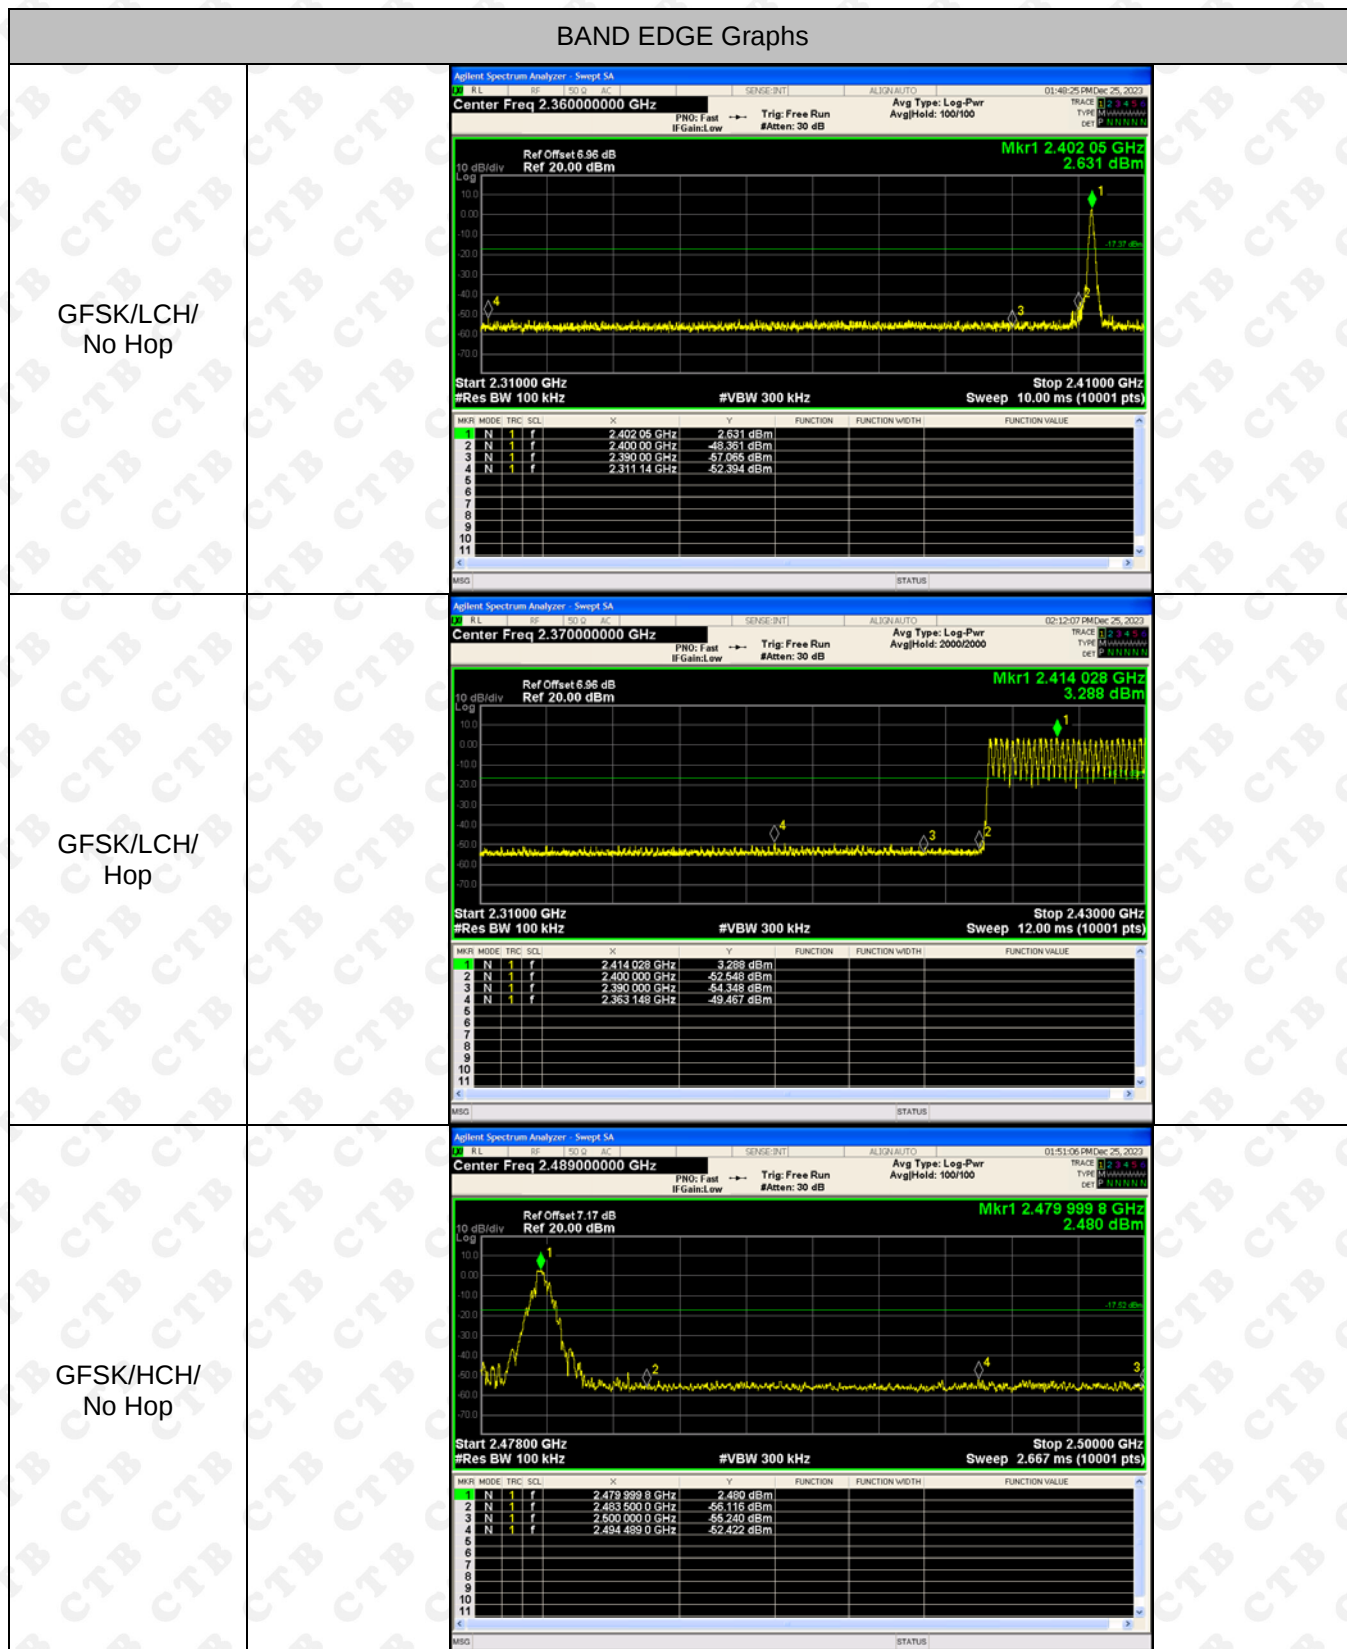


GFSK/HCH/
Hop



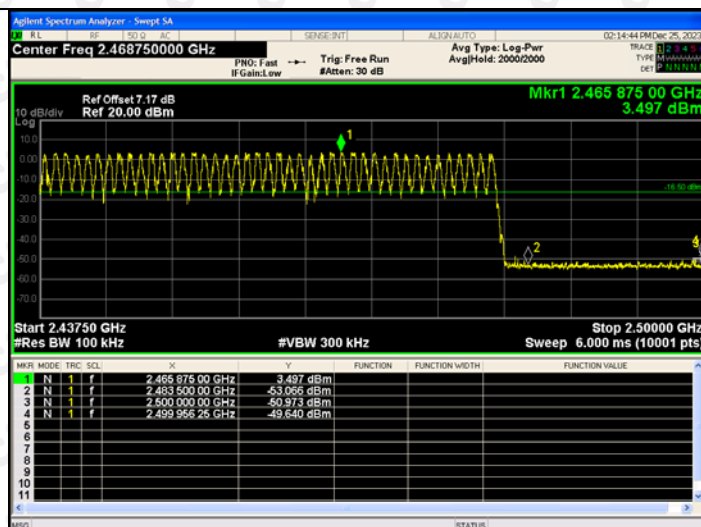


$\pi/4$ DQPSK/LCH/
No Hop

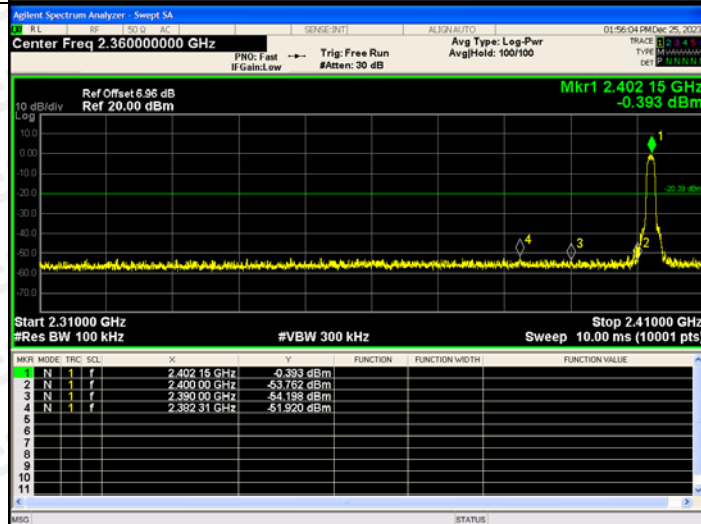


$\pi/4$ DQPSK/LCH/
Hop

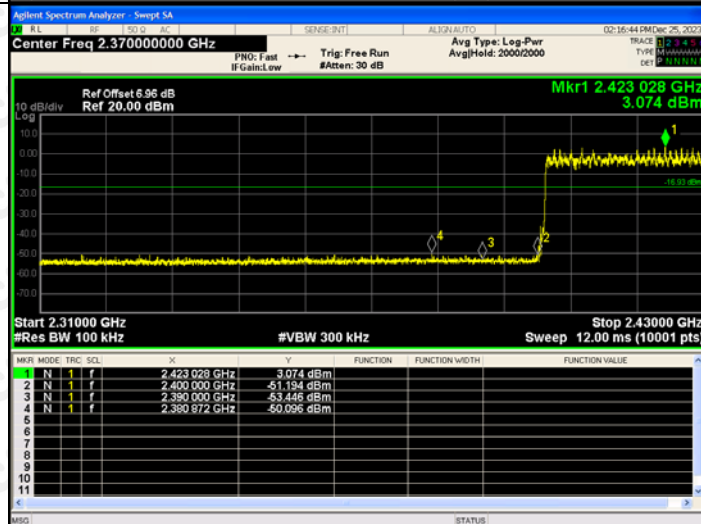


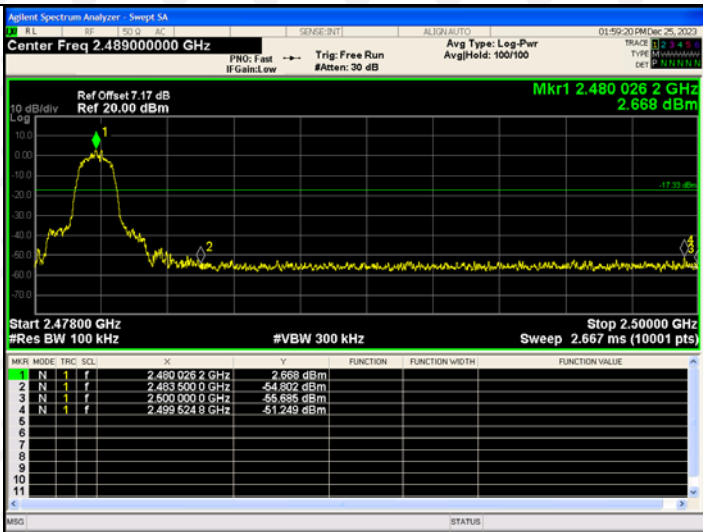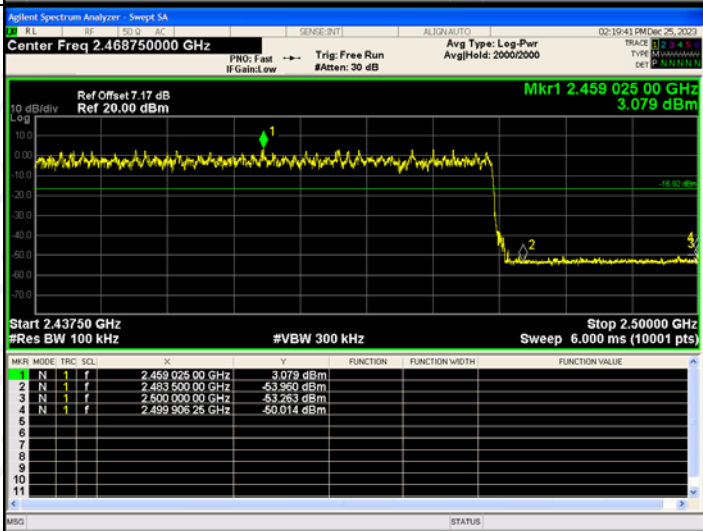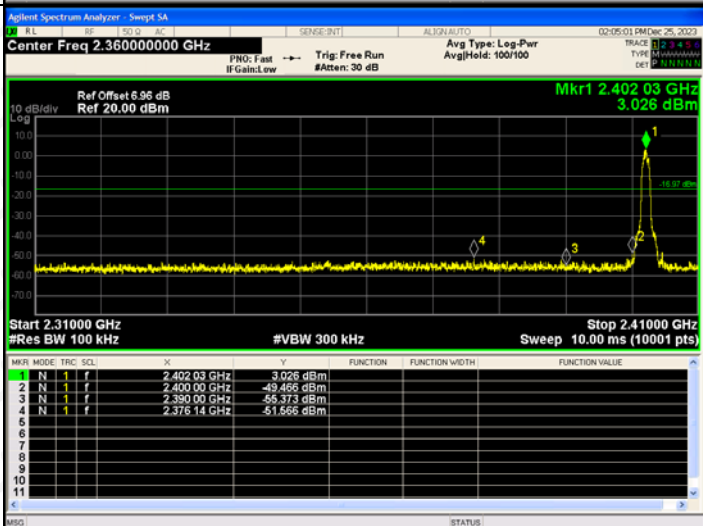$\pi/4$ DQPSK/HCH/ No Hop	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.489000000 GHz Ref Offset 7.17 dB Ref 20.00 dBm Mkr1 2.480 026 2 GHz 2.668 dBm Start 2.47800 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.50000 GHz Sweep 2.667 ms (10001 pts) <table><thead><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.480 026 2 GHz</td><td>2.668 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.483 500 0 GHz</td><td>-54.802 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.500 000 0 GHz</td><td>-56.896 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.499 524 8 GHz</td><td>-51.249 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.480 026 2 GHz	2.668 dBm				2	N	1	f	2.483 500 0 GHz	-54.802 dBm				3	N	1	f	2.500 000 0 GHz	-56.896 dBm				4	N	1	f	2.499 524 8 GHz	-51.249 dBm			
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.480 026 2 GHz	2.668 dBm																																									
2	N	1	f	2.483 500 0 GHz	-54.802 dBm																																									
3	N	1	f	2.500 000 0 GHz	-56.896 dBm																																									
4	N	1	f	2.499 524 8 GHz	-51.249 dBm																																									
$\pi/4$ DQPSK/HCH/ Hop	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.468750000 GHz Ref Offset 7.17 dB Ref 20.00 dBm Mkr1 2.459 025 00 GHz 3.079 dBm Start 2.43750 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.50000 GHz Sweep 6.000 ms (10001 pts) <table><thead><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.459 025 00 GHz</td><td>3.079 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.463 500 00 GHz</td><td>-53.960 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.500 000 00 GHz</td><td>-53.263 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.499 906 25 GHz</td><td>-50.014 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.459 025 00 GHz	3.079 dBm				2	N	1	f	2.463 500 00 GHz	-53.960 dBm				3	N	1	f	2.500 000 00 GHz	-53.263 dBm				4	N	1	f	2.499 906 25 GHz	-50.014 dBm			
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.459 025 00 GHz	3.079 dBm																																									
2	N	1	f	2.463 500 00 GHz	-53.960 dBm																																									
3	N	1	f	2.500 000 00 GHz	-53.263 dBm																																									
4	N	1	f	2.499 906 25 GHz	-50.014 dBm																																									
8DPSK/LCH/No Hop	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.360000000 GHz Ref Offset 6.96 dB Ref 20.00 dBm Mkr1 2.402 03 GHz 3.026 dBm Start 2.31000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.41000 GHz Sweep 10.00 ms (10001 pts) <table><thead><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.402 03 GHz</td><td>3.026 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.400 00 GHz</td><td>-49.466 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.390 00 GHz</td><td>-55.373 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.376 14 GHz</td><td>-51.666 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.402 03 GHz	3.026 dBm				2	N	1	f	2.400 00 GHz	-49.466 dBm				3	N	1	f	2.390 00 GHz	-55.373 dBm				4	N	1	f	2.376 14 GHz	-51.666 dBm			
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.402 03 GHz	3.026 dBm																																									
2	N	1	f	2.400 00 GHz	-49.466 dBm																																									
3	N	1	f	2.390 00 GHz	-55.373 dBm																																									
4	N	1	f	2.376 14 GHz	-51.666 dBm																																									


8DPSK
/LCH/Hop

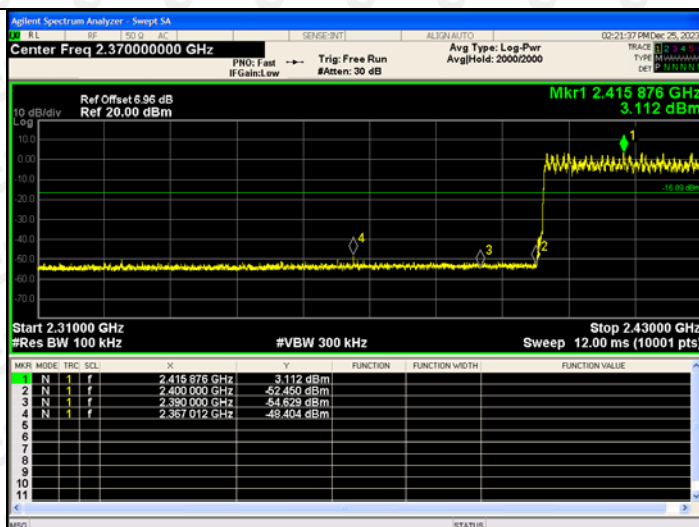

8DPSK /HCH/No
Hop

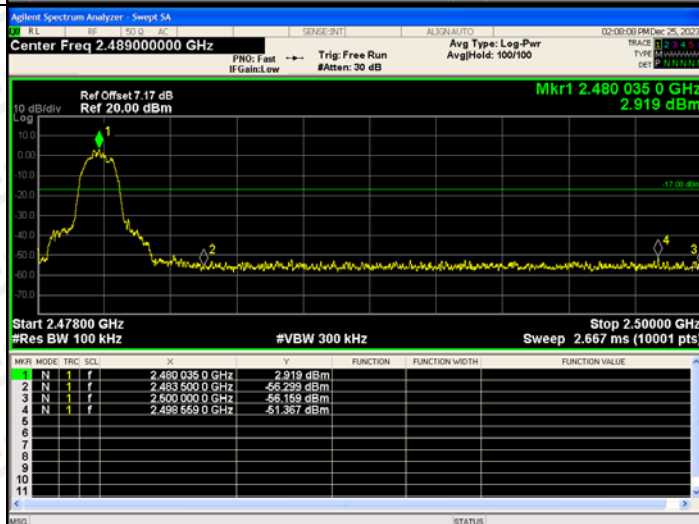


8DPSK
/HCH/Hop

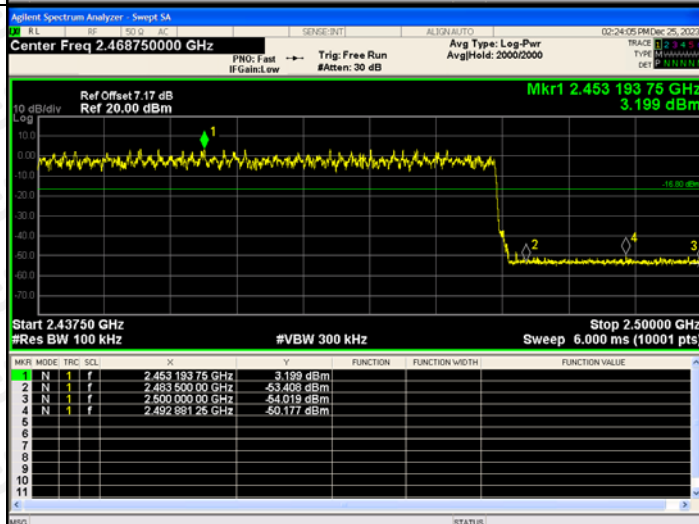


RF Conducted Spurious Emissions Graphs


GFSK/LCH

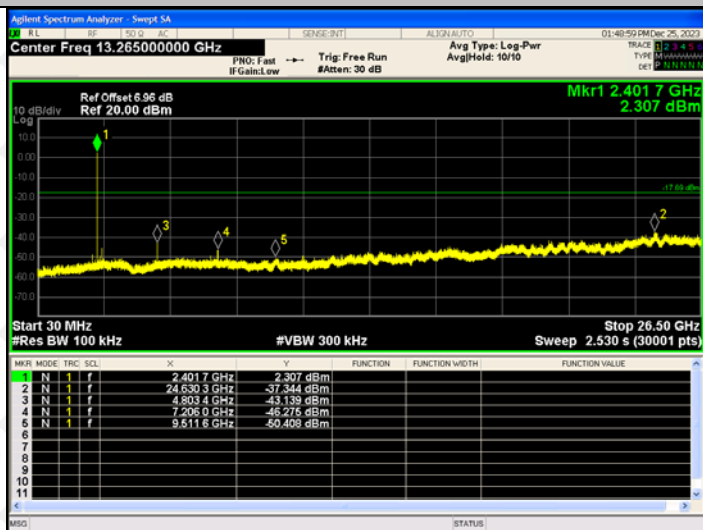

GFSK/MCH

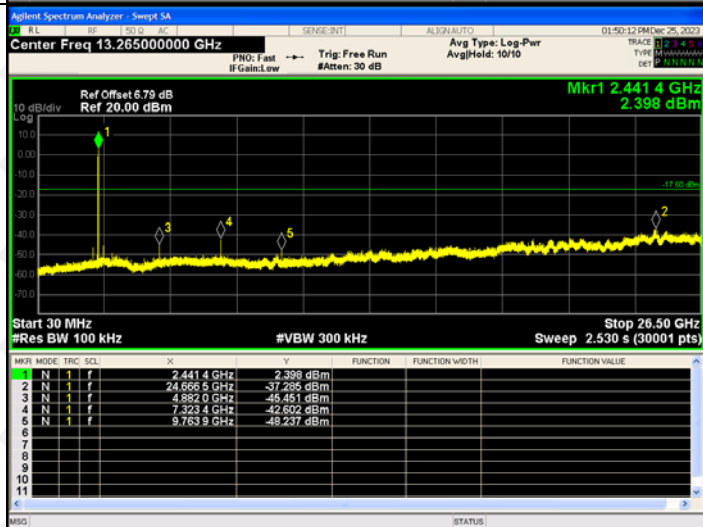


GFSK/HCH

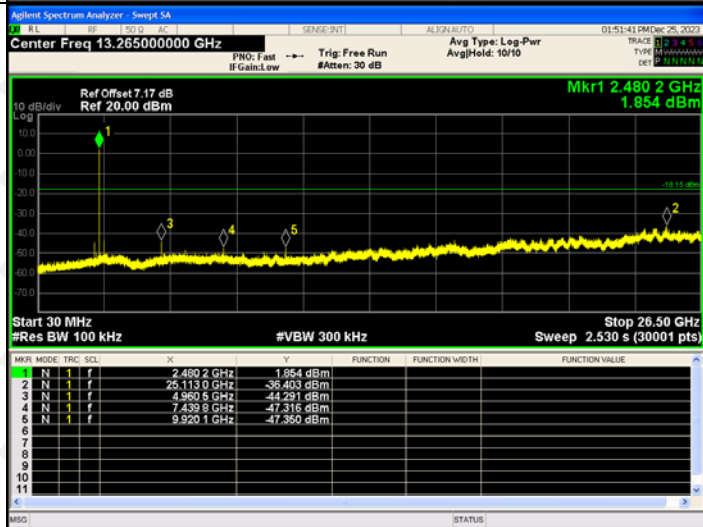


$\pi/4$ DQPSK /LCH	Agilent Spectrum Analyzer - Sweep SA RL IF 500 AC SENSE INT ALGN AUTO 01:56:40 PM Dec 25, 2023 Center Freq 13.265000000 GHz PN0: Fast IF Gain: Low Trig: Free Run Avg Type: Log-Pwr AvgHold: 10/10 Ref Offset 6.96 dB Ref 20.00 dBm Mkr1 2.402 6 GHz -1.711 dBm 10 dB/div Log 10 0.00 -10 -20 -30 -40 -50 -60 -70 Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>Mkr</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.402 6 GHz</td><td>-1.711 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.250 1 GHz</td><td>-37.388 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.804 3 GHz</td><td>-48.704 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.206 0 GHz</td><td>-48.156 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.607 7 GHz</td><td>-47.977 dBm</td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table> MSO (STATUS) <tr><td>$\pi/4$DQPSK/MCH</td><td> Agilent Spectrum Analyzer - Sweep SA RL IF 500 AC SENSE INT ALGN AUTO 01:56:33 PM Dec 25, 2023 Center Freq 13.265000000 GHz PN0: Fast IF Gain: Low Trig: Free Run Avg Type: Log-Pwr AvgHold: 10/10 Ref Offset 6.79 dB Ref 20.00 dBm Mkr1 2.441 4 GHz -2.699 dBm 10 dB/div Log 10 0.00 -10 -20 -30 -40 -50 -60 -70 Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>Mkr</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.441 4 GHz</td><td>-2.699 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.694 7 GHz</td><td>-37.686 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.892 0 GHz</td><td>-48.683 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.323 4 GHz</td><td>-49.477 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.763 9 GHz</td><td>-48.707 dBm</td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table> MSO (STATUS) <tr><td>$\pi/4$DQPSK/HCH</td><td> Agilent Spectrum Analyzer - Sweep SA RL IF 500 AC SENSE INT ALGN AUTO 01:59:56 PM Dec 25, 2023 Center Freq 13.265000000 GHz PN0: Fast IF Gain: Low Trig: Free Run Avg Type: Log-Pwr AvgHold: 10/10 Ref Offset 7.17 dB Ref 20.00 dBm Mkr1 2.480 2 GHz 1.081 dBm 10 dB/div Log 10 0.00 -10 -20 -30 -40 -50 -60 -70 Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>Mkr</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.480 2 GHz</td><td>1.081 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.705 3 GHz</td><td>-36.749 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.953 8 GHz</td><td>-47.379 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.439 9 GHz</td><td>-47.934 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.920 1 GHz</td><td>-46.986 dBm</td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table> MSO (STATUS) </td></tr></td></tr>	Mkr	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.402 6 GHz	-1.711 dBm				2	N	1	f	24.250 1 GHz	-37.388 dBm				3	N	1	f	4.804 3 GHz	-48.704 dBm				4	N	1	f	7.206 0 GHz	-48.156 dBm				5	N	1	f	9.607 7 GHz	-47.977 dBm				6									7									8									9									10									11									$\pi/4$ DQPSK/MCH	Agilent Spectrum Analyzer - Sweep SA RL IF 500 AC SENSE INT ALGN AUTO 01:56:33 PM Dec 25, 2023 Center Freq 13.265000000 GHz PN0: Fast IF Gain: Low Trig: Free Run Avg Type: Log-Pwr AvgHold: 10/10 Ref Offset 6.79 dB Ref 20.00 dBm Mkr1 2.441 4 GHz -2.699 dBm 10 dB/div Log 10 0.00 -10 -20 -30 -40 -50 -60 -70 Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>Mkr</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.441 4 GHz</td><td>-2.699 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.694 7 GHz</td><td>-37.686 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.892 0 GHz</td><td>-48.683 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.323 4 GHz</td><td>-49.477 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.763 9 GHz</td><td>-48.707 dBm</td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table> MSO (STATUS) <tr><td>$\pi/4$DQPSK/HCH</td><td> Agilent Spectrum Analyzer - Sweep SA RL IF 500 AC SENSE INT ALGN AUTO 01:59:56 PM Dec 25, 2023 Center Freq 13.265000000 GHz PN0: Fast IF Gain: Low Trig: Free Run Avg Type: Log-Pwr AvgHold: 10/10 Ref Offset 7.17 dB Ref 20.00 dBm Mkr1 2.480 2 GHz 1.081 dBm 10 dB/div Log 10 0.00 -10 -20 -30 -40 -50 -60 -70 Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>Mkr</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.480 2 GHz</td><td>1.081 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.705 3 GHz</td><td>-36.749 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.953 8 GHz</td><td>-47.379 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.439 9 GHz</td><td>-47.934 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.920 1 GHz</td><td>-46.986 dBm</td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table> MSO (STATUS) </td></tr>	Mkr	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.441 4 GHz	-2.699 dBm				2	N	1	f	24.694 7 GHz	-37.686 dBm				3	N	1	f	4.892 0 GHz	-48.683 dBm				4	N	1	f	7.323 4 GHz	-49.477 dBm				5	N	1	f	9.763 9 GHz	-48.707 dBm				6									7									8									9									10									11									$\pi/4$ DQPSK/HCH	Agilent Spectrum Analyzer - Sweep SA RL IF 500 AC SENSE INT ALGN AUTO 01:59:56 PM Dec 25, 2023 Center Freq 13.265000000 GHz PN0: Fast IF Gain: Low Trig: Free Run Avg Type: Log-Pwr AvgHold: 10/10 Ref Offset 7.17 dB Ref 20.00 dBm Mkr1 2.480 2 GHz 1.081 dBm 10 dB/div Log 10 0.00 -10 -20 -30 -40 -50 -60 -70 Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>Mkr</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.480 2 GHz</td><td>1.081 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.705 3 GHz</td><td>-36.749 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.953 8 GHz</td><td>-47.379 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.439 9 GHz</td><td>-47.934 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.920 1 GHz</td><td>-46.986 dBm</td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table> MSO (STATUS)	Mkr	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.480 2 GHz	1.081 dBm				2	N	1	f	24.705 3 GHz	-36.749 dBm				3	N	1	f	4.953 8 GHz	-47.379 dBm				4	N	1	f	7.439 9 GHz	-47.934 dBm				5	N	1	f	9.920 1 GHz	-46.986 dBm				6									7									8									9									10									11								
Mkr	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																																																																																																																																																																																																																																																	
1	N	1	f	2.402 6 GHz	-1.711 dBm																																																																																																																																																																																																																																																																																																																																				
2	N	1	f	24.250 1 GHz	-37.388 dBm																																																																																																																																																																																																																																																																																																																																				
3	N	1	f	4.804 3 GHz	-48.704 dBm																																																																																																																																																																																																																																																																																																																																				
4	N	1	f	7.206 0 GHz	-48.156 dBm																																																																																																																																																																																																																																																																																																																																				
5	N	1	f	9.607 7 GHz	-47.977 dBm																																																																																																																																																																																																																																																																																																																																				
6																																																																																																																																																																																																																																																																																																																																									
7																																																																																																																																																																																																																																																																																																																																									
8																																																																																																																																																																																																																																																																																																																																									
9																																																																																																																																																																																																																																																																																																																																									
10																																																																																																																																																																																																																																																																																																																																									
11																																																																																																																																																																																																																																																																																																																																									
$\pi/4$ DQPSK/MCH	Agilent Spectrum Analyzer - Sweep SA RL IF 500 AC SENSE INT ALGN AUTO 01:56:33 PM Dec 25, 2023 Center Freq 13.265000000 GHz PN0: Fast IF Gain: Low Trig: Free Run Avg Type: Log-Pwr AvgHold: 10/10 Ref Offset 6.79 dB Ref 20.00 dBm Mkr1 2.441 4 GHz -2.699 dBm 10 dB/div Log 10 0.00 -10 -20 -30 -40 -50 -60 -70 Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>Mkr</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.441 4 GHz</td><td>-2.699 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.694 7 GHz</td><td>-37.686 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.892 0 GHz</td><td>-48.683 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.323 4 GHz</td><td>-49.477 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.763 9 GHz</td><td>-48.707 dBm</td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table> MSO (STATUS) <tr><td>$\pi/4$DQPSK/HCH</td><td> Agilent Spectrum Analyzer - Sweep SA RL IF 500 AC SENSE INT ALGN AUTO 01:59:56 PM Dec 25, 2023 Center Freq 13.265000000 GHz PN0: Fast IF Gain: Low Trig: Free Run Avg Type: Log-Pwr AvgHold: 10/10 Ref Offset 7.17 dB Ref 20.00 dBm Mkr1 2.480 2 GHz 1.081 dBm 10 dB/div Log 10 0.00 -10 -20 -30 -40 -50 -60 -70 Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>Mkr</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.480 2 GHz</td><td>1.081 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.705 3 GHz</td><td>-36.749 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.953 8 GHz</td><td>-47.379 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.439 9 GHz</td><td>-47.934 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.920 1 GHz</td><td>-46.986 dBm</td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table> MSO (STATUS) </td></tr>	Mkr	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.441 4 GHz	-2.699 dBm				2	N	1	f	24.694 7 GHz	-37.686 dBm				3	N	1	f	4.892 0 GHz	-48.683 dBm				4	N	1	f	7.323 4 GHz	-49.477 dBm				5	N	1	f	9.763 9 GHz	-48.707 dBm				6									7									8									9									10									11									$\pi/4$ DQPSK/HCH	Agilent Spectrum Analyzer - Sweep SA RL IF 500 AC SENSE INT ALGN AUTO 01:59:56 PM Dec 25, 2023 Center Freq 13.265000000 GHz PN0: Fast IF Gain: Low Trig: Free Run Avg Type: Log-Pwr AvgHold: 10/10 Ref Offset 7.17 dB Ref 20.00 dBm Mkr1 2.480 2 GHz 1.081 dBm 10 dB/div Log 10 0.00 -10 -20 -30 -40 -50 -60 -70 Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>Mkr</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.480 2 GHz</td><td>1.081 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.705 3 GHz</td><td>-36.749 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.953 8 GHz</td><td>-47.379 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.439 9 GHz</td><td>-47.934 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.920 1 GHz</td><td>-46.986 dBm</td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table> MSO (STATUS)	Mkr	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.480 2 GHz	1.081 dBm				2	N	1	f	24.705 3 GHz	-36.749 dBm				3	N	1	f	4.953 8 GHz	-47.379 dBm				4	N	1	f	7.439 9 GHz	-47.934 dBm				5	N	1	f	9.920 1 GHz	-46.986 dBm				6									7									8									9									10									11																																																																																																																						
Mkr	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																																																																																																																																																																																																																																																	
1	N	1	f	2.441 4 GHz	-2.699 dBm																																																																																																																																																																																																																																																																																																																																				
2	N	1	f	24.694 7 GHz	-37.686 dBm																																																																																																																																																																																																																																																																																																																																				
3	N	1	f	4.892 0 GHz	-48.683 dBm																																																																																																																																																																																																																																																																																																																																				
4	N	1	f	7.323 4 GHz	-49.477 dBm																																																																																																																																																																																																																																																																																																																																				
5	N	1	f	9.763 9 GHz	-48.707 dBm																																																																																																																																																																																																																																																																																																																																				
6																																																																																																																																																																																																																																																																																																																																									
7																																																																																																																																																																																																																																																																																																																																									
8																																																																																																																																																																																																																																																																																																																																									
9																																																																																																																																																																																																																																																																																																																																									
10																																																																																																																																																																																																																																																																																																																																									
11																																																																																																																																																																																																																																																																																																																																									
$\pi/4$ DQPSK/HCH	Agilent Spectrum Analyzer - Sweep SA RL IF 500 AC SENSE INT ALGN AUTO 01:59:56 PM Dec 25, 2023 Center Freq 13.265000000 GHz PN0: Fast IF Gain: Low Trig: Free Run Avg Type: Log-Pwr AvgHold: 10/10 Ref Offset 7.17 dB Ref 20.00 dBm Mkr1 2.480 2 GHz 1.081 dBm 10 dB/div Log 10 0.00 -10 -20 -30 -40 -50 -60 -70 Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>Mkr</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.480 2 GHz</td><td>1.081 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.705 3 GHz</td><td>-36.749 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.953 8 GHz</td><td>-47.379 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.439 9 GHz</td><td>-47.934 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.920 1 GHz</td><td>-46.986 dBm</td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table> MSO (STATUS)	Mkr	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.480 2 GHz	1.081 dBm				2	N	1	f	24.705 3 GHz	-36.749 dBm				3	N	1	f	4.953 8 GHz	-47.379 dBm				4	N	1	f	7.439 9 GHz	-47.934 dBm				5	N	1	f	9.920 1 GHz	-46.986 dBm				6									7									8									9									10									11																																																																																																																																																																																																																																				
Mkr	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																																																																																																																																																																																																																																																	
1	N	1	f	2.480 2 GHz	1.081 dBm																																																																																																																																																																																																																																																																																																																																				
2	N	1	f	24.705 3 GHz	-36.749 dBm																																																																																																																																																																																																																																																																																																																																				
3	N	1	f	4.953 8 GHz	-47.379 dBm																																																																																																																																																																																																																																																																																																																																				
4	N	1	f	7.439 9 GHz	-47.934 dBm																																																																																																																																																																																																																																																																																																																																				
5	N	1	f	9.920 1 GHz	-46.986 dBm																																																																																																																																																																																																																																																																																																																																				
6																																																																																																																																																																																																																																																																																																																																									
7																																																																																																																																																																																																																																																																																																																																									
8																																																																																																																																																																																																																																																																																																																																									
9																																																																																																																																																																																																																																																																																																																																									
10																																																																																																																																																																																																																																																																																																																																									
11																																																																																																																																																																																																																																																																																																																																									


8DPSK /LCH

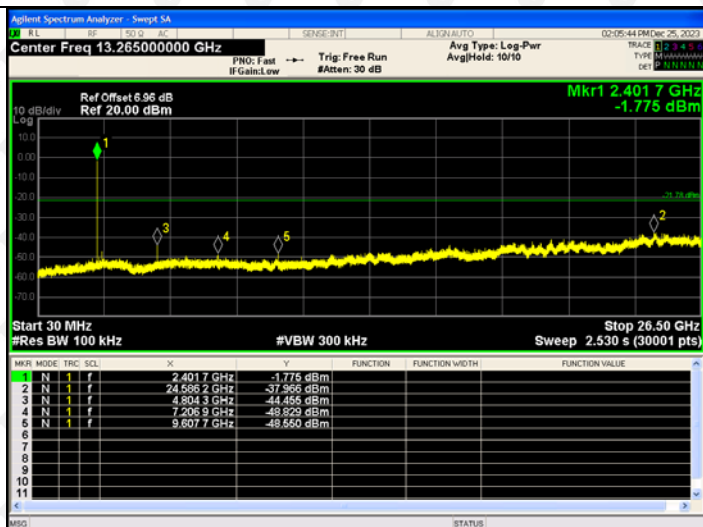

8DPSK /MCH

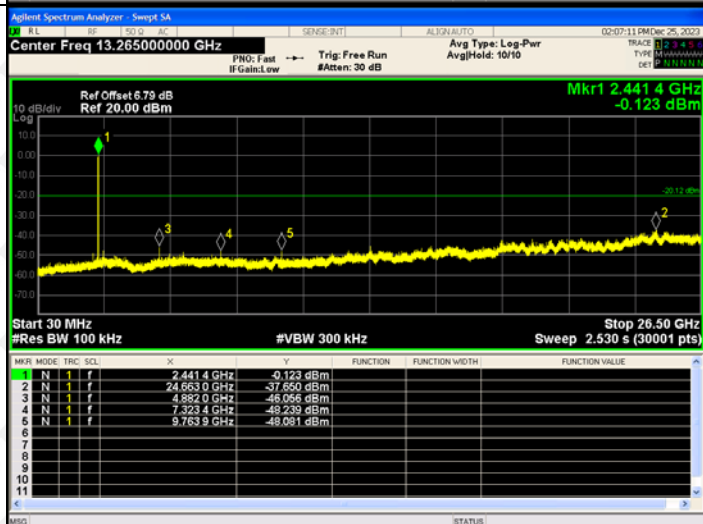


8DPSK /HCH

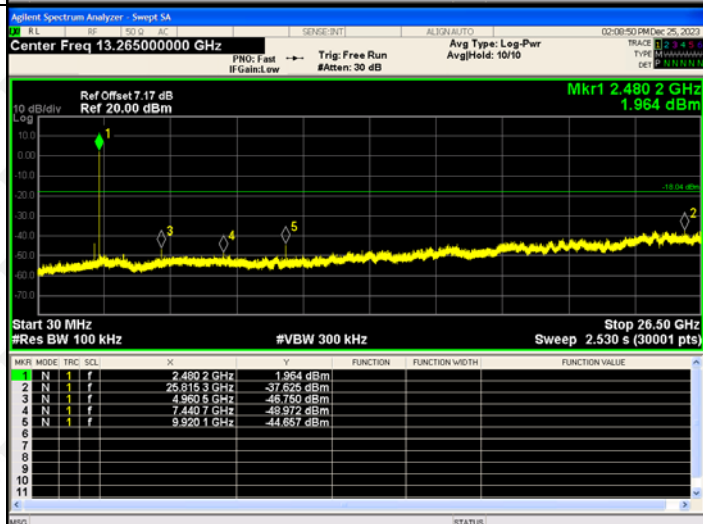

9. COUDUCTED PEAK OUTPUT POWER

9.1 Block Diagram Of Test Setup

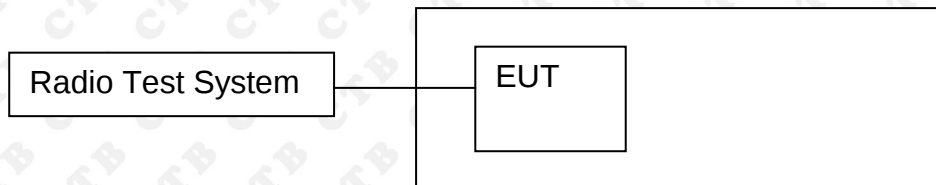

9.2 Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.


9.3 Test procedure




1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 2MHz. VBW = 6MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.




9.4 Test Result

Mode	Channel.	Maximum Peak Output Power [dBm]	Limit [dBm]	Verdict
EDR mode (GFSK)	LCH	3.293	20.97	PASS
	MCH	2.943	20.97	PASS
	HCH	3.281	20.97	PASS
EDR mode ($\pi/4$ DQPSK)	LCH	4.095	20.97	PASS
	MCH	3.667	20.97	PASS
	HCH	4.005	20.97	PASS
EDR mode (8DPSK)	LCH	4.36	20.97	PASS
	MCH	3.97	20.97	PASS
	HCH	4.186	20.97	PASS

Test Graph:

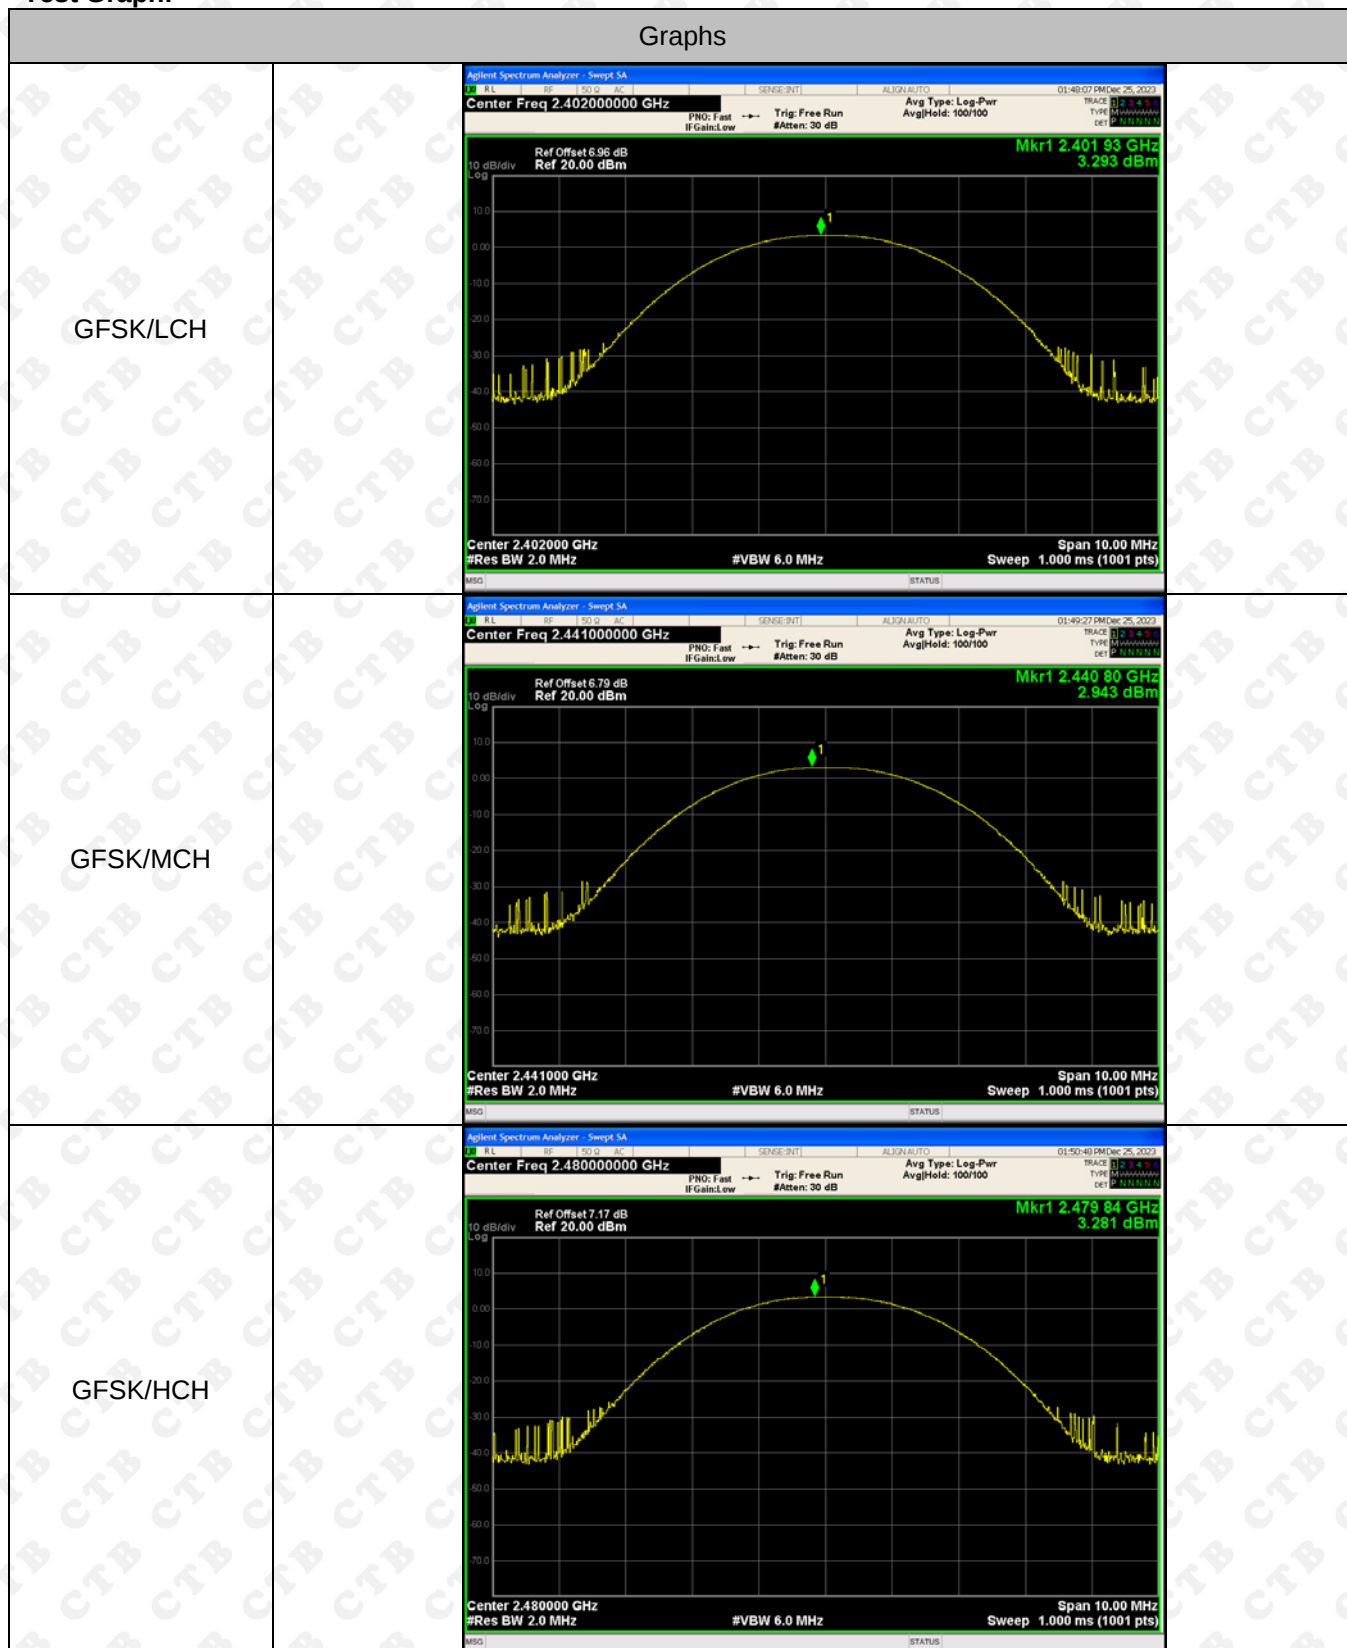


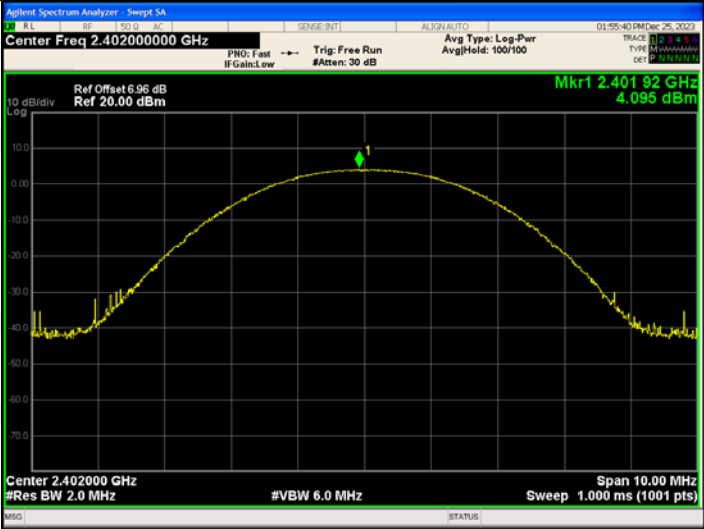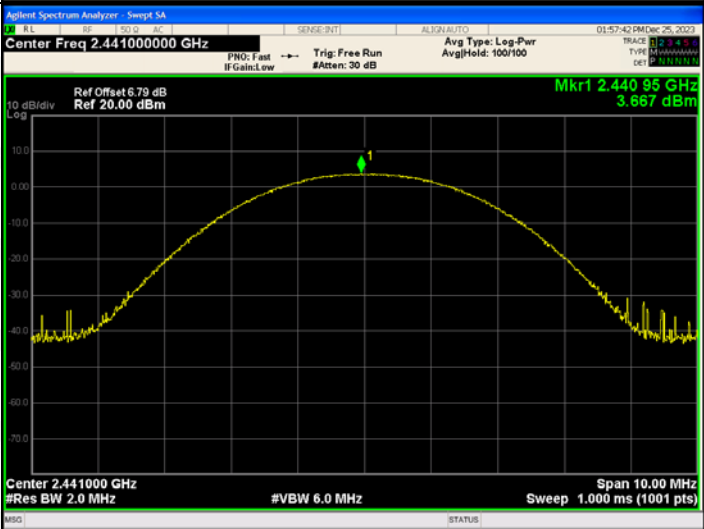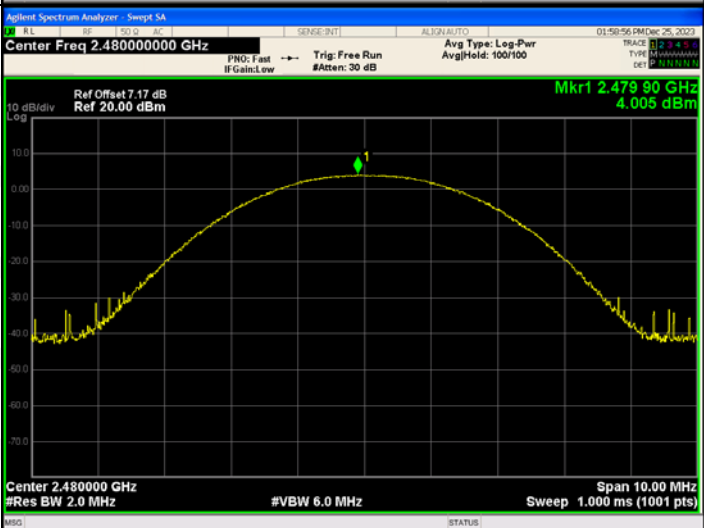$\pi/4$ DQPSK/LCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.40200000 GHz Ref Offset 6.96 dB Ref 20.00 dBm Mkr1 2.40192 GHz 4.095 dBm Center 2.402000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)
$\pi/4$ DQPSK/MCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.44100000 GHz Ref Offset 6.79 dB Ref 20.00 dBm Mkr1 2.44095 GHz 3.667 dBm Center 2.441000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)
$\pi/4$ DQPSK/HCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.48000000 GHz Ref Offset 7.17 dB Ref 20.00 dBm Mkr1 2.47990 GHz 4.005 dBm Center 2.480000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)

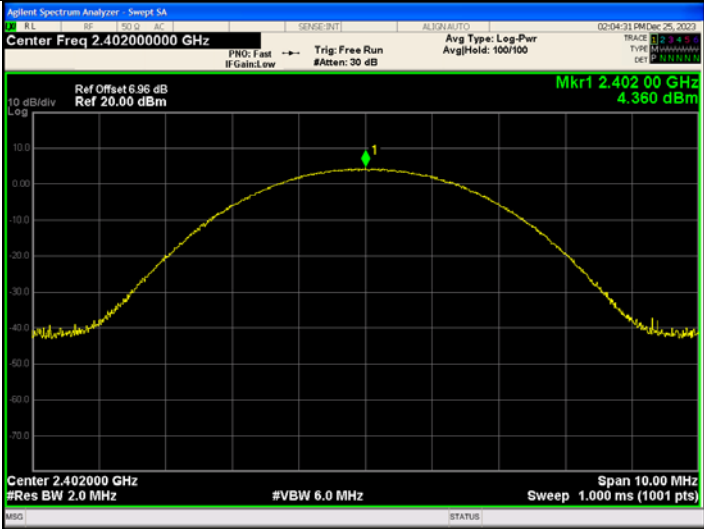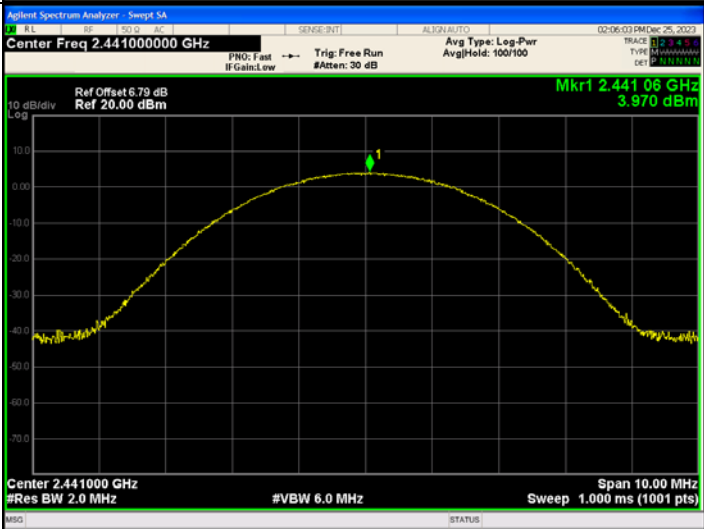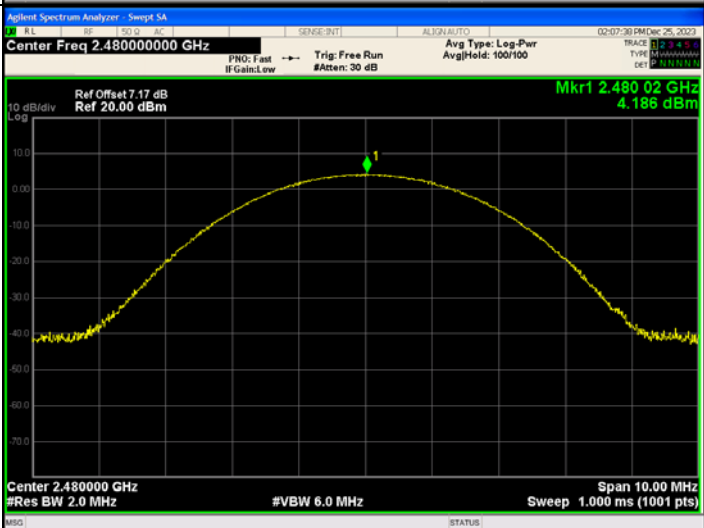8DPSK/LCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.40200000 GHz Ref Offset 6.96 dB Ref 20.00 dBm Mkr1 2.402 00 GHz 4.360 dBm Center 2.402000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)
8DPSK /MCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.44100000 GHz Ref Offset 6.79 dB Ref 20.00 dBm Mkr1 2.441 00 GHz 3.970 dBm Center 2.441000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)
8DPSK /HCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.48000000 GHz Ref Offset 7.17 dB Ref 20.00 dBm Mkr1 2.480 02 GHz 4.186 dBm Center 2.480000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)

10. 20DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

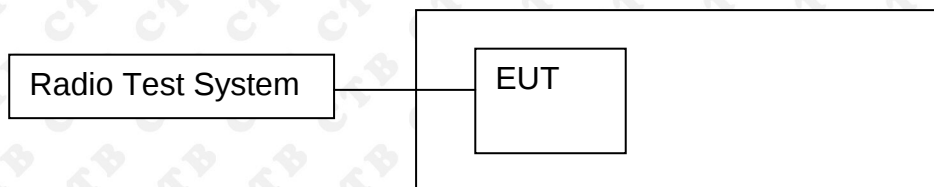

10.2 Limit

Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mw.

10.3 Test procedure




1. Rem1. Set RBW = 30 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result




Test Mode	Frequency	20dB Bandwidth (MHz)	Result
GFSK	Low channel	0.877	PASS
	Mid channel	0.846	PASS
	High channel	0.936	PASS
$\pi/4$ DQPSK	Low channel	1.308	PASS
	Mid channel	1.283	PASS
	High channel	1.318	PASS
8DPSK	Low channel	1.294	PASS
	Mid channel	1.347	PASS
	High channel	1.327	PASS

Note: All modes of operation were Pre-scan and the worst-case emissions are reported.

Test Graph:

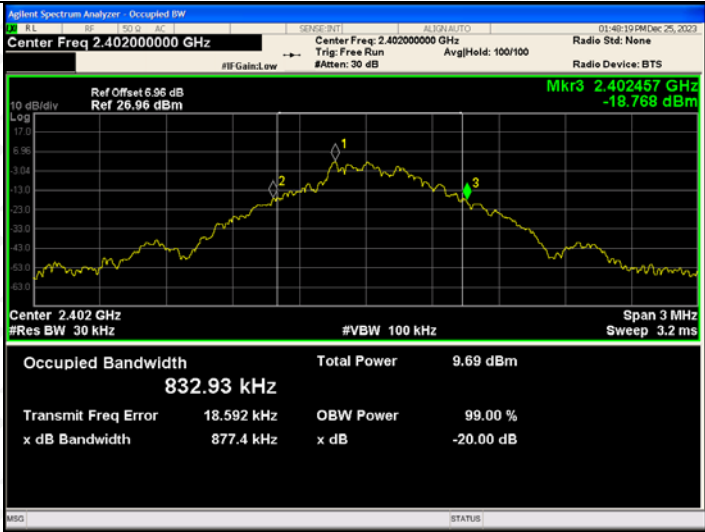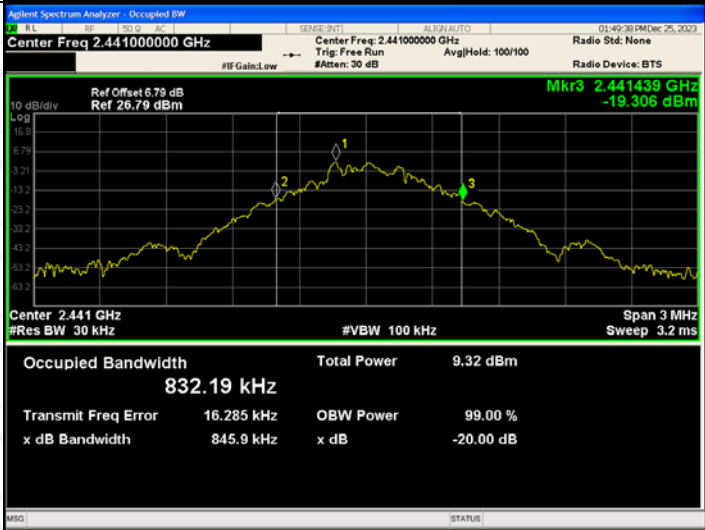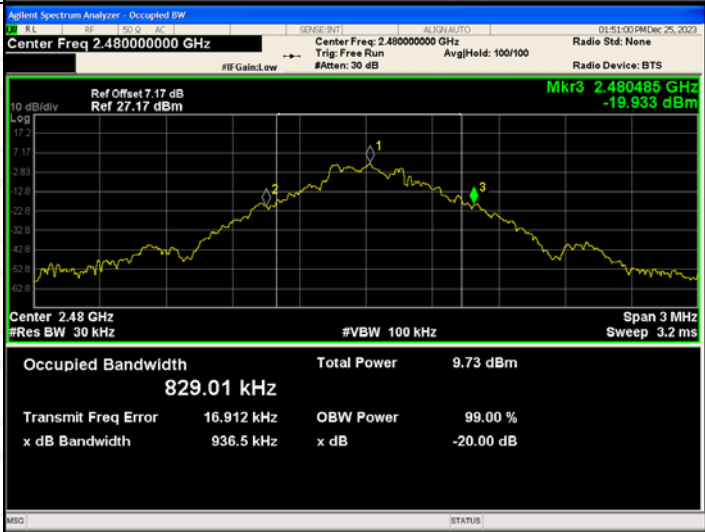
GFSK Low channel	
GFSK Mid channel	
GFSK High channel	

$\pi/4$-DQPSK Low channel	
$\pi/4$-DQPSK Mid channel	
$\pi/4$-DQPSK High channel	

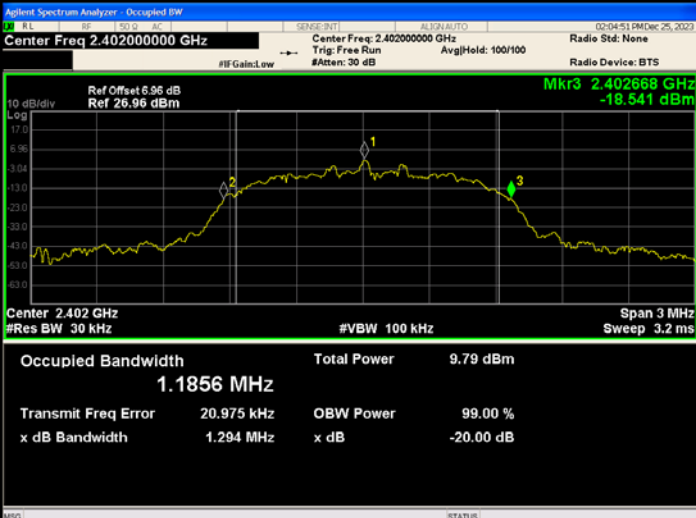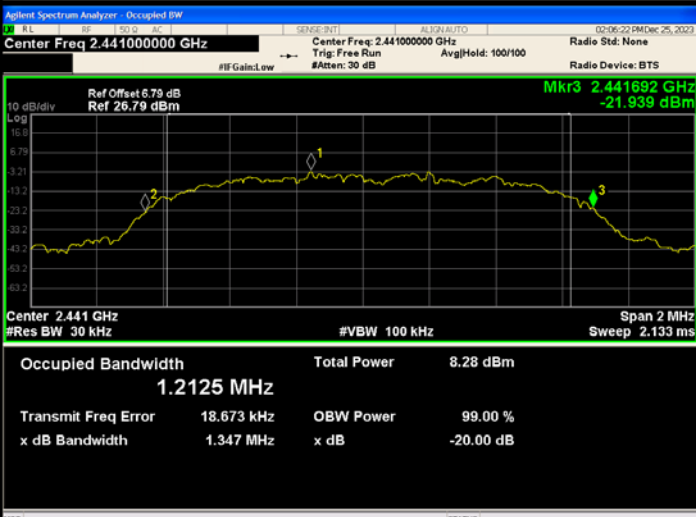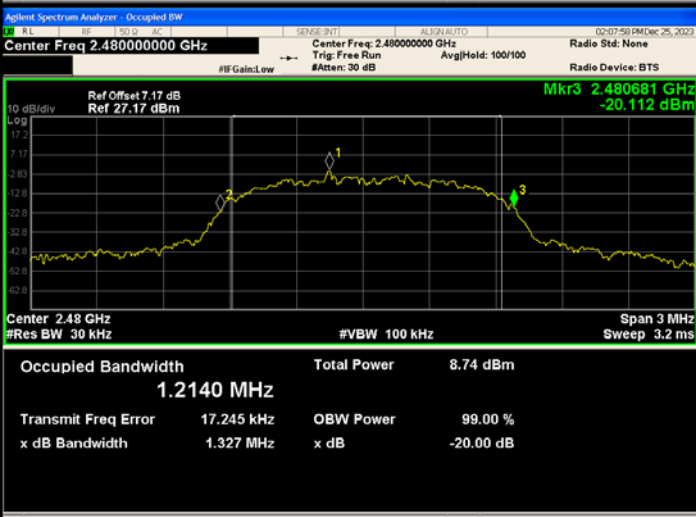8DPSK Low channel	
8DPSK Mid channel	
8DPSK High channel	

11. CARRIER FREQUENCIES SEPARATION

11.1 Block Diagram Of Test Setup

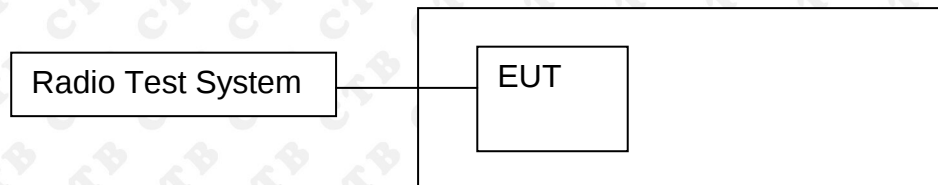

11.2 Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.

11.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz , Span = 2MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

11.4 Test Result

Mode	Channel.	Carrier Frequency Separation [MHz]	Limit(2/3 of the 20dB bandwidth MHz)	Verdict
GFSK	LCH	1.002	0.585	PASS
GFSK	MCH	1.002	0.564	PASS
GFSK	HCH	1.004	0.624	PASS
$\pi/4$ DQPSK	LCH	0.998	0.872	PASS
$\pi/4$ DQPSK	MCH	1.020	0.855	PASS
$\pi/4$ DQPSK	HCH	1.008	0.879	PASS
8DPSK	LCH	1.023	0.863	PASS
8DPSK	MCH	0.998	0.898	PASS
8DPSK	HCH	1.000	0.885	PASS

Test Graph

Graphs

GFSK/LCH





GFSK/MCH




GFSK/HCH

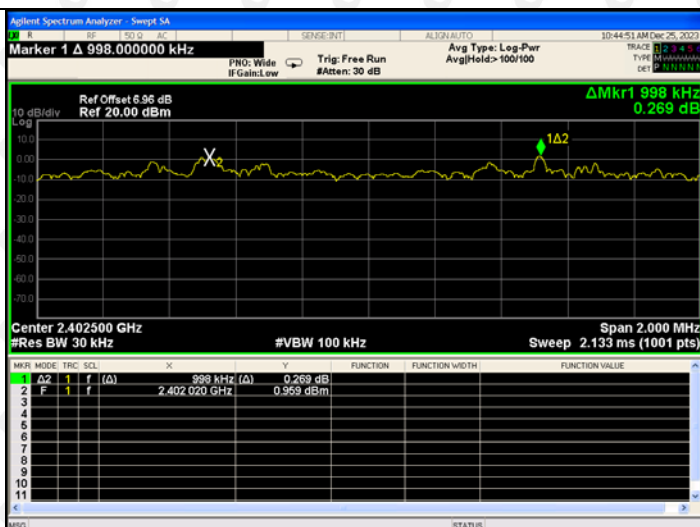


$\pi/4$ DQPSK/LCH

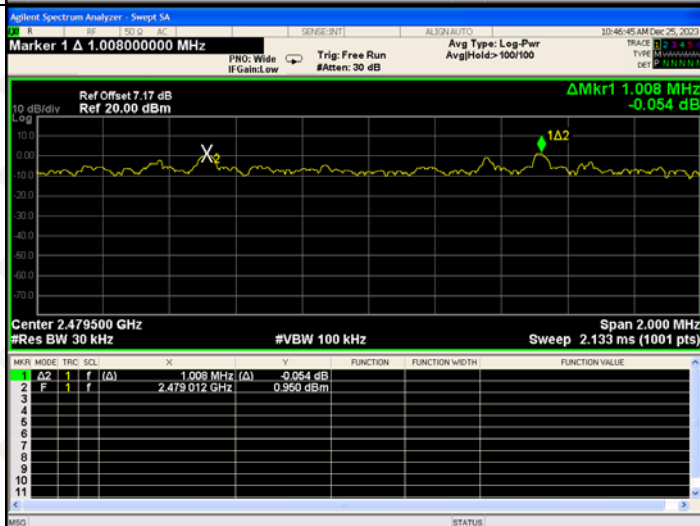 $\pi/4$ DQPSK/MCH

 $\pi/4$ DQPSK/HCH

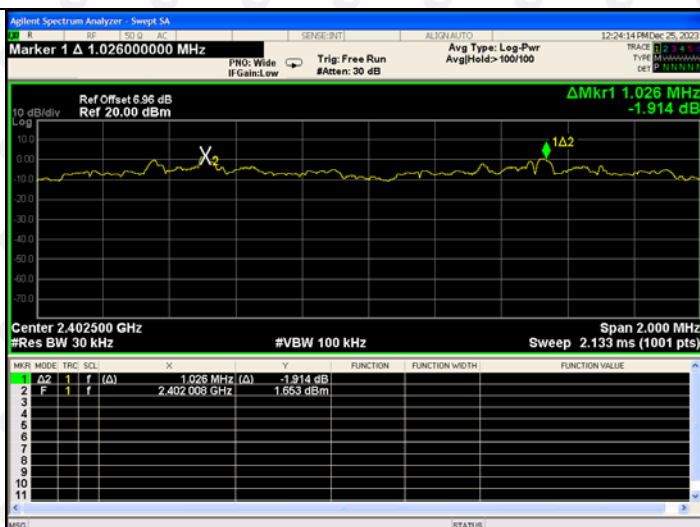
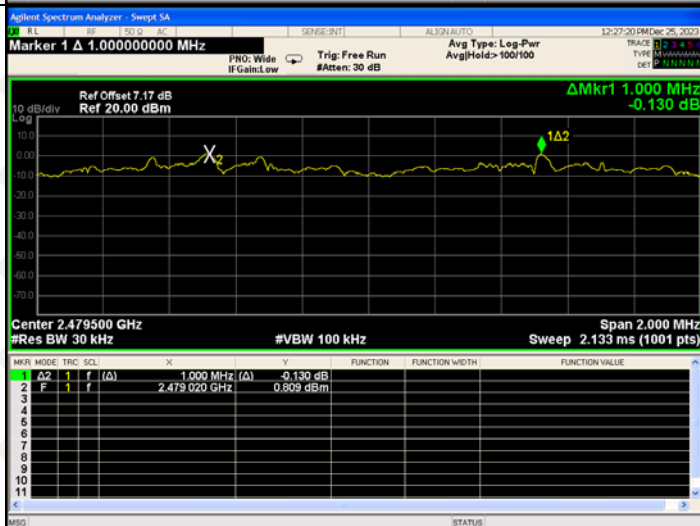
8DPSK/LCH

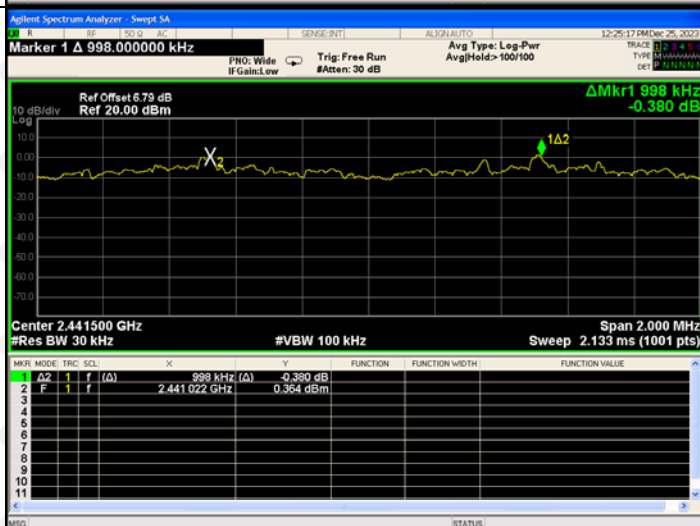

8DPSK /MCH




8DPSK /HCH



12. HOPPING CHANNEL NUMBER

12.1 Block Diagram Of Test Setup

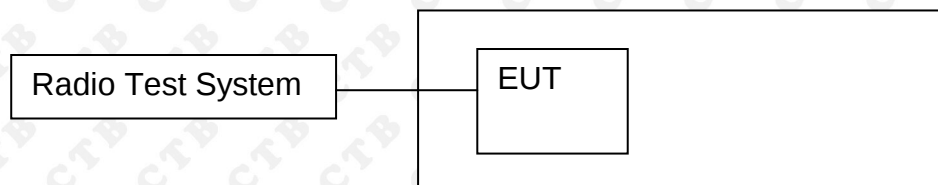

12.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

12.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;



12.4 Test Result

Mode	Channel.	Number of Hopping Channel	Limit	Verdict
GFSK	Hop	79	≥ 15	PASS
$\pi/4$ DQPSK	Hop	79	≥ 15	PASS
8DPSK	Hop	79	≥ 15	PASS


Test Graph

Graphs

GFSK/Hop

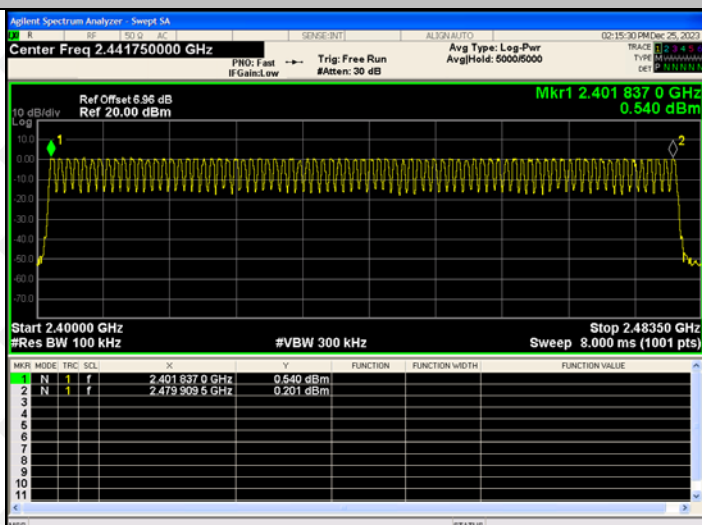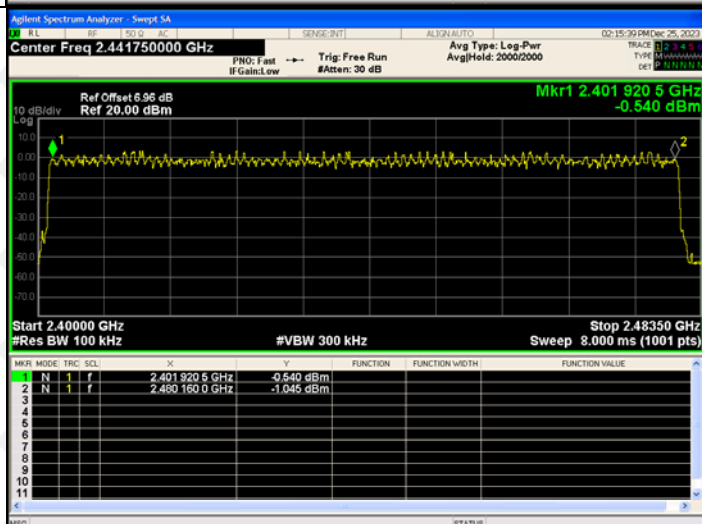

 $\pi/4$ DQPSK/Hop


8DPSK/Hop

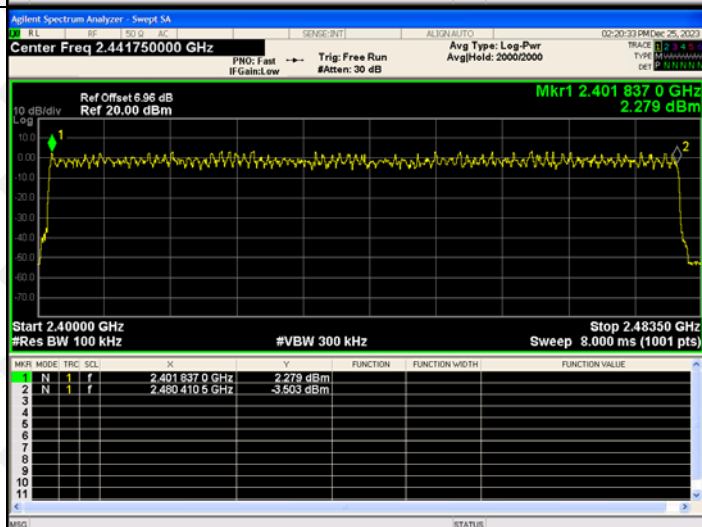

13. DWELL TIME

13.1 Block Diagram Of Test Setup

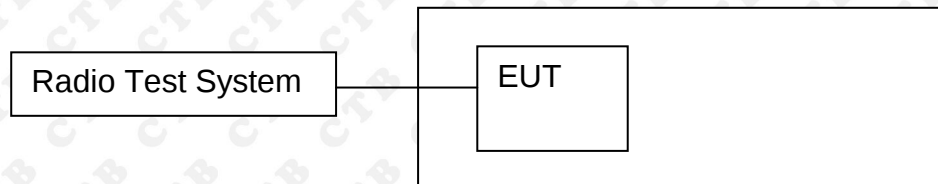

13.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

13.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

13.4 Test Result

Worst case-GFSK:

Mode	Packet	Channel	Pulse Time (ms)	Total Dwell Time (ms)	Limit (ms)	Verdict
GFSK	DH1	LCH	0.383	122.56	400	PASS
	DH1	MCH	0.383	122.56	400	PASS
	DH1	HCH	0.383	122.56	400	PASS
	DH3	LCH	1.644	263.04	400	PASS
	DH3	MCH	1.644	263.04	400	PASS
	DH3	HCH	1.644	263.04	400	PASS
	DH5	LCH	2.894	308.693	400	PASS
	DH5	MCH	2.894	308.693	400	PASS
	DH5	HCH	2.895	308.8	400	PASS

Remark: DH5 Packet permit maximum 1600 / 79 / 6 hops per second in each channel (5 time slots RX, 1 time slot TX).

DH3 Packet permit maximum 1600 / 79 / 4 hops per second in each channel (3 time slots RX, 1 time slot TX).

DH1 Packet permit maximum 1600 / 79 / 2 hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:

DH5: $1600/79/6 \times 0.4 \times 79 \times (\text{MkrDelta})/1000$

DH3: $1600/79/4 \times 0.4 \times 79 \times (\text{MkrDelta})/1000$


DH1: $1600/79/2 \times 0.4 \times 79 \times (\text{MkrDelta})/1000$

Remark: Mkr Delta is once pulse time.


Test Graph

Graphs


GFSK_DH1/LCH

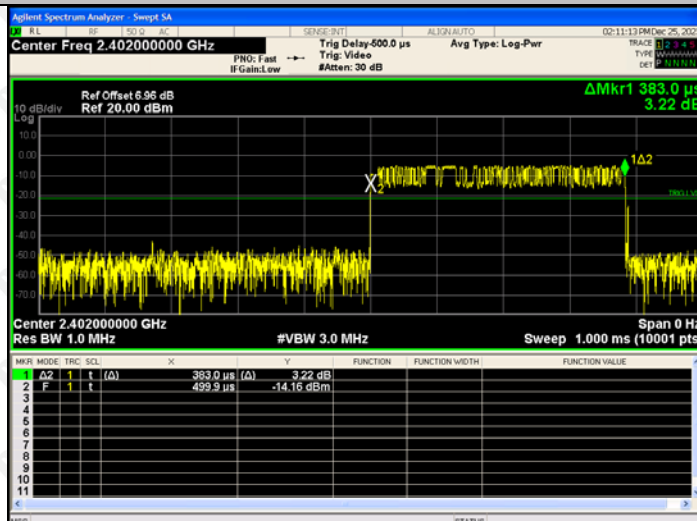

GFSK_DH1/MCH

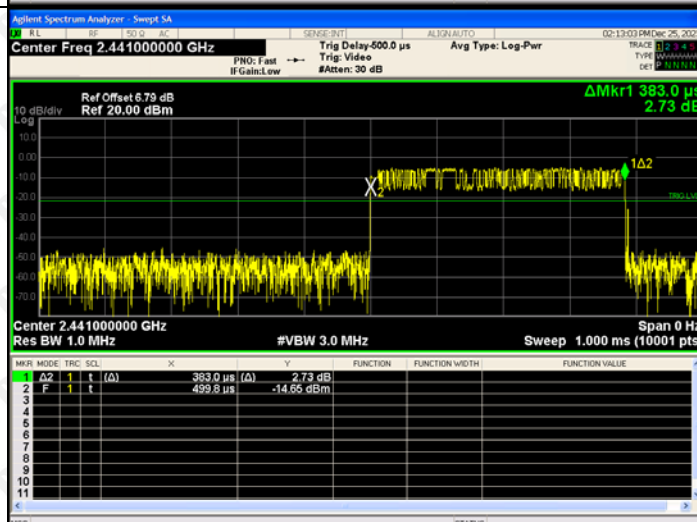

GFSK_DH1/HCH

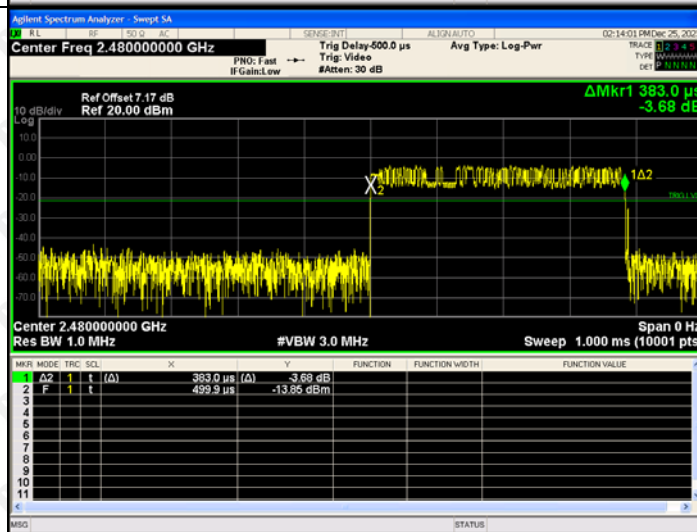

GFSK_DH3/LCH




GFSK_DH3/MCH




GFSK_DH3/HCH




GFSK_DH5/LCH

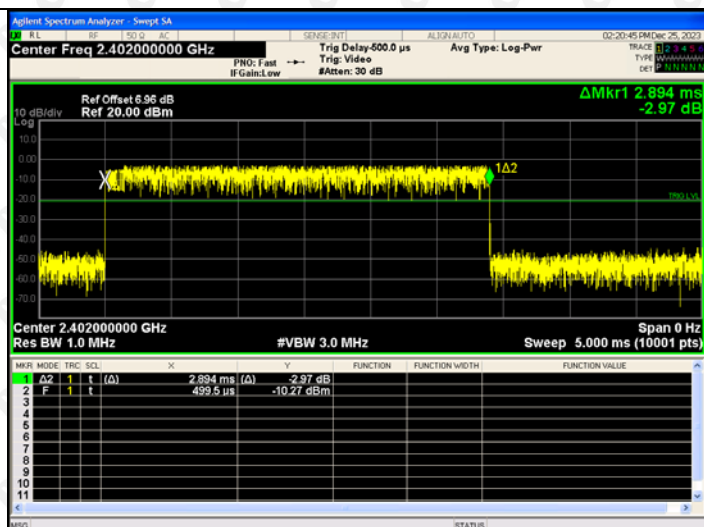

GFSK_DH5/MCH

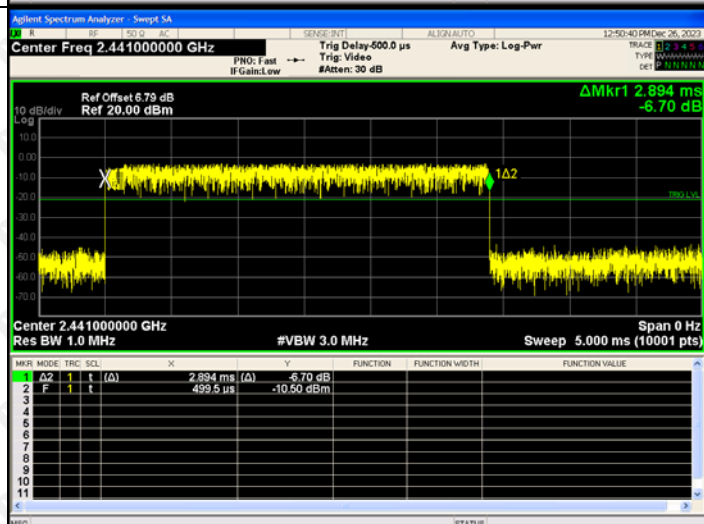

GFSK_DH5/HCH

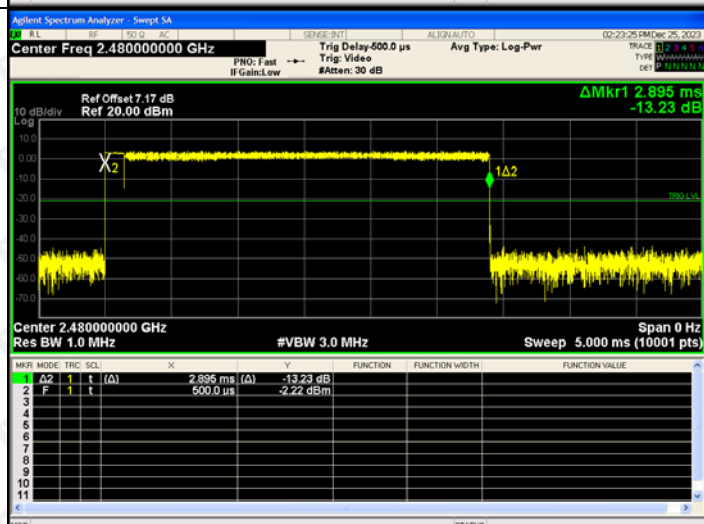

14. PSEUDORANDOM FREQUENCY

14.1 Limit


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.


14.2 Test procedure

The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)

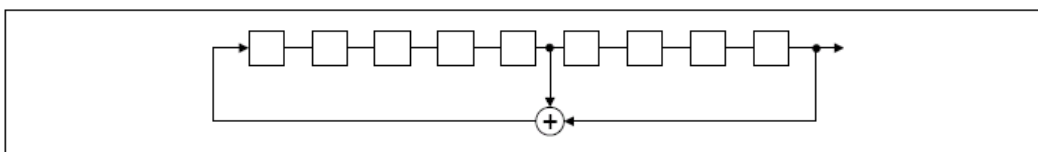

An example of Pseudorandom Frequency Hopping Sequence as follow:

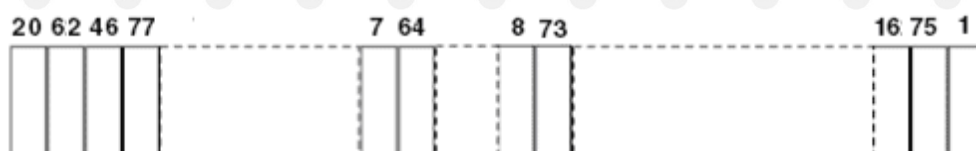

Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

14.3 Test Result

The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

15. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


EUT Antenna:

The antenna is PCB antenna. The best case gain of the antenna is -0.58dBi.


16. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission

Below 1G

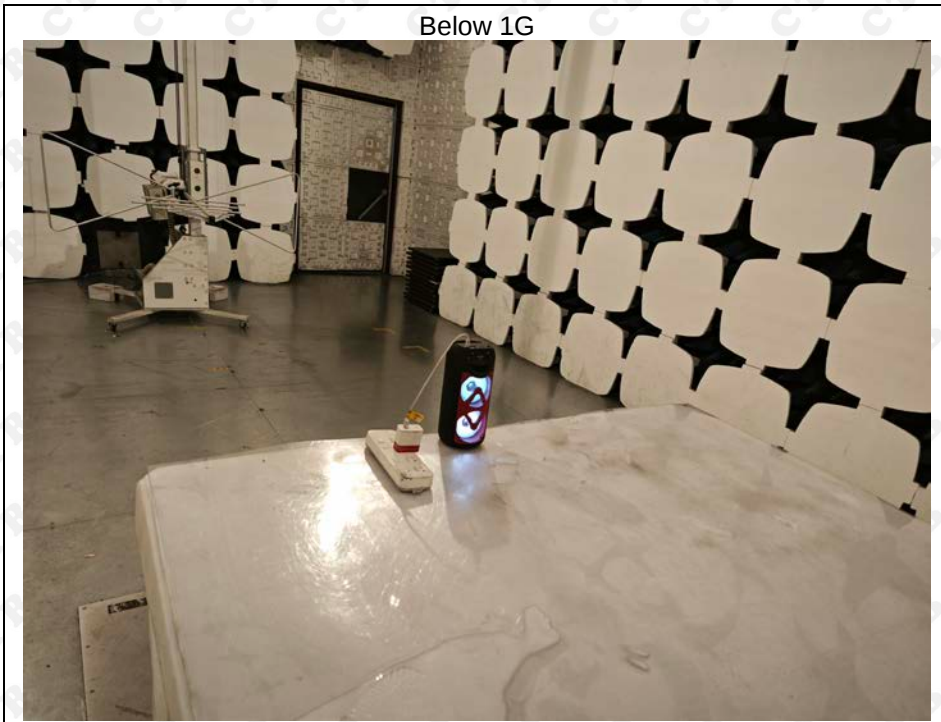

Above 1G

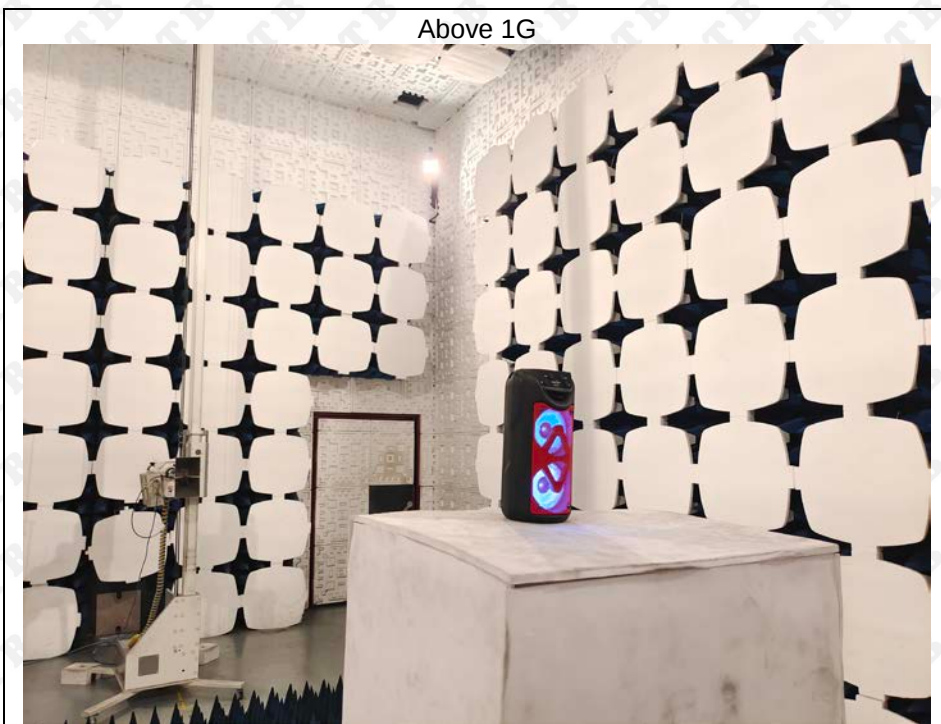

Conducted emissions



***** END OF REPORT *****