

5.18 453-00039 On-board PCB Antenna Characteristics

The 453-00039 on-board PCB trace monopole antenna radiated performance depends on the host PCB layout.

The BL653 development board was used for BL653 development and the 453-00039 PCB antenna performance evaluation. To obtain similar performance, follow guidelines in section *PCB Layout on Host PCB for the 453-00039* to allow the on-board PCB antenna to radiate and reduce proximity effects due to nearby host PCB GND copper or metal covers.

	f(MHz)	Antenna P (dBm)	TRP (dBm)	Max EIRP (dBm)	Efficiency (dB)	Gain (dBi)
BL653	2402	0.00	-3.49	0.13	-3.5	0.1
	2440	0.00	-3.89	-0.10	-3.9	-0.1
	2480	0.00	-4.53	-0.95	-4.5	-1.0

Notes: Antenna P = Antenna input power (set).

TRP = Total Radiated Power (measured).


EIRP = Equivalent Isotropic (ideal) Radiated Power (measured).

Efficiency = TRP - Antenna P (calculated).

Gain = Max. EIRP - Antenna P (calculated).

5.18.1 2402MHz Radiated Performance

EIRP Azimuth Cut

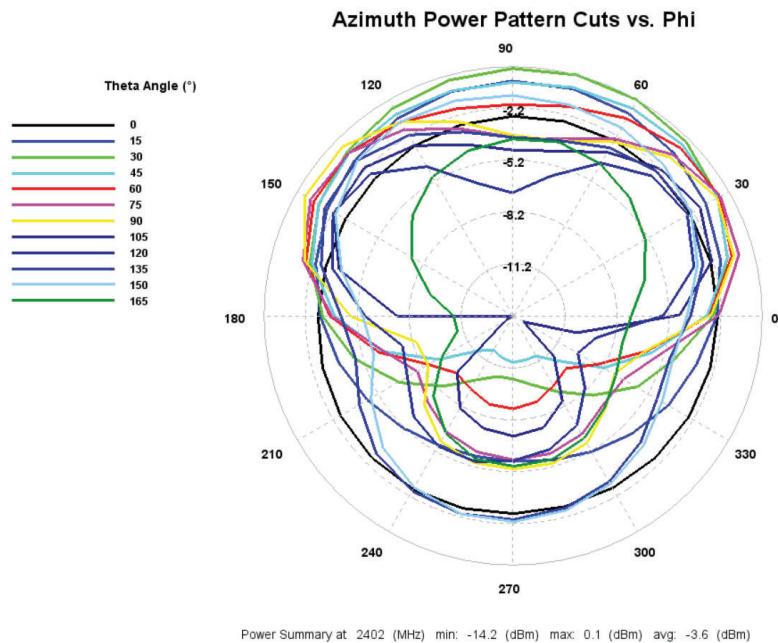

3D Plots:


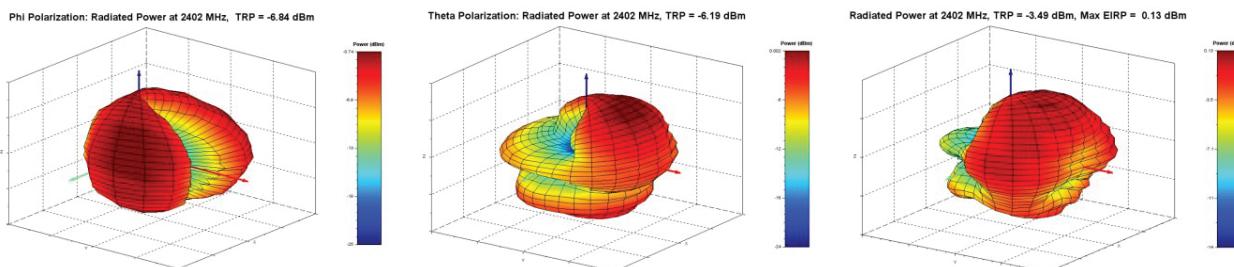


Figure 9: 2402MHz Horizontal, Vertical, and Total Patterns

5.18.2 2440MHz Radiated Performance

EIRP Azimuth Cut

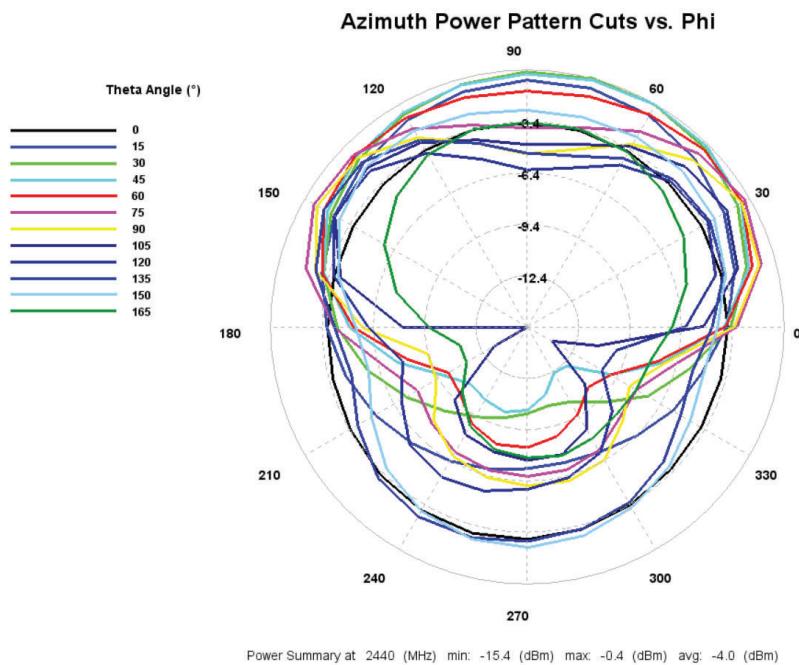

3D Plots:


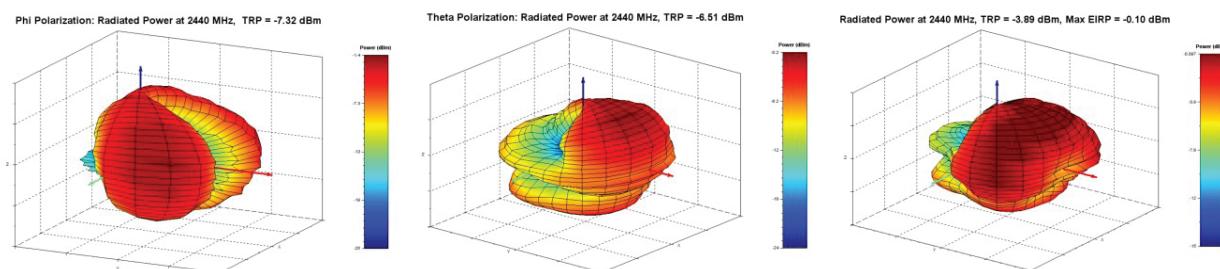


Figure 10: 2440MHz Horizontal, Vertical, and Total Patterns

5.18.3 2480MHz Radiated Performance

EIRP Azimuth Cut

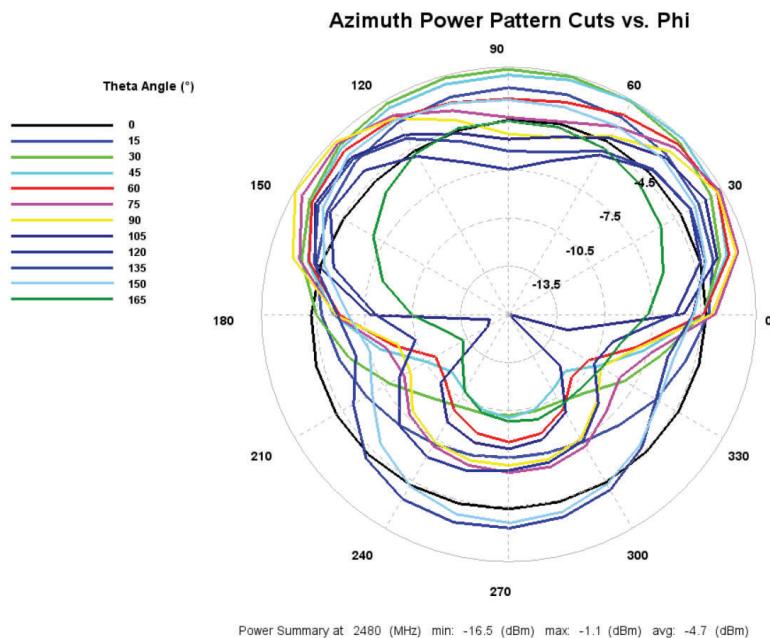

3D Plots:

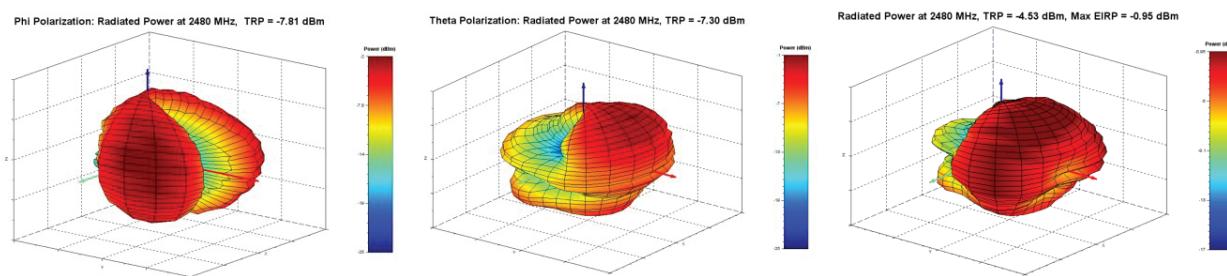


Figure 11: 2480MHz Horizontal, Vertical, and Total Patterns

13 ADDITIONAL INFORMATION

Please contact your local sales representative or our support team for further assistance:

Headquarters	Laird Connectivity 50 S. Main St. Suite 1100 Akron, OH 44308 USA
Phone	Americas: +1-800-492-2320 Europe: +44-1628-858-940 Hong Kong: +852-2762-4823
Website	www.lairdconnect.com/
Technical Support	www.lairdconnect.com/resources/support
Sales Contact	www.lairdconnect.com/contact

Note: Information contained in this document is subject to change.

Laird Connectivity's products are subject to standard [Terms & Conditions](#).

© Copyright 2024 Laird Connectivity. All Rights Reserved. Patent pending. Any information furnished by Laird Connectivity and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird Connectivity materials or products rests with the end user since Laird Connectivity and its agents cannot be aware of all potential uses. Laird Connectivity makes no warranties as to non-infringement nor as to the fitness, merchantability, or sustainability of any Laird Connectivity materials or products for any specific or general uses. Laird Connectivity or any of its affiliates or agents shall not be liable for incidental or consequential damages of any kind. All Laird Connectivity products are sold pursuant to the Laird Connectivity Terms and Conditions of Sale in effect from time to time, a copy of which will be furnished upon request. Nothing herein provides a license under any Laird Connectivity or any third-party intellectual property right.