


可折叠式蓝牙5.1键盘使用说明书



注意：正确操作本产品，请仔细阅读用户手册。

**产品外观及规格**

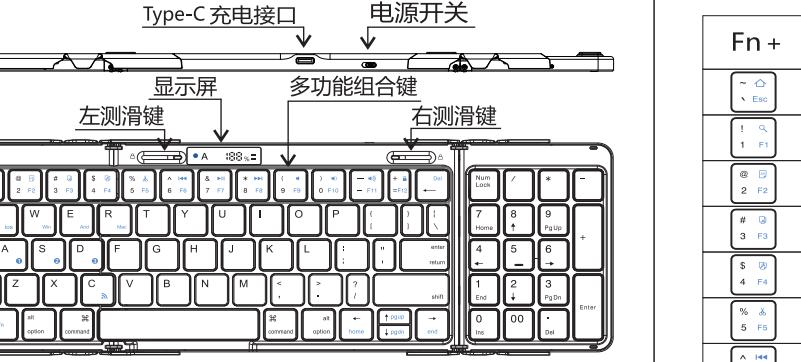

**产品功能**

Fn +	iOS/Mac Android	Fn + shift +	Windows	Fn +	Windows
返回桌面			打开浏览器		Esc
搜索			搜索		F1
全选			全选		F2
复制			复制		F3
粘贴			粘贴		F4
剪切			剪切		F5
上一曲			上一曲		F6
暂停/播放			暂停/播放		F7
下一曲			下一曲		F8
静音			静音		F9
音量减小			音量减小		F10
音量增大			音量增大		F11
锁屏			锁屏		F12

**支持系统**  
Windows/ iOS /Android /Mac

**技术规格**

键盘尺寸:346.8\*114.3\*10.5mm(打开) 键盘重量:350g  
工作电压:3.7V 待机电流:<1.5mA  
使用按键工作电流:<7mA 休眠电流:<1mA  
工作距离:10m 休眠时间:10分钟  
锂电池容量:500mAh 唤醒方式:按键唤醒

**显示屏状态/卡快滑键说明**

1.打开电源，键盘显示屏点亮。  
2.选择通道，切换通道及选择系统时，显示屏上的蓝灯点亮后熄灭。配对时，显示屏上的蓝灯长亮。  
3.小电量时，显示屏上的大写点亮。  
4.显示屏百分比表示电池的电量，当电量低时显示屏上的电量%符号会一直闪烁。  
5.键盘在使用时，显示屏的电量一直显示，当键盘在1分钟无动作时，显示屏会熄屏进入省电状态。  
6.充电时显示屏右侧上方指示灯慢闪，充满后，右侧下方充电指示灯长亮。  
7.左侧滑键滑动到左侧区域时，滑到左末端可以解除约束，右侧滑键滑动至右末端时，滑到右末端可以解除约束。

**三系统切换语言：**

- Windows : Alt+Shift 切换语言。
- iOS/Mac: Ctrl +空格键 切换语言。
- Android : Shift +空格键 切换语言。

**多通道连接**

- 连接第1个设备时先按Fn +<sup>□</sup>键，再按Fn +<sup>□</sup>键显示屏上的蓝灯闪烁进入对码模式。
- 连接第2个设备时先按Fn +<sup>□</sup>键，再按Fn +<sup>□</sup>键显示屏上的蓝灯闪烁进入对码模式。
- 连接第3个设备时先按Fn +<sup>□</sup>键，再按Fn +<sup>□</sup>键显示屏上的蓝灯闪烁进入对码模式。
- 在多个设备同时使用，按Fn +<sup>□</sup>切换，即可自由切换到已连接的设备。

**iOS系统连接使用说明：**

- 请打开键盘电源开关，显示屏点亮，选择通道，按Fn +<sup>□</sup>键蓝灯闪烁进入对码模式。
- 打开“设置”，点击“蓝牙”进入搜索模式。
- 在添加设备里选择“蓝牙”，进行搜索。
- 直到发现“BT 5.1 keyboard-1506”，然后点击配对连接。
- 提示连接对成功，您就可以舒适的使用您的键盘了。

**Mac系统连接使用说明：**

- 请打开键盘电源开关，显示屏点亮，选择通道，按Fn +<sup>□</sup>键蓝灯闪烁进入对码模式。
- 打开系统偏好设置，点击“蓝牙”进入搜索模式。
- 直到发现“BT 5.1 keyboard-1506”，然后点击配对连接。
- 直到发现“BT 5.1 keyboard-1506”，然后点击配对连接。
- 提示连接成功，您就可以舒适的使用您的键盘了。

**Windows 系统连接使用说明：**

- 请打开键盘电源开关，显示屏点亮，选择通道，按Fn +<sup>□</sup>键蓝灯闪烁进入对码模式。
- 在开始页面打开“设置”，然后打开蓝牙进行搜索模式。
- 直到发现“BT 5.1 keyboard-1506”，然后点击配对连接。
- 直到发现“BT 5.1 keyboard-1506”，然后点击配对连接。
- 提示连接成功，您就可以舒适的使用您的键盘了。

**Android 系统连接使用说明：**

- 请打开键盘电源开关，显示屏点亮，选择通道，按Fn +<sup>□</sup>键蓝灯闪烁进入对码模式。
- 在开始页面打开“设置”，然后打开蓝牙进行搜索模式。
- 直到发现“BT 5.1 keyboard-1506”，然后点击配对连接。
- 提示连接成功，您就可以舒适的使用您的键盘了。

**节能模式**

- 当键盘在1分钟无任何动作时，键盘显示屏会熄灭，按击键盘任意键会点亮显示。
- 当键盘在10分钟无任何动作指令时，会自动进入低功耗休眠模式，需要使用时，只需要按键盘上任意键并等待≤4秒钟，键盘将会被唤醒进行正常使用。
- 当键盘在1分钟不用时请关闭电源开关，达到延长电量使用时间。

**键盘保养**

- 请勿将设备暴露在液体和潮湿的环境或使其淋雨，请勿在浴缸、水槽、桑拿房、游泳池或蒸气房附近使用。
- 请勿将设备暴露于过高或过低的温度下。
- 请勿长时间放置在阳光直射的地方。
- 请勿靠近明火，如烹饪炉、蜡烛或者壁炉。
- 避免使用锋利的刮擦产品，及时给产品进行充电以保证正常使用。

**常见问题解答**

- 1.平板无法连接蓝牙键盘？**
  - 请先检查蓝牙键盘是否有进入配对状态,然后再打开平板电脑蓝牙搜索设备进行连接。
  - 检查蓝牙键盘电量是否充足，电量不足也会导致无法连接，请将蓝牙键盘充电后再使用。
- 2.键盘指示灯在使用途中一直闪烁？**

键盘指示灯在使用途中一直闪烁，表示电池即将没电，请尽快将键盘充电。
- 3.设备显示蓝牙键盘断开连接？**

蓝牙键盘在一段时间内不使用，设备为了省电将自动关闭蓝牙功能，按键盘任意键唤醒，蓝牙连接自动恢复。


正面

Foldable Bluetooth 5.1 Keyboard User Manual



Attention: To use this product correctly, please read the user manual carefully.

**Product Appearance and Specifications**

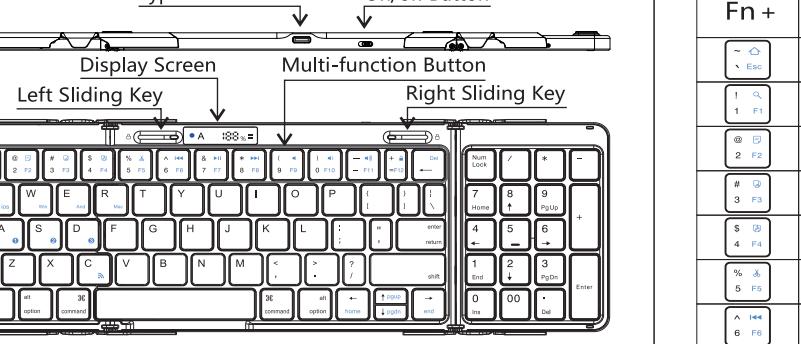

**Product features**

Fn +	iOS/Mac Android	Fn + shift +	Windows	Fn +	Windows
Display Screen			Open the browser		Esc
Left Sliding Key			Search		F1
Right Sliding Key			Search		F2
			Select		F3
			Copy		F4
			Stick		F5
			Cut		F6
			Pre-Track		F7
			Play/Pause		F8
			Next		F9
			Mute		F10
			Volume-		F11
			Volume+		F12
			Lock		

**Support System**  
Windows/ iOS /Android /Mac

**Technical Specifications**

Keyboard Dimensions: 346.8\*114.3\*10.5mm (opened)  
Keyboard Weight: 350g  
Working Distance: <7m  
Battery Capacity: 500mAh  
Wake-up method: button wake-up

**Display Status/Slider Jam Description**

1. Turn on the power, and the keyboard display will light up.  
2. When selecting a channel, switching channel or selecting systems, the blue light on the display will light up, and then the display screen will turn off.  
3. When pairing, the blue light on the display flashes.  
4. The percentage of the display shows the battery power. When the battery is low, the blue light will be dim.  
5. When the keyboard is in use, the battery level will always be displayed. When the keyboard has no action for 1 minute, the display will turn off and enter a power-saving mode.  
6. When connecting the first device, press the Fn +<sup>□</sup> key, then the Fn +<sup>□</sup> key. As the blue light on the display flashes to enter the code matching mode.  
7. When connecting the second device, press the Fn +<sup>□</sup> key, then the Fn +<sup>□</sup> key. As the blue light on the display flashes to enter the code matching mode.  
8. When connecting to the third device, press the Fn +<sup>□</sup> key, then the Fn +<sup>□</sup> key. As the blue light on the display flashes to enter the code matching mode.  
9. When using multiple devices simultaneously, press Fn +<sup>□</sup> to switch to the connected device.

**Three system switching language**

- Windows: Alt+Shift key switch language.
- iOS/Mac: Ctrl+Space key switch language.
- Android: Shift+Space key switch language.

**Multi-channel Connection**

- When connecting the first device, press the Fn +<sup>□</sup> key, then the Fn +<sup>□</sup> key. As the blue light on the display flashes to enter the code matching mode.
- When connecting the second device, press the Fn +<sup>□</sup> key, then the Fn +<sup>□</sup> key. As the blue light on the display flashes to enter the code matching mode.
- When connecting to the third device, press the Fn +<sup>□</sup> key, then the Fn +<sup>□</sup> key. As the blue light on the display flashes to enter the code matching mode.
- When connecting multiple devices simultaneously, press Fn +<sup>□</sup> to switch to the connected device.

**iOS Connection instructions**

- 请打开键盘电源开关，显示屏点亮，选择通道，按Fn +<sup>□</sup>键蓝灯闪烁进入对码模式。
- 打开“设置”，点击“蓝牙”进入搜索模式。
- 您将找到“BT 5.1 keyboard-1506”，并点击配对连接。
- 这是一个连接成功的提示，您可以舒适地使用您的键盘了。

**Mac Connection instructions**

- 请打开键盘电源开关，显示屏点亮，选择通道，按Fn +<sup>□</sup>键蓝灯闪烁进入对码模式。
- 打开系统偏好设置，点击“蓝牙”进入搜索模式。
- 您将找到“BT 5.1 keyboard-1506”，并点击配对连接。
- 这是一个连接成功的提示，您可以舒适地使用您的键盘了。

**Windows Connection instructions**

- 请打开键盘电源开关，显示屏点亮，选择通道，按Fn +<sup>□</sup>键蓝灯闪烁进入对码模式。
- 在开始页面打开“设置”，然后打开蓝牙进行搜索模式。
- 您将找到“BT 5.1 keyboard-1506”，并点击配对连接。
- 这是一个连接成功的提示，您可以舒适地使用您的键盘了。

**Android Connection instructions**

- 请打开键盘电源开关，显示屏点亮，选择通道，按Fn +<sup>□</sup>键蓝灯闪烁进入对码模式。
- 在开始页面打开“设置”，然后打开蓝牙进行搜索模式。
- 您将找到“BT 5.1 keyboard-1506”，并点击配对连接。
- 这是一个连接成功的提示，您可以舒适地使用您的键盘了。

**Power Saving Mode**

- 当没有在键盘上进行任何操作1分钟时，键盘显示屏将熄灭并亮起。
- 当键盘在10分钟内未收到任何操作指令时，会自动进入低功耗休眠模式。如果需要使用，请按任意键并等待≤4秒，键盘将被唤醒。
- 当键盘在1分钟内未使用时，请关闭电源开关，以延长电池使用时间。

**Keyboard Maintenance**

- 请勿将设备暴露于液体和潮湿的环境或使其淋雨，请勿在浴缸、水槽、桑拿房、游泳池或蒸气房附近使用。
- 请勿将设备暴露于过高或过低的温度下。
- 请勿长时间放置在阳光直射的地方。
- 请勿靠近明火，如烹饪炉、蜡烛或者壁炉。
- 避免使用锋利的刮擦产品，及时给产品进行充电以保证正常使用。

**FAQ**

1. The tablet PC can't connect the BT keyboard?  
1. At first check the BT keyboard is in match code state, then open the tablet PC Bluetooth searching.  
2. Checking the BT keyboard Battery is enough, the battery low is also lead to can't connect, you need charge.  
3. The keyboard indicator light always flashing when use?  
Keyboard indicator always flashing when use, it means the keyboard will be no power, please charge the power as soon as possible.  
4. The tablet PC display BT keyboard is disconnect?  
The Bluetooth keyboard is not used for a period of time, the device will automatically enter the sleep state in order to save power. Press any key on the keyboard to wake up, and the Bluetooth connection will be automatically restored.
2. The keyboard indicator light always flashing when use?  
Keyboard indicator always flashing when use, it means the keyboard will be no power, please charge the power as soon as possible.
3. The tablet PC display BT keyboard is disconnect?  
The Bluetooth keyboard is not used for a period of time, the device will automatically enter the sleep state in order to save power. Press any key on the keyboard to wake up, and the Bluetooth connection will be automatically restored.

**Warranty Card**

**User information**  
Company or personage full name \_\_\_\_\_

**Contact address** \_\_\_\_\_

**TEL** \_\_\_\_\_ **Zip** \_\_\_\_\_

**The purchased product name and model NO.** \_\_\_\_\_

**Purchased date** \_\_\_\_\_

**Warranty Card**

**User information**  
Company or personage full name \_\_\_\_\_

**Contact address** \_\_\_\_\_

**TEL** \_\_\_\_\_ **Zip** \_\_\_\_\_

**The purchased product name and model NO.** \_\_\_\_\_


**Purchased date** \_\_\_\_\_

**FAQ**

1. The tablet PC can't connect the BT keyboard?  
1. At first check the BT keyboard is in match code state, then open the tablet PC Bluetooth searching.  
2. Checking the BT keyboard Battery is enough, the battery low is also lead to can't connect, you need charge.  
3. The keyboard indicator light always flashing when use?  
Keyboard indicator always flashing when use, it means the keyboard will be no power, please charge the power as soon as possible.  
4. The tablet PC display BT keyboard is disconnect?  
The Bluetooth keyboard is not used for a period of time, the device will automatically enter the sleep state in order to save power. Press any key on the keyboard to wake up, and the Bluetooth connection will be automatically restored.
2. The keyboard indicator light always flashing when use?  
Keyboard indicator always flashing when use, it means the keyboard will be no power, please charge the power as soon as possible.
3. The tablet PC display BT keyboard is disconnect?  
The Bluetooth keyboard is not used for a period of time, the device will automatically enter the sleep state in order to save power. Press any key on the keyboard to wake up, and the Bluetooth connection will be automatically restored.

背面

折法: 左右S折, 封面朝外

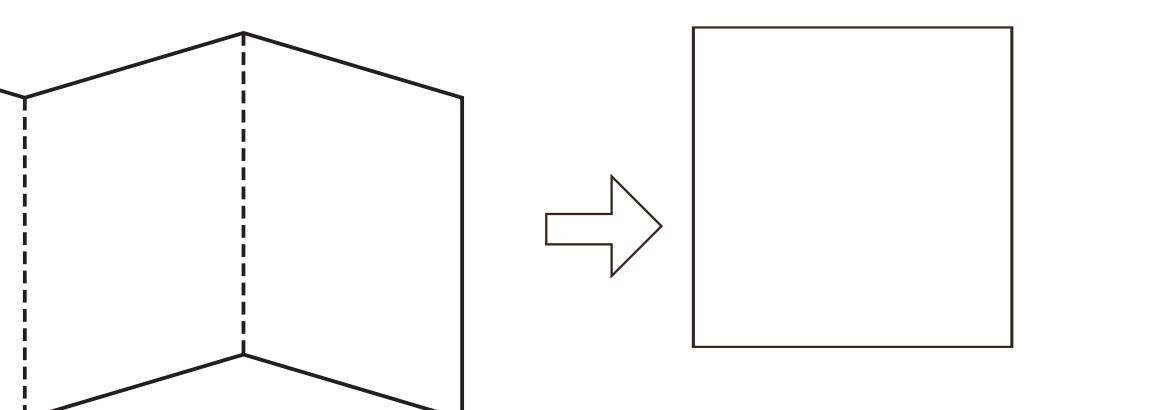

注意：  
1. 须正反面(双面)印刷  
2. 印刷面不可产生影像模糊或有余影  
3. 裁切边不可有裁切不良现象  
4. 交货时需左右S折, 封面需朝正面  
5. 四色印刷

说明书尺寸103\*143mm(折合尺寸)  
材质105g铜版纸

## FCC Statement

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.