



Manual Instructions



/// Spare Parts

A 	B 	C 
1 PC	6 PCS	6 PCS
The bed body	Legs and Washers	Felt Pads
D 	E 	F 
1 PC	1 PC	1 PC
Mattress stopper	Adaptor	Handset

/// Spare Parts

Please check the packing list while unpacking the box to ensure you received all necessary parts for assembling the bed base.

Should you find any parts of the bed base missing while unpacking, please email us. We will get back to you within 48 hours.

As you unpack and prepare for assembly, place the contents on a carpeted or padded area to protect them from damage.




Assembly Instructions

1



Unfold the base to full extension.

2

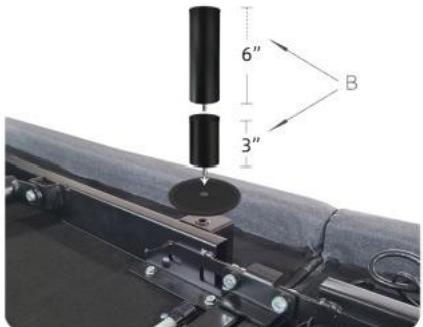

Put middle leg fastener into position C to prevent the base from folding while in motion. Attach the middle legs respectively.

3



Install each of the four corner legs respectively.

Assembly Instructions

4



Flip the base over.

5



Put the foot retainer on and connect to adaptor.


6



Please check to make sure that all support arms are in the right place and stable.

Warning


1. After the power base is raised, it cannot bear the weight of 99Lb or more, and children over 99 lb are prohibited from jumping and playing on the raised part.

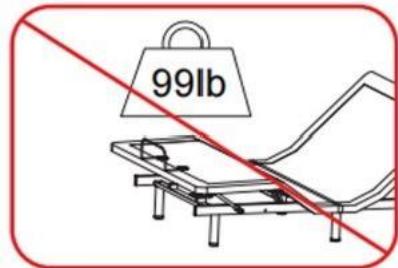

2. After the power base is raised, it is forbidden to push the back of the power base vigorously, and it is forbidden to vigorously pull the foot part of the power base.



3. Before lifting the bed, avoid placing the entire weight on the individual head or foot sections.

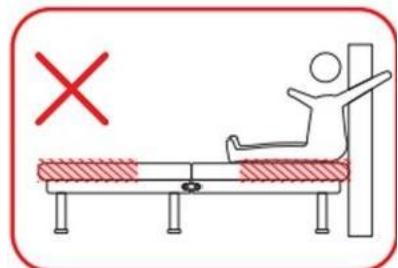

Lorem ipsum dolor sit amet,consectetur adipiscing elit,sed do eiusmod tempor incididunt ut labore et dolore magna aliqua.Quis ipsum suspendisse ultrices gravida.Risus commodo viverra maecenas accumsan lacus vel facilisis.

FCC STATEMENT

This device complies with Part 15 of the FCC Rules.Operation is subject to the following two conditions:

- (1)This device may not cause harmful interference, and
- (2)This device must accept any interference received,including interference that may cause undesired operation.

Warning: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE:This equipment has been tested and found to comply with the limits for a Class B digital device,pursuant to Part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation.This equipment generates uses and can radiate radio frequency energy and,if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However,there is no guarantee that interference wi l not occur in a particular installation.If this equipment does cause harmful interference to radio or television reception,which can be determined by turning the equipment off and on,the user is encouraged to try to correct the interference by one or more of the following measures:

Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver.


Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Instruction Manual of Remote Control System

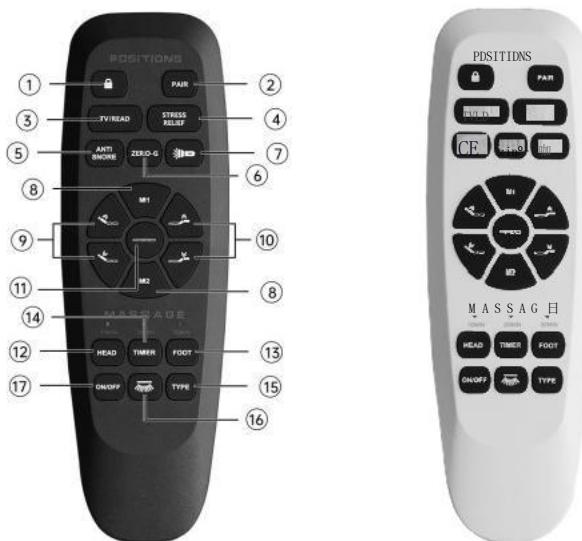

The remote control uses 3pcs 03AAA SIZE 1.5V batteries

① Child Lock	Press and hold for 3seconds until the backlight flashes white rapidly(0.2s per flash,3flashes) to activate child lock,Allfunctions will be disabled.Pressing any other key during child lock will cause allkey backlights to flash white rapidly.To deactivate,press and hold for 3 seconds until the backlight flashes white rapidly(0.2s per flash,3flashes).After releasing the key, the backlight of other keys will stay lit for 5 seconds before turning off,unlocking the child lock.
② Pairing	Press and hold the palring key for 3 seconds until the backlight flashes.Pairing is complete when the backlight stops flashng,f the backlight flashes for more than 6 seconds and then turns off,pairing has failed.If pairing fails, the operation must be completed within 2 minutes after the control box is powered on,otherwise, the control box must be repowered.
③ TV Mode	Single press:Moves the bed to the TV/pc position.Press and hold for 3s:sets the current position as the TV/Pc position(backlight flashes white rapidly,0.2s per flash,3 flashes).The initial value refers to the default position angle.
④ Rest Mode	Single press:Moves the bed to the LOUNGE position.Press and hold for 3s:Sets the current position as the LOUNGE position(backlight flashes white rapidly,0.2s per flash,3 flashes).The initial value refers to the default position angle.
⑤ Anti-Snore Mode	Single press:Moves the bed to the ANTI SNORE position.Press and hold for 3s:Sets the current position as the ANTI SNORE position (backlight flashes white rapidly,0.2s per flash,3 flashes).The initial value refers to the default position angle
⑥ Zero Gravity	Single press:Moves the bed to the ZG position.Press and hold for 3s:Sets the current position as the ZG position (backlight flashes white rapidly,0.2s per flash,3 flashes).The initial value refers to the default position angle.

⑦Flashlight	Press to turn on the white flashlight. Press and hold to keep it on, release to turn it off. The key backlight will stay lit in white.
⑧Memory Position	Single press: Moves the bed to the user-defined position. Press and hold for 3s: sets the current position as the M1/M2 position (backlight flashes white rapidly, 0.2s per flash, 3 flashes).
⑨Backrest Up/Down	Backrest Up: Press to raise the backrest, release to stop. The key backlight stays lit in white. Backrest Down: Press to lower the backrest; release to stop. The key backlight stays lit in white.
⑩Footrest Up/Down	Footrest Up: Press to raise the footrest, release to stop. The key backlight stays lit in white. Footrest Down: Press to lower the footrest, release to stop. The key backlight stays lit in white.
⑪Flat	Press once to flatten the bed (both backrest and footrest move simultaneously until the reset is complete). Pressing any motor-related key during the reset will pause the process (refer to the default position angle).
⑫Head Massage Intensity	Press the key to cycle through head massage intensity levels: Low-Medium-High-Off.
⑬Foot Massage Intensity	Press the key to cycle through foot massage intensity levels: Low-Medium-High-Off.
⑭Massage Timer	Press the key to set the massage timer: 10min-20min-30min.
⑮Massage Mode	Press the button to cycle through massage modes: Continuous Vibration: Constant vibration. Long-interval Vibration: Vibrates for ~500ms, pauses for ~500ms. Short-interval Vibration: Vibrates for ~300ms, pauses for ~300ms.
⑯Under-Bed Light	Press once: Turns on the under-bed light. Press again: Turns it off. Auto-Off: The light will automatically turn off after 1 hour.
⑰Massage On/Off (All)	Press to toggle: Turns both head and foot massage on or off simultaneously.
Additional Functions	<ol style="list-style-type: none"> 1. Press and hold TV/Pc+LOUNGE simultaneously for 5 seconds until the backlight flashes. The control box will reset all memory positions to factory default settings. 2. When the bed is in automatic operation (e.g., after pressing a memory position key (M1/M2) or one-key flat), pressing any other key (except Child Lock and Pairing keys) will pause the current movement. 3. The backlight of all keys will automatically turn off after 5 seconds of inactivity (no key presses).

FCC STATEMENT

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Warning: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver.

Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.

RF warning statement:

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction

Convenient“Flat button”

- 1 Long press the"Flat button"on the control box until the bed base goes down to flat position.
- 2 During the reset process, release the button and the operation stops;Press the reset button again to continue the reset action.

Power supply:connect DC 29V DC power supply



Cleaning&Care

Clean surfaces with a dry or damp soft cloth. Make sure the motor control system is well connected before use.

Please cut off the power if the bed base will not be in use for long periods of time.

FCC STATEMENT

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Warning: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver.

Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.