



FCC TEST REPORT

For

Shenzhen Kalirai Technology Co.,Ltd.

Wireless Power Bank

Test Model: BJCDB001

Prepared for : Shenzhen Kalirai Technology Co.,Ltd.
Building B &101A Buiding A,NO. 6, FengQi Road, FuChengAo,
Address : PingHu Street, LongGang District, ShenZhen(101,NO. 118,
FengQi Road, FuChengAo, PingHu Street)

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.
Address : 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Shajing
Street, Baoan District, Shenzhen, China
Tel : (+86)755-82591330
Fax : (+86)755-82591332
Web : www.LCS-cert.com
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : January 05, 2024
Number of tested samples : 2
Serial number : A240104010-1(Engineer sample), A240104010-2(Normal
sample)
Date of Test : January 05, 2024 ~ January 18, 2024
Date of Report : January 18, 2024



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add:101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**FCC TEST REPORT**
KDB 680106 D01 Wireless Power Transfer v04**Report Reference No.** : **LCSA01044094EB****Date Of Issue** : January 18, 2024**Testing Laboratory Name** : **Shenzhen LCS Compliance Testing Laboratory Ltd.****Address** : 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Shajing Street,
Baoan District, Shenzhen, China**Testing Location/ Procedure**..... : Full application of Harmonised standards ■
Partial application of Harmonised standards □
Other standard testing method □**Applicant's Name** : **Shenzhen Kalirai Technology Co.,Ltd.****Address** : Building B &101A Buiding A,NO. 6, FengQi Road, FuChengAo,
PingHu Street, LongGang District, ShenZhen(101,NO. 118, FengQi
Road, FuChengAo, PingHu Street)**Test Specification****Standard**..... : FCC CFR 47 PART 1, § 1.1310
KDB 680106 D01 Wireless Power Transfer v04**Test Report Form No.**..... : LCSEMC-1.0**TRF Originator**..... : Shenzhen LCS Compliance Testing Laboratory Ltd.**Master TRF** : Dated 2011-03**Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description..... : **Wireless Power Bank****Trade Mark**..... : N/A**Test Model**..... : BJCDB001**Power Supply** : Battery Capacity: 4000mAh/3.85V(15.4Wh)
Type-C Input: 5V $\overline{\text{---}}$ 3A(Max), Type-C Output: 5V $\overline{\text{---}}$ 3A
Wireless Output: 5W
Total Output: 5V $\overline{\text{---}}$ 3A**Result** : **Positive****Compiled by:**

Jerry chu

Jerry Chu/ Administrator

Supervised by:

Cary Luo

Cary Luo/ Technique principal

Approved by:

Gavin Liang

Gavin Liang/ Manager



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add:101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen,
518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**FCC -- TEST REPORT****Test Report No. : LCSA01044094EB**January 18, 2024
Date of issue

Test Model.....	: BJCDB001
EUT.....	: Wireless Power Bank
Applicant.....	: Shenzhen Kalirai Technology Co.,Ltd.
Address.....	: Building B &101A Buiding A,NO. 6, FengQi Road, FuChengAo, PingHu Street, LongGang District, ShenZhen(101,NO. 118, FengQi Road, FuChengAo, PingHu Street)
Telephone.....	:
Fax.....	:
Manufacturer.....	: DONGGUAN MOPO NEW ENERGY TECH. CO.,LTD.
Address.....	: Room 701, Floor 7, Building L, Fengzhimei Industrial Zone, golden phoenix Avenue, Fenggang Town, Dongguan City, China
Telephone.....	:
Fax.....	:
Factory.....	: DONGGUAN MOPO NEW ENERGY TECH. CO.,LTD.
Address.....	: Room 701, Floor 7, Building L, Fengzhimei Industrial Zone, golden phoenix Avenue, Fenggang Town, Dongguan City, China
Telephone.....	:
Fax.....	:

Test Result**Positive**

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add:101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Revision History

Revision	Issue Date	Revisions	Revised By
000	January 18, 2024	Initial Issue	--





TABLE OF CONTENTS

1. GENERAL INFORMATION	6
1.1. DESCRIPTION OF DEVICE (EUT)	6
1.2. SUPPORT EQUIPMENT LIST	7
1.3. EXTERNAL I/O CABLE	7
1.4. DESCRIPTION OF TEST FACILITY	7
1.5. TEST EQUIPMENT	7
1.6. MEASUREMENT UNCERTAINTY	7
1.7. DESCRIPTION OF TEST MODES	8
1.8. COIL SIZE	8
1.9. COIL SPECIFICATIONS	8
1.10. DUTY CYCLE	9
2. TEST METHODOLOGY	10
2.1. REFERENCE EVALUATION METHOD	10
2.2. LIMIT	10
2.3. TEST SETUP DIAGRAM	11
2.4. MEASUREMENT PROCEDURE	12
2.5. EQUIPMENT APPROVAL CONSIDERATIONS OF KDB 680106 D01v04	12
3. TEST RESULTS	13
3.1 VALIDATION RESULTS FOR THE NUMERICAL CALCULATION MODEL	14
3.2 FINAL H-FIELD EMISSION LEVEL WITH A COMBINATION OF MEASURED AND ESTIMATED RESULTS.	14
3.3 CONCLUSION	14
4. TEST SETUP PHOTOS	15



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT	: Wireless Power Bank
Test Model	: BJCDB001
Power Supply	: Battery Capacity: 4000mAh/3.85V(15.4Wh) Type-C Input: 5V $\overline{\text{---}}$ 3A(Max) Type-C Output: 5V $\overline{\text{---}}$ 3A Wireless Output: 5W Total Output: 5V $\overline{\text{---}}$ 3A
Hardware Version	: /
Software Version	: /
Wireless Charging	:
Operating Frequency	: 110.3~205.0KHz
Modulation Type	: Continuous Wave
Antenna Type	: Coil Antenna





1.2. Support equipment List

Manufacturer	Description	Model	Serial Number	Certificate
Honor	Phone	V30pro	---	FCC
SHENZHEN TIANYIN ELECTRONICS CO.,LTD	Power Adapter	TPA-46050200UU	---	FCC

Note: Auxiliary equipment is provided by the laboratory.

1.3. External I/O Cable

I/O Port Description	Quantity	Cable
Type-C USB Port	1	USB Cable: 0.8m, unshielded

1.4. Description of Test Facility

NVLAP Accreditation Code is 600167-0.

FCC Designation Number is CN5024

CAB identifier is CN0071.

CNAS Registration Number is L4595.

Test Firm Registration Number: 254912.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

1.5. Test Equipment

Equipment	Manufacturer	Model	Serial no.	Calibrated date	Calibrated Due
Exposure Level Tester	Narda	ELT-400	N-0713	2023-10-18	2024-10-17
B-Field Probe	Narda	100cm ²	M-1154	2023-10-18	2024-10-17

Exposure Level Tester ELT-400 detailed parameters are as follows:

Common parameter	
Operating temperature	-10 °C ~ +50 °C
Operation humidity	< 95 % (30 °C) or < 29 g/m ³
Weight	910 g
Size	180 mm x 100 mm x 55 mm(Main engine) / 290 mm x 125 mm Ø (Probe)
Display	LCD backlit display, 4 refresh rates per second
Battery	Nimh battery (4 x Mignon, AA), rechargeable
Operating time, typical	12 h
Power supply	100 ~240 V AC / 47 ~ 63 Hz
Charging time, typical	2 hours
Recommended calibration cycle	24 months
Country of origin	Germany

1.6. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Field Strength Uncertainty	1Hz~400KHz	1%	(1)

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add:101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

1.7. Description of Test Modes


Equipment under test was operated during the measurement under the following conditions:

☒ Charging and communication mode

Test Modes		
Mode 1	AC/DC Adapter (5V/3A) + EUT +Mobile Phone (Battery Status: <1%)	Record
Mode 2	AC/DC Adapter (5V/3A) + EUT +Mobile Phone (Battery Status: <50%)	Pre-tested
Mode 3	AC/DC Adapter (5V/3A) + EUT +Mobile Phone (Battery Status: <100%)	Pre-tested
Mode 4	EUT + Mobile Phone (Battery Status: <1%)	Record
Mode 5	EUT + Mobile Phone (Battery Status: <50%)	Pre-tested
Mode 6	EUT + Mobile Phone (Battery Status: <100%)	Pre-tested
Note: All test modes were pre-tested, but we only recorded the worst case in this report.		

1.8. Coil Size

一、尺寸 DIMENSION:(mm)

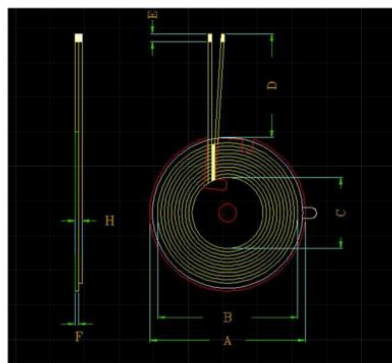[illegible]

二、原理图 SCHEMATIC DIAGRAM:



(Unit: mm)

1.9. Coil Specifications

Item	Parameter
Input inductance:	Transmitter 1: 6.5 μH ±10%
Material of enclosure(s):	Silk covered wire
Number of turns:	Transmitter 1: 11 turns



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add:101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



1.10. Duty Cycle

Mode	ON Timems (ms)	Periodms (ms)	Duty Cycle% (%)
Operating(110.3-205kHz)	/	/	100

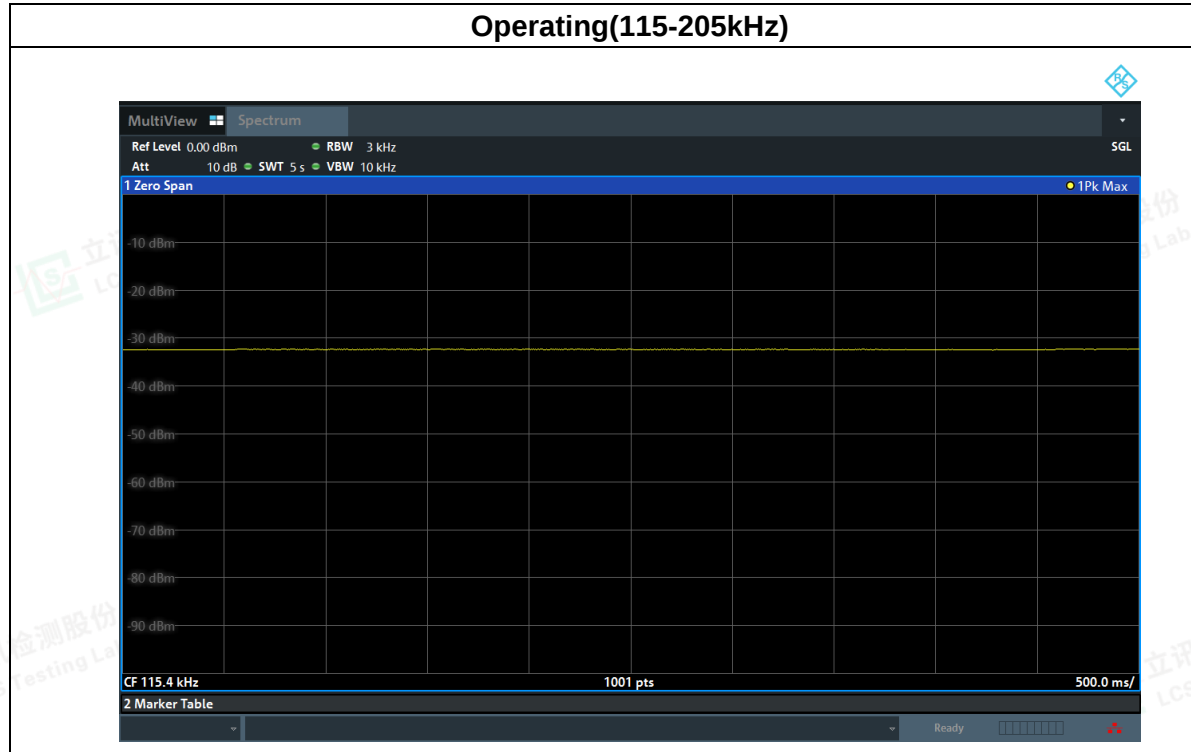

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



2. TEST METHODOLOGY

2.1. Reference Evaluation Method

[ANSI C95.1-1999](#): IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

[FCC KDB publication 680106 D01 RF Exposure Wireless Charging Apps v04](#): RF Exposure Considerations for Low Power Consumer Wireless Power Transfer Applications

[FCC CFR 47 part1 1.1310](#): Radiofrequency radiation exposure limits.

[FCC CFR 47 part2 2.1093](#): Radiofrequency radiation exposure evaluation: portable devices

[FCC CFR 47 part 18.107](#): Industrial, Scientific, and Medical Equipment

2.2. Limit

§1.1310: The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of FCC part 2.1093 of this chapter.

Table 1 to §1.1310(e)(1) - Limits for Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(i) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*(100)	≤6
3.0-30	1842/f	4.89/f	*(900/f ²)	<6
30-300	61.4	0.163	1.0	<6
300-1500	/	/	f/300	<6
1500-100000	/	/	5	<6
imits fo(ii) Lir General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	<30
1.34-30	824/f	2.19/f	*(180/f ²)	<30
30-300	27.5	0.073	0.2	<30
300-1500	/	/	f/1500	<30
1500-100000	/	/	1.0	<30

f = frequency in MHz

* = Plane-wave equivalent power density

Note 1: Occupational/controlled exposure limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure.

Note 2: General population/uncontrolled exposure limits apply in situations in which the general public may be exposed, or in which persons who are exposed as a consequence of their employment may not be fully aware of the potential for exposure or cannot exercise control over their exposure.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add:101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




2.3. Test Setup Diagram

For mobile exposure conditions:

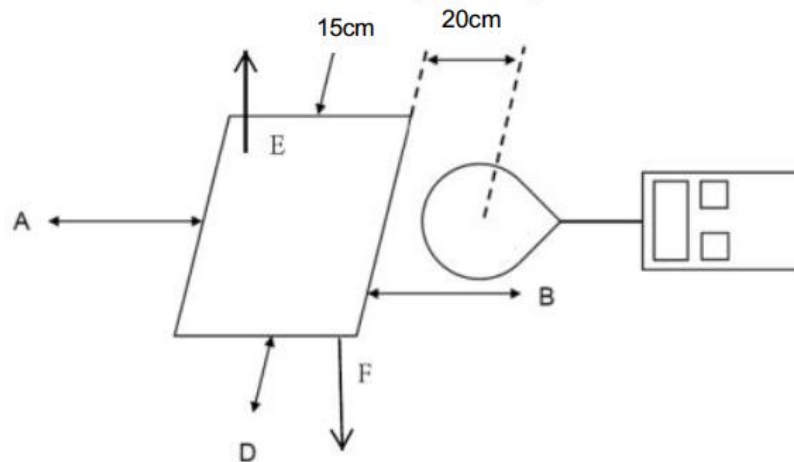

Note: The distance of the points A/B/C/D is 15cm, and the point E is 20cm.

For portable exposure conditions:

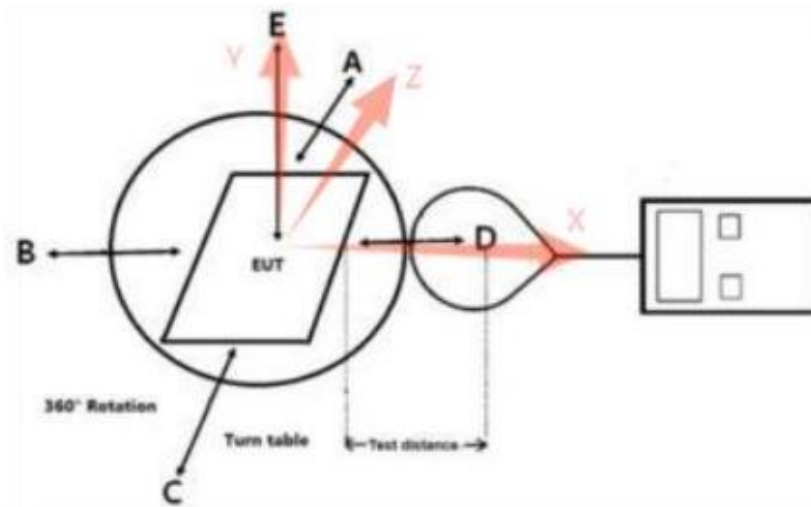

Note: The distance of the points A/B/C/D/E/F is 0,2,4,6,8,10,12,14,16,18, 20cm.
The values tested by the probe are X, Y, and Z on three axes perpendicular to the edge
of the device. Top and bottom side coincident with the axis(Y) of the main coil.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



2.4. Measurement Procedure

For mobile exposure conditions:

- The RF exposure test was performed in anechoic chamber.
- E and H-field measurements should be made with the center of the probe at a distance of 15 cm surrounding the EUT and 20 cm above the top surface of the primary/client pair.
- The highest emission level was recorded and compared with limit.
- The EUT was measured according to the KDB 680106 D01 Wireless Power Transfer v04.

For portable exposure conditions:

- The RF exposure test was performed in anechoic chamber.
- Perform H-field measurements for each edge/top surface of the host/client pair at every 2 cm, starting from as close as possible out to 20 cm
- The highest emission level was recorded and compared with limit.
- The EUT was measured according to the KDB 680106 D01 Wireless Power Transfer v04.

2.5. Equipment Approval Considerations of KDB 680106 D01v04

Requirements of KDB 680106 D01	Description
WPT operating frequency (or frequencies).	The device operate in the frequency range 110.3~205.0KHz
Number of radiating structure(Coil)	Only one radiated Coil
Conducted power for each radiating structure.	Maximum 5W
§ 2.1091-Mobile or § 2.1093-Portable demonstrated scenarios of operation, including RF exposure compliance information	Mobile and Portable Device
Maximum distance from the WPT transmitter at which, by design, a load can be charged (including slow-charging operations)	Charing with the load directly contact



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add:101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




3. TEST RESULTS

For portable exposure condition:


- (1). The portable test modes have covered the considerations of the mobile test, only record the test data of the portable conditions in this report.
- (2) Operating modes with client device (1 %, 50%, 99% battery status of client device) have been test, only show the data of worst case of 1% battery status of client device.
- (3) Test performed with all the radiating structures operating at maximum power at the same time.
- (4) H-field measurements are taken along all three axes the device from 0cm~20cm in 2cm minimum increment for each edge surface of the host/client pair. If the center of the probe sensing element is more than 5mm from the probe outer edge, the field strengths need to be estimated for the positions that are not reachable.
- (5) According to Calibration information and specification about ETL-400 Probe, The Probe ETL-400 Probe's sensitive elements center is located in the probe's center, and the distance from the sensitive elements center to the tip of probe is 6.25cm.
- (6) The actual 0cm, 2cm, 4cm and 6cm field strengths need to be estimated for the positions that are not reachable via numerical calculation.
- (7) Use Biot-Savart formula theory to estimate the strength of the magnetic field that the measuring instrument cannot measure. According to Biot-Savart formula:

Top & Bottom Side:

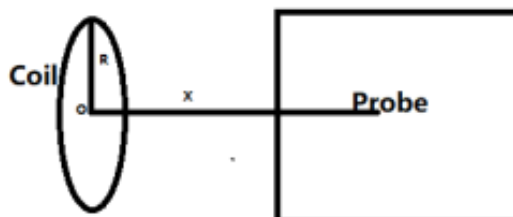

$$B = \frac{\mu_0 * I * N * R^2}{2 * (R^2 + x^2)^{3/2}}$$

Front, left, right & rear Side:

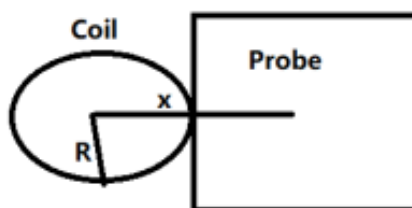

$$B = \frac{\mu_0 * I * N}{2 * x}$$





B(Unit:A/m): means H-field value;
 μ_0 is space permeability; $\mu_0=4\pi*10^{-7}$;

I(Unit:A): A current element passing through a radiated coil;

R(Unit:m): means the Radius of radiated coil,According to provided Antenna specification:

$R=43.5/2=21.75\text{mm}=0.2175\text{m}$;

Test Distance(Unit:m): The distance from the sensing element of the probe to the edge of the device surface.

x(Unit:m): means the center of the coil to the sensing elements of the probe. (For top & bottom side: x=test distance; For other side: x=test distance+R)

N: Number of turns, according to providing "Antenna specification" files: N=10.

(8) For validation purposes: If the value to show a 30% agreement between the mode and the probe measurements for the two closest points to the device surface, and with 2cm increments. Then this extrapolation method is reasonable.

3.1 Validation results for the numerical calculation model

a) Measure with probe directed contact(test distace:6.25cm)

b) Using Biot-Savart formula to calculate estimated results at test distance of 8cm and 10 cm;

c) measure at test distance of 8 cm and 10cm;

d) Compares the estimated results and measured result, the varation should not be greater than 30%;

Conclusion: The numerical calculation model is valid.

Distance(cm)	Test condition: Mode 1																	
	Top			Bottom			Left			Right			Front			Back		
	Mea.	Est.	Var.	Mea.	Est.	Var.	Mea.	Est.	Var.	Mea.	Est.	Var.	Mea.	Est.	Var.	Mea.	Est.	Var.
6.25	0.0421	/	/	0.0418	/	/	0.0382	/	/	0.0391	/	/	0.0402	/	/	0.0396	/	/
8	0.021	0.0214	2.1	0.0206	0.0213	3.3	0.0317	0.0316	-0.2	0.0356	0.0324	-9.0	0.0354	0.0333	-6.0	0.0292	0.0328	12.2
10	0.0125	0.0114	-9.2	0.0127	0.0113	-11.0	0.0246	0.0264	7.4	0.0271	0.0271	0.1	0.0314	0.0278	-11.5	0.0296	0.0274	-7.4
Mea.-Measured H-field(A/m); Est.-Estimated H-field(A/m); Var.-Variation between measured and estimated value(%);																		

3.2 Final H-Field Emission level with a combination of measured and estimated results.

Test condition: Mode 1

Distance(cm)	Type	Result(A/m)						Limit(A/m)
		Top	Bottom	Left	Right	Front	Back	
0	Estimate	1.1858	1.1774	0.148	0.1515	0.1557	0.1534	1.63
2	Estimate	0.473	0.4696	0.0771	0.0789	0.0811	0.0799	1.63
4	Estimate	0.1293	0.1283	0.0521	0.0533	0.0548	0.054	1.63
6	Estimate	0.0469	0.0466	0.0394	0.0403	0.0414	0.0408	1.63
8	Measured	0.021	0.0206	0.0317	0.0356	0.0354	0.0292	1.63
10	Measured	0.0125	0.0127	0.0246	0.0271	0.0314	0.0296	1.63
12	Measured	0.0058	0.0066	0.0235	0.0245	0.0233	0.0249	1.63
14	Measured	0.0038	0.0046	0.0179	0.0216	0.0230	0.0207	1.63
16	Measured	0.0026	0.0026	0.0185	0.0164	0.0171	0.0167	1.63
18	Measured	0.0021	0.002	0.0181	0.0180	0.0146	0.0187	1.63
20	Measured	0.0013	0.0013	0.0164	0.0140	0.0147	0.0153	1.63

3.3 Conclusion

A minimum safety distance of 0 cm to the antenna is required when the device is charging a smart phone for portable exposure. The detected emissions are below the limitations according FCC KDB 680106 and confirmed by the FCC according to KDB Inquire.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add:101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




4. TEST SETUP PHOTOS

(The separation distance from the geometric center of the probe to the edge of the device is 6.25cm)



0cm-Left

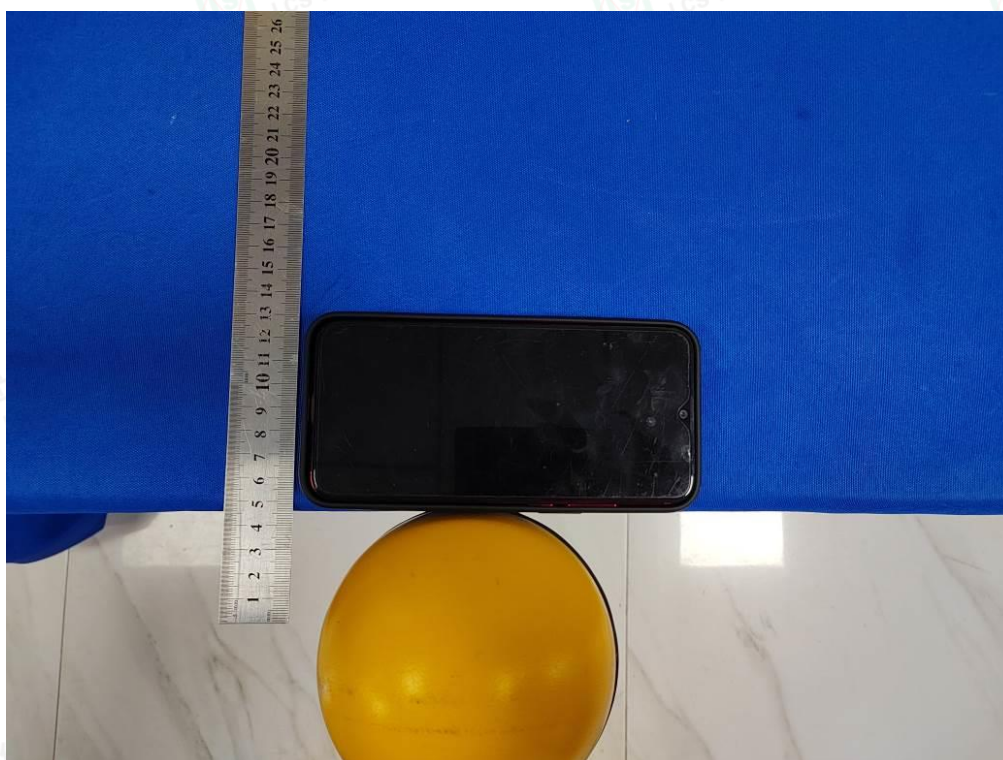

0cm-Right




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

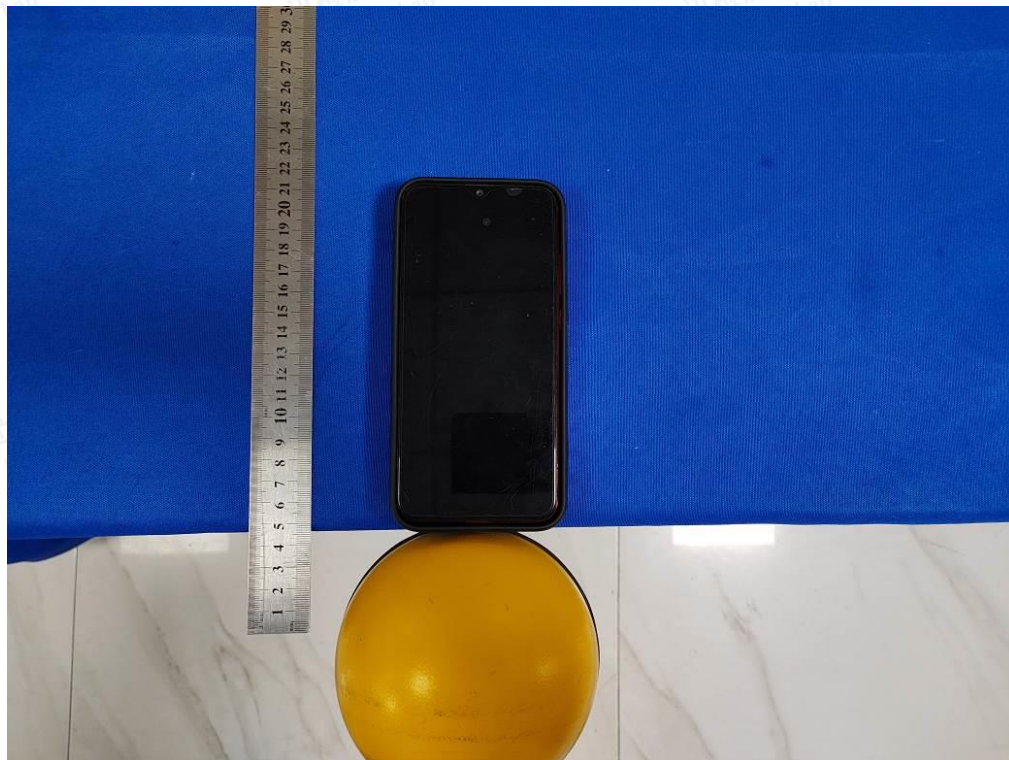

0cm-Top

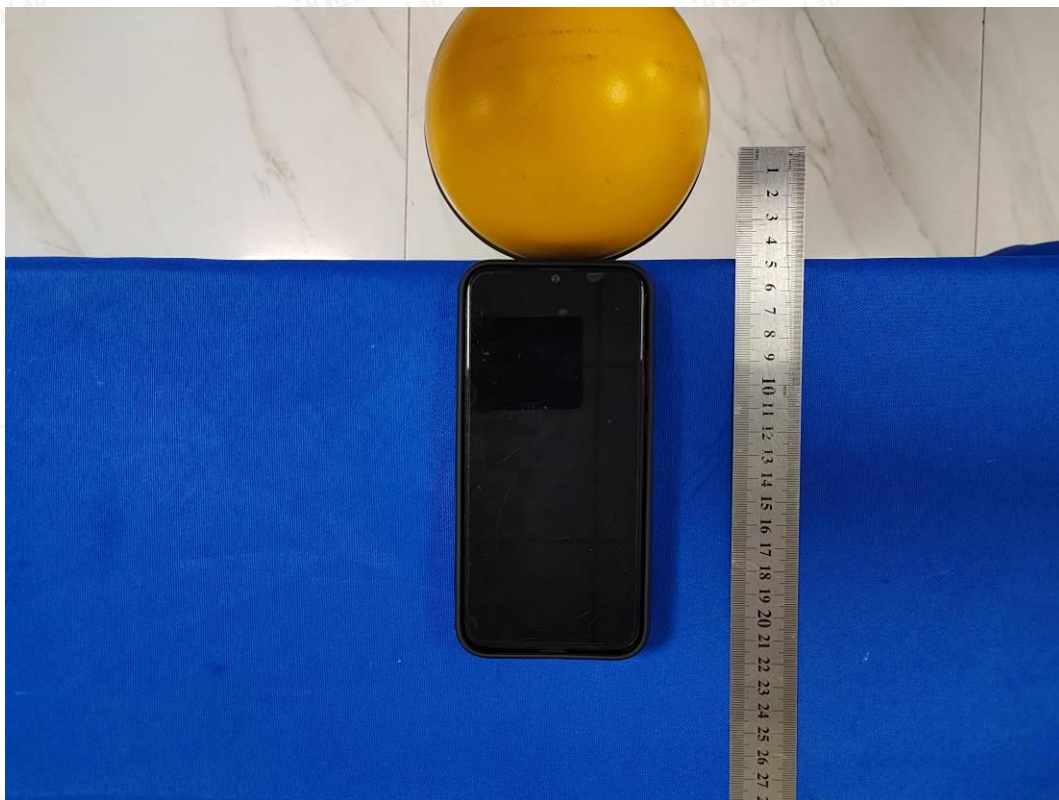

0cm-Bottom



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



0cm-Front

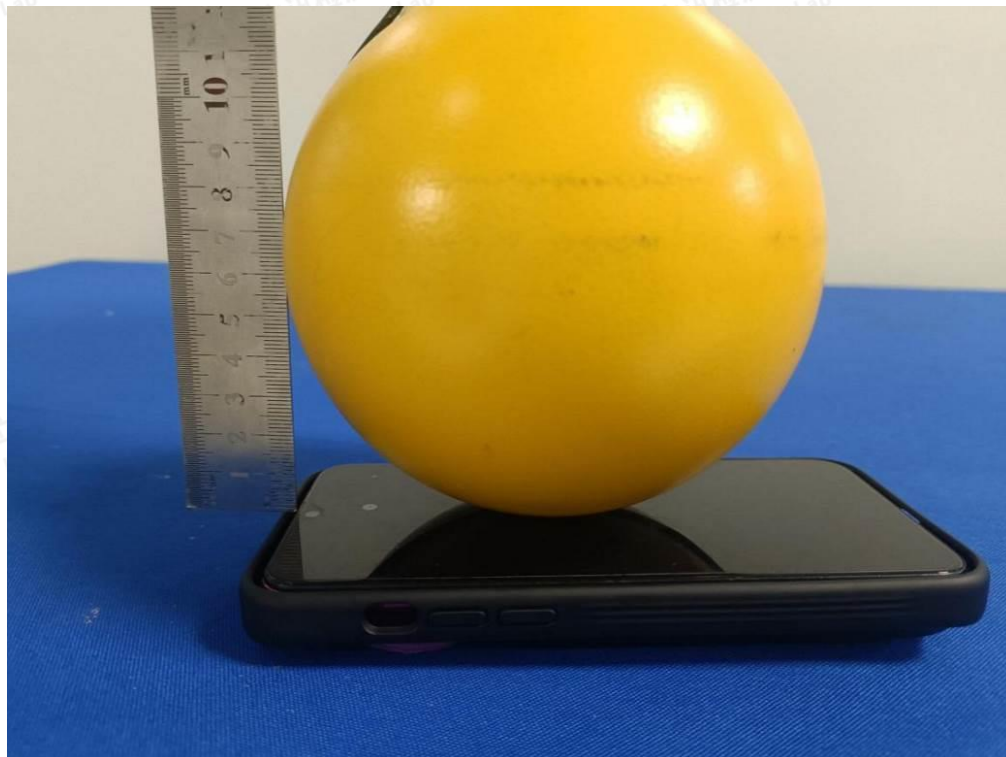

0cm-Back



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



20cm-Left




Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

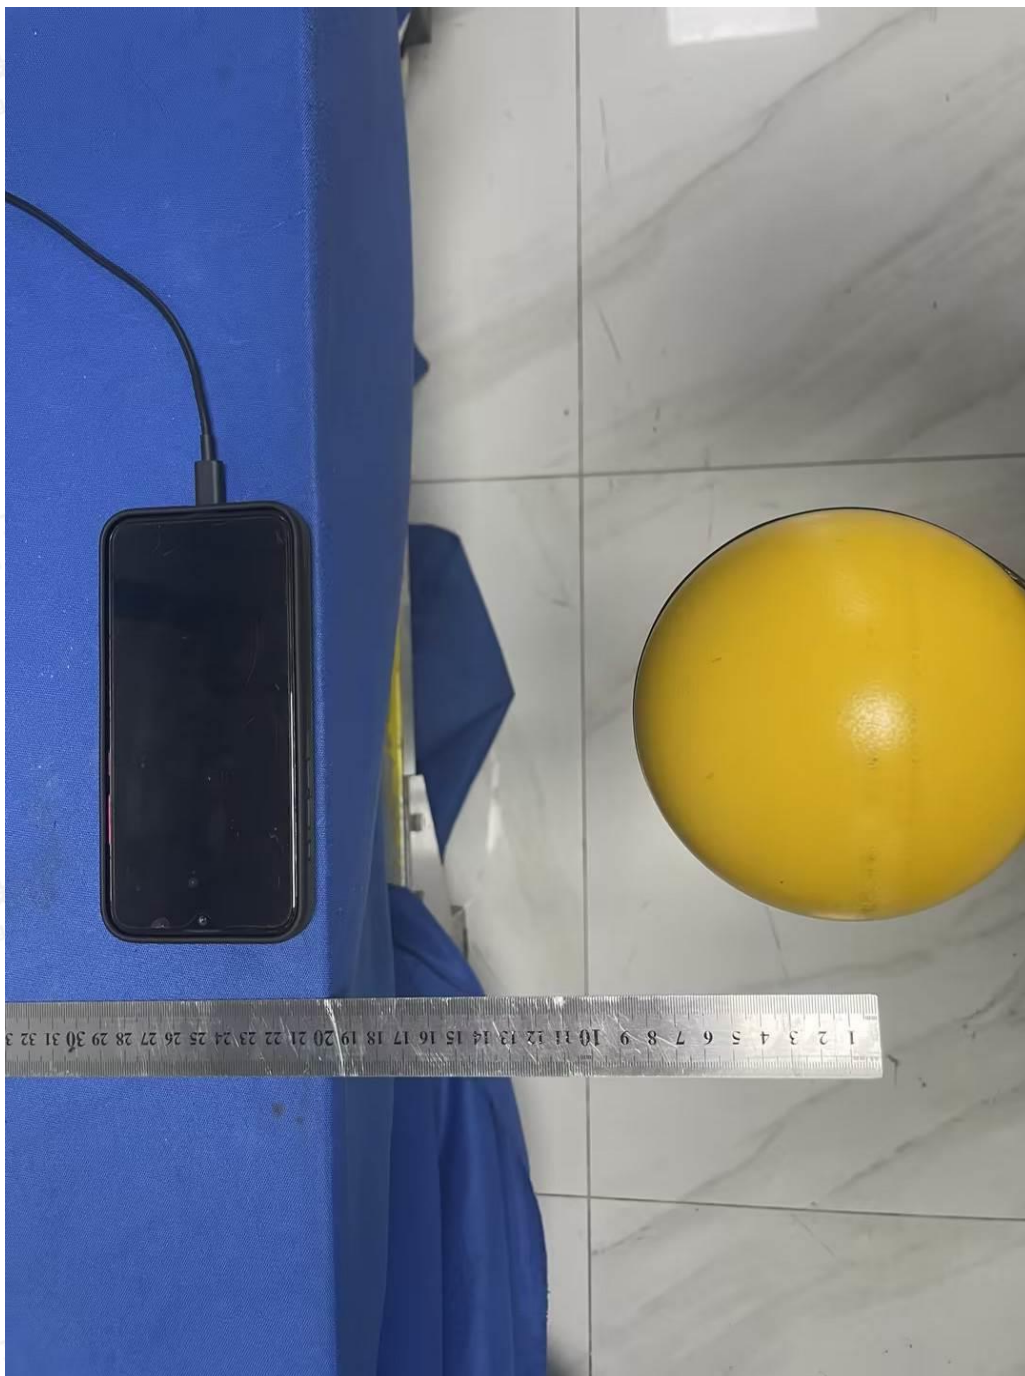

20cm-Right




Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

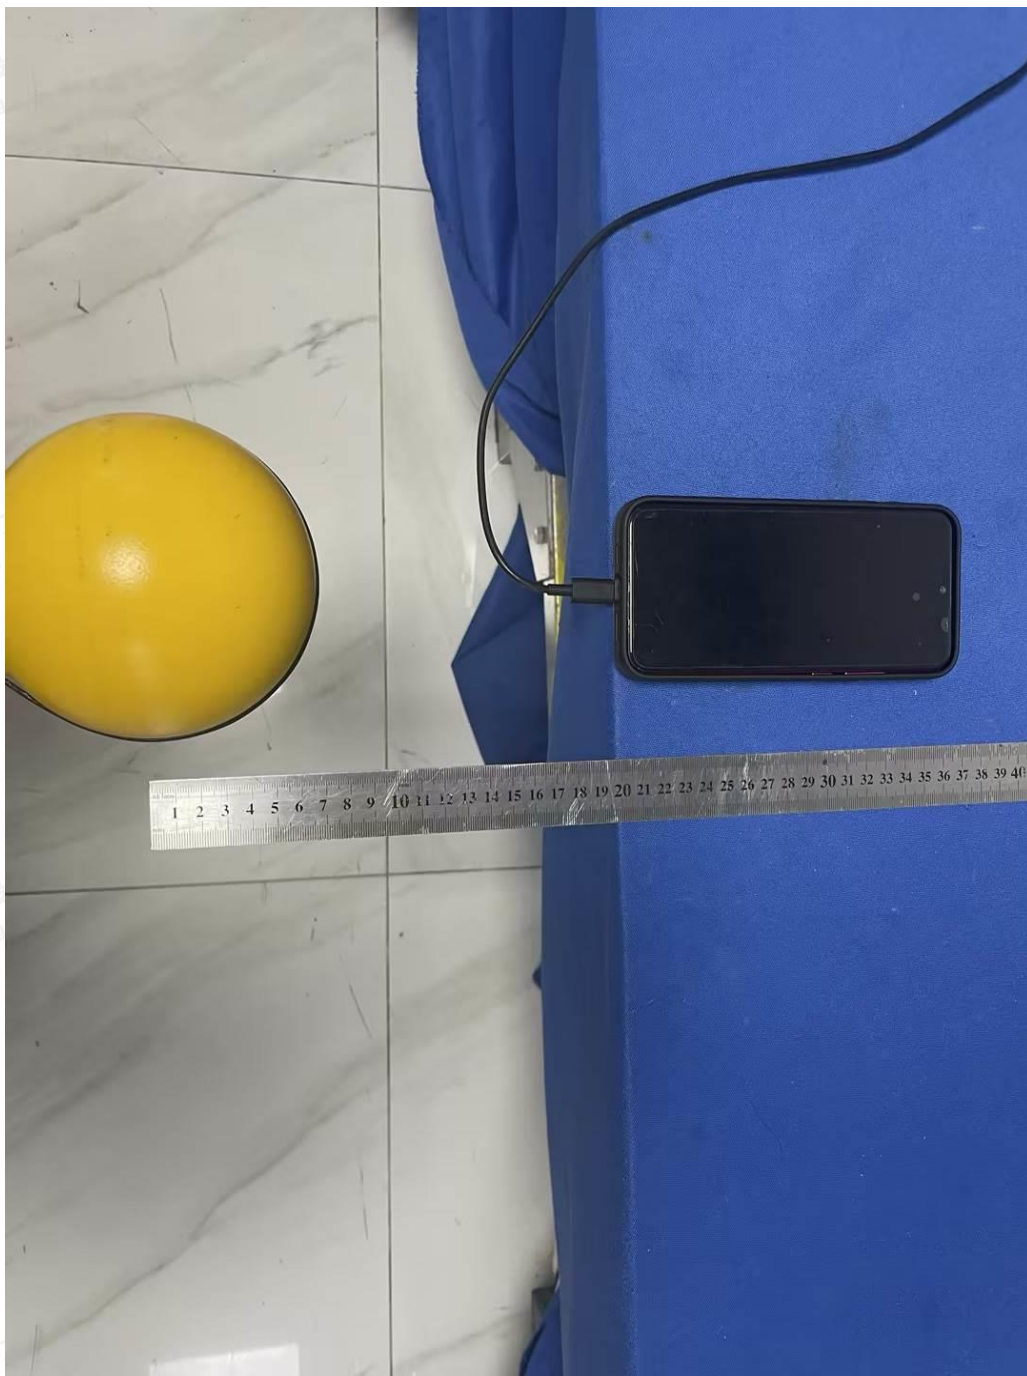

20cm-Top




Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

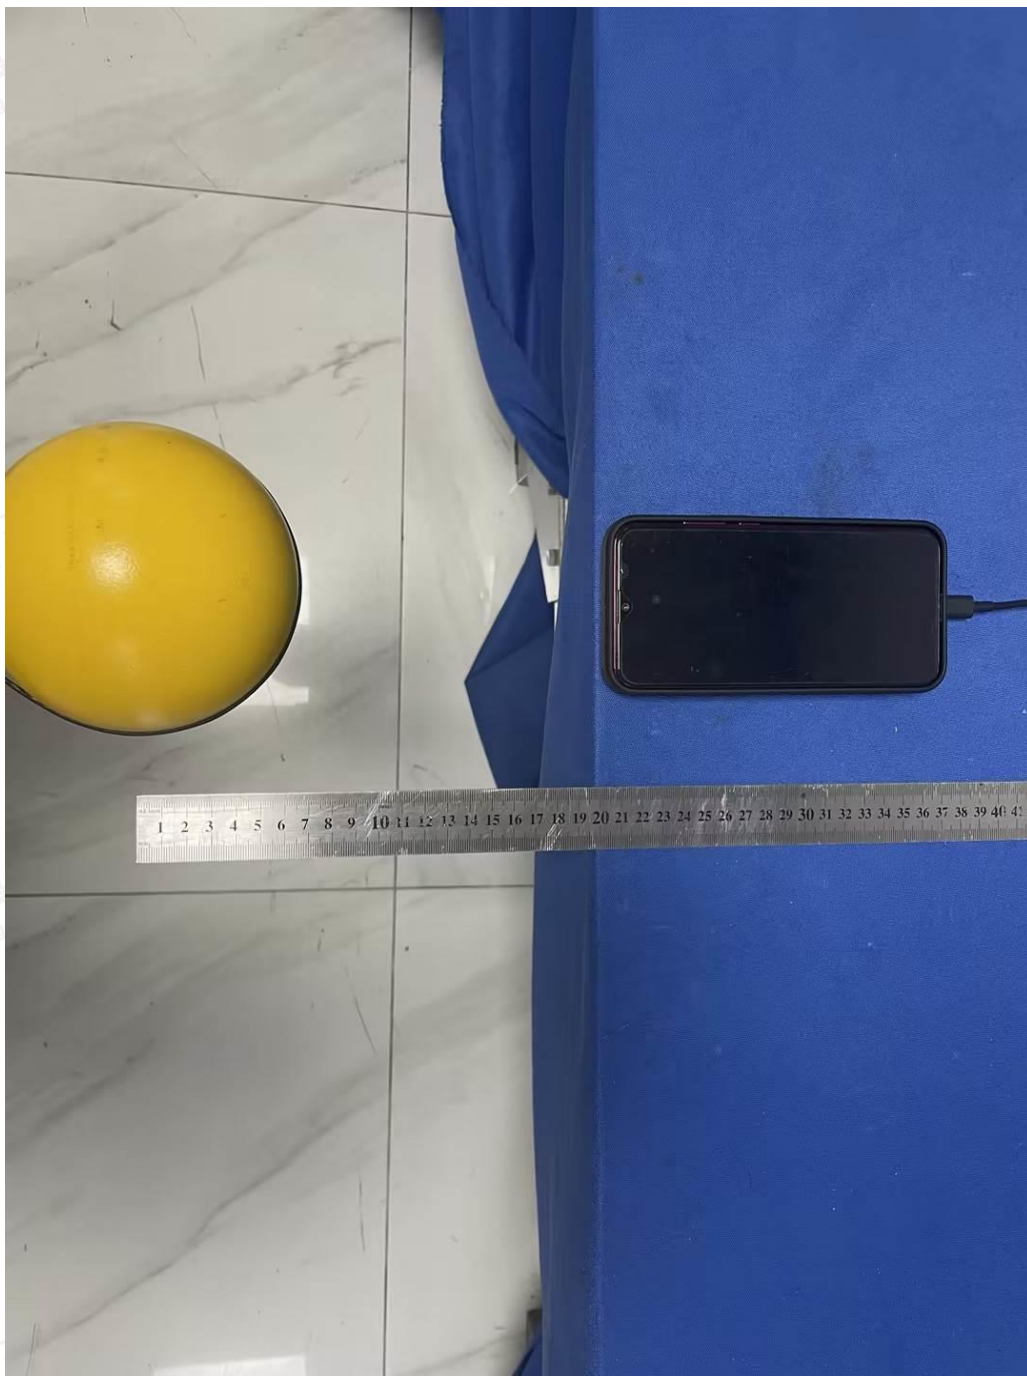

20cm-Bottom



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



20cm-Front

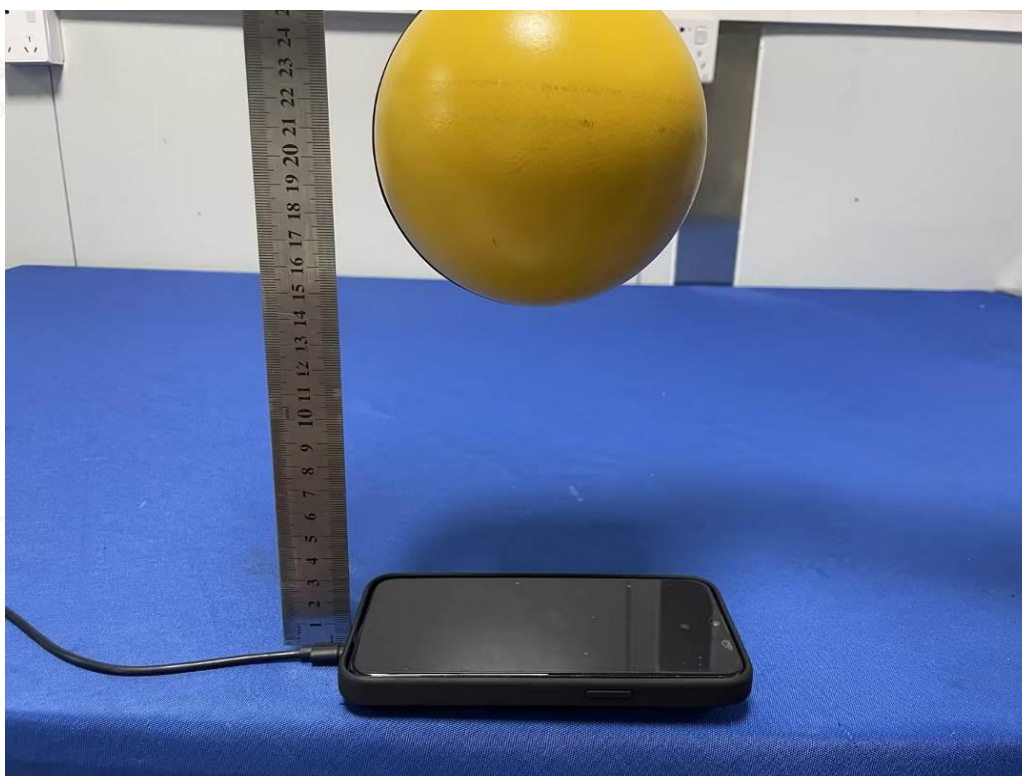

20cm-Back

-----THE END OF REPORT-----

