



OBW NVNT n40 5755MHz Ant1

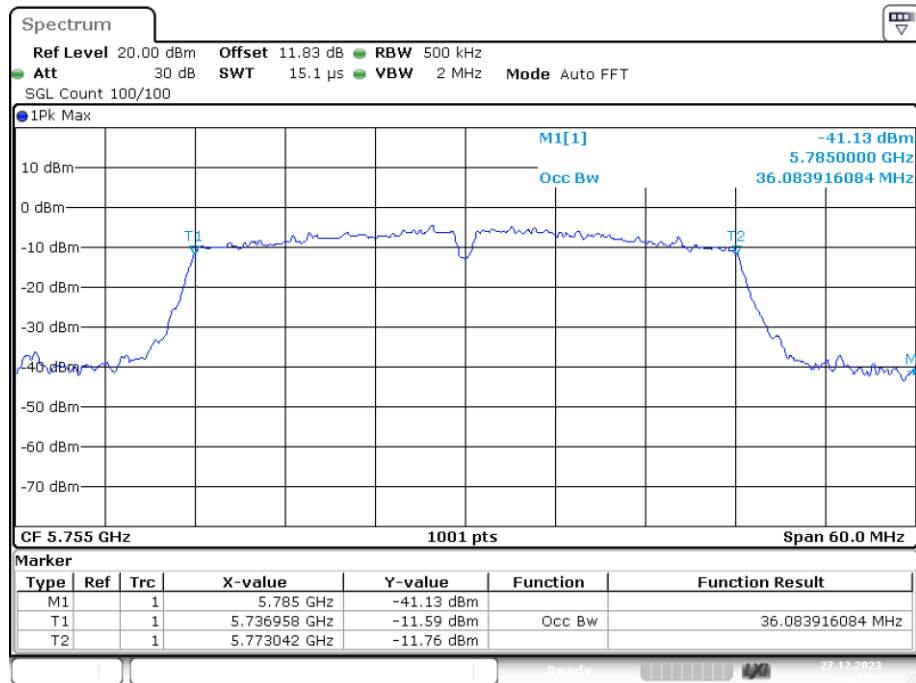


Date: 27.DEC.2023 09:01:53

OBW NVNT n40 5795MHz Ant1

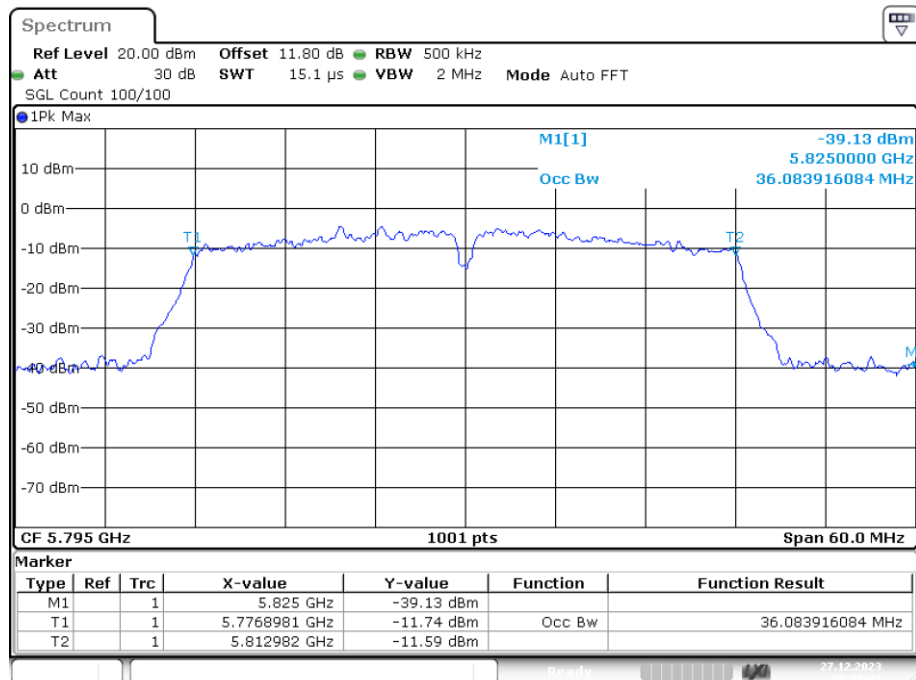

Date: 27.DEC.2023 09:06:37

4.4 Peak Transmit Power

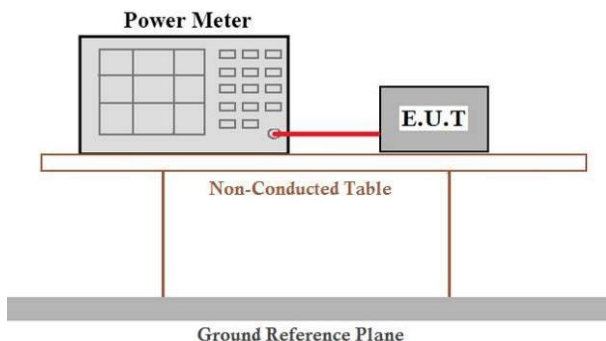Test Requirement:	FCC Part15 E Section 15.407
Test Method:	KDB 789033 D02 General UNII Test Procedures New Rules v02r01
Limit:	For the band 5.15-5.25GHz, 5.25-5.35GHz, 5.47-5.725GHz, the maximum conducted output power over the frequency bands of operation shall not exceed 250mW. For the band 5.725-5.85GHz, the maximum conducted output power over the frequency bands of operation shall not exceed 1W.
Test setup:	 The diagram illustrates the test setup. A 'Power Meter' is connected to an 'E.U.T' (Equipment Under Test) by a red cable. Both components are positioned on a 'Non-Conducted Table'. This table is supported by two vertical legs. Below the table, a 'Ground Reference Plane' is indicated.
Test procedure:	Measurement using an RF average power meter (i) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied a) The EUT is configured to transmit continuously or to transmit with a constant duty cycle. b) At all times when the EUT is transmitting, it must be transmitting at its maximum power control level. c) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five. (ii) If the transmitter does not transmit continuously, measure the duty cycle, x, of the transmitter output signal as described in section B). (iii) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter. (iv) Adjust the measurement in dBm by adding $10 \log(1/x)$ where x is the duty cycle (e.g., $10 \log(1/0.25)$ if the duty cycle is 25 percent).
Test Instruments:	Refer to section 5.10 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Measurement Data**Band 1 (5150-5250 MHz)**

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	EIRP (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	19.41	14.173	24	Pass
NVNT	a	5200	Ant1	18.80	13.56	24	Pass
NVNT	a	5240	Ant1	19.21	13.97	24	Pass
NVNT	ac20	5180	Ant1	19.04	13.797	24	Pass
NVNT	ac20	5200	Ant1	18.81	13.572	24	Pass
NVNT	ac20	5240	Ant1	19.65	14.407	24	Pass
NVNT	ac40	5190	Ant1	19.34	14.103	24	Pass
NVNT	ac40	5230	Ant1	19.14	13.9	24	Pass
NVNT	ac80	5210	Ant1	18.64	13.404	24	Pass
NVNT	n20	5180	Ant1	19.31	14.072	24	Pass
NVNT	n20	5200	Ant1	19.00	13.764	24	Pass
NVNT	n20	5240	Ant1	19.72	14.48	24	Pass
NVNT	n40	5190	Ant1	19.14	13.895	24	Pass
NVNT	n40	5230	Ant1	19.48	14.236	24	Pass


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	EIRP (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant2	18.68	13.439	24	Pass
NVNT	a	5200	Ant2	18.65	13.405	24	Pass
NVNT	a	5240	Ant2	18.58	13.344	24	Pass
NVNT	ac20	5180	Ant2	18.55	13.312	24	Pass
NVNT	ac20	5200	Ant2	18.68	13.437	24	Pass
NVNT	ac20	5240	Ant2	19.17	13.932	24	Pass
NVNT	ac40	5190	Ant2	18.84	13.595	24	Pass
NVNT	ac40	5230	Ant2	19.17	13.932	24	Pass
NVNT	ac80	5210	Ant2	18.60	13.36	24	Pass
NVNT	n20	5180	Ant2	18.68	13.441	24	Pass
NVNT	n20	5200	Ant2	18.80	13.555	24	Pass
NVNT	n20	5240	Ant2	18.88	13.643	24	Pass
NVNT	n40	5190	Ant2	18.98	13.741	24	Pass
NVNT	n40	5230	Ant2	19.31	14.072	24	Pass

Condition	Mode	Frequency (MHz)	Antenna	EIRP (dBm)	Limit (dBm)	Verdict
NVNT	ac20	5180	MIMO	16.57	24	Pass
NVNT	ac20	5200	MIMO	16.52	24	Pass
NVNT	ac20	5240	MIMO	17.19	24	Pass
NVNT	ac40	5190	MIMO	16.87	24	Pass
NVNT	ac40	5230	MIMO	16.93	24	Pass
NVNT	ac80	5210	MIMO	16.39	24	Pass
NVNT	n20	5180	MIMO	16.78	24	Pass
NVNT	n20	5200	MIMO	16.67	24	Pass
NVNT	n20	5240	MIMO	17.09	24	Pass
NVNT	n40	5190	MIMO	16.83	24	Pass
NVNT	n40	5230	MIMO	17.17	24	Pass

Duty Cycle


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)
NVNT	a	5180	Ant1	100
NVNT	a	5200	Ant1	100
NVNT	a	5240	Ant1	100
NVNT	ac20	5180	Ant1	100
NVNT	ac20	5200	Ant1	100
NVNT	ac20	5240	Ant1	100
NVNT	ac40	5190	Ant1	100
NVNT	ac40	5230	Ant1	100
NVNT	ac80	5210	Ant1	100
NVNT	n20	5180	Ant1	100
NVNT	n20	5200	Ant1	100
NVNT	n20	5240	Ant1	100
NVNT	n40	5190	Ant1	100
NVNT	n40	5230	Ant1	100

Duty Cycle NVNT a 5180MHz Ant1

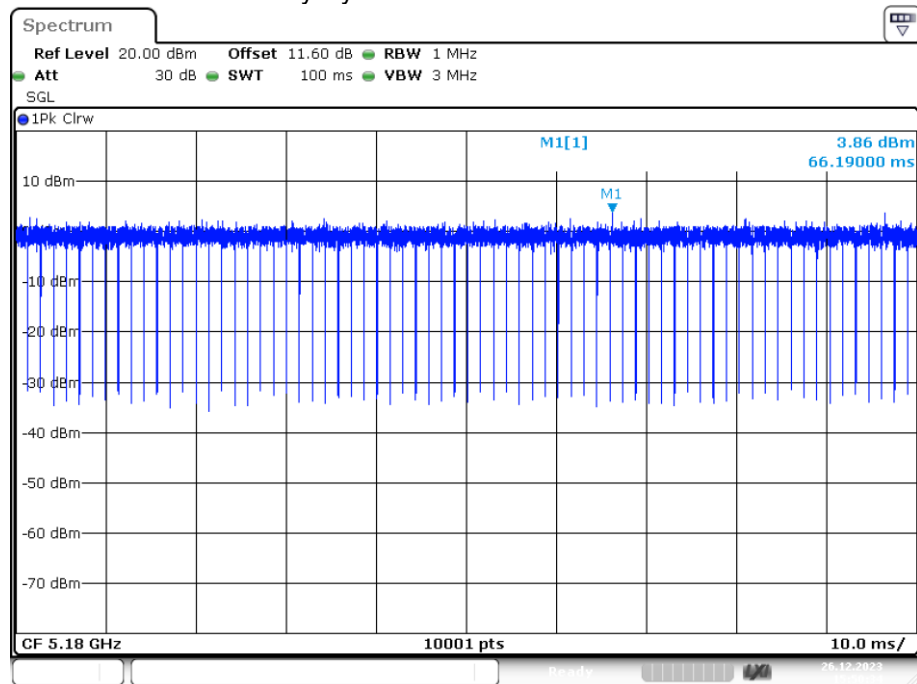


Date: 26.DEC.2023 15:50:34

Duty Cycle NVNT a 5200MHz Ant1

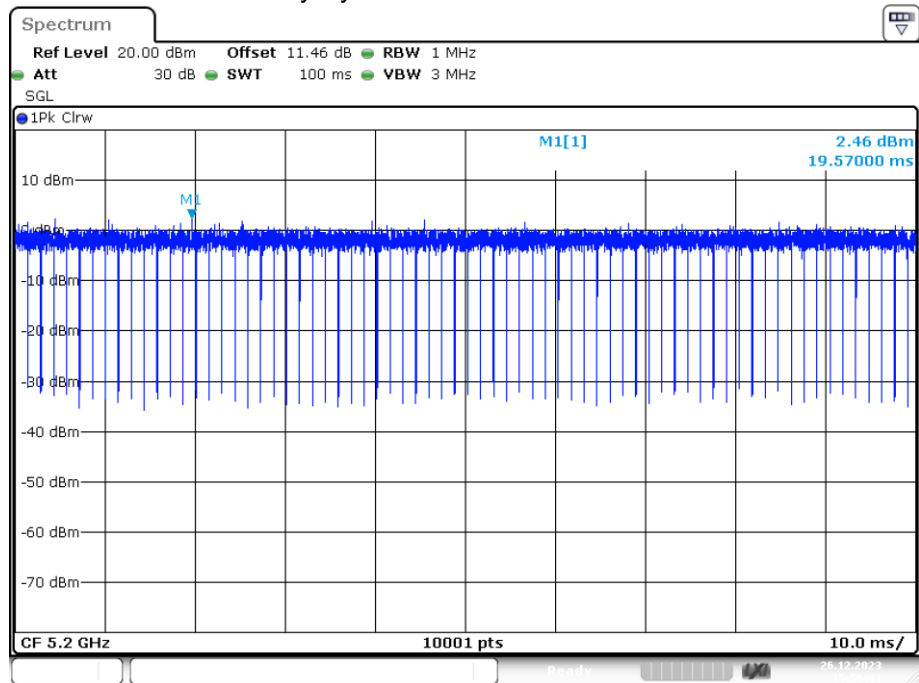


Date: 26.DEC.2023 15:56:41

Duty Cycle NVNT a 5240MHz Ant1

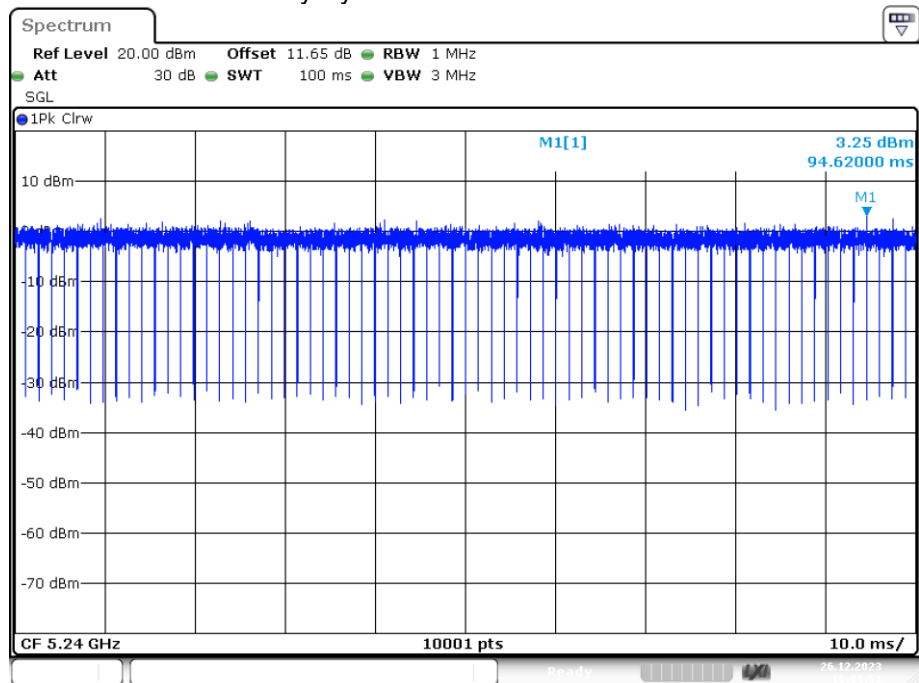


Date: 26.DEC.2023 16:01:50

Duty Cycle NVNT ac20 5180MHz Ant1

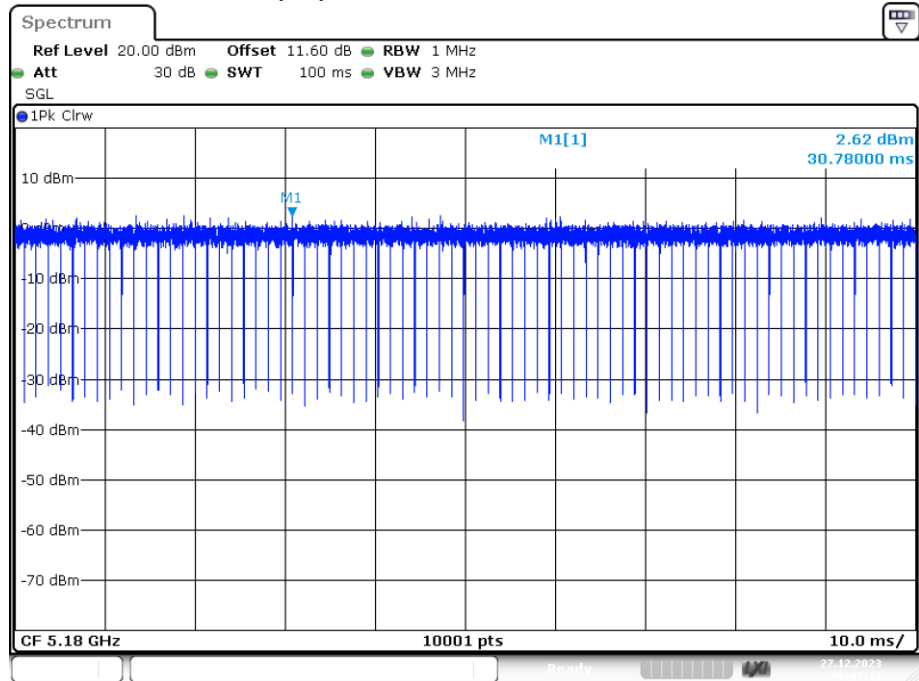


Date: 27.DEC.2023 06:03:11

Duty Cycle NVNT ac20 5200MHz Ant1

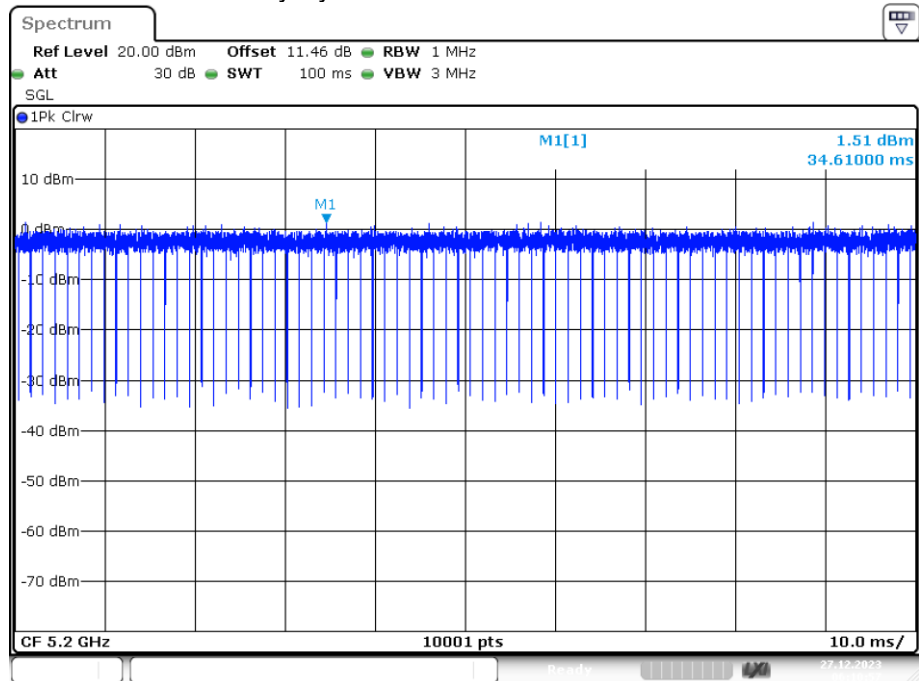


Date: 27.DEC.2023 06:10:57

Duty Cycle NVNT ac20 5240MHz Ant1

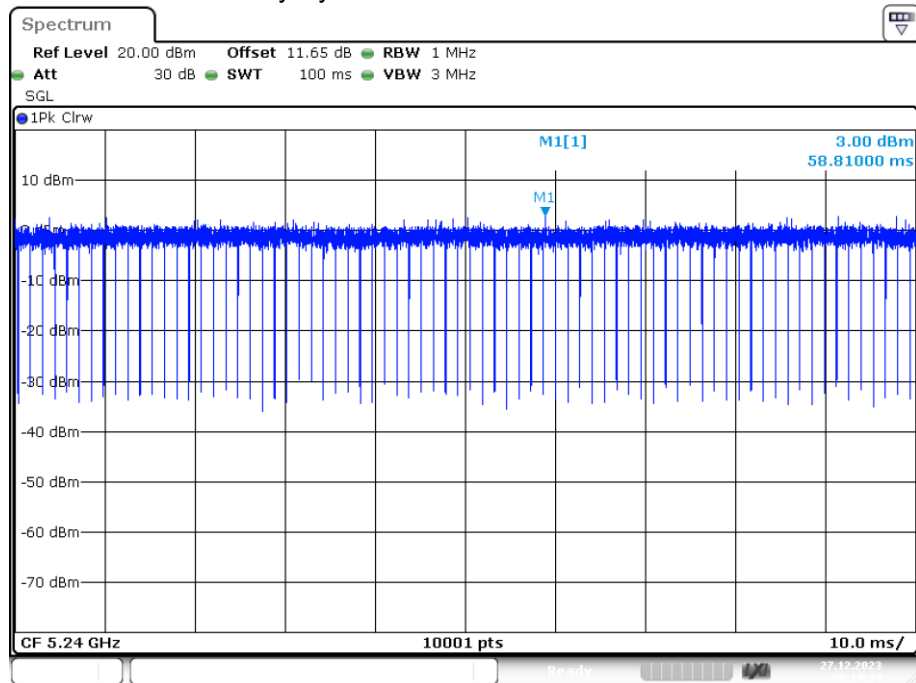


Date: 27.DEC.2023 06:14:14

Duty Cycle NVNT ac40 5190MHz Ant1

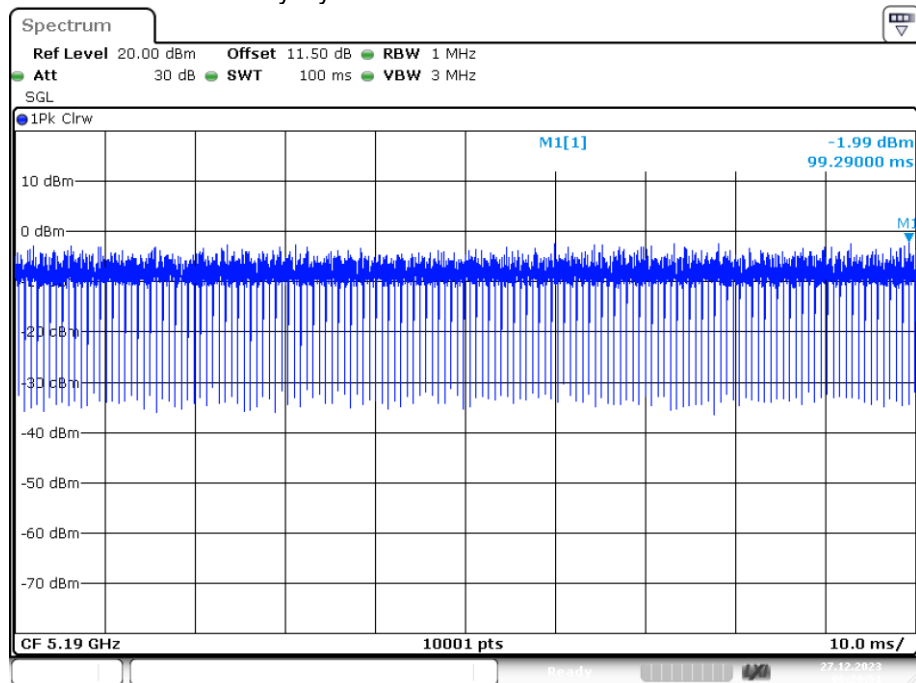


Date: 27.DEC.2023 06:29:51

Duty Cycle NVNT ac40 5230MHz Ant1

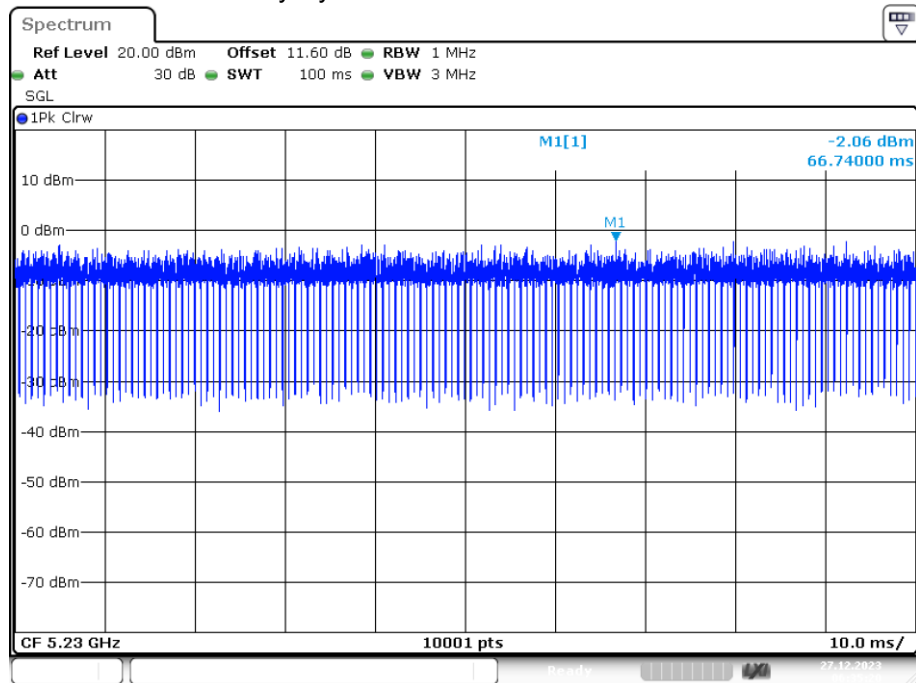


Date: 27.DEC.2023 06:35:20

Duty Cycle NVNT ac80 5210MHz Ant1

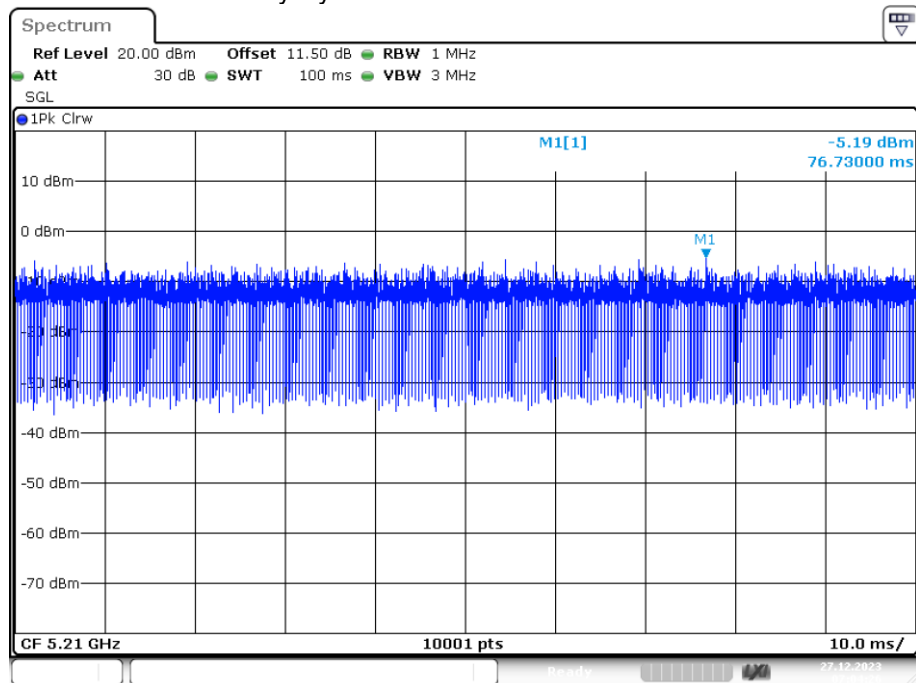


Date: 27.DEC.2023 07:04:25

Duty Cycle NVNT n20 5180MHz Ant1

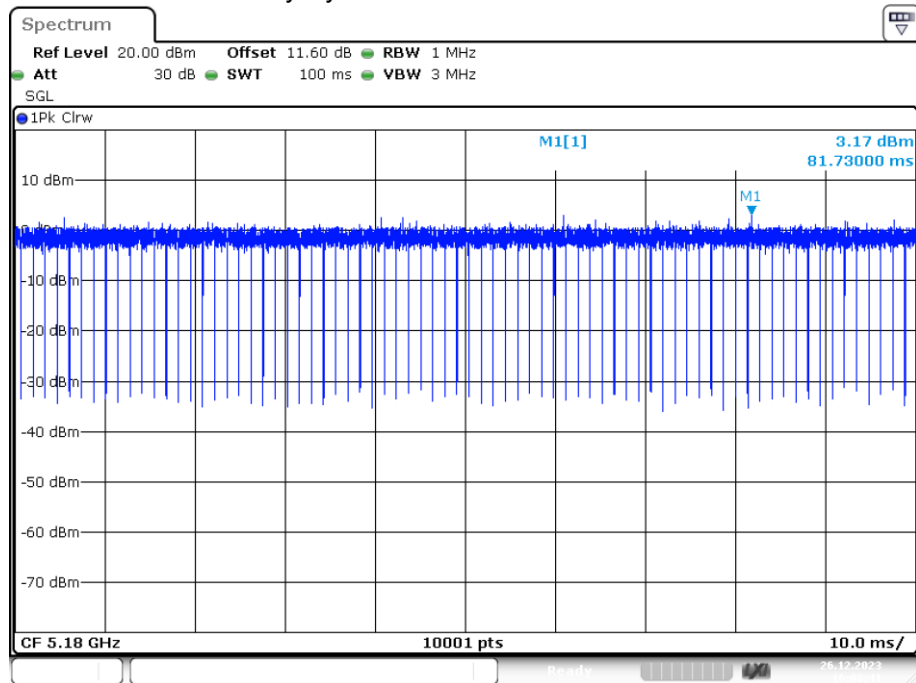


Date: 26.DEC.2023 16:08:41

Duty Cycle NVNT n20 5200MHz Ant1

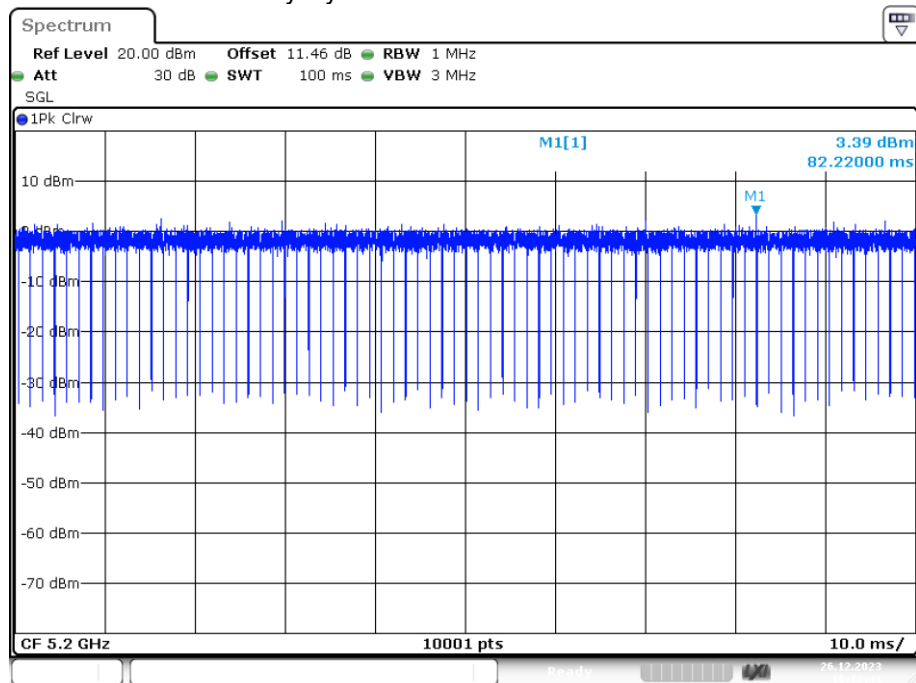


Date: 26.DEC.2023 16:12:41

Duty Cycle NVNT n20 5240MHz Ant1

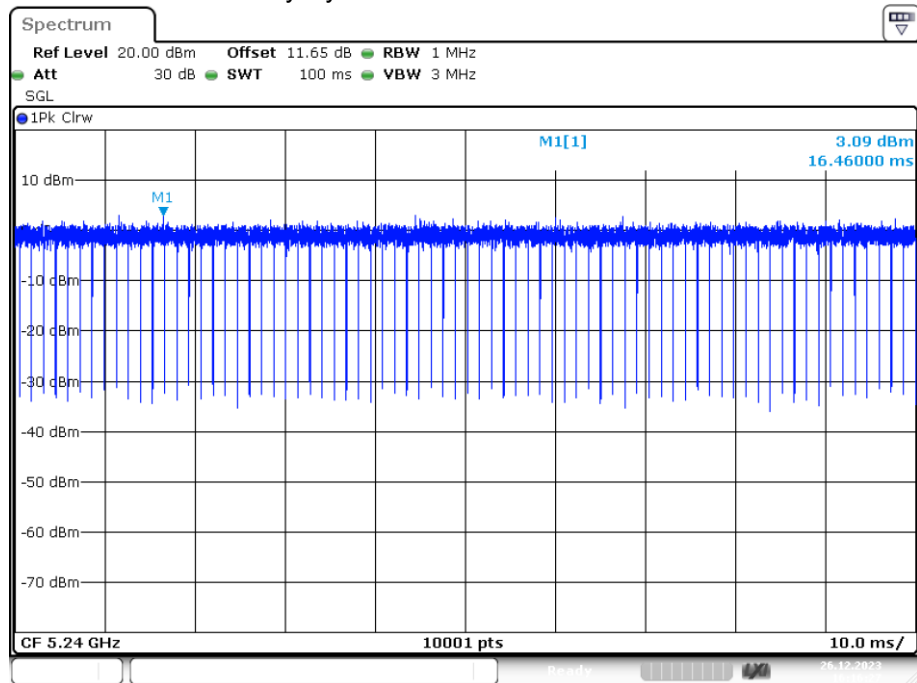


Date: 26.DEC.2023 16:16:28

Duty Cycle NVNT n40 5190MHz Ant1

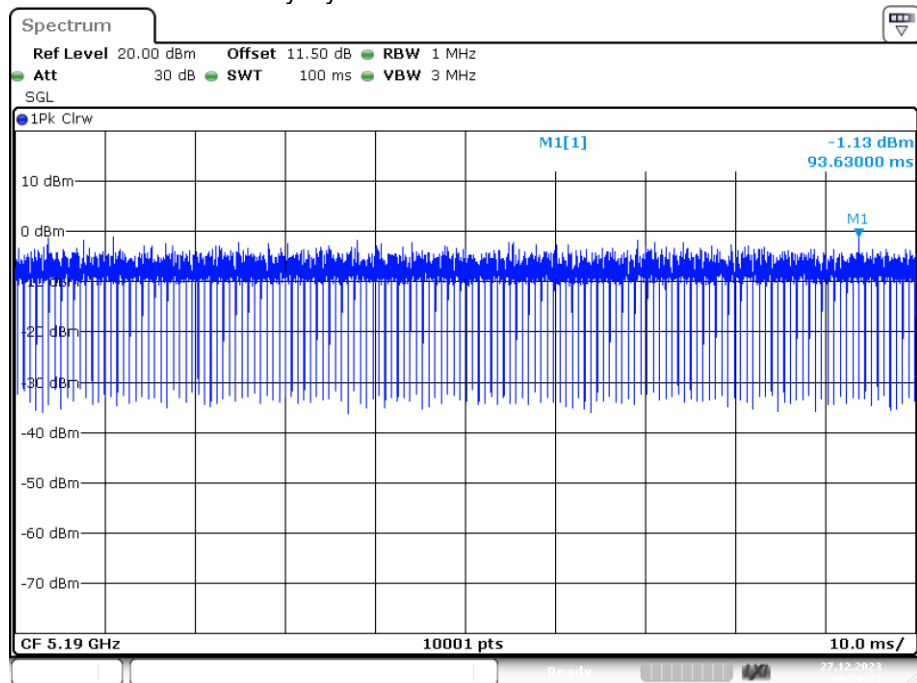

Date: 27.DEC.2023 06:20:31

Duty Cycle NVNT n40 5230MHz Ant1

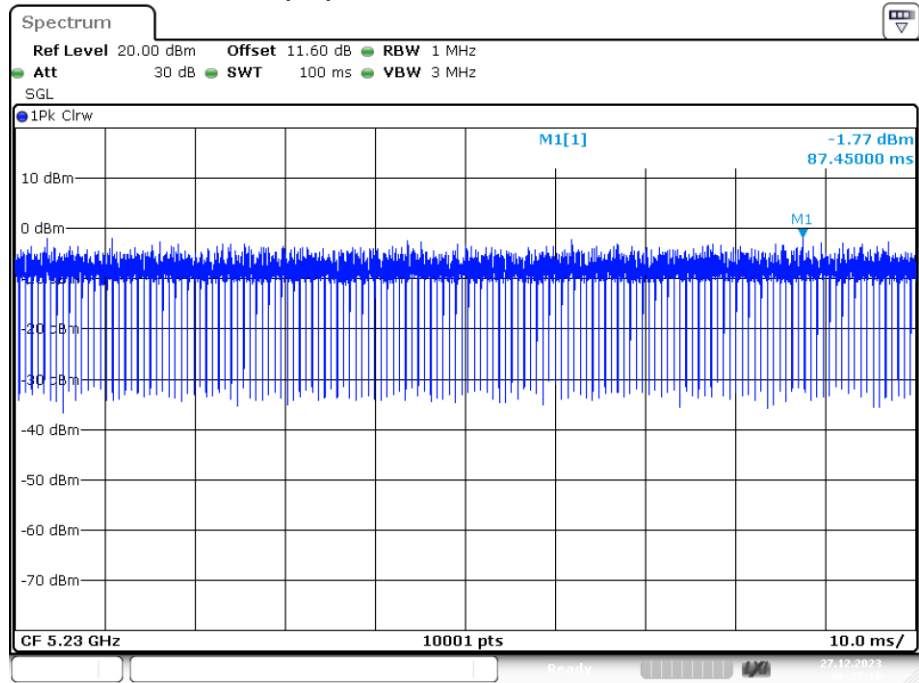

Date: 27.DEC.2023 06:25:16

Band 4 (5725 – 5850 MHz)

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	EIRP (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant1	19.29	14.054	30	Pass
NVNT	a	5785	Ant1	18.67	13.425	30	Pass
NVNT	a	5825	Ant1	18.70	13.462	30	Pass
NVNT	ac20	5745	Ant1	19.06	13.816	30	Pass
NVNT	ac20	5785	Ant1	18.59	13.346	30	Pass
NVNT	ac20	5825	Ant1	18.17	12.925	30	Pass
NVNT	ac40	5755	Ant1	18.60	13.363	30	Pass
NVNT	ac40	5795	Ant1	18.27	13.032	30	Pass
NVNT	ac80	5775	Ant1	18.61	13.369	30	Pass
NVNT	n20	5745	Ant1	19.03	13.792	30	Pass
NVNT	n20	5785	Ant1	18.58	13.335	30	Pass
NVNT	n20	5825	Ant1	18.62	13.375	30	Pass
NVNT	n40	5755	Ant1	18.61	13.367	30	Pass
NVNT	n40	5795	Ant1	18.33	13.091	30	Pass


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	EIRP (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant2	18.81	13.566	30	Pass
NVNT	a	5785	Ant2	19.11	13.868	30	Pass
NVNT	a	5825	Ant2	19.10	13.858	30	Pass
NVNT	ac20	5745	Ant2	19.20	13.959	30	Pass
NVNT	ac20	5785	Ant2	18.24	13.002	30	Pass
NVNT	ac20	5825	Ant2	18.77	13.53	30	Pass
NVNT	ac40	5755	Ant2	19.15	13.914	30	Pass
NVNT	ac40	5795	Ant2	18.60	13.361	30	Pass
NVNT	ac80	5775	Ant2	18.46	13.218	30	Pass
NVNT	n20	5745	Ant2	19.06	13.815	30	Pass
NVNT	n20	5785	Ant2	18.29	13.045	30	Pass
NVNT	n20	5825	Ant2	18.57	13.329	30	Pass
NVNT	n40	5755	Ant2	19.02	13.779	30	Pass
NVNT	n40	5795	Ant2	19.07	13.831	30	Pass

Condition	Mode	Frequency (MHz)	Antenna	EIRP (dBm)	Limit (dBm)	Verdict
NVNT	ac20	5745	MIMO	16.90	30	Pass
NVNT	ac20	5785	MIMO	16.19	30	Pass
NVNT	ac20	5825	MIMO	16.25	30	Pass
NVNT	ac40	5755	MIMO	16.66	30	Pass
NVNT	ac40	5795	MIMO	16.21	30	Pass
NVNT	ac80	5775	MIMO	16.30	30	Pass
NVNT	n20	5745	MIMO	16.81	30	Pass
NVNT	n20	5785	MIMO	16.20	30	Pass
NVNT	n20	5825	MIMO	16.36	30	Pass
NVNT	n40	5755	MIMO	16.59	30	Pass
NVNT	n40	5795	MIMO	16.49	30	Pass

Duty Cycle


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)
NVNT	a	5745	Ant1	100
NVNT	a	5785	Ant1	100
NVNT	a	5825	Ant1	100
NVNT	ac20	5745	Ant1	100
NVNT	ac20	5785	Ant1	100
NVNT	ac20	5825	Ant1	100
NVNT	ac40	5755	Ant1	100
NVNT	ac40	5795	Ant1	100
NVNT	ac80	5775	Ant1	100
NVNT	n20	5745	Ant1	100
NVNT	n20	5785	Ant1	100
NVNT	n20	5825	Ant1	100
NVNT	n40	5755	Ant1	100
NVNT	n40	5795	Ant1	100

Duty Cycle NVNT a 5745MHz Ant1

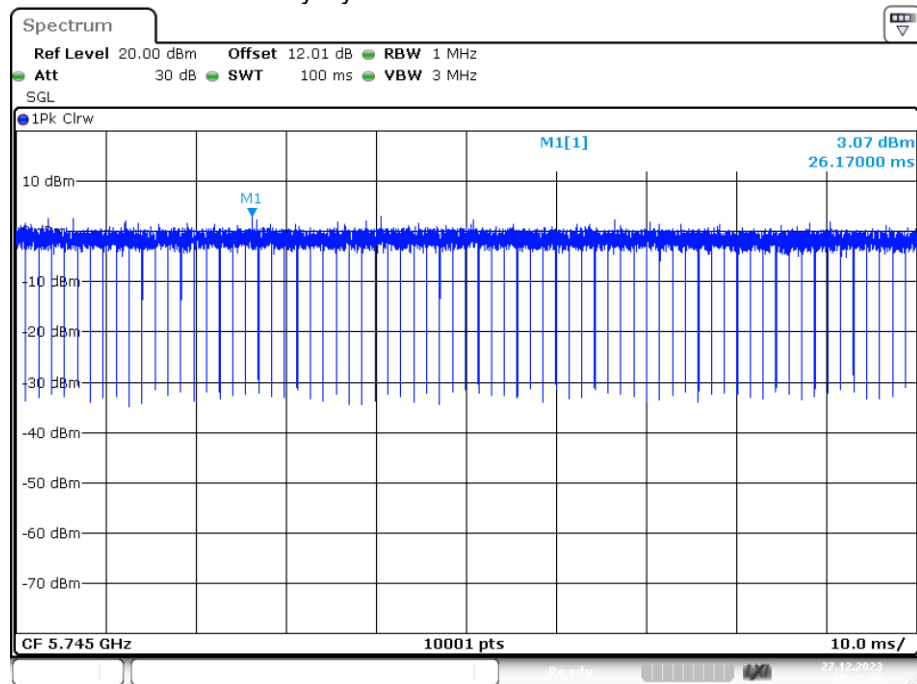


Date: 27.DEC.2023 08:22:05

Duty Cycle NVNT a 5785MHz Ant1

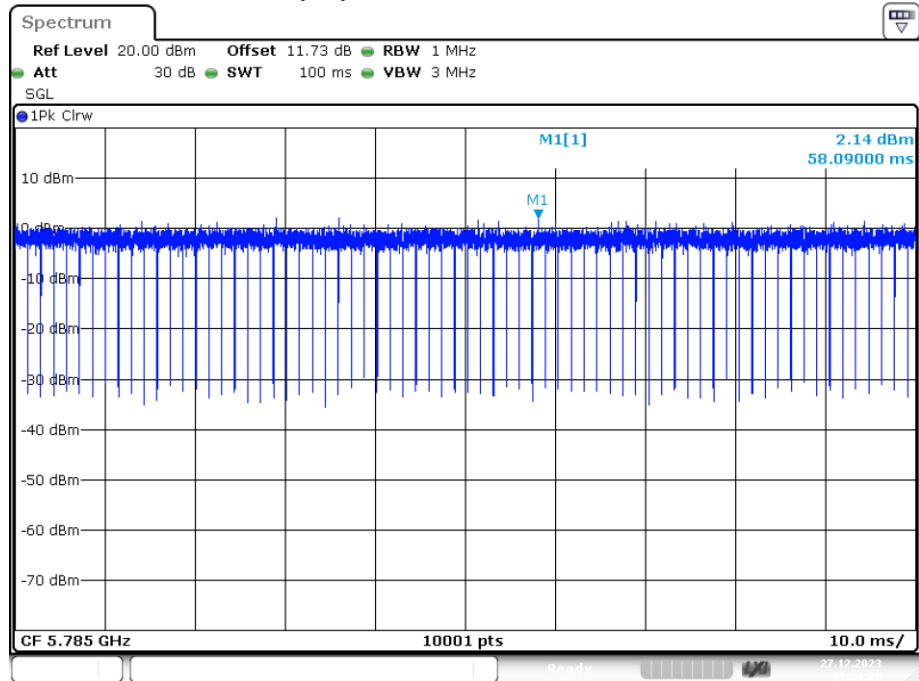


Date: 27.DEC.2023 08:24:27

Duty Cycle NVNT a 5825MHz Ant1

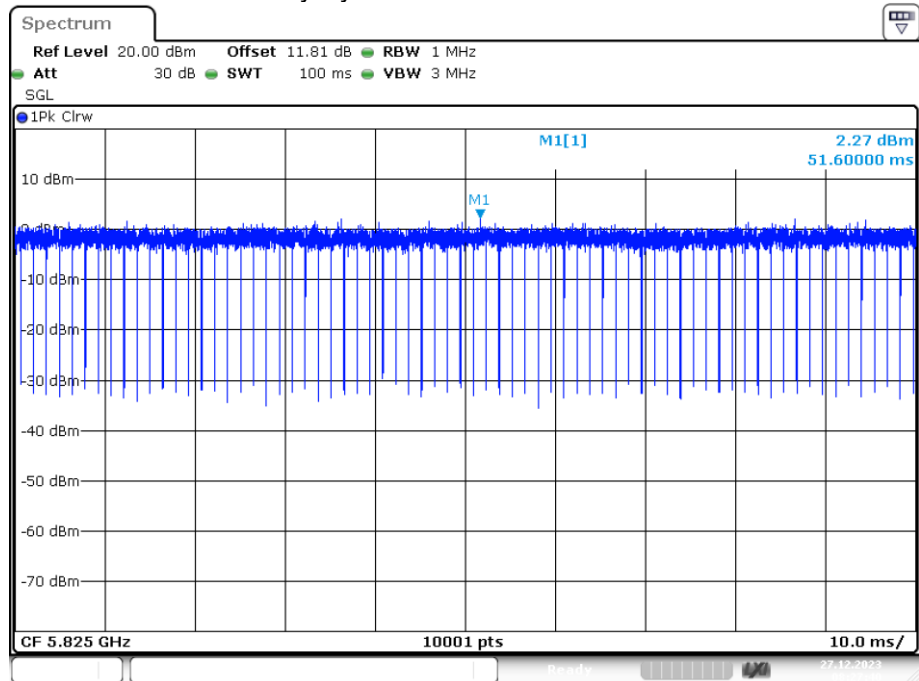


Date: 27.DEC.2023 08:27:40

Duty Cycle NVNT ac20 5745MHz Ant1

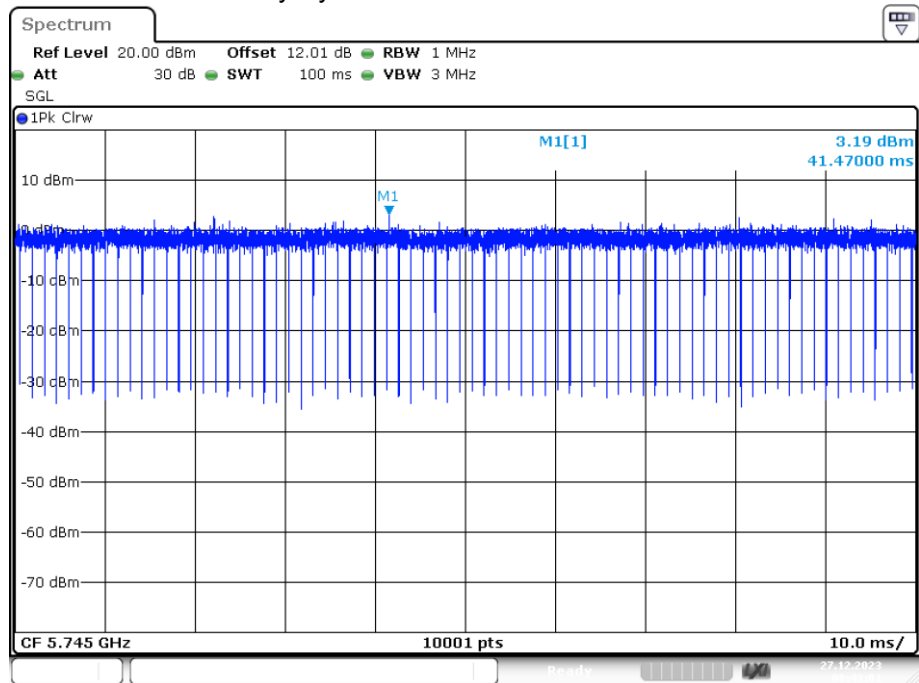


Date: 27.DEC.2023 08:43:00

Duty Cycle NVNT ac20 5785MHz Ant1

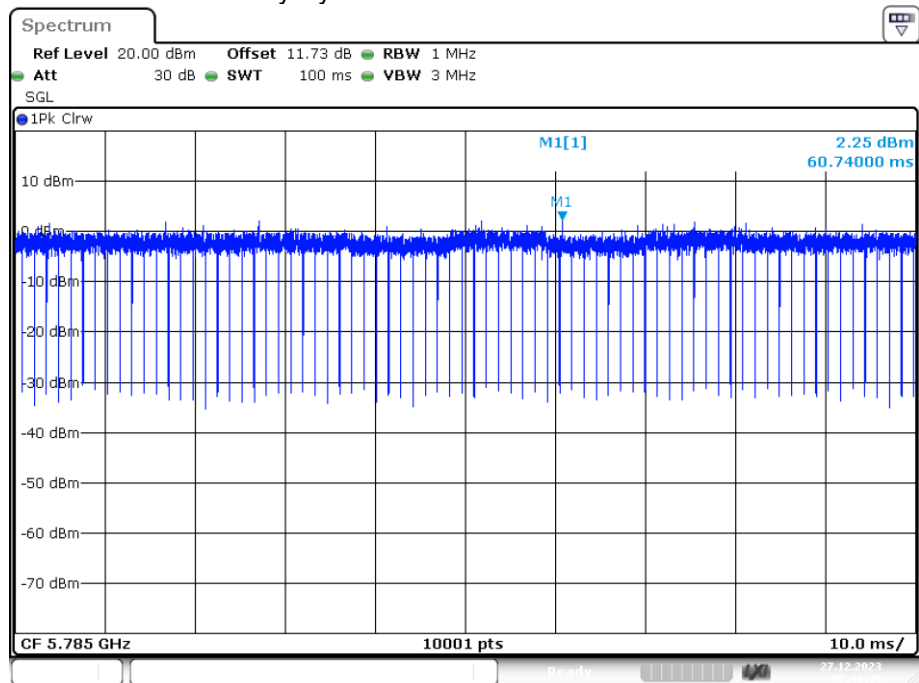


Date: 27.DEC.2023 08:46:19

Duty Cycle NVNT ac20 5825MHz Ant1

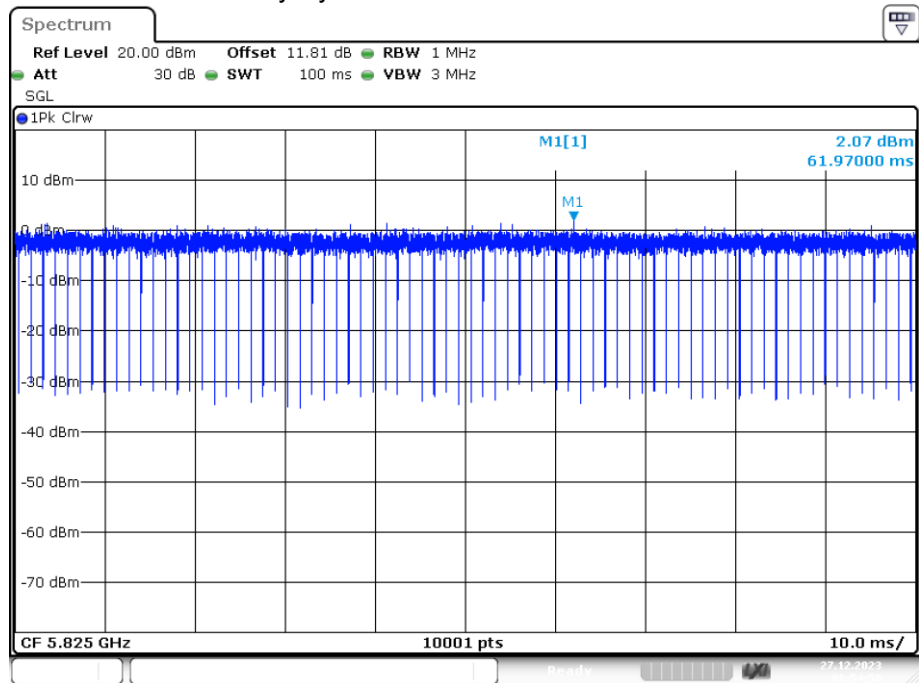


Date: 27.DEC.2023 08:54:50

Duty Cycle NVNT ac40 5755MHz Ant1

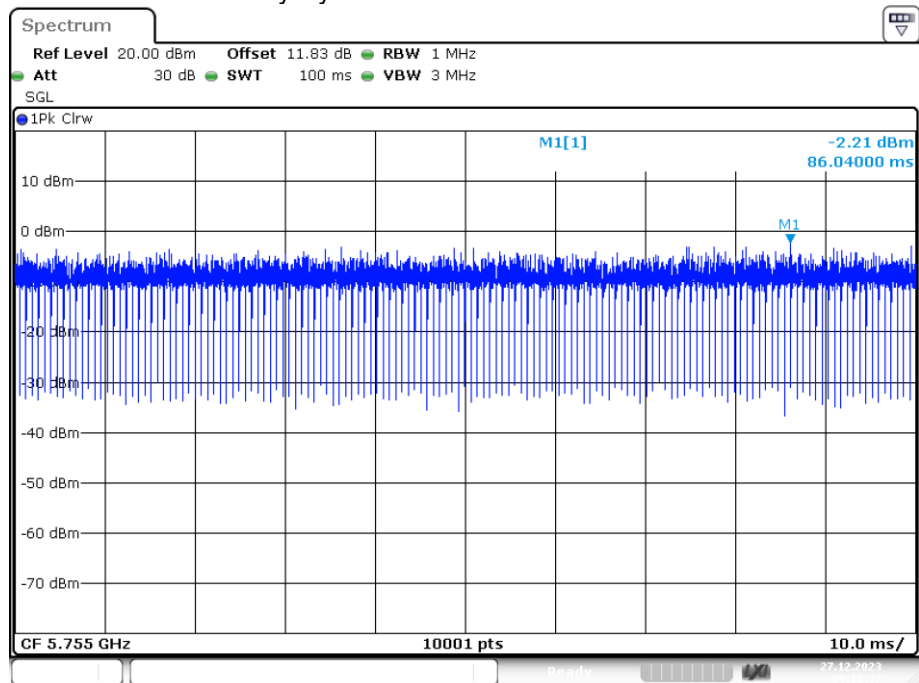


Date: 27.DEC.2023 09:12:37

Duty Cycle NVNT ac40 5795MHz Ant1

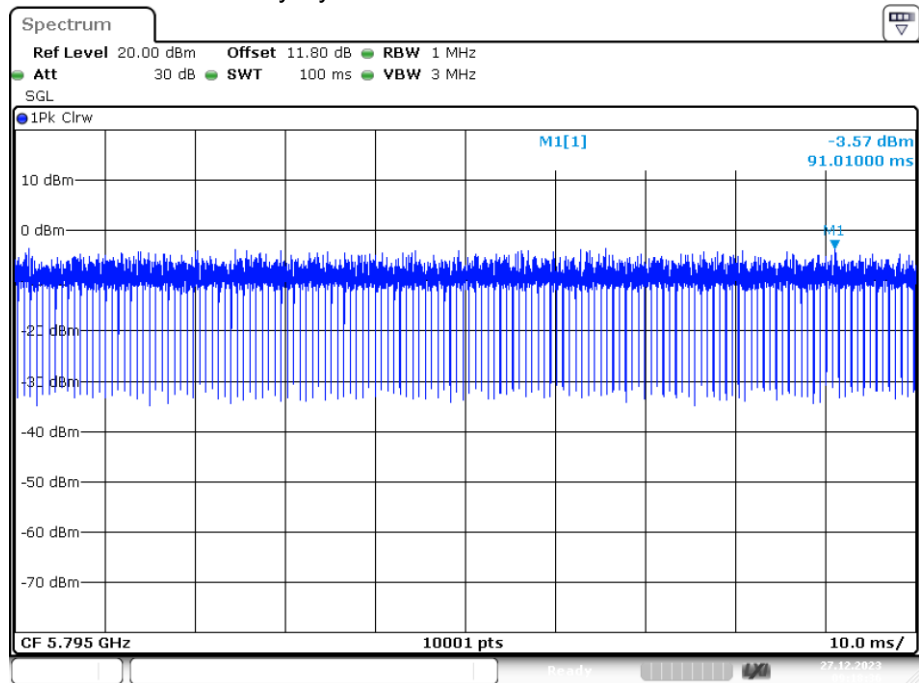


Date: 27.DEC.2023 09:18:36

Duty Cycle NVNT ac80 5775MHz Ant1

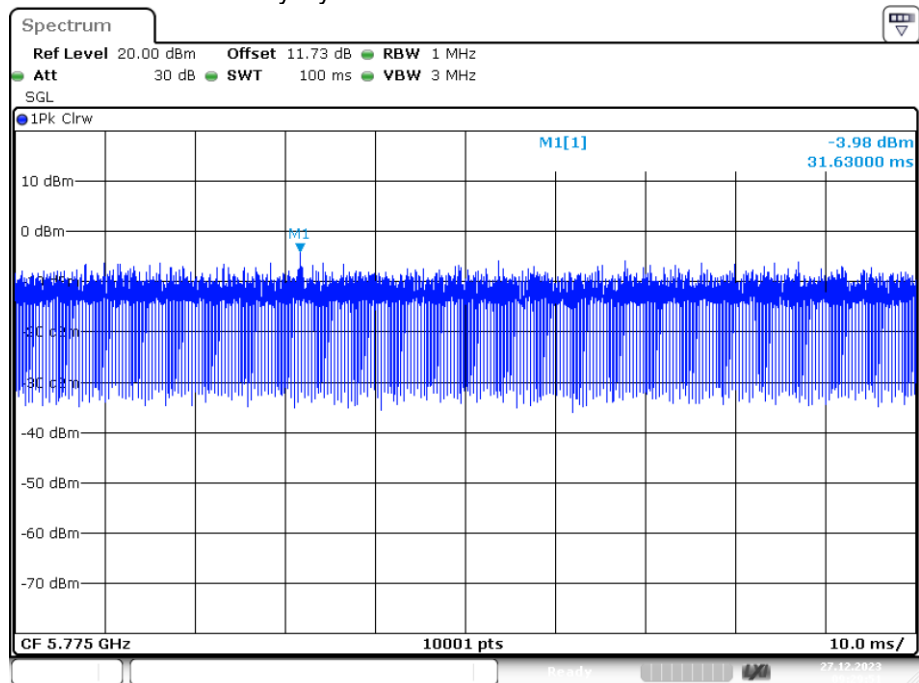


Date: 27.DEC.2023 09:29:51

Duty Cycle NVNT n20 5745MHz Ant1

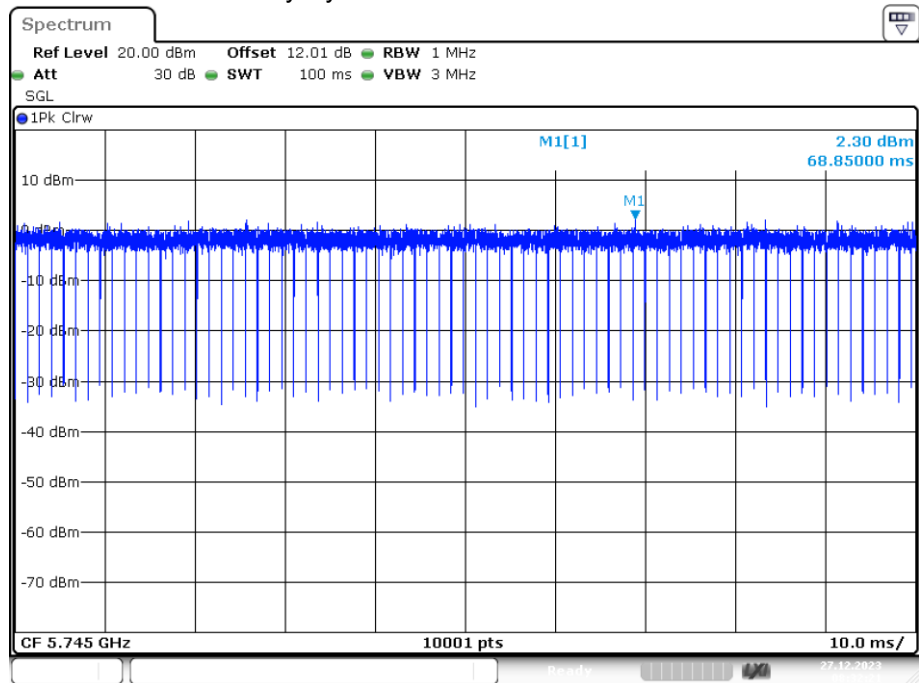


Date: 27.DEC.2023 08:32:21

Duty Cycle NVNT n20 5785MHz Ant1

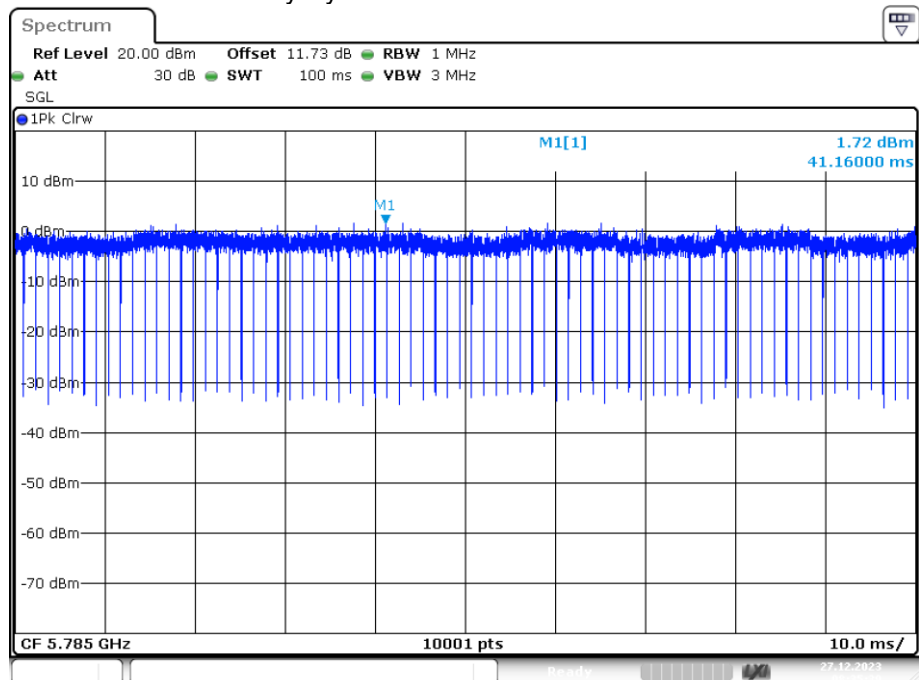


Date: 27.DEC.2023 08:35:39

Duty Cycle NVNT n20 5825MHz Ant1

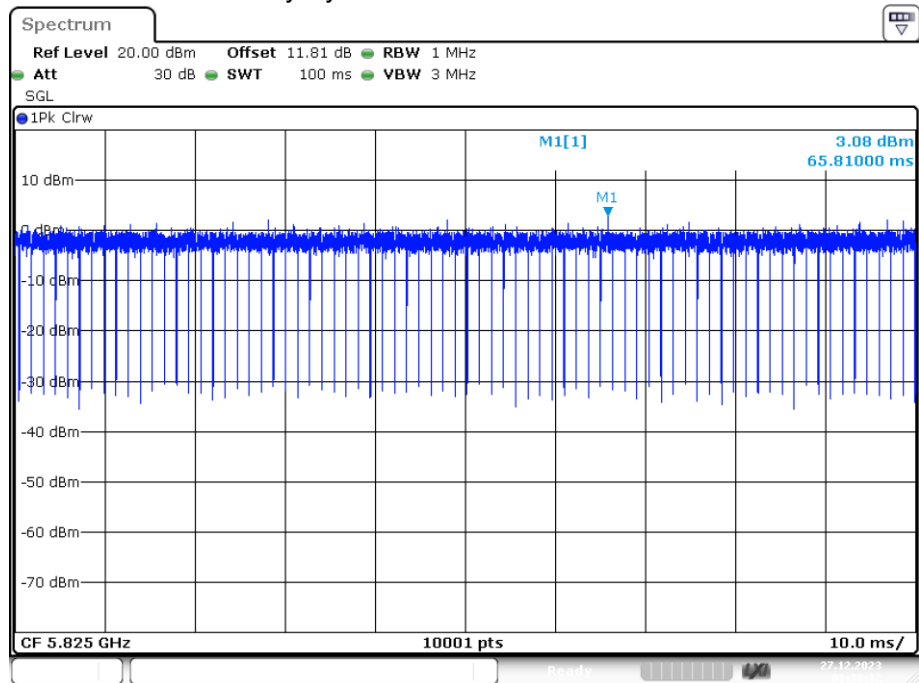


Date: 27.DEC.2023 08:38:32

Duty Cycle NVNT n40 5755MHz Ant1

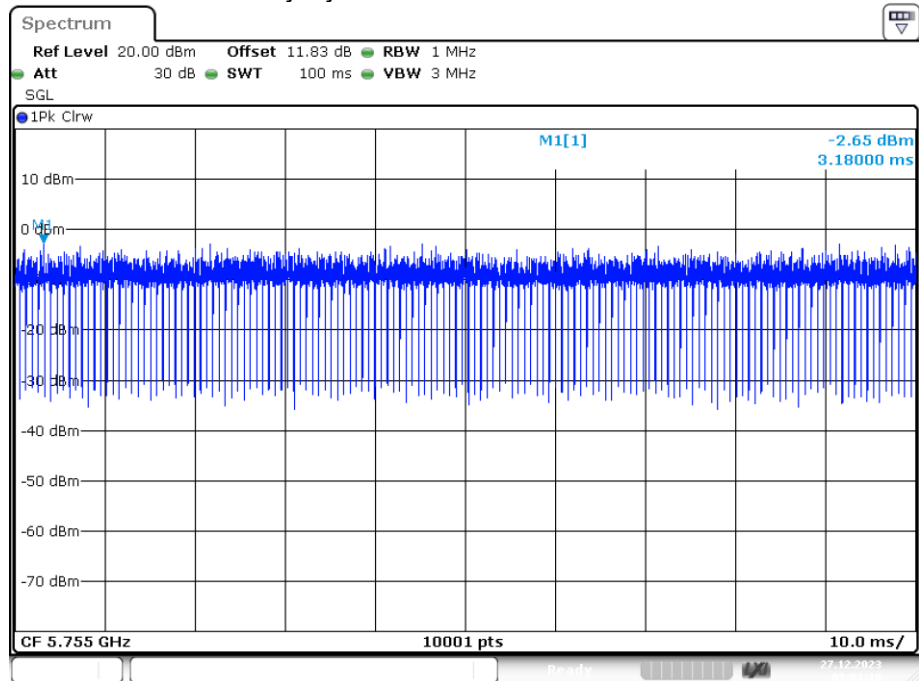


Date: 27.DEC.2023 09:01:10

Duty Cycle NVNT n40 5795MHz Ant1

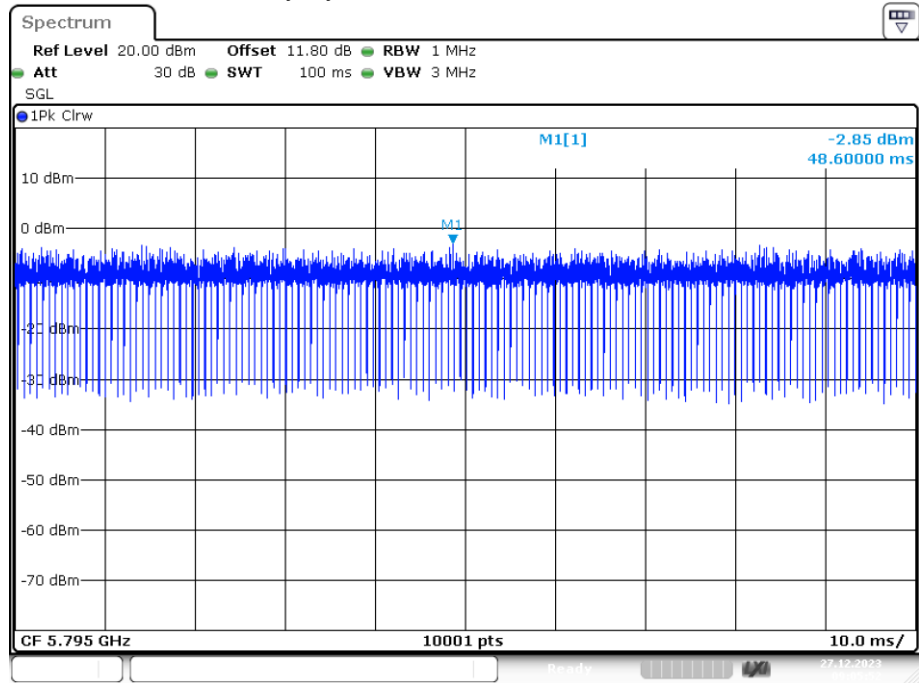

Date: 27.DEC.2023 09:05:52

4.5 Power Spectral Density

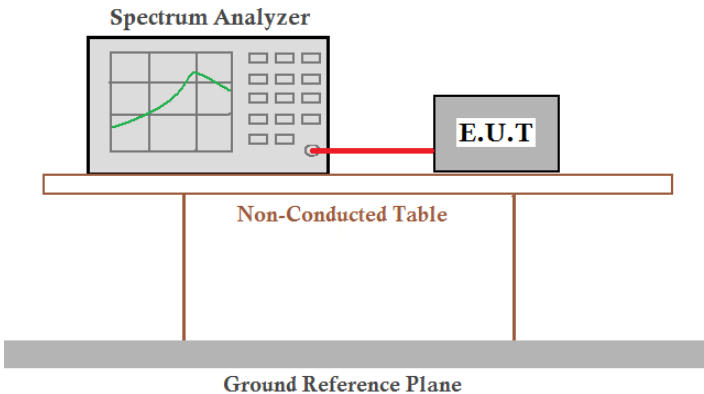Test Requirement:	FCC Part15 E Section 15.407
Test Method:	KDB 789033 D02 General UNII Test Procedures New Rules v02r01
Limit:	$\leq 11.00\text{dBm/MHz}$ for 5150MHz-5250MHz, 5250-5350MHz and 5470-5725 MHz $\leq 30.00\text{dBm/500KHz}$ for 5725MHz-5850MHz
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by two vertical legs. Below the table is a Ground Reference Plane.
Test procedure:	1) Create an average power spectrum for the EUT operating mode being tested by following the instructions in section E)2) for measuring maximum conducted output power using a spectrum analyzer or EMI receiver: select the appropriate test method (SA-1, SA-2, SA-3, or alternatives to each) and apply it up to, but not including, the step labeled, "Compute power...". 2) Use the peak search function on the instrument to find the peak of the spectrum. 3) Make the following adjustments to the peak value of the spectrum, if applicable: a) If Method SA-2 or SA-2 Alternative was used, add $10 \log(1/x)$, where x is the duty cycle, to the peak of the spectrum. b) If Method SA-3 Alternative was used and the linear mode was used in step E)2)g)(viii), add 1 dB to the final result to compensate for the difference between linear averaging and power averaging. 4) The result is the PSD.
Test Instruments:	Refer to section 5.10 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass


Measurement Data**Band 1 (5150-5250 MHz)**

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	4.182	11	Pass
NVNT	a	5200	Ant1	3.906	11	Pass
NVNT	a	5240	Ant1	4.411	11	Pass
NVNT	ac20	5180	Ant1	4.14	11	Pass
NVNT	ac20	5200	Ant1	4.118	11	Pass
NVNT	ac20	5240	Ant1	4.872	11	Pass
NVNT	ac40	5190	Ant1	1.251	11	Pass
NVNT	ac40	5230	Ant1	2.175	11	Pass
NVNT	ac80	5210	Ant1	-2.556	11	Pass
NVNT	n20	5180	Ant1	4.856	11	Pass
NVNT	n20	5200	Ant1	4.18	11	Pass
NVNT	n20	5240	Ant1	4.589	11	Pass
NVNT	n40	5190	Ant1	2.789	11	Pass
NVNT	n40	5230	Ant1	0.924	11	Pass

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant2	4.281	11	Pass
NVNT	a	5200	Ant2	3.656	11	Pass
NVNT	a	5240	Ant2	3.361	11	Pass
NVNT	ac20	5180	Ant2	3.123	11	Pass
NVNT	ac20	5200	Ant2	3.662	11	Pass
NVNT	ac20	5240	Ant2	3.833	11	Pass
NVNT	ac40	5190	Ant2	0.664	11	Pass
NVNT	ac40	5230	Ant2	1.822	11	Pass
NVNT	ac80	5210	Ant2	-1.624	11	Pass
NVNT	n20	5180	Ant2	3.198	11	Pass
NVNT	n20	5200	Ant2	3.691	11	Pass
NVNT	n20	5240	Ant2	3.742	11	Pass
NVNT	n40	5190	Ant2	0.637	11	Pass
NVNT	n40	5230	Ant2	1.306	11	Pass


Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	ac20	5180	MIMO	6.67	11	Pass
NVNT	ac20	5200	MIMO	6.91	11	Pass
NVNT	ac20	5240	MIMO	7.39	11	Pass
NVNT	ac40	5190	MIMO	3.98	11	Pass
NVNT	ac40	5230	MIMO	5.01	11	Pass
NVNT	ac80	5210	MIMO	0.95	11	Pass
NVNT	n20	5180	MIMO	7.12	11	Pass
NVNT	n20	5200	MIMO	6.95	11	Pass
NVNT	n20	5240	MIMO	7.20	11	Pass
NVNT	n40	5190	MIMO	4.86	11	Pass
NVNT	n40	5230	MIMO	4.13	11	Pass

PSD NVNT a 5180MHz Ant1

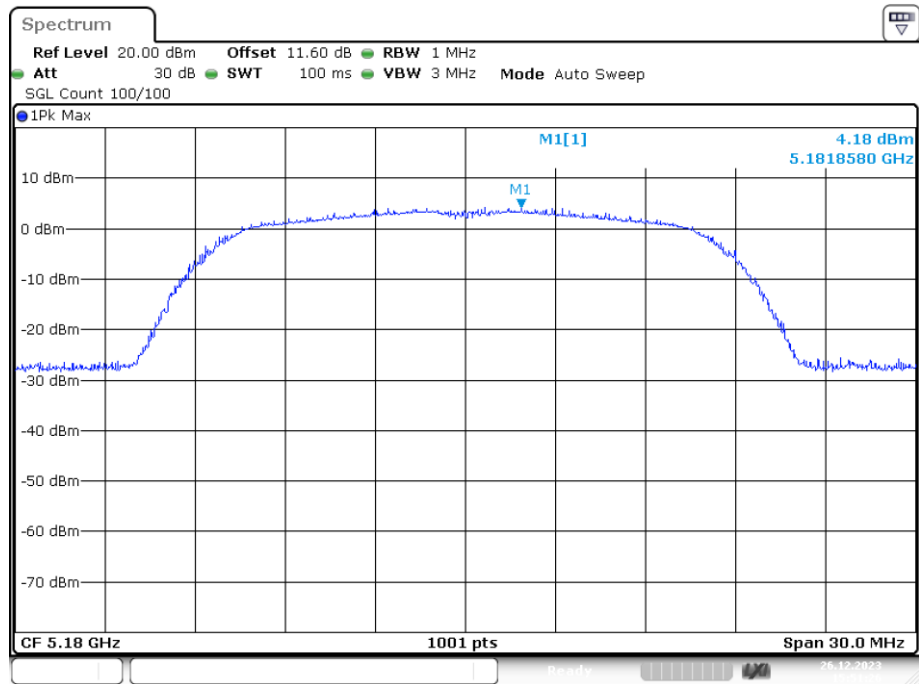


Date: 26.DEC.2023 15:51:26

PSD NVNT a 5200MHz Ant1

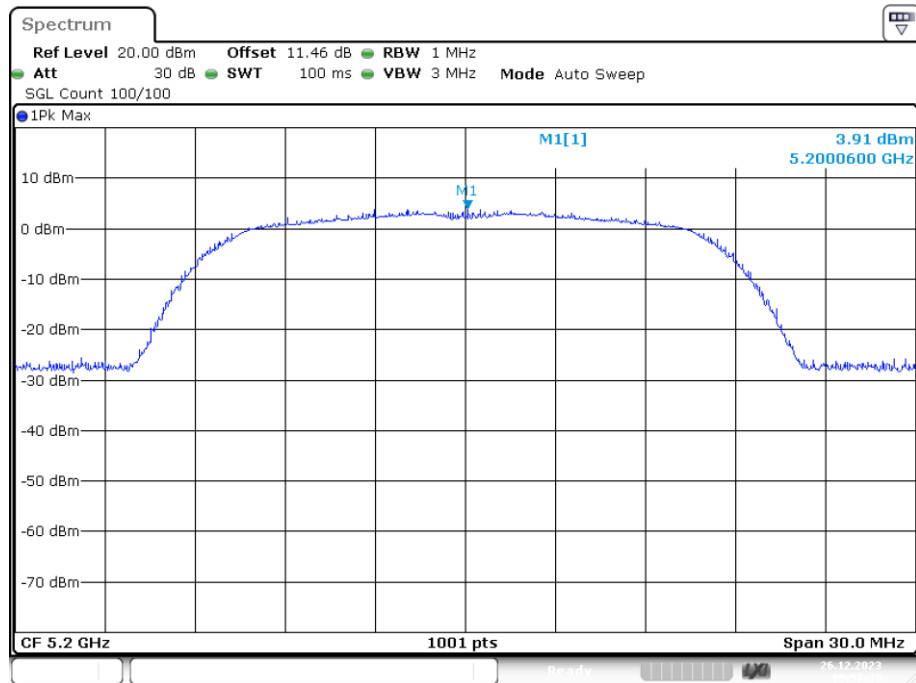


Date: 26.DEC.2023 15:57:36

PSD NVNT a 5240MHz Ant1

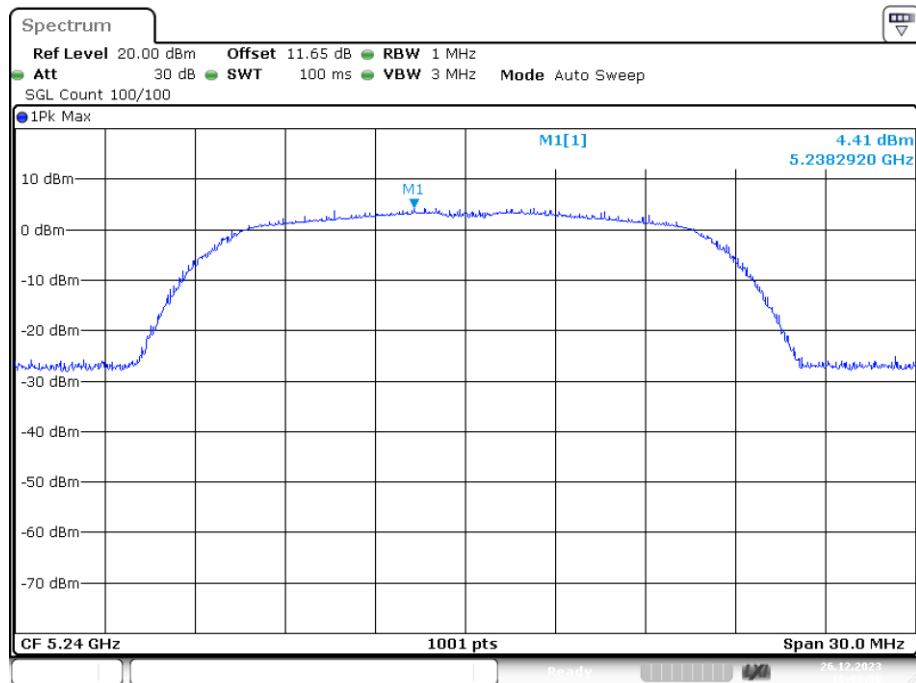


Date: 26.DEC.2023 16:02:50

PSD NVNT ac20 5180MHz Ant1

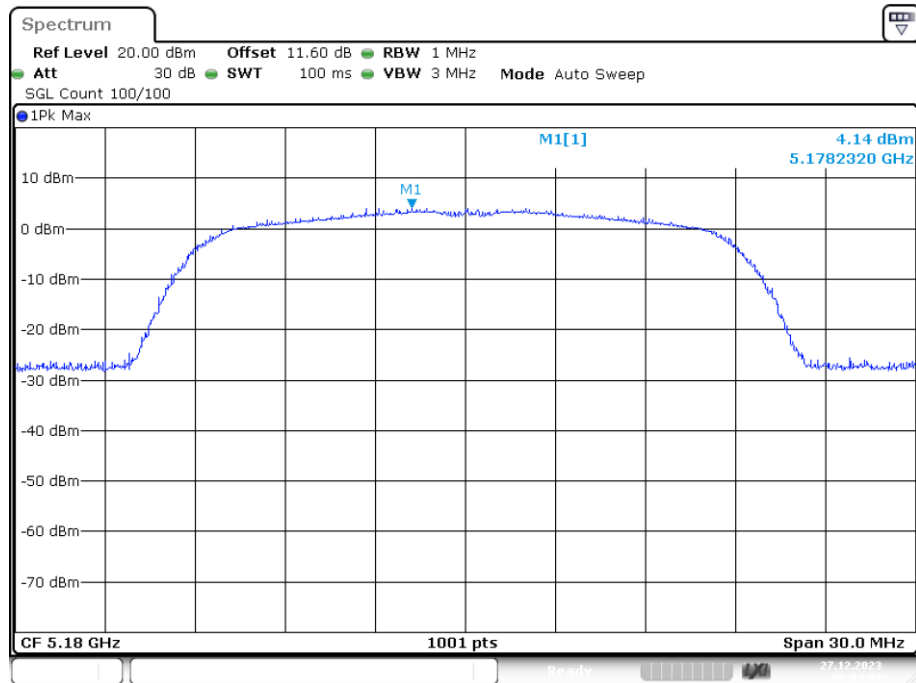


Date: 27.DEC.2023 06:04:08

PSD NVNT ac20 5200MHz Ant1

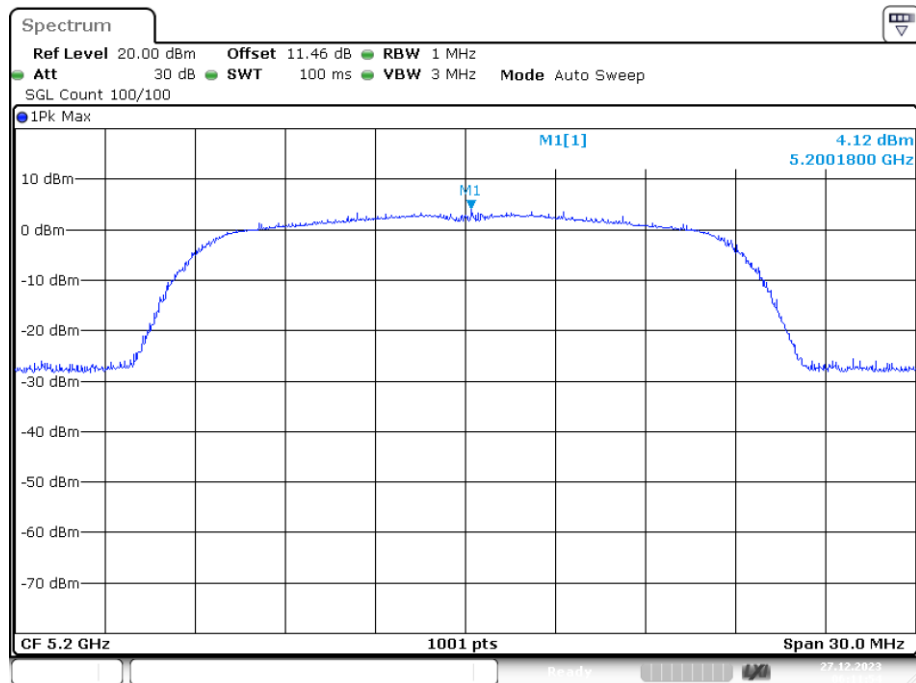


Date: 27.DEC.2023 06:11:53

PSD NVNT ac20 5240MHz Ant1

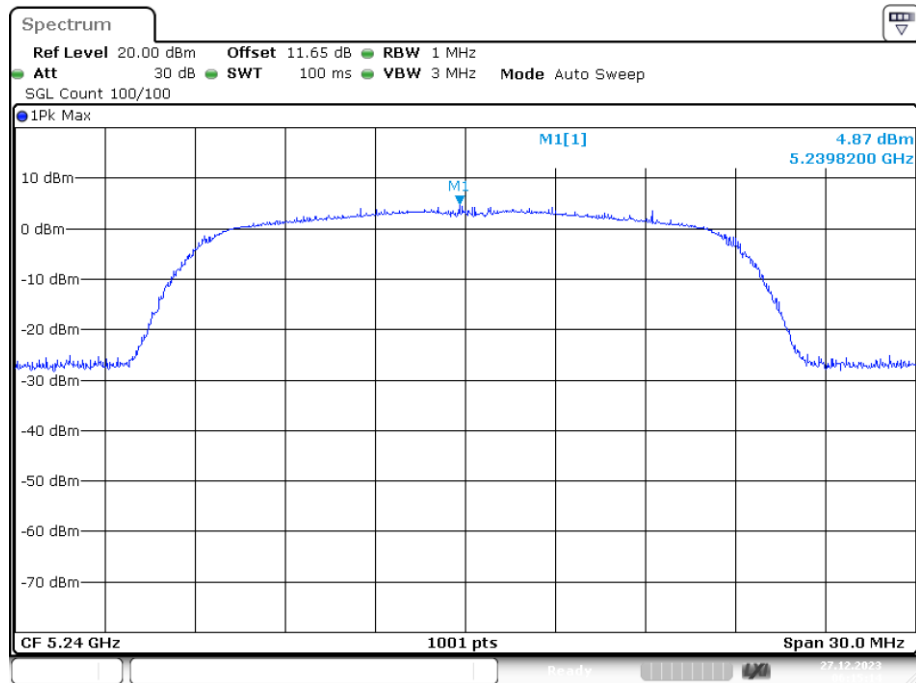


Date: 27.DEC.2023 06:15:14

PSD NVNT ac40 5190MHz Ant1

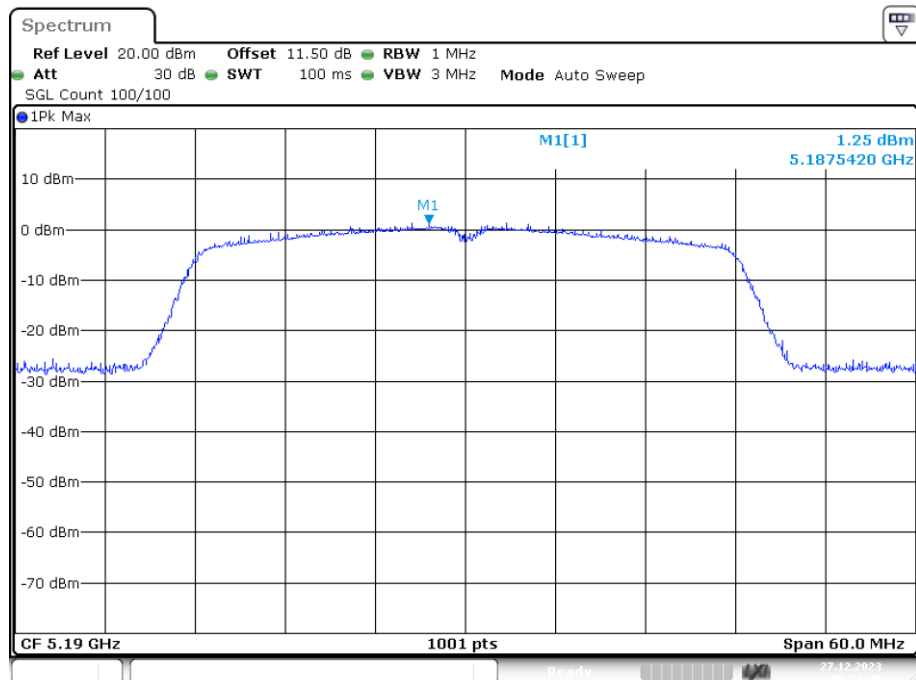


Date: 27.DEC.2023 06:31:06

PSD NVNT ac40 5230MHz Ant1

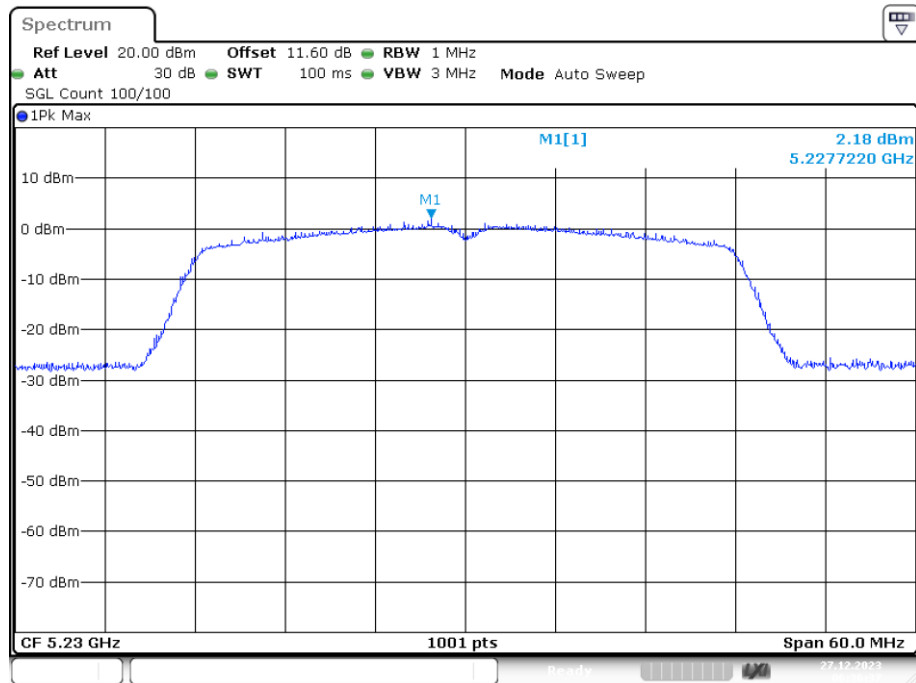


Date: 27.DEC.2023 06:36:37

PSD NVNT ac80 5210MHz Ant1

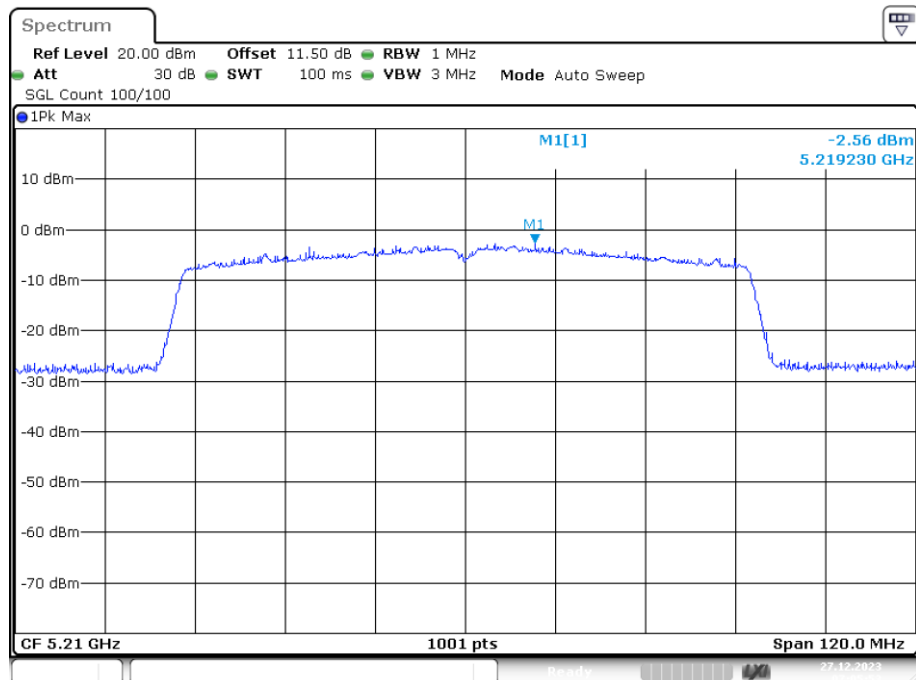


Date: 27.DEC.2023 07:05:53

PSD NVNT n20 5180MHz Ant1

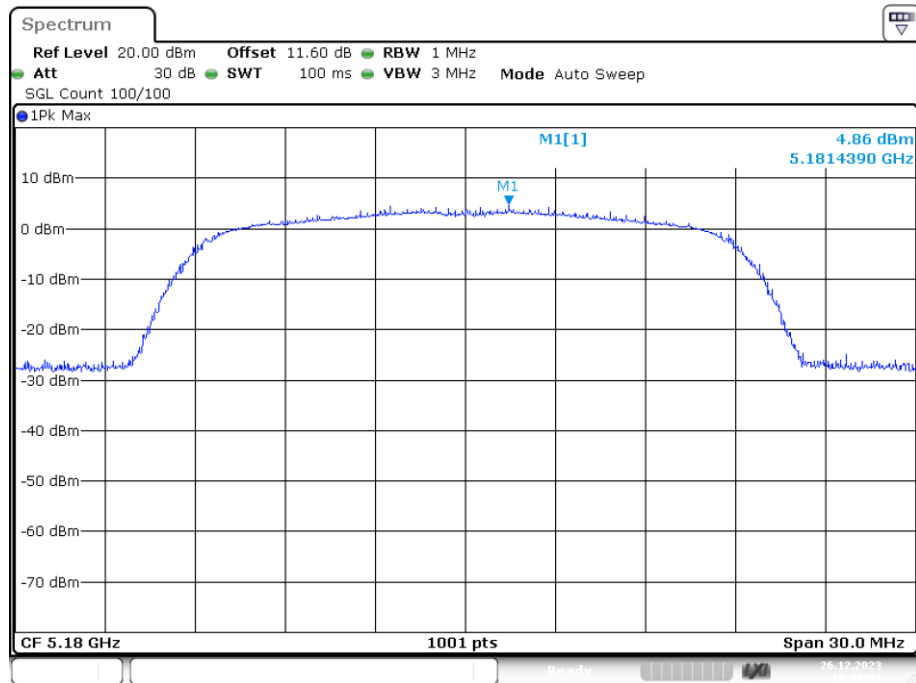


Date: 26.DEC.2023 16:09:51

PSD NVNT n20 5200MHz Ant1

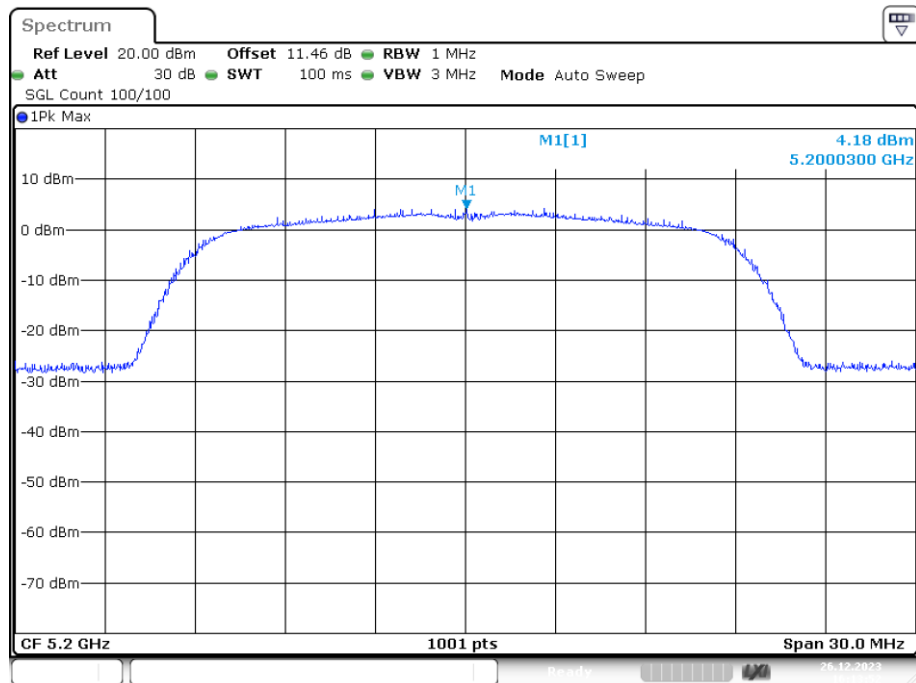


Date: 26.DEC.2023 16:13:52

PSD NVNT n20 5240MHz Ant1

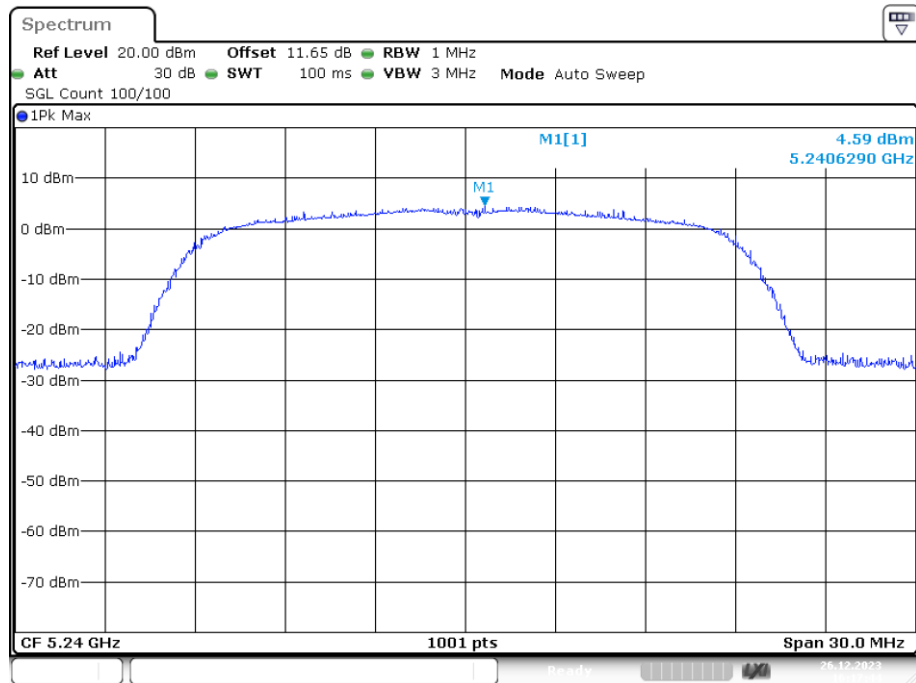


Date: 26.DEC.2023 16:17:43

PSD NVNT n40 5190MHz Ant1

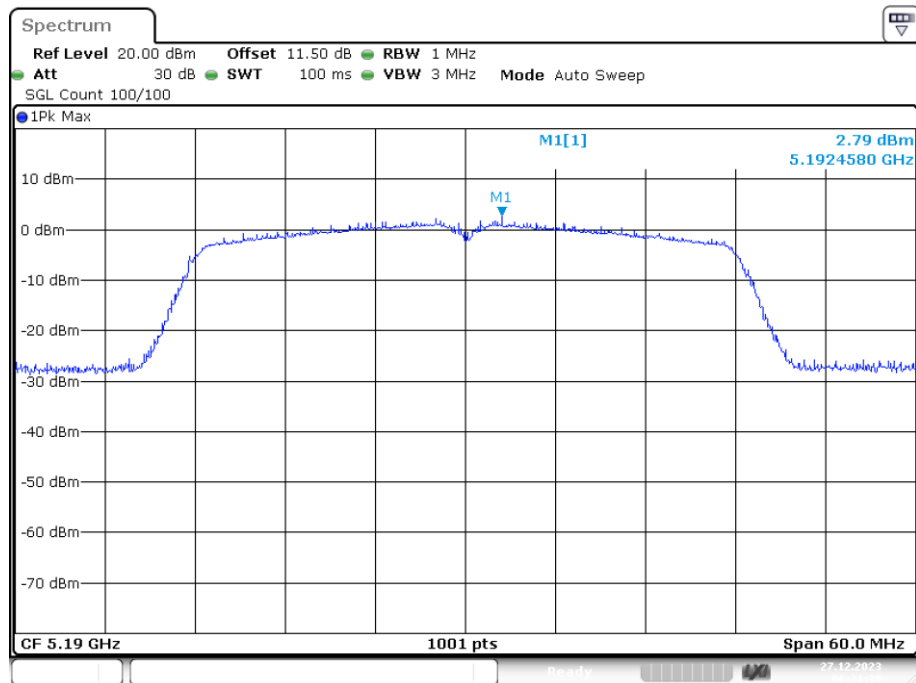


Date: 27.DEC.2023 06:21:38

PSD NVNT n40 5230MHz Ant1

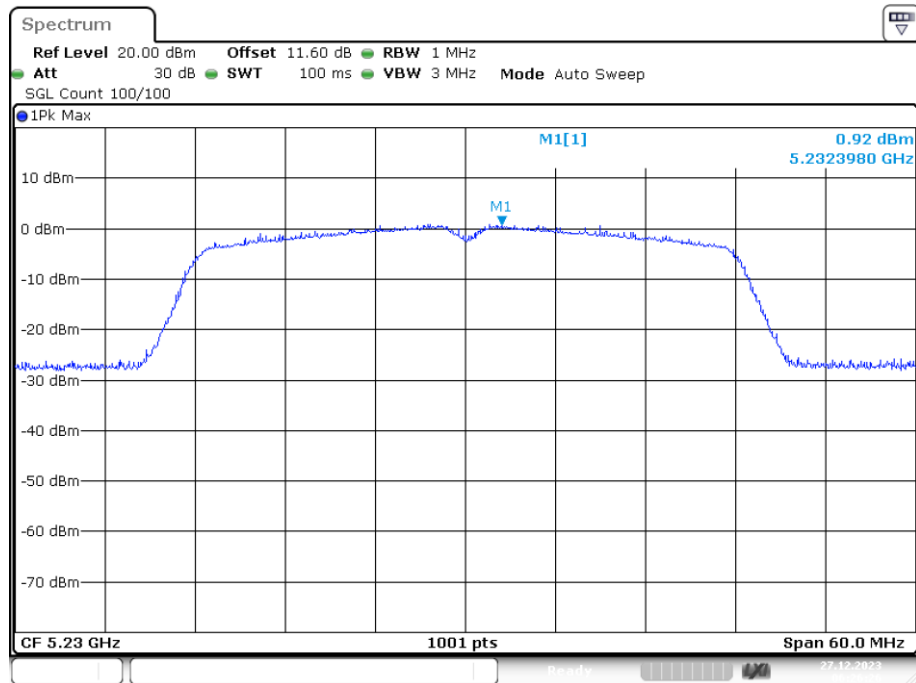


Date: 27.DEC.2023 06:26:26

PSD NVNT a 5180MHz Ant2

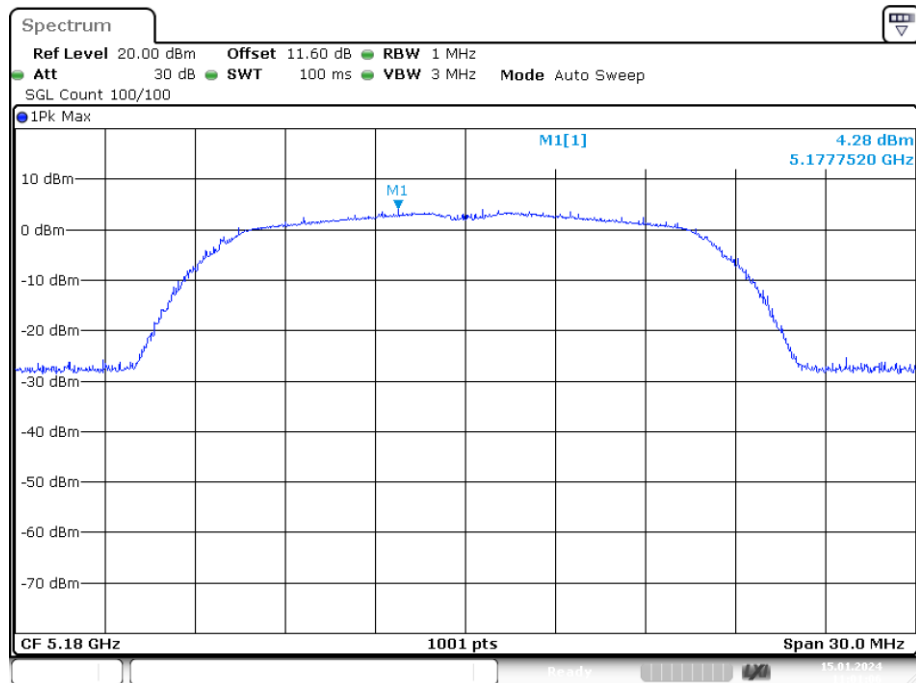


Date: 15.JAN.2024 11:01:06

PSD NVNT a 5200MHz Ant2

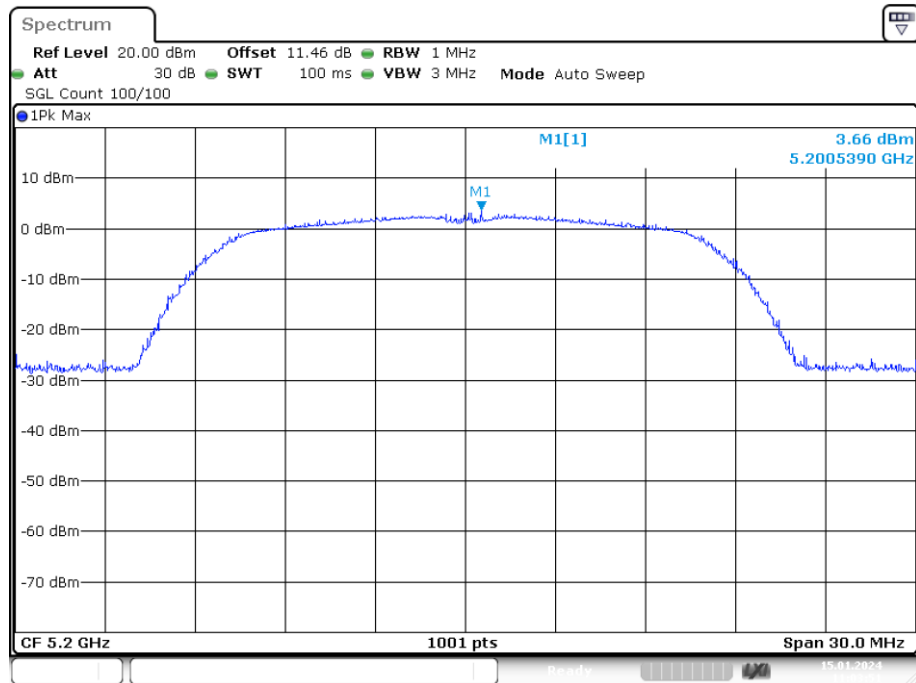


Date: 15.JAN.2024 11:03:51

PSD NVNT a 5240MHz Ant2

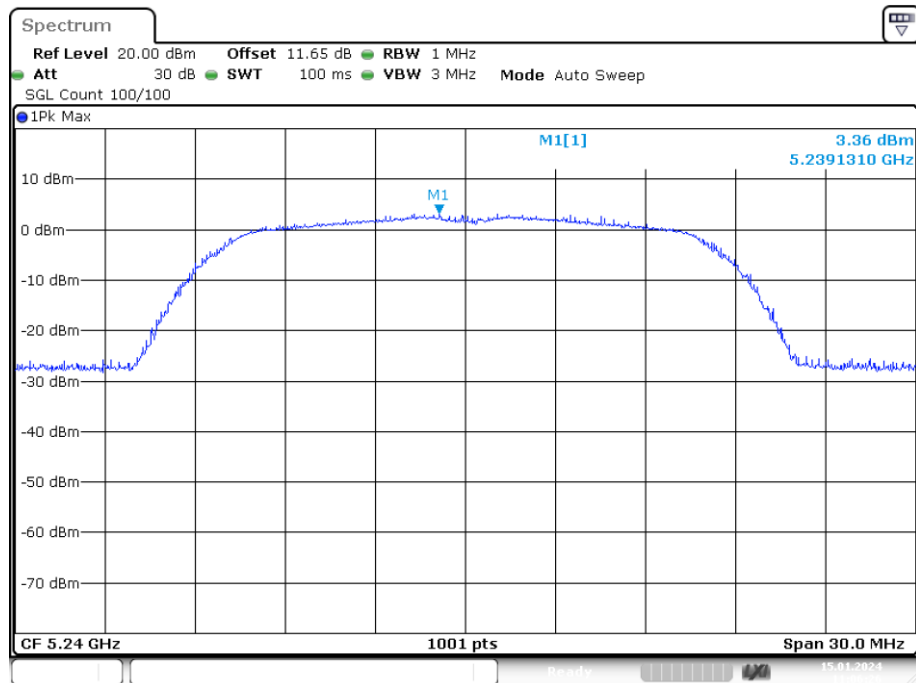


Date: 15.JAN.2024 11:06:26

PSD NVNT ac20 5180MHz Ant2

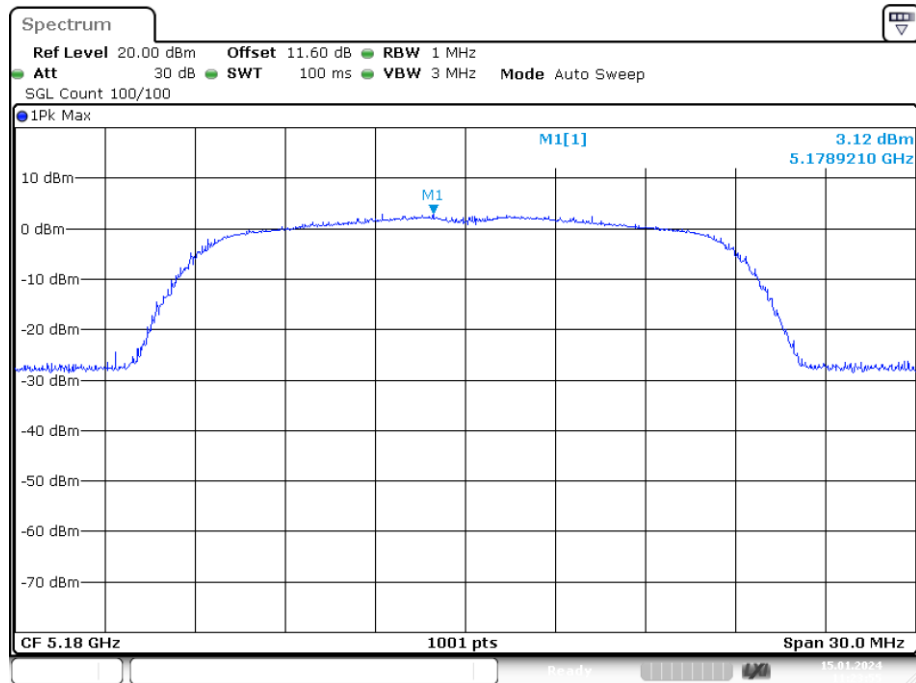


Date: 15.JAN.2024 11:23:54

PSD NVNT ac20 5200MHz Ant2

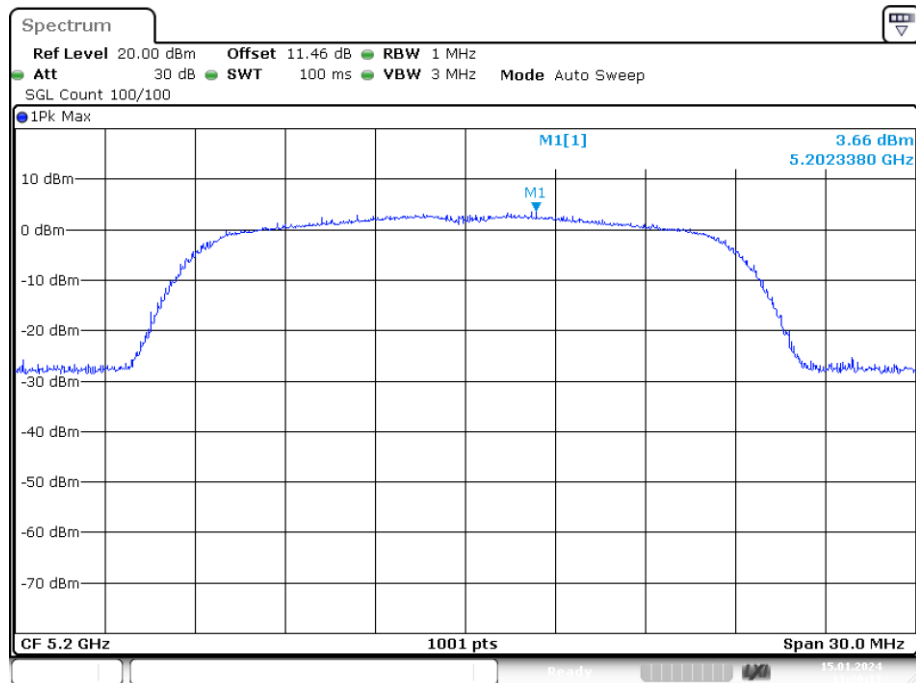


Date: 15.JAN.2024 11:30:13

PSD NVNT ac20 5240MHz Ant2

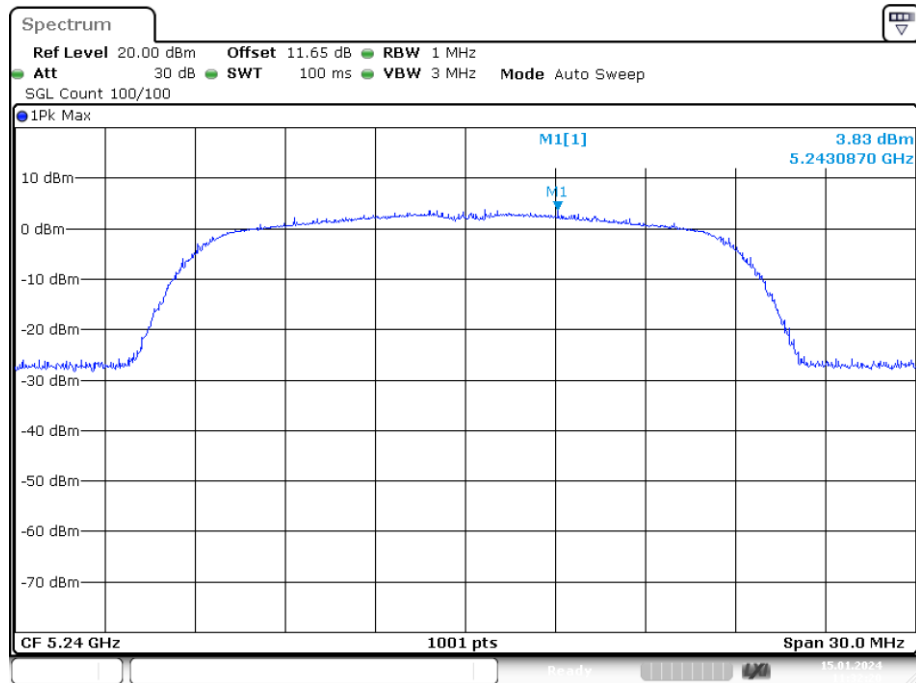


Date: 15.JAN.2024 11:32:19

PSD NVNT ac40 5190MHz Ant2

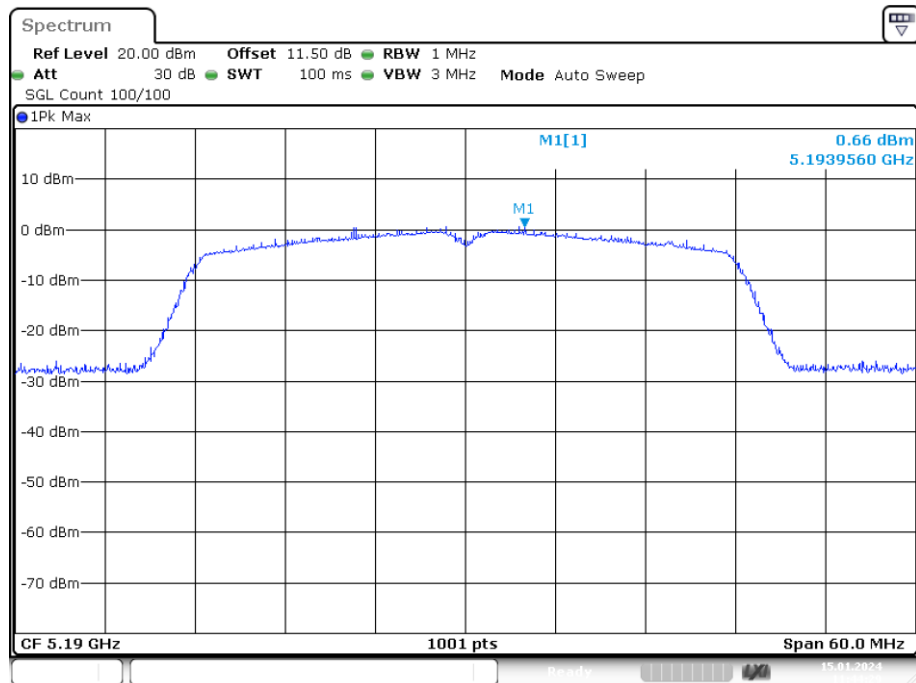


Date: 15.JAN.2024 11:44:29

PSD NVNT ac40 5230MHz Ant2

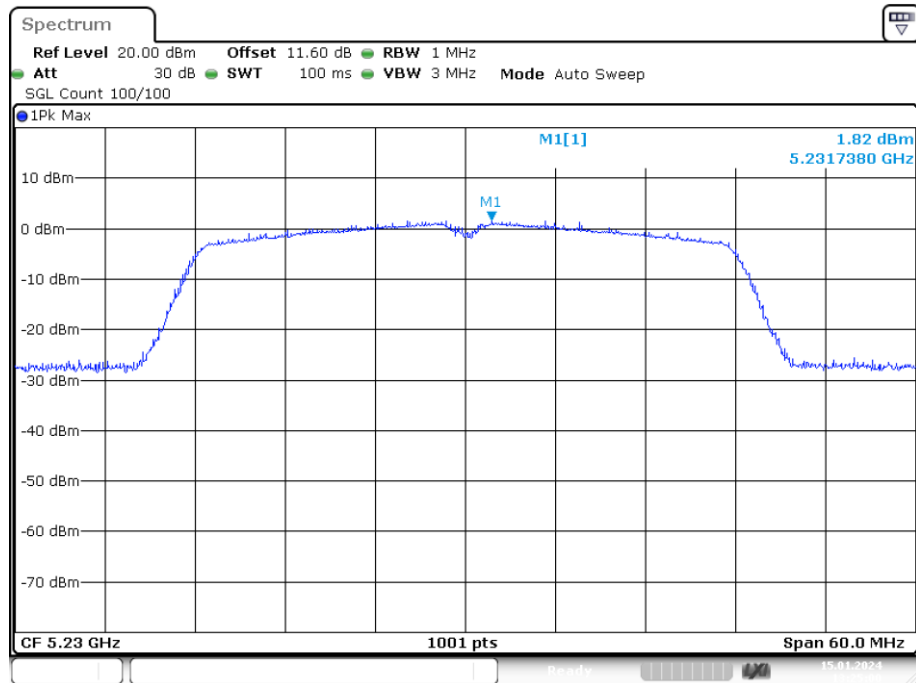


Date: 15.JAN.2024 13:25:00

PSD NVNT ac80 5210MHz Ant2

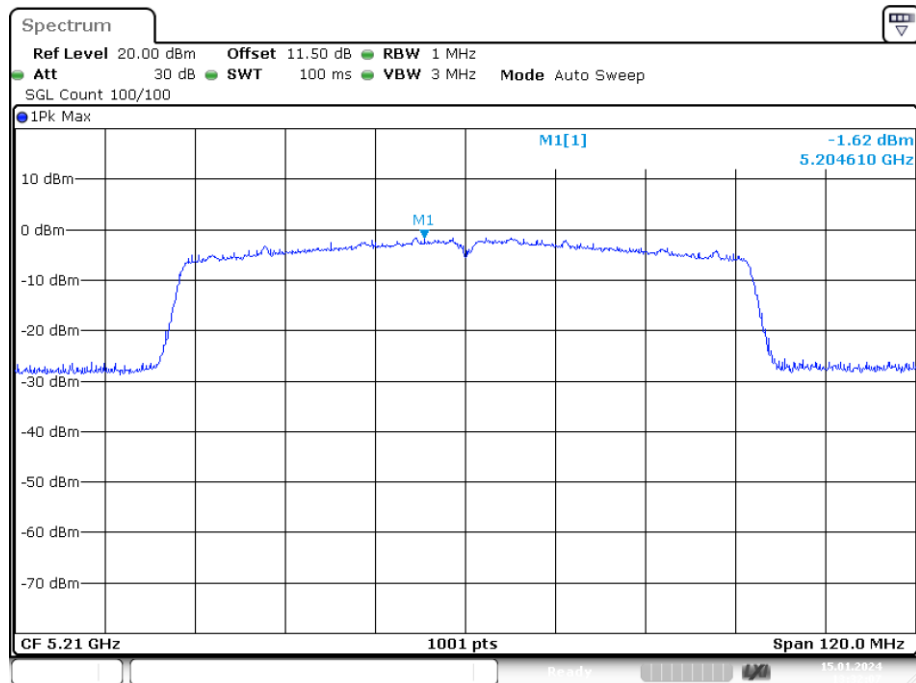


Date: 15.JAN.2024 13:32:06

PSD NVNT n20 5180MHz Ant2

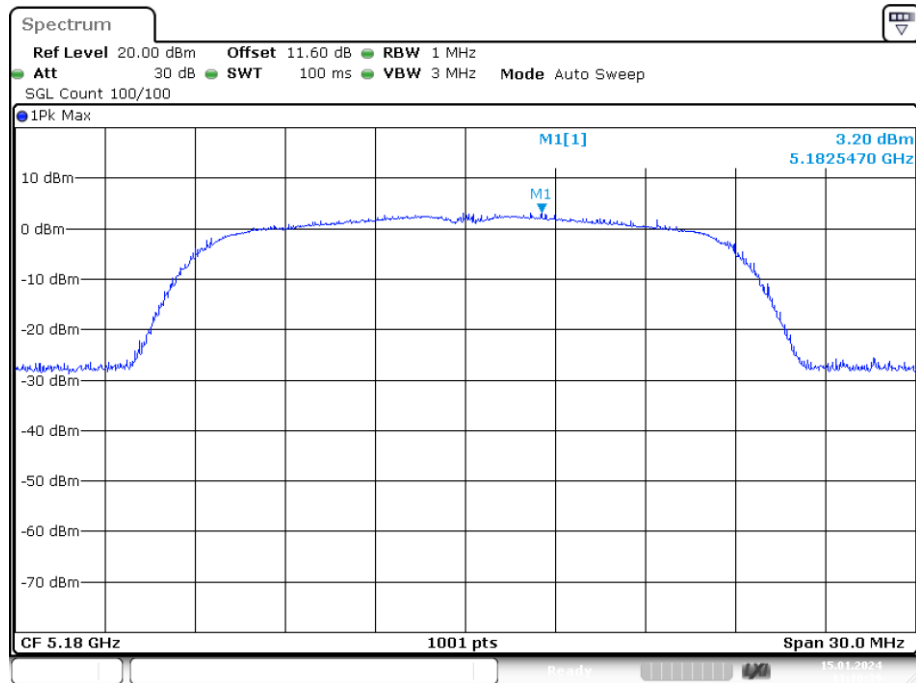


Date: 15.JAN.2024 11:10:38

PSD NVNT n20 5200MHz Ant2

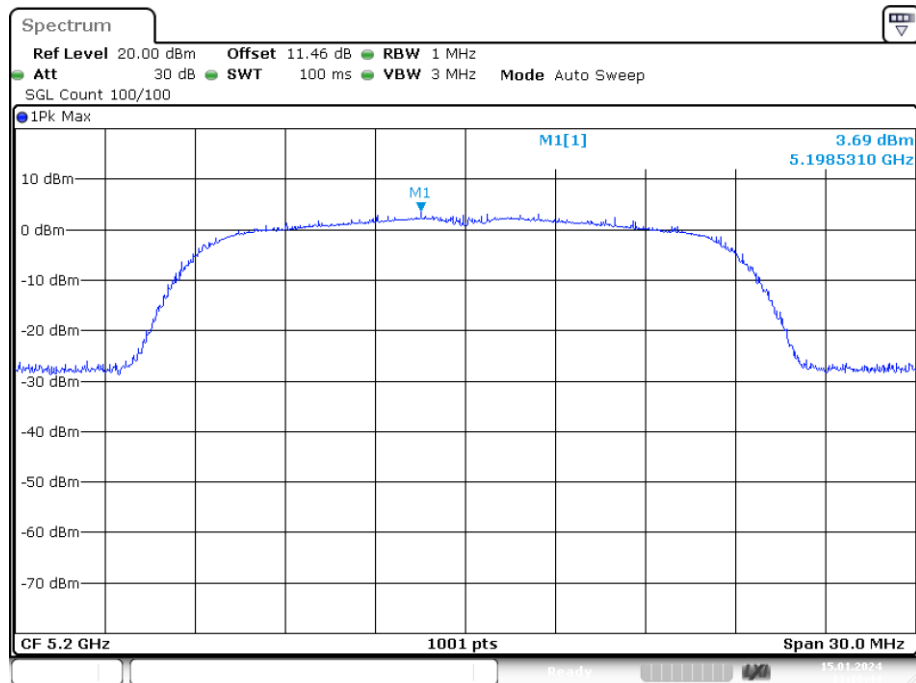


Date: 15.JAN.2024 11:16:44

PSD NVNT n20 5240MHz Ant2

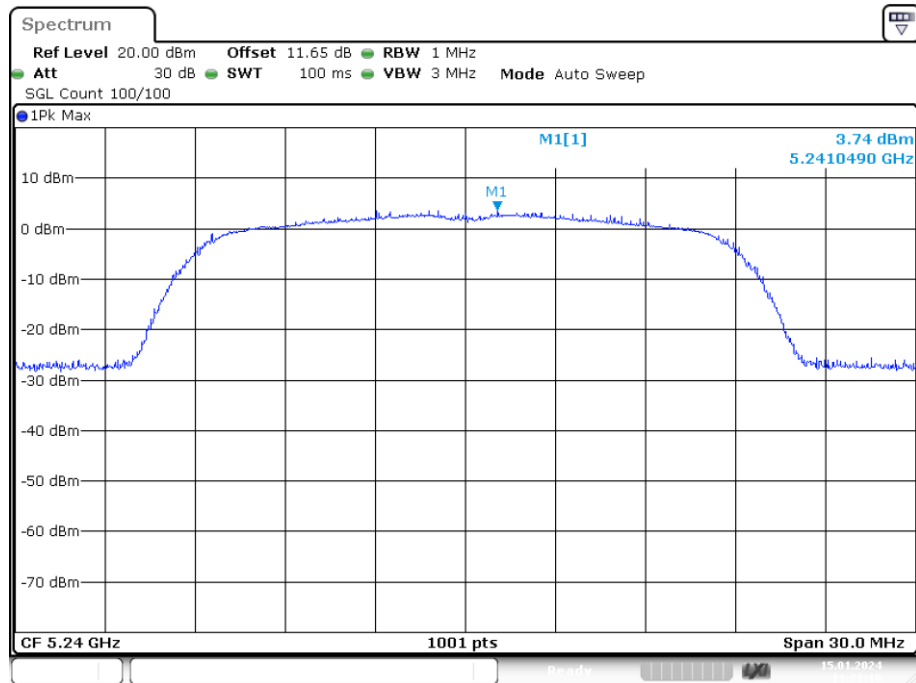


Date: 15.JAN.2024 11:21:09

PSD NVNT n40 5190MHz Ant2

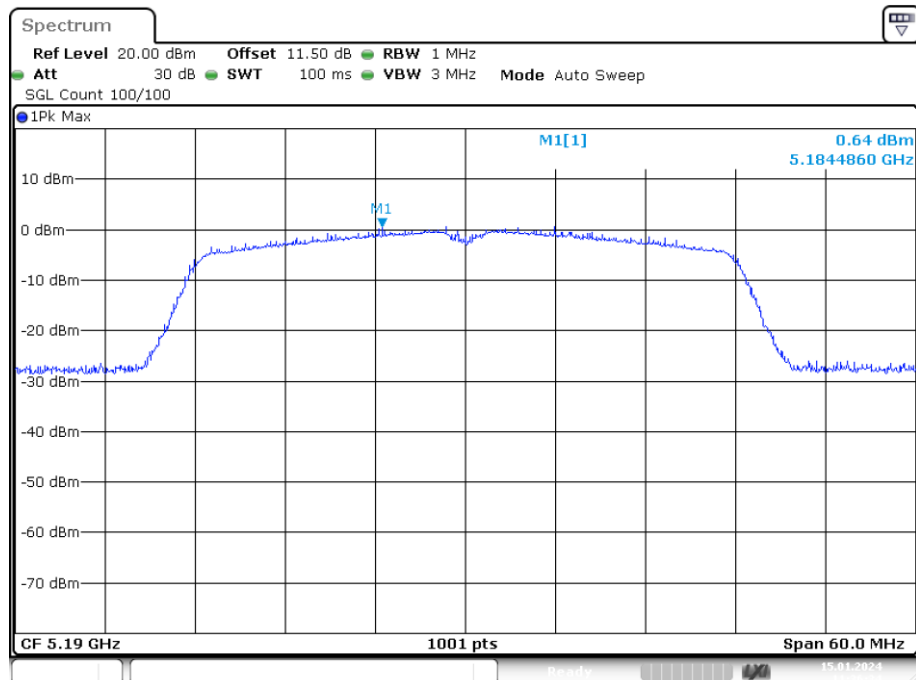

Date: 15.JAN.2024 11:36:34

PSD NVNT n40 5230MHz Ant2

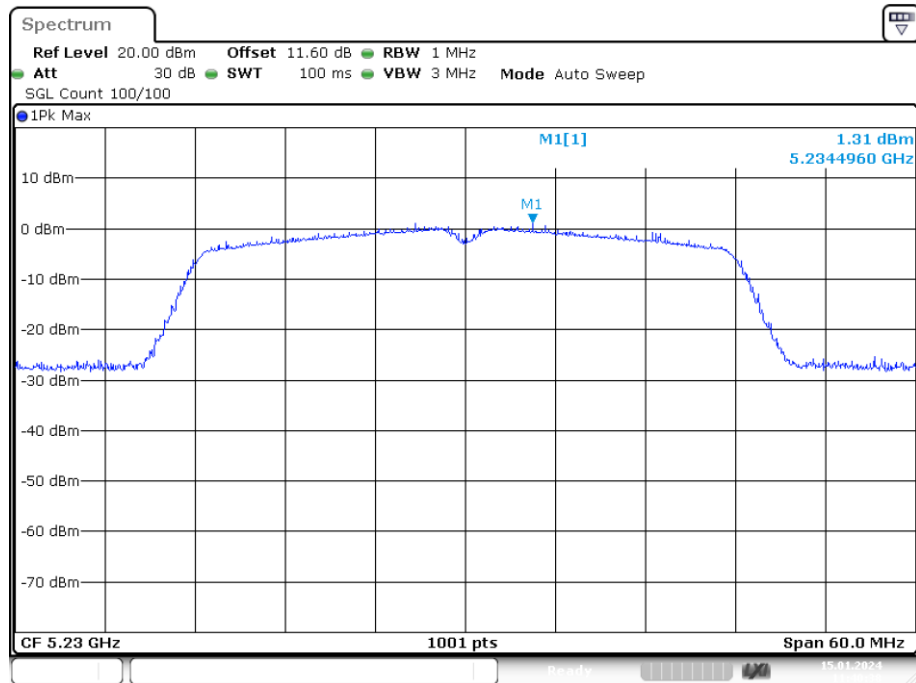

Date: 15.JAN.2024 11:40:39


Band 4 (5725 – 5850 MHz)

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant1	0.891	30	Pass
NVNT	a	5785	Ant1	0.393	30	Pass
NVNT	a	5825	Ant1	0.504	30	Pass
NVNT	ac20	5745	Ant1	0.566	30	Pass
NVNT	ac20	5785	Ant1	-0.056	30	Pass
NVNT	ac20	5825	Ant1	-0.57	30	Pass
NVNT	ac40	5755	Ant1	-3.125	30	Pass
NVNT	ac40	5795	Ant1	-3.018	30	Pass
NVNT	ac80	5775	Ant1	-5.925	30	Pass
NVNT	n20	5745	Ant1	0.506	30	Pass
NVNT	n20	5785	Ant1	-0.094	30	Pass
NVNT	n20	5825	Ant1	-0.255	30	Pass
NVNT	n40	5755	Ant1	-2.929	30	Pass
NVNT	n40	5795	Ant1	-3.516	30	Pass

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant2	0.472	30	Pass
NVNT	a	5785	Ant2	-0.128	30	Pass
NVNT	a	5825	Ant2	0.055	30	Pass
NVNT	ac20	5745	Ant2	0.09	30	Pass
NVNT	ac20	5785	Ant2	-0.745	30	Pass
NVNT	ac20	5825	Ant2	-0.298	30	Pass
NVNT	ac40	5755	Ant2	-2.576	30	Pass
NVNT	ac40	5795	Ant2	-2.672	30	Pass
NVNT	ac80	5775	Ant2	-6.272	30	Pass
NVNT	n20	5745	Ant2	-0.19	30	Pass
NVNT	n20	5785	Ant2	-0.798	30	Pass
NVNT	n20	5825	Ant2	-0.385	30	Pass
NVNT	n40	5755	Ant2	-2.69	30	Pass
NVNT	n40	5795	Ant2	-2.916	30	Pass


Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	ac20	5745	MIMO	3.34	30	Pass
NVNT	ac20	5785	MIMO	2.62	30	Pass
NVNT	ac20	5825	MIMO	2.58	30	Pass
NVNT	ac40	5755	MIMO	0.17	30	Pass
NVNT	ac40	5795	MIMO	0.17	30	Pass
NVNT	ac80	5775	MIMO	-3.08	30	Pass
NVNT	n20	5745	MIMO	3.18	30	Pass
NVNT	n20	5785	MIMO	2.58	30	Pass
NVNT	n20	5825	MIMO	2.69	30	Pass
NVNT	n40	5755	MIMO	0.20	30	Pass
NVNT	n40	5795	MIMO	-0.20	30	Pass

PSD NVNT a 5745MHz Ant1

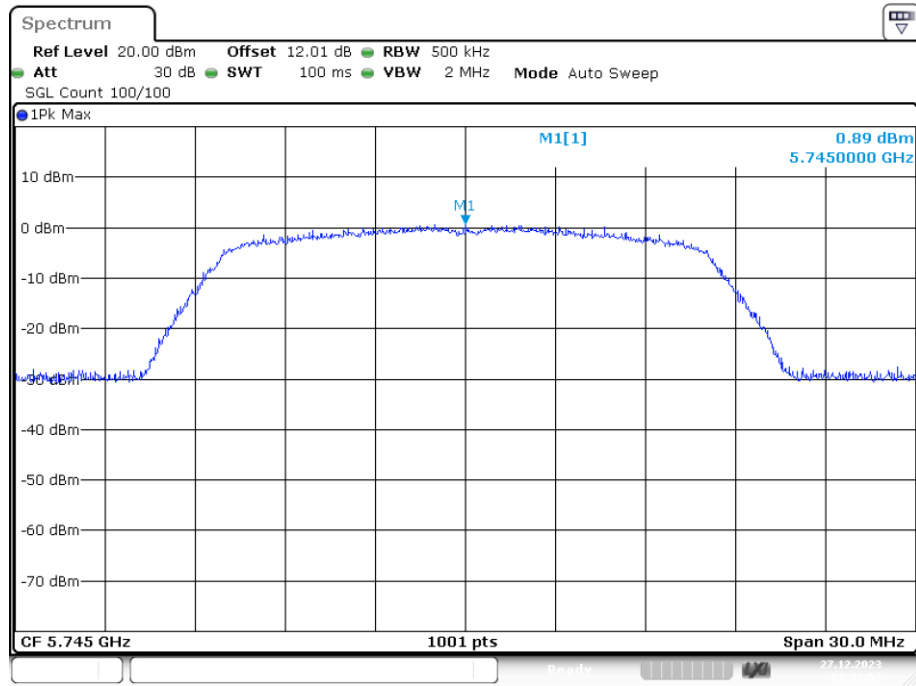


Date: 27.DEC.2023 08:22:57

PSD NVNT a 5785MHz Ant1

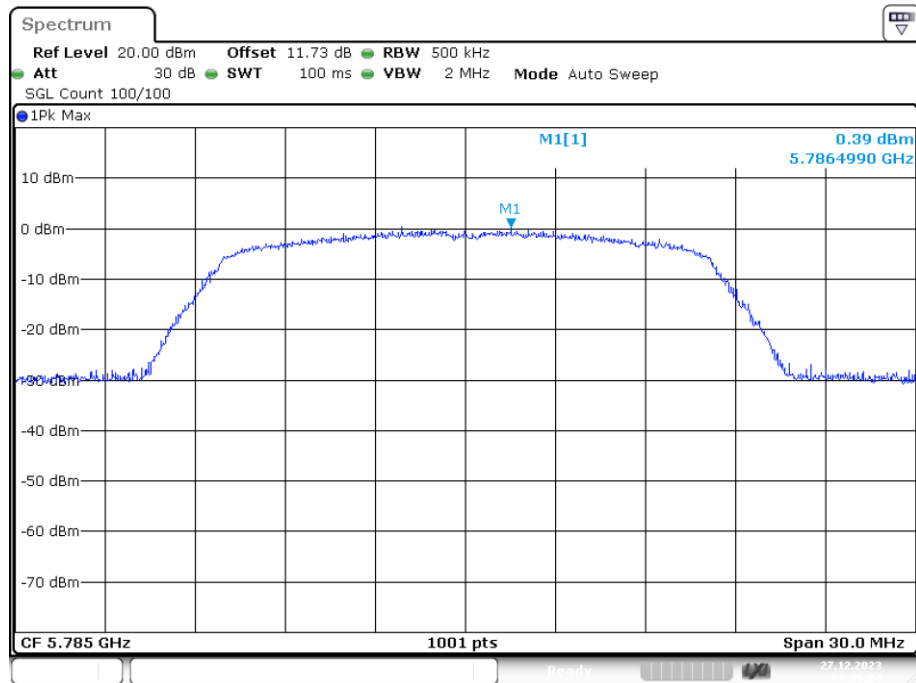


Date: 27.DEC.2023 08:25:24

PSD NVNT a 5825MHz Ant1

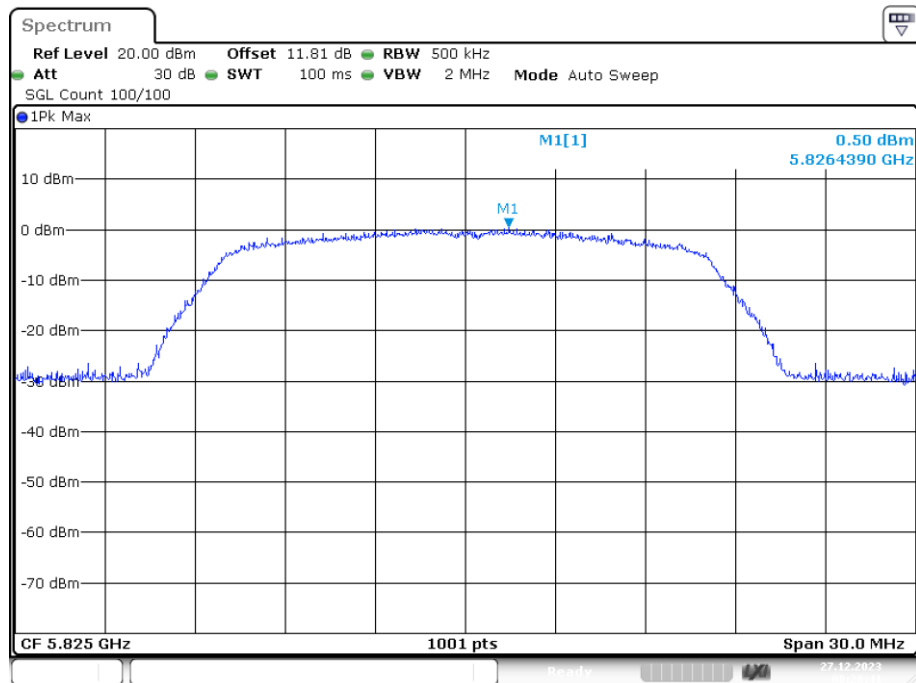


Date: 27.DEC.2023 08:28:41

PSD NVNT ac20 5745MHz Ant1

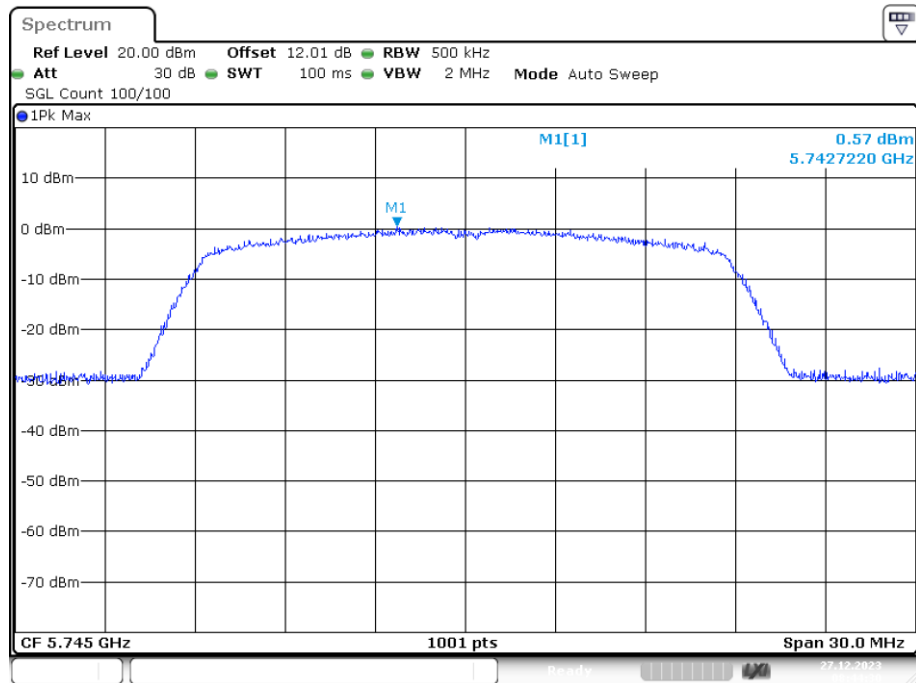


Date: 27.DEC.2023 08:44:30

PSD NVNT ac20 5785MHz Ant1

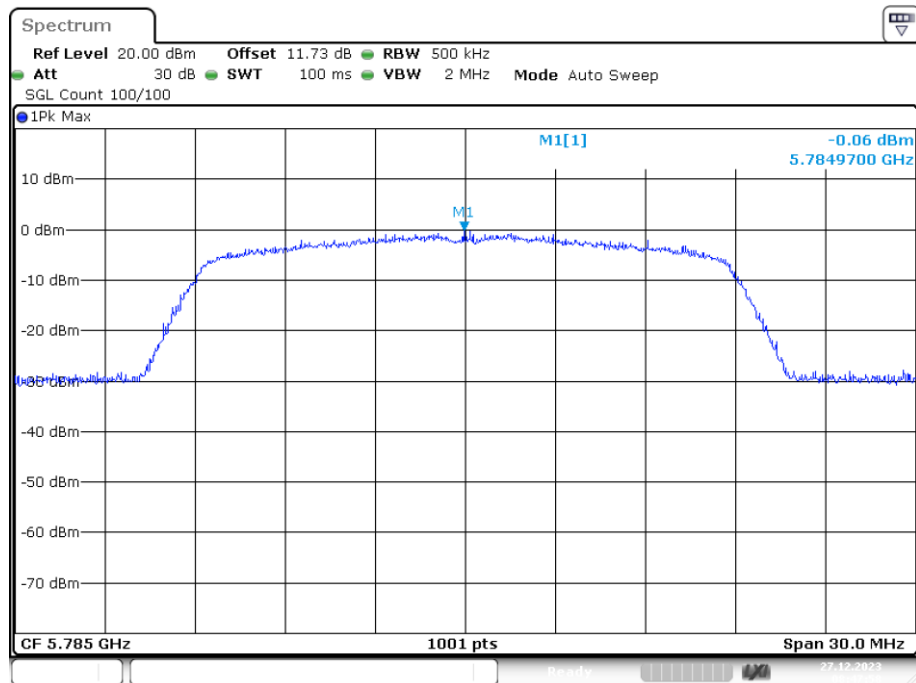


Date: 27.DEC.2023 08:47:58

PSD NVNT ac20 5825MHz Ant1

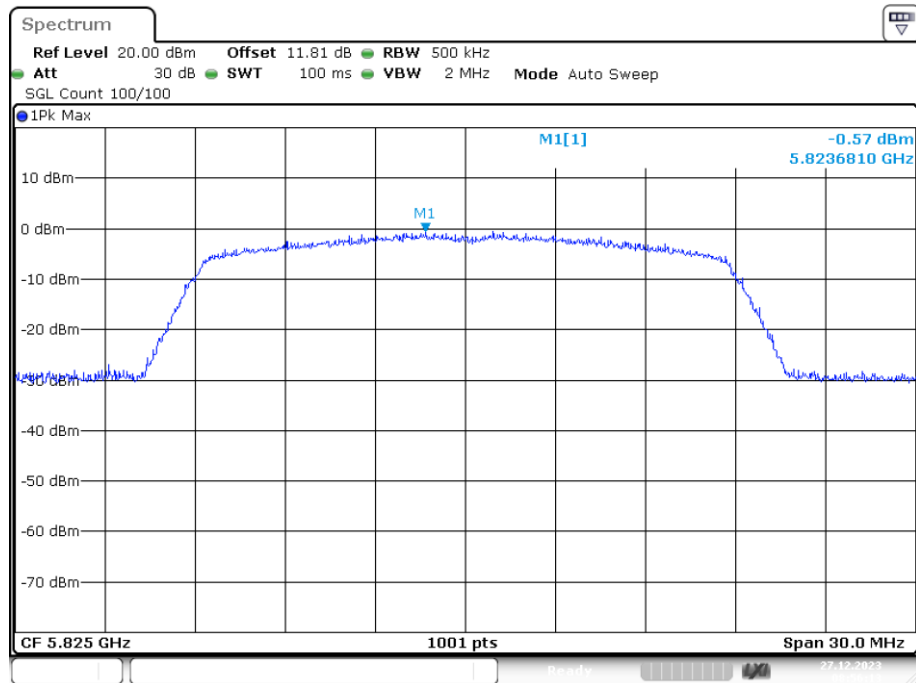


Date: 27.DEC.2023 08:56:13

PSD NVNT ac40 5755MHz Ant1

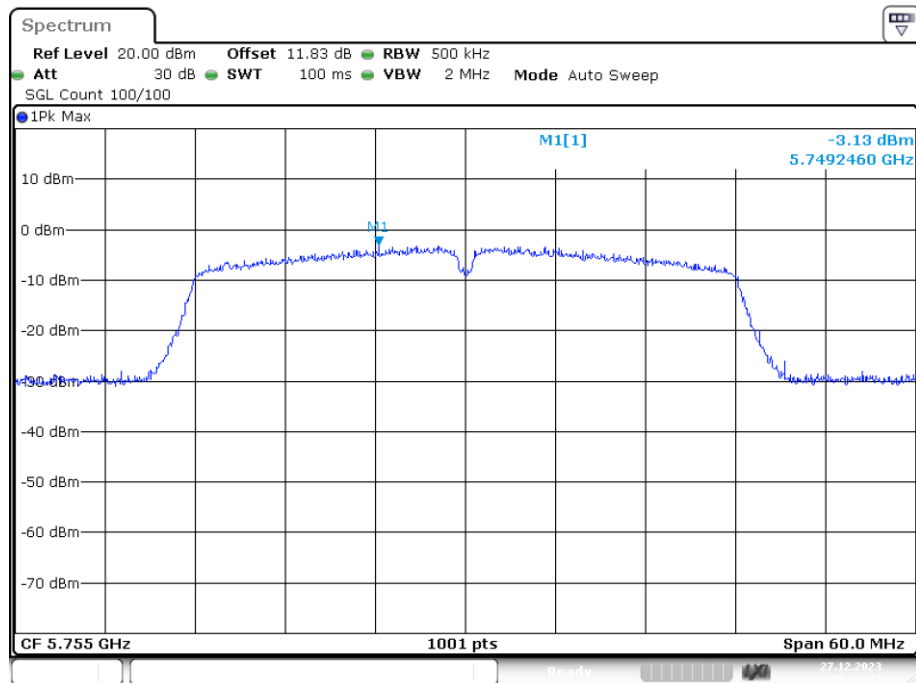


Date: 27.DEC.2023 09:14:12

PSD NVNT ac40 5795MHz Ant1

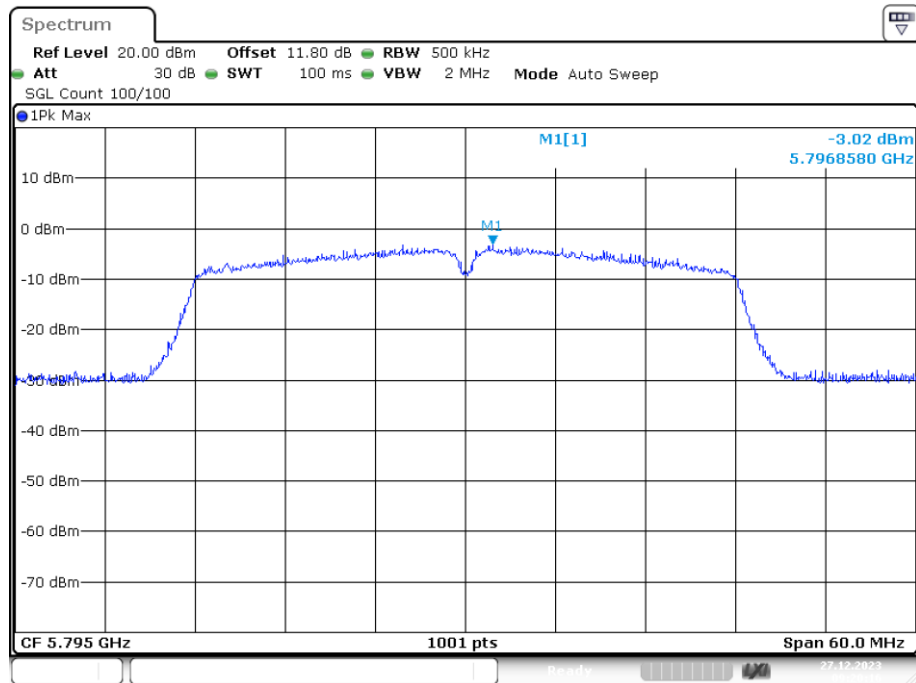

Date: 27.DEC.2023 09:20:15

PSD NVNT ac80 5775MHz Ant1

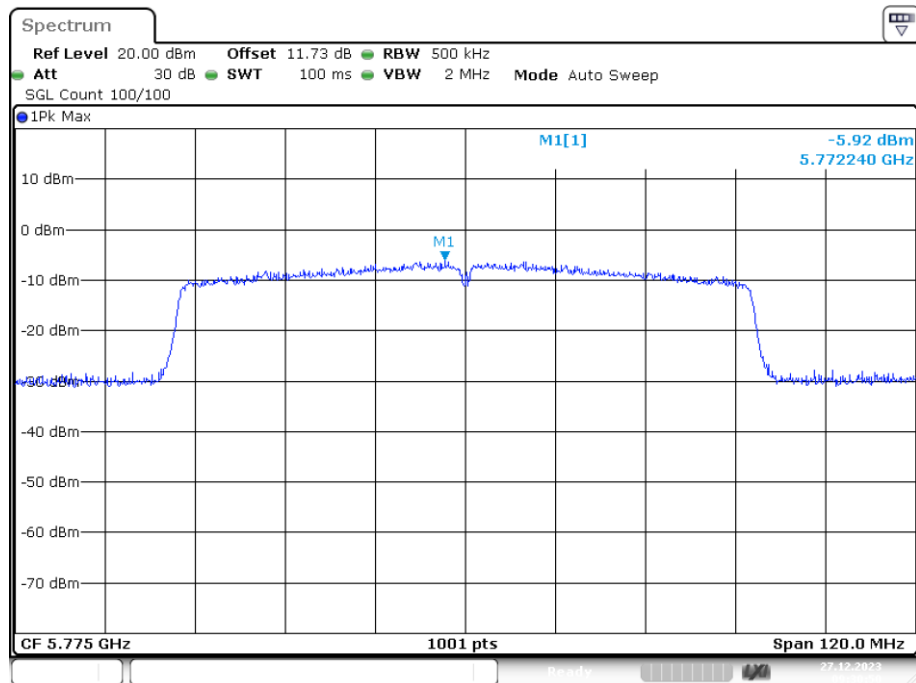

Date: 27.DEC.2023 09:30:50