

TEST REPORT

Client Information:

Applicant: Enping Yunmi Electroacoustic Equipment Co., Ltd
Applicant add.: No. 149, Planning First Road Block B, 4th Floor, Building 2, Machinery Workshop, Xite Industrial Park Dongcheng Town, Enping City Guangdong Province
Manufacturer: Enping Yunmi Electroacoustic Equipment Co., Ltd
Manufacturer add.: No. 149, Planning First Road Block B, 4th Floor, Building 2, Machinery Workshop, Xite Industrial Park Dongcheng Town, Enping City Guangdong Province

Product Information:

Product Name: Wireless in ear monitor system
Model No.: EM200
Brand Name: N/A
Test samples.: AITSZ24011902001
FCC ID: 2BEVV-EM200

Applicable standards: FCC Part 15.236

Prepared By:

Guangdong Asia Hongke Test Technology Limited

B1/F, Building 11, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Tel.: +86 0755-230967639 Fax.: +86 0755-230967639

Date of Receipt: Jan. 19, 2024

Date of Test: Jan. 19, 2024 ~ Jan. 24, 2024

Date of Issue: Jan. 24, 2024

Test Result: Pass

This device described above has been tested by Guangdong Asia Hongke Test Technology Limited and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

Note: This report shall not be reproduced except in full, without the written approval of Guangdong Asia Hongke Test Technology Limited, this document may be altered or revised by Guangdong Asia Hongke Test Technology Limited, personal only, and shall be noted in the revision of the document. This test report must not be used by the client to claim product endorsement.

Reviewed by:


Sean She

Approved by:


Eder Zhan



Table of Contents	Page
1. SUMMARY OF TEST RESULTS	4
1.1 TEST FACTORY	5
1.2 DEVIATION FROM STANDARD	5
1.3 ABNORMALITIES FROM STANDARD CONDITIONS	5
1.4 TEST LOCATION	5
1.5 MEASUREMENT UNCERTAINTY	5
2. GENERAL INFORMATION	6
2.1 GENERAL DESCRIPTION OF THE EUT	6
2.2 DESCRIPTION OF THE TEST MODES	8
2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	9
2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	9
2.5 TEST EQUIPMENT	10
3. EMC EMISSION TEST	11
3.1 CONDUCTED EMISSION MEASUREMENT	11
3.2 RADIATED EMISSIONS MEASUREMENT	17
4. PART 15.236 REQUIREMENTS	30
4.1 FREQUENCY STABILITY VS. TEMPERATURE & VOLTAGE	30
4.2 OCCUPIED BANDWIDTH	36
4.3 RADIATED POWER	41
PHOTOS OF TEST SETUP	44

**Revision History**

Revision	Issue Date	Revisions	Revised By
01	Jan. 24, 2024	Initial Issue	Seal Chen

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

The EUT has been tested according to FCC CFR 47:

Part 15.236: Operation of wireless microphones in the bands 54-72 MHz, 76-88 MHz, 174-216 MHz, 470-608 MHz and 614-698 MHz.

Emission			
Standard	Item	Limit	Result
FCC 15.236(g)	Radiated Spurious Emission	Refer to 300 422-1 V1.4.2 (8.4)	PASS
FCC 15.236(d)(1)	EIRP	≤50 mW	PASS
FCC 15.215	Occupied Bandwidth	--	PASS
FCC 15.236(f)(3)	Frequency tolerance	±0.005%	PASS
FCC 15.236(g)	Necessary Bandwidth (Mask)	Refer to 300 422-1 V1.4.2 (8.3)	PASS
FCC 15.207	Conducted Emission	--	PASS

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report.

1.1 TEST FACTORY

The test facility is recognized, certified or accredited by the following organizations:

FCC-Registration No.: 251906 Designation Number: CN1376

Guangdong Asia Hongke Test Technology Limited has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

IC —Registration No.: 31737 CAB identifier: CN0165

The 3m Semi-anechoic chamber of Guangdong Asia Hongke Test Technology Limited has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 31737

A2LA-Lab Cert. No.: 7133.01

Guangdong Asia Hongke Test Technology Limited has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

1.2 DEVIATION FROM STANDARD

None

1.3 ABNORMALITIES FROM STANDARD CONDITIONS

None

1.4 TEST LOCATION

Guangdong Asia Hongke Test Technology Limited

Address: B1/F, Building 11, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Tel.: +86 0755-230967639 Fax.: +86 0755-230967639

1.5 MEASUREMENT UNCERTAINTY

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	0.009MHz-30MHz	3.10dB	(1)
Radiated Emission	30MHz-1GHz	3.75dB	(1)
Radiated Emission	1GHz-18GHz	3.88dB	(1)
Radiated Emission	18GHz-40GHz	3.88dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	1.20dB	(1)
Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.			

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name:	Wireless in ear monitor system
Brand Name:	N/A
Model Name:	EM200
Series Model :	EM100 1B, EM100 2B, EM200 2B, EM200 4B, EM100D; EM200 12B; EM100 4B; EM200 5B, EM200 6B, EM200 8B, EM200 10B
Model Difference description:	Only the model name is different.
Power supply:	Input: 100-240V~50/60Hz 0.4A Output:12V=1.0A
Operation Frequency Range	550.00 MHz-579.25 MHz
Maximum Transmitter Power:	ANT-A: 7.35dBm ANT-B: 7.69dBm
Modulation mode / type:	FM
Temperature Range:	-20℃-50℃
Antenna Type:	ANT-A: Terminal Antenna ANT-B: Terminal Antenna
Antenna gain:	ANT-A: 3dBi ANT-B: 3dBi
Test frequency list:	Please refer to the Note 4.
Software version number:	V.01
Hardware version number:	V.01
Connecting I/O Port(s):	Please refer to the Note 1.

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User Manual.
2. Note: The product has the same digital working characters when operating in both two digitized voice/data mode. So only one set of test results for digital modulation modes are provided in this test report.

3.

Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	550.00	15	560.50	29	571.00
02	550.75	16	561.25	30	571.75
03	551.50	17	562.00	31	572.50
04	552.25	18	562.75	32	573.25
05	553.00	19	563.50	33	574.00
06	553.75	20	564.25	34	574.75
07	554.50	21	565.00	35	575.50
08	555.25	22	565.75	36	576.25
09	556.00	23	566.50	37	577.00
10	556.75	24	567.25	38	577.75
11	557.50	25	568.00	39	578.50
12	558.25	26	568.75	40	579.25
13	559.00	27	569.50	--	--
14	559.75	28	570.25	--	--

4. Test frequency list

Test Channel List		
Test Channel	EUT Channel	Test Frequency (MHz)
lowest	CH01	550.00
middle	CH20	564.25
highest	CH40	579.25

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, please see the above listed frequency for testing.

2.2 DESCRIPTION OF THE TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.


Pretest Mode	Description
Mode 1	Low Channel
Mode 2	Middle Channel
Mode 3	High Channel

For Radiated Emission	
Final Test Mode	Description
Mode 1	Low Channel
Mode 2	Middle Channel
Mode 3	High Channel

Note:

(1) Due to the different configuration and test, in this list only some worse mode. The worst test data of the worse mode is reported by this report.

2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED



2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Necessary accessories

Item	Equipment	Mfr/Brand	Model/Type No.	Length	Note
N/A	Adapter	N/A	GQ12-120100-CU	N/A	N/A

Support units

Item	Equipment	Mfr/Brand	Model/Type No.	Length	Note
N/A	N/A	N/A	N/A	N/A	N/A

Note:

(1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.5 TEST EQUIPMENT

No	Test Equipment	Manufacturer	Model No	Serial No	Cal. Date	Cal. Due Date
1	Spectrum Analyzer	R&S	FSV40	101470	2023.09.08	2024.09.07
2	Spectrum Analyzer	Keysight	N9020A	MY51280643	2023.09.08	2024.09.07
3	EMI Measuring Receiver	R&S	ESR	101660	2023.09.08	2024.09.07
4	Low Noise Pre-Amplifier	HP	HP8447E	1937A01855	2023.09.08	2024.09.07
5	Low Noise Pre-Amplifier	Tsj	MLA-0120-A02-34	2648A04738	2023.09.08	2024.09.07
6	Passive Loop	ETS	6512	00165355	2022.09.04	2024.09.03
7	TRILOG Super Broadband test Antenna	SCHWARZBECK	VULB9160	9160-3206	2021.08.29	2024.08.28
8	Broadband Horn Antenna	SCHWARZBECK	BBHA9120D	452	2021.08.29	2024.08.28
9	SHF-EHF Horn Antenna 15-40GHz	SCHWARZBECK	BBHA9170	BBHA9170367d	2021.08.29	2024.08.28
10	EMI Measuring Receiver	R&S	ESR	101160	2023.09.13	2024.09.12
11	LISN	SCHWARZBECK	NNLK 8129	8130179	2023.10.29	2024.10.28
12	Pulse Limiter	R&S	ESH3-Z2	102789	2023.09.13	2024.09.12
13	Pro.Temp&Humi.chamber	MENTEK	MHP-150-1C	MAA08112501	2023.09.08	2024.09.07
14	RF Automatic Test system	MW	MW100-RFCB	21033016	2023.09.08	2024.09.07
15	Signal Generator	Agilent	N5182A	MY50143009	2023.09.08	2024.09.07
16	Wideband Radio communication tester	R&S	CMW500	1201.0002K50	2023.09.08	2024.09.07
17	RF Automatic Test system	MW	MW100-RFCB	21033016	2023.09.08	2024.09.07
18	DC power supply	ZHAOXIN	RXN-305D-2	28070002559	N/A	N/A
19	RE Software	EZ	EZ-EMC_RE	Ver.AIT-03A	N/A	N/A
20	CE Software	EZ	EZ-EMC_CE	Ver.AIT-03A	N/A	N/A
21	RF Software	MW	MTS 8310	2.0.0.0	N/A	N/A
22	temporary antenna connector(Note)	NTS	R001	N/A	N/A	N/A

Note: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION LIMITS

The radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table.

FREQUENCY (MHz)	Conducted Emissionlimit (dBUV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of “ * ” marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.1.2 TEST PROCEDURE

- The EUT is 0.8 m from the horizontal ground plane and 0.4 m from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments are powered from additional LISN(s). The LISN provides 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN is at least 80 cm from the nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 TEST SETUP

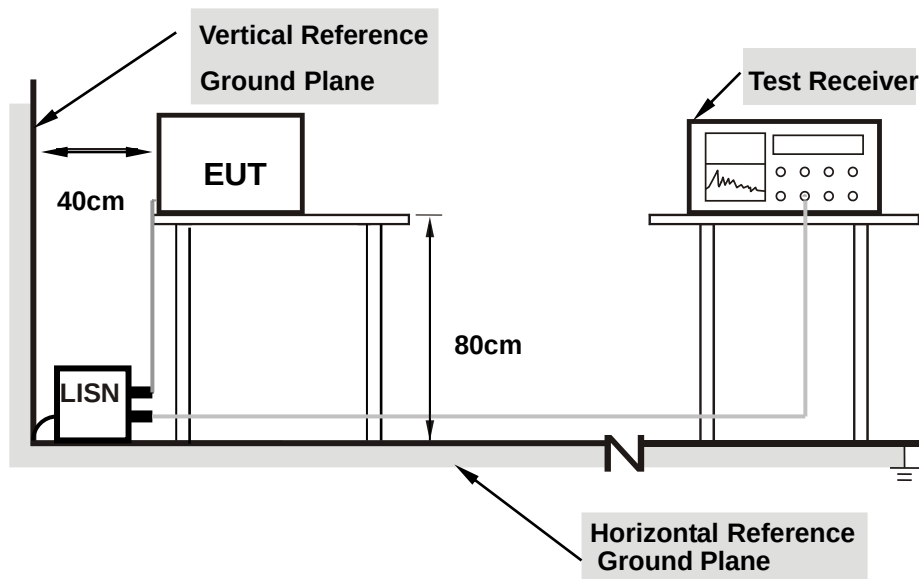


Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes support.

3.1.4 TEST RESULT


Test Mode:	PCB A_ANT_A	Test Date :	2024-01-23
ATM Pressure:	101 kPa	Test Result:	☒ Pass ☐ Fail
Phase :	Line		

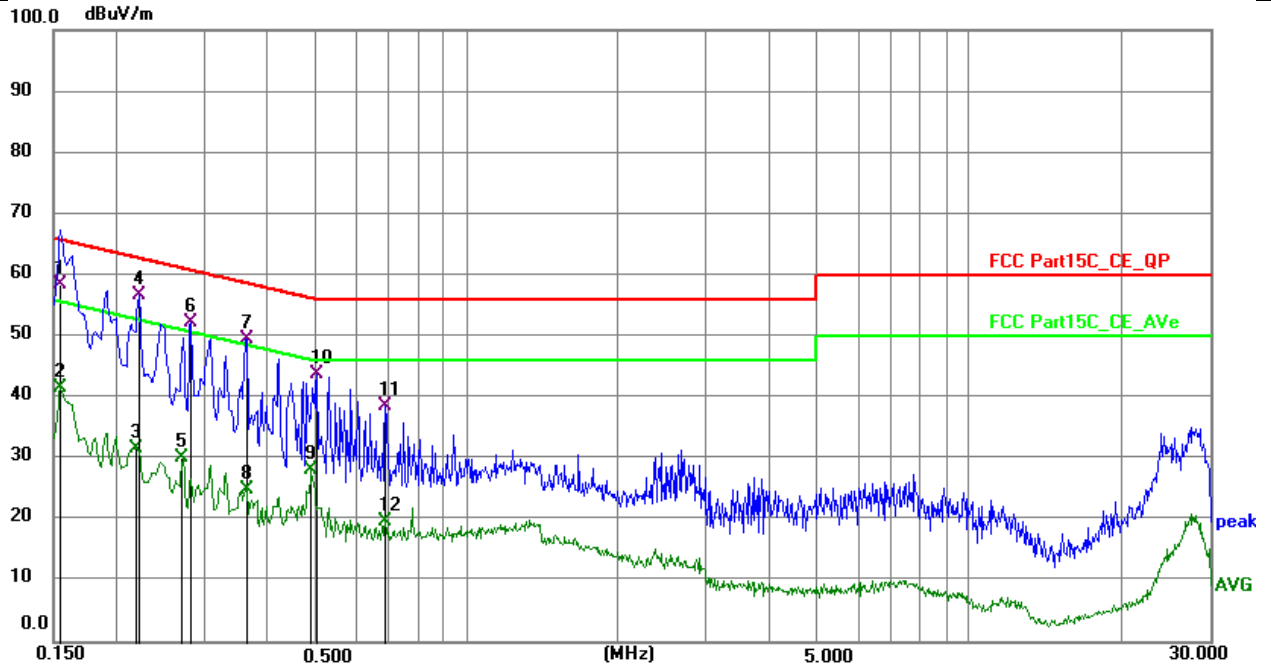

Remark: Correct Factor = Insertion loss of LISN + Cable loss + Insertion loss of Pulse Limiter;
Measurement Result = Reading Level +Correct Factor;
Margin = Measurement Result- Limit;

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1545	46.98	11.49	58.47	65.75	-7.28	QP
2	0.1545	30.18	11.49	41.67	55.75	-14.08	AVG
3	0.2175	20.84	10.84	31.68	52.91	-21.23	AVG
4	0.2220	45.94	10.84	56.78	62.74	-5.96	QP
5	0.2714	19.39	10.84	30.23	51.07	-20.84	AVG
6	0.2805	41.50	10.84	52.34	60.80	-8.46	QP
7	0.3615	38.77	10.84	49.61	58.69	-9.08	QP
8	0.3615	14.07	10.84	24.91	48.69	-23.78	AVG
9	0.4875	17.31	10.84	28.15	46.21	-18.06	AVG
10	0.5010	32.86	10.84	43.70	56.00	-12.30	QP
11	0.6855	27.63	10.85	38.48	56.00	-17.52	QP
12	0.6855	8.76	10.85	19.61	46.00	-26.39	AVG


Test Mode:	PCB A_ANT_A	Test Date :	2024-01-23
ATM Pressure:	101 kPa	Test Result:	☒ Pass ☐ Fail
Phase :	Neutral		

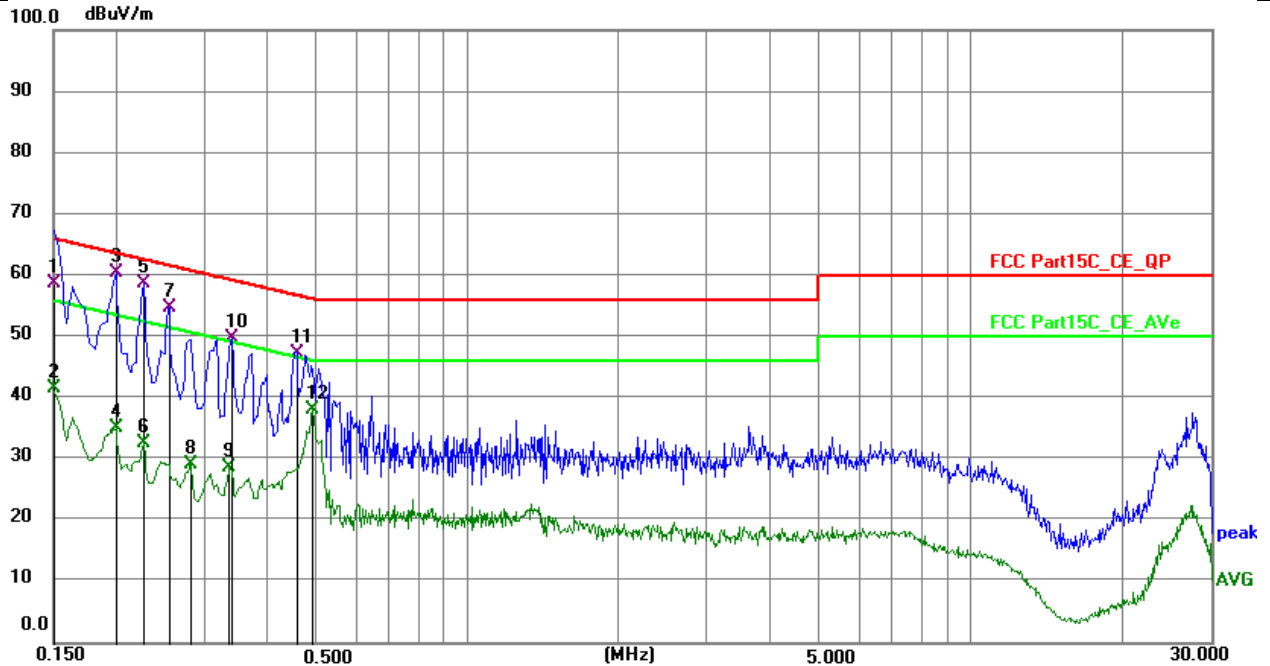

Remark: Correct Factor = Insertion loss of LISN + Cable loss + Insertion loss of Pulse Limiter;
Measurement Result = Reading Level +Correct Factor;
Margin = Measurement Result- Limit;

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1500	46.71	12.03	58.74	66.00	-7.26	QP
2	0.1500	29.60	12.03	41.63	56.00	-14.37	AVG
3	0.1995	49.58	10.83	60.41	63.63	-3.22	QP
4	0.1995	24.27	10.83	35.10	53.63	-18.53	AVG
5	0.2265	47.78	10.83	58.61	62.58	-3.97	QP
6	0.2265	21.70	10.83	32.53	52.58	-20.05	AVG
7	0.2535	43.90	10.83	54.73	61.64	-6.91	QP
8	0.2805	18.31	10.83	29.14	50.80	-21.66	AVG
9	0.3345	17.73	10.83	28.56	49.34	-20.78	AVG
10	0.3390	38.97	10.83	49.80	59.23	-9.43	QP
11	0.4560	36.53	10.84	47.37	56.77	-9.40	QP
12	0.4920	27.30	10.84	38.14	46.13	-7.99	AVG


Test Mode:	PCB B_ANT_B	Test Date :	2024-01-23
ATM Pressure:	101 kPa	Test Result:	☒ Pass ☐ Fail
Phase :	Line		

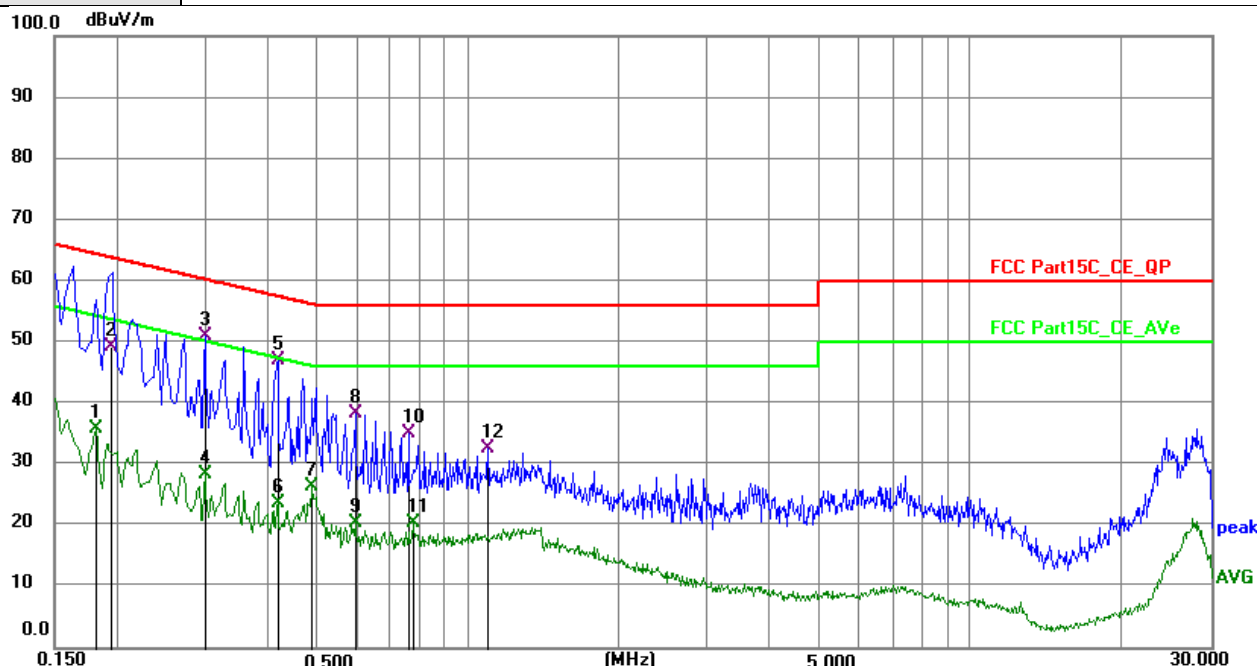

Remark: Correct Factor = Insertion loss of LISN + Cable loss + Insertion loss of Pulse Limiter;
Measurement Result = Reading Level +Correct Factor;
Margin = Measurement Result- Limit;

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1815	24.94	10.84	35.78	54.42	-18.64	AVG
2	0.1949	38.52	10.84	49.36	63.83	-14.47	QP
3	0.2985	40.23	10.84	51.07	60.28	-9.21	QP
4	0.2985	17.49	10.84	28.33	50.28	-21.95	AVG
5	0.4155	36.21	10.84	47.05	57.54	-10.49	QP
6	0.4155	12.98	10.84	23.82	47.54	-23.72	AVG
7	0.4875	15.67	10.84	26.51	46.21	-19.70	AVG
8	0.5955	27.56	10.85	38.41	56.00	-17.59	QP
9	0.5955	9.71	10.85	20.56	46.00	-25.44	AVG
10	0.7620	24.24	10.85	35.09	56.00	-20.91	QP
11	0.7755	9.63	10.85	20.48	46.00	-25.52	AVG
12	1.0950	21.83	10.86	32.69	56.00	-23.31	QP

Test Mode:	PCB B_ANT_B	Test Date :	2024-01-23
ATM Pressure:	101 kPa	Test Result:	☒ Pass ☐ Fail
Phase :	Neutral		

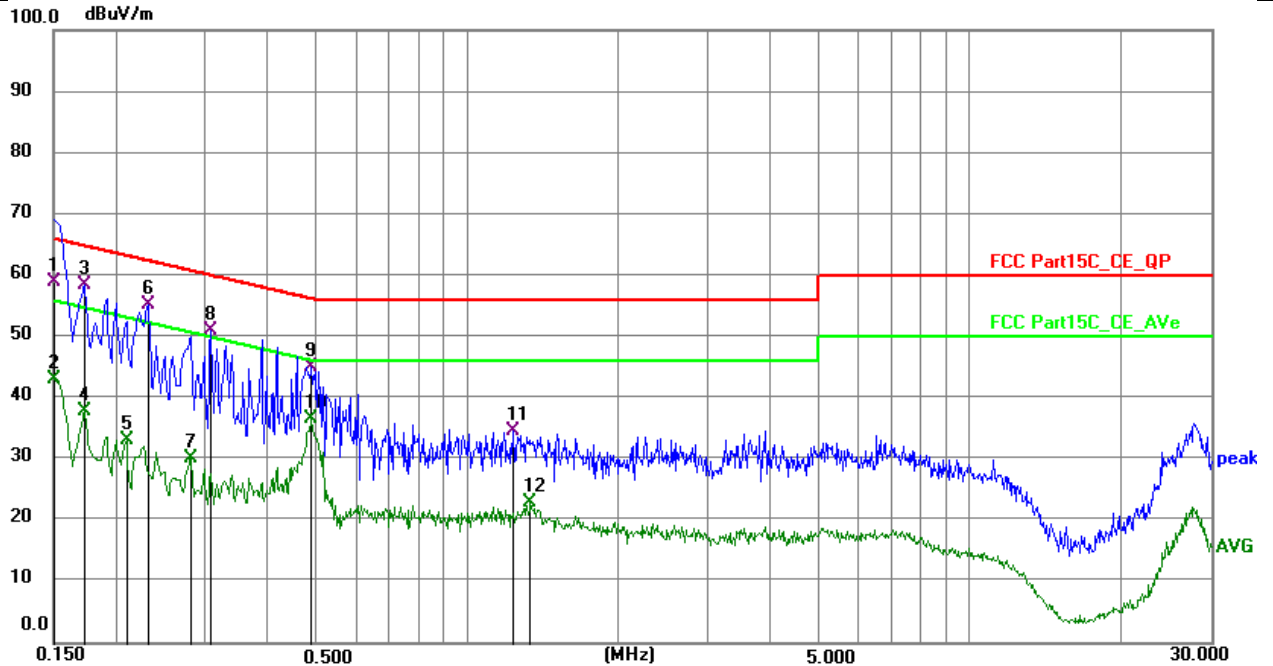

Remark: Correct Factor = Insertion loss of LISN + Cable loss + Insertion loss of Pulse Limiter;
Measurement Result = Reading Level +Correct Factor;
Margin = Measurement Result- Limit;

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1500	46.82	12.03	58.85	66.00	-7.15	QP
2	0.1500	31.14	12.03	43.17	56.00	-12.83	AVG
3	0.1725	47.51	10.84	58.35	64.84	-6.49	QP
4	0.1725	26.88	10.84	37.72	54.84	-17.12	AVG
5	0.2085	22.23	10.83	33.06	53.26	-20.20	AVG
6	0.2310	44.46	10.83	55.29	62.41	-7.12	QP
7	0.2805	19.44	10.83	30.27	50.80	-20.53	AVG
8	0.3075	40.13	10.83	50.96	60.04	-9.08	QP
9	0.4875	34.10	10.84	44.94	56.21	-11.27	QP
10	0.4875	25.84	10.84	36.68	46.21	-9.53	AVG
11	1.2345	23.71	10.85	34.56	56.00	-21.44	QP
12	1.3335	12.14	10.85	22.99	46.00	-23.01	AVG

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.

3.2 RADIATED EMISSIONS MEASUREMENT

3.2.1 STANDARD REQUIREMENT:

Table 3: Limits for spurious emissions

State	Frequency		
	47 MHz to 74 MHz 87,5 MHz to 137 MHz 174 MHz to 230 MHz 470 MHz to 862 MHz	Other Frequencies below 1 000 MHz	Frequencies above 1 000 MHz
Operation	4 nW	250 nW	1 µW
Standby	2 nW	2 nW	20 nW

3.2.2 MEASURING INSTRUMENTS AND SETTING:

Please refer to equipment list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10 th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB/VB 200Hz/1KHz for QP/AVG
Start ~ Stop Frequency	150kHz~30MHz / RB/VB 9kHz/30KHz for QP/AVG
Start ~ Stop Frequency	30MHz~1000MHz / RB/VB 120kHz/1MHz for QP


3.2.3 TEST PROCEDURES

1. Please refer to ETSI EN 300 422-1 V1.4.2 (2011-08) clause 6.1 for the test conditions.
2. Please refer to ETSI EN 300 422-1 V1.4.2 (2011-08) clause 8.4.2 for the measurement method.

3.2.4 TEST SETUP LAYOUT

Test Configuration

Effective Radiated Power measurement (30 MHz to 12.75 GHz)

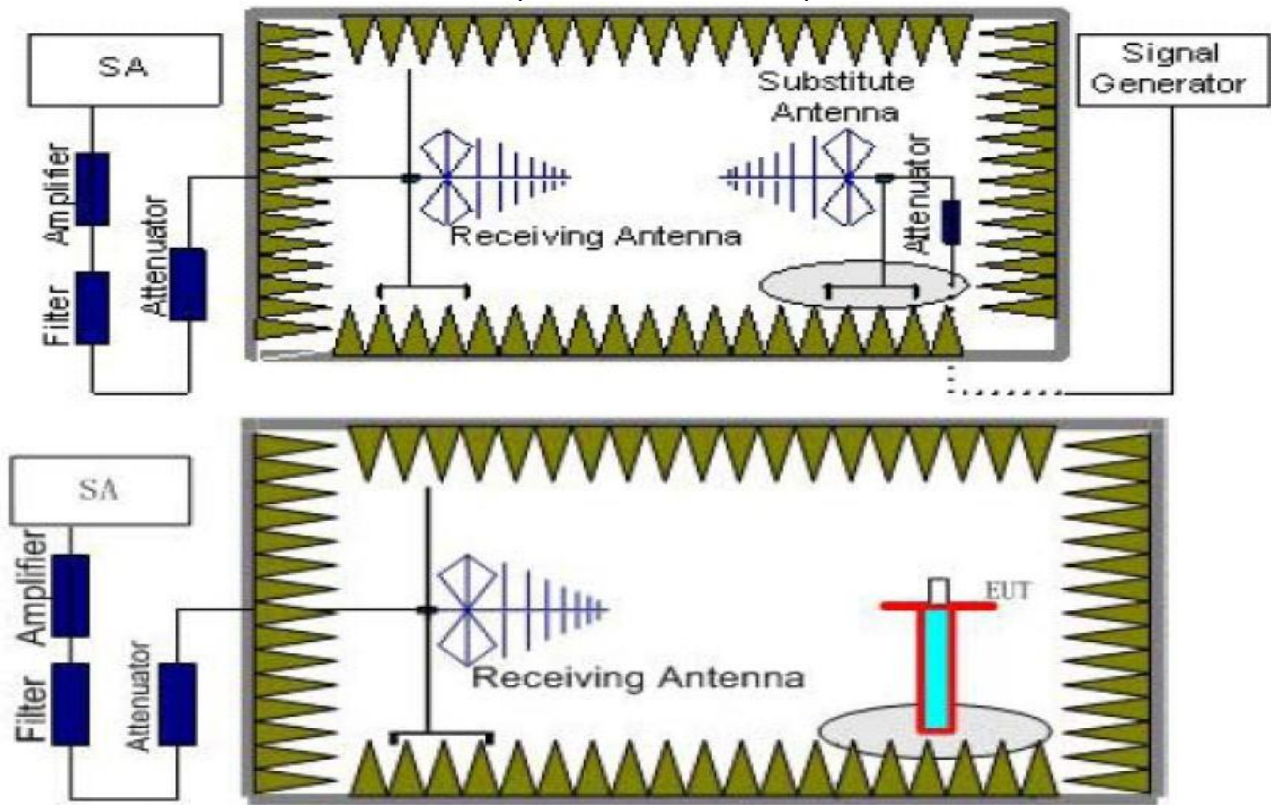

3.2.5 EUT OPERATION DURING TEST

The EUT was programmed to be in continuously transmitting mode.

3.2.6 TEST RESULT

Temperature	26°C	Humidity	53%
Configurations	TX		

Remarks:

1. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.

Spurious emissions

The test frequency range from 25MHz to 7GHz and recorded worst at below:

ANT A

Test mode: Tx (550MHz)					
Frequency (MHz)	Pol./Ant	Measurement EIRP (dBm)	Limit (dBm)	Margin (dB)	Result
57.1	V	-82.31	-54	28.31	PASS
326.7	V	-71.46	-36	35.46	
648.8	V	-68.33	-54	14.33	
1100	V	-44.57	-30	14.57	
1650	V	-41.66	-30	11.66	
2200	V	-40.13	-30	10.13	
2750	V	-37.59	-30	7.59	
3300	V	-37.91	-30	7.91	
--	V	--	--	--	
57.7	H	-81.65	-54	27.65	
326.9	H	-71.89	-36	35.89	
647.9	H	-68.01	-54	14.01	
1100	H	-43.67	-30	13.67	
1650	H	-42.37	-30	12.37	
2200	H	-40.07	-30	10.07	
2750	H	-37.45	-30	7.45	
3300	H	-36.79	-30	6.79	
--	H	--	--	--	

Test mode: Tx (564.25MHz)					
Frequency (MHz)	Pol./Ant	Measurement EIRP (dBm)	Limit (dBm)	Margin (dB)	Result
57.5	V	-82.75	-54	28.75	PASS
326.1	V	-71.25	-36	35.25	
648.4	V	-68.91	-54	14.91	
1128.5	V	-43.17	-30	13.17	
1692.75	V	-41.67	-30	11.67	
2257	V	-40.40	-30	10.40	
2821.25	V	-38.30	-30	8.30	
3385.5	V	-36.81	-30	6.81	
--	V	--	--	--	
57.5	H	-83.86	-54	29.86	
326.9	H	-70.45	-36	34.45	
647.1	H	-67.17	-54	13.17	
1128.5	H	-43.91	-30	13.91	
1692.75	H	-42.57	-30	12.57	
2257	H	-40.25	-30	10.25	
2821.25	H	-38.07	-30	8.07	
3385.5	H	-37.51	-30	7.51	
--	H	--	--	--	

Test mode: Tx (579.25MHz)					
Frequency	Pol./Ant	Measurement EIRP (dBm)	Limit	Margin	Result
(MHz)			(dBm)	(dB)	
56.2	V	-81.66	-54	27.66	PASS
326.8	V	-72.76	-36	36.76	
649.4	V	-68.98	-54	14.98	
1158.5	V	-43.45	-30	13.45	
1737.75	V	-41.41	-30	11.41	
2317	V	-40.43	-30	10.43	
2896.25	V	-37.89	-30	7.89	
3475.5	V	-36.94	-30	6.94	
--	V	--	--	--	
57.4	H	-81.21	-54	27.21	
326.2	H	-71.54	-36	35.54	
647.6	H	-68.79	-54	14.79	
1158.5	H	-43.74	-30	13.74	
1737.75	H	-41.56	-30	11.56	
2317	H	-39.95	-30	9.95	
2896.25	H	-37.24	-30	7.24	
3475.5	H	-37.31	-30	7.31	
--	H	--	--	--	

ANT B

Test mode: Tx (550MHz)					
Frequency	Pol./Ant	Measurement EIRP (dBm)	Limit	Margin	Result
(MHz)			(dBm)	(dB)	
56.9	V	-83.65	-54	29.65	PASS
326.6	V	-71.88	-36	35.88	
648	V	-67.17	-54	13.17	
1100	V	-44.21	-30	14.21	
1650	V	-41.79	-30	11.79	
2200	V	-39.28	-30	9.28	
2750	V	-38.04	-30	8.04	
3300	V	-36.81	-30	6.81	
--	V	--	--	--	
57.2	H	-80.54	-54	26.54	
325.4	H	-72.13	-36	36.13	
646.3	H	-68.59	-54	14.59	
1100	H	-43.36	-30	13.36	
1650	H	-42.52	-30	12.52	
2200	H	-39.77	-30	9.77	
2750	H	-38.38	-30	8.38	
3300	H	-37.06	-30	7.06	
--	H	--	--	--	

Test mode: Tx (564.25MHz)					
Frequency	Pol./Ant	Measurement EIRP (dBm)	Limit	Margin	Result
(MHz)			(dBm)	(dB)	
57.3	V	-82.53	-54	28.53	PASS
327.8	V	-71.95	-36	35.95	
647.4	V	-67.78	-54	13.78	
1128.5	V	-44.16	-30	14.16	
1692.75	V	-42.09	-30	12.09	
2257	V	-40.08	-30	10.08	
2821.25	V	-38.66	-30	8.66	
3385.5	V	-37.02	-30	7.02	
--	V	--	--	--	
57.2	H	-83.16	-54	29.16	
326.7	H	-70.95	-36	34.95	
647.4	H	-65.62	-54	11.62	
1128.5	H	-44.14	-30	14.14	
1692.75	H	-42.57	-30	12.57	
2257	H	-40.24	-30	10.24	
2821.25	H	-38.38	-30	8.38	
3385.5	H	-36.80	-30	6.80	
--	H	--	--	--	

Test mode: Tx (579.25MHz)					
Frequency	Pol./Ant	Measurement EIRP (dBm)	Limit	Margin	Result
(MHz)			(dBm)	(dB)	
56.9	V	-81.37	-54	27.37	PASS
326.3	V	-71.56	-36	35.56	
649.1	V	-68.22	-54	14.22	
1158.5	V	-43.70	-30	13.70	
1737.75	V	-41.93	-30	11.93	
2317	V	-40.38	-30	10.38	
2896.25	V	-37.78	-30	7.78	
3475.5	V	-36.52	-30	6.52	
--	V	--	--	--	
57.1	H	-81.89	-54	27.89	
326.6	H	-71.06	-36	35.06	
647.3	H	-68.51	-54	14.51	
1158.5	H	-44.32	-30	14.32	
1737.75	H	-41.42	-30	11.42	
2317	H	-40.25	-30	10.25	
2896.25	H	-37.94	-30	7.94	
3475.5	H	-36.60	-30	6.60	
--	H	--	--	--	

Remark:

1. *The test frequency range from 25MHz to 7GHz, RBW/VBW: 100 KHz/300KHz below 1GHz, RBW/VBW: 1000 KHz/3000KHz above 1GHz.*
2. *--“Other emission levels were very low against the limit and not reported.*

Emission Mask

ETSI EN 300 422-1 V1.4.2 Clause 8.3.1.2 The Maximum Measurement of Necessary Bandwidth Test Plot:



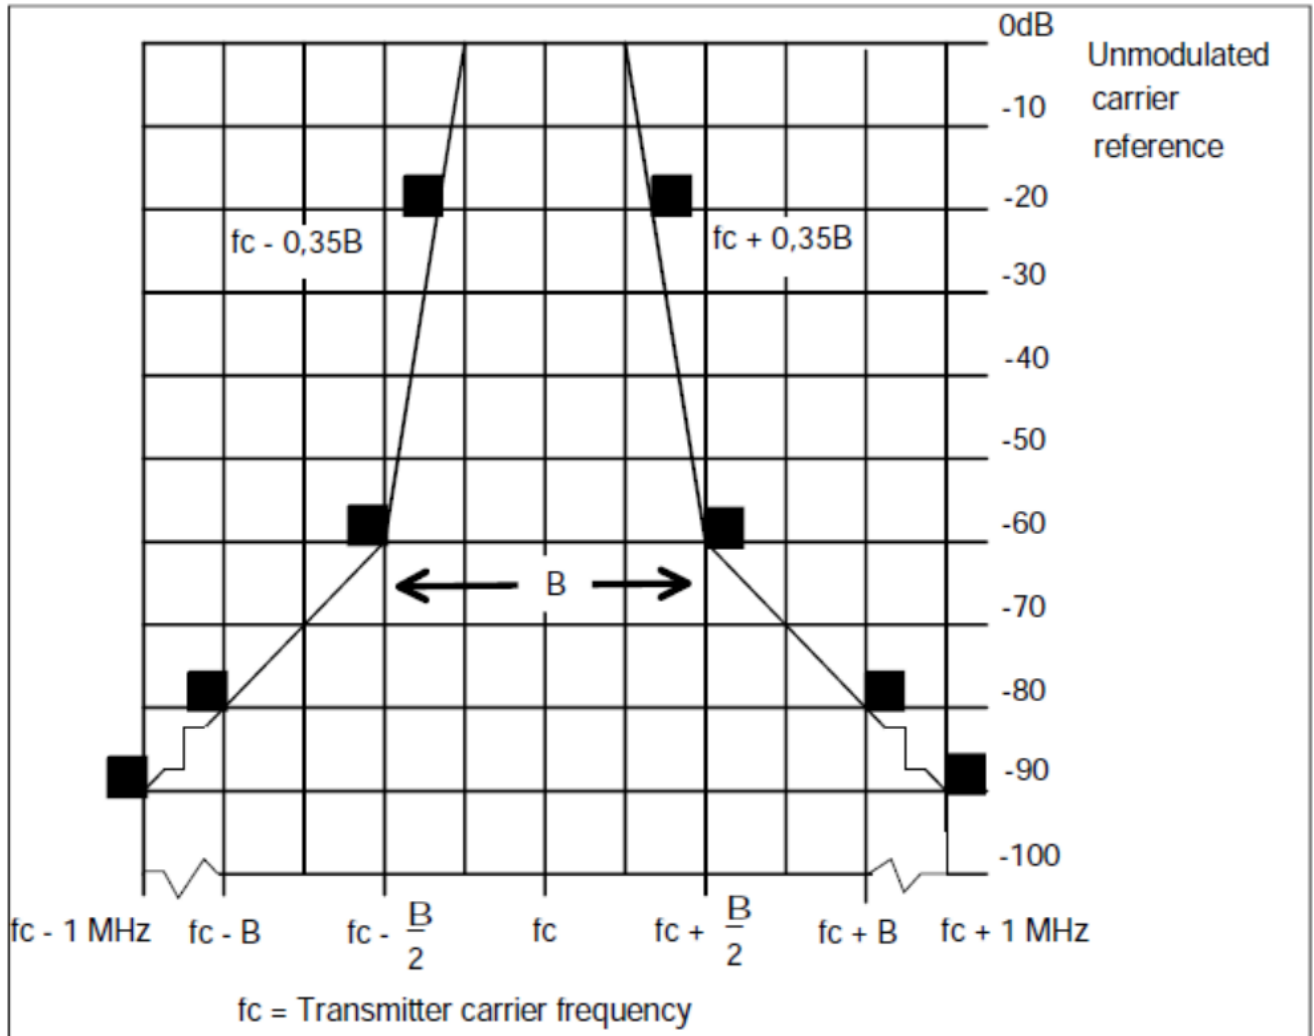


Figure 3: Spectrum mask for analogue systems in all bands



Frequency(MHz)	Declared Bandwidth B (KHz)	B/2 (KHz)	0.35B (KHz)
550	200	100	70
564.25	200	100	70
579.25	200	100	70

Low CH

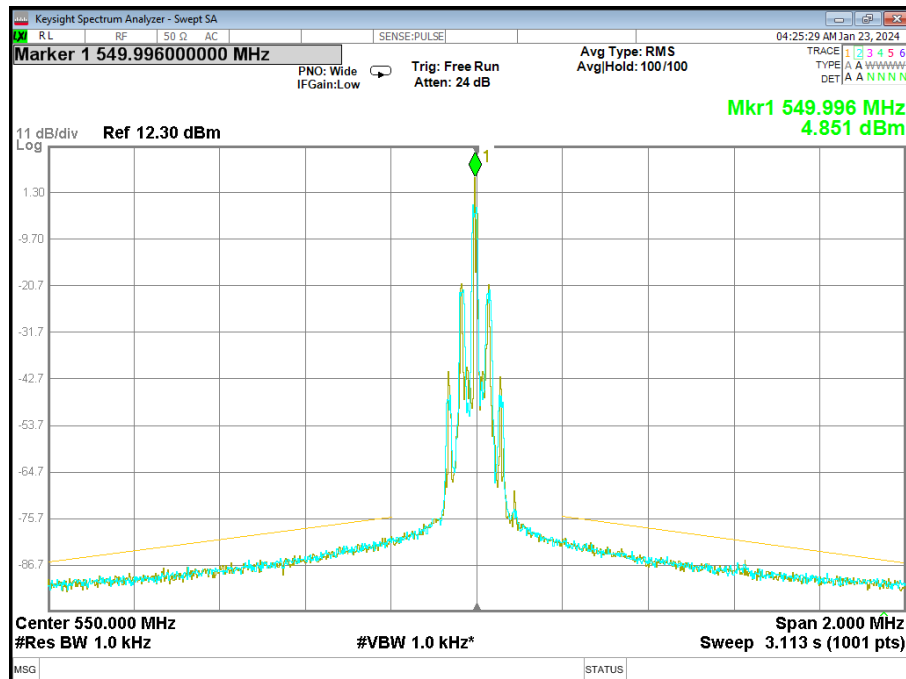
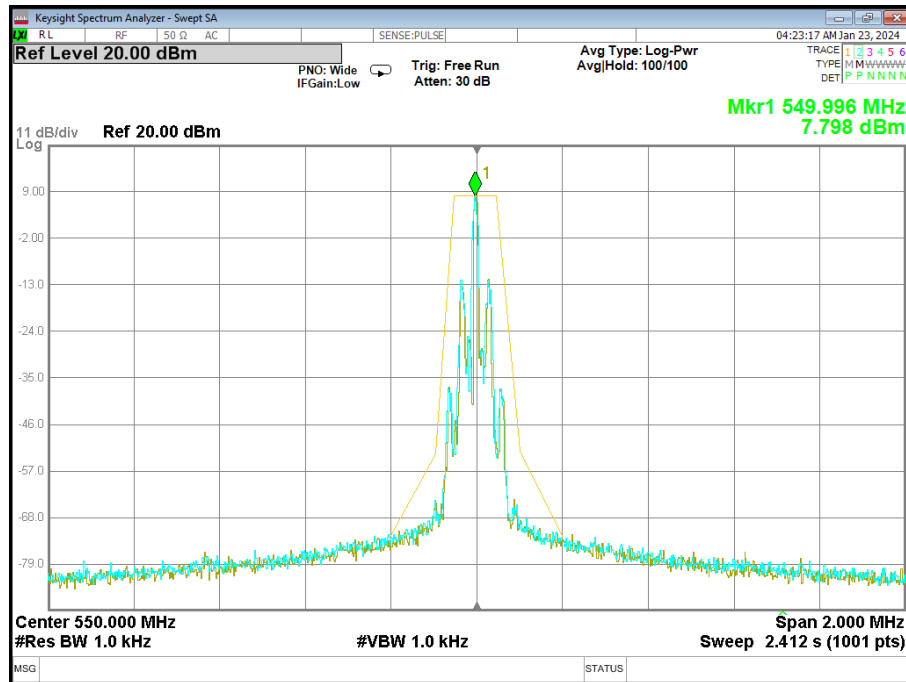


Mid CH

Guangdong Asia Hongke Test Technology Limited
B1/F, Building 11, Junfeng Industrial Park, Chongqing Road,
Heping Community, Fuhai Street, Bao'an District, Shenzhen,
Guangdong, China.

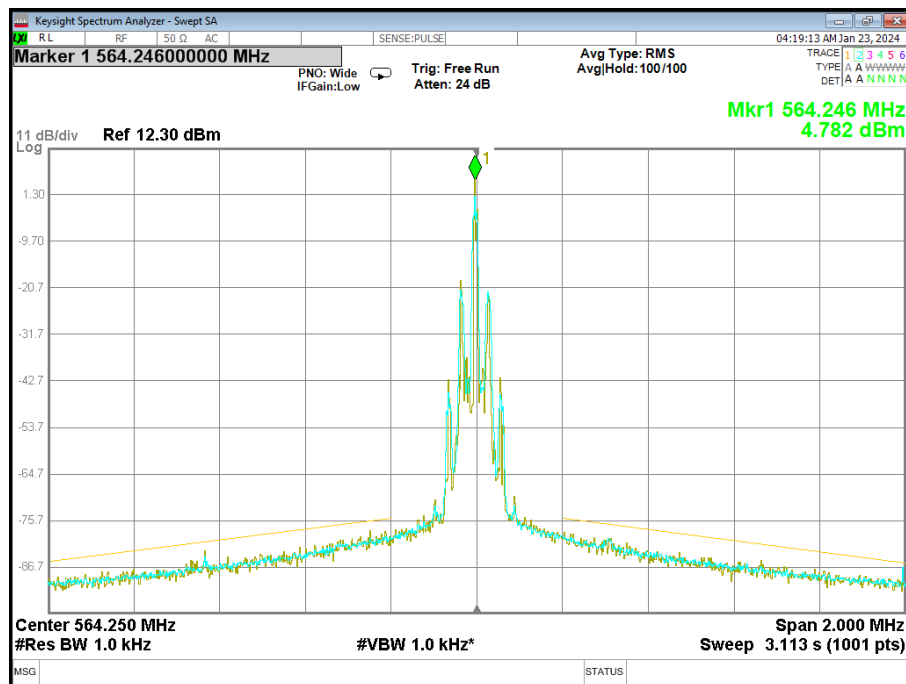
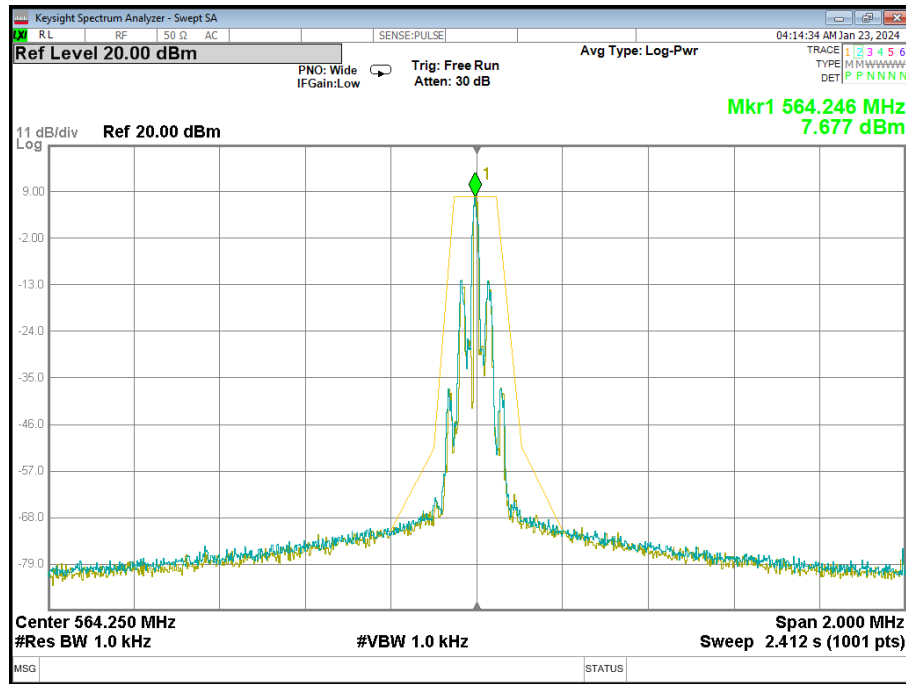


High CH

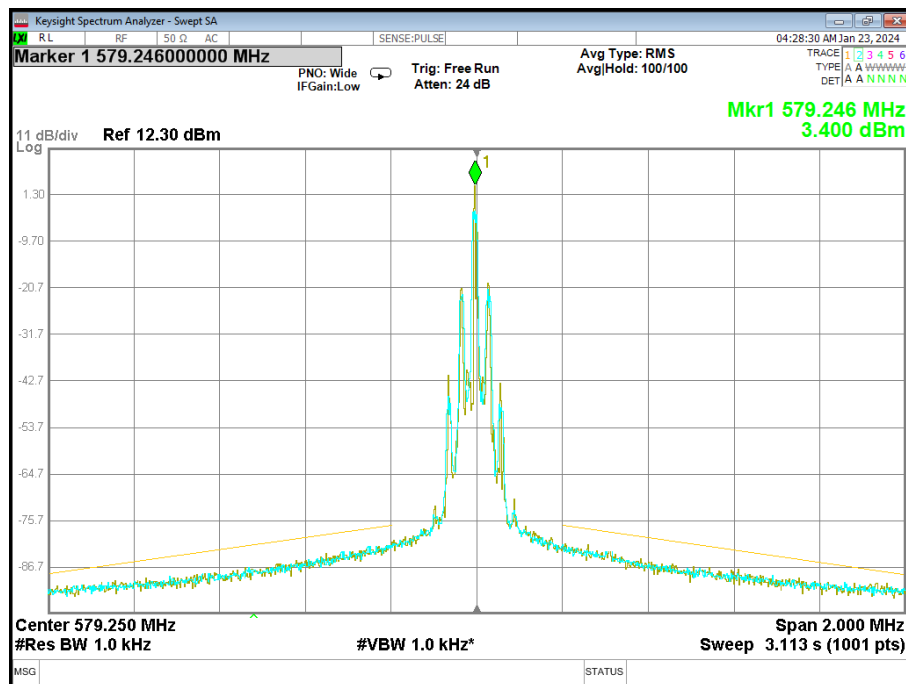
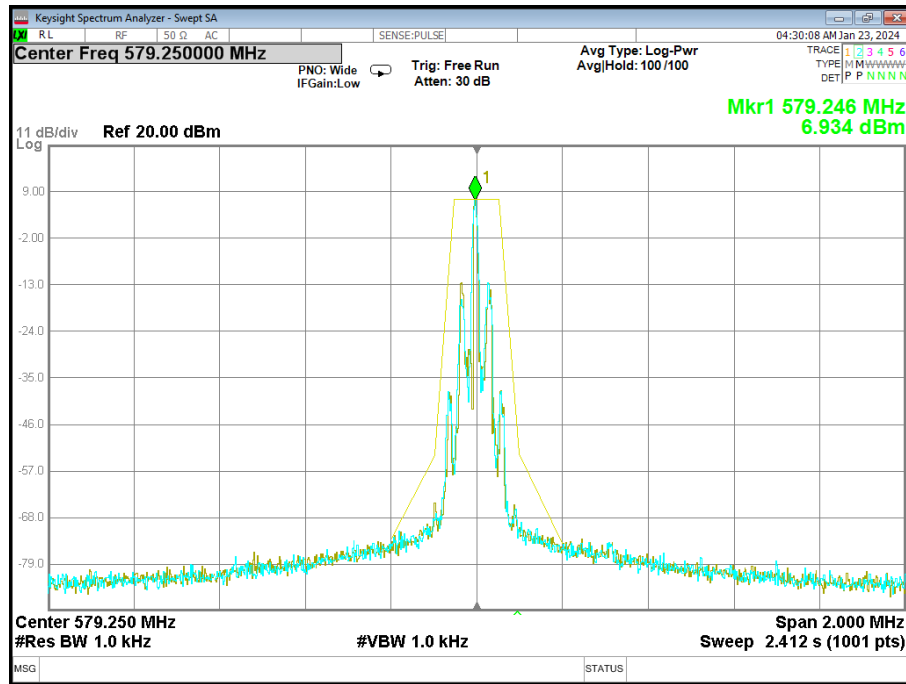


ANT B:



Frequency(MHz)	Declared Bandwidth B (KHz)	B/2 (KHz)	0.35B (KHz)
550	200	100	70
564.25	200	100	70
579.25	200	100	70

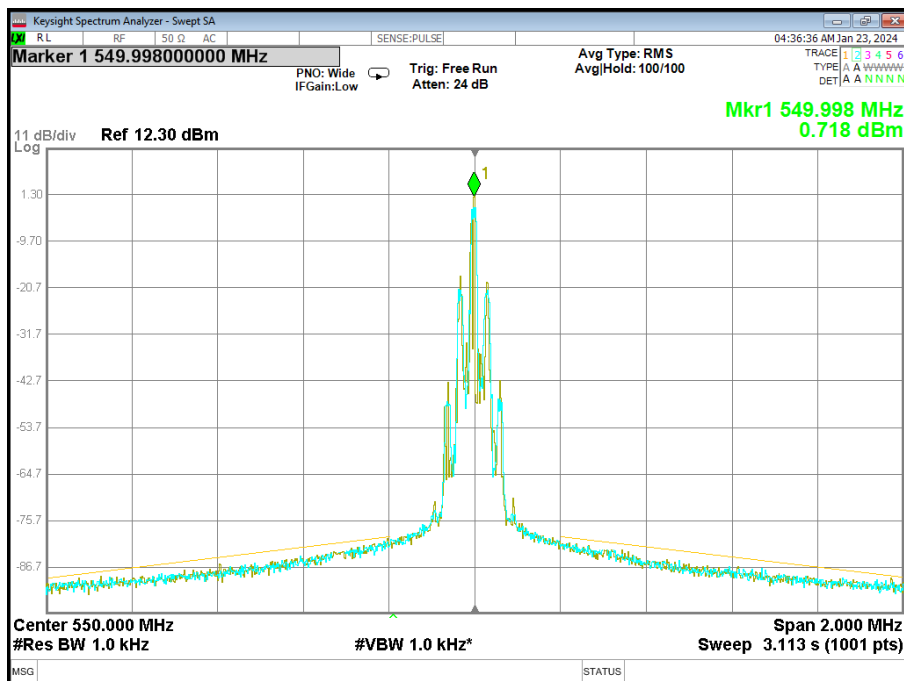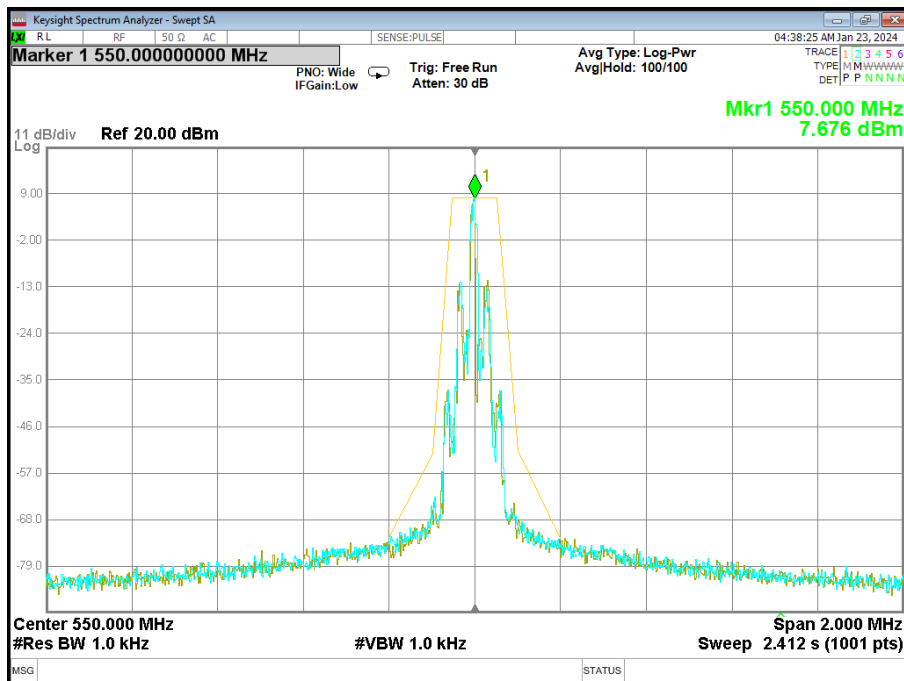Low CH


Mid CH

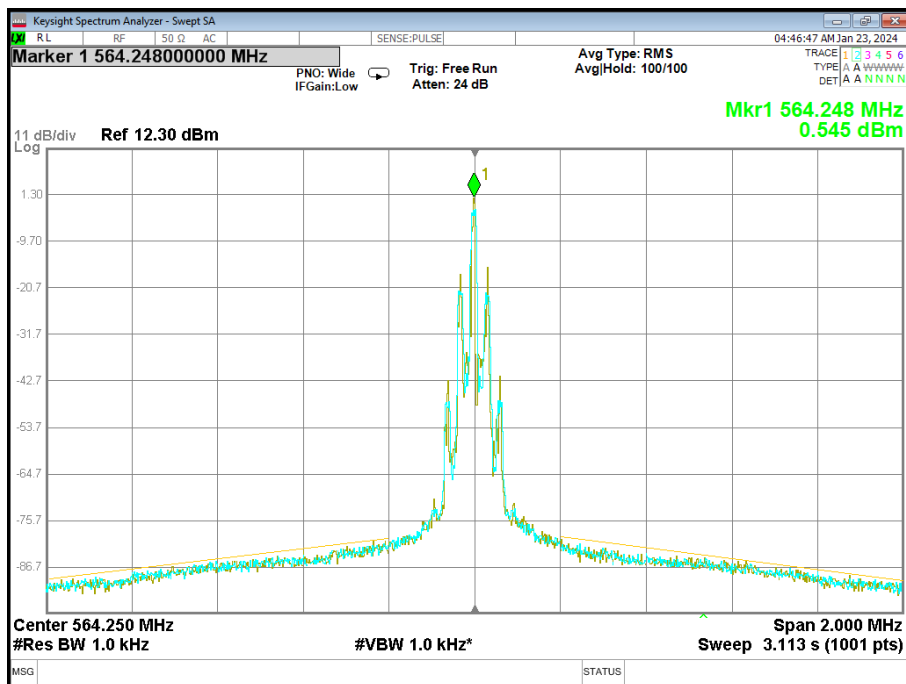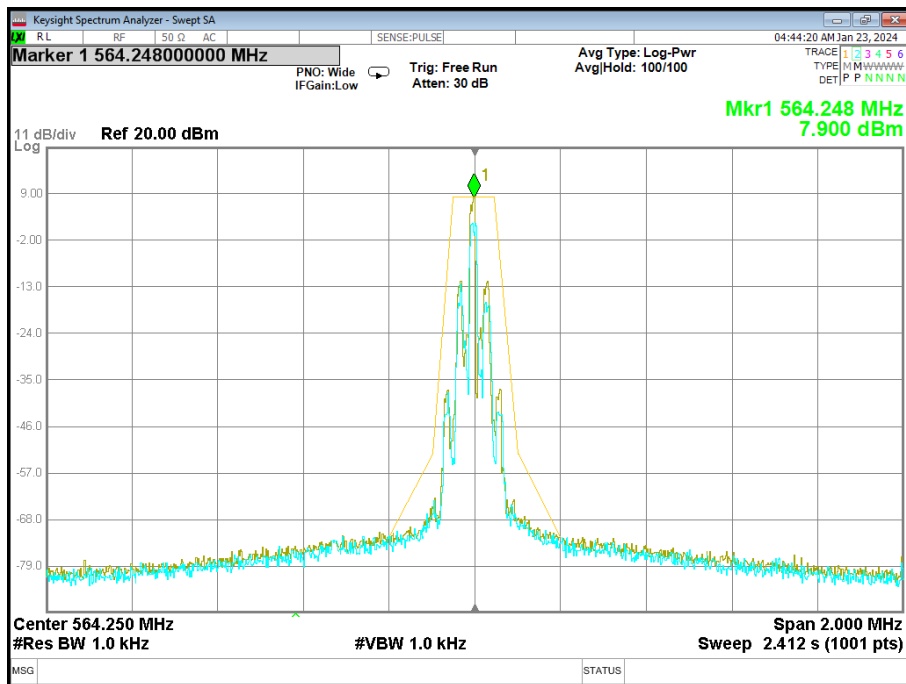

High CH

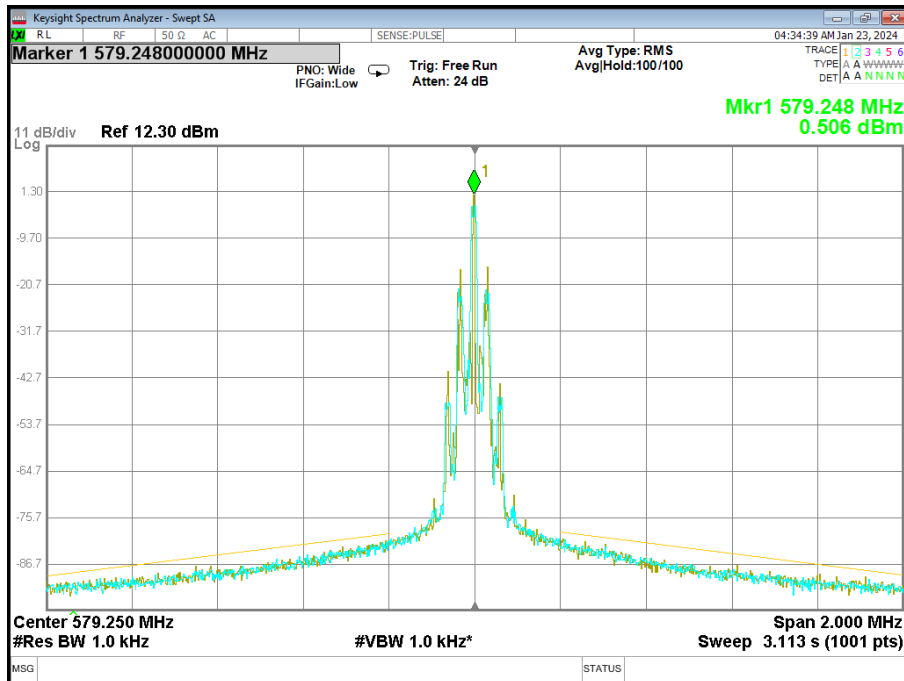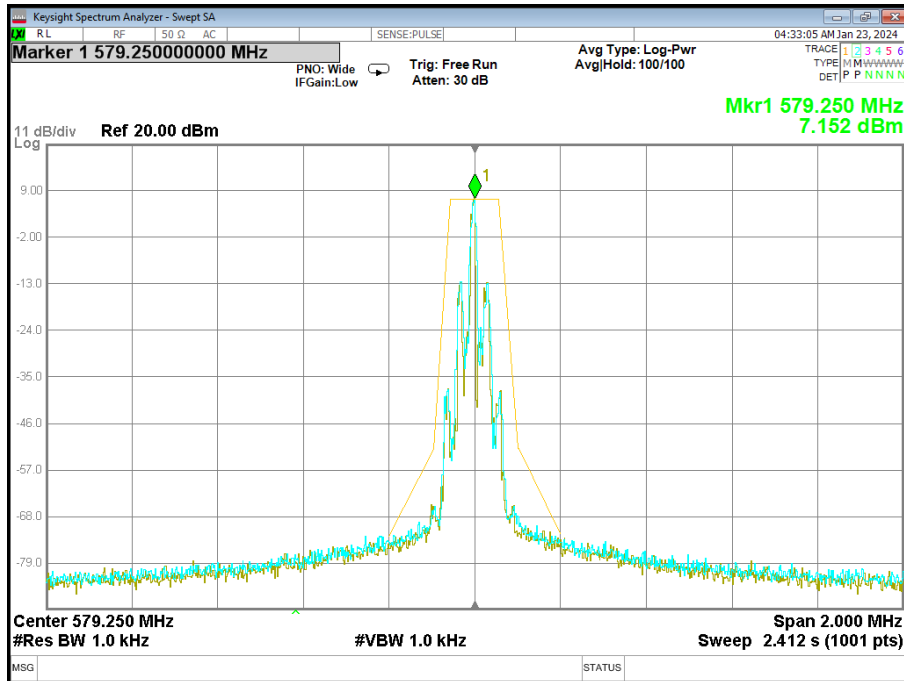


4. Part 15.236 REQUIREMENTS

4.1 FREQUENCY STABILITY VS. TEMPERATURE & VOLTAGE

TEST LIMIT

According to Part 15.236 (f)(3), the frequency tolerance of the carrier signal shall be maintained within $\pm 0.005\%$ of the operating frequency over a temperature variation of -20 degrees to $+50$ degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. Battery operated equipment shall be tested using a new battery.

TEST CONFIGURATION

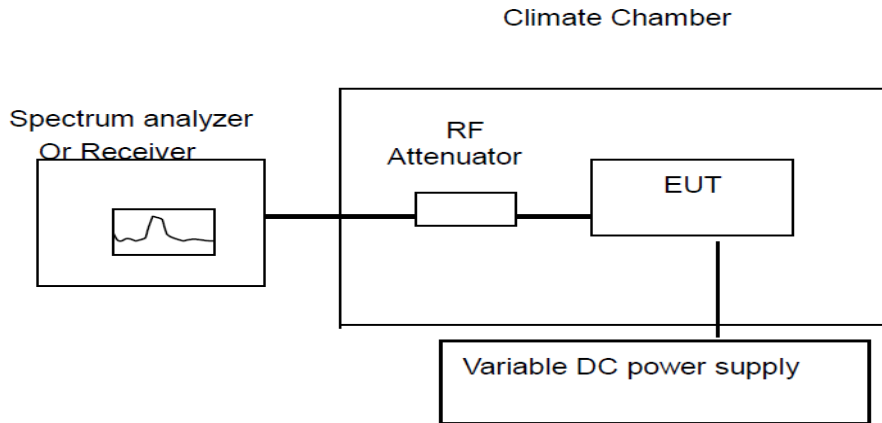

TEST PROCEDURE

The EUT was connected to an external DC power supply and the RF output was connected to a frequency counter via feed through attenuators. The EUT was placed inside the temperature chamber. The DC leads and the RF output cable, exited the chamber through an opening made for that purpose.

After the temperature stabilized the frequency output was recorded from the counter.

An external variable DC power supply was connected to the battery terminals of the equipment under test.

- b. For hand carried, battery powered equipment primary supply voltage was reduced to the battery operating end point as specified by the manufacturer. The output frequency was recorded for each battery voltage.

TEST RESULTS

(1) Frequency stability versus input voltage (Supply Nominal voltage is AC 120V 50HZ)

ANT A

Reference Frequency: 550MHz					
Power Supply (V)	Environment Temperature (°C)	Frequency Error (Hz)	Frequency Error (%)	Limit (%)	Results
102	20	4972	0.00090	±0.005	PASS
120	20	5075	0.00092		
138	20	5019	0.00091		

Reference Frequency: 550MHz				
Environment Temperature(°C)	Frequency Deviation measured with time Elapse(30 minutes)			
	Frequency Error (Hz)	Frequency Error (%)	Limit (%)	Results
50	5006	0.00091	±0.005	PASS
40	4988	0.00091		
30	4985	0.00091		
20	5009	0.00091		
10	4978	0.00091		
0	5069	0.00092		
-10	4973	0.00090		
-20	5044	0.00092		

Reference Frequency: 564.25MHz					
Power Supply (V)	Environment Temperature (°C)	Frequency Error (Hz)	Frequency Error (%)	Limit (%)	Results
102	20	4953	0.00088	±0.005	PASS
120	20	4990	0.00088		
138	20	5054	0.00090		

Reference Frequency: 564.25MHz				
Environment Temperature(°C)	Frequency Deviation measured with time Elapse(30 minutes)			
	Frequency Error (Hz)	Frequency Error (%)	Limit (%)	Results
50	4996	0.00089	±0.005	PASS
40	5003	0.00089		
30	5040	0.00089		
20	5005	0.00089		
10	5015	0.00089		
0	4975	0.00088		
-10	4949	0.00088		
-20	4958	0.00088		

Reference Frequency: 579.25MHz					
Power Supply (V)	Environment Temperature (°C)	Frequency Error (Hz)	Frequency Error (%)	Limit (%)	Results
102	20	5061	0.00087	±0.005	PASS
120	20	4948	0.00085		
138	20	4947	0.00085		

Reference Frequency: 579.25MHz				
Environment Temperature(°C)	Frequency Deviation measured with time Elapse(30 minutes)			
	Frequency Error (Hz)	Frequency Error (%)	Limit (%)	Results
50	4992	0.00086	±0.005	PASS
40	5008	0.00086		
30	4934	0.00085		
20	4951	0.00085		
10	4959	0.00086		
0	4952	0.00085		
-10	4976	0.00086		
-20	4989	0.00086		

ANT B

Reference Frequency: 550MHz					
Power Supply (V)	Environment Temperature (°C)	Frequency Error (Hz)	Frequency Error (%)	Limit (%)	Results
102	20	5045	0.00092	±0.005	PASS
120	20	5000	0.00091		
138	20	4999	0.00091		

Reference Frequency: 550MHz				
Environment Temperature(°C)	Frequency Deviation measured with time Elapse(30 minutes)			
	Frequency Error (Hz)	Frequency Error (%)	Limit (%)	Results
50	4956	0.00090	±0.005	PASS
40	4982	0.00091		
30	5005	0.00091		
20	4972	0.00090		
10	5052	0.00092		
0	4995	0.00091		
-10	4944	0.00090		
-20	4968	0.00090		

Reference Frequency: 564.25MHz					
Power Supply (V)	Environment Temperature (°C)	Frequency Error (Hz)	Frequency Error (%)	Limit (%)	Results
102	20	4981	0.00088	±0.005	PASS
120	20	4983	0.00088		
138	20	4997	0.00089		

Reference Frequency: 564.25MHz				
Environment Temperature(°C)	Frequency Deviation measured with time Elapse(30 minutes)			
	Frequency Error (Hz)	Frequency Error (%)	Limit (%)	Results
50	5048	0.00089	±0.005	PASS
40	4949	0.00088		
30	5052	0.00090		
20	4942	0.00088		
10	4955	0.00088		
0	4958	0.00088		
-10	5080	0.00090		
-20	4918	0.00087		

Reference Frequency: 579.25MHz					
Power Supply (V)	Environment Temperature (°C)	Frequency Error (Hz)	Frequency Error (%)	Limit (%)	Results
102	20	4989	0.00086	±0.005	PASS
120	20	5039	0.00087		
138	20	5049	0.00087		

Reference Frequency: 579.25MHz				
Environment Temperature(°C)	Frequency Deviation measured with time Elapse(30 minutes)			
	Frequency Error (Hz)	Frequency Error (%)	Limit (%)	Results
50	4931	0.00085	±0.005	PASS
40	5042	0.00087		
30	4976	0.00086		
20	4949	0.00085		
10	5056	0.00087		
0	5039	0.00087		
-10	4988	0.00086		
-20	5023	0.00087		

4.2 OCCUPIED BANDWIDTH LIMIT

The operating bandwidth shall not exceed 200 kHz.

TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting : RBW= 3KHz, VBW $\geq$ RBW, Sweep time = Auto.

TEST CONFIGURATION



EUT OPERATION CONDITIONS


TX mode.

TEST RESULT


ANT A

Frequency(MHz)	Occupied Bandwidth(KHz)	Result
550	62.659	Pass
564.25	66.090	Pass
579.25	63.936	Pass


FM (Analog) Occupied bandwidth of Low Channel (Maximum)

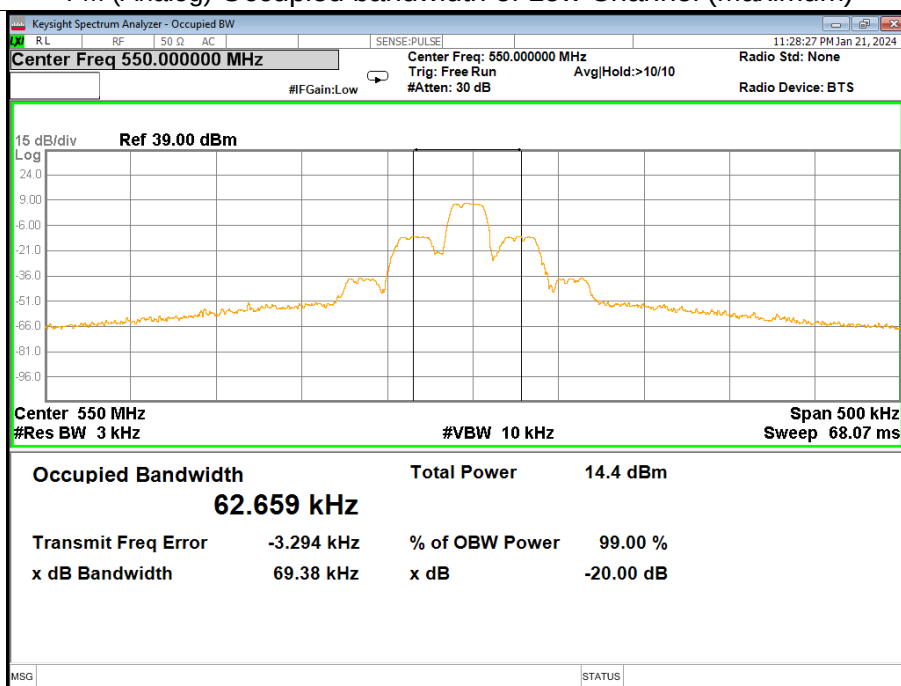

FM (Analog) Occupied bandwidth of Mid Channel (Maximum)

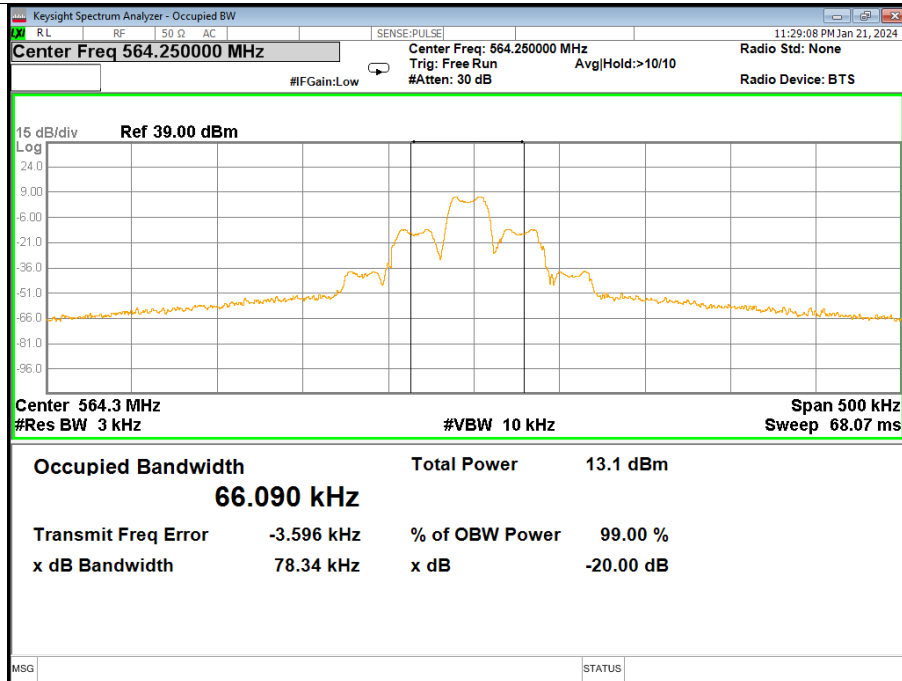


FM (Analog) Occupied bandwidth of High Channel (Maximum)

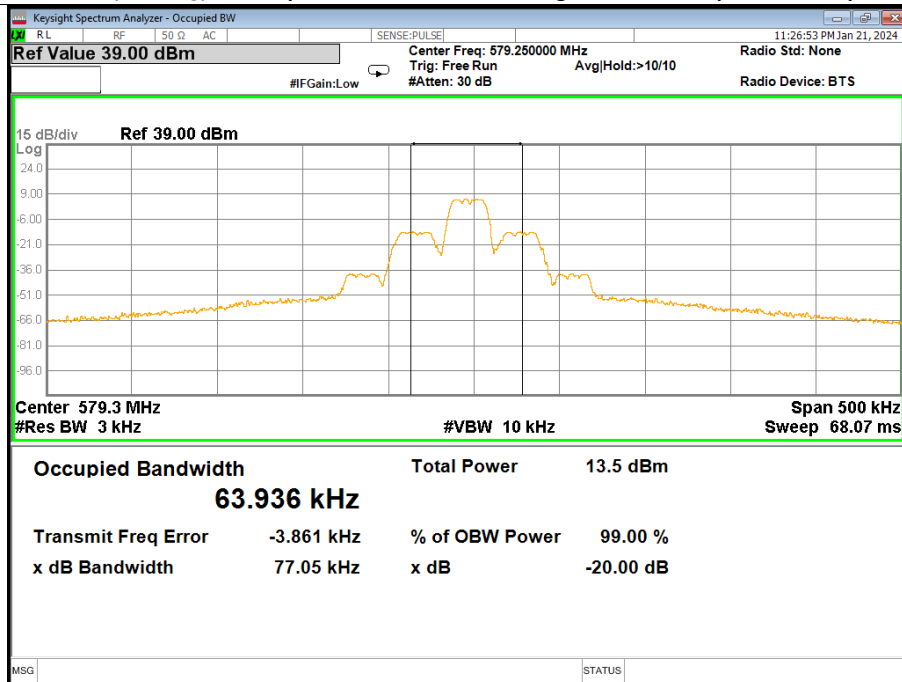


ANT B

Frequency(MHz)	Occupied Bandwidth(KHz)	Result
550	63.040	Pass
564.25	63.425	Pass
579.25	62.655	Pass


FM (Analog) Occupied bandwidth of Low Channel (Maximum)

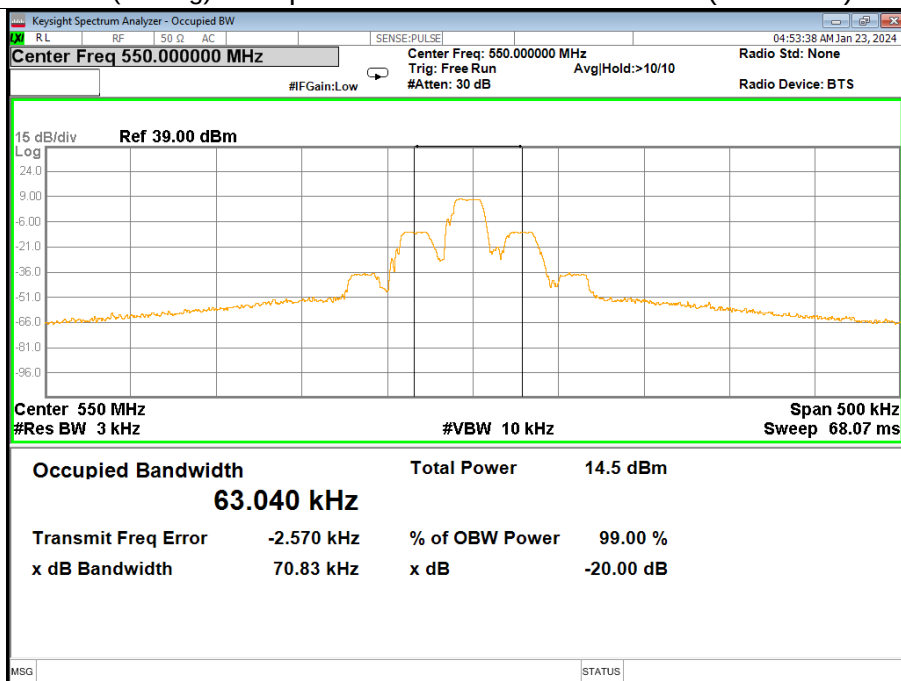

FM (Analog) Occupied bandwidth of Mid Channel (Maximum)

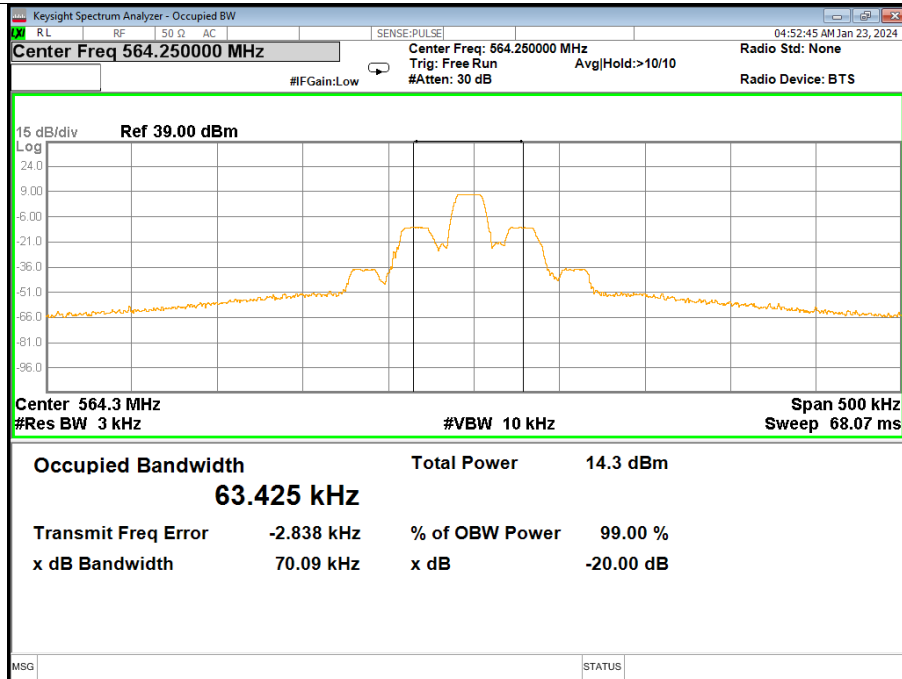

FM (Analog) Occupied bandwidth of High Channel (Maximum)

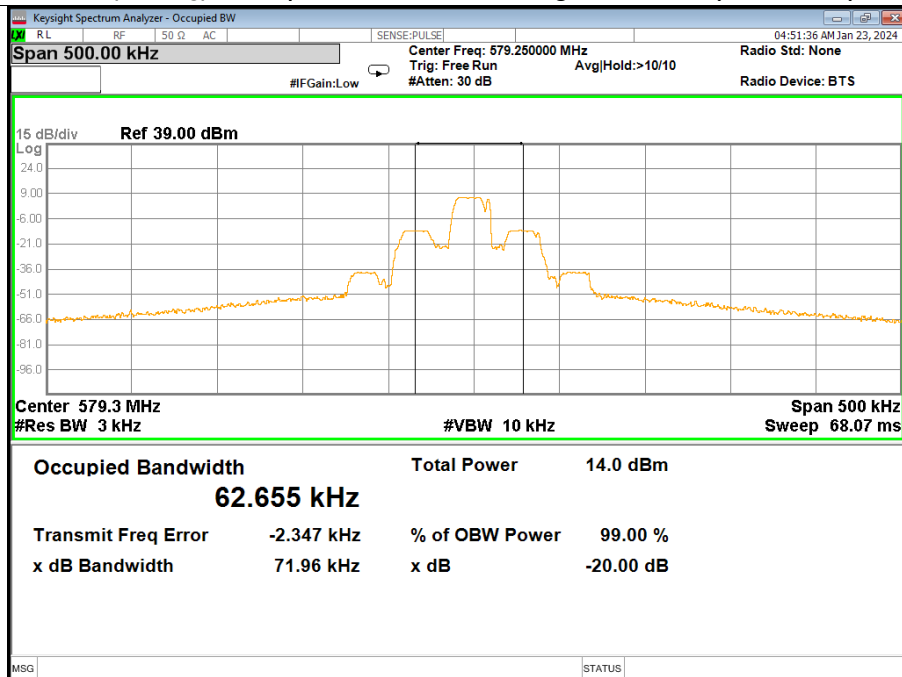


4.3 RADIATED POWER

TEST LIMIT


According to Part 15.236(d), the maximum radiated power shall not exceed the following:

- (1) In the bands allocated and assigned for broadcast television and in the 600 MHz service band: 50 mW EIRP
- (2) In the 600 MHz guard band and the 600 MHz duplex gap: 20 mW EIRP.

TEST CONFIGURATION

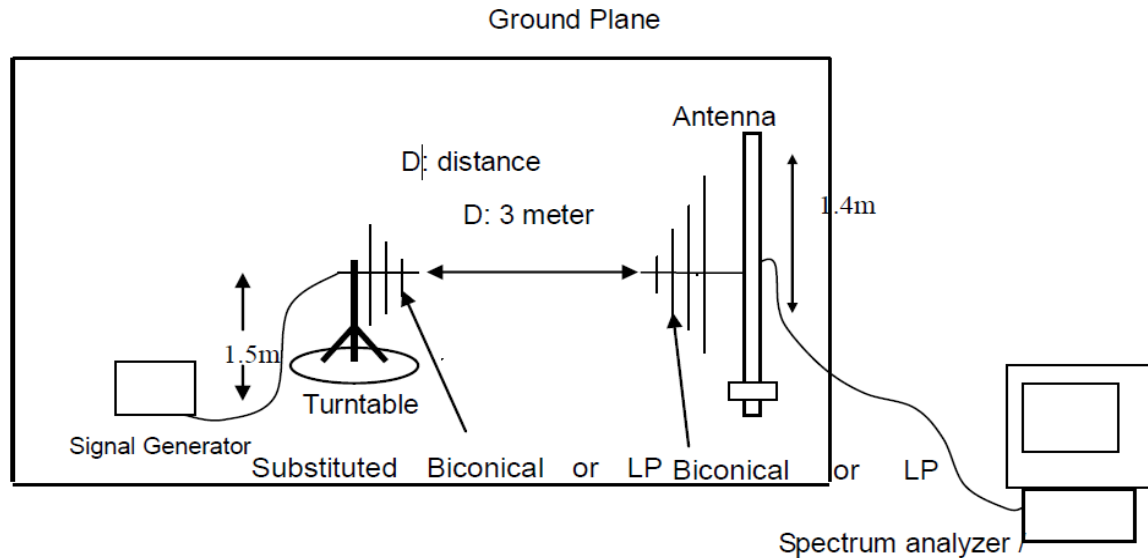

Conduction

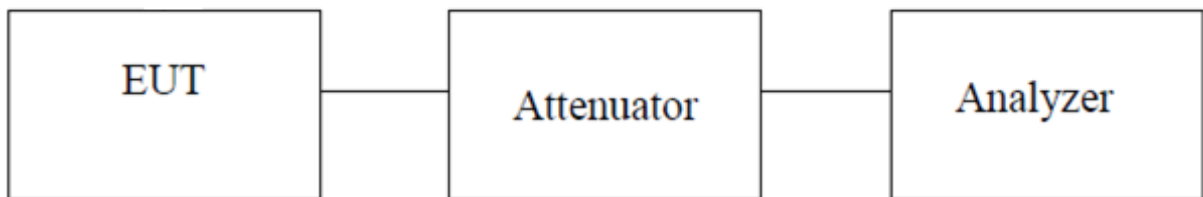

TEST PROCEDURE

- a. On a test site, the EUT shall be placed on a turntable and in the position closest to the normal use as declared by the user.
- b. The test antenna shall be oriented initially for vertical polarization located 3m from the EUT to correspond to the transmitter.
- c. The output of the antenna shall be connected to the measuring receiver and either a peak or quasi-peak detector was used for the measurement as indicated on the report. The detector selection is based on how close the emission level was approaching the limit.
- d. The transmitter shall be switched on; if possible, without the modulation and the measurement receiver shall be tuned to the frequency of the transmitter under test.
- e. The test antenna shall be raised and lowered through the specified range of height until the measuring receiver detects a maximum signal level.
- f. The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- g. The test antenna shall be raised and lowered again through the specified range of height until the measuring receiver detects a maximum signal level.
- h. The maximum signal level detected by the measuring receiver shall be noted.
- i. The measurement shall be repeated with the test antenna set to horizontal polarization.

- j Replace the antenna with a proper Antenna (substitution antenna).
- k The substitution antenna shall be oriented for vertical polarization and, if necessary, the length of the substitution antenna shall be adjusted to correspond to the frequency of transmitting.
- l The substitution antenna shall be connected to a calibrated signal generator.
- m If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- n The test antenna shall be raised and lowered through the specified range of the height to ensure that the maximum signal is received.
- o The input signal to substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuation setting of the measuring receiver.
- p The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
- q The measurement shall be repeated with the test antenna and the substitution antenna oriented for horizontal polarization.

TEST PROCEDURE (Conduction)

- a. The RF output of the transceiver was connected to the input of the spectrum analyzer through sufficient attenuation.
- b. Set the RBW >20BW,VBW>3xRBW.
- c. Detector = peak.
- d. Sweep time = auto couple.
- e. Trace mode = max hold.
- f. Allow trace to fully stabilize.
- g. Use the peak marker function to determine the maximum amplitude level.

TEST RESULT

ANT A

Maximum Equivalent Isotropically Radiated Power								
Ambient temperature: 22 °C			Relative humidity: 55%					
Frequency	S.G.Lev	Ant	Loss	EIRP	EIRP	Limit	Polarity	Result
(MHz)	(dBm)	(dBi)	(dB)	(dBm)	(mW)	(mW)		
550	0.22	4.8	1.6	3.42	2.20	50.00	H	Pass
550	4.15	4.8	1.6	7.35	5.43	50.00	V	Pass
564.25	0.40	6	1.9	4.50	2.82	50.00	H	Pass
564.25	3.03	6	1.9	7.13	5.16	50.00	V	Pass
579.25	-0.78	6.1	2	3.32	2.15	50.00	H	Pass
579.25	2.41	6.1	2	6.51	4.48	50.00	V	Pass

ANT B

Maximum Equivalent Isotropically Radiated Power								
Ambient temperature: 22 °C			Relative humidity: 55%					
Frequency	S.G.Lev	Ant	Loss	EIRP	EIRP	Limit	Polarity	Result
(MHz)	(dBm)	(dBi)	(dB)	(dBm)	(mW)	(mW)		
550	1.28	4.8	1.6	4.48	2.81	50.00	H	Pass
550	4.49	4.8	1.6	7.69	5.87	50.00	V	Pass
564.25	-0.01	6	1.9	4.09	2.56	50.00	H	Pass
564.25	3.36	6	1.9	7.46	5.57	50.00	V	Pass
579.25	-0.23	6.1	2	3.87	2.44	50.00	H	Pass
579.25	2.73	6.1	2	6.83	4.82	50.00	V	Pass

Note: 1. EIRP (dBm) = S.G.Lev + Ant – Loss

2. mW = $10^{(dBm/10)}$

PHOTOS OF TEST SETUP

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

※※※※※END OF THE REPORT※※※※※