

承 认 书

SPECIFICATION FOR APPROVAL

客 户 名 称: _____

CUSTOMER NAME: SunSun Electronic Technology Inc.

产 品 名 称:

PRODUCT NAME: Wireless fence

客 户 料 号: _____

CUSTOMER P /N: _____

电子料号



P/N:

REV: A


Manufacturer:Shenzhen honest hardware products processing plant

Manufacturer address:100 Tianhe Road, Pinghu Street, Longgang District, Shenzhen


主要技术指标		Main technical specifications	
频率范围 (MHZ)	433-434	Frequency Range (MHZ)	433-434
特性阻抗(Ω)	10	Impedance(Ω)	10
增益(dBi)	1	Gain(dBi)	1
输出电压 驻波比	2	VSWR	2
最大功率	10W	Admitted Power	10W
极化方式	垂直极化	Polarization	Linear,Vertical
方向性	两重性	Radiation	duality
连接方式	SMA	Connector Type	SMA
物理性能		Physical Properties	
天线外套材料	TPEE	Antenna cover	TPEE
工作温度	-20℃~+70℃	Operating Temp	-20℃~+70℃
保存温度	-20℃~+70℃	Storage Temp	-20℃~+70℃

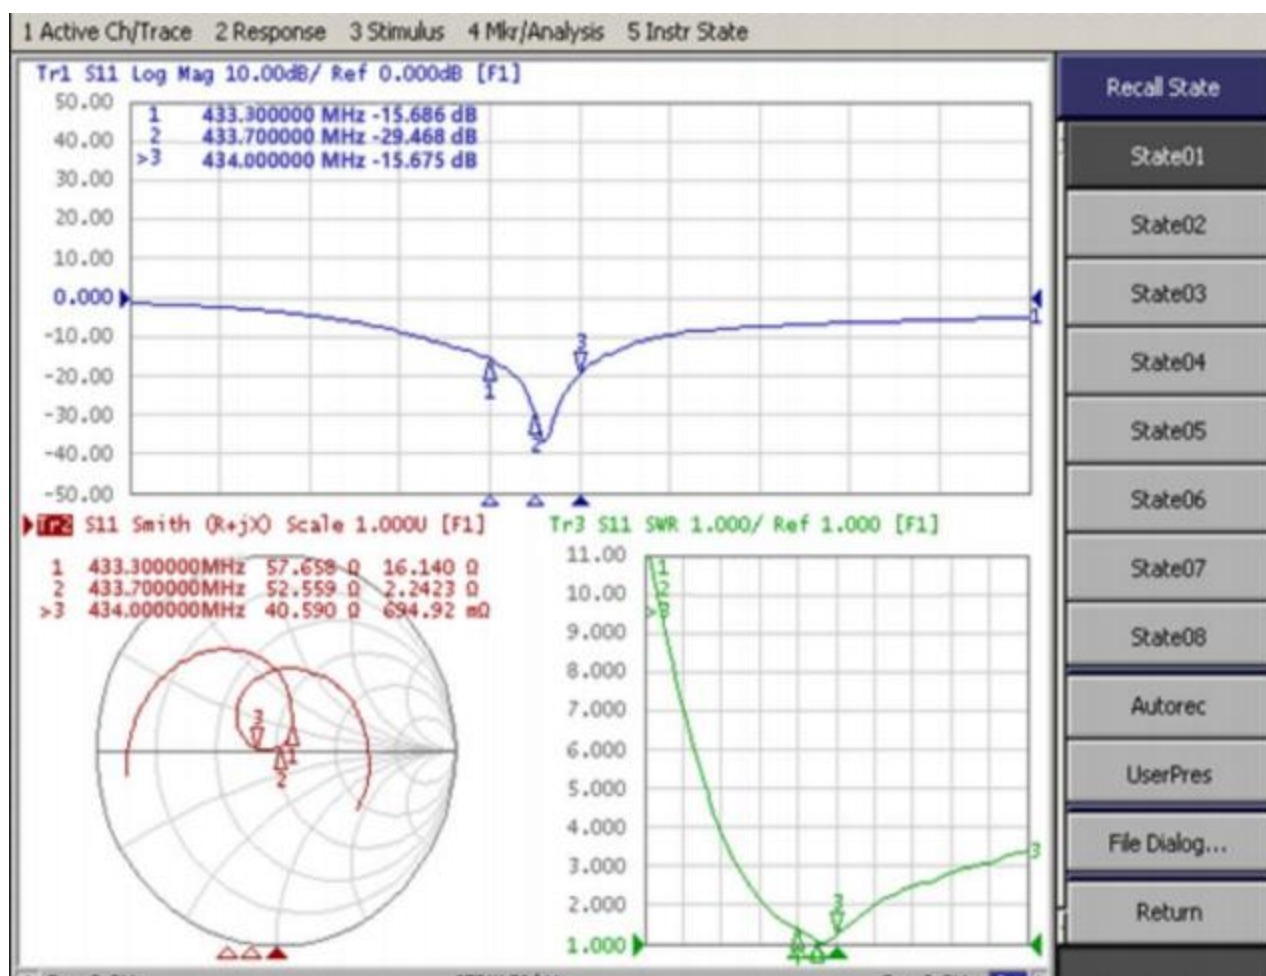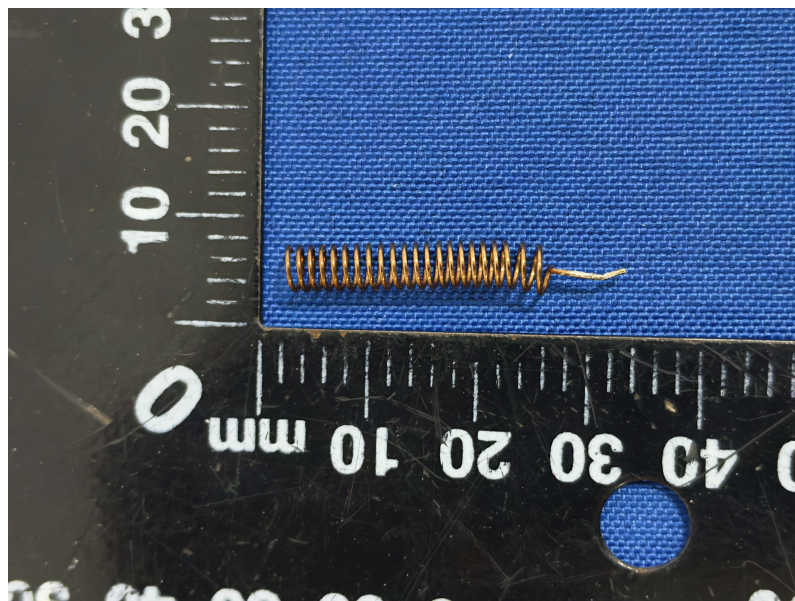


2D、3DRaditation Pattern




433.3mHz




Gain 1dBi




Efficiency: 75.6 1%




433.7mHz




Gain: 0.51dBi




Efficiency: 78.45%



434.0mHz



Gain: 0.47dBi



Efficiency: 79.32%