



Appendix A

RF Test Data for 902.3-914.9 (Conducted Measurement)

Product Name: MClimate Vicki LoRaWAN

Test Model: MC-LW-V02-BI

Environmental Conditions

Temperature:	23.5° C
Relative Humidity:	52.2%
ATM Pressure:	100.0 kPa
Test Engineer:	Paddi Chen
Supervised by:	Nick Peng



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen,
518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



A.1 20dB Emission Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
NVNT	LoRa	902.3	Ant1	0.142	N/A	Pass
NVNT	LoRa	908.5	Ant1	0.142	N/A	Pass
NVNT	LoRa	914.9	Ant1	0.141	N/A	Pass






Test Graphs

-20dB Bandwidth NVNT LoRa 902.3MHz Ant1

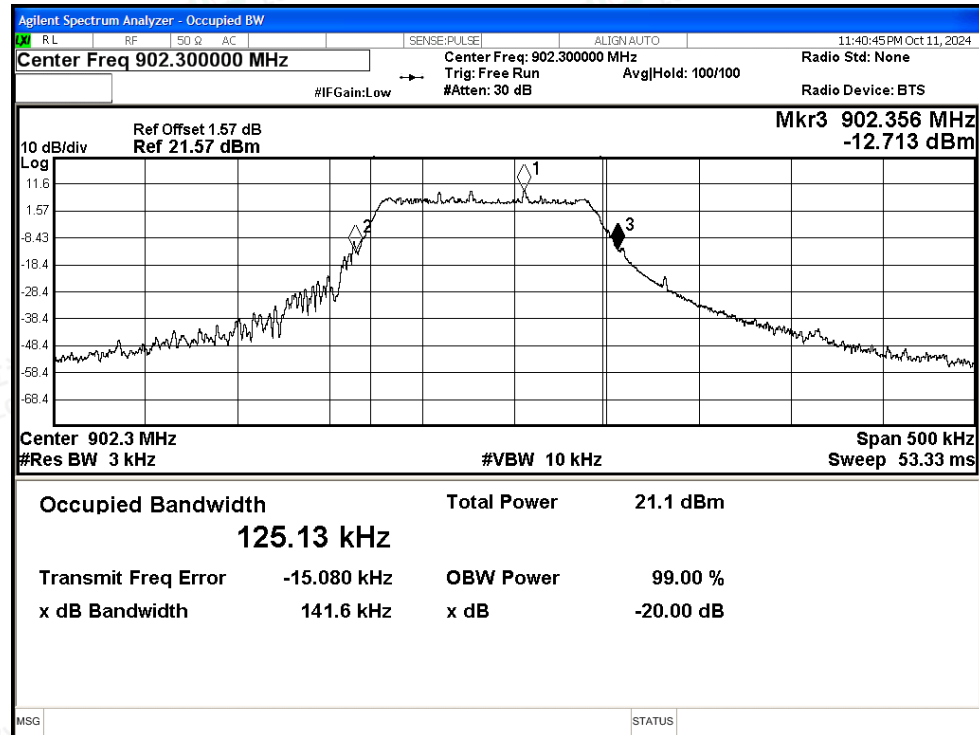

-20dB Bandwidth NVNT LoRa 908.5MHz Ant1



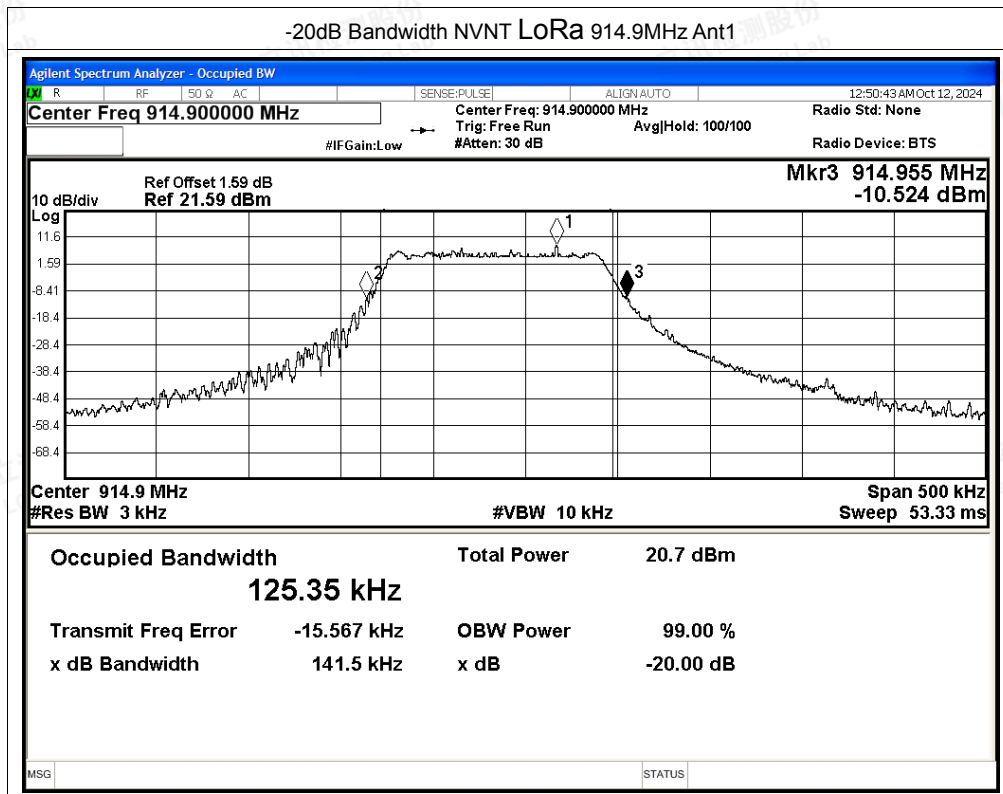



A.2 Maximum Peak Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	LoRa	902.3	Ant1	10.90	30	Pass
NVNT	LoRa	908.5	Ant1	10.91	30	Pass
NVNT	LoRa	914.9	Ant1	10.52	30	Pass





A.3 Carrier frequency separation


Condition	Mode	Antenna	HFS (MHz)	Limit (MHz)	Verdict
NVNT	LoRa	Ant1	0.2204	0.095	Pass
NVNT	LoRa	Ant1	0.1944	0.095	Pass
NVNT	LoRa	Ant1	0.1940	0.094	Pass






Test Graphs

CFS NVNT LoRa 902.3MHz Ant1

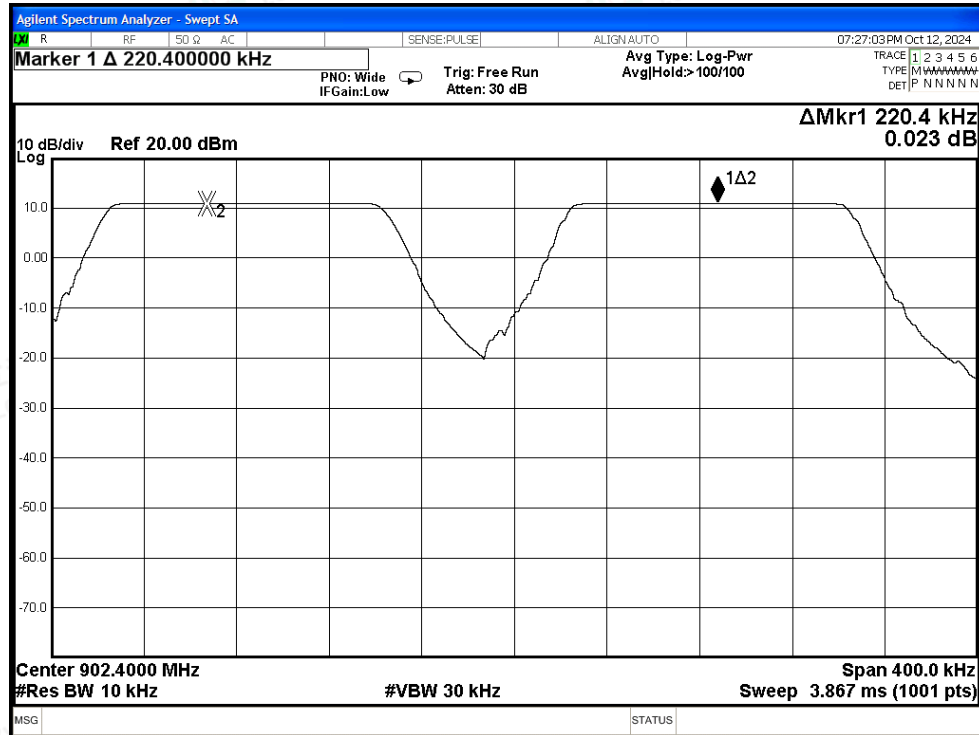

CFS NVNT LoRa 908.5MHz Ant1



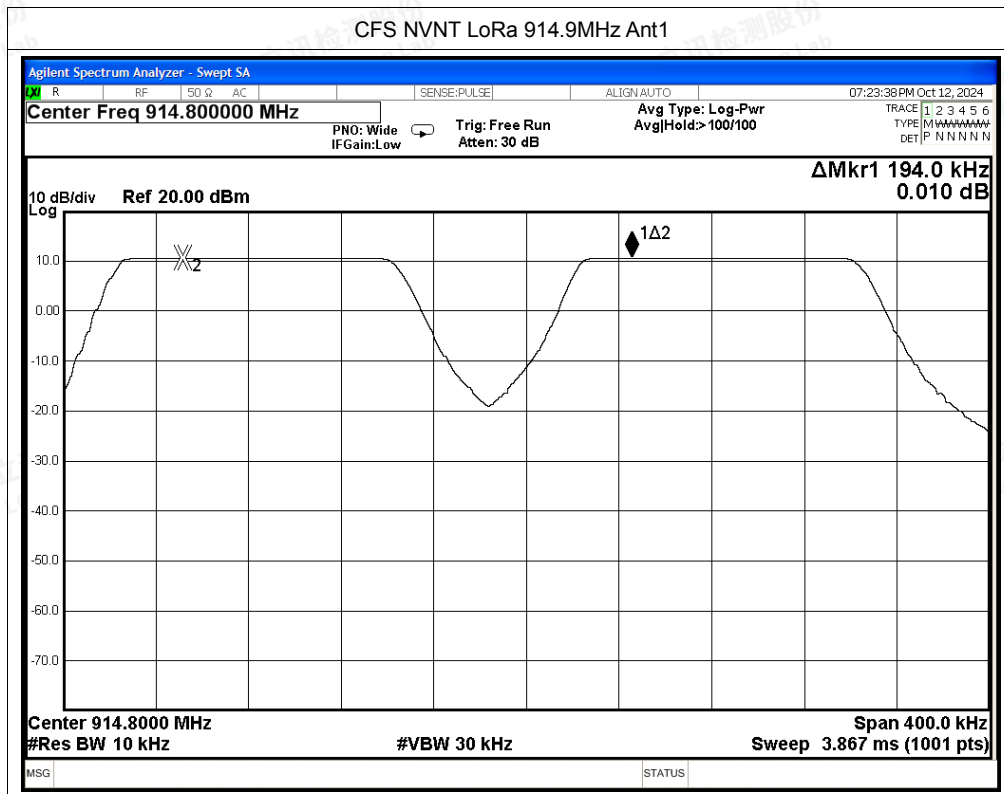



A.4 Time of occupancy

Condition	Mode	Frequency (MHz)	Antenna	Total Dwell Time (ms)	Limit (ms)	Verdict
NVNT	LoRa	902.3	Ant1	109.2	400	PASS
NVNT	LoRa	908.5	Ant1	109.0	400	PASS
NVNT	LoRa	914.9	Ant1	108.8	400	PASS




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity





Test Graphs

Dwell NVNT LoRa 902.3MHz Ant1

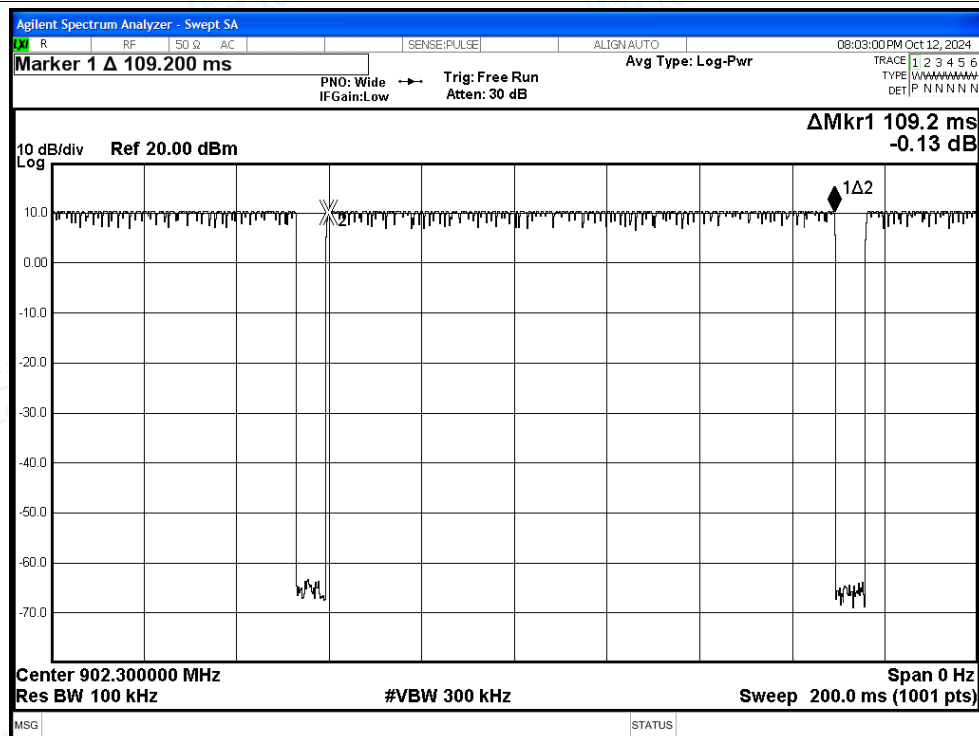

Dwell NVNT LoRa 908.5MHz Ant1

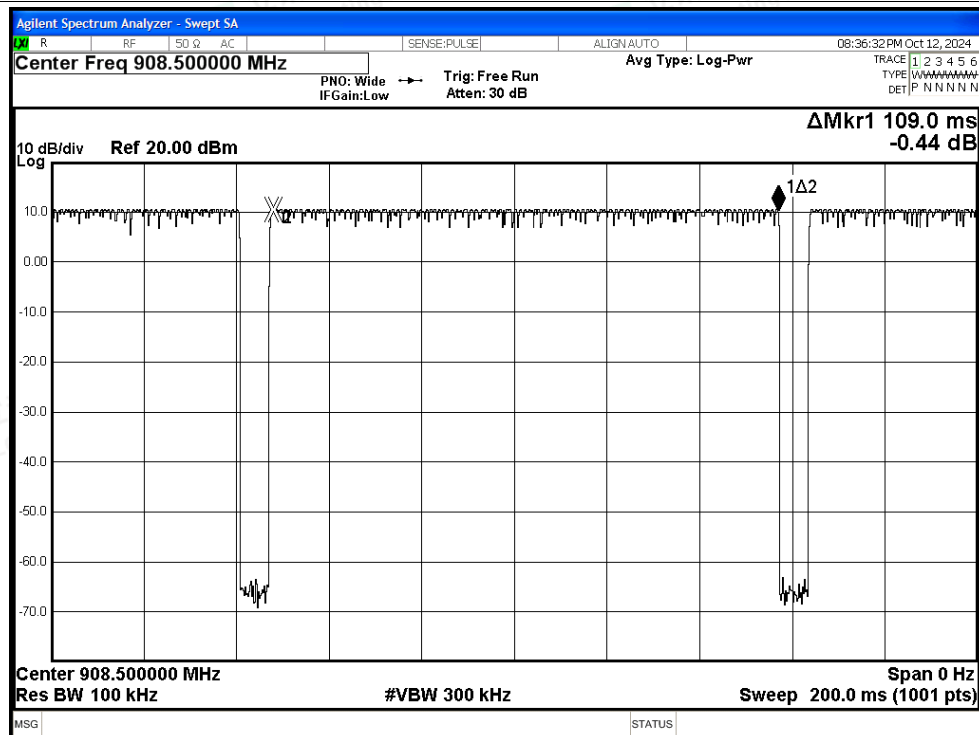


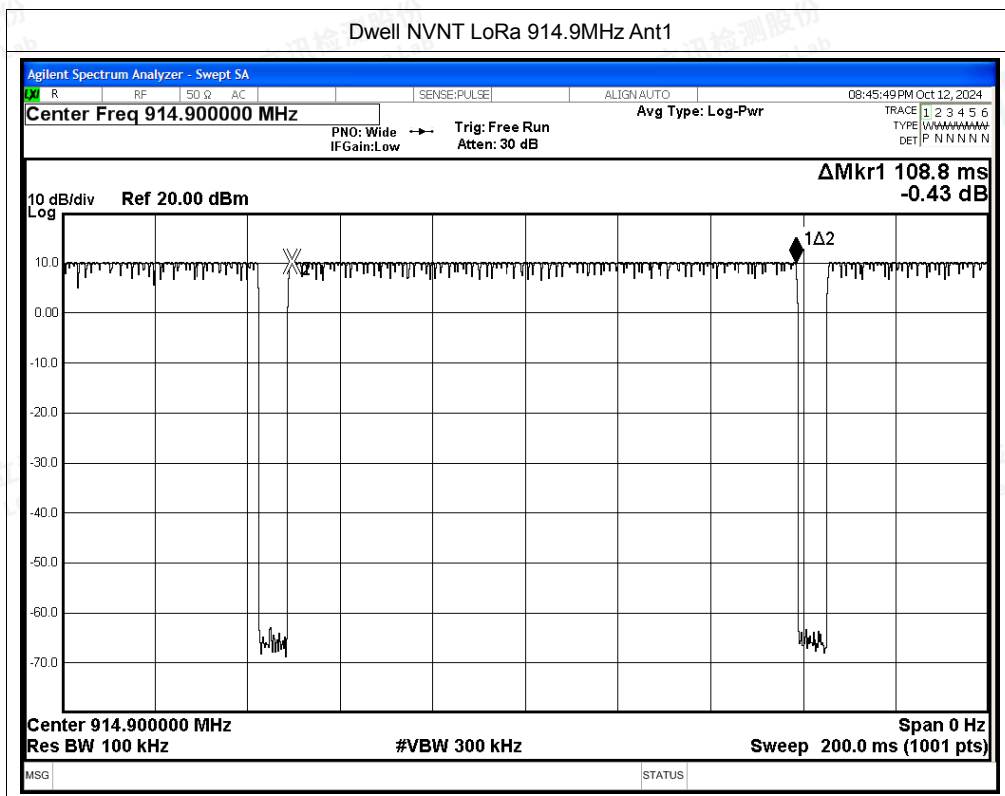



A.5 Number of hopping channels

Condition	Mode	Antenna	Hopping Number	Limit	Verdict
NVNT	LoRa	Ant1	64	50	Pass

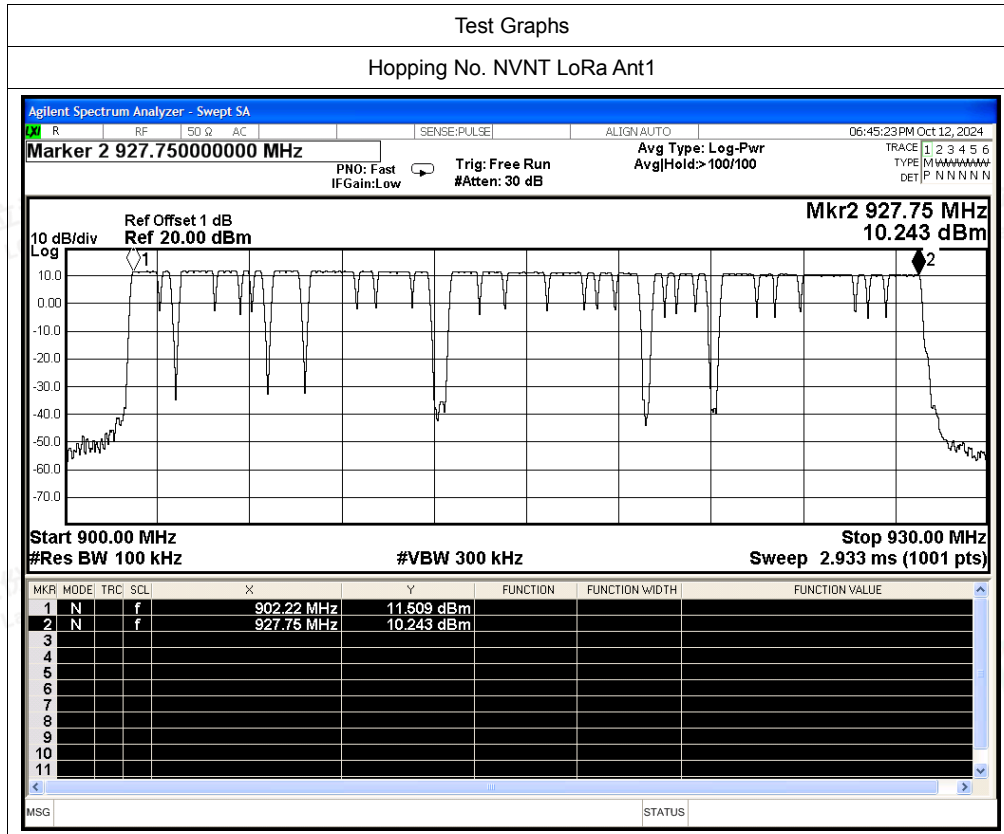



A.6 Band edge measurements

Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	LoRa	902.3	Ant1	No-Hopping	-36.34	-20	PASS
NVNT	LoRa	914.9	Ant1	No-Hopping	-71.57	-20	PASS
NVNT	LoRa	902.3	Ant1	Hopping	-74.02	-20	PASS
NVNT	LoRa	914.9	Ant1	Hopping	-71.57	-20	PASS




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

Band Edge(Hopping) NVNT LoRa 902.3MHz Ant1 No-Hopping

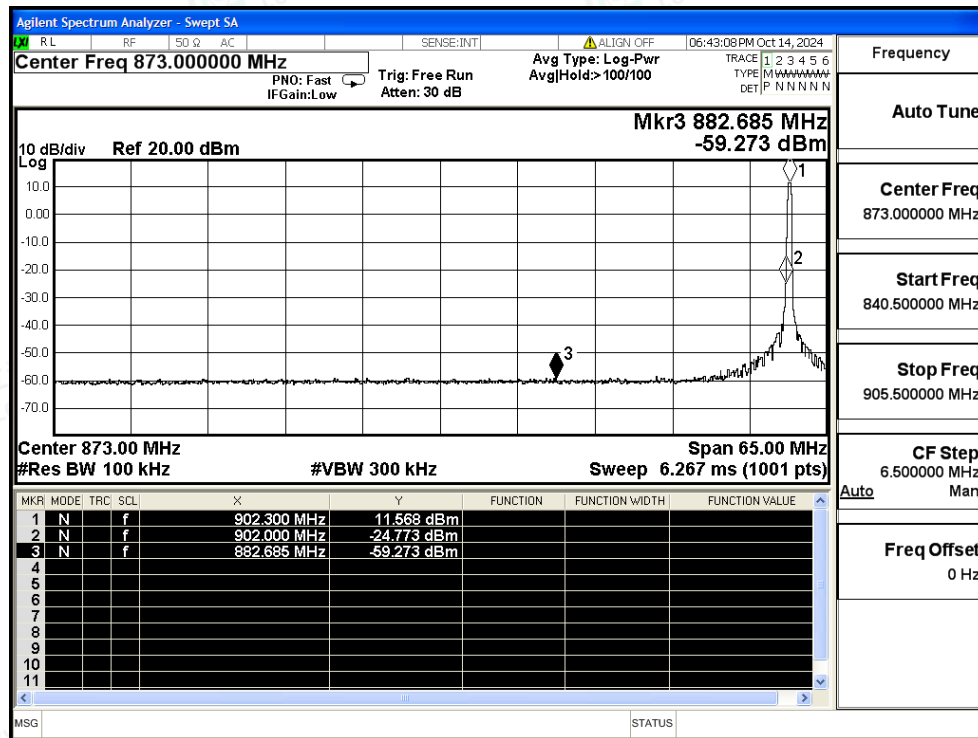

Band Edge(Hopping) NVNT LoRa 914.9MHz Ant1 No-Hopping

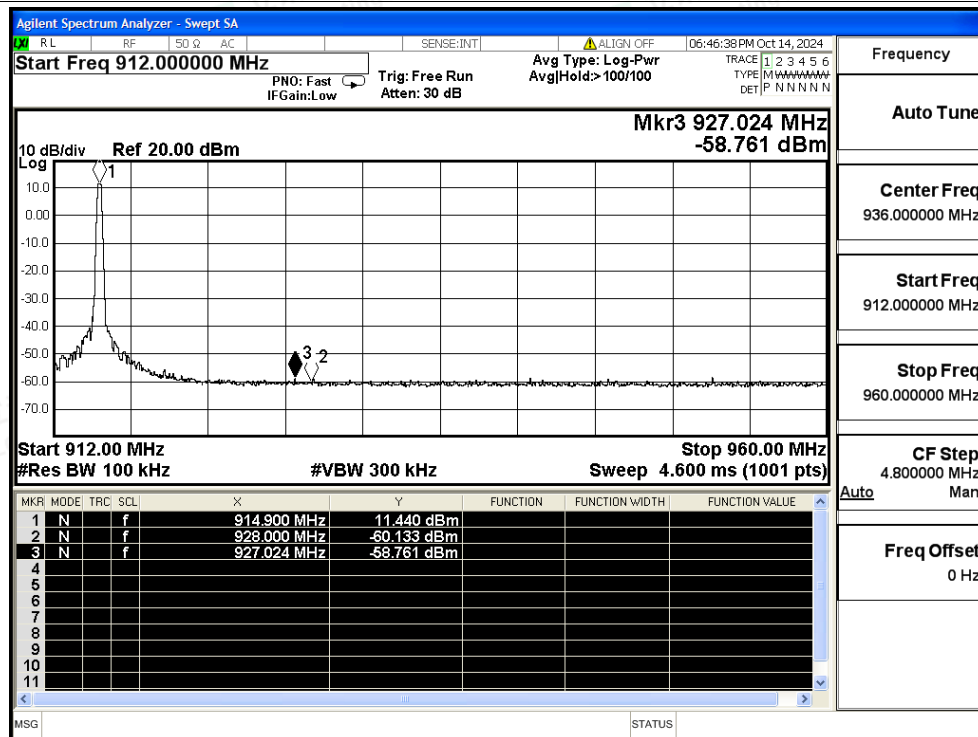

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Band Edge(Hopping) NVNT LoRa 902.3MHz Ant1 Hopping

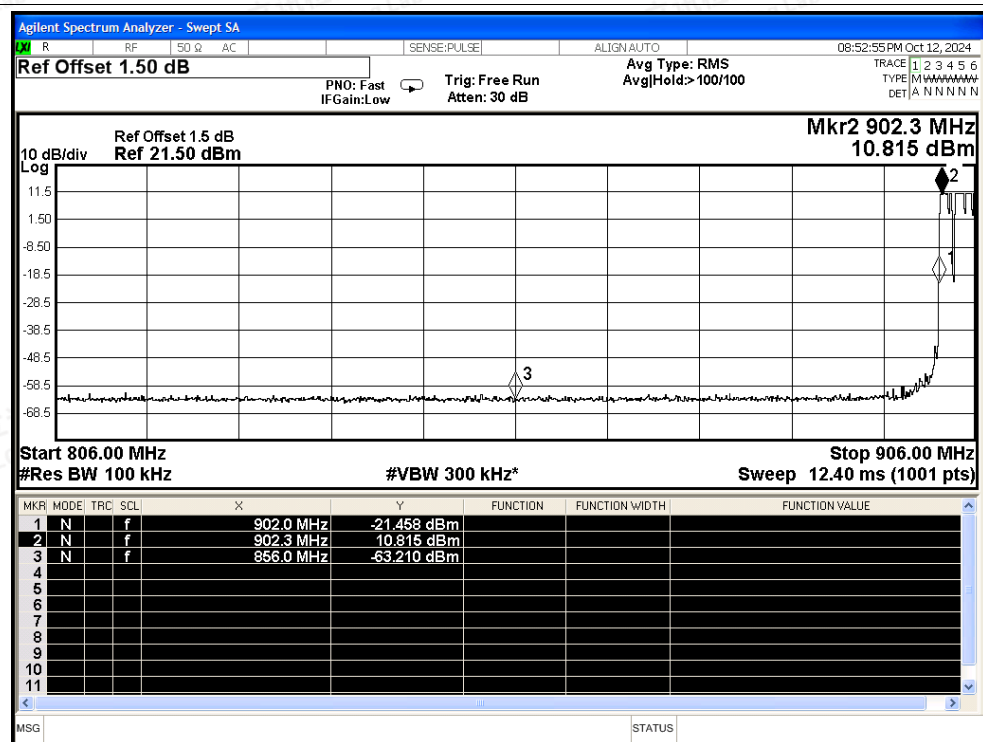

Band Edge(Hopping) NVNT LoRa 914.9MHz Ant1 Hopping

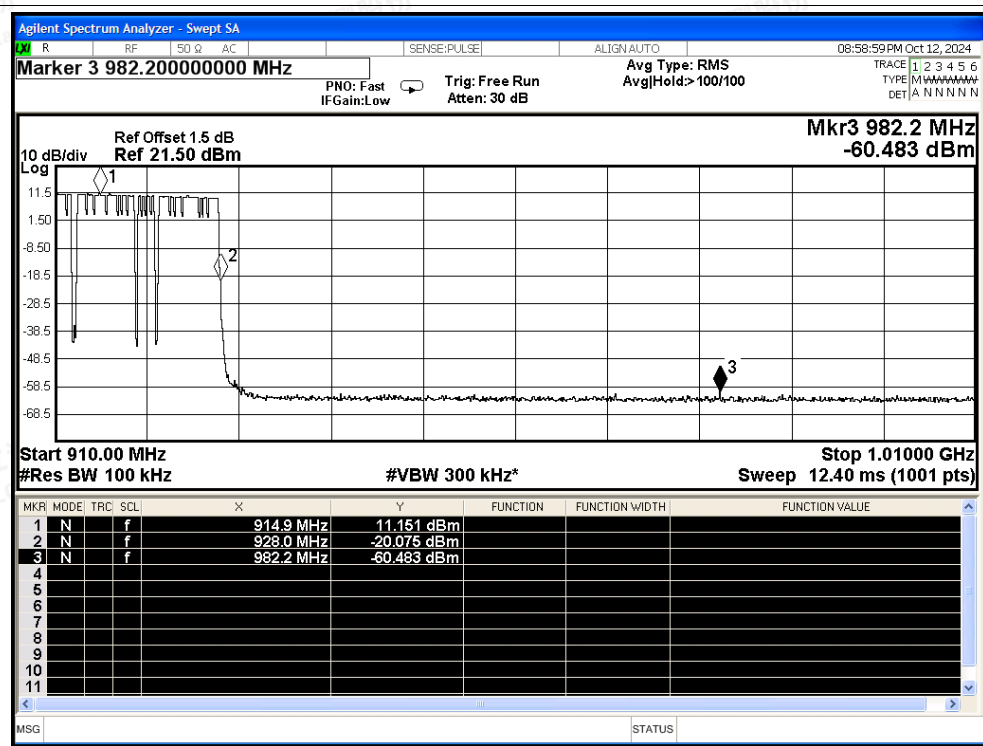



A.7 Conducted Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	LoRa	902.3	Ant1	0.31	-20	PASS
NVNT	LoRa	908.5	Ant1	-0.01	-20	PASS
NVNT	LoRa	914.9	Ant1	0	-20	PASS




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity





Test Graphs

Tx. Spurious NVNT LoRa 902.3MHz Ant1

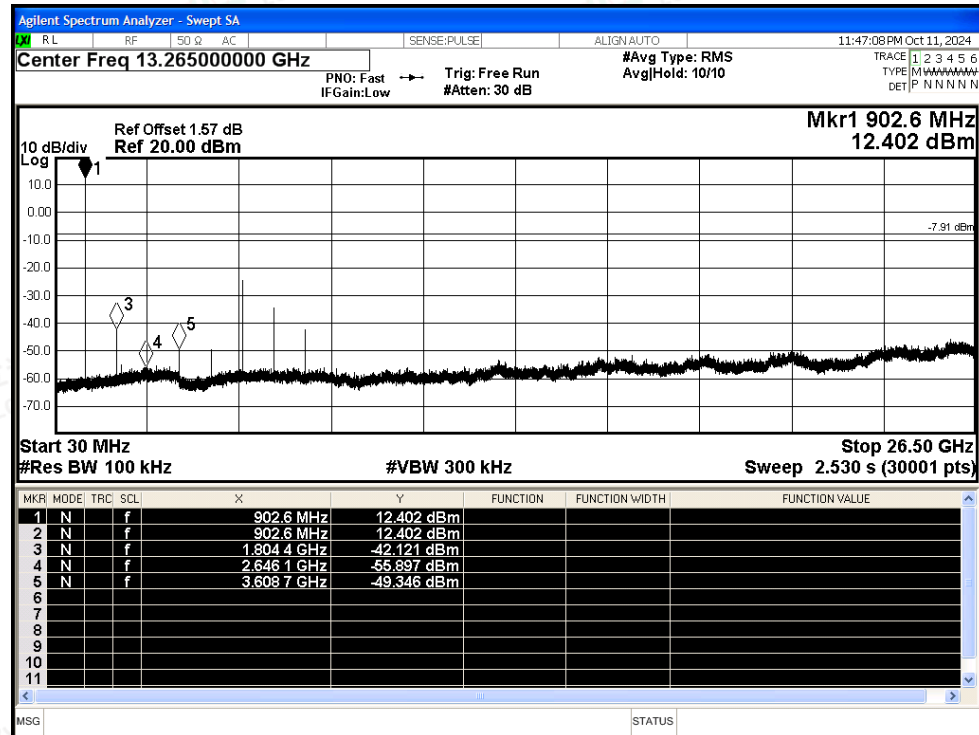

Tx. Spurious NVNT LoRa 908.5MHz Ant1

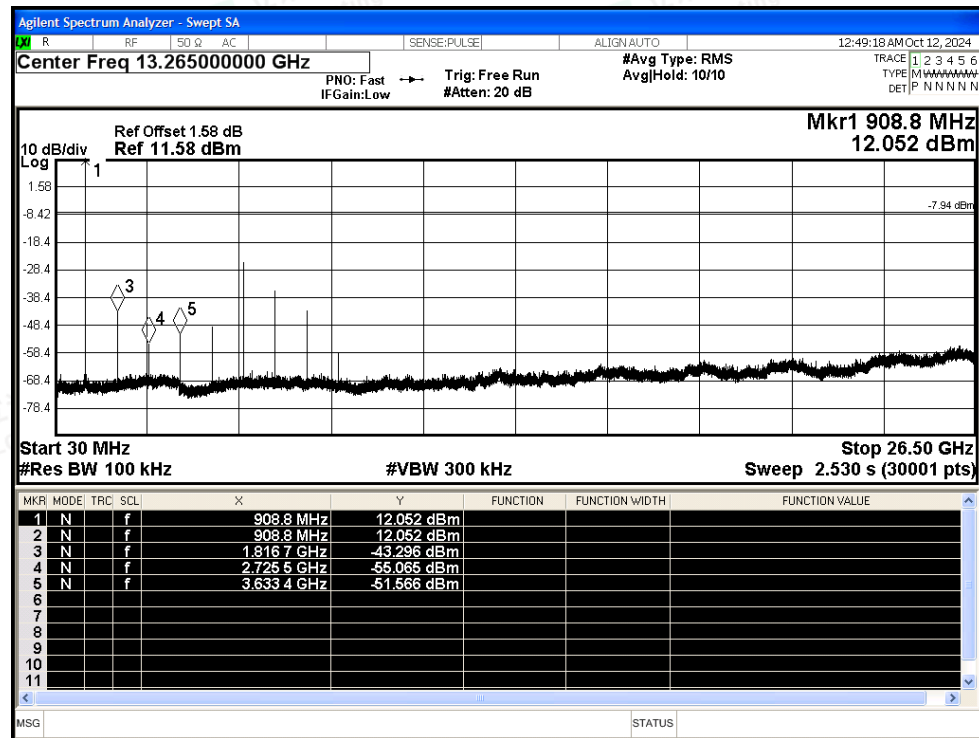

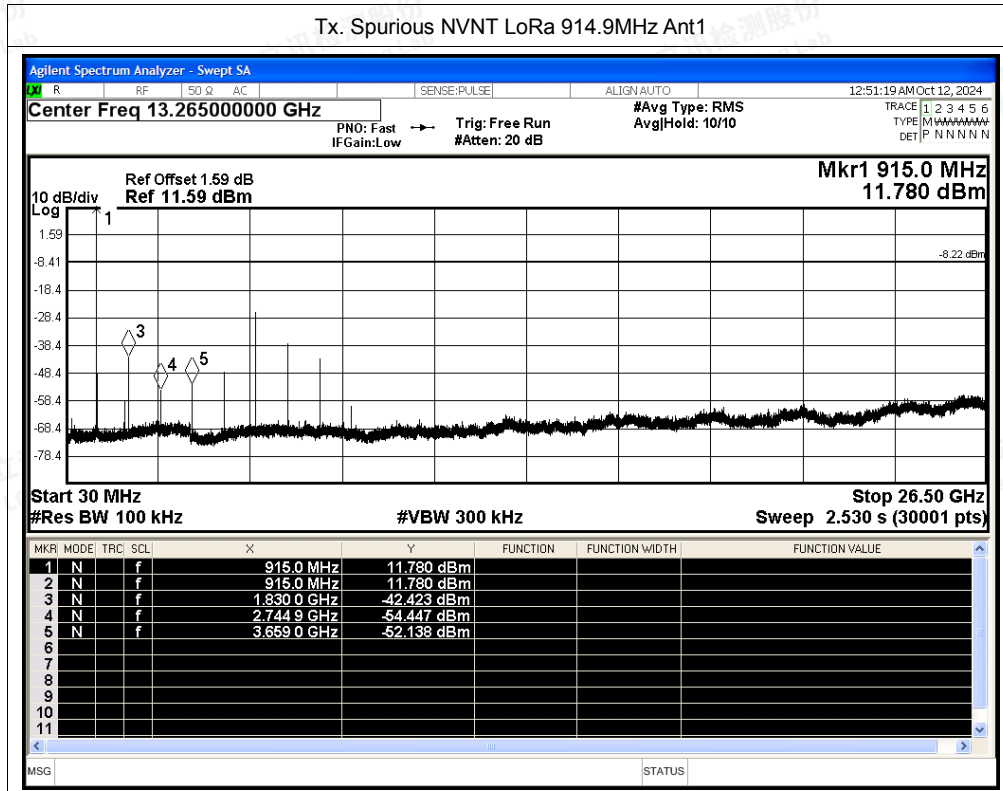



A.8 Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	LoRa	902.3	Ant1	94.04	0.27	0.01
NVNT	LoRa	914.9	Ant1	94.04	0.27	0.01




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

Duty Cycle NVNT LoRa 902.3MHz Ant1

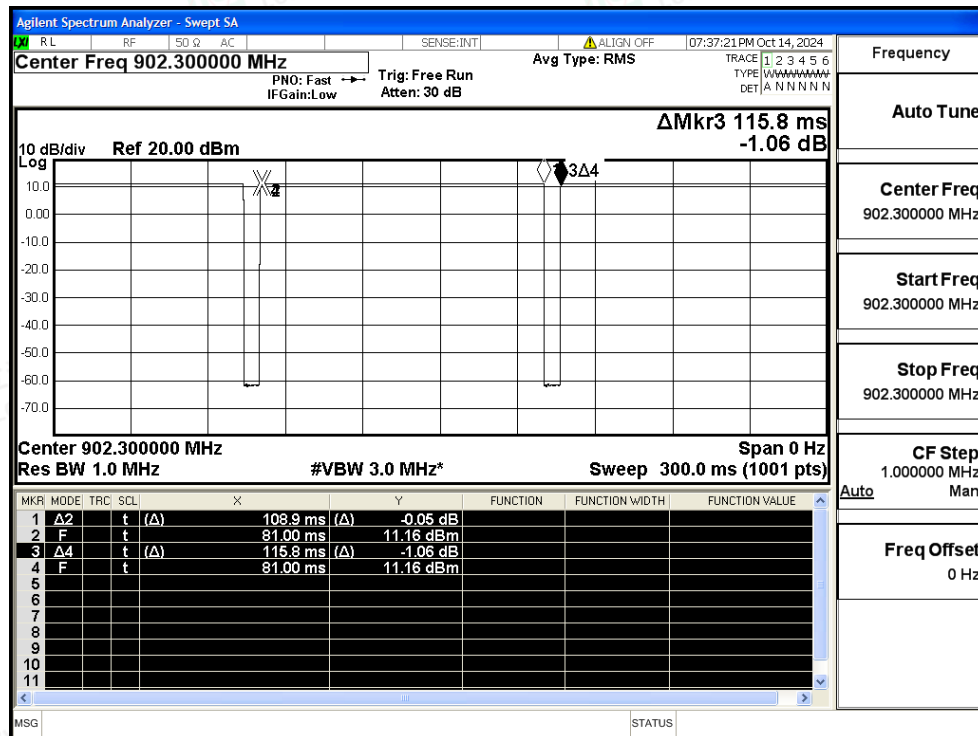

Duty Cycle NVNT LoRa 914.9MHz Ant1

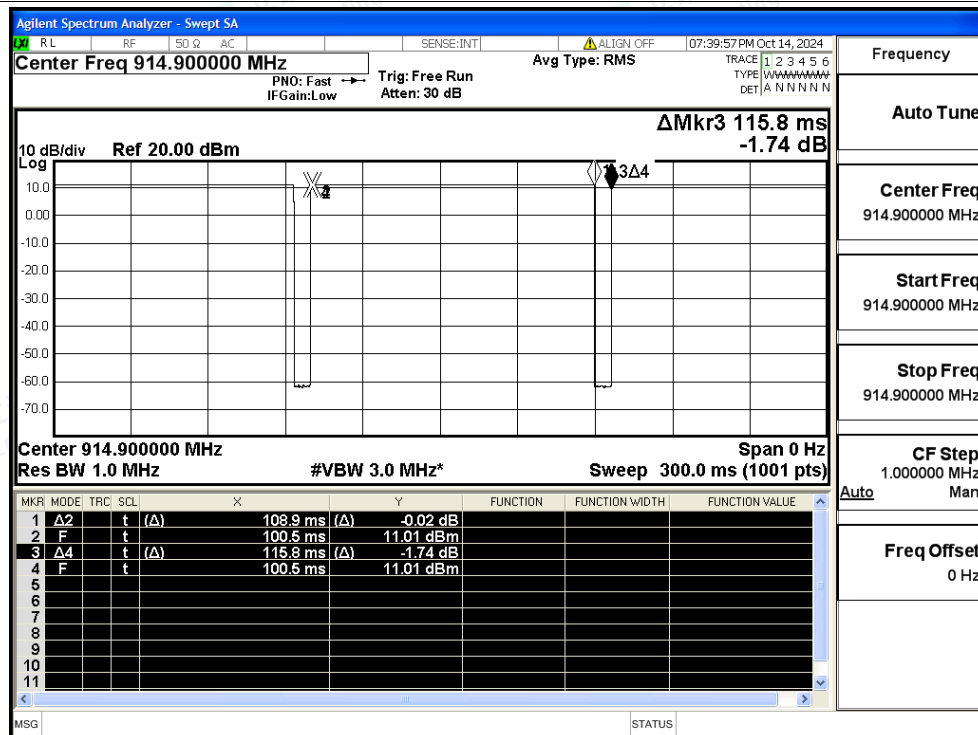



A.9 Restrict Band

Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	LoRa	902.3	Ant1	848	-52.26	2	45.00	Peak	74	Pass
NVNT	LoRa	902.3	Ant1	881.86	-47.33	2	49.93	Peak	74	Pass
NVNT	LoRa	902.3	Ant1	901.5	-32.74	2	64.52	Peak	74	Pass
NVNT	LoRa	914.9	Ant1	927.36	-47.53	2	49.73	Peak	74	Pass
NVNT	LoRa	914.9	Ant1	928.22	-47.26	2	50.00	Peak	74	Pass
NVNT	LoRa	914.9	Ant1	960	-50.33	2	46.93	Peak	74	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



Test Graphs

Restrict Band NVNT LoRa 902.3MHz Ant1

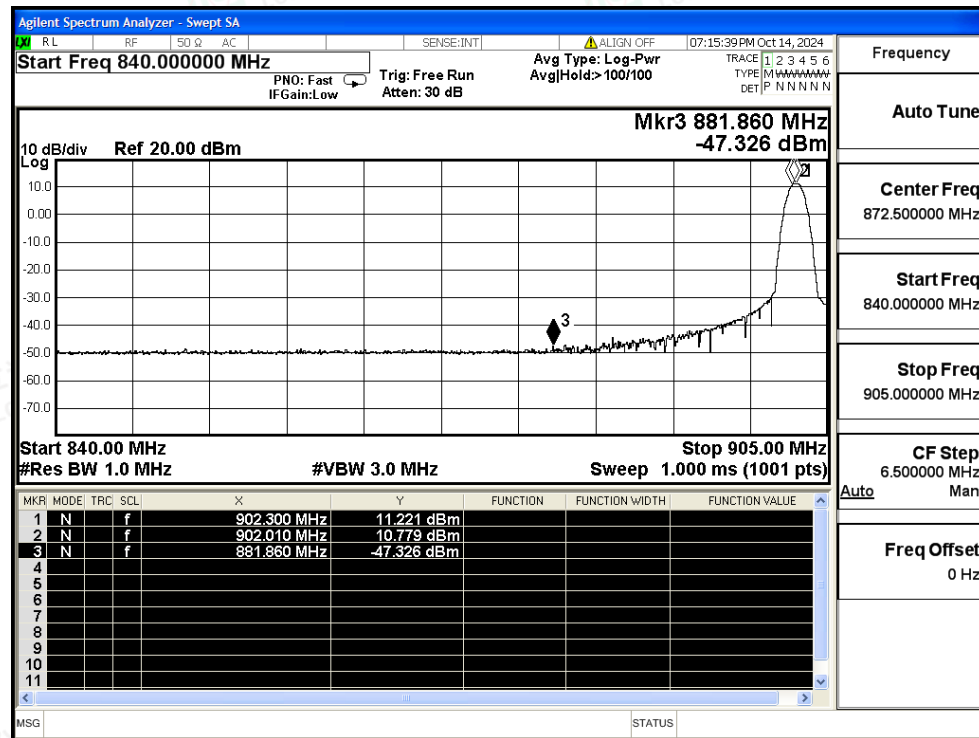

Restrict Band NVNT LoRa 914.9MHz Ant1

