



**中认信通**

CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



# TEST REPORT

**Applicant: Hangzhou Hylin IoT Technology Co.,Ltd.**

Address: No.80 Pingshui West Road, Xihu District Hangzhou China

**FCC ID: 2A4G5-HLM9933**

**Product Name: SX1302 Gateway Module**

**Model Number: HLM9933**

**Standard(s): 47 CFR Part 15, Subpart C(15.247)  
ANSI C63.10-2013  
KDB 558074 D01 15.247 Meas Guidance v05r02**

The above equipment has been tested and found compliant with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

**Report Number: CR22010018-00A**

**Date Of Issue: 2022-06-01**

**Reviewed By: Sun Zhong**

*Sun Zhong*

Title: Manager

**Test Laboratory: China Certification ICT Co., Ltd (Dongguan)**

No. 113, Pingkang Road, Dalang Town, Dongguan,  
Guangdong, China  
Tel: +86-769-82016888

## Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0123.

## Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

## CONTENTS

<b>TEST FACILITY .....</b>	<b>2</b>
<b>DECLARATIONS.....</b>	<b>2</b>
<b>1. GENERAL INFORMATION .....</b>	<b>5</b>
<b>1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....</b>	<b>5</b>
<b>1.2 DESCRIPTION OF TEST CONFIGURATION.....</b>	<b>6</b>
1.2.1 EUT Operation Condition:.....	6
1.2.2 Support Equipment List and Details .....	6
1.2.3 Support Cable List and Details .....	6
1.2.4 Block Diagram of Test Setup.....	7
<b>1.3 MEASUREMENT UNCERTAINTY .....</b>	<b>9</b>
<b>2. SUMMARY OF TEST RESULTS .....</b>	<b>10</b>
<b>3. REQUIREMENTS AND TEST PROCEDURES .....</b>	<b>11</b>
<b>3.1 AC LINE CONDUCTED EMISSIONS.....</b>	<b>11</b>
3.1.1 Applicable Standard.....	11
3.1.2 EUT Setup.....	12
3.1.3 EMI Test Receiver Setup .....	12
3.1.4 Test Procedure .....	13
3.1.5 Corrected Amplitude & Margin Calculation.	13
<b>3.2 RADIATION SPURIOUS EMISSIONS.....</b>	<b>14</b>
3.2.1 Applicable Standard.....	14
3.2.2 EUT Setup.....	14
3.2.3 EMI Test Receiver & Spectrum Analyzer Setup .....	15
3.2.4 Test Procedure .....	15
3.2.5 Corrected Amplitude & Margin Calculation.	15
<b>3.3 20 dB BANDWIDTH.....</b>	<b>16</b>
3.3.1 Applicable Standard.....	16
3.3.2 EUT Setup.....	16
3.3.3 Test Procedure .....	16
<b>3.4 CHANNEL SEPARATION .....</b>	<b>17</b>
3.4.1 Applicable Standard.....	17
3.4.2 EUT Setup.....	17
3.4.3 Test Procedure .....	17
<b>3.5 TIME OF OCCUPANCY(DWELL TIME) .....</b>	<b>18</b>
3.5.1 Applicable Standard.....	18
3.5.2 EUT Setup.....	18
3.5.3 Test Procedure .....	18
<b>3.6 PEAK OUTPUT POWER.....</b>	<b>19</b>
3.6.1 Applicable Standard.....	19
3.6.2 EUT Setup.....	19
3.6.3 Test Procedure .....	19
<b>3.7 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE.....</b>	<b>20</b>

3.7.1 Applicable Standard.....	20
3.7.2 EUT Setup.....	20
3.7.3 Test Procedure .....	20
<b>3.8 MAXIMUM POWER SPECTRAL DENSITY: .....</b>	<b>21</b>
3.8.1 Applicable Standard.....	21
3.8.2 EUT Setup.....	21
3.8.3Test Procedure .....	21
<b>3.9 DUTY CYCLE:.....</b>	<b>22</b>
3.9.1 EUT Setup.....	22
3.9.2Test Procedure .....	22
<b>3.10 ANTENNA REQUIREMENT.....</b>	<b>22</b>
3.10.1 Applicable Standard.....	22
3.10.2 Judgment.....	22
<b>4. TEST DATA AND RESULTS .....</b>	<b>23</b>
<b>4.1 AC LINE CONDUCTED EMISSIONS.....</b>	<b>23</b>
<b>4.2 RADIATION SPURIOUS EMISSIONS .....</b>	<b>26</b>
<b>4.3 20 dB EMISSION BANDWIDTH: .....</b>	<b>34</b>
<b>4.4 CHANNEL SEPARATION:.....</b>	<b>36</b>
<b>4.5 TIME OF OCCUPANCY(DWELL TIME):.....</b>	<b>38</b>
<b>4.6 PEAK CONDUCTED OUTPUT POWER: .....</b>	<b>40</b>
<b>4.7 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE: .....</b>	<b>41</b>
<b>4.8 MAXIMUM POWER SPECTRAL DENSITY: .....</b>	<b>44</b>
<b>4.9 DUTY CYCLE:.....</b>	<b>46</b>
<b>5. RF EXPOSURE EVALUATION .....</b>	<b>47</b>
<b>5.1 APPLICABLE STANDARD.....</b>	<b>47</b>
<b>5.2 PROCEDURE.....</b>	<b>47</b>
<b>5.3 MEASUREMENT RESULT .....</b>	<b>47</b>

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment under Test (EUT)

<b>EUT Name:</b>	SX1302 Gateway Module
<b>EUT Model:</b>	HLM9933
<b>Operation Frequency:</b>	902.3-914.9MHz(Lora-Hybrid, 125kHz mode)
<b>Maximum Average Output Power (Conducted):</b>	20.83dBm
<b>Modulation Type:</b>	Lora
<b>Rated Input Voltage:</b>	DC 3.3V
<b>Serial Number:</b>	CR22010018-RF-S1
<b>EUT Received Date:</b>	2022.1.18
<b>EUT Received Status:</b>	Good

#### Operation Frequency Detail:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	902.3	32	908.7
1	902.5	33	908.9
...	...	...	...
...	...	...	...
30	908.3	62	914.7
31	908.5	63	914.9

Per section 15.31(m), the lowest frequency, middle frequency, and highest frequency were performed the test as below:

Test Channel	Frequency (MHz)
Lowest	902.3
Middle	908.5
Highest	914.9

#### Antenna Information Detail ▲:

Manufacturer	Antenna Type	input impedance (Ohm)	Antenna Gain /Frequency Range	§15.203 Requirement
Hangzhou Hylin IoT Technology Co.,Ltd.	Monopole	50	2.44dBi/ 902~928MHz	Compliant

The Method of §15.203 Compliance:

- Antenna must be permanently attached to the unit.
- Antenna must use a unique type of connector to attach to the EUT.
- Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

#### Accessory Information:

No.

## 1.2 Description of Test Configuration

### 1.2.1 EUT Operation Condition:

<b>EUT Operation Mode:</b>	The system was configured for testing in Engineering Mode, which was provided by the manufacturer.		
<b>Equipment Modifications:</b>	No		
<b>EUT Exercise Software:</b>	SSCOM V5.13.1		
The software “SSCOM V5.13.1” was provided by manufacturer. The maximum power was configured as below, that was provided by the manufacturer▲:			
<b>Test Modes</b>	<b>Power Level Setting</b>		
	Lowest	Middle	Highest
Lora-FHSS	29	29	29

### 1.2.2 Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Hylintech	SX1302 Module development board	HLT1002	97415K-V551-211119
SLEing	RF antenna	915MHz (SMA)	SLEingA100030138-F06
DELL	Laptop	E6410	GYXJ3 A00 JSD2
DELL	Adapter	HA65NM130	CN-OFPC2Y-CH200-14M-061U-A07

### 1.2.3 Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
USB Cable	No	No	1.2	Laptop	EUT
Power Cable	No	No	1.3	Adapter	LISN
Power Cable	No	No	1.2	Adapter	Laptop


### 1.2.4 Block Diagram of Test Setup

AC line conducted emissions:

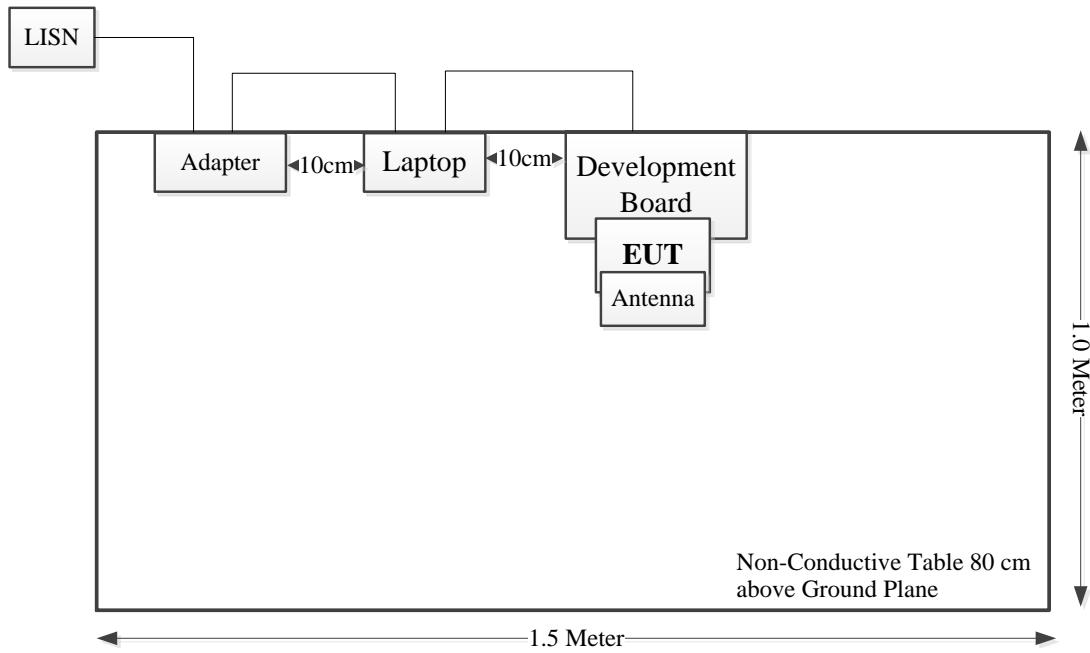


Spurious Emissions:

Below 1GHz:

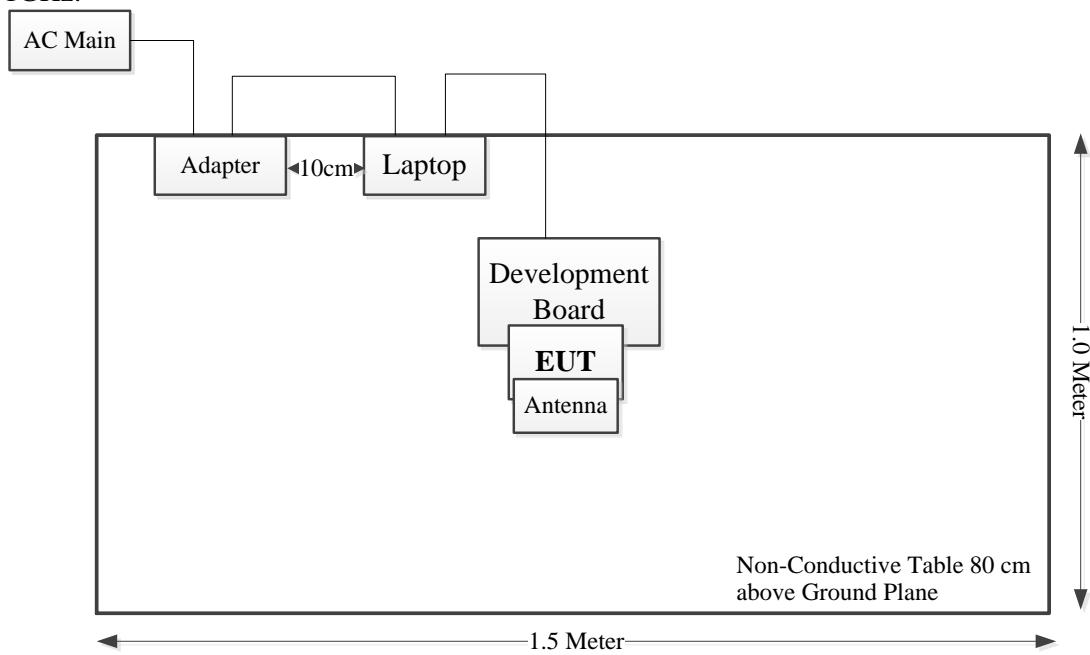

Above 1GHz:

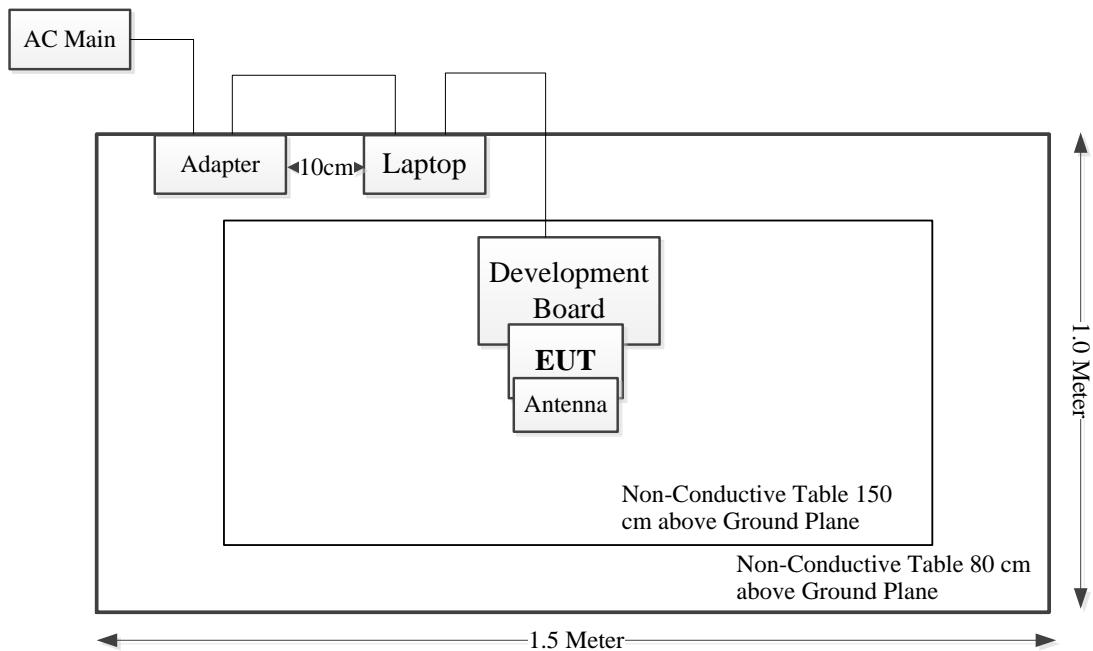

### 1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.15 dB, 200M~1GHz: 5.61 dB, 1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB
Unwanted Emissions, conducted	±1.26 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	2.8 dB (150 kHz to 30 MHz)

## 2. SUMMARY OF TEST RESULTS

Standard(s)/Rule(s)	Description of Test	Result
FCC §15.207(a)	AC line conducted emissions	Compliant
FCC §15.205, §15.209, §15.247(d)	Spurious emissions	Compliant
FCC §15.247(a)(1)	20 dB bandwidth	Compliant
FCC §15.247(a)(1)	Channel separation	Compliant
FCC §15.247(f)	Time of occupancy (dwell time)	Compliant
FCC §15.247(b)(3)	Peak output power measurement	Compliant
FCC §15.247(d)	Band edges	Compliant
FCC §15.247(f)	Power Spectral Density	Compliant
FCC §15.203	Antenna requirement	Compliant
FCC §15.247 (i) & §1.1307(b)	RF Exposure Evaluation	Compliant

### **3. REQUIREMENTS AND TEST PROCEDURES**

#### **3.1 AC Line Conducted Emissions**

##### **3.1.1 Applicable Standard**

FCC §15.207(a).

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

(b) The limit shown in paragraph (a) of this section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:


(1) For carrier current system containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.

(2) For all other carrier current systems: 1000  $\mu$ V within the frequency band 535-1705 kHz, as measured using a 50  $\mu$ H/50 ohms LISN.

(3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in §15.205, §15.209, §15.221, §15.223, or §15.227, as appropriate.

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtainig their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

### 3.1.2 EUT Setup

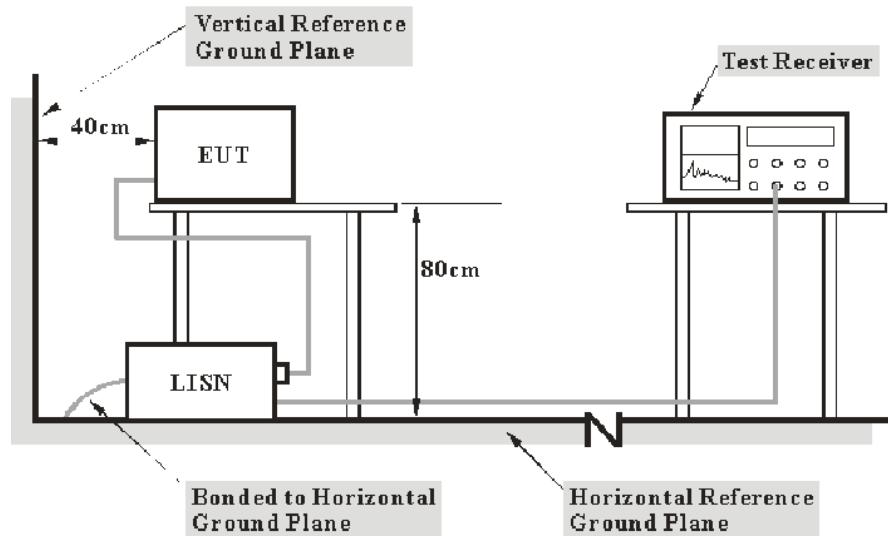

Note:

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter or EUT was connected to the main LISN with a 120 V/60 Hz AC power source.

### 3.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

### 3.1.4 Test Procedure

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase ("hot") line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

### 3.1.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN

The “Margin” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

## 3.2 Radiation Spurious Emissions


### 3.2.1 Applicable Standard

FCC §15.247 (d);


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 3.2.2 EUT Setup

**Below 1GHz:**

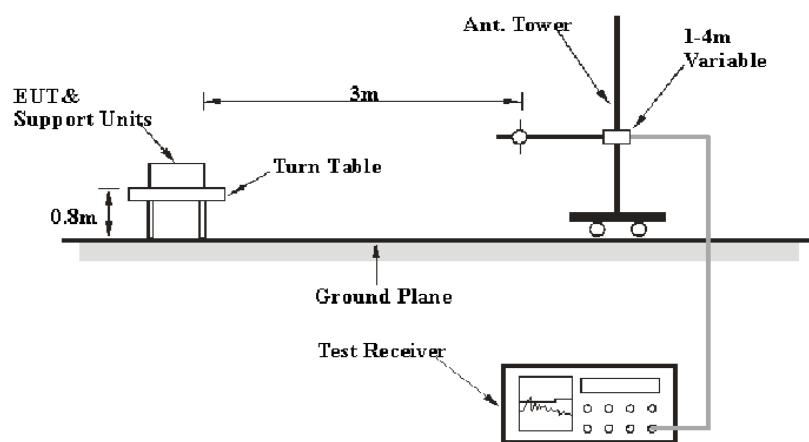

**Above 1GHz:**

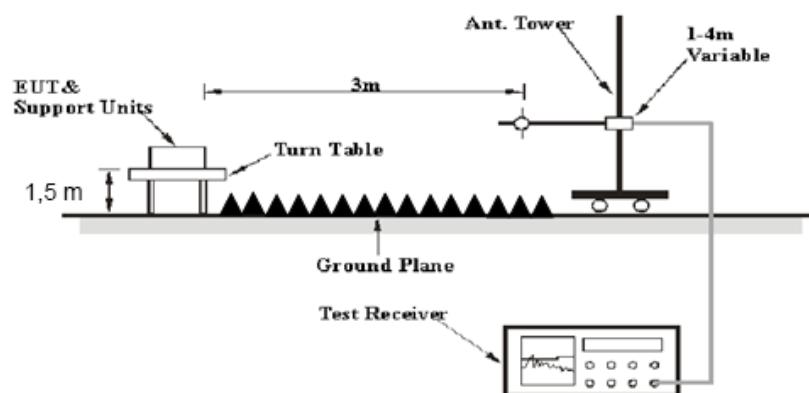

The radiated emissions were performed in the 3 meters distance, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

### 3.2.3 EMI Test Receiver & Spectrum Analyzer Setup

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10Hz	/	AV

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

### 3.2.4 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

### 3.2.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = Antenna Factor + Cable Loss- Amplifier Gain

The “Margin” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result


### 3.3 20 dB Bandwidth

#### 3.3.1 Applicable Standard

FCC §15.247 (a)(1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

#### 3.3.2 EUT Setup

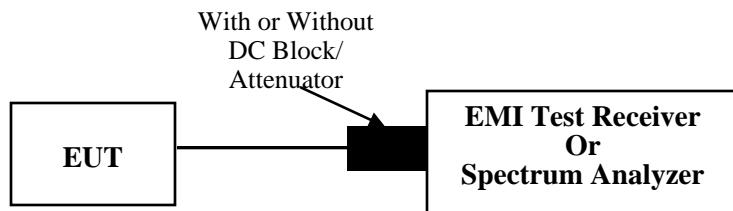

#### 3.3.3 Test Procedure

Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.

Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.

Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level.  
Record the frequency difference as the emission bandwidth.

Repeat above procedures until all frequencies measured were complete.


### 3.4 Channel Separation

#### 3.4.1 Applicable Standard

FCC §15.247 (a)(1)(i)

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

#### 3.4.2 EUT Setup

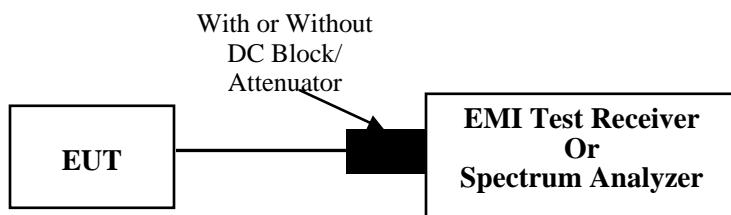

#### 3.4.3 Test Procedure

According to ANSI C63.10-2013 Section 7.8.2

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a) Span: Wide enough to capture the peaks of two adjacent channels.
- b) RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- c) Video (or average) bandwidth (VBW)  $\geq$  RBW.
- d) Sweep: Auto.
- e) Detector function: Peak.
- f) Trace: Max hold.
- g) Allow the trace to stabilize.

Use the marker-delta function to determine the separation between the peaks of the adjacent channels. Compliance of an EUT with the appropriate regulatory limit shall be determined. A plot of the data shall be included in the test report.


### 3.5 Time Of Occupancy(Dwell Time)

#### 3.5.1 Applicable Standard

FCC §15.247 (f)

For the purposes of this section, hybrid systems are those that employ a combination of both frequency hopping and digital modulation techniques. The frequency hopping operation of the hybrid system, with the direct sequence or digital modulation operation turned off, shall have an average time of occupancy on any frequency not to exceed 0.4 seconds within a time period in seconds equal to the number of hopping frequencies employed multiplied by 0.4. The power spectral density conducted from the intentional radiator to the antenna due to the digital modulation operation of the hybrid system, with the frequency hopping operation turned off, shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

#### 3.5.2 EUT Setup

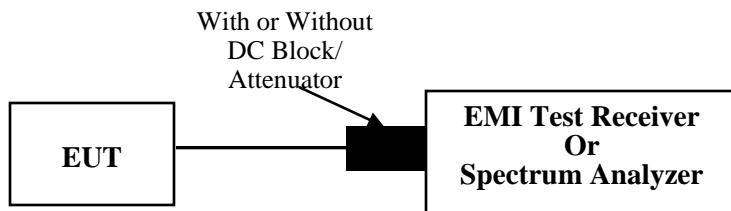

#### 3.5.3 Test Procedure

The EUT was worked in channel hopping; the time of single pulses was tested.


## 3.6 Peak Output Power

### 3.6.1 Applicable Standard

FCC §15.247 (b)(3)

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

### 3.6.2 EUT Setup

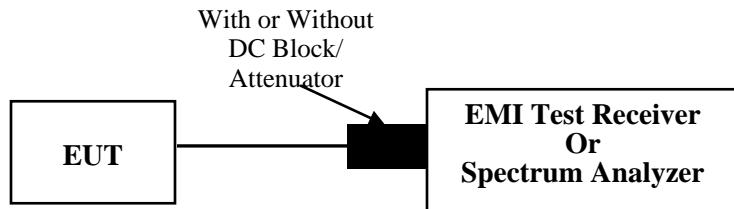

### 3.6.3 Test Procedure

1. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
2. Add a correction factor to the display.


### 3.7 100 kHz Bandwidth of Frequency Band Edge

#### 3.7.1 Applicable Standard

FCC §15.247 (d);

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

#### 3.7.2 EUT Setup

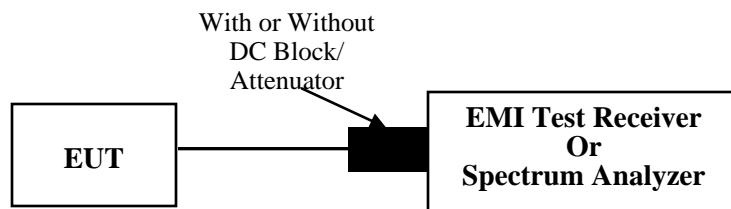

#### 3.7.3 Test Procedure

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW  $\geq [3 \times \text{RBW}]$ .
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.


### 3.8 Maximum power spectral density:

#### 3.8.1 Applicable Standard

FCC §15.247 (f)

For the purposes of this section, hybrid systems are those that employ a combination of both frequency hopping and digital modulation techniques. The frequency hopping operation of the hybrid system, with the direct sequence or digital modulation operation turned off, shall have an average time of occupancy on any frequency not to exceed 0.4 seconds within a time period in seconds equal to the number of hopping frequencies employed multiplied by 0.4. The power spectral density conducted from the intentional radiator to the antenna due to the digital modulation operation of the hybrid system, with the frequency hopping operation turned off, shall not be greater than 8 dBm in any 3 kHz bandwidth during any time interval of continuous transmission.

#### 3.8.2 EUT Setup

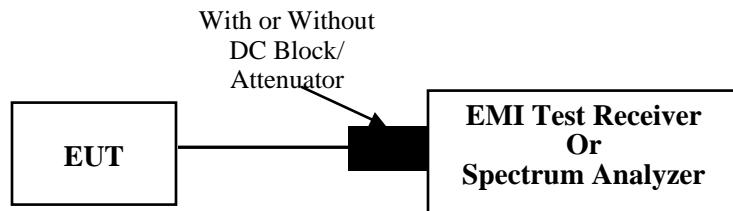


#### 3.8.3 Test Procedure

According to ANSI C63.10-2013 Section 11.10.2

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- d) Set the VBW  $\geq [3 \cdot \text{RBW}]$ .
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.

### 3.9 Duty Cycle:

#### 3.9.1 EUT Setup

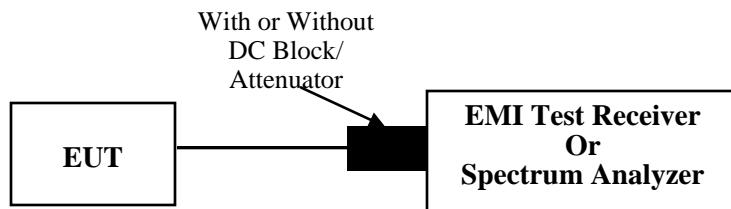

#### 3.9.2 Test Procedure

According to ANSI C63.10-2013 Section 11.6

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:

- 1) Set the center frequency of the instrument to the center frequency of the transmission.
- 2) Set  $RBW \geq OBW$  if possible; otherwise, set  $RBW$  to the largest available value.
- 3) Set  $VBW \geq RBW$ . Set detector = peak or average.
- 4) The zero-span measurement method shall not be used unless both  $RBW$  and  $VBW$  are  $> 50/T$  and the number of sweep points across duration  $T$  exceeds 100. (For example, if  $VBW$  and/or  $RBW$  are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if  $T \leq 16.7 \mu s$ .)

### 3.10 Antenna Requirement

#### 3.10.1 Applicable Standard

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

#### 3.10.2 Judgment

Please refer to the Antenna Information detail in Section 1.

## 4. TEST DATA AND RESULTS

### 4.1 AC Line Conducted Emissions

Serial Number:	CR22010018-RF-S1	Test Date:	2022-04-27
Test Site:	CE	Test Mode:	Transmitting(low channel was the worst)
Tester:	Nick Tang	Test Result:	Pass


#### Environmental Conditions:

Temperature: (°C)	26.8	Relative Humidity: (%)	70	ATM Pressure: (kPa)	100.3
-------------------	------	------------------------	----	---------------------	-------


#### Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV216	101134	2022-04-01	2023-03-31
R&S	EMI Test Receiver	ESR3	102726	2021-07-22	2022-07-21
MICRO-COAX	Coaxial Cable	UTIFLEX	C-0200-01	2021-08-08	2022-08-07
Audix	Test Software	E3	190306 (V9)	N/A	N/A

\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

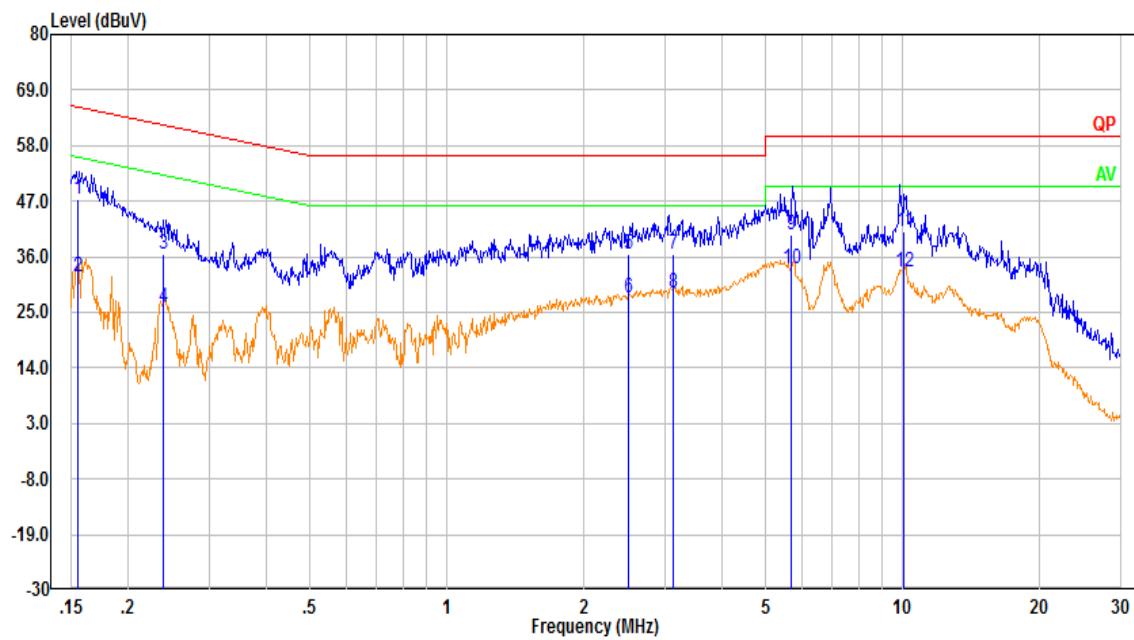**Line:**

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB)	Result (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Detector
1	0.155	37.75	9.61	47.36	65.74	18.38	QP
2	0.155	22.34	9.61	31.95	55.74	23.79	Average
3	0.238	27.03	9.61	36.64	62.16	25.52	QP
4	0.238	16.27	9.61	25.88	52.16	26.28	Average
5	2.500	26.86	9.64	36.50	56.00	19.50	QP
6	2.500	18.33	9.64	27.97	46.00	18.03	Average
7	3.126	26.86	9.65	36.51	56.00	19.49	QP
8	3.126	19.33	9.65	28.98	46.00	17.02	Average
9	5.697	30.83	9.66	40.49	60.00	19.51	QP
10	5.697	24.01	9.66	33.67	50.00	16.33	Average
11	10.073	31.38	9.67	41.05	60.00	18.95	QP
12	10.073	23.39	9.67	33.06	50.00	16.94	Average

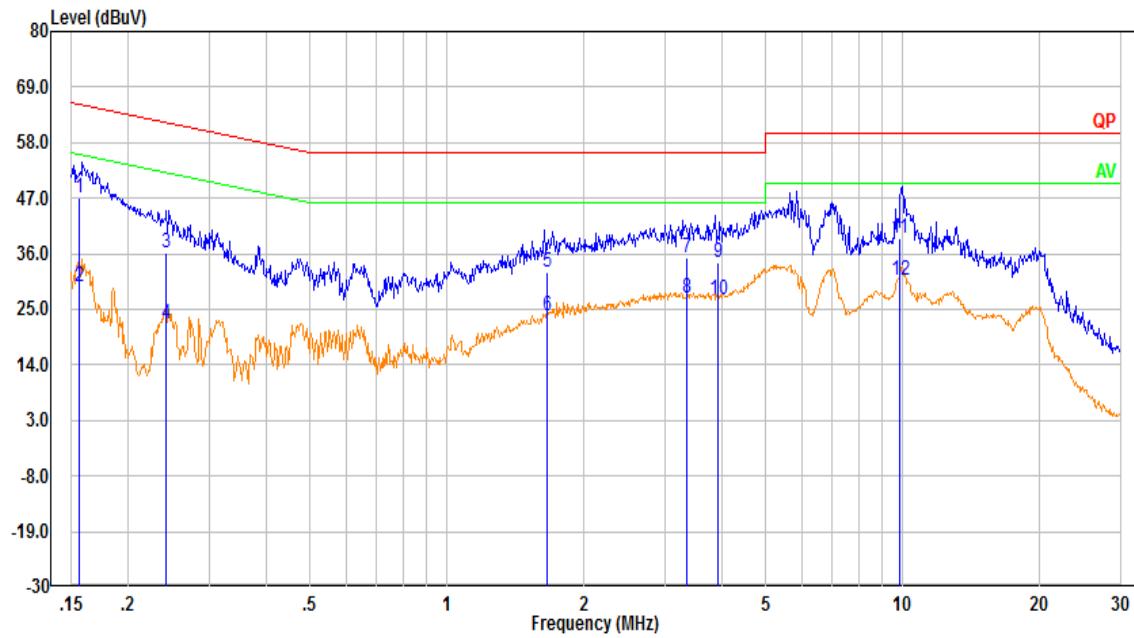**Neutral:**

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB)	Result (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Detector
1	0.156	37.35	9.61	46.96	65.68	18.72	QP
2	0.156	20.00	9.61	29.61	55.68	26.07	Average
3	0.242	26.53	9.61	36.14	62.02	25.88	QP
4	0.242	12.67	9.61	22.28	52.02	29.74	Average
5	1.659	22.60	9.63	32.22	56.00	23.78	QP
6	1.659	14.01	9.63	23.64	46.00	22.36	Average
7	3.364	25.57	9.65	35.22	56.00	20.78	QP
8	3.364	17.67	9.65	27.32	46.00	18.68	Average
9	3.934	24.76	9.65	34.41	56.00	21.59	QP
10	3.934	17.42	9.65	27.07	46.00	18.93	Average
11	9.821	29.38	9.67	39.05	60.00	20.95	QP
12	9.821	21.18	9.67	30.85	50.00	19.15	Average

## 4.2 Radiation Spurious Emissions

Serial Number:	CR22010018-RF-S1	Test Date:	2022-03-02~2022-05-12
Test Site:	966-2	Test Mode:	Transmitting
Tester:	Gary Ling, Great Qiao	Test Result:	Pass

Environmental Conditions:					
Temperature: (°C)	19.5~22.9	Relative Humidity: (%)	50~65	ATM Pressure: (kPa)	100.3~101.2

### Test Equipment List and Details:


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Antenna	JB6	A082520-5	2020-10-19	2023-10-18
R&S	EMI Test Receiver	ESR3	102724	2021-07-22	2022-07-21
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0470-02	2021-07-18	2022-07-17
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0780-01	2021-07-18	2022-07-17
Sonoma	Amplifier	310N	186165	2021-07-18	2022-07-17
Audix	Test Software	E3	201021 (V9)	N/A	N/A
ETS-Lindgren	Horn Antenna	3115	9912-5985	2020-10-13	2023-10-12
R&S	Spectrum Analyzer	FSV40	101591	2021-07-22	2022-07-21
MICRO-COAX	Coaxial Cable	UFA210A-1-1200-70U300	217423-008	2021-08-08	2022-08-07
MICRO-COAX	Coaxial Cable	UFA210A-1-2362-300300	235780-001	2021-08-08	2022-08-07
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2021-11-10	2022-11-09

\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


### Test Data:

Please refer to the below table and plots.

Note: The device can be mounted in multiple orientations, test was performed with X, Y, Z Axis according to C63.10 figure 8, the worst orientation was photographed and it's data was recorded.

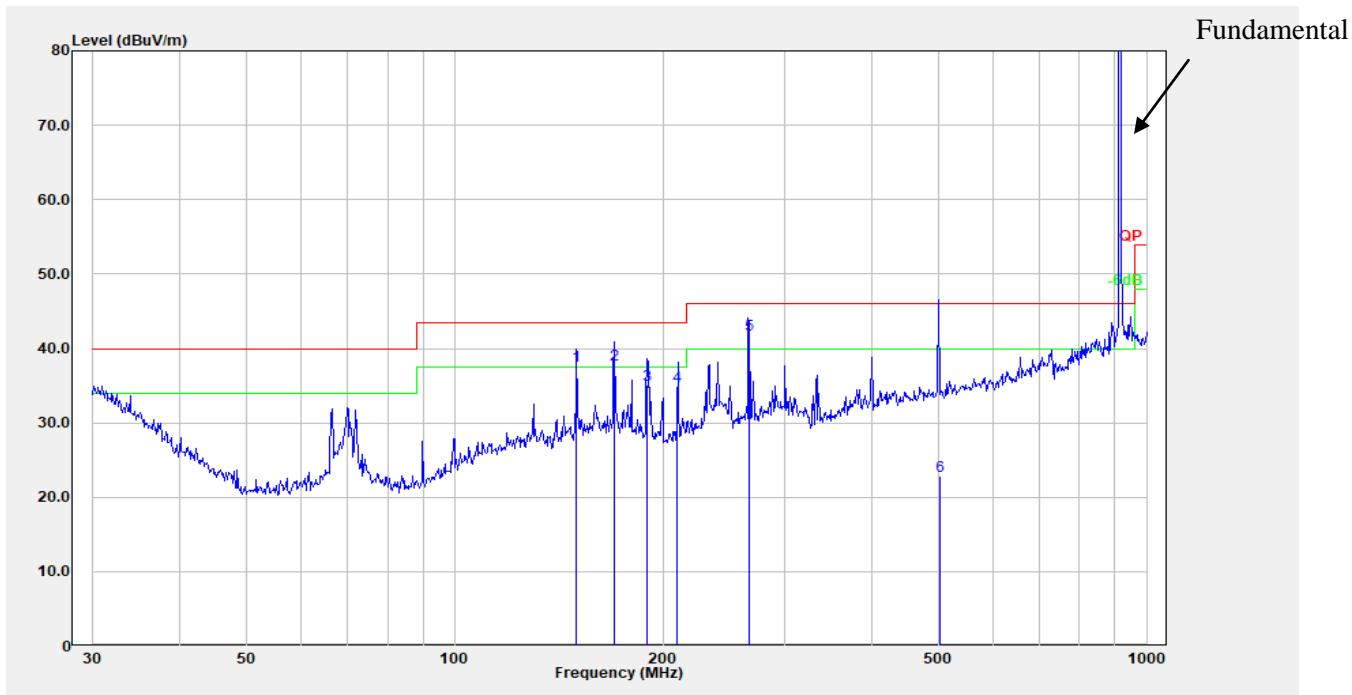**1) 30MHz-1GHz(Low channel was the worst)****Horizontal:**

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
1	150.029	18.53	19.17	37.70	43.50	5.80	QP
2	169.957	19.65	18.24	37.89	43.50	5.61	QP
3	189.875	17.26	17.83	35.09	43.50	8.41	QP
4	210.006	16.14	18.76	34.90	43.50	8.60	QP
5	266.408	22.84	19.00	41.83	46.00	4.17	QP
6	502.641	-2.16	25.07	22.90	46.00	23.10	QP

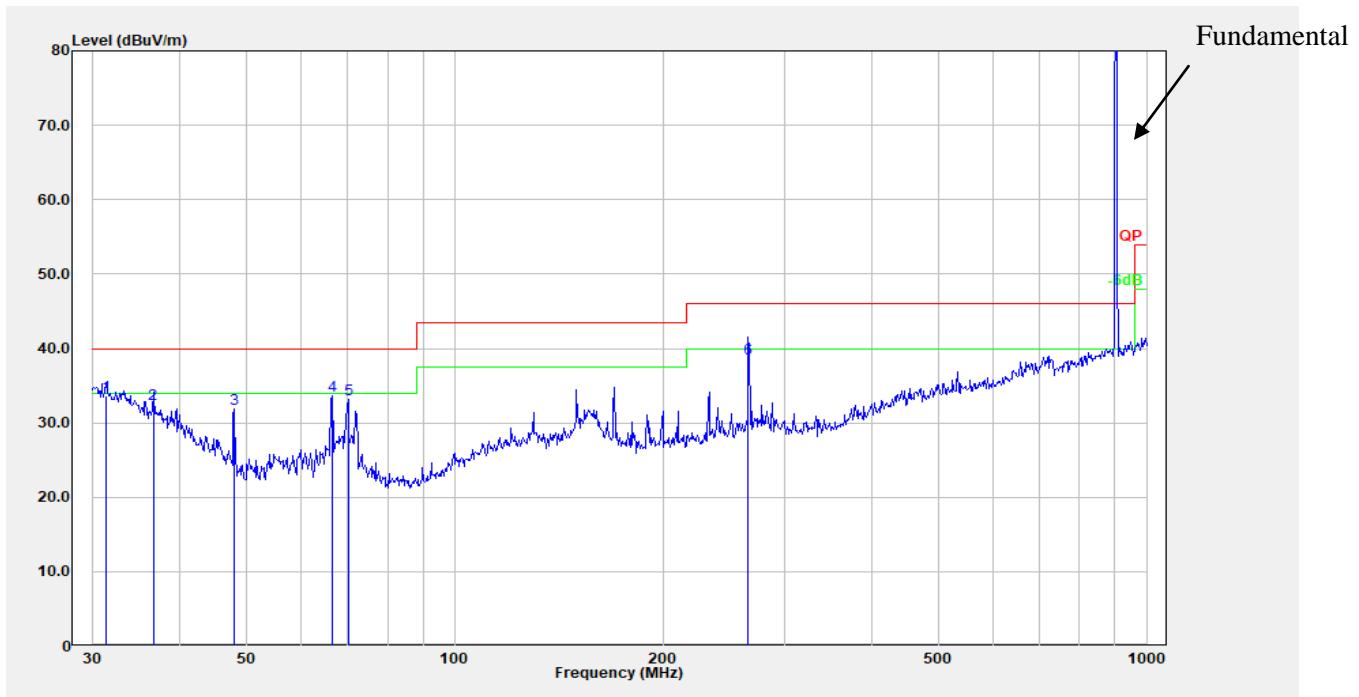**Vertical:**


No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
1	31.289	7.00	26.69	33.69	40.00	6.31	QP
2	36.637	9.98	22.57	32.55	40.00	7.45	QP
3	47.994	16.66	15.26	31.92	40.00	8.08	Peak
4	66.499	19.20	14.42	33.62	40.00	6.38	Peak
5	70.090	18.41	14.75	33.16	40.00	6.84	Peak
6	265.676	19.70	18.97	38.67	46.00	7.33	QP


## 2) Bandedge and 1-10GHz:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	Detector					
Low Channel: 902.3 MHz							
902.30	86.60	QP	H	29.46	116.06	N/A	N/A
902.30	83.83	QP	V	29.46	113.29	N/A	N/A
902.00	34.50	QP	H	29.46	63.96	86.06	22.10
1804.60	44.39	PK	H	1.31	45.70	74.00	28.30
1804.60	30.28	AV	H	1.31	31.59	54.00	22.41
1804.60	49.26	PK	V	1.31	50.57	74.00	23.43
1804.60	35.44	AV	V	1.31	36.75	54.00	17.25
2706.90	58.05	PK	H	4.75	62.80	74.00	11.20
2706.90	43.62	AV	H	4.75	48.37	54.00	5.63
2706.90	56.70	PK	V	4.75	61.45	74.00	12.55
2706.90	42.17	AV	V	4.75	46.92	54.00	7.08
3609.20	42.85	PK	H	7.99	50.84	74.00	23.16
3609.20	28.54	AV	H	7.99	36.53	54.00	17.47
3609.20	43.81	PK	V	7.99	51.80	74.00	22.20
3609.20	29.84	AV	V	7.99	37.83	54.00	16.17
4511.50	42.09	PK	H	10.04	52.13	74.00	21.87
4511.50	27.56	AV	H	10.04	37.60	54.00	16.40
4511.50	45.14	PK	V	10.04	55.18	74.00	18.82
4511.50	31.78	AV	V	10.04	41.82	54.00	12.18
5413.80	36.65	PK	H	12.34	48.99	74.00	25.01
5413.80	24.18	AV	H	12.34	36.52	54.00	17.48
5413.80	38.69	PK	V	12.34	51.03	74.00	22.97
5413.80	25.03	AV	V	12.34	37.37	54.00	16.63
6316.10	40.53	PK	H	13.37	53.90	74.00	20.10
6316.10	26.75	AV	H	13.37	40.12	54.00	13.88
6316.10	44.75	PK	V	13.37	58.12	74.00	15.88
6316.10	30.69	AV	V	13.37	44.06	54.00	9.94
7218.40	37.19	PK	H	14.31	51.50	74.00	22.50
7218.40	26.32	AV	H	14.31	40.63	54.00	13.37
7218.40	38.70	PK	V	14.31	53.01	74.00	20.99
7218.40	25.26	AV	V	14.31	39.57	54.00	14.43
8120.70	34.66	PK	H	16.13	50.79	74.00	23.21
8120.70	22.28	AV	H	16.13	38.41	54.00	15.59
8120.70	34.57	PK	V	16.13	50.70	74.00	23.30
8120.70	22.64	AV	V	16.13	38.77	54.00	15.23
9023.00	36.47	PK	H	17.67	54.14	74.00	19.86
9023.00	25.18	AV	H	17.67	42.85	54.00	11.15
9023.00	40.48	PK	V	17.67	58.15	74.00	15.85
9023.00	26.38	AV	V	17.67	44.05	54.00	9.95

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	Detector					
Middle Channel: 908.5 MHz							
908.50	88.29	QP	H	29.59	117.88	N/A	N/A
908.50	85.29	QP	V	29.59	114.88	N/A	N/A
1817.00	42.59	PK	H	1.37	43.96	74.00	30.04
1817.00	29.14	AV	H	1.37	30.51	54.00	23.49
1817.00	47.95	PK	V	1.37	49.32	74.00	24.68
1817.00	34.71	AV	V	1.37	36.08	54.00	17.92
2725.50	55.62	PK	H	4.83	60.45	74.00	13.55
2725.50	41.28	AV	H	4.83	46.11	54.00	7.89
2725.50	56.52	PK	V	4.83	61.35	74.00	12.65
2725.50	42.57	AV	V	4.83	47.40	54.00	6.60
3634.00	49.86	PK	H	8.03	57.89	74.00	16.11
3634.00	35.42	AV	H	8.03	43.45	54.00	10.55
3634.00	46.28	PK	V	8.03	54.31	74.00	19.69
3634.00	32.96	AV	V	8.03	40.99	54.00	13.01
4542.50	40.19	PK	H	10.14	50.33	74.00	23.67
4542.50	26.95	AV	H	10.14	37.09	54.00	16.91
4542.50	43.07	PK	V	10.14	53.21	74.00	20.79
4542.50	28.75	AV	V	10.14	38.89	54.00	15.11
5451.00	34.25	PK	H	12.44	46.69	74.00	27.31
5451.00	22.62	AV	H	12.44	35.06	54.00	18.94
5451.00	33.75	PK	V	12.44	46.19	74.00	27.81
5451.00	22.18	AV	V	12.44	34.62	54.00	19.38
6359.50	42.75	PK	H	13.37	56.12	74.00	17.88
6359.50	28.42	AV	H	13.37	41.79	54.00	12.21
6359.50	47.88	PK	V	13.37	61.25	74.00	12.75
6359.50	33.28	AV	V	13.37	46.65	54.00	7.35
7268.00	35.62	PK	H	14.64	50.26	74.00	23.74
7268.00	23.69	AV	H	14.64	38.33	54.00	15.67
7268.00	35.48	PK	V	14.64	50.12	74.00	23.88
7268.00	22.97	AV	V	14.64	37.61	54.00	16.39
8176.50	35.93	PK	H	16.21	52.14	74.00	21.86
8176.50	24.62	AV	H	16.21	40.83	54.00	13.17
8176.50	35.28	PK	V	16.21	51.49	74.00	22.51
8176.50	23.17	AV	V	16.21	39.38	54.00	14.62
9085.00	41.36	PK	H	18.12	59.48	74.00	14.52
9085.00	27.65	AV	H	18.12	45.77	54.00	8.23
9085.00	42.51	PK	V	18.12	60.63	74.00	13.37
9085.00	28.35	AV	V	18.12	46.47	54.00	7.53

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
High Channel: 914.9 MHz							
914.90	90.09	QP	H	29.62	119.71	N/A	N/A
914.90	85.75	QP	V	29.62	115.37	N/A	N/A
928.00	4.90	QP	H	29.70	34.60	89.71	55.11
1829.80	45.69	PK	H	1.43	47.12	74.00	26.88
1829.80	28.76	AV	H	1.43	30.19	54.00	23.81
1829.80	50.32	PK	V	1.43	51.75	74.00	22.25
1829.80	33.79	AV	V	1.43	35.22	54.00	18.78
2744.70	59.25	PK	H	4.91	64.16	74.00	9.84
2744.70	42.76	AV	H	4.91	47.67	54.00	6.33
2744.70	65.06	PK	V	4.91	69.97	74.00	4.03
2744.70	45.26	AV	V	4.91	50.17	54.00	3.83
3659.60	52.08	PK	H	8.12	60.20	74.00	13.80
3659.60	33.62	AV	H	8.12	41.74	54.00	12.26
3659.60	49.77	PK	V	8.12	57.89	74.00	16.11
3659.60	30.25	AV	V	8.12	38.37	54.00	15.63
4574.50	40.55	PK	H	10.26	50.81	74.00	23.19
4574.50	26.39	AV	H	10.26	36.65	54.00	17.35
4574.50	40.75	PK	V	10.26	51.01	74.00	22.99
4574.50	26.38	AV	V	10.26	36.64	54.00	17.36
5489.40	37.30	PK	H	12.48	49.78	74.00	24.22
5489.40	24.69	AV	H	12.48	37.17	54.00	16.83
5489.40	36.68	PK	V	12.48	49.16	74.00	24.84
5489.40	24.51	AV	V	12.48	36.99	54.00	17.01
6404.30	46.64	PK	H	13.54	60.18	74.00	13.82
6404.30	32.69	AV	H	13.54	46.23	54.00	7.77
6404.30	50.11	PK	V	13.54	63.65	74.00	10.35
6404.30	36.99	AV	V	13.54	50.53	54.00	3.47
7319.20	34.12	PK	H	14.80	48.92	74.00	25.08
7319.20	22.36	AV	H	14.80	37.16	54.00	16.84
7319.20	35.21	PK	V	14.80	50.01	74.00	23.99
7319.20	23.63	AV	V	14.80	38.43	54.00	15.57
8234.10	33.39	PK	H	16.28	49.67	74.00	24.33
8234.10	21.88	AV	H	16.28	38.16	54.00	15.84
8234.10	36.46	PK	V	16.28	52.74	74.00	21.26
8234.10	25.87	AV	V	16.28	42.15	54.00	11.85
9149.00	41.97	PK	H	18.05	60.02	74.00	13.98
9149.00	27.48	AV	H	18.05	45.53	54.00	8.47
9149.00	45.96	PK	V	18.05	64.01	74.00	9.99
9149.00	31.47	AV	V	18.05	49.52	54.00	4.48

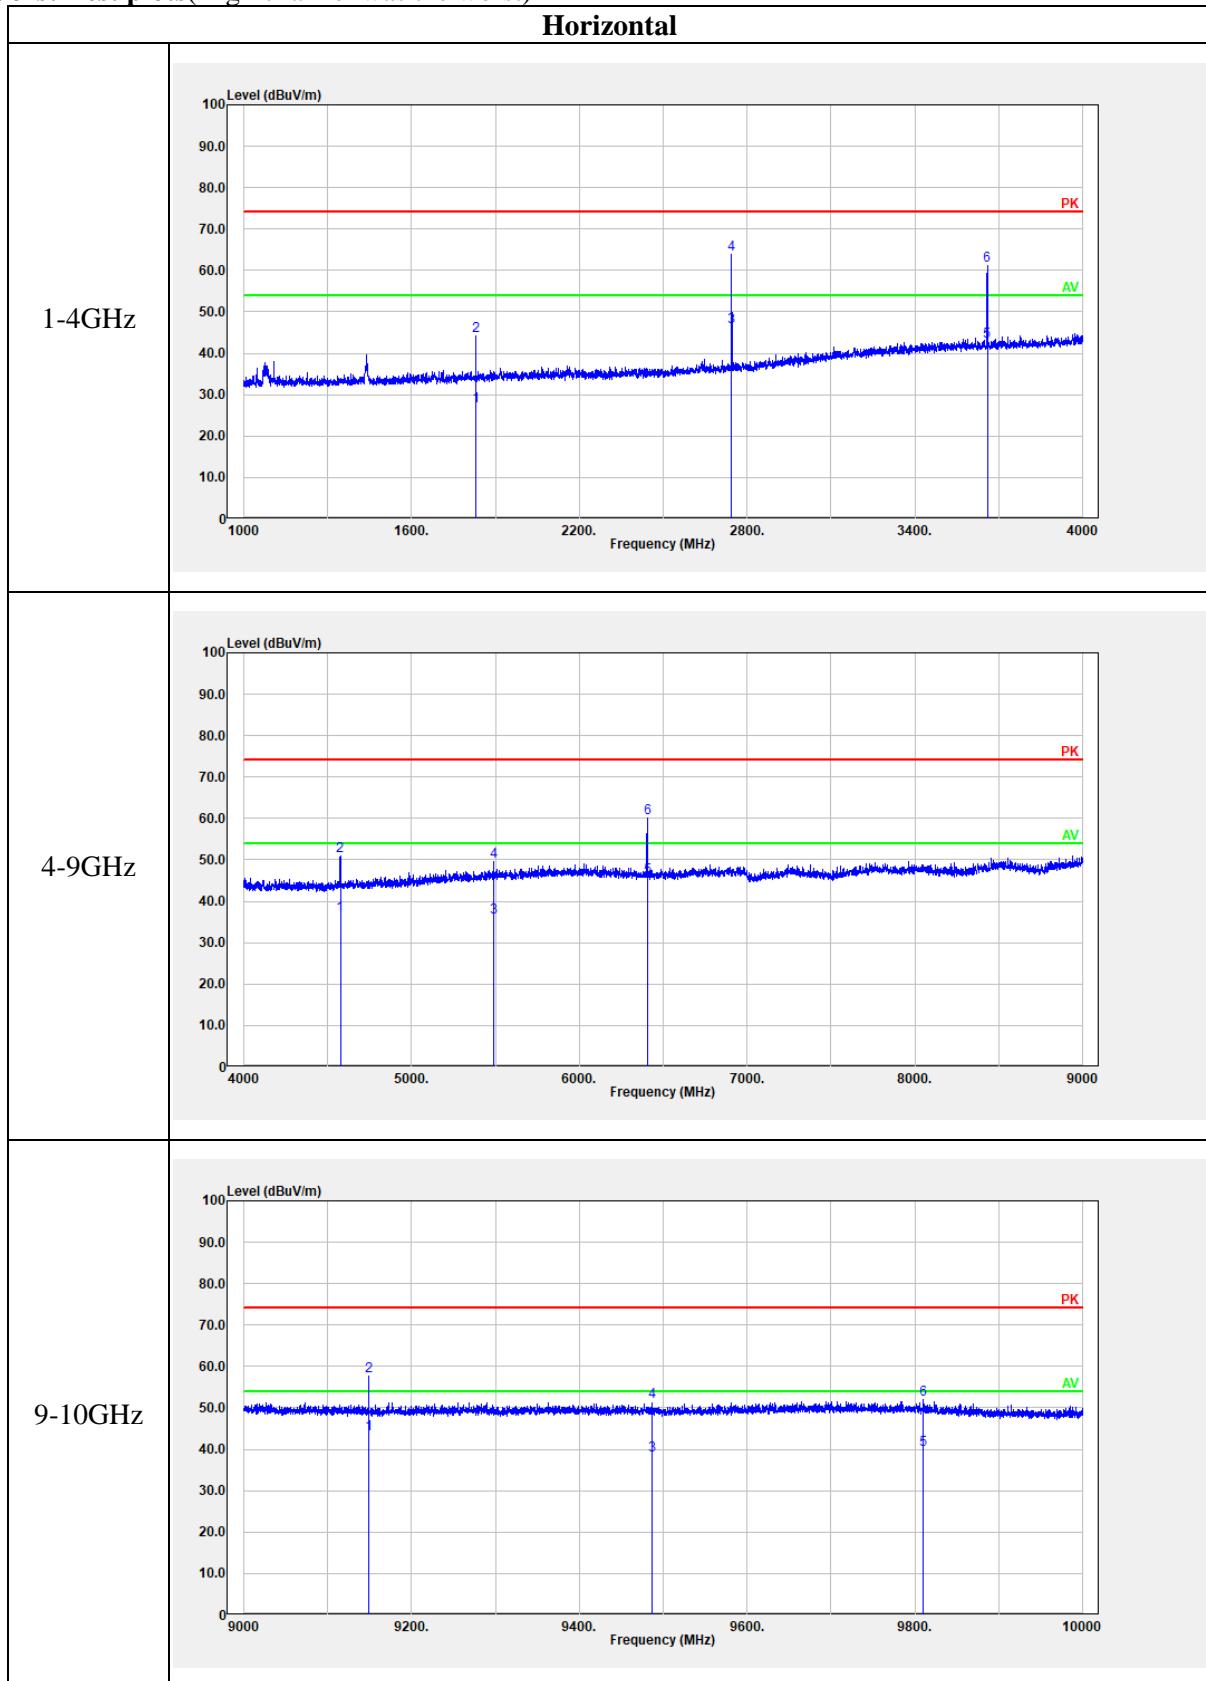**Worst Test plots(High channel was the worst)**

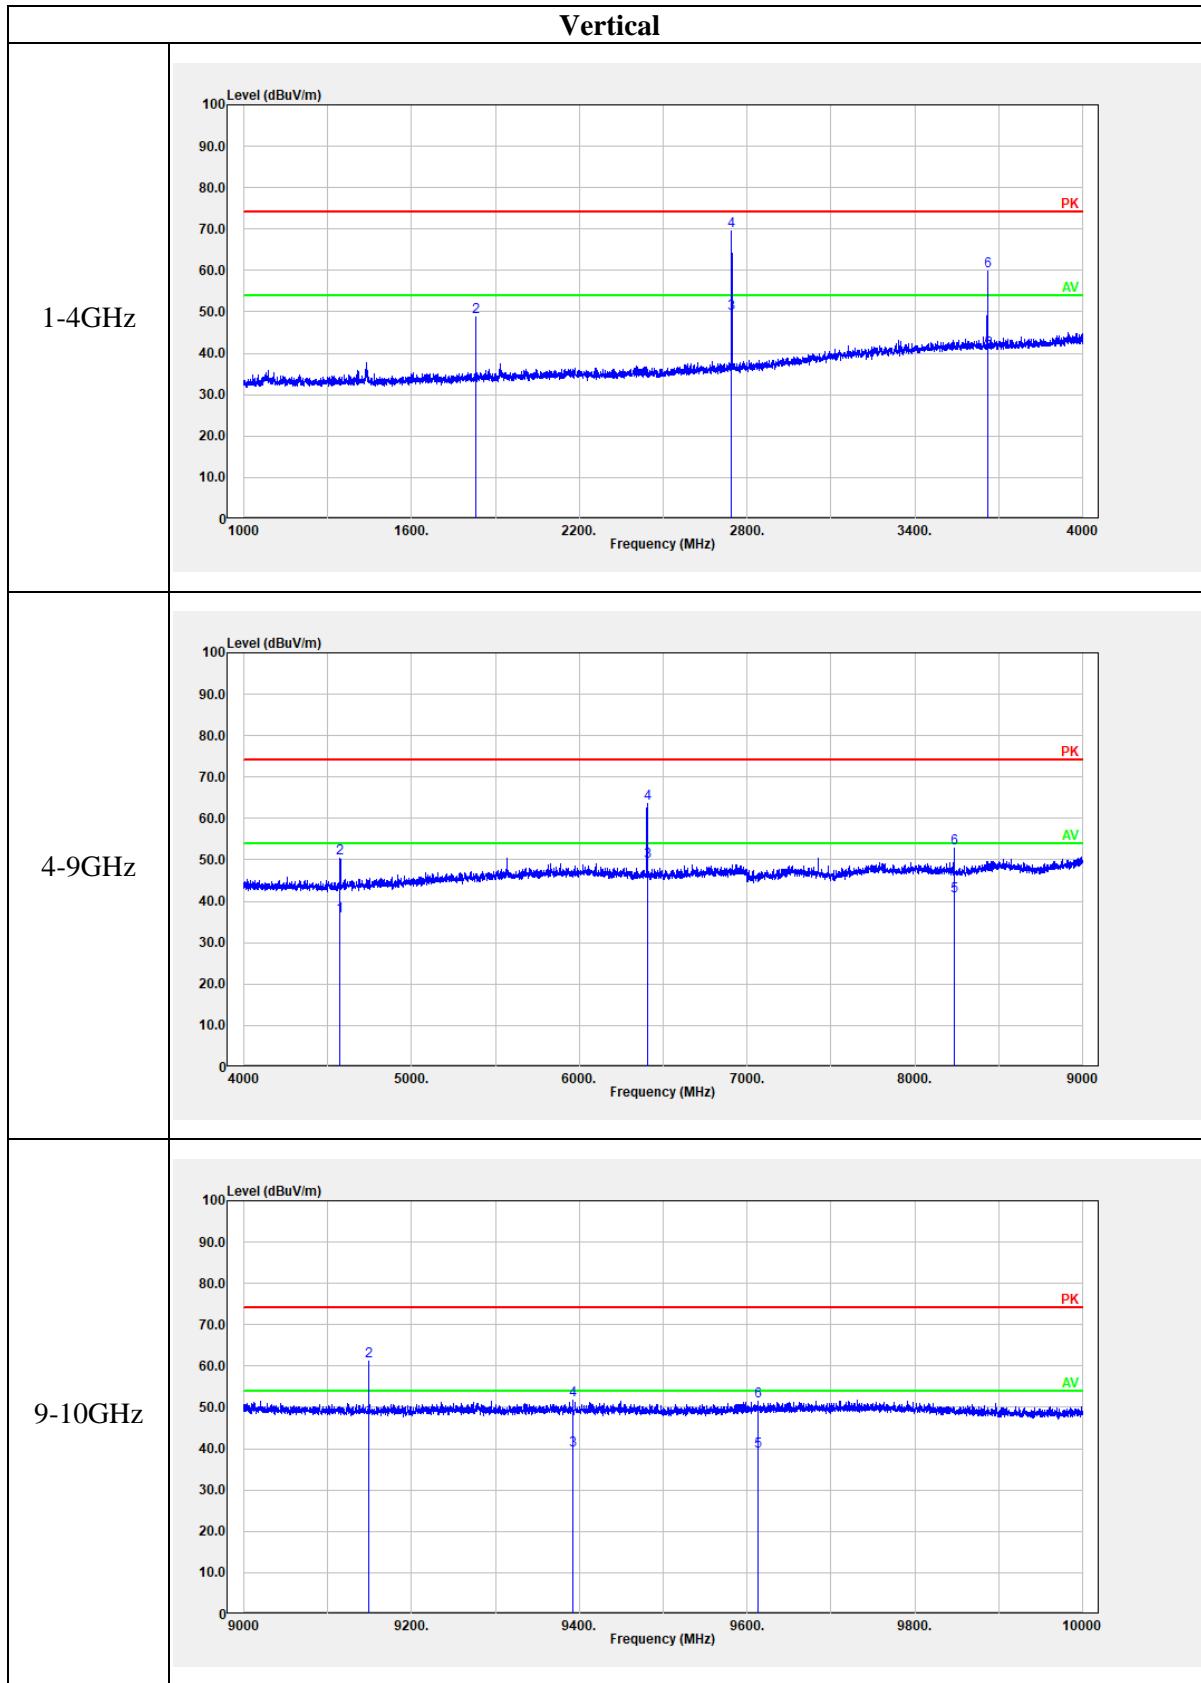

**4.3 20 dB Emission Bandwidth:**

Serial Number:	CR22010018-RF-S1	Test Date:	2022-05-16
Test Site:	RF	Test Mode:	Transmitting
Tester:	Great Qiao	Test Result:	N/A

**Environmental Conditions:**

Temperature: (°C)	25.9	Relative Humidity: (%)	58	ATM Pressure: (kPa)	100.2
-------------------	------	------------------------	----	---------------------	-------


**Test Equipment List and Details:**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101943	2021-10-10	2022-10-09
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A
Weinschel	Coaxial Attenuators	53-20-34	LN751	2021-08-08	2022-08-07
Mini-Circuits	DC Block	BLK-18-S+	1554403	2021-08-08	2022-08-07

\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data:**

Test Channel	Test Frequency (MHz)	20 dB Bandwidth (MHz)
Lowest	902.3	0.136
Middle	908.5	0.139
Highest	914.9	0.136

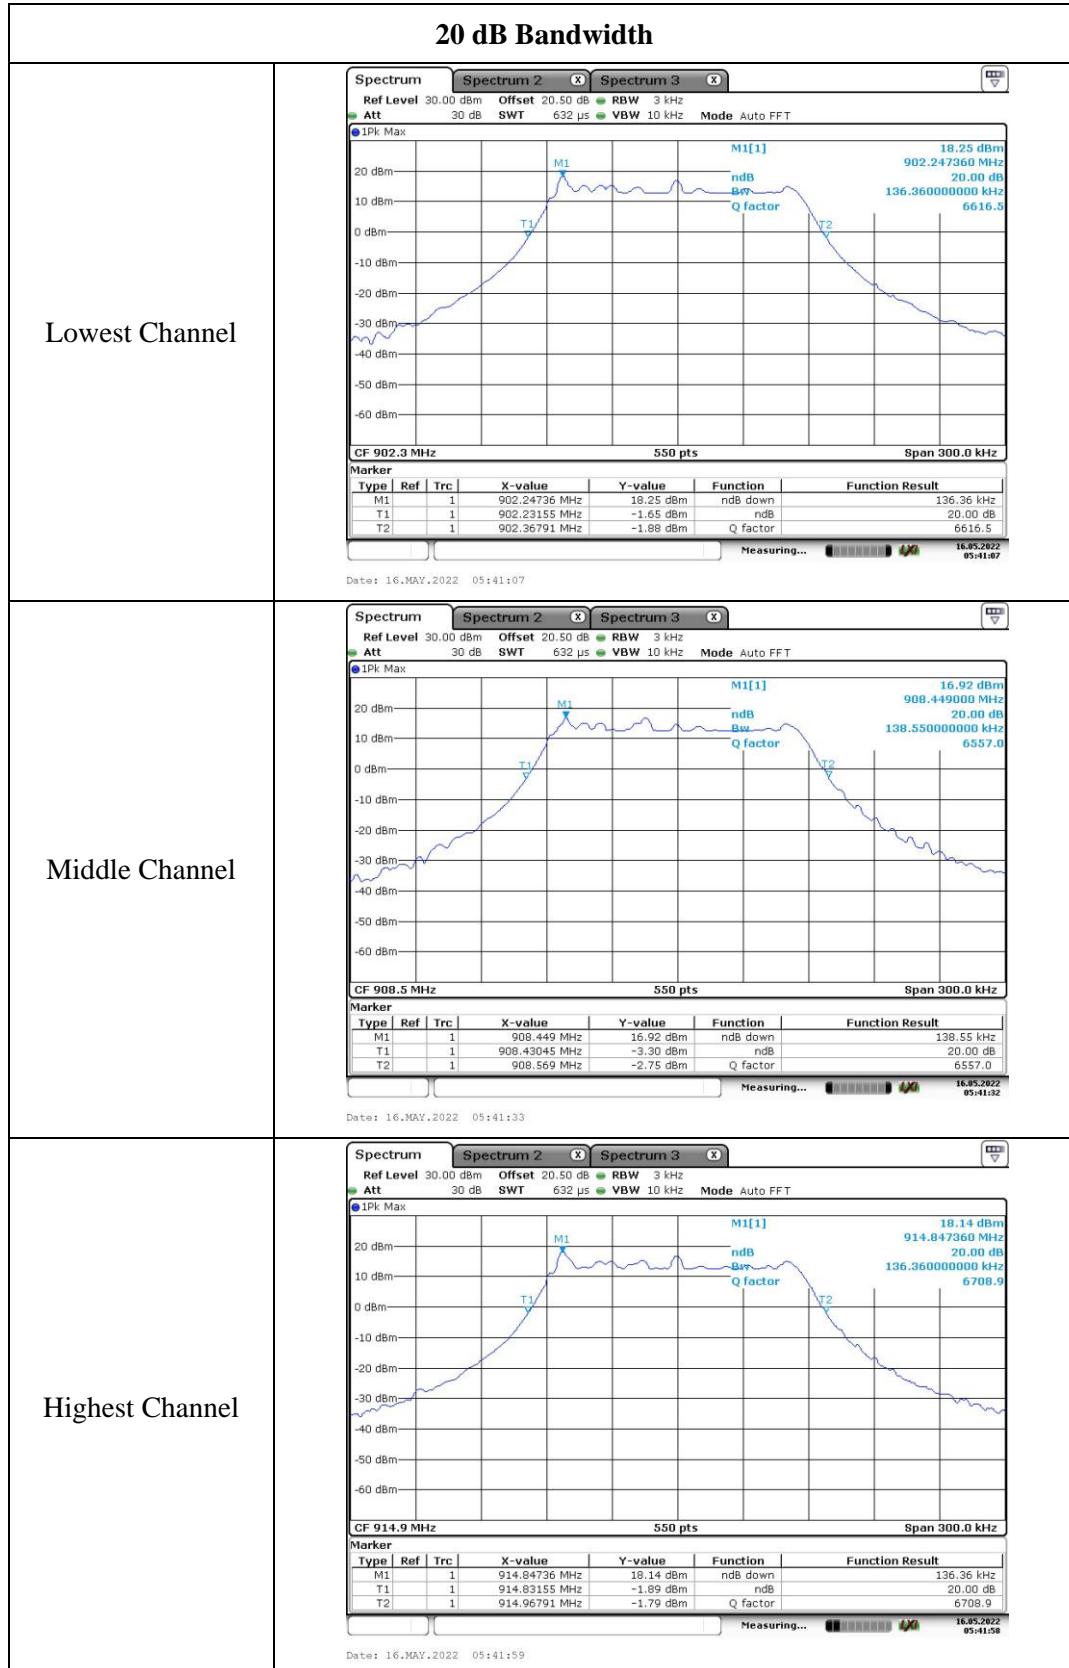

#### 4.4 Channel Separation:

Serial Number:	CR22010018-RF-S1	Test Date:	2022-05-16
Test Site:	RF	Test Mode:	Transmitting
Tester:	Great Qiao	Test Result:	Pass

#### Environmental Conditions:

Temperature: (°C)	25.9	Relative Humidity: (%)	58	ATM Pressure: (kPa)	100.2
-------------------	------	------------------------	----	---------------------	-------


#### Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101943	2021-10-10	2022-10-09
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A
Weinschel	Coaxial Attenuators	53-20-34	LN751	2021-08-08	2022-08-07
Mini-Circuits	DC Block	BLK-18-S+	1554403	2021-08-08	2022-08-07

\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

#### Test Data:

Test Channel	Test Frequency (MHz)	Channel Separation (MHz)	Limits (MHz)
Lowest	902.3	0.201	0.136
Middle	908.5	0.202	0.139
Highest	914.9	0.200	0.136

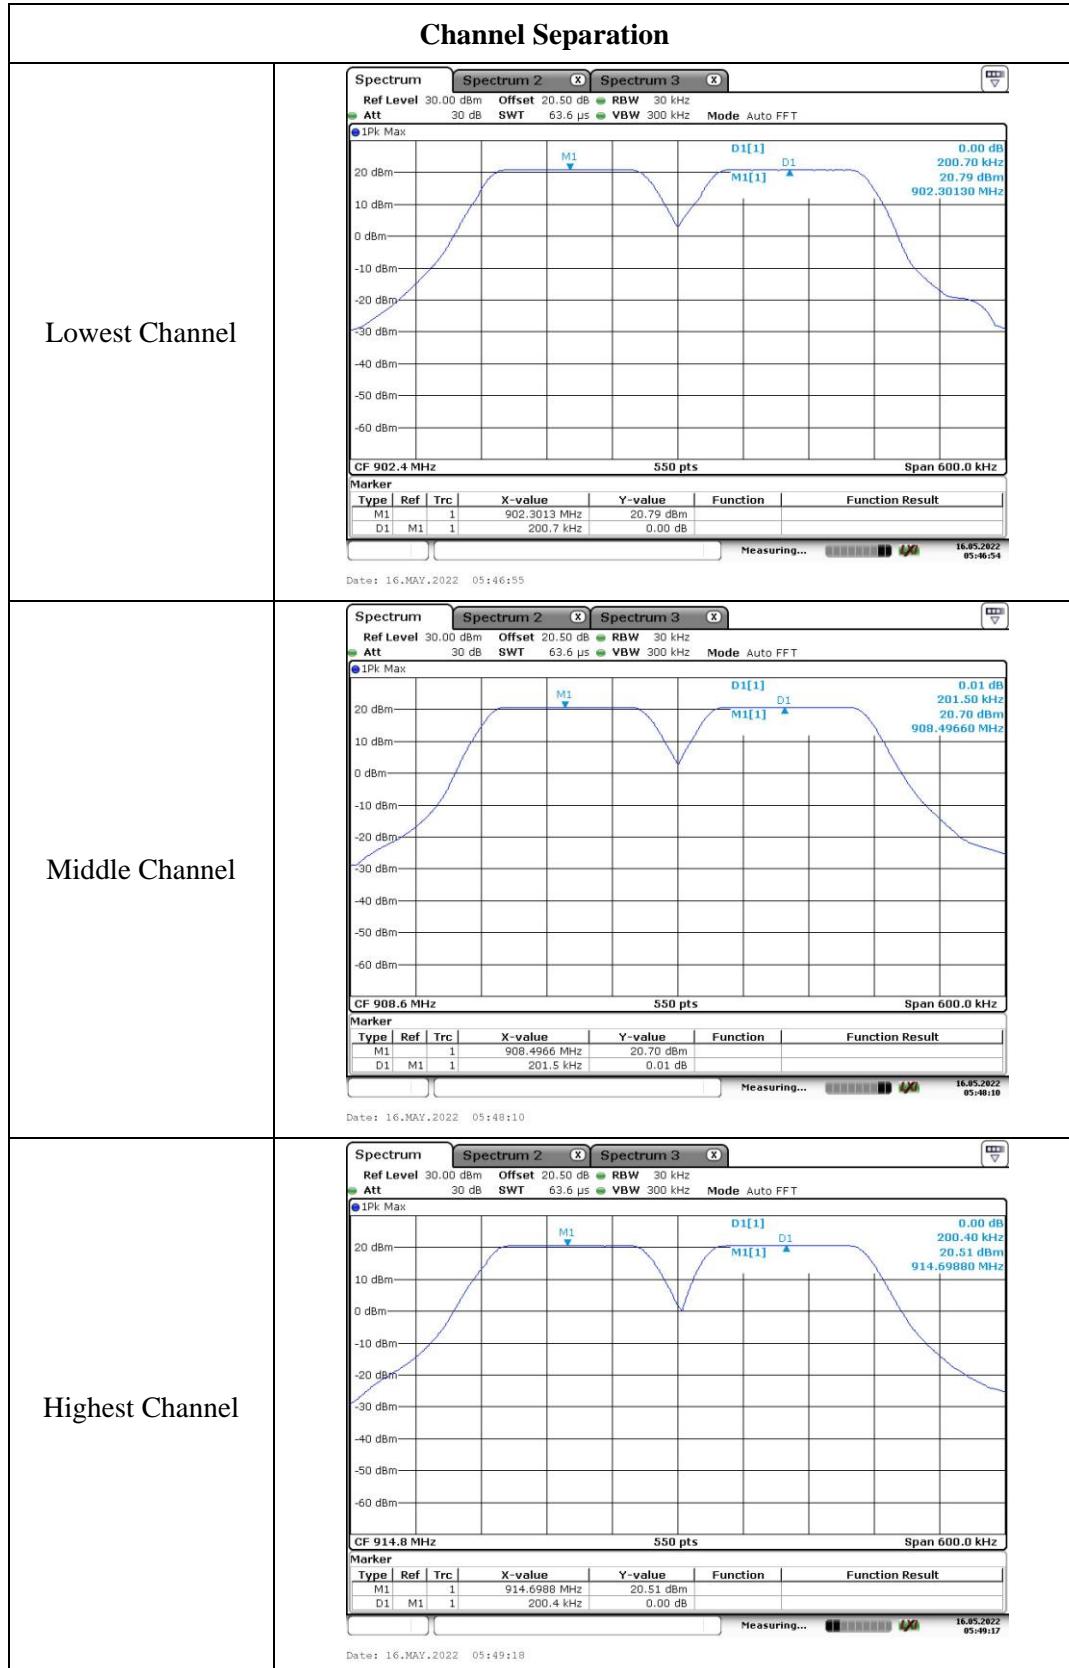

**4.5 Time Of Occupancy(Dwell Time):**

Serial Number:	CR22010018-RF-S1	Test Date:	2022-05-26
Test Site:	RF	Test Mode:	Transmitting
Tester:	Great Qiao	Test Result:	Pass

**Environmental Conditions:**

Temperature: (°C)	26.4	Relative Humidity: (%)	65	ATM Pressure: (kPa)	100.1
-------------------	------	------------------------	----	---------------------	-------

**Test Equipment List and Details:**


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101943	2021-10-10	2022-10-09
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A
Weinschel	Coaxial Attenuators	53-20-34	LN751	2021-08-08	2022-08-07
Mini-Circuits	DC Block	BLK-18-S+	1554403	2021-08-08	2022-08-07

\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data:**

Test Frequency (MHz)	Pulse width (ms)	Observation time (s)	Hopping Numbers in Observation time	Dwell Time (s)	Limit (s)
908.5	73.174	25.6	4	0.293	0.400

Note: Observation time= 0.4s\* channel number = 0.4\*64= 25.6s

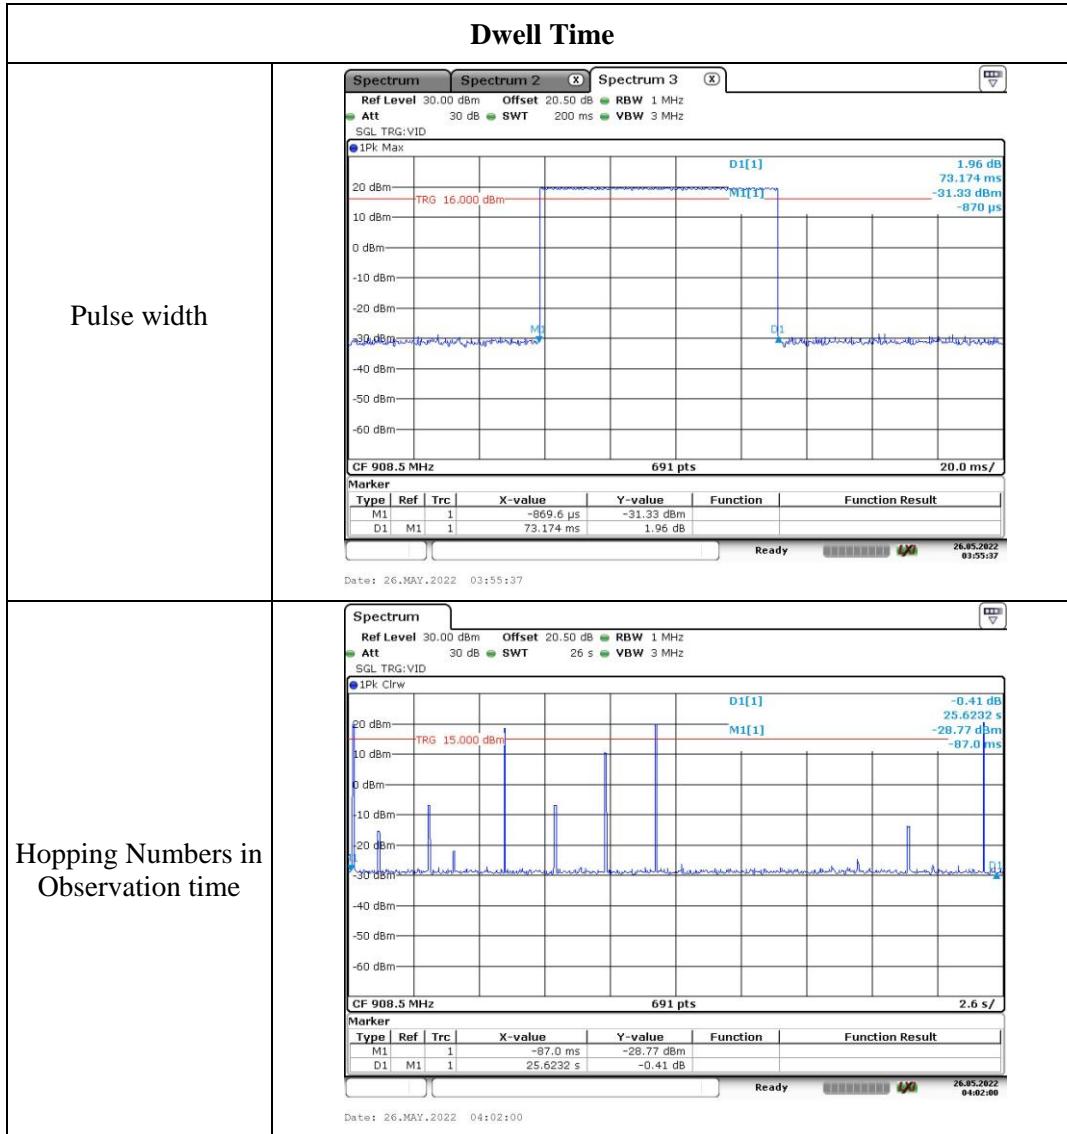

#### 4.6 Peak Conducted Output Power:

Serial Number:	CR22010018-RF-S1	Test Date:	2022-05-16
Test Site:	RF	Test Mode:	Transmitting
Tester:	Great Qiao	Test Result:	Pass

#### Environmental Conditions:

Temperature: (°C)	25.9	Relative Humidity: (%)	58	ATM Pressure: (kPa)	100.2
-------------------	------	------------------------	----	---------------------	-------

#### Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	USB Wideband Power Sensor	U2021XA	MY54080015	2021-07-22	2022-07-21
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	2021-08-08	2022-08-07

\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

#### Test Data:

Test Channel	Test Frequency (MHz)	Average Conducted Output Power (dBm)	Limits (dBm)
Lowest	902.3	20.83	30
Middle	908.5	20.81	30
Highest	914.9	20.61	30

**4.7 100 kHz Bandwidth of Frequency Band Edge:**

Serial Number:	CR22010018-RF-S1	Test Date:	2022-05-16~2022-05-17
Test Site:	RF	Test Mode:	Transmitting
Tester:	Great Qiao	Test Result:	Pass

**Environmental Conditions:**


Temperature: (°C)	25.3~25.9	Relative Humidity: (%)	55~58	ATM Pressure: (kPa)	100.2
-------------------	-----------	------------------------	-------	---------------------	-------


**Test Equipment List and Details:**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101943	2021-10-10	2022-10-09
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A
Weinschel	Coaxial Attenuators	53-20-34	LN751	2021-08-08	2022-08-07
Mini-Circuits	DC Block	BLK-18-S+	1554403	2021-08-08	2022-08-07

\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data:**

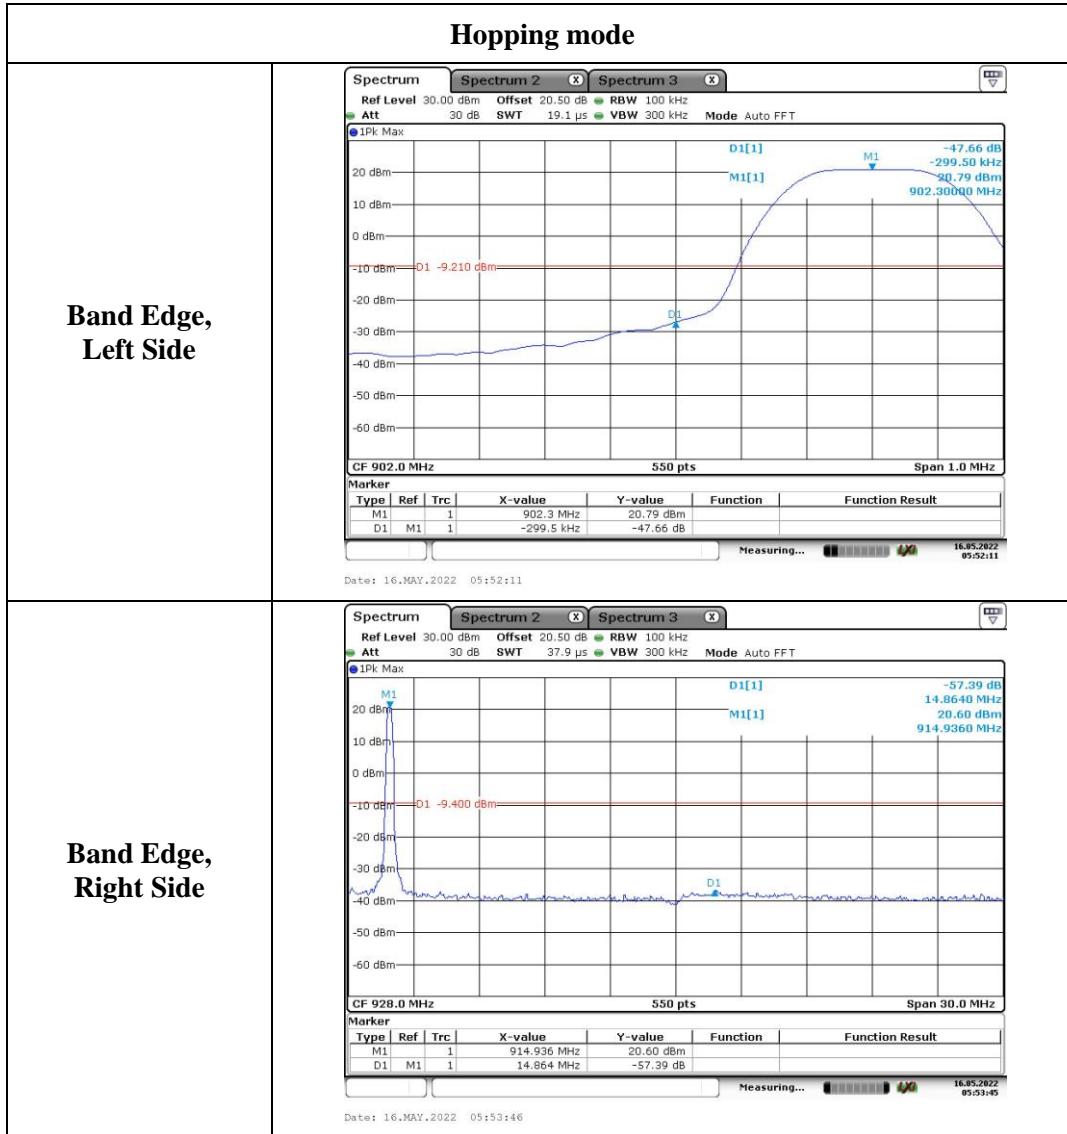

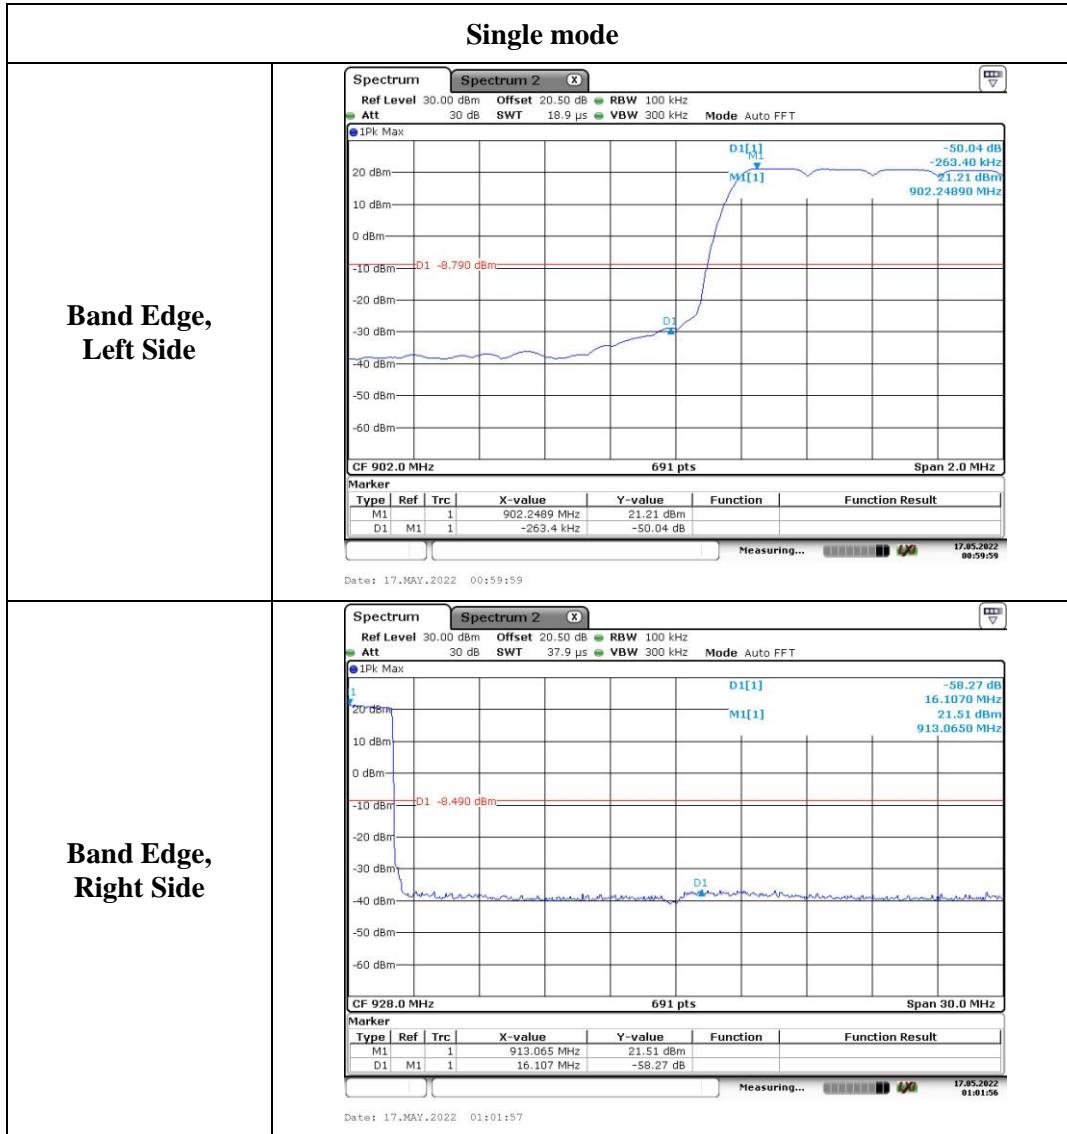

**4.8 Maximum power spectral density:**

Serial Number:	CR22010018-RF-S1	Test Date:	2022-05-16
Test Site:	RF	Test Mode:	Transmitting
Tester:	Great Qiao	Test Result:	Pass

**Environmental Conditions:**

Temperature: (°C)	25.9	Relative Humidity: (%)	58	ATM Pressure: (kPa)	100.2
-------------------	------	------------------------	----	---------------------	-------


**Test Equipment List and Details:**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101943	2021-10-10	2022-10-09
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A
Weinschel	Coaxial Attenuators	53-20-34	LN751	2021-08-08	2022-08-07
Mini-Circuits	DC Block	BLK-18-S+	1554403	2021-08-08	2022-08-07

\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data:**

Test Channel	Test Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)
Lowest	902.3	6.36	≤8.00
Middle	908.5	6.22	≤8.00
Highest	914.9	6.00	≤8.00

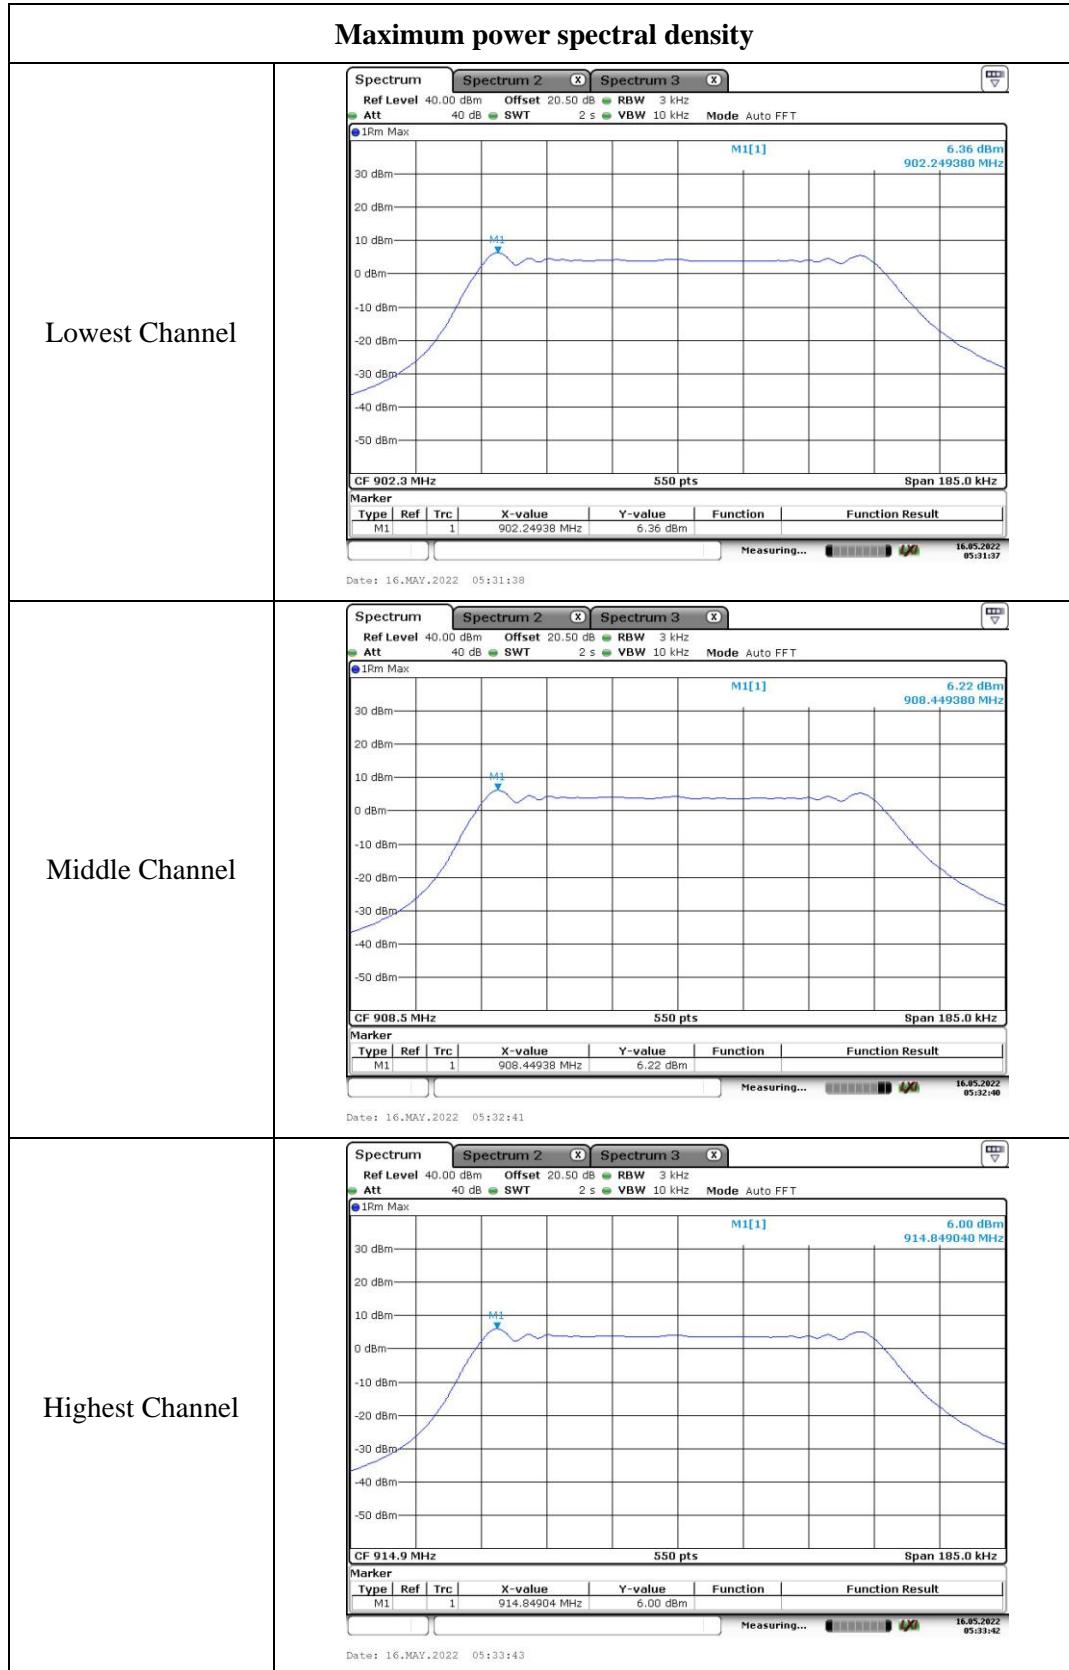

#### 4.9 Duty Cycle:

Serial Number:	CR22010018-RF-S1	Test Date:	2022-05-16
Test Site:	RF	Test Mode:	Transmitting
Tester:	Great Qiao	Test Result:	N/A

#### Environmental Conditions:

Temperature: (°C)	25.9	Relative Humidity: (%)	58	ATM Pressure: (kPa)	100.2
-------------------	------	------------------------	----	---------------------	-------


#### Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101943	2021-10-10	2022-10-09
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A
Weinschel	Coaxial Attenuators	53-20-34	LN751	2021-08-08	2022-08-07
Mini-Circuits	DC Block	BLK-18-S+	1554403	2021-08-08	2022-08-07

\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

#### Test Data:

Test Frequency (MHz)	Ton (ms)	Ton+off (ms)	Duty cycle (%)
908.5	31.739	39.130	81.11

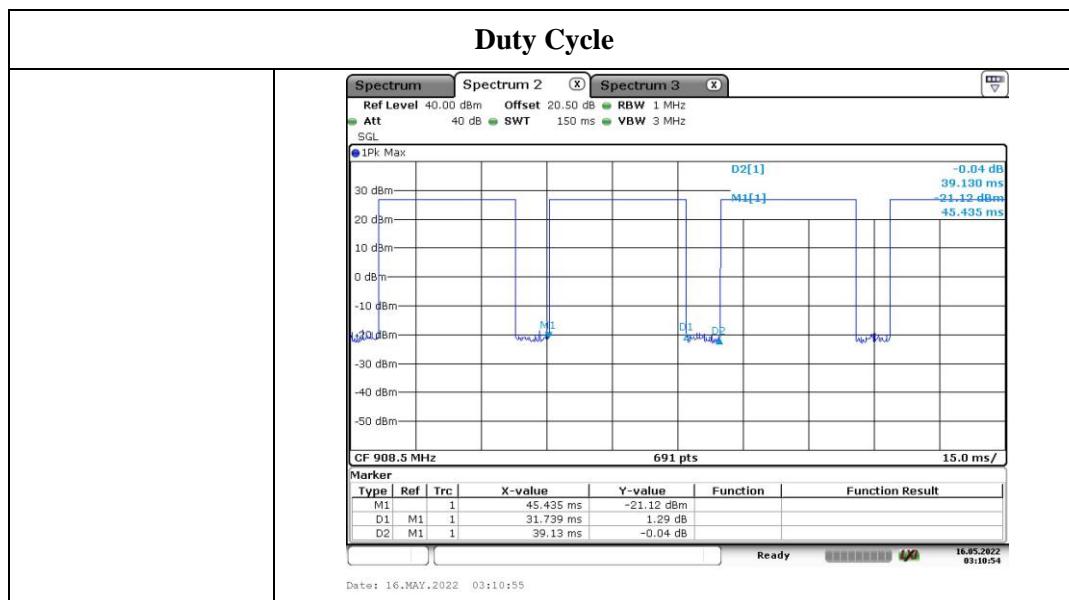

## 5. RF EXPOSURE EVALUATION

### 5.1 Applicable Standard

FCC §15.247 (i)

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See §1.1307(b)(1) of this chapter.

### 5.2 Procedure

According to §1.1307(b)(3)(i)

(B) Or the available maximum time-averaged power or effective radiated power (ERP), whichever is greater, is less than or equal to the threshold  $P_{th}$  (mW) described in the following formula. This method shall only be used at separation distances (cm) from 0.5 centimeters to 40 centimeters and at frequencies from 0.3 GHz to 6 GHz (inclusive).  $P_{th}$  is given by:

$$P_{th} \text{ (mW)} = \begin{cases} ERP_{20 \text{ cm}}(d/20 \text{ cm})^x & d \leq 20 \text{ cm} \\ ERP_{20 \text{ cm}} & 20 \text{ cm} < d \leq 40 \text{ cm} \end{cases}$$

Where

$$x = -\log_{10} \left( \frac{60}{ERP_{20 \text{ cm}} \sqrt{f}} \right) \text{ and } f \text{ is in GHz;}$$

and

$$ERP_{20 \text{ cm}} \text{ (mW)} = \begin{cases} 2040f & 0.3 \text{ GHz} \leq f < 1.5 \text{ GHz} \\ 3060 & 1.5 \text{ GHz} \leq f \leq 6 \text{ GHz} \end{cases}$$

$d$  = the separation distance (cm);

### 5.3 Measurement Result

Radio	Frequency (MHz)	Distance (mm)	P <sub>th</sub>		Maximum Conducted Power including Tune-up Tolerance (dBm)	Antenna Gain (dBi)	ERP (dBm)	Exemption
			(mW)	(dBm)				
Lora-Hybrid	902.3-914.9	200	1841	<b>32.65</b>	21	2.44	<b>21.29</b>	Compliant
Lora-DTS	923.3-927.5	200	1884	<b>32.75</b>	28	2.44	<b>28.29</b>	Compliant

**Result: The device compliant the Exemption at 20cm distances.**

\*\*\*\*\* END OF REPORT \*\*\*\*\*