


Band Edge(Hopping) NVNT 2-DH1 2402MHz Hopping Ref




Band Edge(Hopping) NVNT 2-DH1 2402MHz Hopping Emission

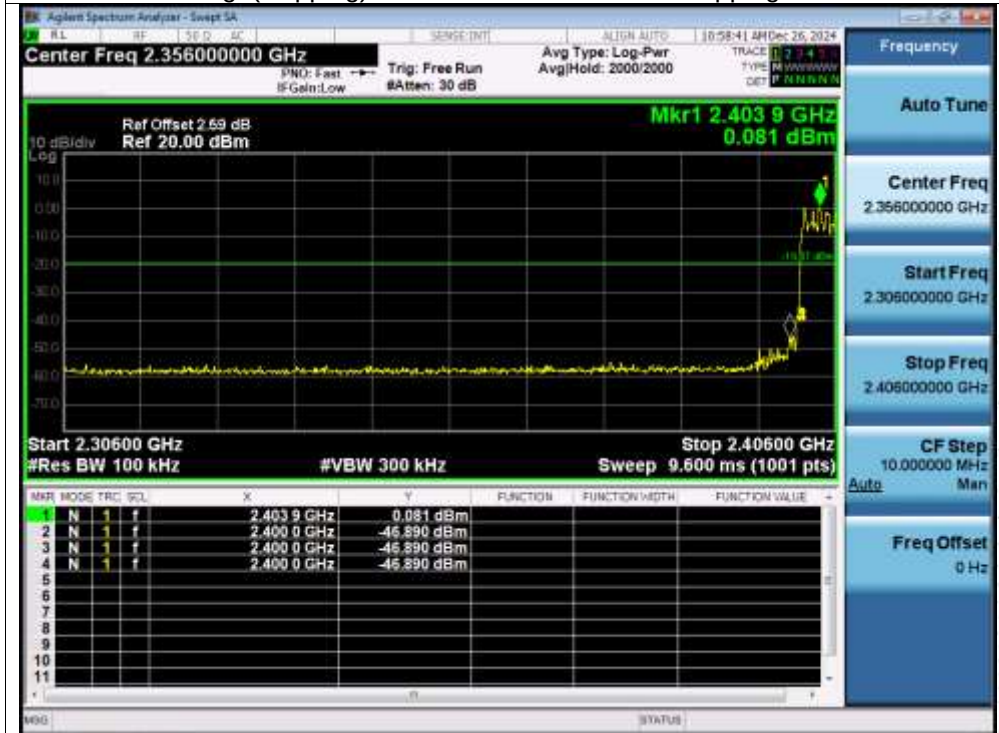

Band Edge(Hopping) NVNT 2-DH1 2480MHz Hopping Ref




Band Edge(Hopping) NVNT 2-DH1 2480MHz Hopping Emission

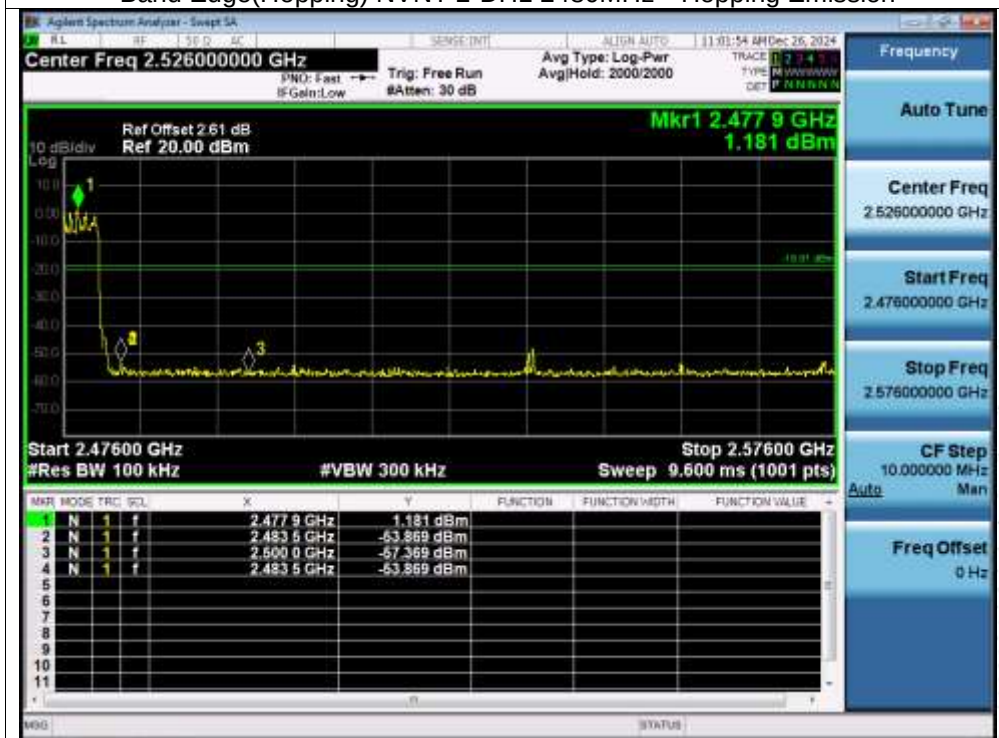

Band Edge(Hopping) NVNT 3-DH1 2402MHz Hopping Ref



Band Edge(Hopping) NVNT 3-DH1 2402MHz Hopping Emission

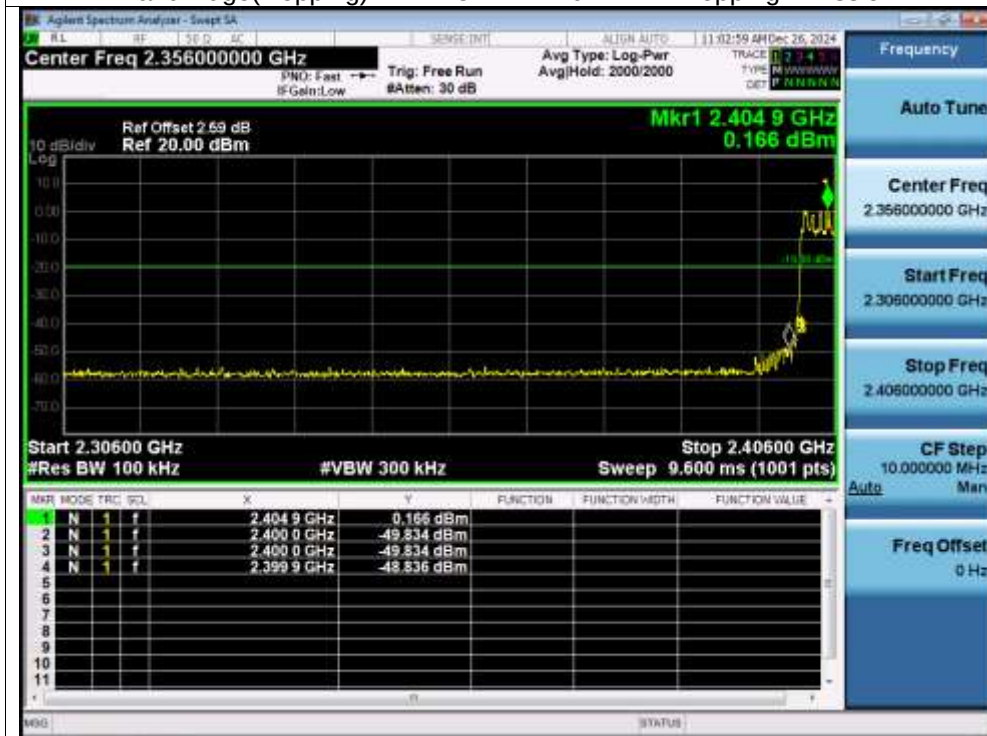




Band Edge(Hopping) NVNT 3-DH1 2480MHz Hopping Ref



Band Edge(Hopping) NVNT 3-DH1 2480MHz Hopping Emission

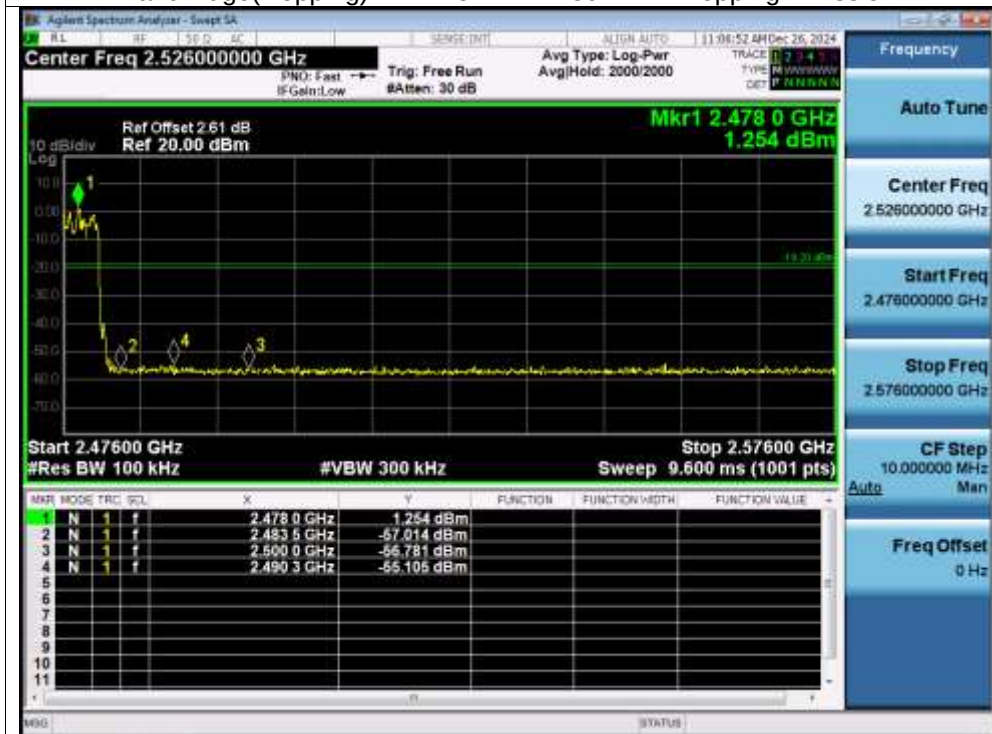

## 10. 20 dB Bandwidth

### 10.1 Block Diagram Of Test Setup



### 10.2 Limit

N/A

### 10.3 Test procedure

1. Set RBW = 30kHz.
2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 10.4 Test Result

|              |        |                    |         |
|--------------|--------|--------------------|---------|
| Temperature: | 26 °C  | Relative Humidity: | 54%RH   |
| Pressure:    | 101KPa | Test Voltage :     | DC 3.8V |


| Condition | Mode  | Frequency (MHz) | -20dB Bandwidth (MHz) | Verdict |
|-----------|-------|-----------------|-----------------------|---------|
| NVNT      | 1-DH1 | 2402            | 0.879                 | Pass    |
| NVNT      | 1-DH1 | 2441            | 0.849                 | Pass    |
| NVNT      | 1-DH1 | 2480            | 0.884                 | Pass    |
| NVNT      | 2-DH1 | 2402            | 1.217                 | Pass    |
| NVNT      | 2-DH1 | 2441            | 1.228                 | Pass    |
| NVNT      | 2-DH1 | 2480            | 1.227                 | Pass    |
| NVNT      | 3-DH1 | 2402            | 1.233                 | Pass    |
| NVNT      | 3-DH1 | 2441            | 1.218                 | Pass    |
| NVNT      | 3-DH1 | 2480            | 1.240                 | Pass    |

### Test Graphs

#### -20dB Bandwidth NVNT 1-DH1 2402MHz




#### -20dB Bandwidth NVNT 1-DH1 2441MHz

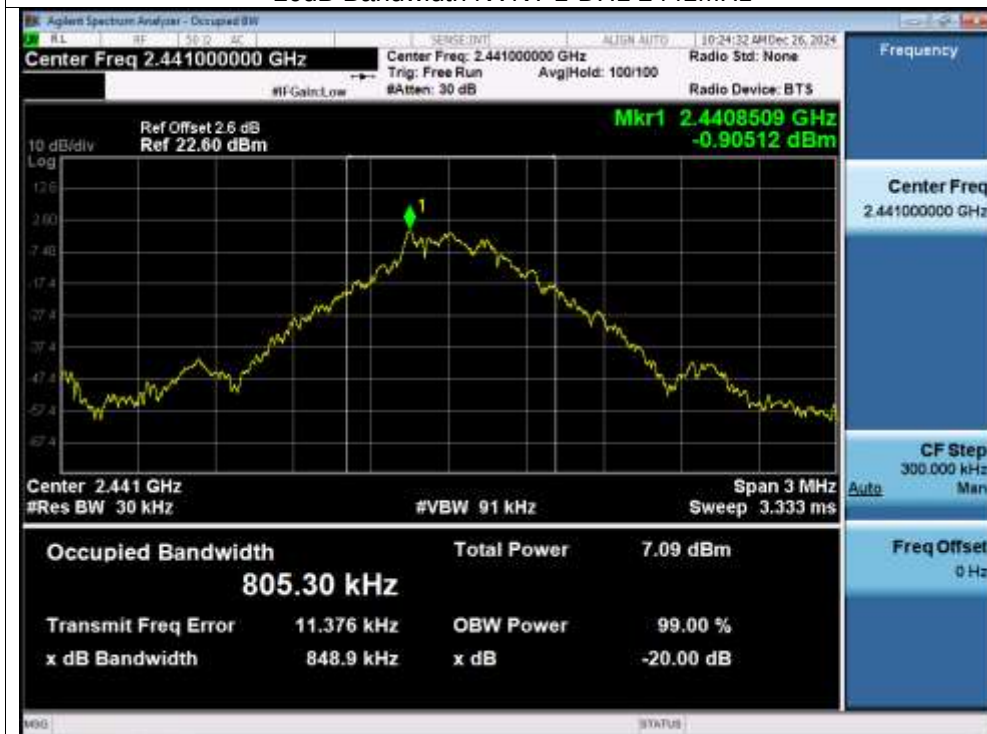

CO.LTD

-20dB Bandwidth NVNT 1-DH1 2480MHz

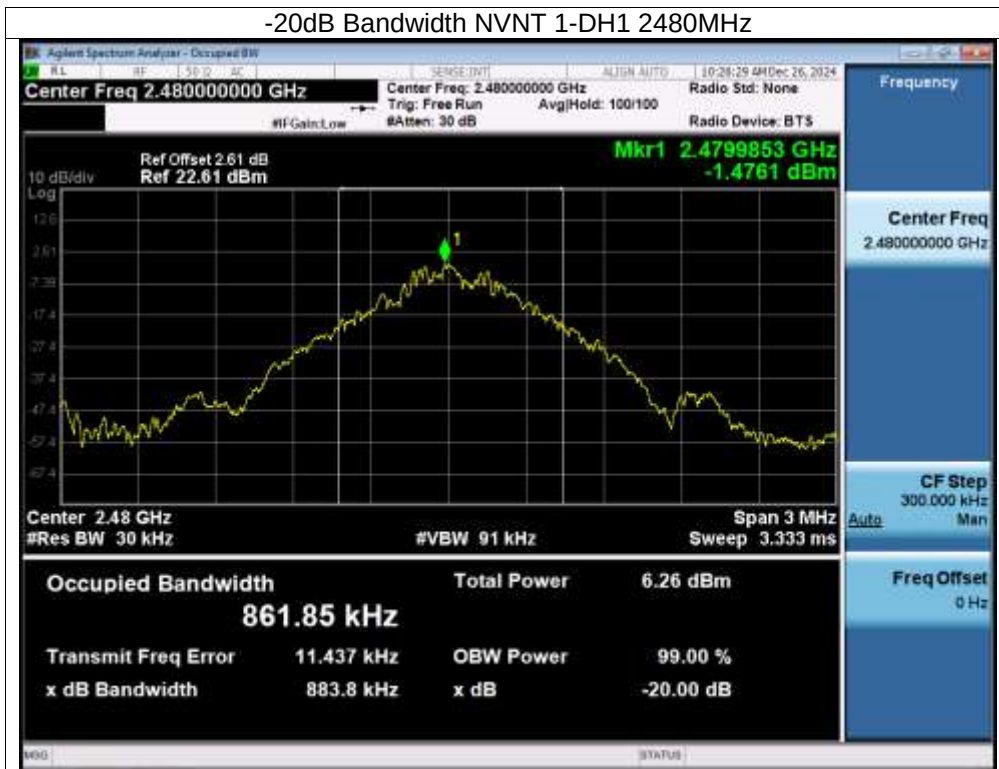


-20dB Bandwidth NVNT 2-DH1 2402MHz






-20dB Bandwidth NVNT 2-DH1 2441MHz

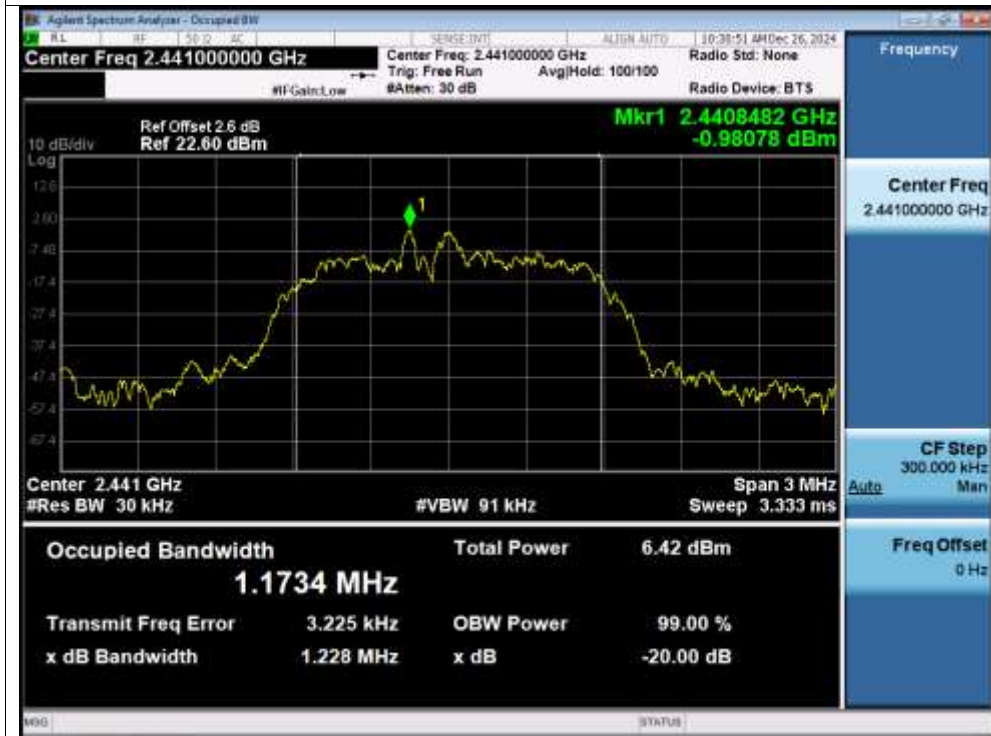

-20dB Bandwidth NVNT 2-DH1 2480MHz

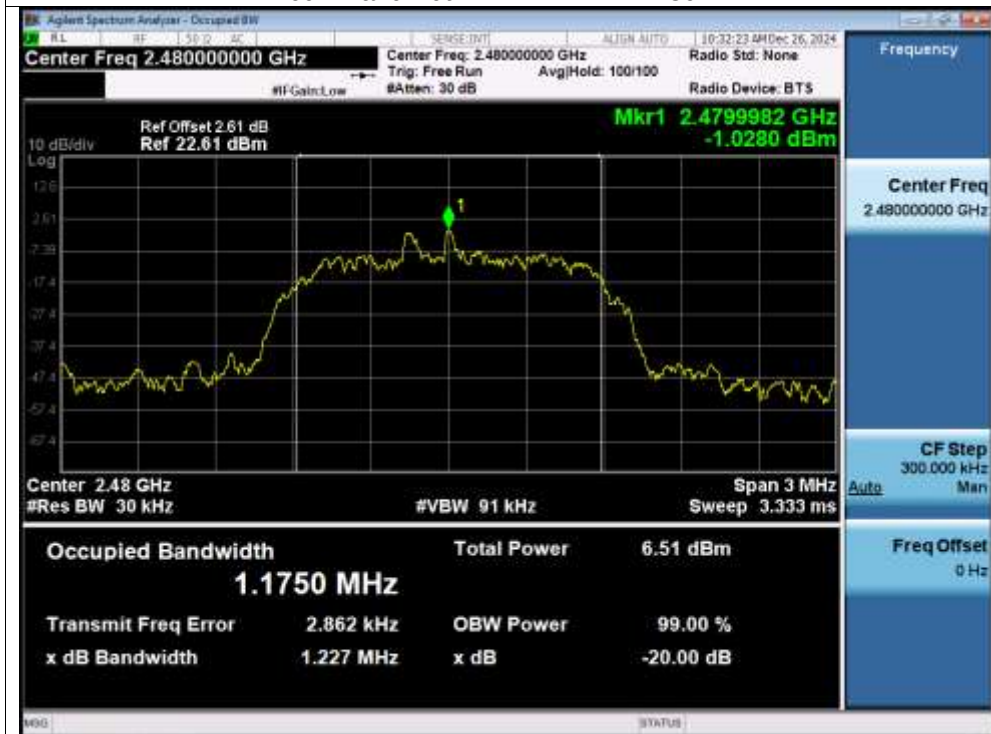




-20dB Bandwidth NVNT 3-DH1 2402MHz



-20dB Bandwidth NVNT 3-DH1 2441MHz

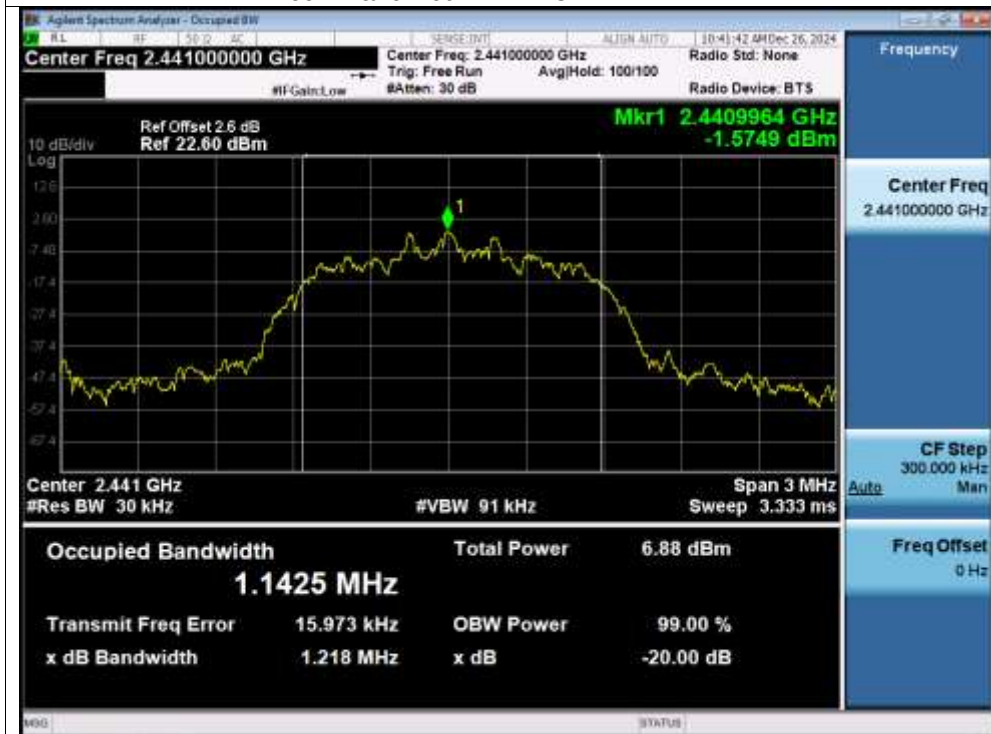



TE  
TO  
OVB  
t Sea

## 11. Maximum Peak Output Power

### 11.1 Block Diagram Of Test Setup



### 11.2 Limit

| FCC Part15 (15.247) , Subpart C |                   |                     |                       |        |
|---------------------------------|-------------------|---------------------|-----------------------|--------|
| Section                         | Test Item         | Limit               | Frequency Range (MHz) | Result |
| 15.247(b)(1)                    | Peak Output Power | 0.125 watt or 21dBm | 2400-2483.5           | PASS   |

### 11.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 2MHz. VBW = 6MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.


### 11.4 Test Result

|              |        |                    |         |
|--------------|--------|--------------------|---------|
| Temperature: | 26 °C  | Relative Humidity: | 54%RH   |
| Pressure:    | 101KPa | Test Voltage :     | DC 3.8V |


| Condition | Mode  | Frequency (MHz) | Conducted Power (dBm) | Limit (dBm) | Verdict |
|-----------|-------|-----------------|-----------------------|-------------|---------|
| NVNT      | 1-DH1 | 2402            | -0.05                 | 21          | Pass    |
| NVNT      | 1-DH1 | 2441            | 0.63                  | 21          | Pass    |
| NVNT      | 1-DH1 | 2480            | 1.13                  | 21          | Pass    |
| NVNT      | 2-DH1 | 2402            | 0.87                  | 21          | Pass    |
| NVNT      | 2-DH1 | 2441            | 1.47                  | 21          | Pass    |
| NVNT      | 2-DH1 | 2480            | 1.90                  | 21          | Pass    |
| NVNT      | 3-DH1 | 2402            | 1.44                  | 21          | Pass    |
| NVNT      | 3-DH1 | 2441            | 2.00                  | 21          | Pass    |
| NVNT      | 3-DH1 | 2480            | 2.41                  | 21          | Pass    |

### Test Graphs

#### Power NVNT 1-DH1 2402MHz

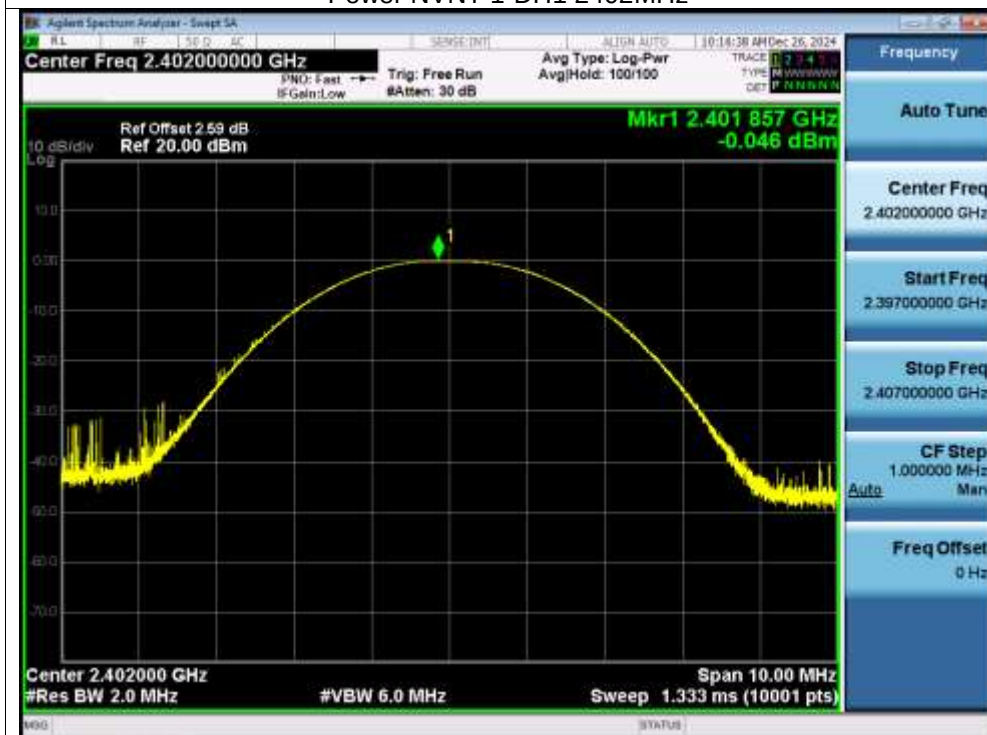

#### Power NVNT 1-DH1 2441MHz

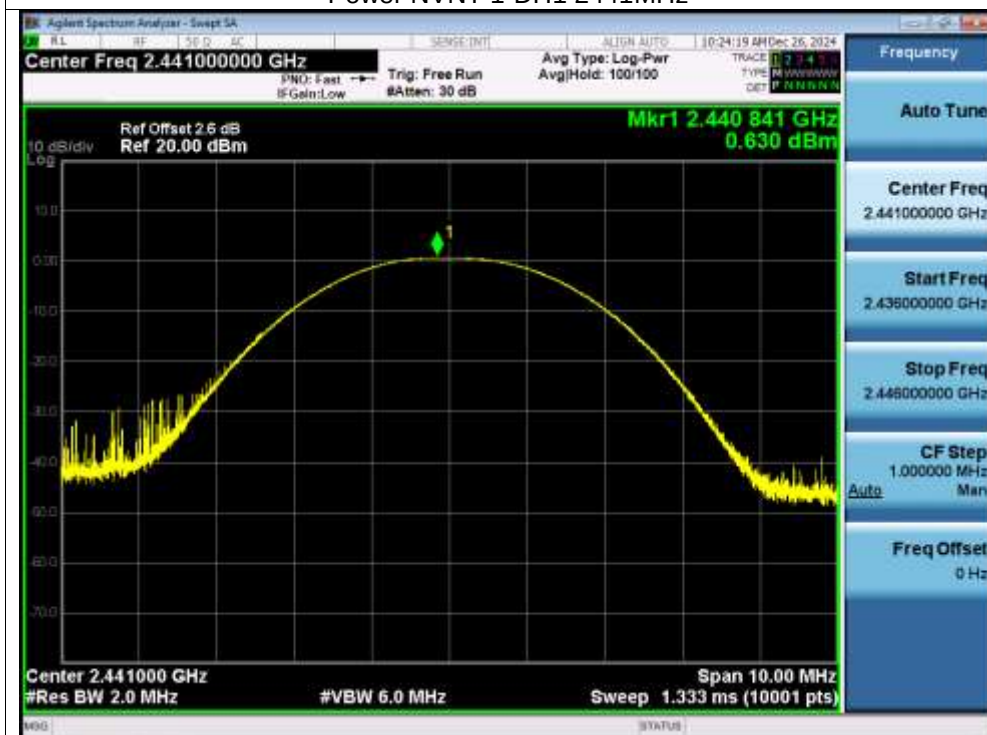

CO. LTD



Power NVNT 1-DH1 2480MHz




Power NVNT 2-DH1 2402MHz




CHENZHEN


Power NVNT 2-DH1 2441MHz

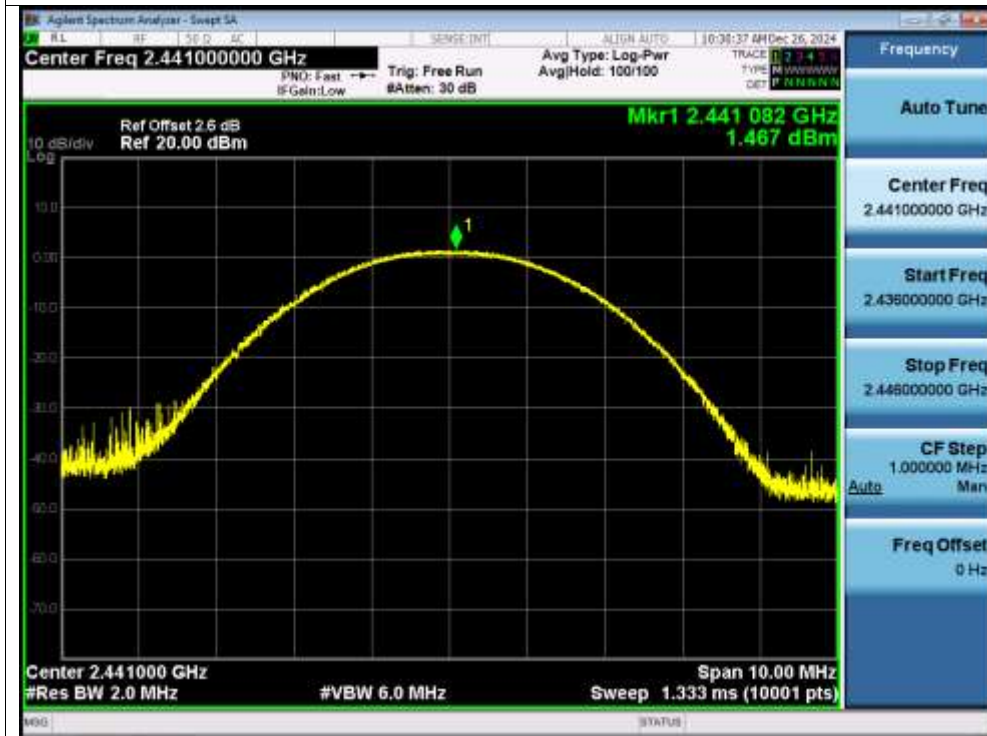

Power NVNT 2-DH1 2480MHz

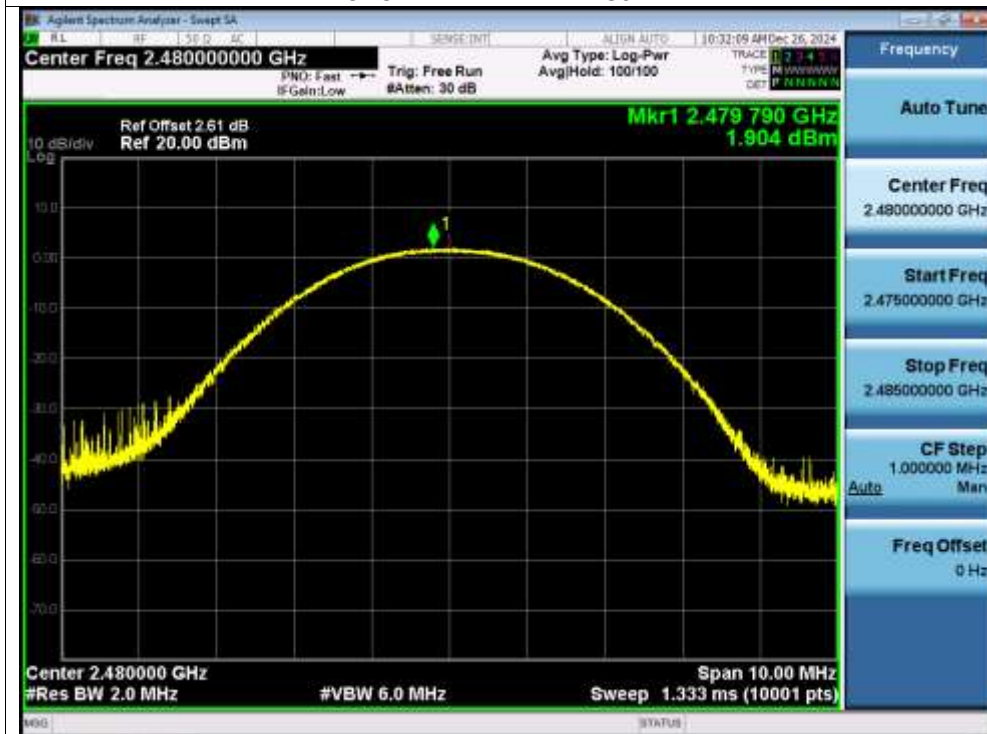

Power NVNT 3-DH1 2402MHz

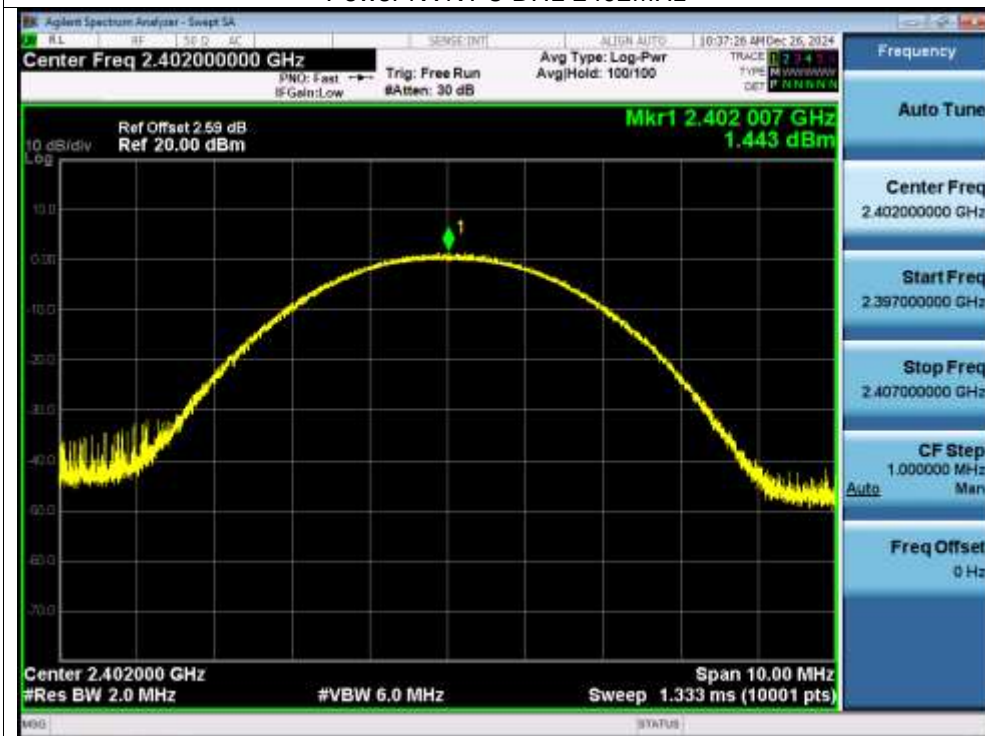

Power NVNT 3-DH1 2441MHz







## 12. Hopping Channel Separation

### 12.1 Block Diagram Of Test Setup



### 12.2 Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.

### 12.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30kHz. VBW = 100kHz , Span = 2.0MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

### 12.4 Test Result

| Mode  | Test Channel | Separation (MHz) | Limit(MHz) | Result |
|-------|--------------|------------------|------------|--------|
| 1-DH1 | Low          | 1.000            | 0.586      | PASS   |
| 1-DH1 | Middle       | 0.998            | 0.344      | PASS   |
| 1-DH1 | High         | 1.000            | 0.589      | PASS   |
| 2-DH1 | Low          | 1.000            | 0.811      | PASS   |
| 2-DH1 | Middle       | 0.996            | 0.819      | PASS   |
| 2-DH1 | High         | 1.000            | 0.818      | PASS   |
| 3-DH1 | Low          | 1.004            | 0.822      | PASS   |
| 3-DH1 | Middle       | 1.002            | 0.812      | PASS   |
| 3-DH1 | High         | 1.002            | 0.827      | PASS   |

### Test Graphs

#### CFS NVNT 1-DH1 2402MHz



#### CFS NVNT 1-DH1 2441MHz




CO., LTD.


CFS NVNT 1-DH1 2480MHz




CFS NVNT 2-DH1 2402MHz

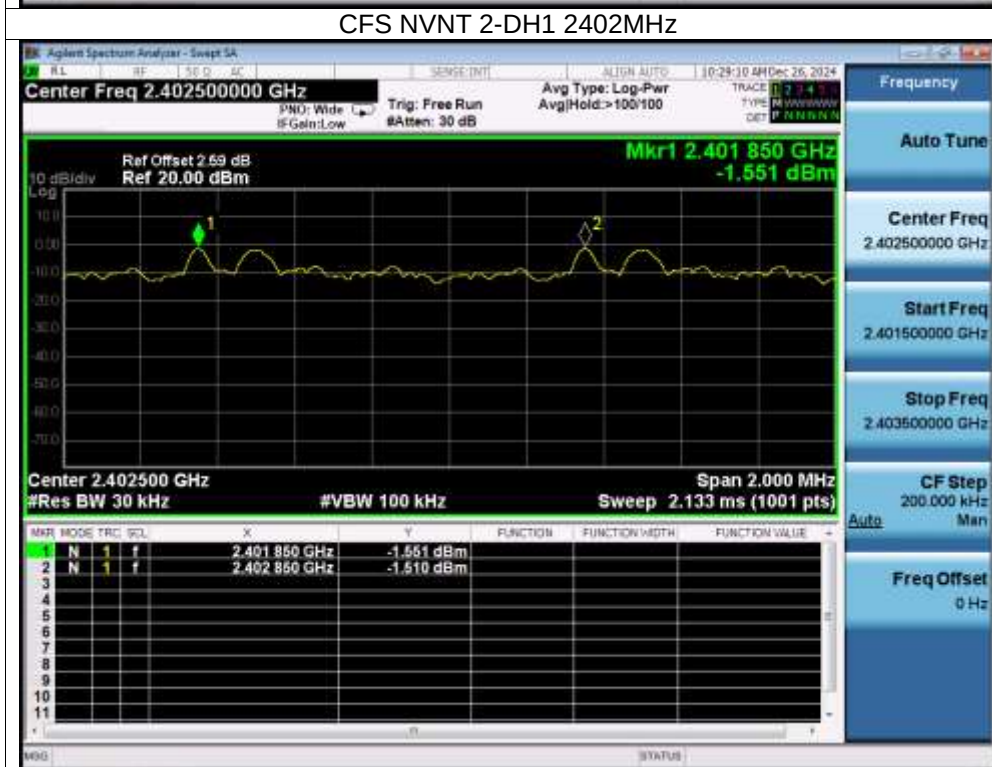

CFS NVNT 2-DH1 2441MHz

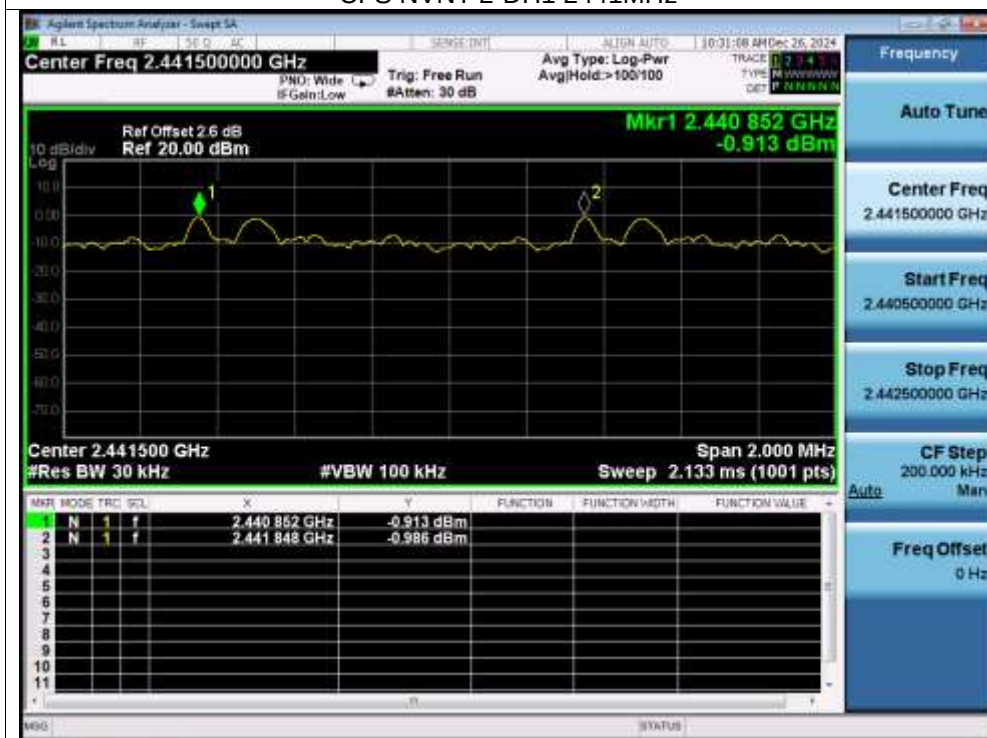


CFS NVNT 2-DH1 2480MHz

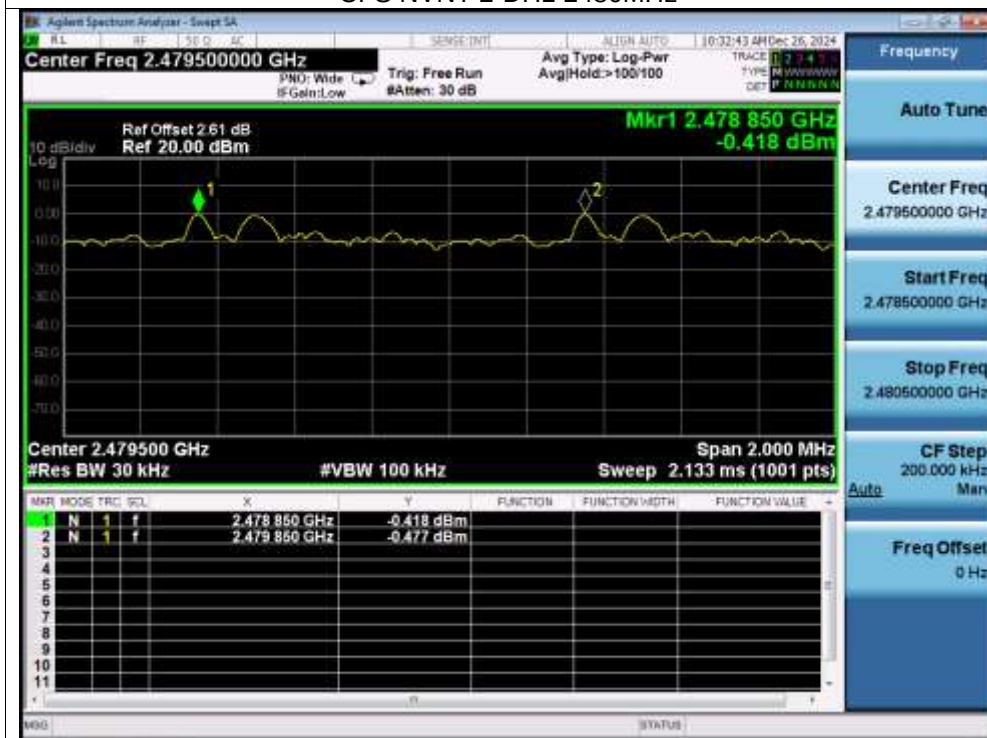





CFS NVNT 3-DH1 2402MHz

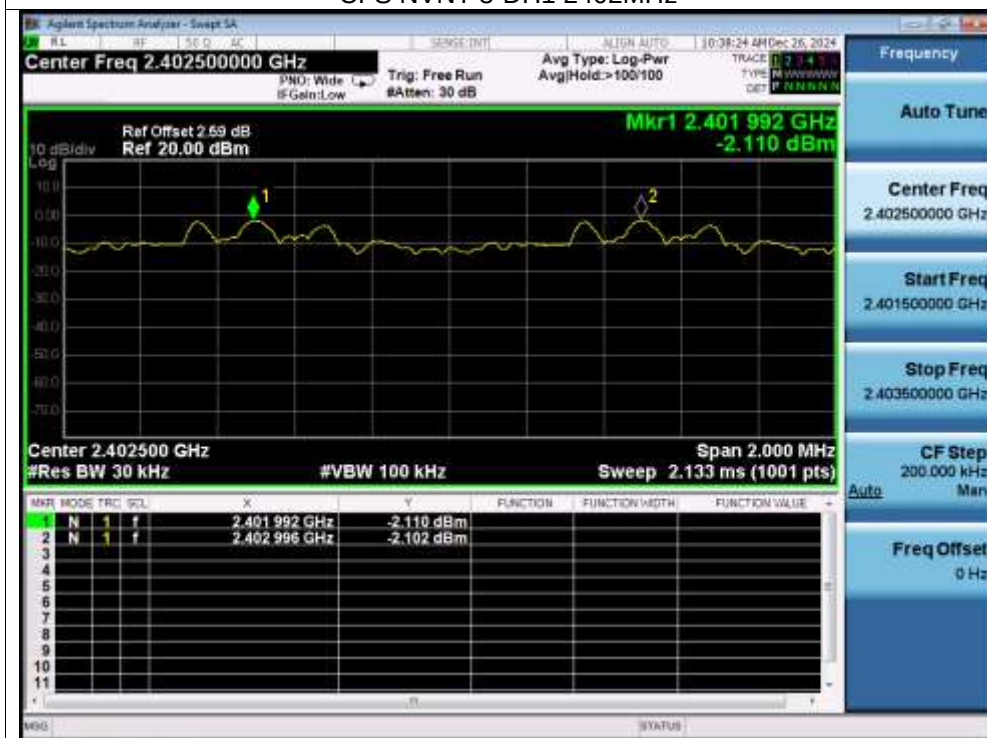


CFS NVNT 3-DH1 2441MHz

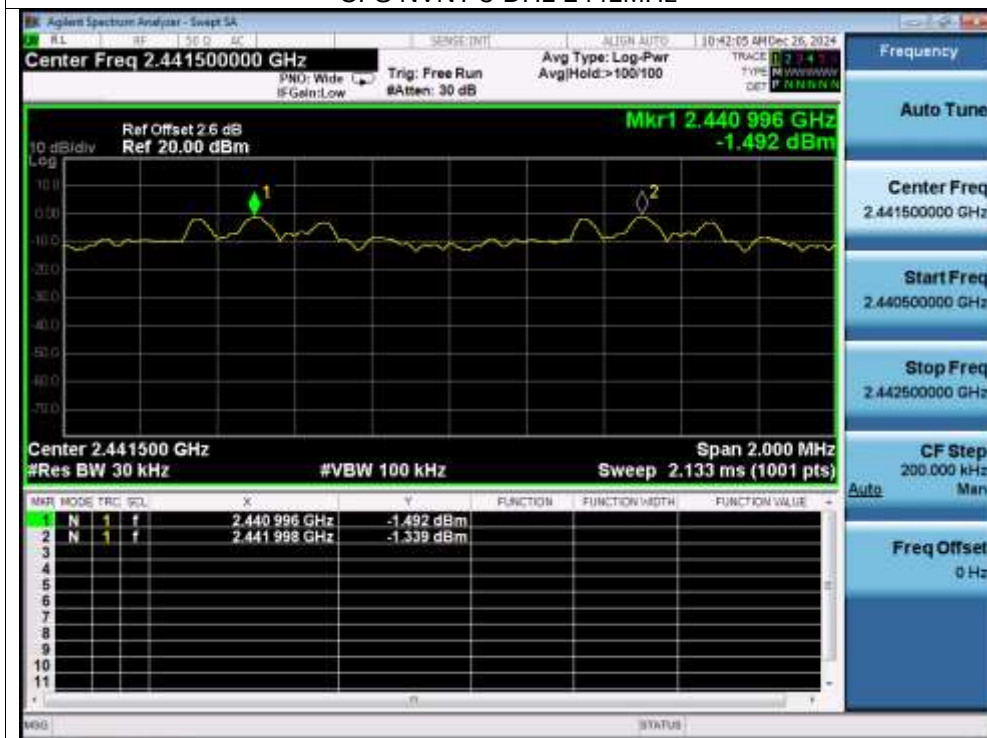

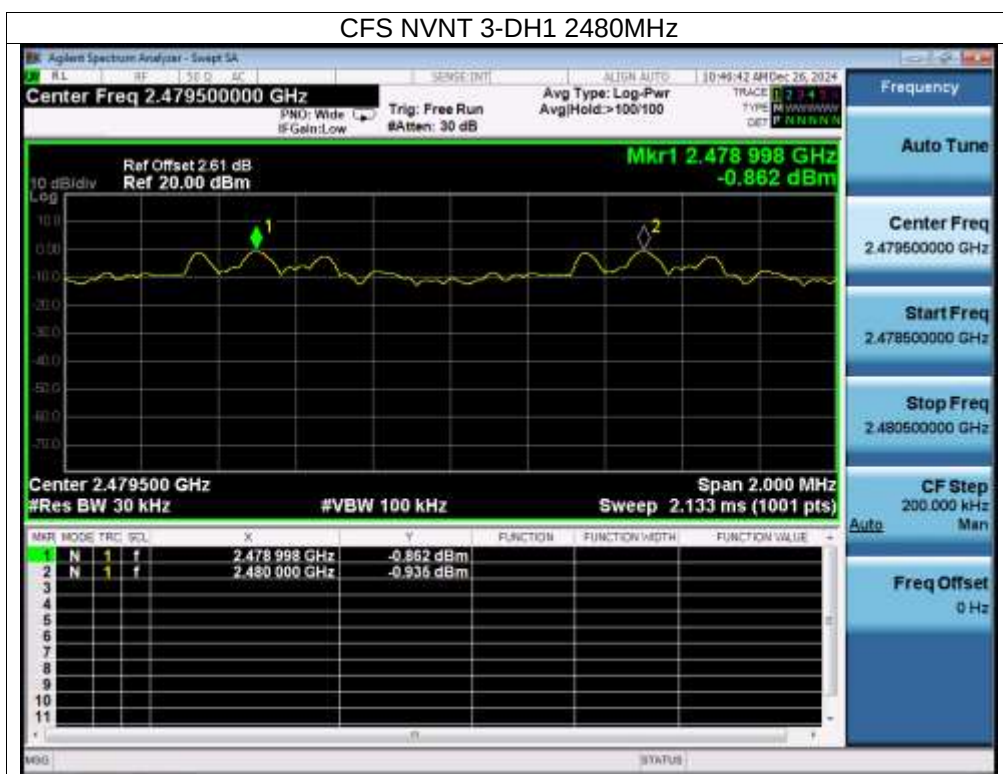

### 13. Number Of Hopping Frequency

#### 13.1 Block Diagram Of Test Setup

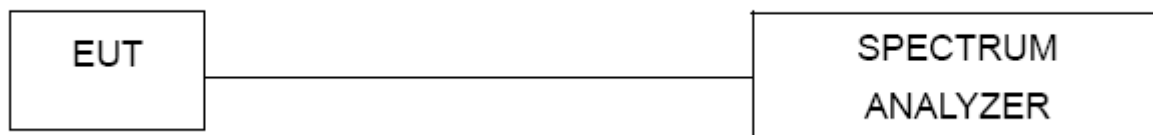

#### 13.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


#### 13.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;


#### 13.4 Test Result

| Condition | Mode  | Hopping Number | Limit | Verdict |
|-----------|-------|----------------|-------|---------|
| NVNT      | 1-DH1 | 79             | 15    | Pass    |
| NVNT      | 2-DH1 | 79             | 15    | Pass    |
| NVNT      | 3-DH1 | 79             | 15    | Pass    |

Test Graphs  
Hopping No. NVNT 1-DH1 2441MHz

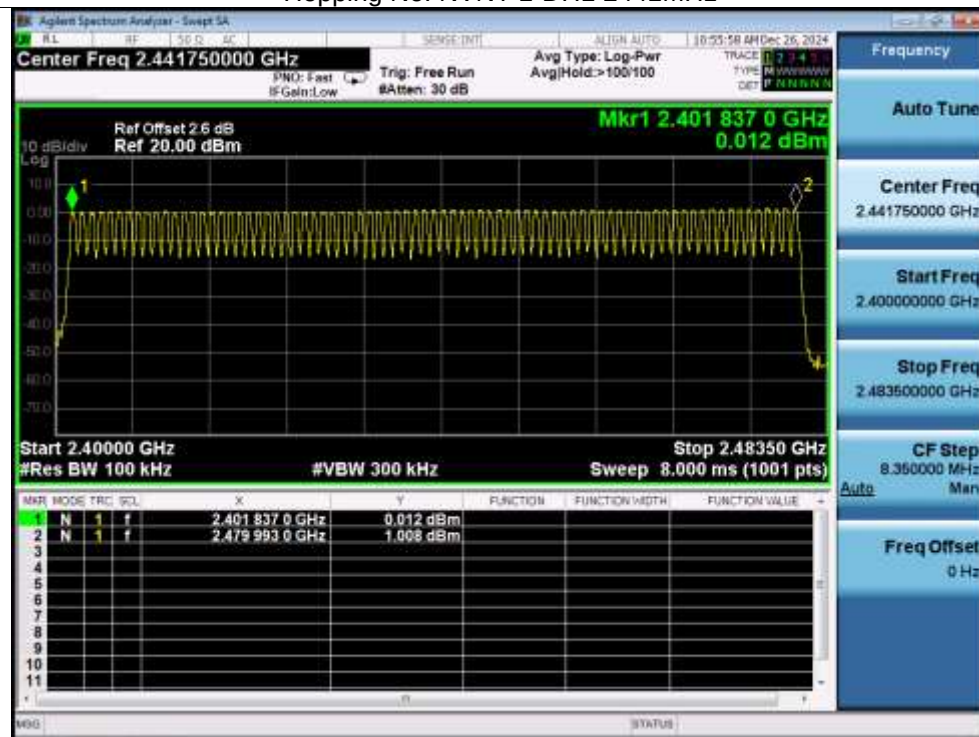


Hopping No. NVNT 2-DH1 2441MHz

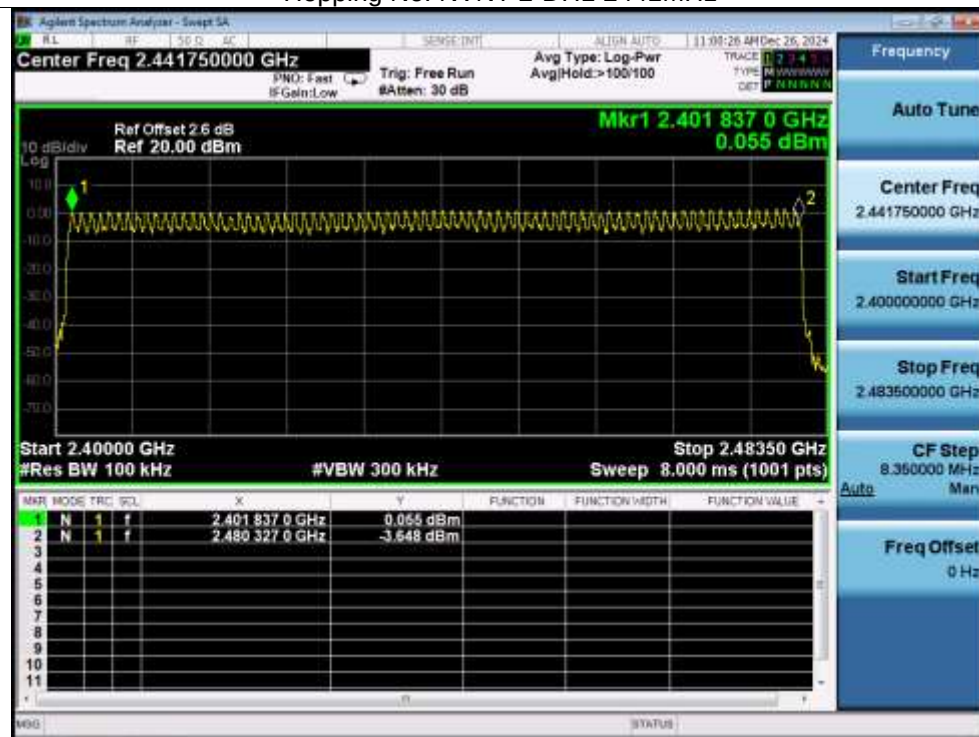




Hopping No. NVNT 3-DH1 2441MHz

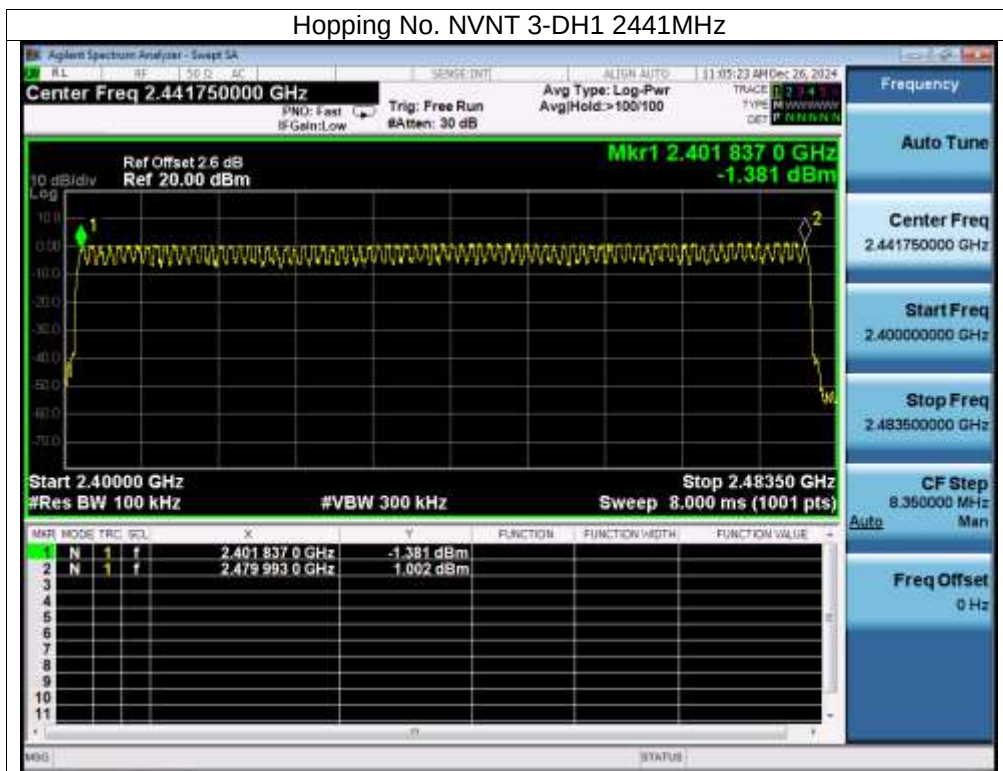

SHENZHEN

## 14. Dwell Time

### 14.1 Block Diagram Of Test Setup

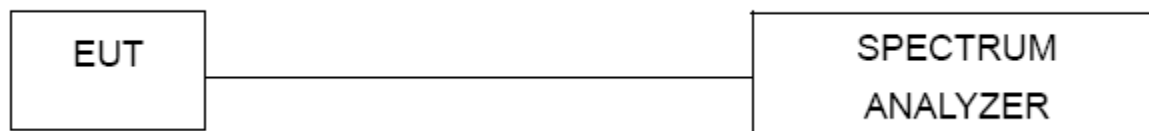

### 14.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### 14.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).


### 14.4 Test Result

| Mode  | Frequency (MHz) | Pulse Time (ms) | Total Dwell Time (ms) | Burst Count | Period Time (ms) | Limit (ms) | Verdict |
|-------|-----------------|-----------------|-----------------------|-------------|------------------|------------|---------|
| 1-DH1 | 2441            | 0.382           | 121.094               | 317         | 31600            | 400        | Pass    |
| 1-DH3 | 2441            | 1.637           | 255.372               | 156         | 31600            | 400        | Pass    |
| 1-DH5 | 2441            | 2.886           | 352.092               | 122         | 31600            | 400        | Pass    |
| 2-DH1 | 2441            | 0.391           | 124.338               | 318         | 31600            | 400        | Pass    |
| 2-DH3 | 2441            | 1.642           | 249.584               | 152         | 31600            | 400        | Pass    |
| 2-DH5 | 2441            | 2.886           | 308.802               | 107         | 31600            | 400        | Pass    |
| 3-DH1 | 2441            | 0.391           | 124.729               | 319         | 31600            | 400        | Pass    |
| 3-DH3 | 2441            | 1.641           | 269.124               | 164         | 31600            | 400        | Pass    |
| 3-DH5 | 2441            | 2.894           | 332.81                | 115         | 31600            | 400        | Pass    |


Note: Total Dwell Time (ms) = Pulse Time (ms)\*Burst Count

### Test Graphs


#### Dwell NVNT 1-DH1 2441MHz One Burst

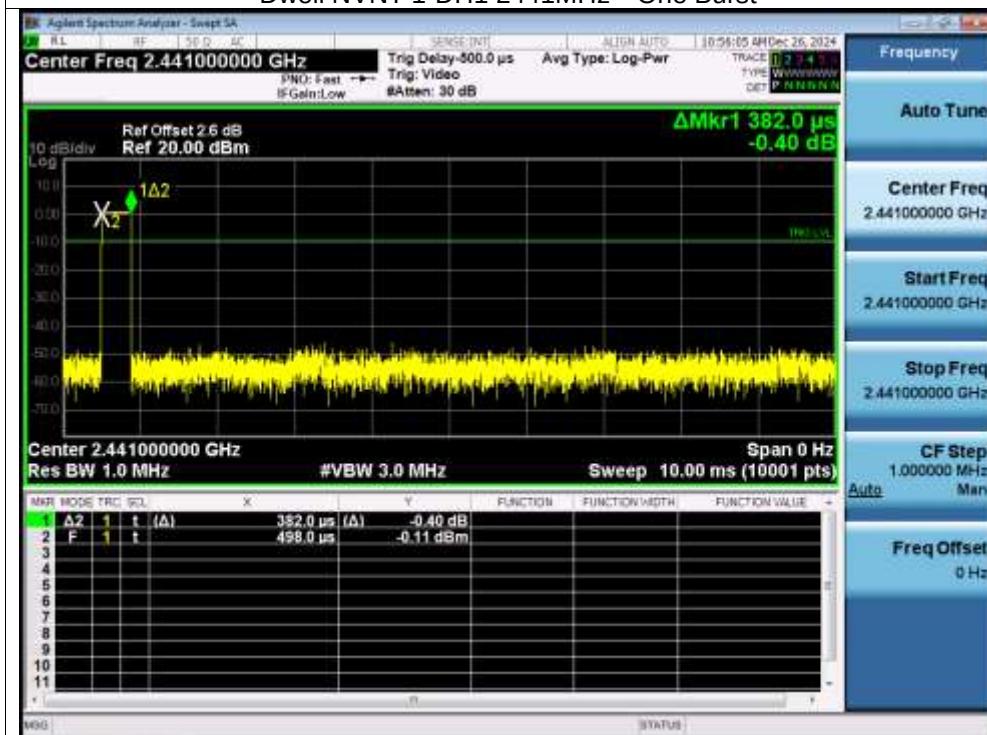


#### Dwell NVNT 1-DH1 2441MHz Accumulated

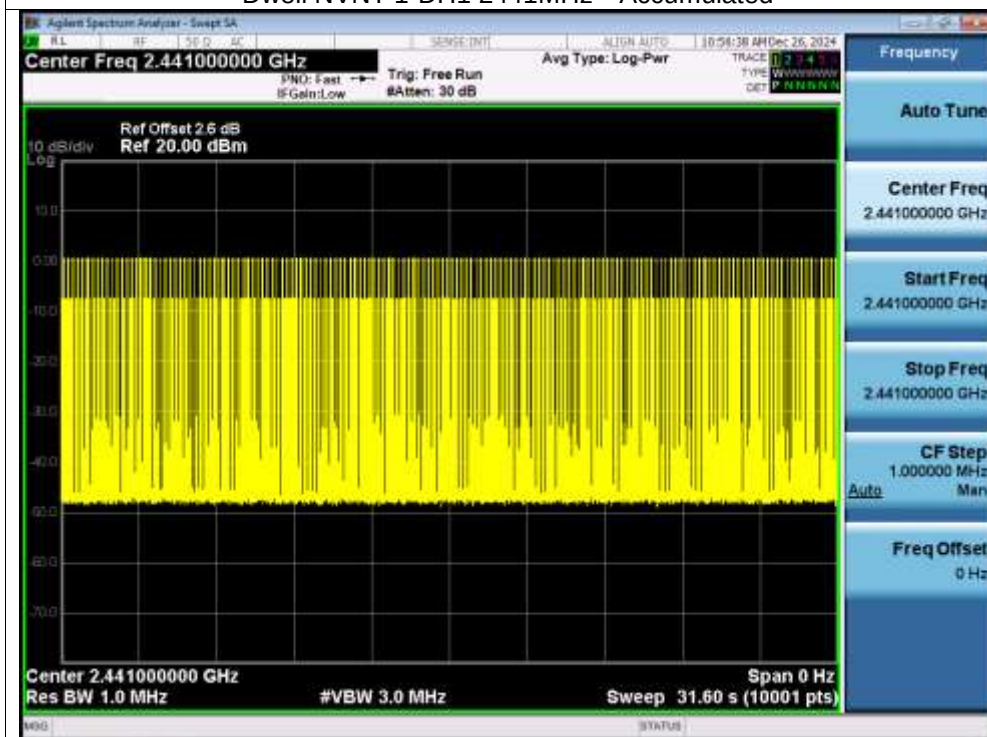

Dwell NVNT 1-DH3 2441MHz One Burst

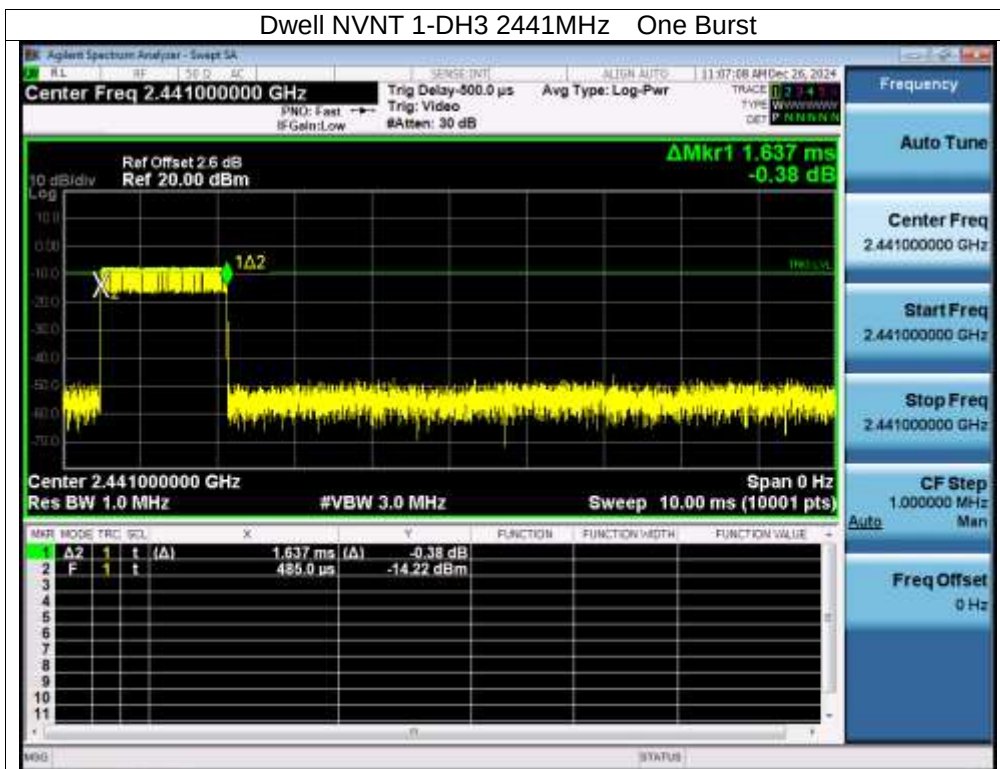


Dwell NVNT 1-DH3 2441MHz Accumulated

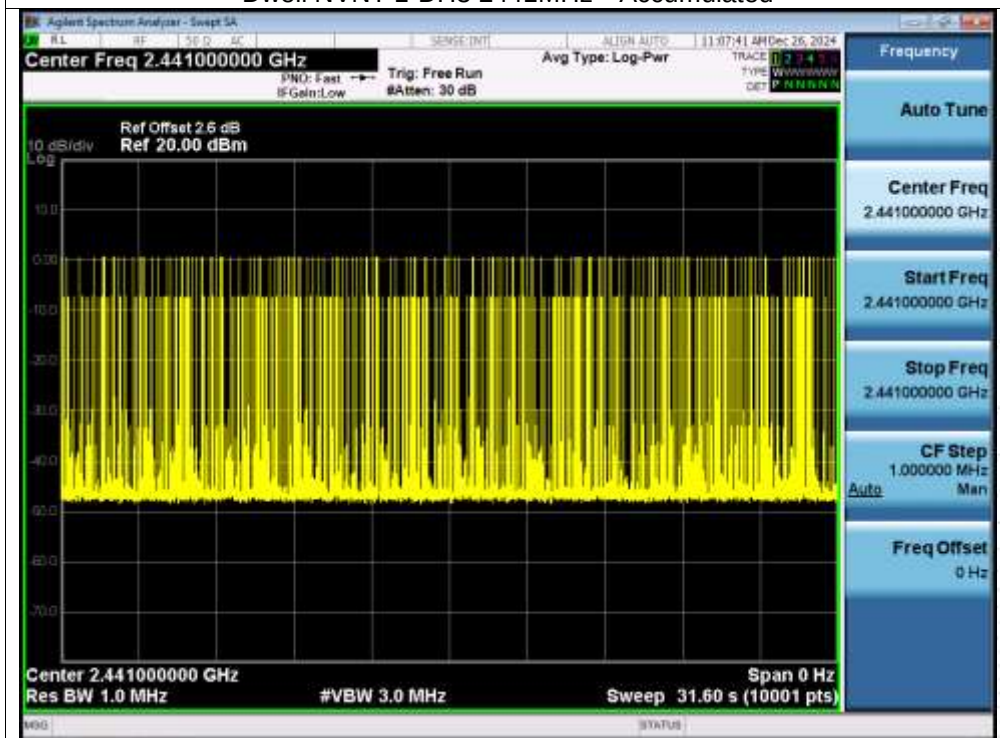





Dwell NVNT 1-DH5 2441MHz One Burst

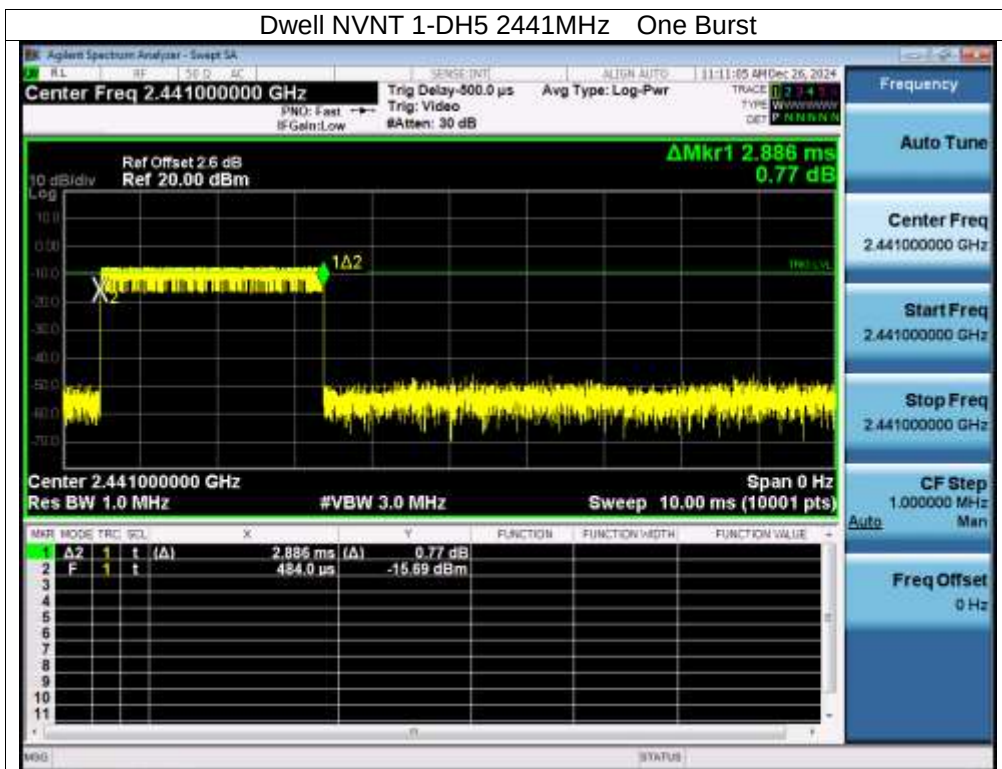


Dwell NVNT 1-DH5 2441MHz Accumulated

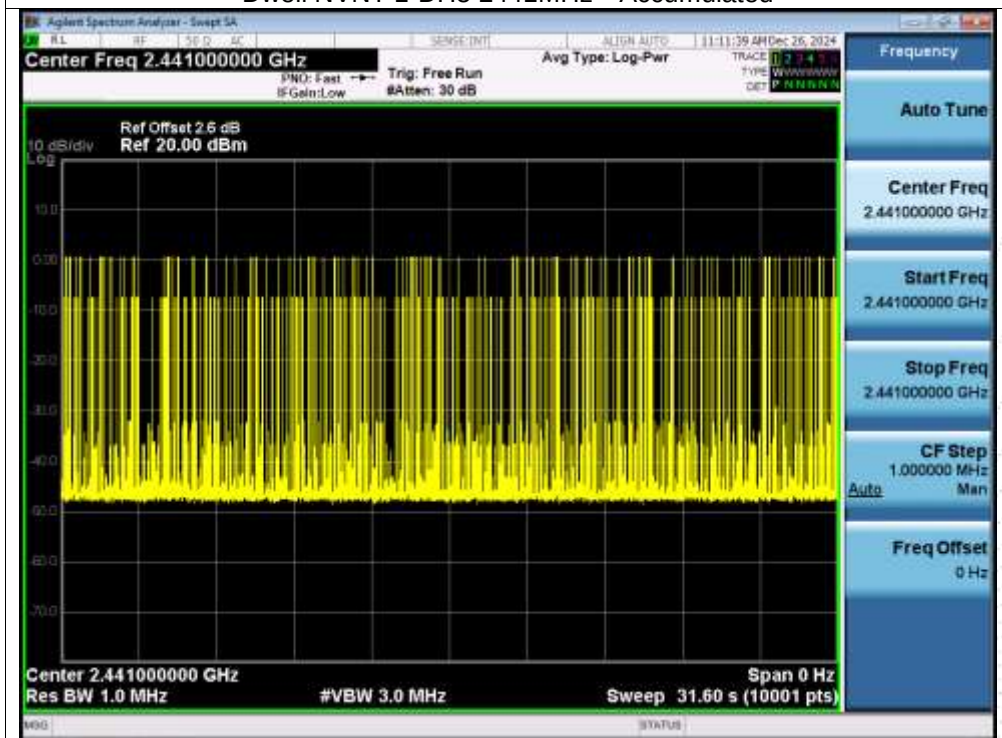

Dwell NVNT 2-DH1 2441MHz One Burst

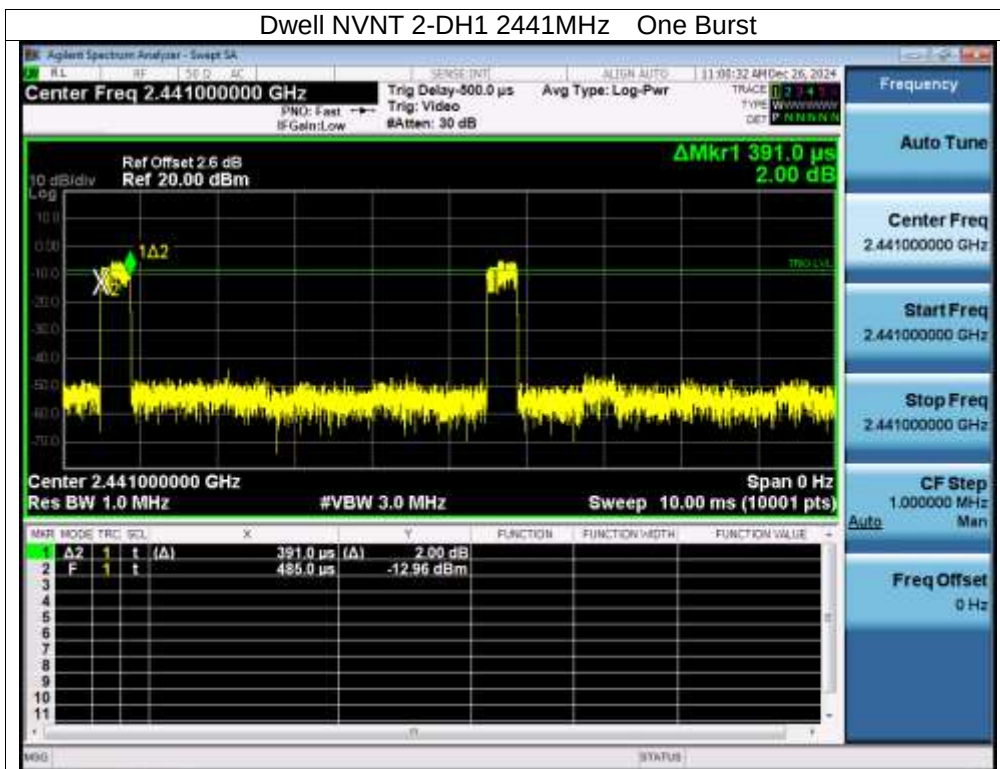


Dwell NVNT 2-DH1 2441MHz Accumulated

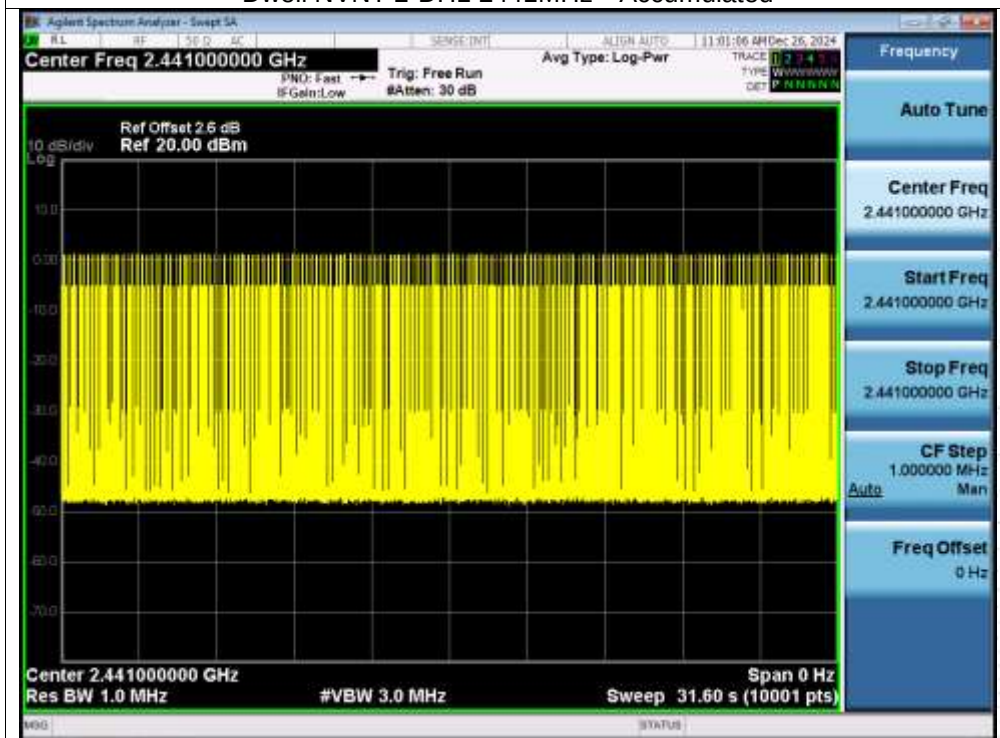


CO., LTD.

Dwell NVNT 2-DH3 2441MHz One Burst

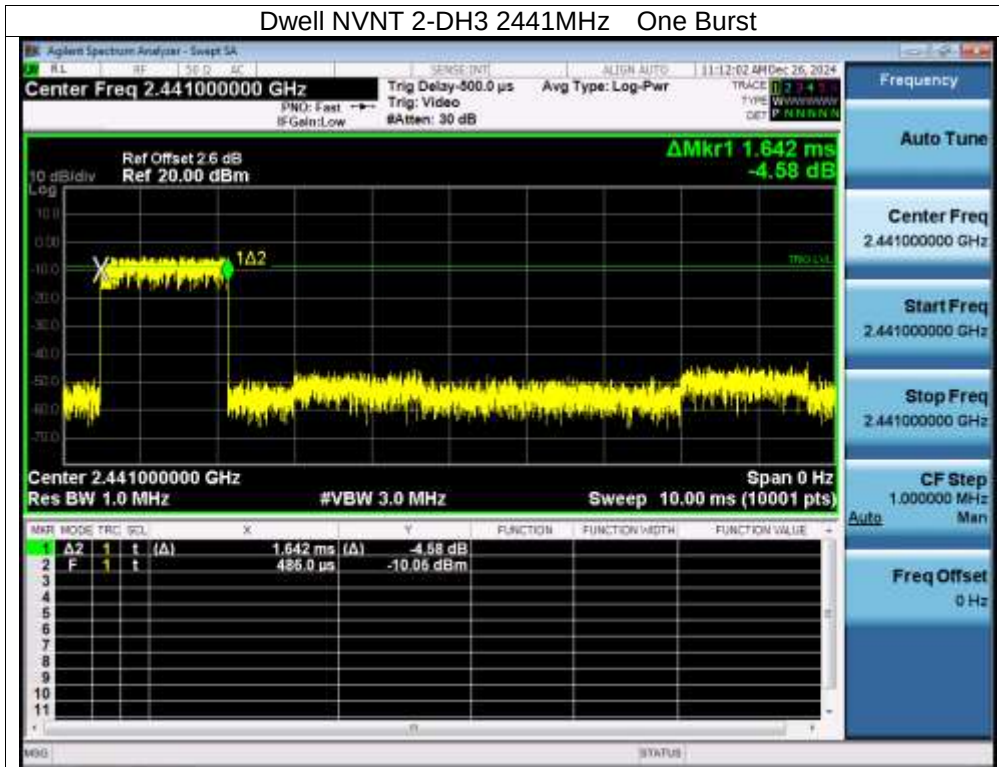


Dwell NVNT 2-DH3 2441MHz Accumulated

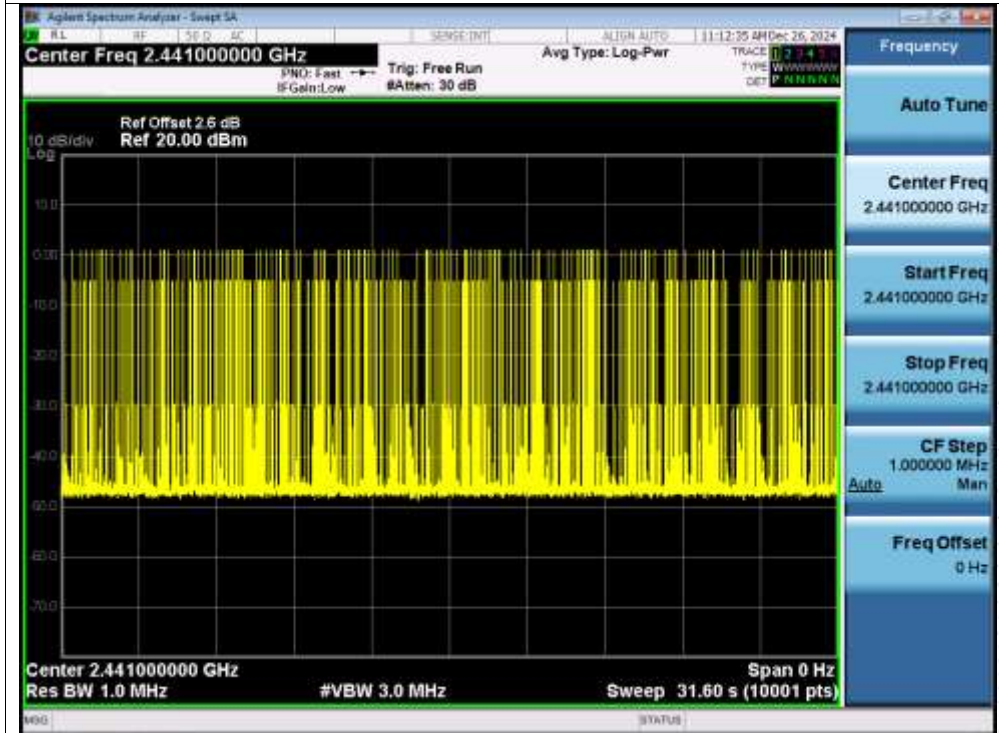




Dwell NVNT 2-DH5 2441MHz One Burst

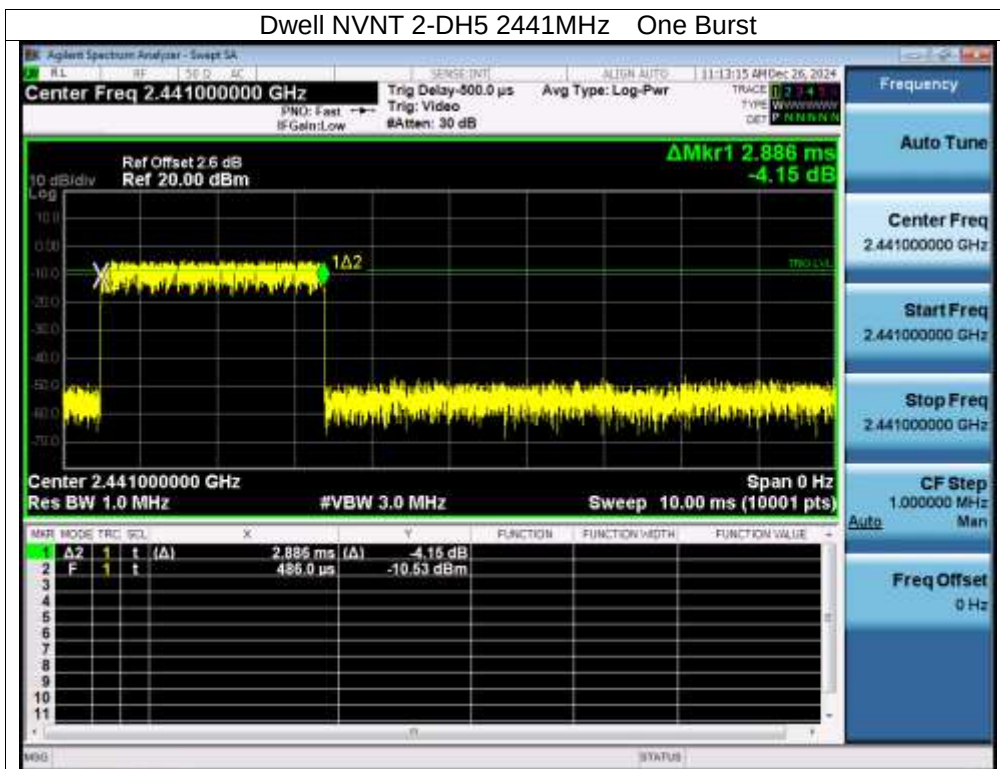


Dwell NVNT 2-DH5 2441MHz Accumulated

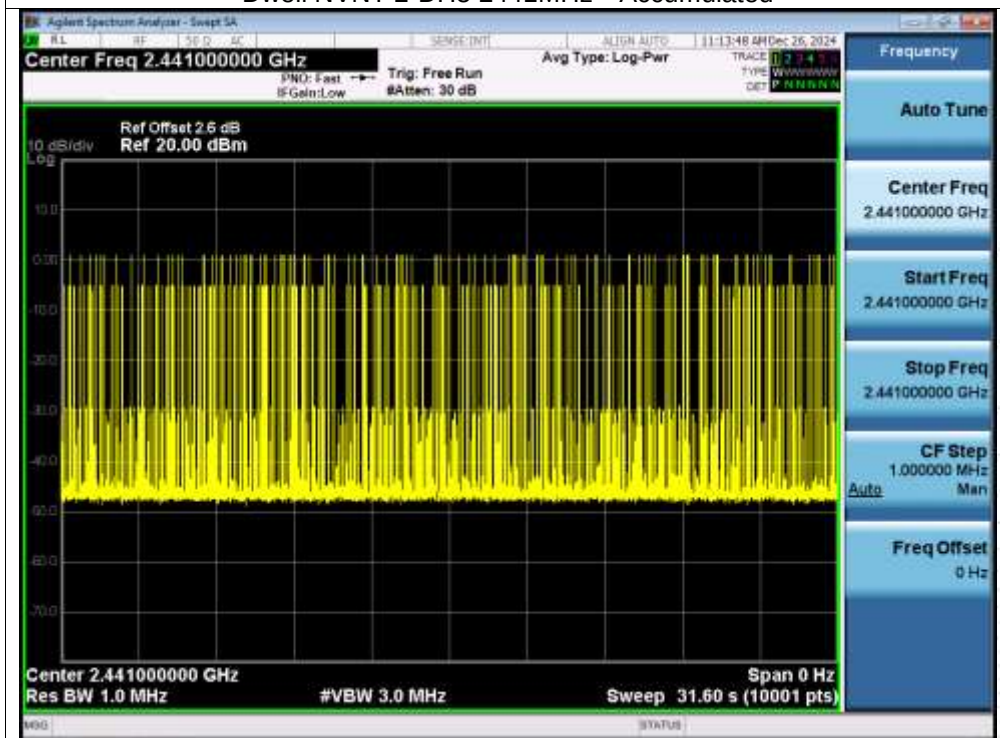





Dwell NVNT 3-DH1 2441MHz One Burst

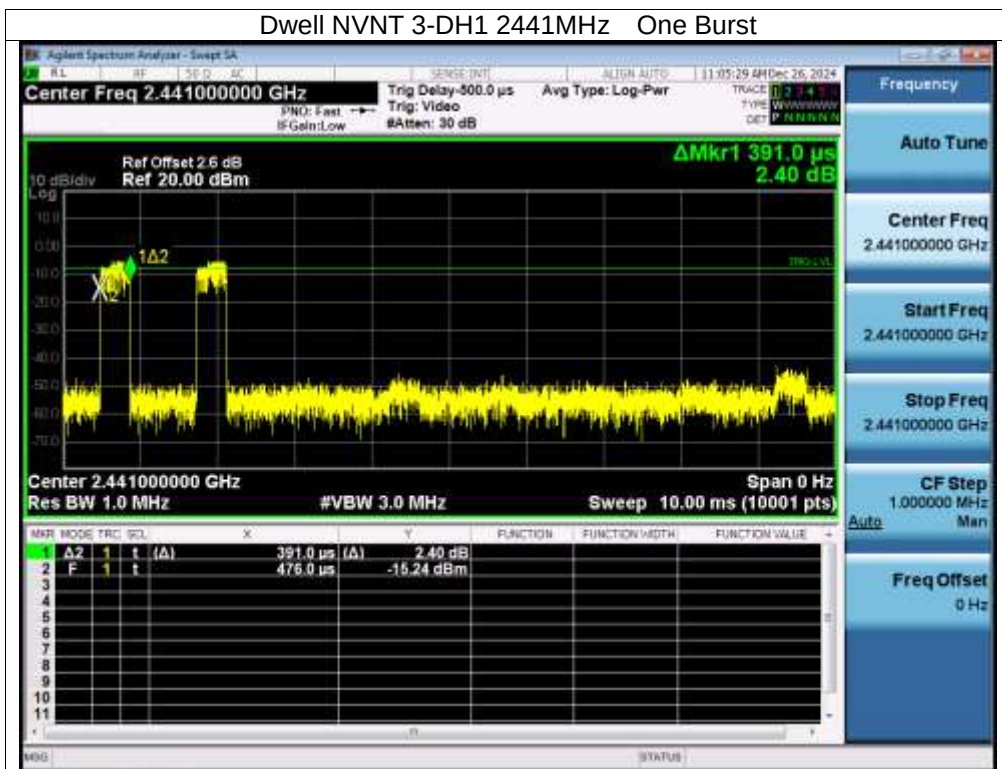


Dwell NVNT 3-DH1 2441MHz Accumulated

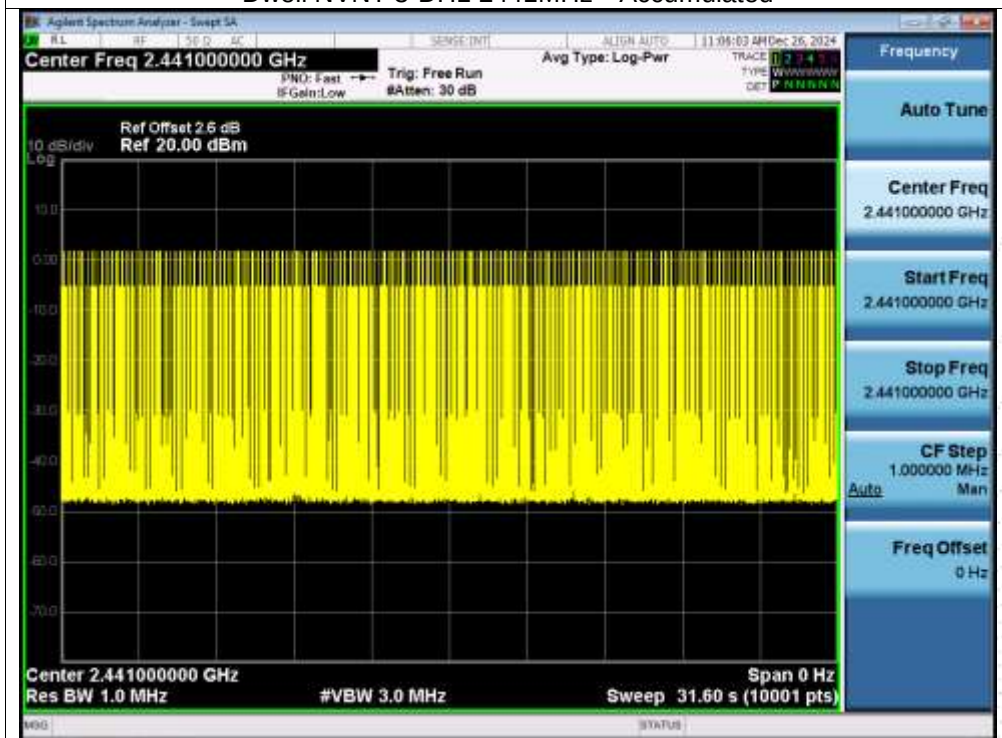


Dwell NVNT 3-DH3 2441MHz One Burst

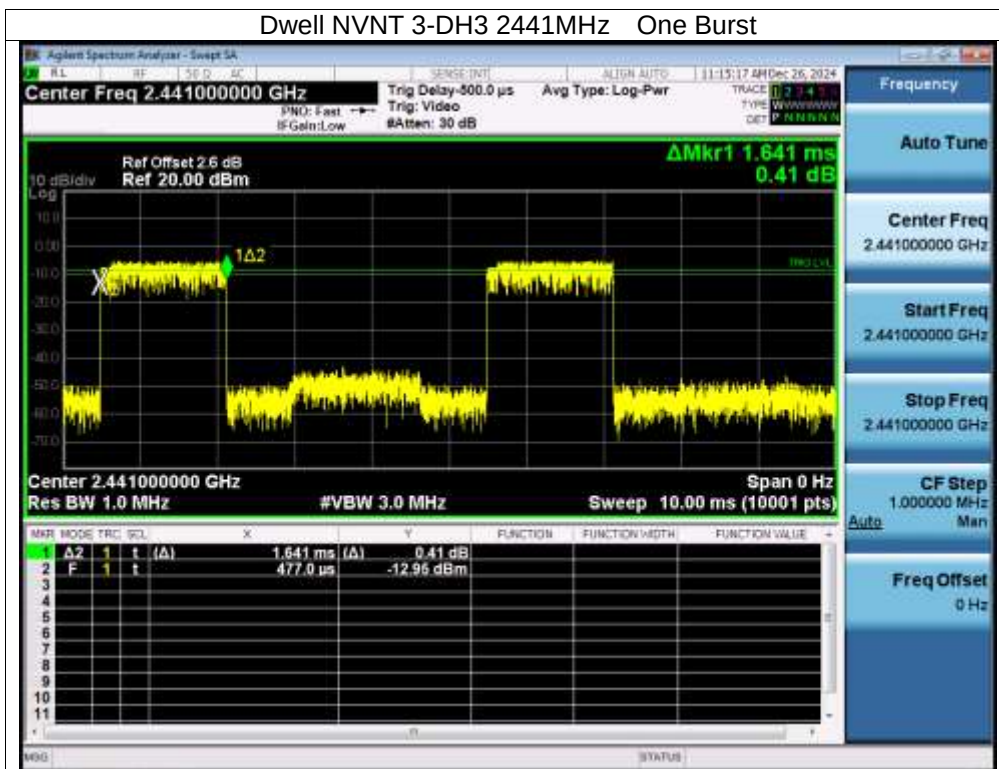


Dwell NVNT 3-DH3 2441MHz Accumulated

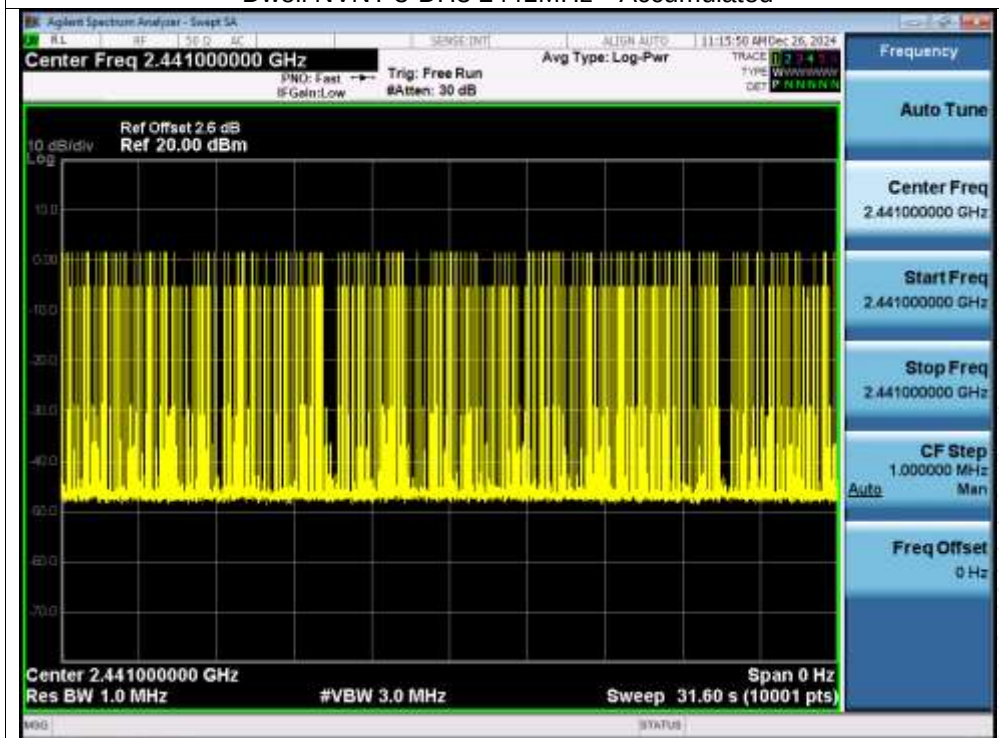

Dwell NVNT 3-DH5 2441MHz One Burst

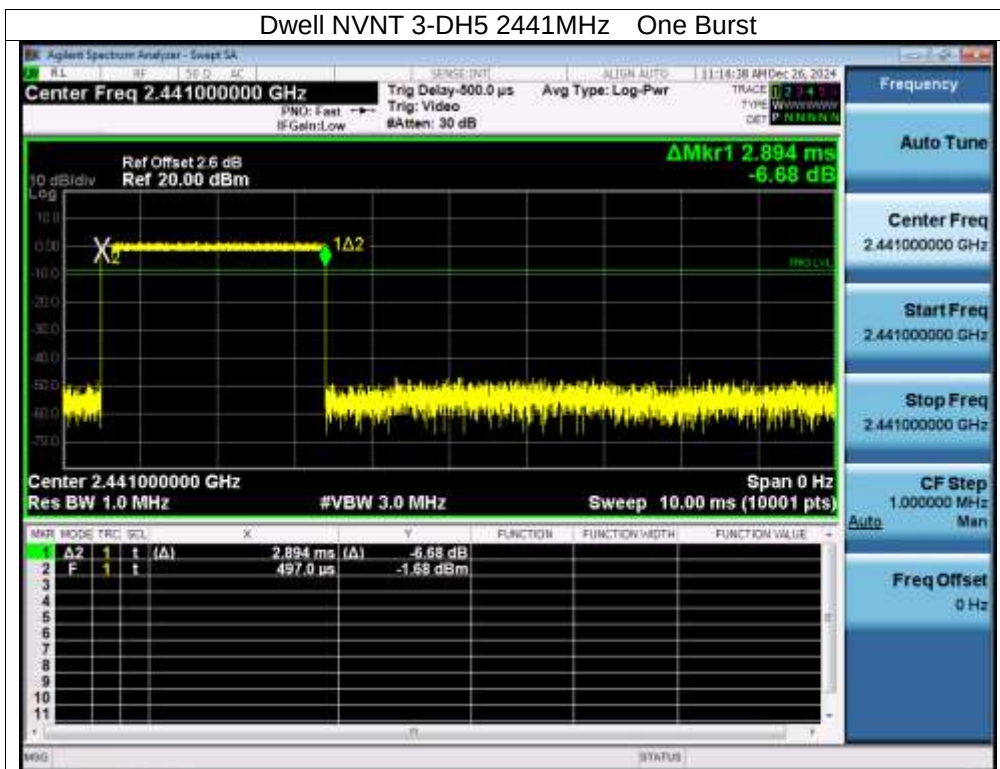

Dwell NVNT 3-DH5 2441MHz Accumulated

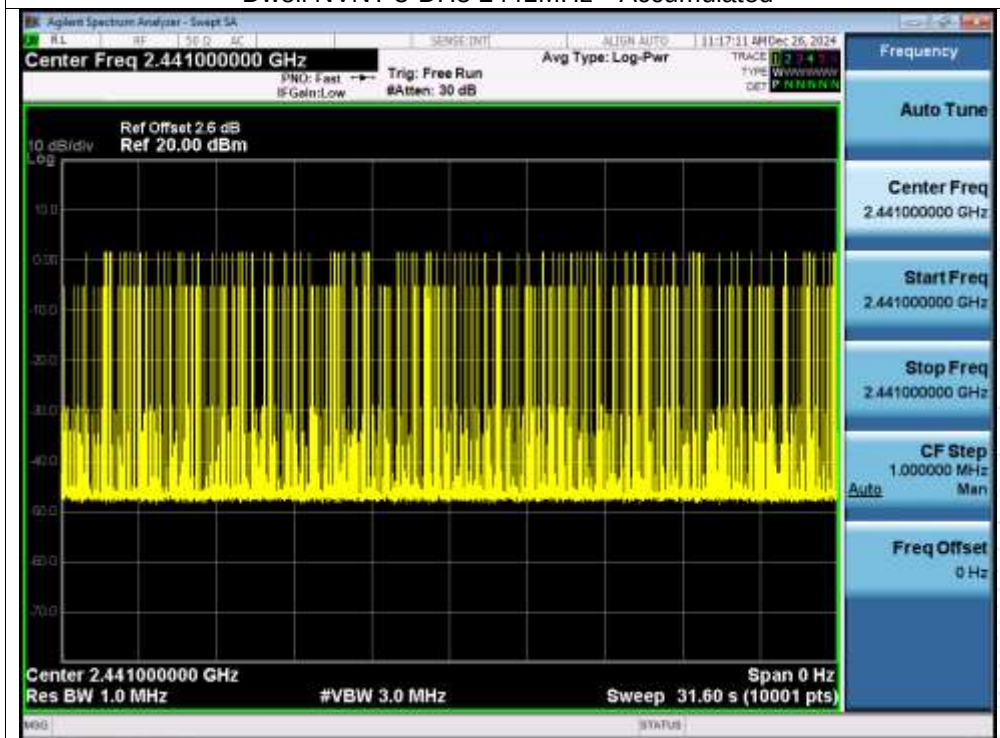

## 15. Antenna Requirement

### 15.1 Limit

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 15.2 Test Result

The EUT antenna is Internal antenna, fulfill the requirement of this section.

CO., LTD.



## 16. EUT Photographs

EUT Photo




NOTE: Appendix-Photographs Of EUT Constructional Details

## 17. EUT Test Setup Photographs

### Conducted emissions



### Radiated Measurement Photos

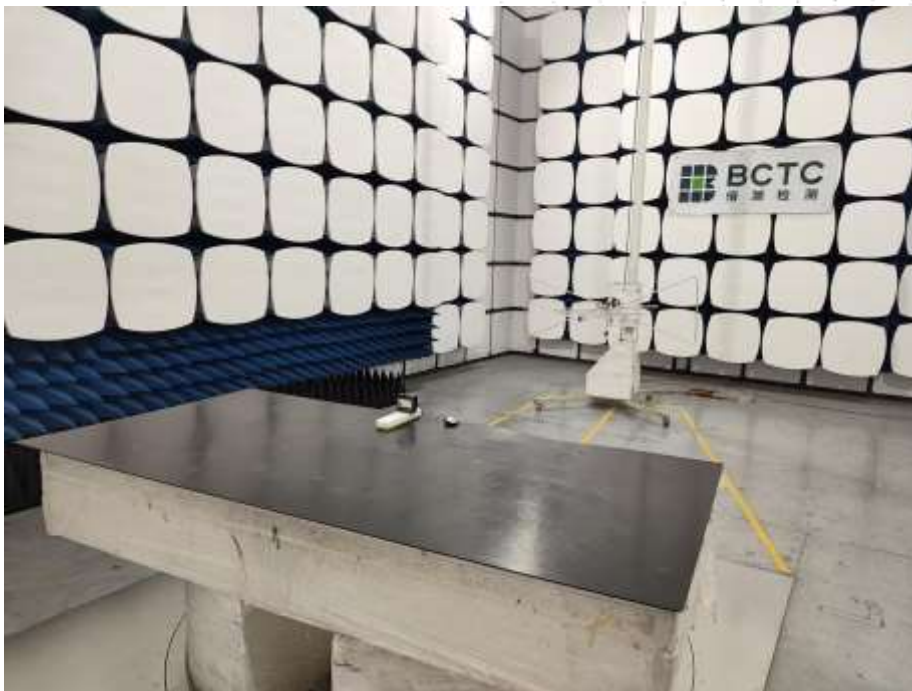



**STATEMENT**

1. The equipment lists are traceable to the national reference standards.
2. The test report can not be partially copied unless prior written approval is issued from our lab.
3. The test report is invalid without the "special seal for inspection and testing".
4. The test report is invalid without the signature of the approver.
5. The test process and test result is only related to the Unit Under Test.
6. Sample information is provided by the client and the laboratory is not responsible for its authenticity.
7. The quality system of our laboratory is in accordance with ISO/IEC17025.
8. If there is any objection to this test report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

**Address:**

1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

TEL: 400-788-9558

P.C.: 518103

FAX: 0755-33229357

Website: <http://www.chnbctc.com>

Consultation E-mail: [bctc@bctc-lab.com.cn](mailto:bctc@bctc-lab.com.cn)

Complaint/Advice E-mail: [advice@bctc-lab.com.cn](mailto:advice@bctc-lab.com.cn)

\*\*\*\*\* END \*\*\*\*\*

