



TEST REPORT

Product Name: Booth earphone
FCC ID: 2BFCZ-BTH06
Trademark: Blixno
Model Number: BTH-06, OWS-02
Prepared For: Shenzhen Ruixingda Electric Co.,Ltd
Address: Room 740, Xichengpinge, Zone 34-2, Wenhui Community, Xin'an Street, Bao'an District, Shenzhen City, Guangdong Province, China.
Manufacturer: Shenzhen Ruixingda Electric Co.,Ltd
Address: Room 740, Xichengpinge, Zone 34-2, Wenhui Community, Xin'an Street, Bao'an District, Shenzhen City, Guangdong Province, China.
Name of Factory: Shenzhen Ruixingda Electric Co.,Ltd
Address of Factory: Room 740, Xichengpinge, Zone 34-2, Wenhui Community, Xin'an Street, Bao'an District, Shenzhen City, Guangdong Province, China.
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: Mar. 13, 2024
Sample tested Date: Mar. 13, 2024 to Apr. 03, 2024
Issue Date: Apr. 03, 2024
Report No.: CTB240318024RFX
Test Standards: FCC Part15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is Bluetooth radio test report.

Compiled by:

Zhou kui

Zhou Kui

Reviewed by:

Arron Liu

Arron Liu

Approved by:



Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	4
2. TEST SUMMARY	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP	7
4.1 Product Information	7
4.2 Test Setup Configuration	7
4.3 Support Equipment	7
4.4 Channel List	8
4.5 Test Mode	8
4.6 Test Environment	8
5. TEST FACILITY AND TEST INSTRUMENT USED	9
5.1 Test Facility	9
5.2 Test Instrument Used	9
6. AC POWER LINE CONDUCTED EMISSION	11
6.1 Block Diagram Of Test Setup	11
6.2 Limit	11
6.3 Test procedure	11
6.4 Test Result	13
7. RADIATED SPURIOUS EMISSION	15
7.1 Block Diagram Of Test Setup	15
7.2 Limit	15
7.3 Test procedure	16
7.4 Test Result	17
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	35
8.1 Block Diagram Of Test Setup	35
8.2 Limit	35
8.3 Test procedure	35
8.4 Test Result	36
9. CONDUCTED PEAK OUTPUT POWER	46
9.1 Block Diagram Of Test Setup	46
9.2 Limit	46
9.3 Test procedure	46
9.4 Test Result	47
10. 20DB OCCUPIED BANDWIDTH	52
10.1 Block Diagram Of Test Setup	52
10.2 Limit	52
10.3 Test procedure	52
10.4 Test Result	52
11. CARRIER FREQUENCIES SEPARATION	57
11.1 Block Diagram Of Test Setup	57
11.2 Limit	57
11.3 Test procedure	57
11.4 Test Result	57
12. HOPPING CHANNEL NUMBER	62
12.1 Block Diagram Of Test Setup	62
12.2 Limit	62
12.3 Test procedure	62
12.4 Test Result	62
13. DWELL TIME	65
13.1 Block Diagram Of Test Setup	65

13.2	Limit	65
13.3	Test procedure	65
13.4	Test Result	66
14.	PSEUDORANDOM FREQUENCY	73
14.1	Limit	73
14.2	Test procedure	73
14.3	Test Result	74
15.	ANTENNA REQUIREMENT	75
16.	EUT TEST SETUP PHOTOGRAPHS	76

(Note: N/A means not applicable)

1. VERSION

Report No.	Issue Date	Description	Approved
CTB240318024RFX	Apr. 03, 2024	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(1)	ANSI C63.10-2013	PASS
20dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Carrier Frequencies Separation	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Hopping Channel Number	47 CFR Part 15 Subpart C Section 15.247 (b)	ANSI C63.10-2013	PASS
Dwell Time	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15 Subpart C Section 15.247(a)&TCB Exclusion List (7 July 2002)	ANSI C63.10-2013	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1093	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	54.3kHz
Conducted output power Above 1G	0.9dB
Conducted output power below 1G	0.9dB
Power Spectral Density , Conduction	0.9dB
Conduction spurious emissions	2.0dB
Out of band emission	2.0dB
3m camber Radiated spurious emission(9KHz-30MHz)	4.8dB
3m camber Radiated spurious emission(30MHz-1GHz)	4.6dB
3m chamber Radiated spurious emission(1GHz-18GHz)	5.1dB
3m chamber Radiated spurious emission(18GHz-40GHz)	3.4dB
humidity uncertainty	5.5%
Temperature uncertainty	0.63°C
frequency	1×10 ⁻⁷
Conducted Emission (150KHz-30MHz)	3.2 dB
Radiated Emission(30MHz ~ 1000MHz)	4.8 dB
Radiated Emission(1GHz ~6GHz)	4.9 dB

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	BTH-06, OWS-02
Model Description:	All the model are the same circuit and RF module, only different for model name. Test sample model: BTH-06
Bluetooth Version:	Bluetooth 5.3
Hardware Version:	V02
Software Version:	V01
Operation Frequency:	Bluetooth: 2402-2480MHz
Max. RF output power:	Bluetooth: 4.713dBm
Type of Modulation:	Bluetooth: GFSK, $\pi/4$ DQPSK
Antenna installation:	Bluetooth: Chip Antenna
Antenna Gain:	Bluetooth: 1.95dBi
Ratings:	DC 5V charging from adapter DC 3.7V by battery

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	Adapter	JIYIN	JY-05100C	/	/

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	79	/

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting (GFSK, $\pi/4$ DQPSK)	2402MHz	2441MHz	2480MHz
Receiving (GFSK, $\pi/4$ DQPSK)	2402MHz	2441MHz	2480MHz

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(DC):	3.7V
Normal Temperature($^{\circ}$ C)	23
Low Temperature($^{\circ}$ C)	0
High Temperature($^{\circ}$ C)	40

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinh Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

Item	Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	2024.07.05
2	Power Sensor	Agilent	U2021XA	MY56120032	2024.07.05
3	Power Sensor	Agilent	U2021XA	MY56120034	2024.07.05
4	Communication test set	R&S	CMW500	108058	2024.07.05
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	2024.07.05
6	Signal Generator	Agilent	N5181A	MY50140365	2024.07.05
7	Vector signal generator	Agilent	N5182A	MY47420195	2024.07.05
8	Communication test set	Agilent	E5515C	MY50102567	2024.07.06
9	2.4 GHz Filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	2024.07.05
10	5 GHz Filter	Shenxiang	MSF5150-5850 MS-1155	20181015001	2024.07.06
11	Filter	Xingbo	XBLBQ-DZA120	190821-1-1	2024.07.06
12	BT&WI-FI Automatic test software	Microwave	MTS8000	Ver. 2.0.0.0	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2024.10.30
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2024.07.05
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/
16	966 chamber	C.R.T.	966	/	2024.08.11
17	Receiver	R&S	ESPI	100362	2024.07.05
18	Amplifier	HP	8447E	2945A02747	2024.07.05
19	Amplifier	Agilent	8449B	3008A01838	2024.07.05
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2024.07.08


21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	2024.07.08
22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	2024.07.08
24	loop antenna	ZHINAN	ZN30900A	GTS534	/
25	40G Horn antenna	A/H/System	SAS-574	588	2024.10.30
26	Amplifier	AEROFLEX	Aeroflex	097	2024.07.05

Continuous disturbance					
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	LISN	ROHDE&SCHWARZ	ESH3-Z5	100318	2024.07.05
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	2024.07.05
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2024.07.05
4	Coaxial cable	ZDECL	Z302S-NJ-SMA J-12M	18091905	2024.07.05
5	ISN	Schwarzbeck	NTFM8158	183	2024.07.05
6	Communication test set	Agilent	E5515C	MY50102567	2024.07.05
7	Communication test set	R&S	CMW500	108058	2024.07.05
8	EZ-EMC	Frad	EMC-con3A1.1	/	/

Radiated emission					
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	2024.07.08
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2024.07.08
3	Amplifier	Agilent	8449B	3008A01838	2024.07.05
4	Amplifier	HP	8447E	2945A02747	2024.07.05
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2024.07.05
6	Coaxial cable	ETS	RFC-SNS-100-NMS-80 NI	/	2024.07.05
7	Coaxial cable	ETS	RFC-SNS-100-NMS-20 NI	/	2024.07.05
8	Coaxial cable	ETS	RFC-SNS-100-SMS-20 NI	/	2024.07.05
9	Coaxial cable	ETS	RFC-NNS-100-NMS-300 NI	/	2024.07.05
10	Communication test set	Agilent	E5515C	MY50102567	2024.07.05
11	Communication test set	R&S	CMW500	108058	2024.07.05
12	EZ-EMC	Frad	EMC-con3A1.1	/	/

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

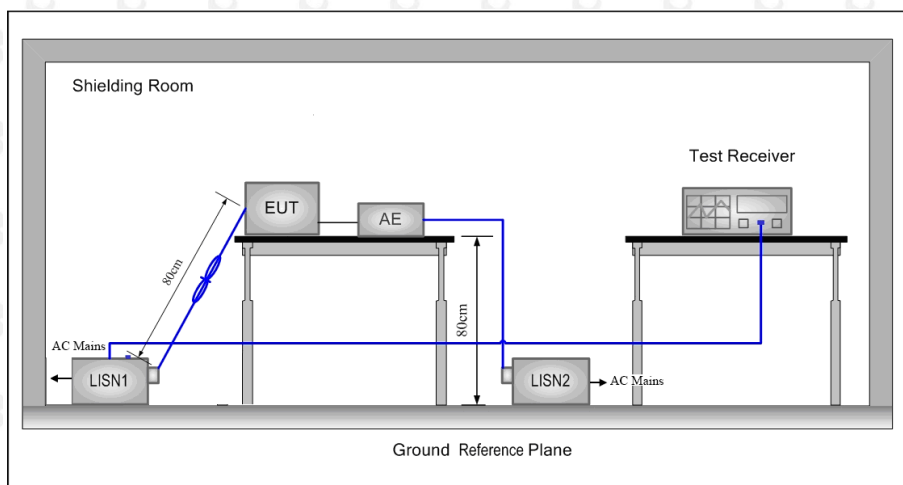

6.2 Limit

Table 4 – AC power-line conducted emissions limits

Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency


6.3 Test procedure

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 Ω /50 μ H + 5 Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.
- 6) All modes were tested at AC 120V and 240V, only the worst result of AC 120V 60Hz was reported.
- 7) If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.

6.4 Test Result

L: Worst case-GFSK(low channel)

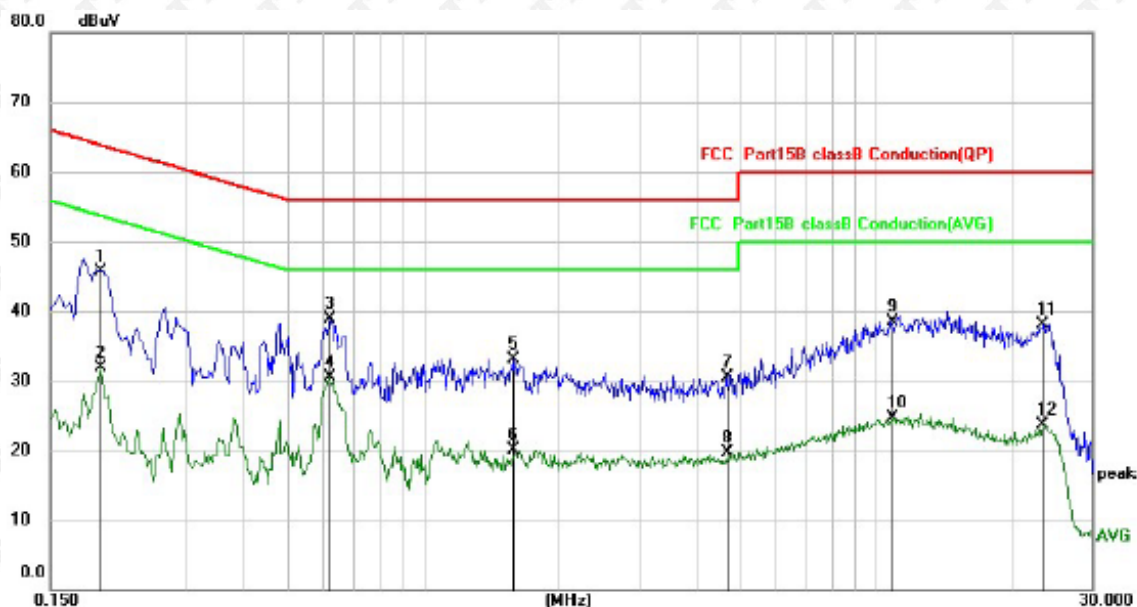


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1940	35.82	9.95	45.77	63.86	-18.09	QP
2		0.1940	21.94	9.95	31.89	53.86	-21.97	AVG
3		0.6220	28.82	10.01	38.83	56.00	-17.17	QP
4	*	0.6220	20.53	10.01	30.54	46.00	-15.46	AVG
5		1.5820	23.05	10.06	33.11	56.00	-22.89	QP
6		1.5820	10.07	10.06	20.13	46.00	-25.87	AVG
7		4.6940	20.22	10.35	30.57	56.00	-25.43	QP
8		4.6940	9.33	10.35	19.68	46.00	-26.32	AVG
9		10.8380	27.96	10.61	38.57	60.00	-21.43	QP
10		10.8380	14.01	10.61	24.62	50.00	-25.38	AVG
11		23.3420	27.23	10.95	38.18	60.00	-21.82	QP
12		23.3420	12.81	10.95	23.76	50.00	-26.24	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit
Measurement=Reading level+correct facto

N: Worst case-GFSK(low channel)

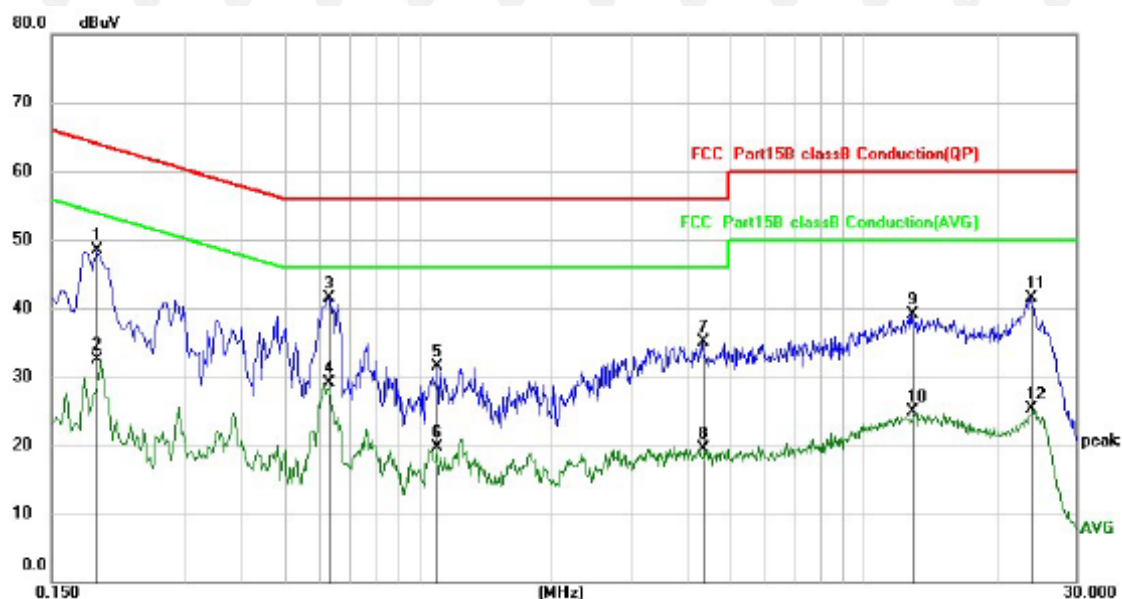

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1900	38.54	9.95	48.49	64.04	-15.55	QP
2		0.1900	22.61	9.95	32.56	54.04	-21.48	AVG
3	*	0.6300	31.48	10.01	41.49	56.00	-14.51	QP
4		0.6300	19.00	10.01	29.01	46.00	-16.99	AVG
5		1.1019	21.40	10.02	31.42	56.00	-24.58	QP
6		1.1019	9.74	10.02	19.76	46.00	-26.24	AVG
7		4.3540	24.77	10.32	35.09	56.00	-20.91	QP
8		4.3540	9.18	10.32	19.50	46.00	-26.50	AVG
9		12.8500	28.38	10.67	39.05	60.00	-20.95	QP
10		12.8500	14.15	10.67	24.82	50.00	-25.18	AVG
11		23.6380	30.52	10.96	41.48	60.00	-18.52	QP
12		23.6380	14.26	10.96	25.22	50.00	-24.78	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit
Measurement=Reading level+correct facto

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

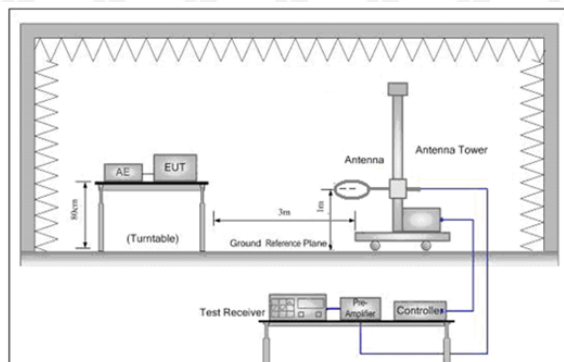


Figure 1. Below 30MHz

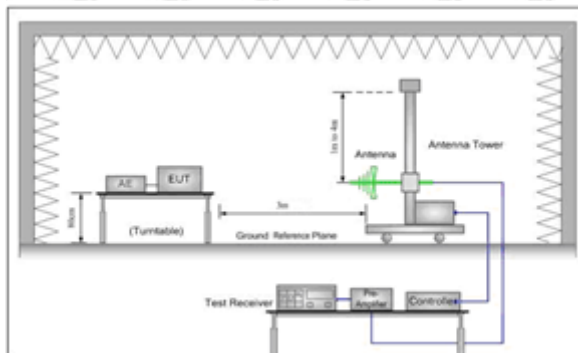


Figure 2. 30MHz to 1GHz

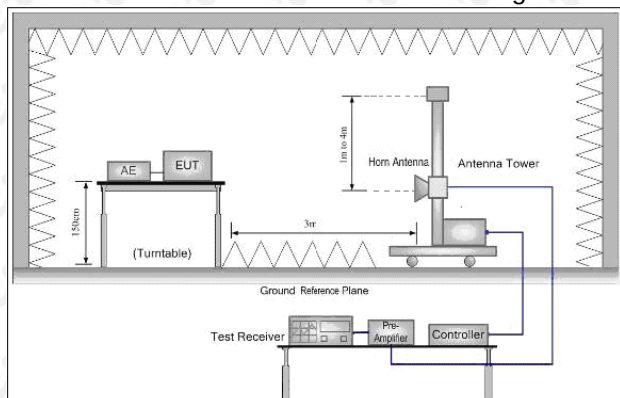


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dBμV/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- Repeat above procedures until all frequencies measured was complete.
- Full battery is used during test

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average


7.4 Test Result

Left ear:

Below 1GHz Test Results:

Antenna polarity: H


Worst case-GFSK(low channel)

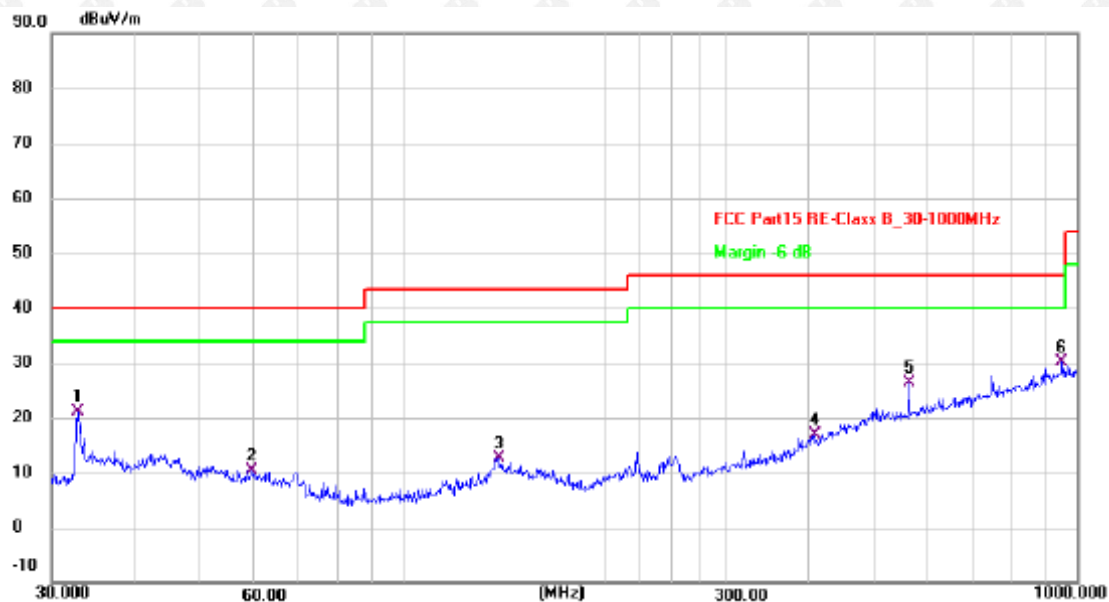

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	32.8637	39.46	-18.37	21.09	40.00	-18.91	QP
2	59.4405	30.00	-19.56	10.44	40.00	-29.56	QP
3	138.3873	30.92	-18.19	12.73	43.50	-30.77	QP
4	407.5145	32.32	-15.41	16.91	46.00	-29.09	QP
5	562.6624	36.89	-10.60	26.29	46.00	-19.71	QP
6 *	948.7610	33.31	-3.17	30.14	46.00	-15.86	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit
Measurement=Reading level+correct facto

Antenna polarity: V
Worst case-GFSK(low channel)

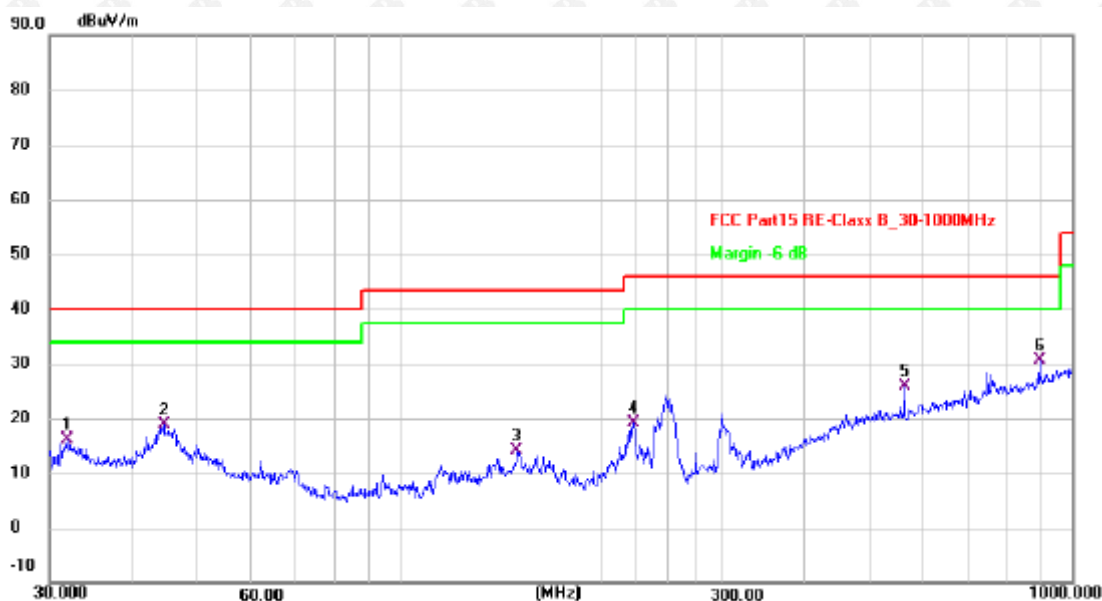

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	31.9546	32.41	-16.26	16.15	40.00	-23.85	QP
2	44.4308	33.56	-14.66	18.90	40.00	-21.10	QP
3	148.9625	30.16	-16.15	14.01	43.50	-29.49	QP
4	222.1698	35.61	-16.48	19.13	46.00	-26.87	QP
5	562.6624	30.73	-4.87	25.86	46.00	-20.14	QP
6 *	893.8567	28.72	1.81	30.53	46.00	-15.47	QP


Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit
Measurement=Reading level+correct facto

Right ear:

Below 1GHz Test Results:

Antenna polarity: H


Worst case-GFSK(low channel)

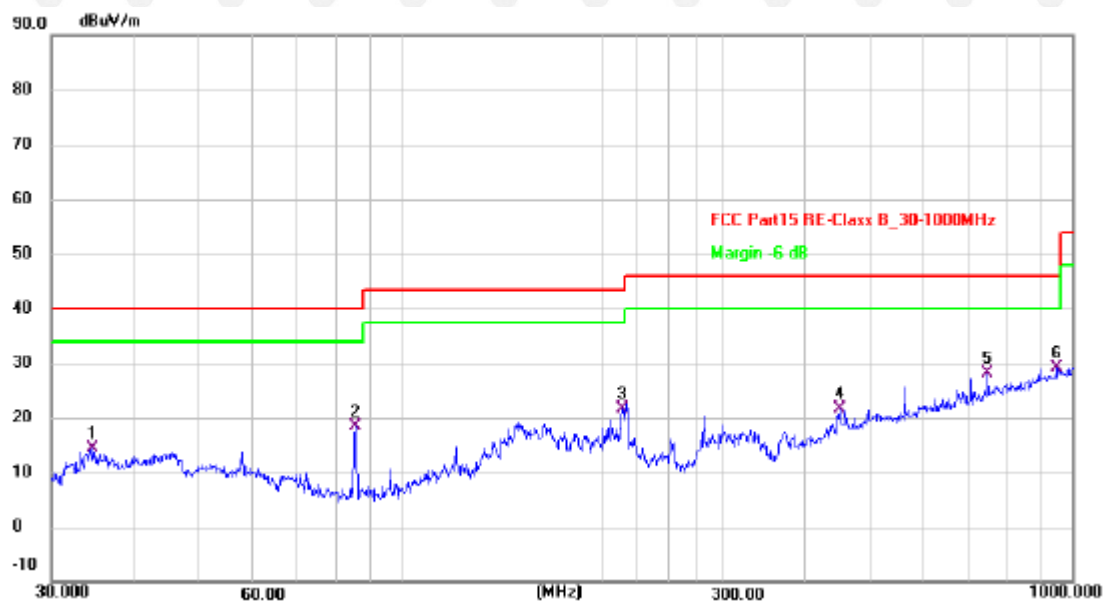

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	34.6385	32.80	-18.44	14.36	40.00	-25.64	QP
2	85.2980	41.05	-22.78	18.27	40.00	-21.73	QP
3	213.0151	42.16	-20.42	21.74	43.50	-21.76	QP
4	449.5558	35.65	-14.04	21.61	46.00	-24.39	QP
5	747.4825	35.09	-7.01	28.08	46.00	-17.92	QP
6 *	948.7610	32.23	-3.17	29.06	46.00	-16.94	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit
Measurement=Reading level+correct facto

Antenna polarity: V
Worst case-GFSK(low channel)

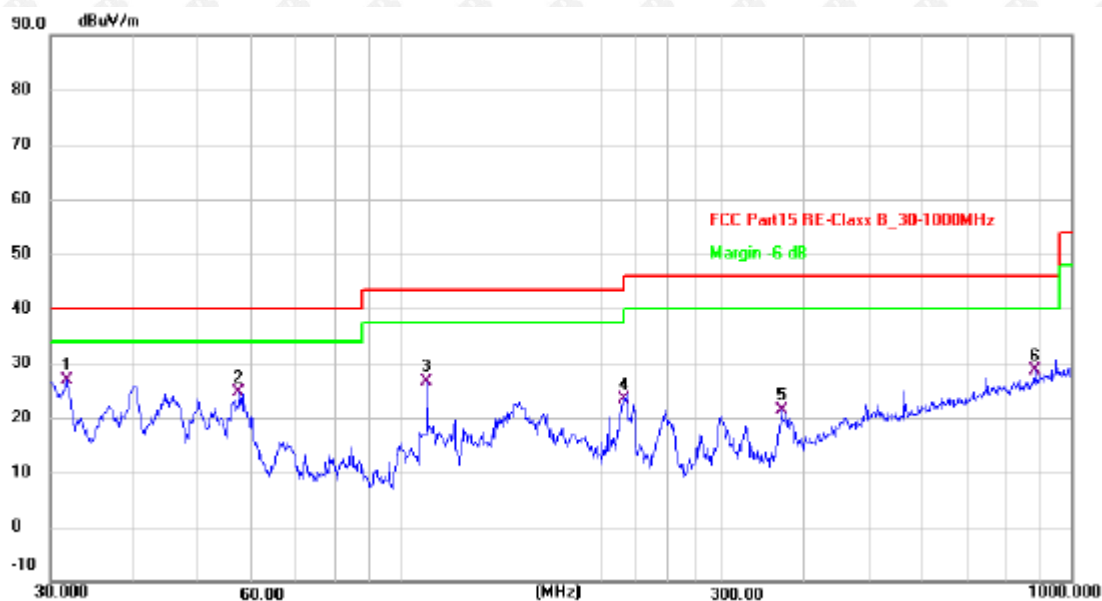

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	31.7313	43.32	-16.38	26.94	40.00	-13.06	QP
2	57.3923	41.40	-16.65	24.75	40.00	-15.25	QP
3	109.4116	46.97	-20.24	26.73	43.50	-16.77	QP
4	215.2678	40.06	-16.61	23.45	43.50	-20.05	QP
5	369.4047	34.16	-12.79	21.37	46.00	-24.63	QP
6	881.4067	27.13	1.49	28.62	46.00	-17.38	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit
Measurement=Reading level+correct facto

Left ear:

Above 1 GHz Test Results:

CH Low (2402MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4804	57.79	-3.65	54.14	74.00	-19.86	peak
4804	48.98	-3.65	45.33	54.00	-8.67	AVG
7206	59.43	-0.95	58.48	74.00	-15.52	peak
7206	41.95	-0.95	41.00	54.00	-13.00	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4804	58.03	-3.65	54.38	74.00	-19.62	peak
4804	49.19	-3.65	45.54	54.00	-8.46	AVG
7206	60.70	-0.95	59.75	74.00	-14.25	peak
7206	42.04	-0.95	41.09	54.00	-12.91	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

CH Middle (2441MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4882.00	59.44	-3.54	55.90	74.00	-18.10	peak
4882.00	47.81	-3.54	44.27	54.00	-9.73	AVG
7323.00	55.39	-0.81	54.58	74.00	-19.42	peak
7323.00	42.89	-0.81	42.08	54.00	-11.92	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4882.00	57.01	-3.54	53.47	74.00	-20.53	peak
4882.00	50.57	-3.54	47.03	54.00	-6.97	AVG
7323.00	56.94	-0.81	56.13	74.00	-17.87	peak
7323.00	42.71	-0.81	41.90	54.00	-12.10	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

CH High (2480MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	56.77	-3.43	53.34	74.00	-20.66	peak
4960	48.14	-3.44	44.70	54.00	-9.30	AVG
7440	61.38	-0.77	60.61	74.00	-13.39	peak
7440	42.08	-0.77	41.31	54.00	-12.69	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	57.64	-3.43	54.21	74.00	-19.79	peak
4960	50.05	-3.44	46.61	54.00	-7.39	AVG
7440	60.53	-0.77	59.76	74.00	-14.24	peak
7440	40.31	-0.77	39.54	54.00	-14.46	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report

Restricted bands around fundamental frequency (Radiated)

hopping

Operation Mode: TX CH Low (2402MHz)

Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	57.79	-5.81	51.98	74.00	-22.02	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	54.69	-5.84	48.85	74.00	-25.15	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	56.98	-5.81	51.17	74.00	-22.83	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.32	-5.84	49.48	74.00	-24.52	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	55.72	-5.81	49.91	74.00	-24.09	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	53.69	-6.06	47.63	74.00	-26.37	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	56.25	-5.81	50.44	74.00	-23.56	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.70	-6.06	48.64	74.00	-25.36	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

NO hopping

Operation Mode: TX CH Low (2402MHz)
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	55.41	-5.81	49.60	74.00	-24.40	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	54.30	-5.84	48.46	74.00	-25.54	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	56.03	-5.81	50.22	74.00	-23.78	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.18	-5.84	49.34	74.00	-24.66	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.50	56.43	-5.81	50.62	74.00	-23.38	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	53.46	-6.06	47.40	74.00	-26.60	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.50	55.25	-5.81	49.44	74.00	-24.56	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	53.77	-6.06	47.71	74.00	-26.29	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Right ear:

Above 1 GHz Test Results:

CH Low (2402MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4804	57.36	-3.65	53.71	74.00	-20.29	peak
4804	49.76	-3.65	46.11	54.00	-7.89	AVG
7206	60.78	-0.95	59.83	74.00	-14.17	peak
7206	40.95	-0.95	40.00	54.00	-14.00	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4804	56.81	-3.65	53.16	74.00	-20.84	peak
4804	49.50	-3.65	45.85	54.00	-8.15	AVG
7206	59.69	-0.95	58.74	74.00	-15.26	peak
7206	40.30	-0.95	39.35	54.00	-14.65	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

CH Middle (2441MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4882.00	60.02	-3.54	56.48	74.00	-17.52	peak
4882.00	47.31	-3.54	43.77	54.00	-10.23	AVG
7323.00	56.22	-0.81	55.41	74.00	-18.59	peak
7323.00	42.40	-0.81	41.59	54.00	-12.41	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4882.00	58.17	-3.54	54.63	74.00	-19.37	peak
4882.00	49.76	-3.54	46.22	54.00	-7.78	AVG
7323.00	57.16	-0.81	56.35	74.00	-17.65	peak
7323.00	42.19	-0.81	41.38	54.00	-12.62	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

CH High (2480MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	58.89	-3.43	55.46	74.00	-18.54	peak
4960	47.31	-3.44	43.87	54.00	-10.13	AVG
7440	59.10	-0.77	58.33	74.00	-15.67	peak
7440	41.31	-0.77	40.54	54.00	-13.46	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	57.77	-3.43	54.34	74.00	-19.66	peak
4960	50.12	-3.44	46.68	54.00	-7.32	AVG
7440	58.62	-0.77	57.85	74.00	-16.15	peak
7440	40.43	-0.77	39.66	54.00	-14.34	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report

Restricted bands around fundamental frequency (Radiated)

hopping

Operation Mode: TX CH Low (2402MHz)

Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	57.33	-5.81	51.52	74.00	-22.48	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	54.94	-5.84	49.10	74.00	-24.90	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	56.03	-5.81	50.22	74.00	-23.78	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	56.81	-5.84	50.97	74.00	-23.03	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	54.80	-5.81	48.99	74.00	-25.01	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.12	-6.06	48.06	74.00	-25.94	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	57.03	-5.81	51.22	74.00	-22.78	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	53.64	-6.06	47.58	74.00	-26.42	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

NO hopping

Operation Mode: TX CH Low (2402MHz)
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	56.14	-5.81	50.33	74.00	-23.67	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	54.57	-5.84	48.73	74.00	-25.27	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	55.39	-5.81	49.58	74.00	-24.42	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.13	-5.84	49.29	74.00	-24.71	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	55.11	-5.81	49.30	74.00	-24.70	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.65	-6.06	48.59	74.00	-25.41	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						


Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	55.63	-5.81	49.82	74.00	-24.18	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	53.47	-6.06	47.41	74.00	-26.59	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

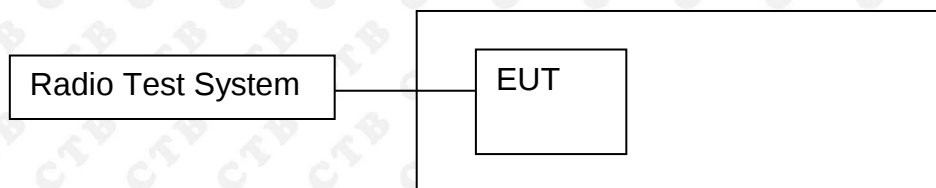

8.2 Limit


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
 Below 30MHz:
 RBW = 100kHz, VBW = 300kHz, Sweep = auto
 Detector function = peak, Trace = max hold
 Above 30MHz:
 RBW = 100KHz, VBW = 300KHz, Sweep = auto
 Detector function = peak, Trace = max hold

8.4 Test Result


Left ear:

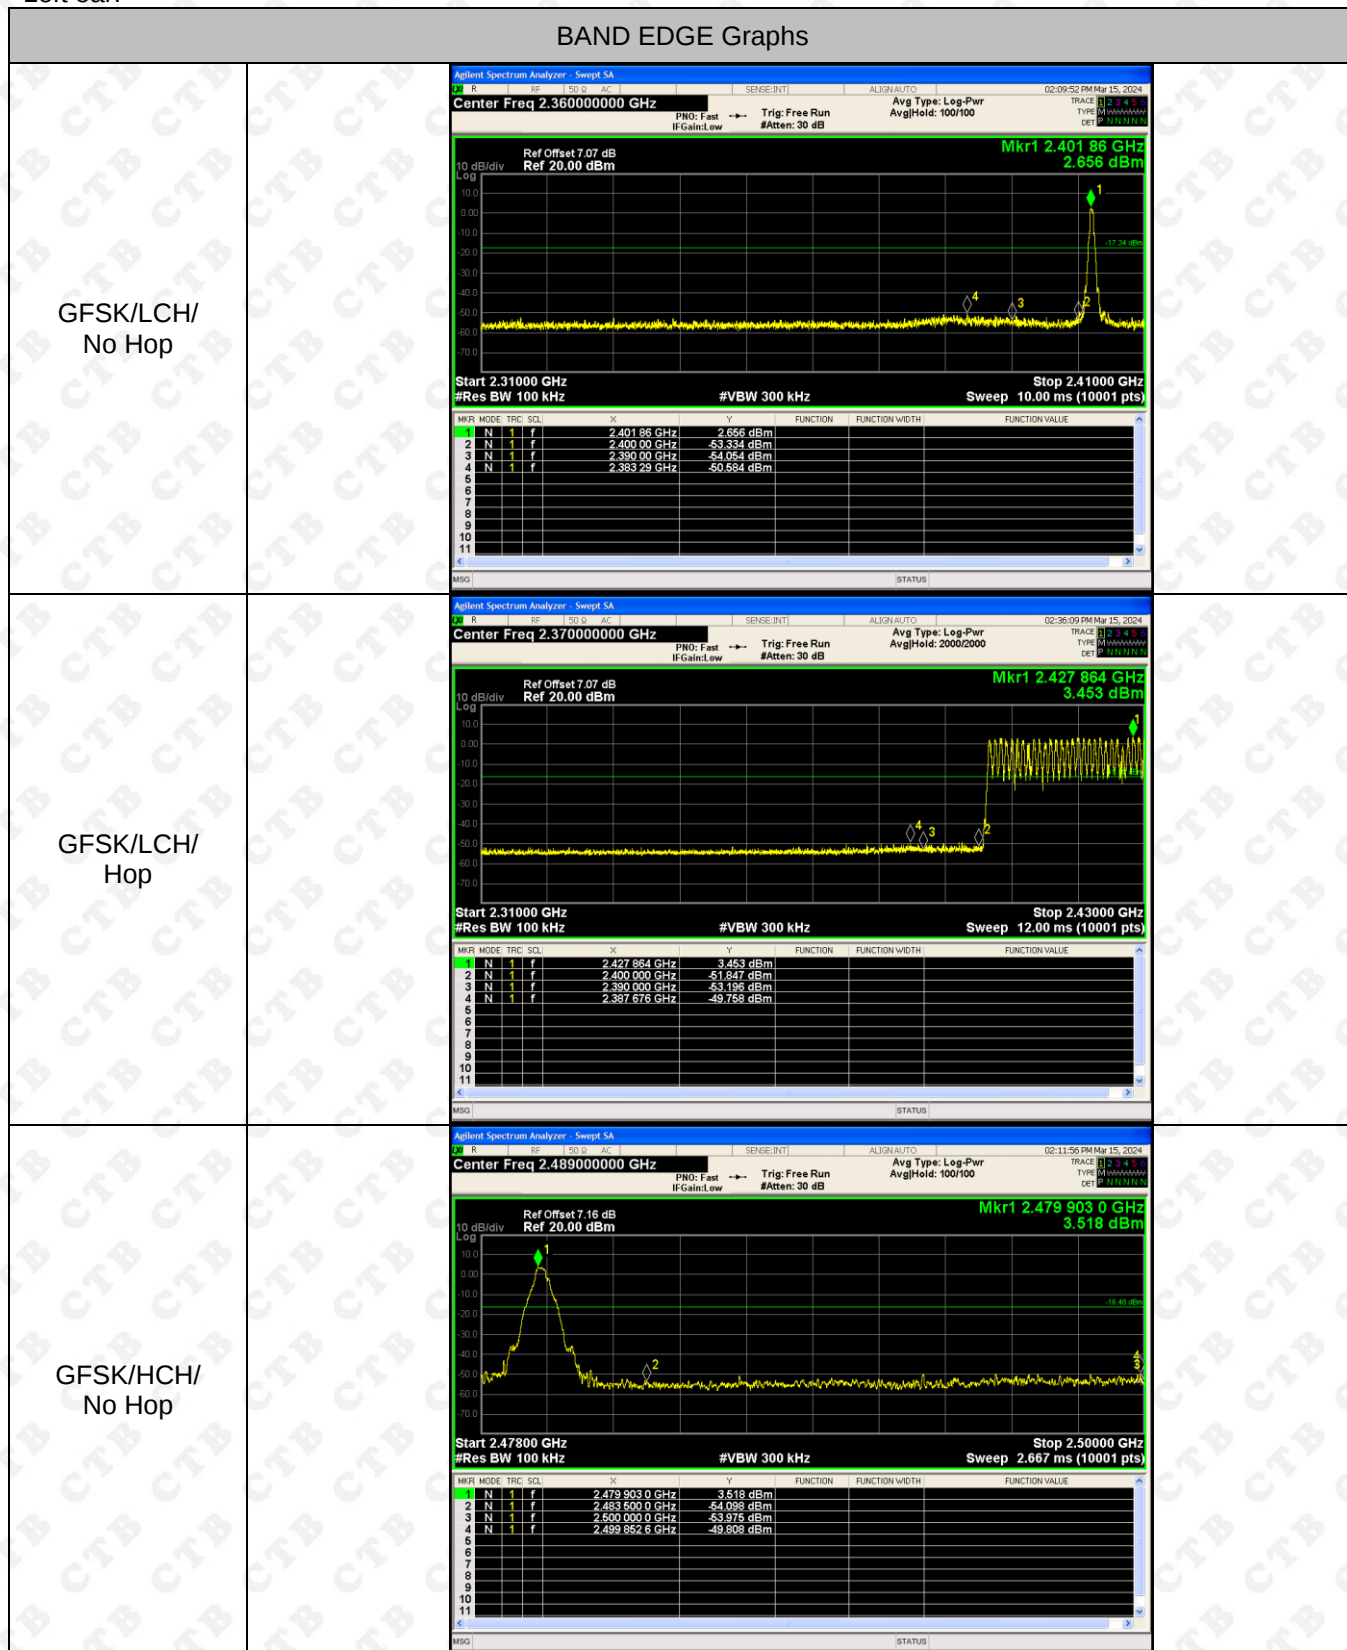


GFSK/HCH/
Hop

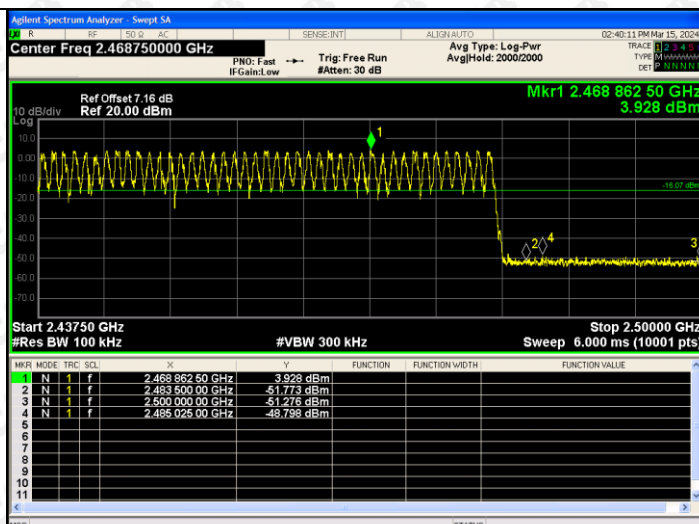


$\pi/4$ DQPSK/LCH/
No Hop

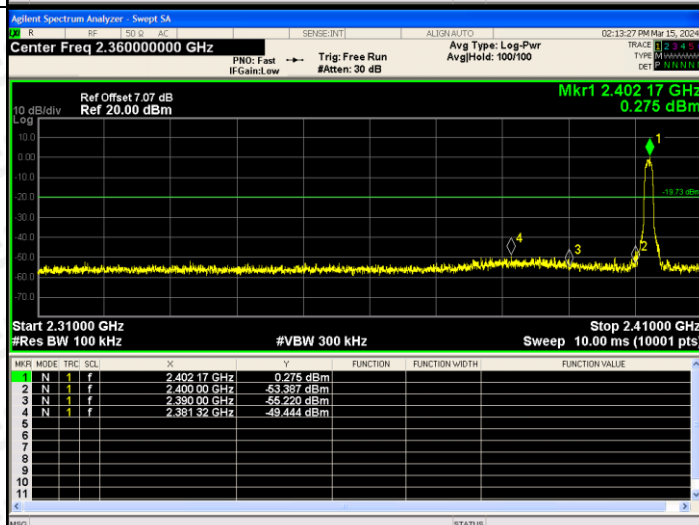


$\pi/4$ DQPSK/LCH/
Hop

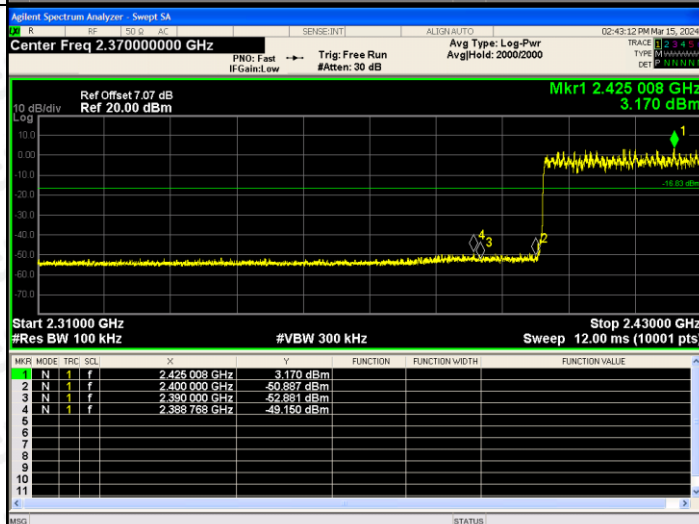

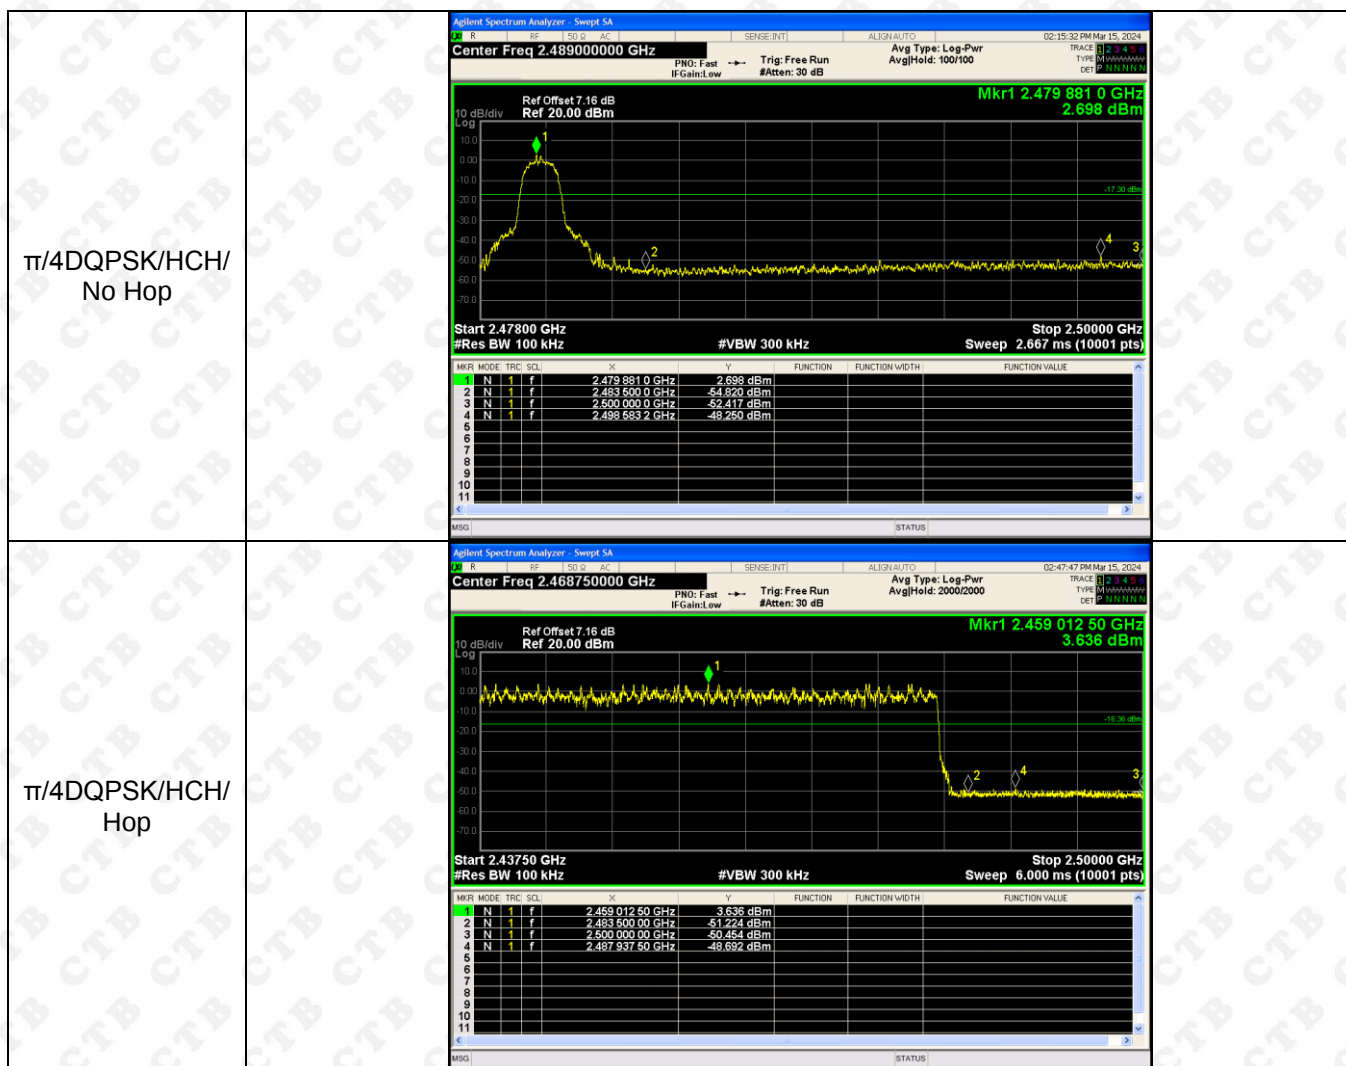


RF Conducted Spurious Emissions Graphs


GFSK/LCH

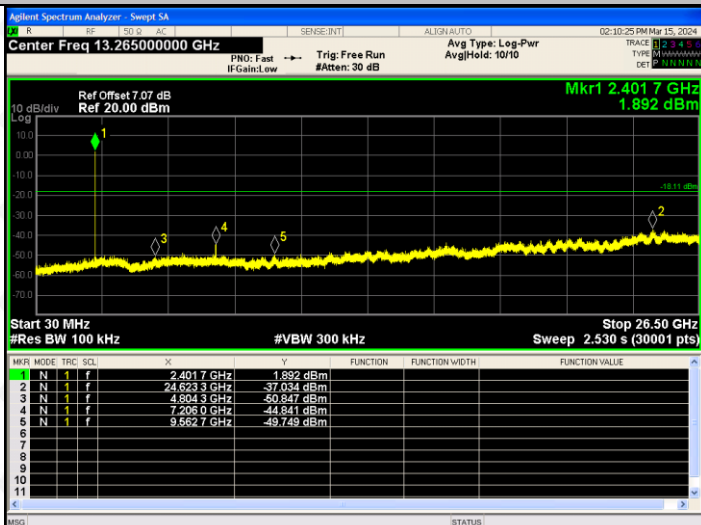

GFSK/MCH

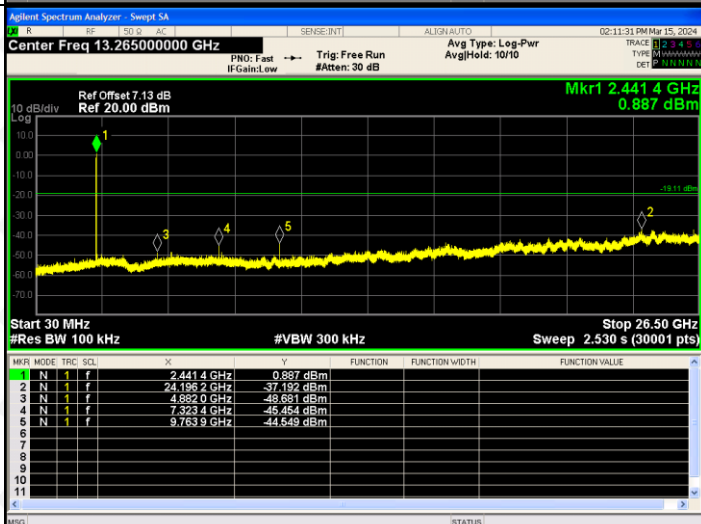




GFSK/HCH

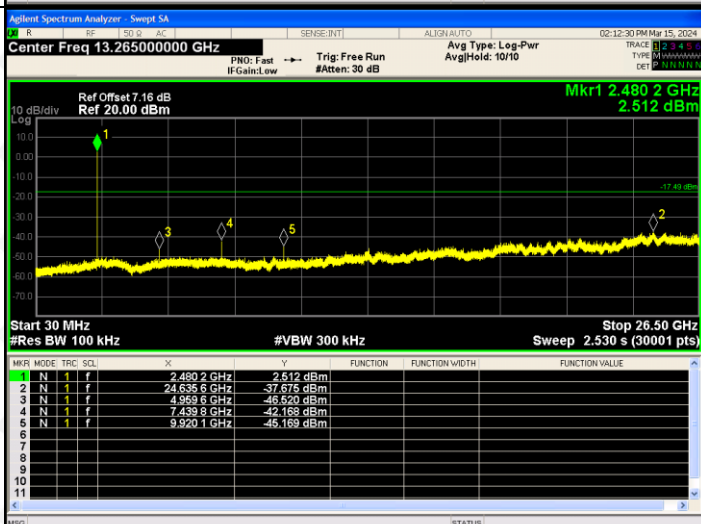


$\pi/4$ DQPSK /LCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 7.07 dB Ref 20.00 dBm Mkr1 2.4017 GHz -1.238 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><thead><tr><th>MNR</th><th>MODE</th><th>TRIG</th><th>SQ</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4017 GHz</td><td>-1.238 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.6480 GHz</td><td>-37.107 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.9164 GHz</td><td>-50.028 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.2080 GHz</td><td>-47.832 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.6077 GHz</td><td>-45.279 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MNR	MODE	TRIG	SQ	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4017 GHz	-1.238 dBm				2	N	1	f	24.6480 GHz	-37.107 dBm				3	N	1	f	4.9164 GHz	-50.028 dBm				4	N	1	f	7.2080 GHz	-47.832 dBm				5	N	1	f	9.6077 GHz	-45.279 dBm			
MNR	MODE	TRIG	SQ	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4017 GHz	-1.238 dBm																																																		
2	N	1	f	24.6480 GHz	-37.107 dBm																																																		
3	N	1	f	4.9164 GHz	-50.028 dBm																																																		
4	N	1	f	7.2080 GHz	-47.832 dBm																																																		
5	N	1	f	9.6077 GHz	-45.279 dBm																																																		
$\pi/4$ DQPSK/MCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 7.13 dB Ref 20.00 dBm Mkr1 2.4414 GHz -1.171 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><thead><tr><th>MNR</th><th>MODE</th><th>TRIG</th><th>SQ</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4414 GHz</td><td>-1.171 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.6569 GHz</td><td>-36.972 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.8820 GHz</td><td>-49.718 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.3225 GHz</td><td>-48.320 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.7639 GHz</td><td>-46.155 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MNR	MODE	TRIG	SQ	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4414 GHz	-1.171 dBm				2	N	1	f	24.6569 GHz	-36.972 dBm				3	N	1	f	4.8820 GHz	-49.718 dBm				4	N	1	f	7.3225 GHz	-48.320 dBm				5	N	1	f	9.7639 GHz	-46.155 dBm			
MNR	MODE	TRIG	SQ	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4414 GHz	-1.171 dBm																																																		
2	N	1	f	24.6569 GHz	-36.972 dBm																																																		
3	N	1	f	4.8820 GHz	-49.718 dBm																																																		
4	N	1	f	7.3225 GHz	-48.320 dBm																																																		
5	N	1	f	9.7639 GHz	-46.155 dBm																																																		
$\pi/4$ DQPSK/HCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 7.16 dB Ref 20.00 dBm Mkr1 2.4802 GHz -2.110 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><thead><tr><th>MNR</th><th>MODE</th><th>TRIG</th><th>SQ</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4802 GHz</td><td>-2.110 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.6289 GHz</td><td>-36.907 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.9596 GHz</td><td>-48.033 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.4398 GHz</td><td>-48.217 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.9201 GHz</td><td>-42.627 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MNR	MODE	TRIG	SQ	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4802 GHz	-2.110 dBm				2	N	1	f	24.6289 GHz	-36.907 dBm				3	N	1	f	4.9596 GHz	-48.033 dBm				4	N	1	f	7.4398 GHz	-48.217 dBm				5	N	1	f	9.9201 GHz	-42.627 dBm			
MNR	MODE	TRIG	SQ	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4802 GHz	-2.110 dBm																																																		
2	N	1	f	24.6289 GHz	-36.907 dBm																																																		
3	N	1	f	4.9596 GHz	-48.033 dBm																																																		
4	N	1	f	7.4398 GHz	-48.217 dBm																																																		
5	N	1	f	9.9201 GHz	-42.627 dBm																																																		

Right ear:


BAND EDGE Graphs

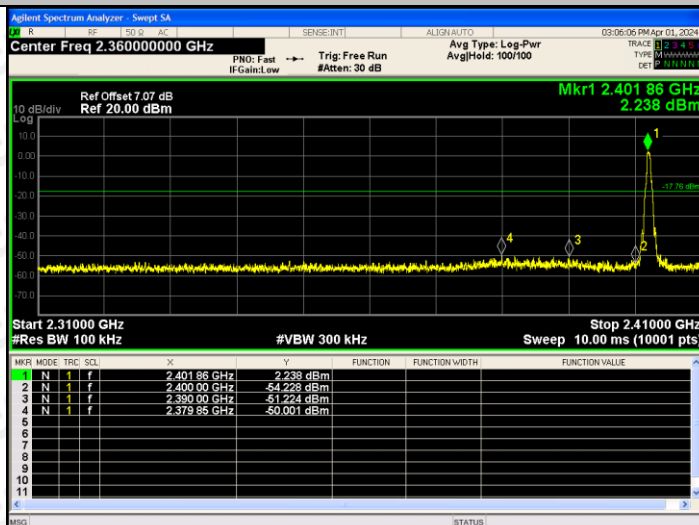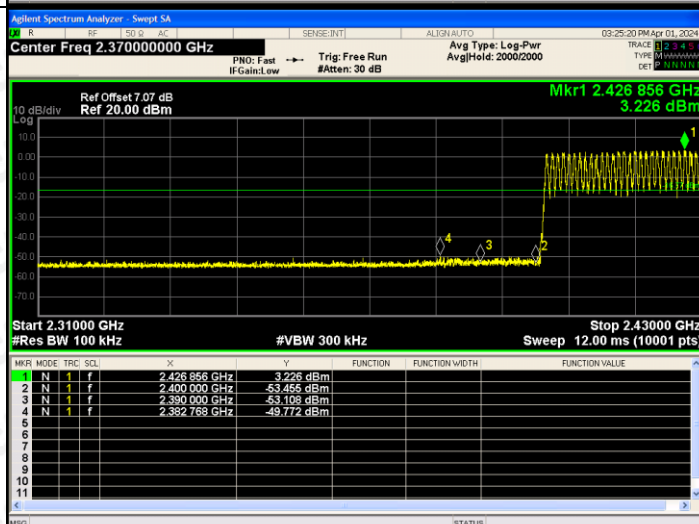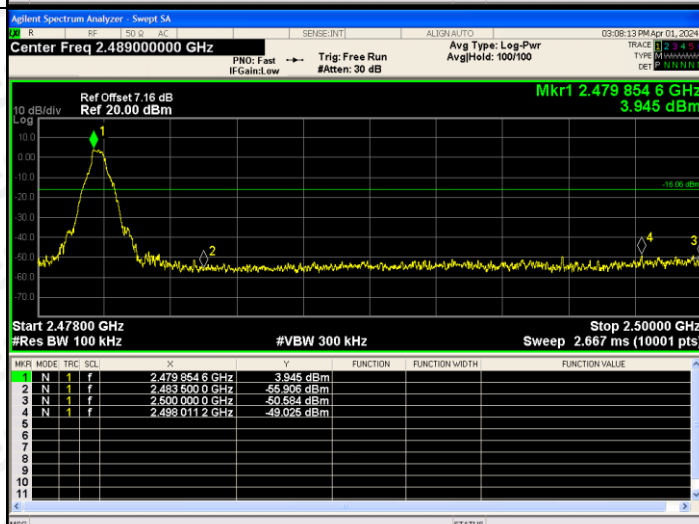GFSK/LCH/
No Hop

GFSK/LCH/
Hop

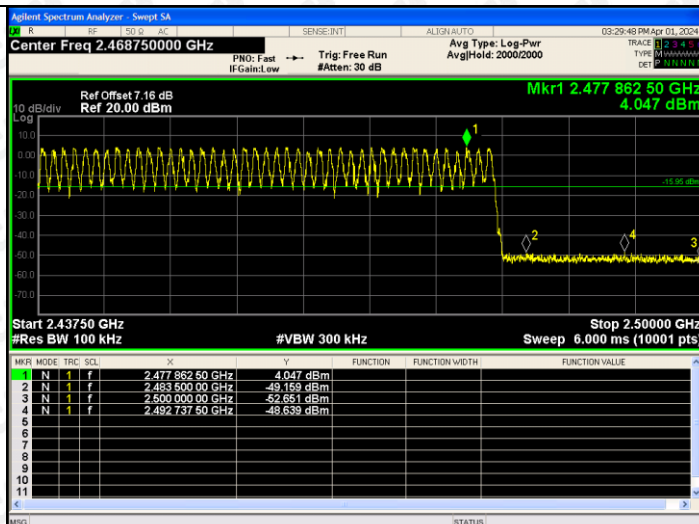GFSK/HCH/
No Hop


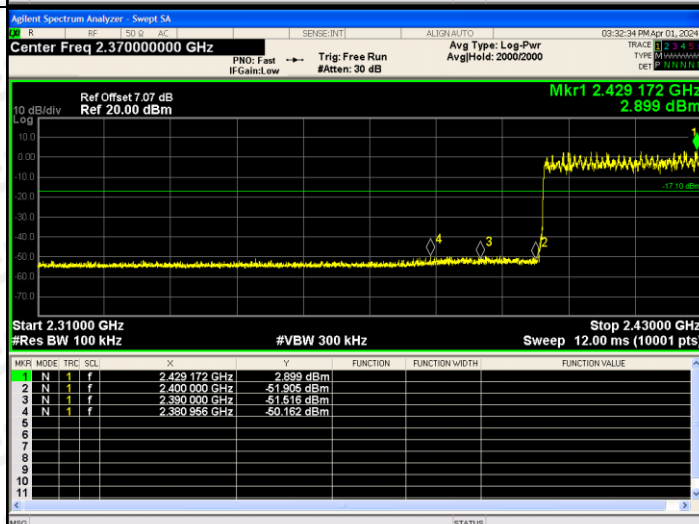
GFSK/HCH/
Hop

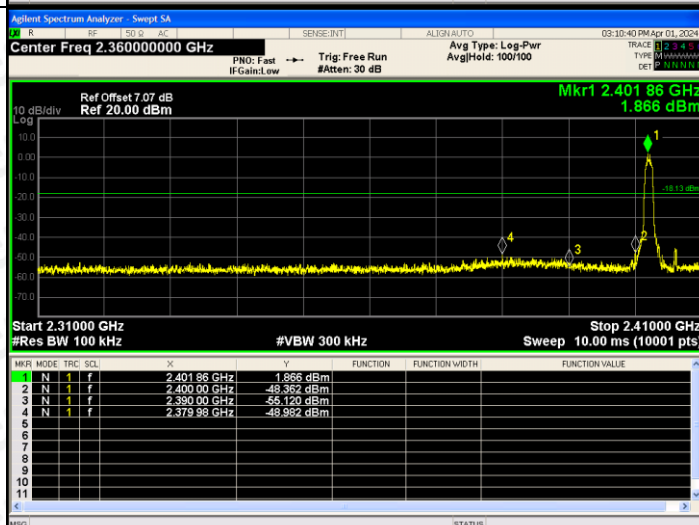


$\pi/4$ DQPSK/LCH/
No Hop




$\pi/4$ DQPSK/LCH/
Hop



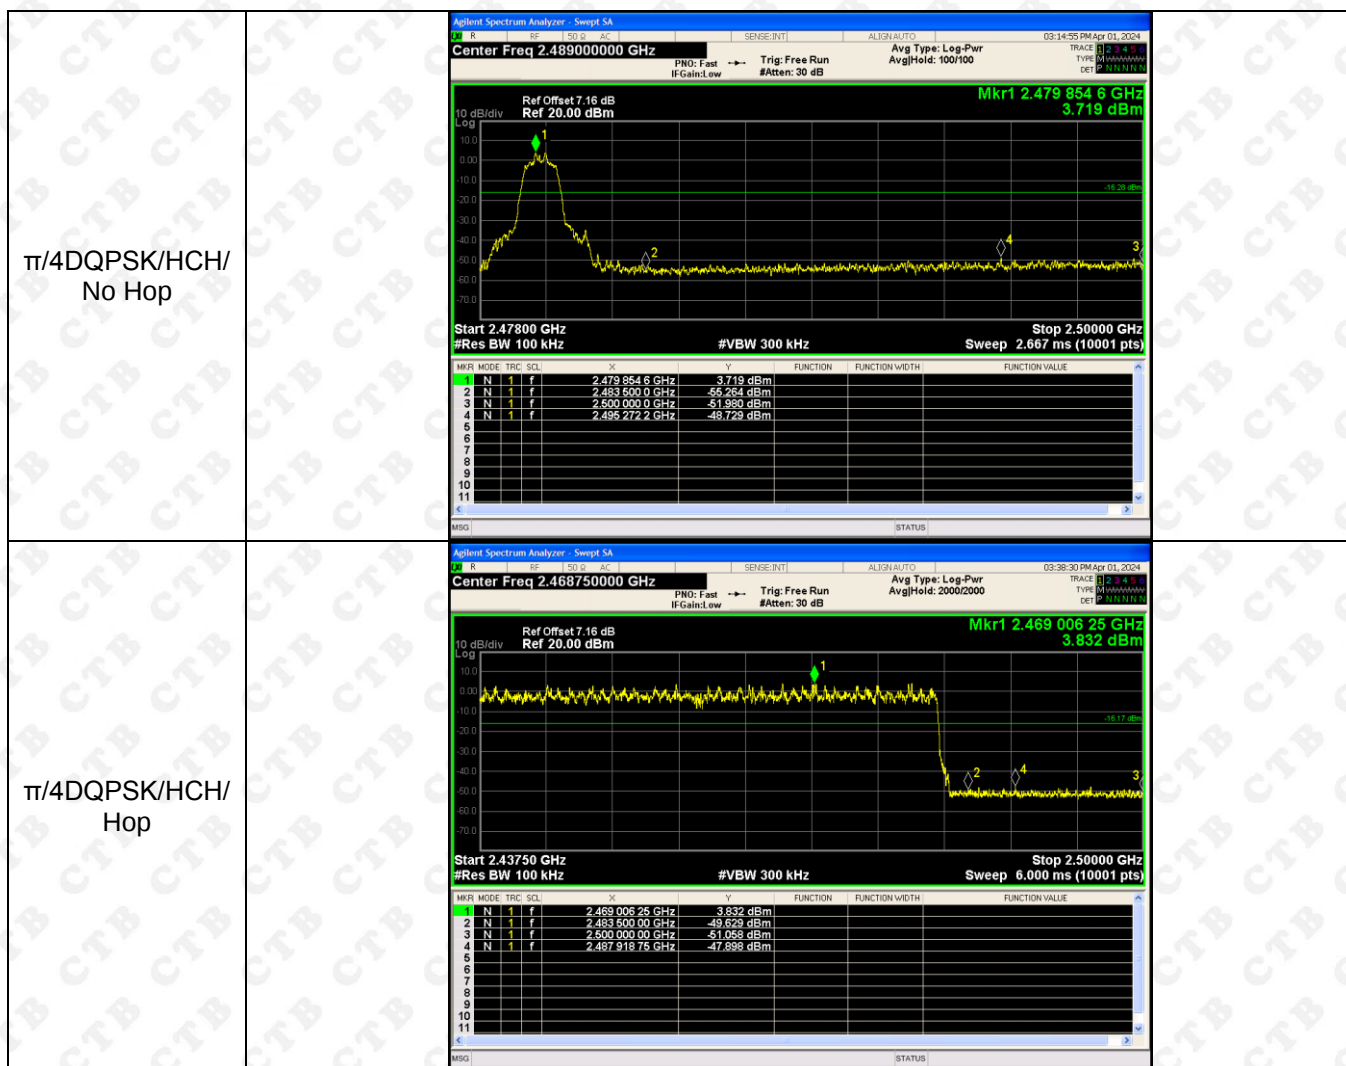


RF Conducted Spurious Emissions Graphs


GFSK/LCH

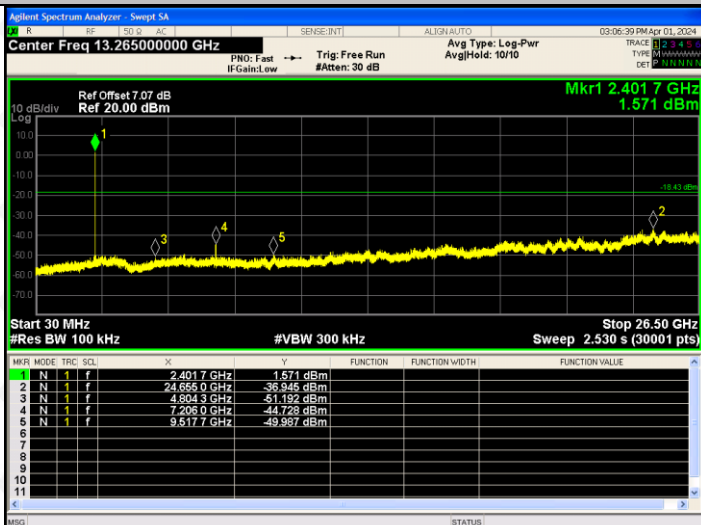

GFSK/MCH

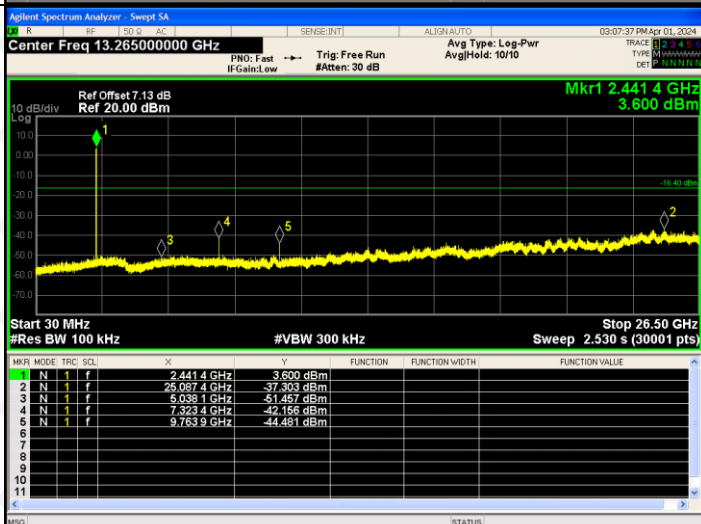


GFSK/HCH

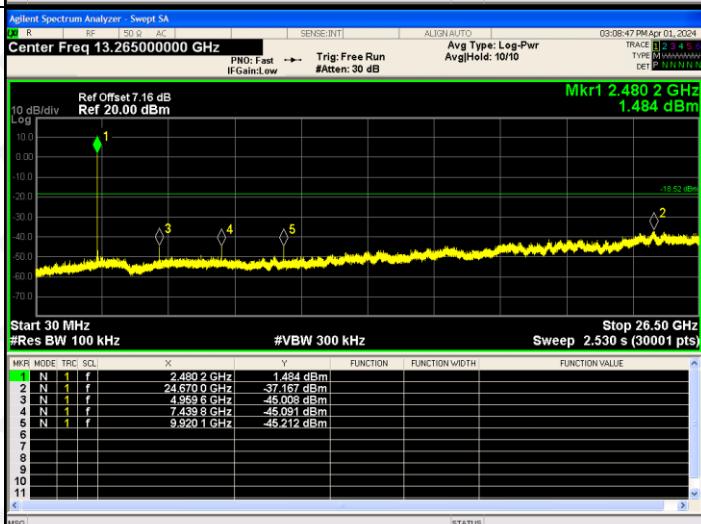

$\pi/4$ DQPSK /LCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 7.07 dB Ref 20.00 dBm Mkr1 2.401 7 GHz -2.329 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRIG</th><th>SOL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.401 7 GHz</td><td>-2.329 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.662 1 GHz</td><td>-36.856 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.804 3 GHz</td><td>-51.592 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.208 0 GHz</td><td>-49.413 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.607 7 GHz</td><td>-45.509 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRIG	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.401 7 GHz	-2.329 dBm				2	N	1	f	24.662 1 GHz	-36.856 dBm				3	N	1	f	4.804 3 GHz	-51.592 dBm				4	N	1	f	7.208 0 GHz	-49.413 dBm				5	N	1	f	9.607 7 GHz	-45.509 dBm			
MNR	MODE	TRIG	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.401 7 GHz	-2.329 dBm																																																		
2	N	1	f	24.662 1 GHz	-36.856 dBm																																																		
3	N	1	f	4.804 3 GHz	-51.592 dBm																																																		
4	N	1	f	7.208 0 GHz	-49.413 dBm																																																		
5	N	1	f	9.607 7 GHz	-45.509 dBm																																																		
$\pi/4$ DQPSK/MCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 7.13 dB Ref 20.00 dBm Mkr1 2.441 4 GHz 2.332 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRIG</th><th>SOL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.441 4 GHz</td><td>2.332 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.633 0 GHz</td><td>-37.188 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.882 0 GHz</td><td>-47.119 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.322 5 GHz</td><td>-47.787 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.763 9 GHz</td><td>-43.559 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRIG	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.441 4 GHz	2.332 dBm				2	N	1	f	24.633 0 GHz	-37.188 dBm				3	N	1	f	4.882 0 GHz	-47.119 dBm				4	N	1	f	7.322 5 GHz	-47.787 dBm				5	N	1	f	9.763 9 GHz	-43.559 dBm			
MNR	MODE	TRIG	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.441 4 GHz	2.332 dBm																																																		
2	N	1	f	24.633 0 GHz	-37.188 dBm																																																		
3	N	1	f	4.882 0 GHz	-47.119 dBm																																																		
4	N	1	f	7.322 5 GHz	-47.787 dBm																																																		
5	N	1	f	9.763 9 GHz	-43.559 dBm																																																		
$\pi/4$ DQPSK/HCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 7.16 dB Ref 20.00 dBm Mkr1 2.480 2 GHz -1.854 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRIG</th><th>SOL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.480 2 GHz</td><td>-1.854 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.656 8 GHz</td><td>-37.354 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.959 6 GHz</td><td>-49.631 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.439 8 GHz</td><td>-47.650 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.920 1 GHz</td><td>-43.446 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRIG	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.480 2 GHz	-1.854 dBm				2	N	1	f	24.656 8 GHz	-37.354 dBm				3	N	1	f	4.959 6 GHz	-49.631 dBm				4	N	1	f	7.439 8 GHz	-47.650 dBm				5	N	1	f	9.920 1 GHz	-43.446 dBm			
MNR	MODE	TRIG	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.480 2 GHz	-1.854 dBm																																																		
2	N	1	f	24.656 8 GHz	-37.354 dBm																																																		
3	N	1	f	4.959 6 GHz	-49.631 dBm																																																		
4	N	1	f	7.439 8 GHz	-47.650 dBm																																																		
5	N	1	f	9.920 1 GHz	-43.446 dBm																																																		

9. COUDUCTED PEAK OUTPUT POWER

9.1 Block Diagram Of Test Setup

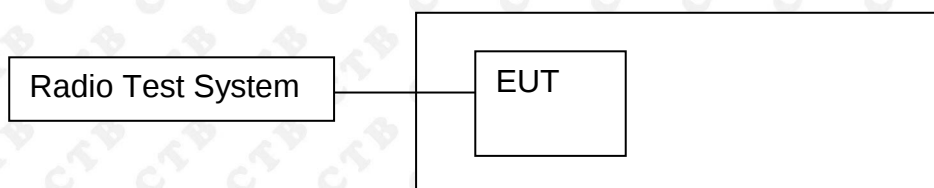

9.2 Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

9.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 2MHz. VBW = 6MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.

9.4 Test Result

Left ear:


Mode	Channel.	Maximum Peak Output Power [dBm]	Limit [dBm]	Verdict
EDR mode (GFSK)	LCH	2.774	20.97	PASS
	MCH	3.795	20.97	PASS
	HCH	3.869	20.97	PASS
EDR mode ($\pi/4$ DQPSK)	LCH	3.588	20.97	PASS
	MCH	4.496	20.97	PASS
	HCH	4.483	20.97	PASS




Right ear

Mode	Channel.	Maximum Peak Output Power [dBm]	Limit [dBm]	Verdict
EDR mode (GFSK)	LCH	2.413	20.97	PASS
	MCH	3.905	20.97	PASS
	HCH	4.065	20.97	PASS
EDR mode ($\pi/4$ DQPSK)	LCH	3.145	20.97	PASS
	MCH	4.561	20.97	PASS
	HCH	4.713	20.97	PASS

Left ear:

Test Graph:

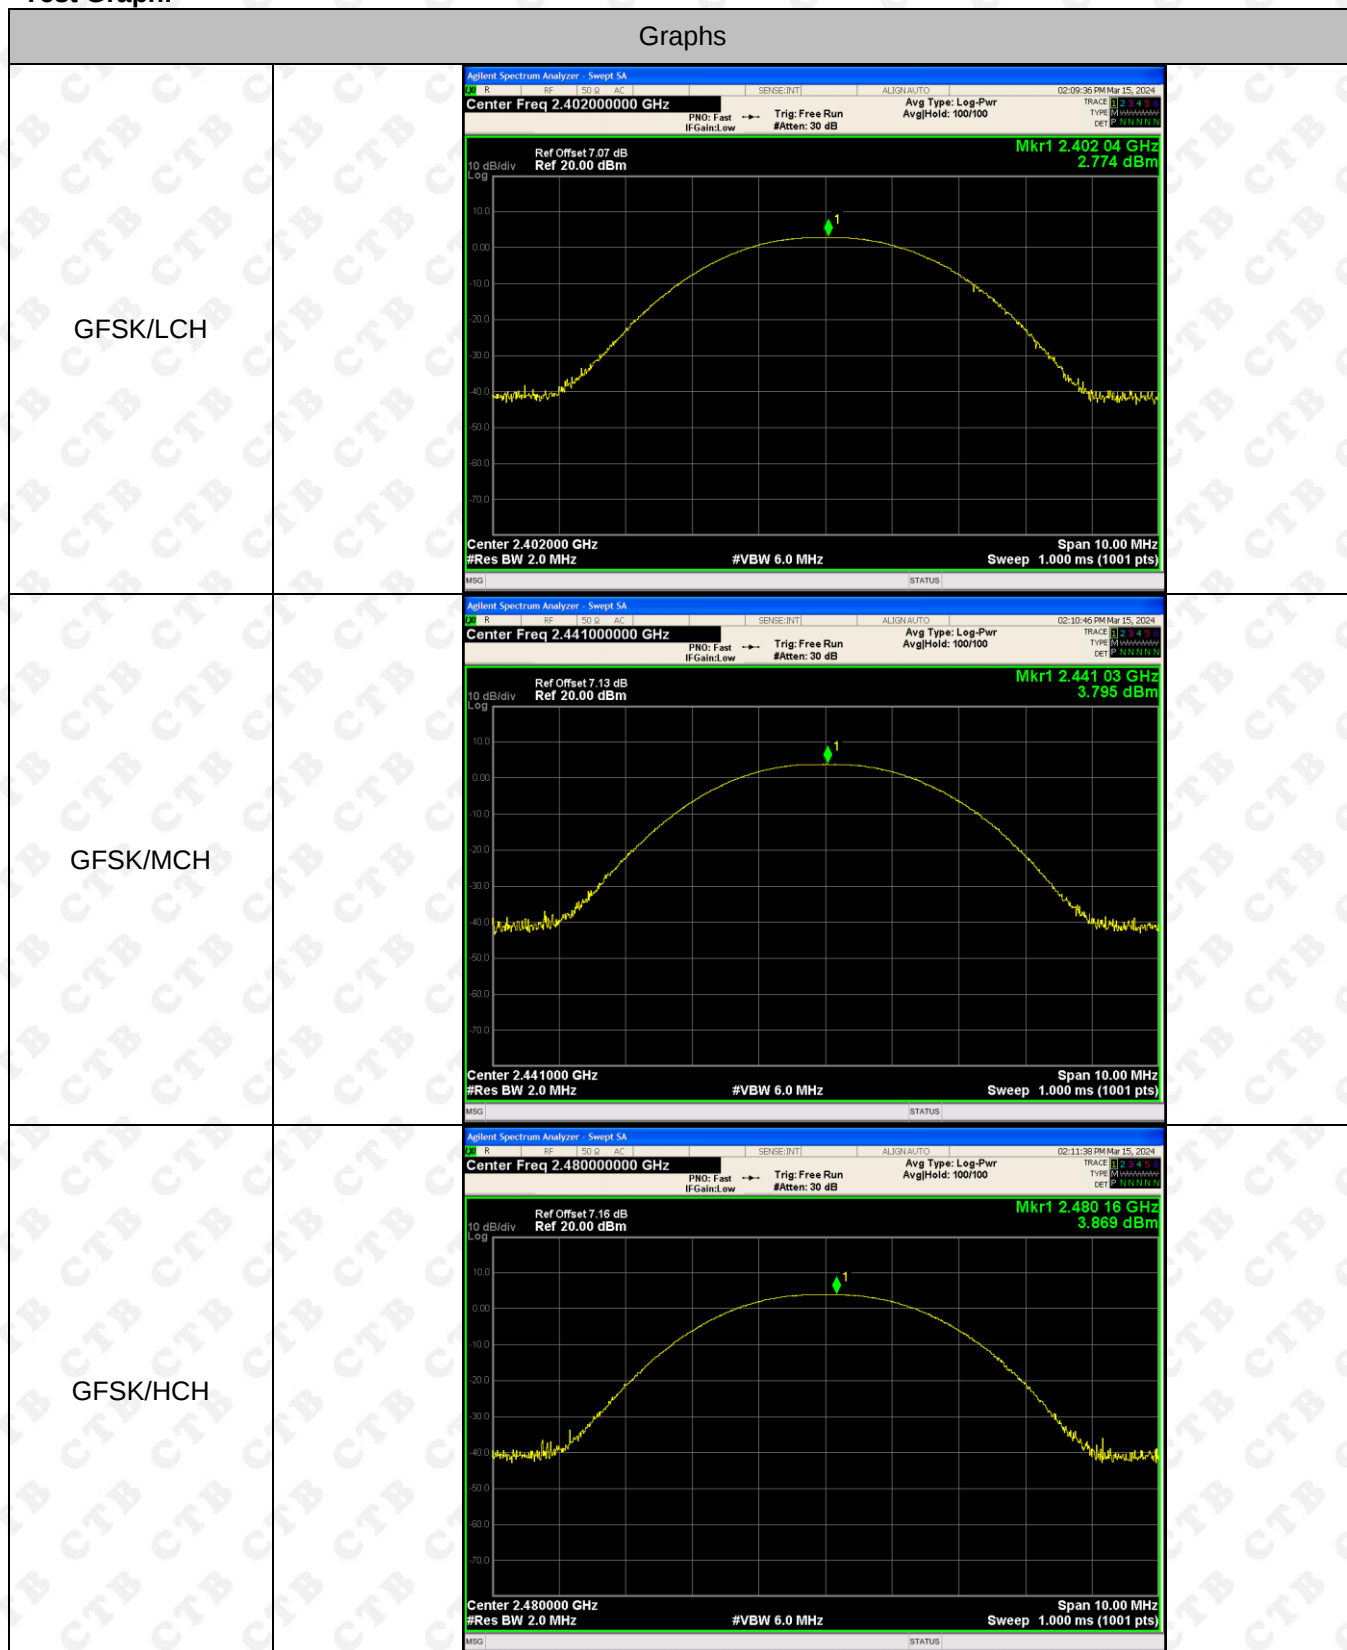

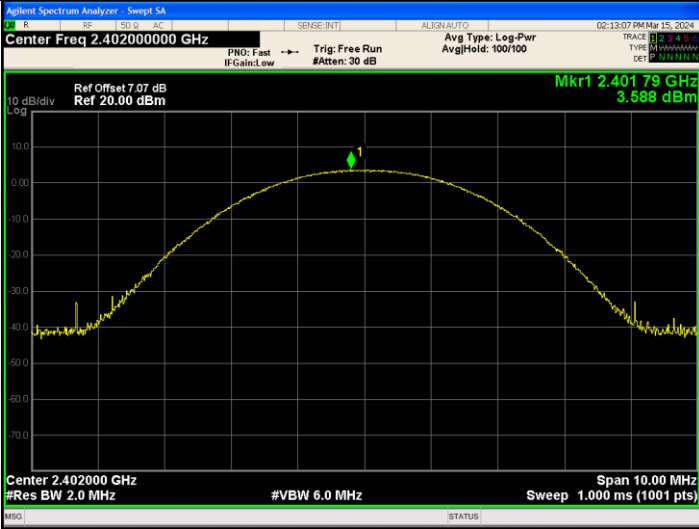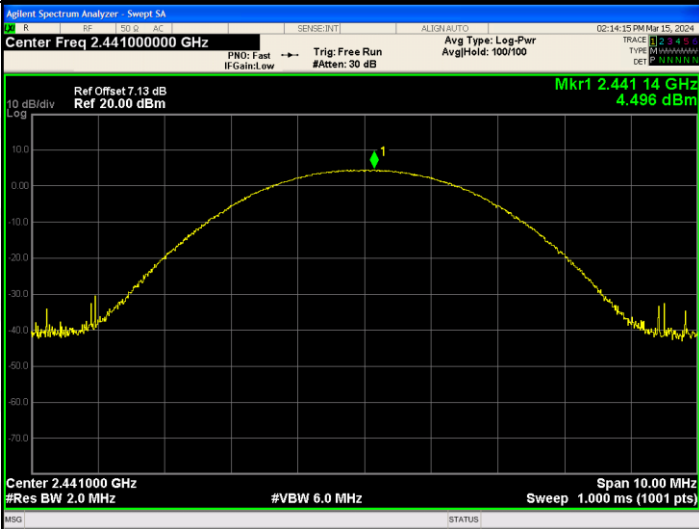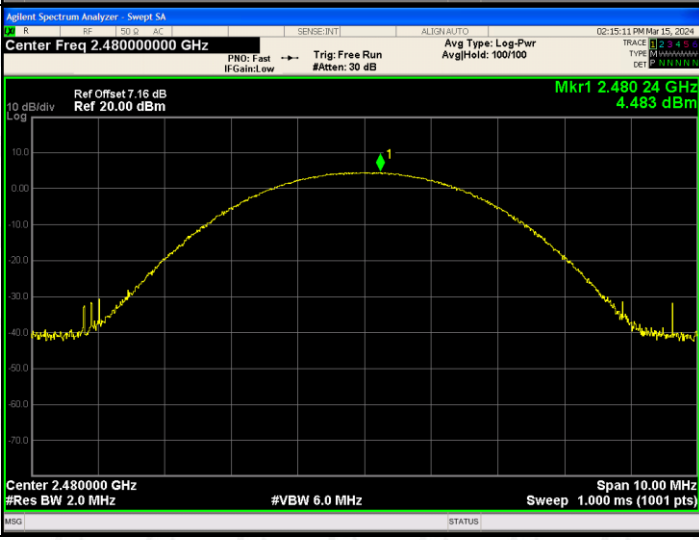$\pi/4$ DQPSK/LCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.40200000 GHz Ref Offset 7.07 dB Ref 20.00 dBm Mkr1 2.401 79 GHz 3.588 dBm Center 2.402000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)
$\pi/4$ DQPSK/MCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.44100000 GHz Ref Offset 7.13 dB Ref 20.00 dBm Mkr1 2.441 14 GHz 4.496 dBm Center 2.441000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)
$\pi/4$ DQPSK/HCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.48000000 GHz Ref Offset 7.16 dB Ref 20.00 dBm Mkr1 2.480 24 GHz 4.483 dBm Center 2.480000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)

Right ear:
Test Graph:

Graphs	
GFSK/LCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 2.40200000 GHz Ref Offset 7.07 dB Ref 20.00 dBm Mkr1 2.402 17 GHz 2.413 dBm Center 2.402000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)
GFSK/MCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 2.44100000 GHz Ref Offset 7.13 dB Ref 20.00 dBm Mkr1 2.441 01 GHz 3.905 dBm Center 2.441000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)
GFSK/HCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 2.48000000 GHz Ref Offset 7.16 dB Ref 20.00 dBm Mkr1 2.480 12 GHz 4.085 dBm Center 2.480000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)