



TEST REPORT

Product Name: 4G Mobile Wifi
FCC ID: 2BFHE-M603
Trademark: N/A
Model Number: M603, M603H, MF523E, M232, MF56, MF21, D21
Prepared For: Hunan Danuo Technology Co., Ltd.
Address: Xiangnan International Logistics Park, Building B7, No.89, Guo Qing South Road, Beihu District, Chenzhou City, Hunan Province.
Manufacturer: Hunan Danuo Technology Co., Ltd.
Address: Xiangnan International Logistics Park, Building B7, No.89, Guo Qing South Road, Beihu District, Chenzhou City, Hunan Province.
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: Feb. 22, 2024
Sample tested Date: Feb. 22, 2024 to Mar. 12, 2024
Issue Date: Mar. 12, 2024
Report No.: CTB240229030RFX
Test Standards: FCC Part15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is WIFI-2.4GHz band radio test report.

Compiled by:

Reviewed by:

Approved by:

Zhou kui

Arron Liu



Zhou Kui

Arron Liu

Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION.....	3
2. TEST SUMMARY	4
3. MEASUREMENT UNCERTAINTY	5
4. PRODUCT INFORMATION AND TEST SETUP	6
4.1 Product Information	6
4.2 Test Setup Configuration.....	6
4.3 Support Equipment.....	6
4.4 Channel List	7
4.5 Test Mode	7
4.6 Test Environment	7
5. TEST FACILITY AND TEST INSTRUMENT USED	8
5.1 Test Facility	8
5.2 Test Instrument Used	8
6. AC POWER LINE CONDUCTED EMISSION	10
6.1 Block Diagram Of Test Setup.....	10
6.2 Limit.....	10
6.3 Test procedure	10
6.4 Test Result	12
7. RADIATED SPURIOUS EMISSION	14
7.1 Block Diagram Of Test Setup.....	14
7.2 Limit.....	14
7.3 Test procedure	15
7.4 Test Result	16
8. BAND EDGE AND RF COUNDUCTED SPURIOUS EMISSIONS	38
8.1 Block Diagram Of Test Setup.....	38
8.2 Limit.....	38
8.3 Test procedure	38
9. COUDUCTED OUTPUT POWER.....	55
9.1 Block Diagram Of Test Setup.....	55
9.2 Limit.....	55
9.3 Test procedure	55
9.4 Test Result	56
10. 6DB OCCUPIED BANDWIDTH.....	57
10.1 Block Diagram Of Test Setup.....	57
10.2 Limit.....	57
10.3 Test procedure	57
10.4 Test Result	58
11. POWER SPECTRAL DENSITY.....	68
11.1 Block Diagram Of Test Setup.....	68
11.2 Limit.....	68
11.3 Test procedure	68
11.4 Test Result	69
12. ANTENNA REQUIREMENT	78
13. EUT TEST SETUP PHOTOGRAPHS.....	79

(Note: N/A means not applicable)



1. **VERSION**

Report No.	Issue Date	Description	Approved
CTB240229030RFX	Mar. 12, 2024	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013/ KDB 558074 D01 v05r02	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1091	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	U=±54.3Hz
Conducted output power Above 1G	U=±1.0dB
Conducted output power below 1G	U=±0.9dB
Power Spectral Density , Conduction	U=±1.0dB
Conduction spurious emissions	U=±2.8dB
Out of band emission	U=±54Hz
3m chamber Radiated spurious emission(9KHz-30MHz)	U=±4.8dB
3m chamber Radiated spurious emission(30MHz-1GHz)	U=±4.3dB
3m chamber Radiated spurious emission(1GHz-18GHz)	U=±4.5dB
3m chamber Radiated spurious emission(1GHz-40GHz)	U=±4.8dB
humidity uncertainty	U=±5.3%
Temperature uncertainty	U=±0.59°C
Supply voltages	U=±3%
Time	U=±5%
Conducted Emission (9KHz-30MHz)	3.2 dB

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	M603, M603H, MF523E, M232, MF56, MF21, D21
Model Description:	All the model are the same circuit and RF module, only different for model name .Test sample model: M603
Wi-Fi Specification:	IEEE 802.11b/g/n
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	WiFi: IEEE 802.11b/g/n 20: 2412-2462MHz/ 11 channel IEEE 802.11n 40: 2422-2452MHz/ 7 channel
Max. RF output power:	WiFi (2.4G): 17.874dBm
Type of Modulation:	WiFi: DSSS, OFDM
Antenna installation:	WiFi: Internal antenna
Antenna Gain:	WiFi (2.4G): Ant1: 1.33dBi Ant2: 1.07dBi
Ratings:	DC 5V charging from adapter Battery DC 3.7V

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/TypeNo.	SeriesNo.	Note
1	Adapter	JIYIN	JY-05100C	N/A	N/A

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462		

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

ANT 1, ANT 2

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11b/g/n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

MIMO(ANT 1+ANT 2)

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

EUT has two Internal Antenna with Max Antenna Gain 0.32dBi on every antenna, CDD device with two spatial streams, according to KDB662911 D01 v02r01,

Directional gain= GANT + Array Gain, where Array Gain is as follows.

1) For power spectral density(PSD) measurements,

Array Gain=10log(NANT/NSS)dB=10log(2/1)=3.01dB,

So the directional gain for PSD is 4.01dBi

2) For power measurements,

The Array gain=0 dB for NANT≤4,

So the directional gain for Power measurements is 1dBi

NOTE: Dutycycle>98%.

Test mode	Rate
802.11b	11M
802.11g	54M
802.11/n20	65M
802.11/n40	65M

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(DC):	3.7
Normal Temperature(°C)	23
Low Temperature(°C)	0
High Temperature(°C)	50

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinh Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

Item	Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	2024.07.05
2	Power Sensor	Agilent	U2021XA	MY56120032	2024.07.05
3	Power Sensor	Agilent	U2021XA	MY56120034	2024.07.05
4	Communication test set	R&S	CMW500	108058	2024.07.05
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	2024.07.05
6	Signal Generator	Agilent	N5181A	MY50140365	2024.07.05
7	Vector signal generator	Agilent	N5182A	MY47420195	2024.07.05
8	Communication test set	Agilent	E5515C	MY50102567	2024.07.06
9	2.4 GHz Filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	2024.07.05
10	5 GHz Filter	Shenxiang	MSF5150-5850 MS-1155	20181015001	2024.07.06
11	Filter	Xingbo	XBLBQ-DZA120	190821-1-1	2024.07.06
12	BT&WI-FI Automatic test software	Microwave	MTS8000	Ver. 2.0.0.0	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2024.10.30
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2024.07.05
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/
16	966 chamber	C.R.T.	966	/	2024.08.11
17	Receiver	R&S	ESPI	100362	2024.07.05
18	Amplifier	HP	8447E	2945A02747	2024.07.05
19	Amplifier	Agilent	8449B	3008A01838	2024.07.05
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2024.07.08


21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	2024.07.08
22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	2024.07.08
24	loop antenna	ZHINAN	ZN30900A	GTS534	/
25	40G Horn antenna	A/H/System	SAS-574	588	2024.10.30
26	Amplifier	AEROFLEX	Aeroflex	097	2024.07.05

Continuous disturbance					
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	LISN	ROHDE&SCHWARZ	ESH3-Z5	100318	2024.07.05
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	2024.07.05
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2024.07.05
4	Coaxial cable	ZDECL	Z302S-NJ-SMA J-12M	18091905	2024.07.05
5	ISN	Schwarzbeck	NTFM8158	183	2024.07.05
6	Communication test set	Agilent	E5515C	MY50102567	2024.07.05
7	Communication test set	R&S	CMW500	108058	2024.07.05
8	EZ-EMC	Frad	EMC-con3A1.1	/	/

Radiated emission					
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	2024.07.08
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2024.07.08
3	Amplifier	Agilent	8449B	3008A01838	2024.07.05
4	Amplifier	HP	8447E	2945A02747	2024.07.05
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2024.07.05
6	Coaxial cable	ETS	RFC-SNS-100-NMS-80 NI	/	2024.07.05
7	Coaxial cable	ETS	RFC-SNS-100-NMS-20 NI	/	2024.07.05
8	Coaxial cable	ETS	RFC-SNS-100-SMS-20 NI	/	2024.07.05
9	Coaxial cable	ETS	RFC-NNS-100-NMS-300 NI	/	2024.07.05
10	Communication test set	Agilent	E5515C	MY50102567	2024.07.05
11	Communication test set	R&S	CMW500	108058	2024.07.05
12	EZ-EMC	Frad	EMC-con3A1.1	/	/

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

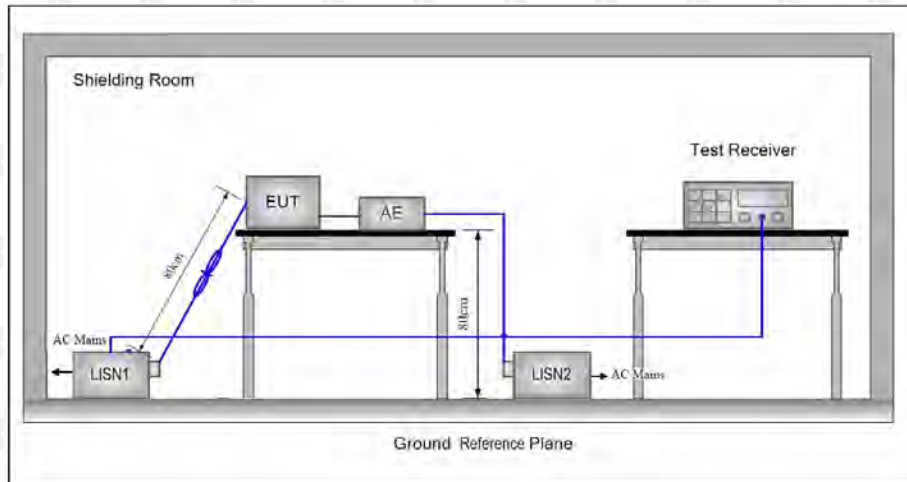

6.2 Limit

Table 4 – AC power-line conducted emissions limits

Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 Ω /50 μ H + 5 Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane.

This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

6.4 Test Result


Test Specification: Line
AC 120V 60Hz

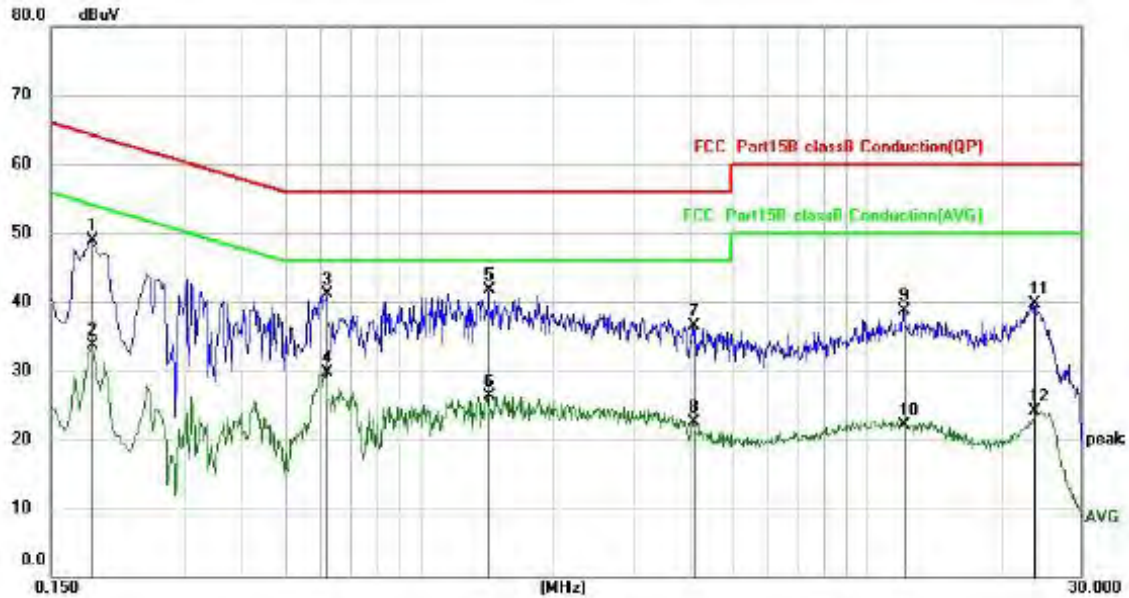

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1860	38.98	9.95	48.93	64.21	-15.28	QP
2		0.1860	23.83	9.95	33.78	54.21	-20.43	AVG
3		0.6220	31.14	10.01	41.15	56.00	-14.85	QP
4		0.6220	19.79	10.01	29.80	46.00	-16.20	AVG
5	*	1.4260	31.60	10.04	41.64	56.00	-14.36	QP
6		1.4260	16.35	10.04	26.39	46.00	-19.61	AVG
7		4.0780	26.16	10.29	36.45	56.00	-19.55	QP
8		4.0780	12.30	10.29	22.59	46.00	-23.41	AVG
9		12.0540	28.12	10.64	38.76	60.00	-21.24	QP
10		12.0540	11.51	10.64	22.15	50.00	-27.85	AVG
11		23.5380	28.70	10.95	39.65	60.00	-20.35	QP
12		23.5380	13.13	10.95	24.08	50.00	-25.92	AVG

Remark: Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Test Specification: Neutral
AC 120V 60Hz

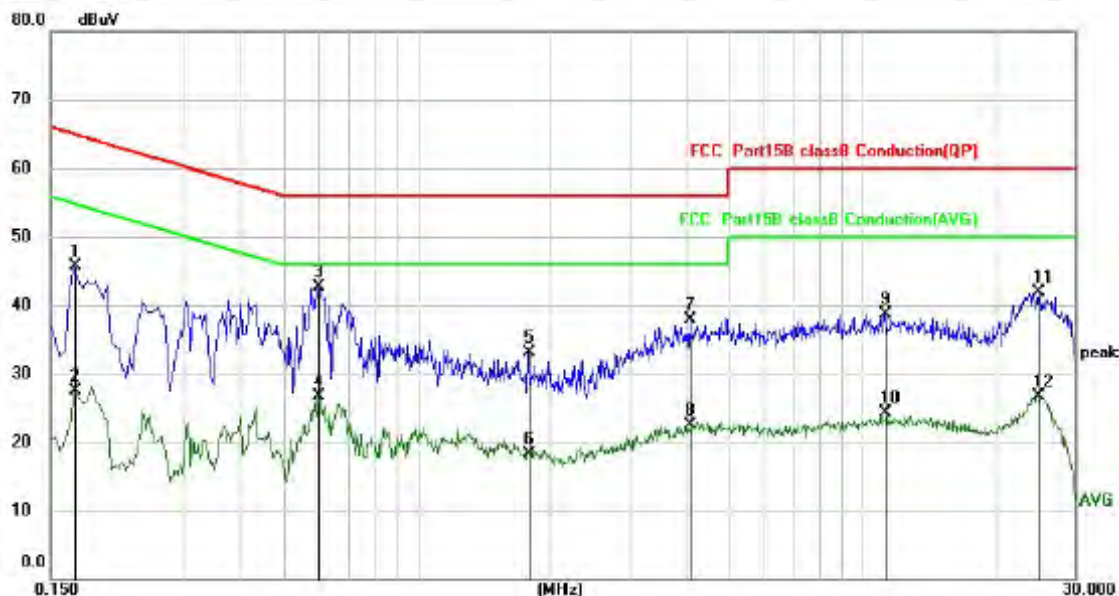

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1700	35.71	9.95	45.66	64.96	-19.30	QP
2		0.1700	17.46	9.95	27.41	54.96	-27.55	AVG
3	*	0.5980	32.78	10.00	42.78	56.00	-13.22	QP
4		0.5980	16.75	10.00	26.75	46.00	-19.25	AVG
5		1.7740	22.99	10.07	33.06	56.00	-22.94	QP
6		1.7740	8.23	10.07	18.30	46.00	-27.70	AVG
7		4.1020	27.54	10.29	37.83	56.00	-18.17	QP
8		4.1020	12.13	10.29	22.42	46.00	-23.58	AVG
9		11.1980	28.18	10.62	38.80	60.00	-21.20	QP
10		11.1980	13.70	10.62	24.32	50.00	-25.68	AVG
11		24.8020	30.88	11.00	41.88	60.00	-18.12	QP
12		24.8020	15.80	11.00	26.80	50.00	-23.20	AVG

Remark: Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

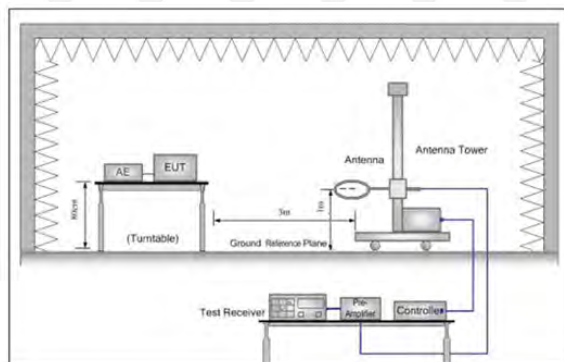


Figure 1. Below 30MHz

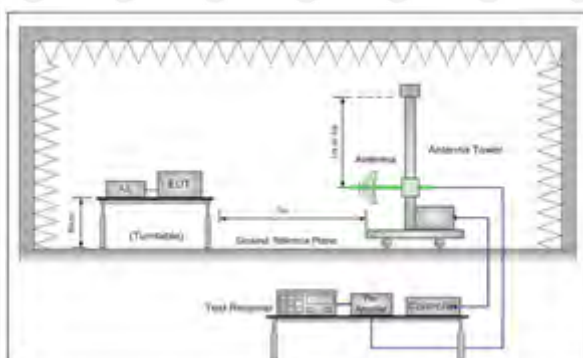


Figure 2. 30MHz to 1GHz

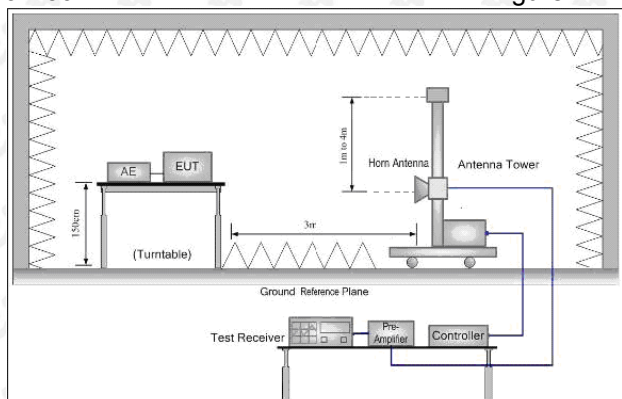


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F (kHz)	-	-	300
0.490MHz-1.705MHz	24000/F (kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- j. Repeat above procedures until all frequencies measured was complete.

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average


The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement –X, Y, and Z-plane. The X-plane results were found as the worst case and were shown in this report.

7.4 Test Result

After pre-scanning three directions, the report recorded the worst case

Below 1GHz Test Results:


Antenna polarity: H

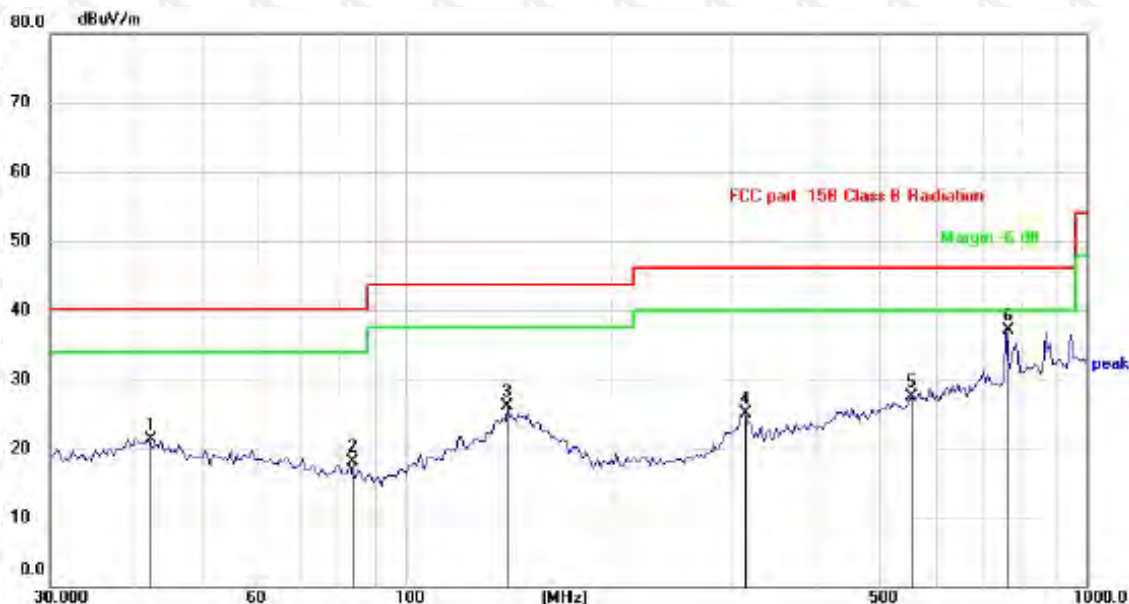

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV/m	dB/m	dB	
1		41.8596	26.47	-5.12	21.35	40.00	-18.65	QP
2		82.9385	27.53	-9.35	18.18	40.00	-21.82	QP
3		141.5777	30.31	-4.20	26.11	43.50	-17.39	QP
4		314.3765	29.39	-4.37	25.02	46.00	-20.98	QP
5		555.7990	25.94	1.49	27.43	46.00	-18.57	QP
6	*	762.0385	31.43	5.71	37.14	46.00	-8.86	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Antenna polarity: V

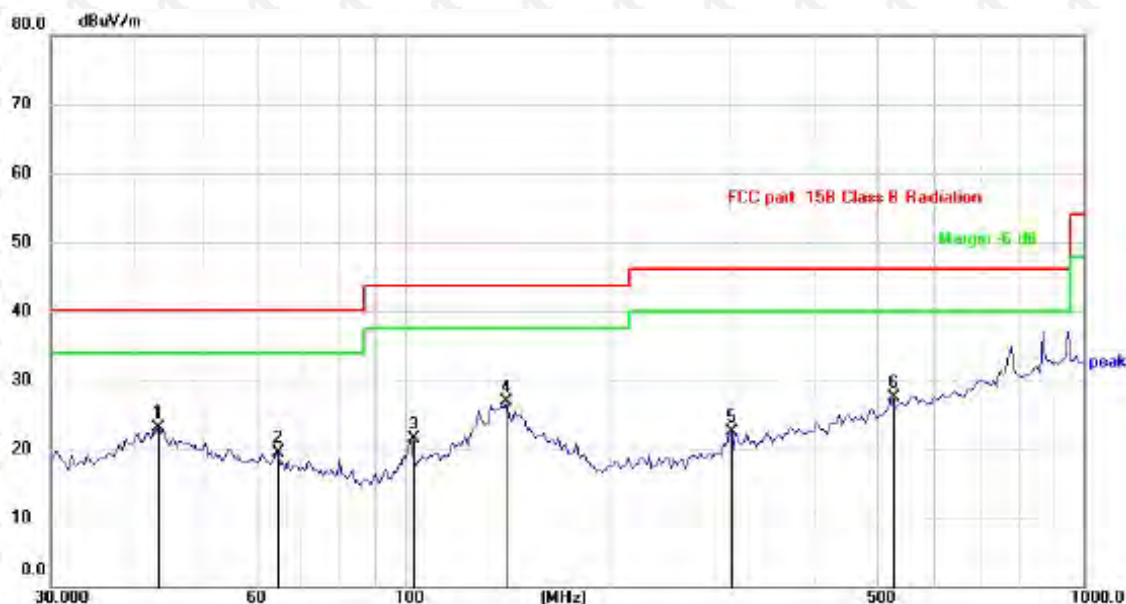

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		43.3534	28.50	-5.40	23.10	40.00	-16.90	QP
2		64.8865	26.84	-7.38	19.46	40.00	-20.54	QP
3		102.3597	29.94	-8.46	21.48	43.50	-22.02	QP
4	*	141.5777	31.14	-4.20	26.94	43.50	-16.56	QP
5		303.5437	27.20	-4.65	22.55	46.00	-23.45	QP
6		522.7180	26.78	0.63	27.41	46.00	-18.59	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

1. The margin of 9K-30MH measurement exceeds 20dB, so the test chart is not included.

2. All modes have been tested, and the test results show that ANT2 b-mode data is the worst, only ANT2 b-mode test chart is put.

Above 1 GHz Test Results:

ANT1 LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	66.31	-3.64	62.67	74	-11.33	peak
4824	49.97	-3.64	46.33	54	-7.67	AVG
7236	58.91	-0.95	57.96	74	-16.04	peak
7236	46.01	-0.95	45.06	54	-8.94	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.42	-3.64	60.78	74	-13.22	peak
4824	47.00	-3.64	43.36	54	-10.64	AVG
7236	57.05	-0.95	56.10	74	-17.90	peak
7236	45.23	-0.95	44.28	54	-9.72	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1 MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detection Type
4874	63.44	-3.51	59.93	74	-14.07	peak
4874	50.33	-3.51	46.82	54	-7.18	AVG
7311	59.24	-0.82	58.42	74	-15.58	peak
7311	44.32	-0.82	43.50	54	-10.50	AVG

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detection Type
4874	63.50	-3.51	59.99	74	-14.01	peak
4874	46.90	-3.51	43.39	54	-10.61	AVG
7311	58.16	-0.82	57.34	74	-16.66	peak
7311	45.13	-0.82	44.31	54	-9.69	AVG

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level
Margin = Emission level - Limits

ANT1 HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924	62.56	-3.43	59.13	74	-14.87	peak
4924	47.89	-3.43	44.46	54	-9.54	AVG
7386	58.53	-0.75	57.78	74	-16.22	peak
7386	43.16	-0.75	42.41	54	-11.59	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924	64.42	-3.43	60.99	74	-13.01	peak
4924	47.83	-3.43	44.40	54	-9.60	AVG
7386	56.85	-0.75	56.10	74	-17.90	peak
7386	41.27	-0.75	40.52	54	-13.48	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown "—" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT1 LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	63.73	-3.64	60.09	74	-13.91	peak
4824	50.61	-3.64	46.97	54	-7.03	AVG
7236	58.44	-0.95	57.49	74	-16.51	peak
7236	45.18	-0.95	44.23	54	-9.77	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	66.60	-3.64	62.96	74	-11.04	peak
4824	47.89	-3.64	44.25	54	-9.75	AVG
7236	57.73	-0.95	56.78	74	-17.22	peak
7236	45.05	-0.95	44.10	54	-9.90	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1 MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detection Type
4874	63.81	-3.51	60.30	74	-13.70	peak
4874	48.04	-3.51	44.53	54	-9.47	AVG
7311	57.86	-0.82	57.04	74	-16.96	peak
7311	43.20	-0.82	42.38	54	-11.62	AVG

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detection Type
4874	63.68	-3.51	60.17	74	-13.83	peak
4874	46.77	-3.51	43.26	54	-10.74	AVG
7311	58.96	-0.82	58.14	74	-15.86	peak
7311	44.94	-0.82	44.12	54	-9.88	AVG

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level
Margin = Emission level - Limits

ANT1 HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detect Type
4924	63.76	-3.43	60.33	74	-13.67	peak
4924	45.90	-3.43	42.47	54	-11.53	AVG
7386	58.45	-0.75	57.70	74	-16.30	peak
7386	43.20	-0.75	42.45	54	-11.55	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detect Type
4924	64.65	-3.43	61.22	74	-12.78	peak
4924	46.06	-3.43	42.63	54	-11.37	AVG
7386	56.87	-0.75	56.12	74	-17.88	peak
7386	41.48	-0.75	40.73	54	-13.27	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown "—" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

Above 1GHz ANT1+ANT2 :

LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.07	-3.64	60.43	74	-13.57	peak
4824	50.88	-3.64	47.24	54	-6.76	AVG
7236	59.46	-0.95	58.51	74	-15.49	peak
7236	44.94	-0.95	43.99	54	-10.01	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	65.94	-3.64	62.30	74	-11.70	peak
4824	48.93	-3.64	45.29	54	-8.71	AVG
7236	57.88	-0.95	56.93	74	-17.07	peak
7236	45.45	-0.95	44.50	54	-9.50	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

LOW CH1 (802.11n/H20 Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detect Type
4874	65.20	-3.51	61.69	74	-12.31	peak
4874	48.88	-3.51	45.37	54	-8.63	AVG
7311	57.60	-0.82	56.78	74	-17.22	peak
7311	45.65	-0.82	44.83	54	-9.17	AVG

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detect Type
4874	62.92	-3.51	59.41	74	-14.59	peak
4874	47.27	-3.51	43.76	54	-10.24	AVG
7311	59.77	-0.82	58.95	74	-15.05	peak
7311	44.21	-0.82	43.39	54	-10.61	AVG

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level
Margin = Emission level - Limits

LOW CH1 (802.11n/H20 Mode)/2462

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detect Type
4924	62.80	-3.43	59.37	74	-14.63	peak
4924	46.14	-3.43	42.71	54	-11.29	AVG
7386	57.69	-0.75	56.94	74	-17.06	peak
7386	43.06	-0.75	42.31	54	-11.69	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detect Type
4924	63.14	-3.43	59.71	74	-14.29	peak
4924	47.83	-3.43	44.40	54	-9.60	AVG
7386	56.27	-0.75	55.52	74	-18.48	peak
7386	42.81	-0.75	42.06	54	-11.94	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown "—" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT1+ANT2 LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4844	63.73	-3.63	60.10	74	-13.90	peak
4844	49.78	-3.63	46.15	54	-7.85	AVG
7266	59.39	-0.94	58.45	74	-15.55	peak
7266	45.35	-0.94	44.41	54	-9.59	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Meter Reading + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4844	64.02	-3.63	60.39	74	-13.61	peak
4844	48.56	-3.63	44.93	54	-9.07	AVG
7266	59.65	-0.94	58.71	74	-15.29	peak
7266	45.14	-0.94	44.20	54	-9.80	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

ANT1+ANT2 MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	64.11	-3.51	60.60	74	-13.40	peak
4874	48.87	-3.51	45.36	54	-8.64	AVG
7311	60.21	-0.82	59.39	74	-14.61	peak
7311	44.22	-0.82	43.40	54	-10.60	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	62.33	-3.51	58.82	74	-15.18	peak
4874	46.52	-3.51	43.01	54	-10.99	AVG
7311	56.68	-0.82	55.86	74	-18.14	peak
7311	43.33	-0.82	42.51	54	-11.49	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

ANT1+ANT2 HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4904	62.52	-3.43	59.09	74	-14.91	peak
4904	47.51	-3.43	44.08	54	-9.92	AVG
7356	58.32	-0.75	57.57	74	-16.43	peak
7356	42.72	-0.75	41.97	54	-12.03	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4904	62.59	-3.43	59.16	74	-14.84	peak
4904	48.21	-3.43	44.78	54	-9.22	AVG
7356	57.15	-0.75	56.40	74	-17.60	peak
7356	43.75	-0.75	43.00	54	-11.00	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level
Margin = Emission level - Limits

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

Restricted bands around fundamental frequency (Radiated)

Operation Mode:

ANT 1 802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.91	-5.81	52.10	74	-21.90	peak
2390	/	-5.81	/	54	/	AVG
2399	64.97	-5.84	59.13	74	-14.87	peak
2399	48.59	-5.84	42.75	54	-11.25	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.76	-5.81	50.95	74	-23.05	peak
2390	/	-5.81	/	54	/	AVG
2399	61.79	-5.84	55.95	74	-18.05	peak
2399	47.38	-5.84	41.54	54	-12.46	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode:

ANT1 802.11b Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.56	-5.65	51.91	74	-22.09	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.98	-5.65	51.33	74	-22.67	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode:

ANT1 802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.74	-5.81	51.93	74	-22.07	peak
2390	/	-5.81	/	54	/	AVG
2399	62.13	-5.84	56.29	74	-17.71	peak
2399	46.83	-5.84	40.99	54	-13.01	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.38	-5.81	50.57	74	-23.43	peak
2390	/	-5.81	/	54	/	AVG
2399	61.49	-5.84	55.65	74	-18.35	peak
2399	45.44	-5.84	39.60	54	-14.40	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode:

ANT1 802.11g Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.02	-5.65	51.37	74	-22.63	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.85	-5.65	52.20	74	-21.80	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode:

ANT1+ANT2 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.08	-5.81	51.27	74	-22.73	peak
2390	/	-5.81	/	54	/	AVG
2399	63.89	-5.84	58.05	74	-15.95	peak
2399	47.27	-5.84	41.43	54	-12.57	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.21	-5.81	51.40	74	-22.60	peak
2390	/	-5.81	/	54	/	AVG
2399	59.97	-5.84	54.13	74	-19.87	peak
2399	48.19	-5.84	42.35	54	-11.65	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode:

ANT1+ANT2 802.11n/H20 Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.67	-5.65	50.02	74	-23.98	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.40	-5.65	50.75	74	-23.25	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode:

ANT1+ANT2 802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	59.35	-5.81	53.54	74	-20.46	peak
2390	/	-5.81	/	54	/	AVG
2399	63.63	-5.84	57.79	74	-16.21	peak
2399	45.78	-5.84	39.94	54	-14.06	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.71	-5.81	52.90	74	-21.10	peak
2390	/	-5.81	/	54	/	AVG
2399	61.21	-5.84	55.37	74	-18.63	peak
2399	46.71	-5.84	40.87	54	-13.13	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Operation Mode:

ANT1+ANT2 802.11n/H40 Mode TX CH High (2452MHz)

Horizontal


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.99	-5.65	51.34	74	-22.66	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.45	-5.65	49.80	74	-24.20	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

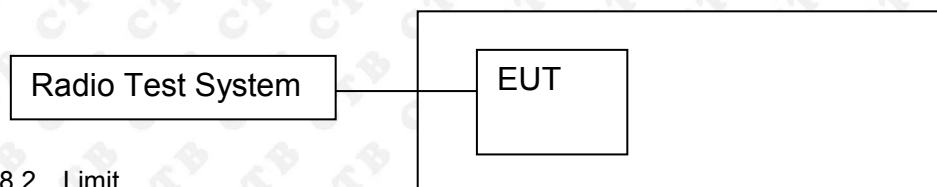

8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
Below 30MHz:
RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold
Above 30MHz:
RBW = 100KHz, VBW = 300KHz, Sweep = auto
Detector function = peak, Trace = max hold

8.4 Test Result


ANT1:

BAND EDGE Graphs

802.11b/LCH

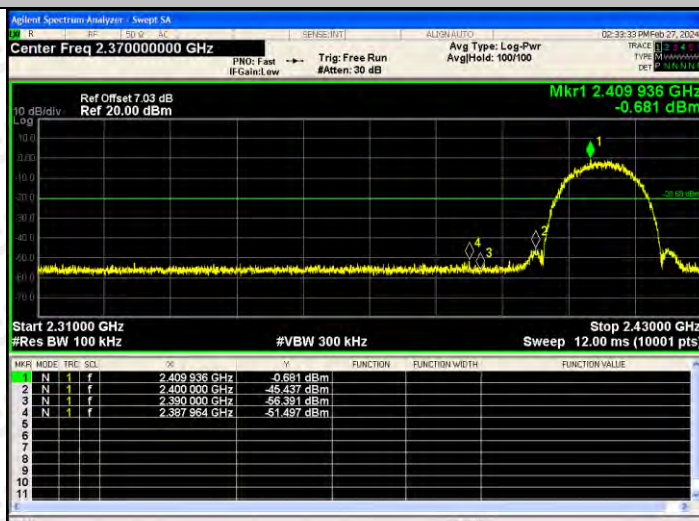


802.11b/HCH

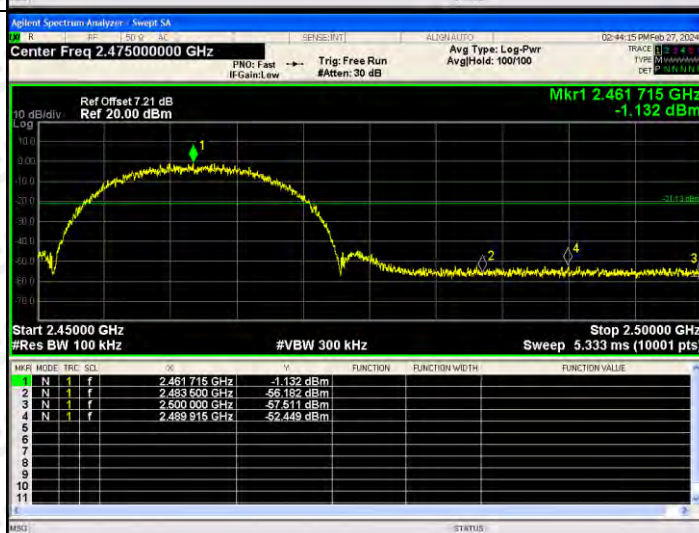


BAND EDGE Graphs

802.11g/LCH

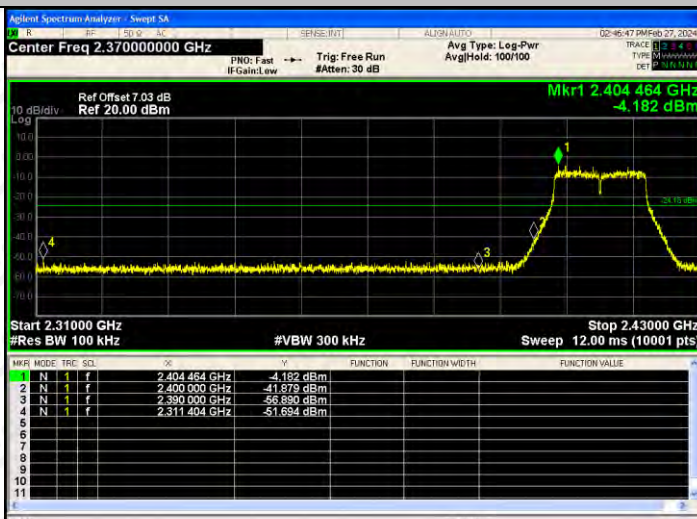


802.11g/HCH

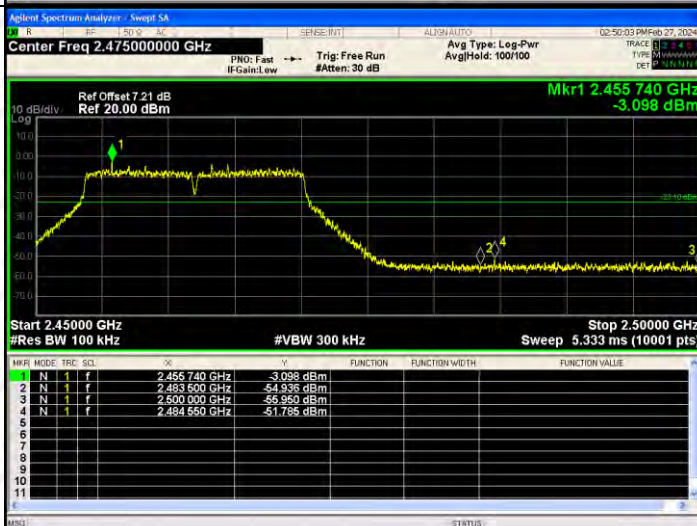


BAND EDGE Graphs

802.11n(HT20)/L
CH

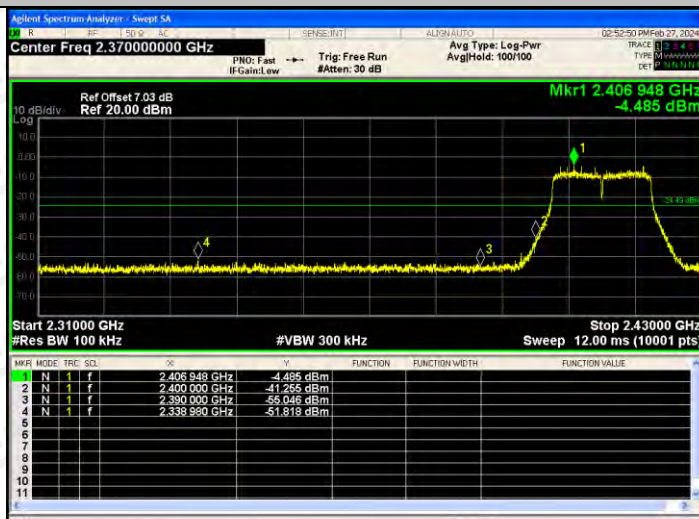


802.11n(HT20)/H
CH

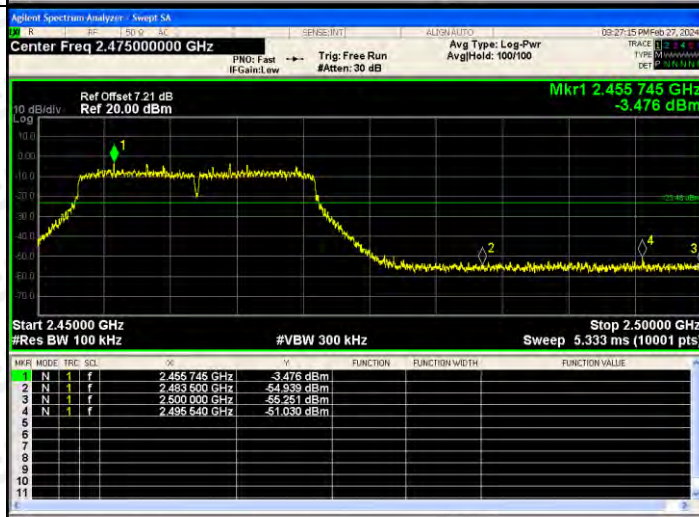


BAND EDGE Graphs

802.11n(HT40)/L
CH

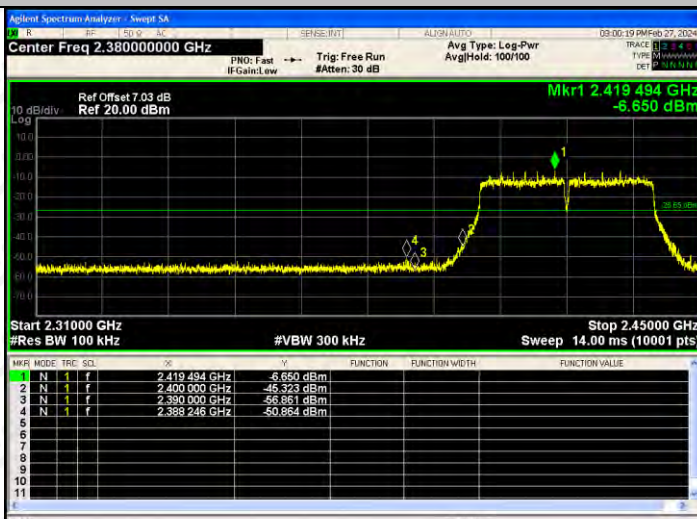


802.11n(HT40)/H
CH

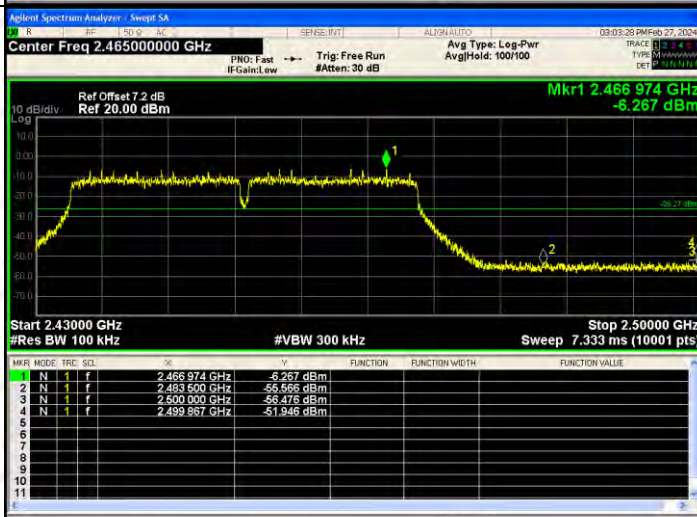




RF Conducted Spurious Emissions Graphs




802.11b /LCH	<table><thead><tr><th>N</th><th>F</th><th>P</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td></td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td></td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td></td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td></td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td></td><td></td><td></td><td></td></tr></tbody></table>	N	F	P	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f					2	N	1	f					3	N	1	f					4	N	1	f					5	N	1	f					
N	F	P	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																											
1	N	1	f																																															
2	N	1	f																																															
3	N	1	f																																															
4	N	1	f																																															
5	N	1	f																																															
802.11b /MCH	<table><thead><tr><th>N</th><th>F</th><th>P</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td></td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td></td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td></td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td></td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td></td><td></td><td></td><td></td></tr></tbody></table>	N	F	P	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f					2	N	1	f					3	N	1	f					4	N	1	f					5	N	1	f					
N	F	P	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																											
1	N	1	f																																															
2	N	1	f																																															
3	N	1	f																																															
4	N	1	f																																															
5	N	1	f																																															
802.11b /HCH	<table><thead><tr><th>N</th><th>F</th><th>P</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td></td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td></td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td></td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td></td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td></td><td></td><td></td><td></td></tr></tbody></table>	N	F	P	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f					2	N	1	f					3	N	1	f					4	N	1	f					5	N	1	f					
N	F	P	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																											
1	N	1	f																																															
2	N	1	f																																															
3	N	1	f																																															
4	N	1	f																																															
5	N	1	f																																															

RF Conducted Spurious Emissions Graphs

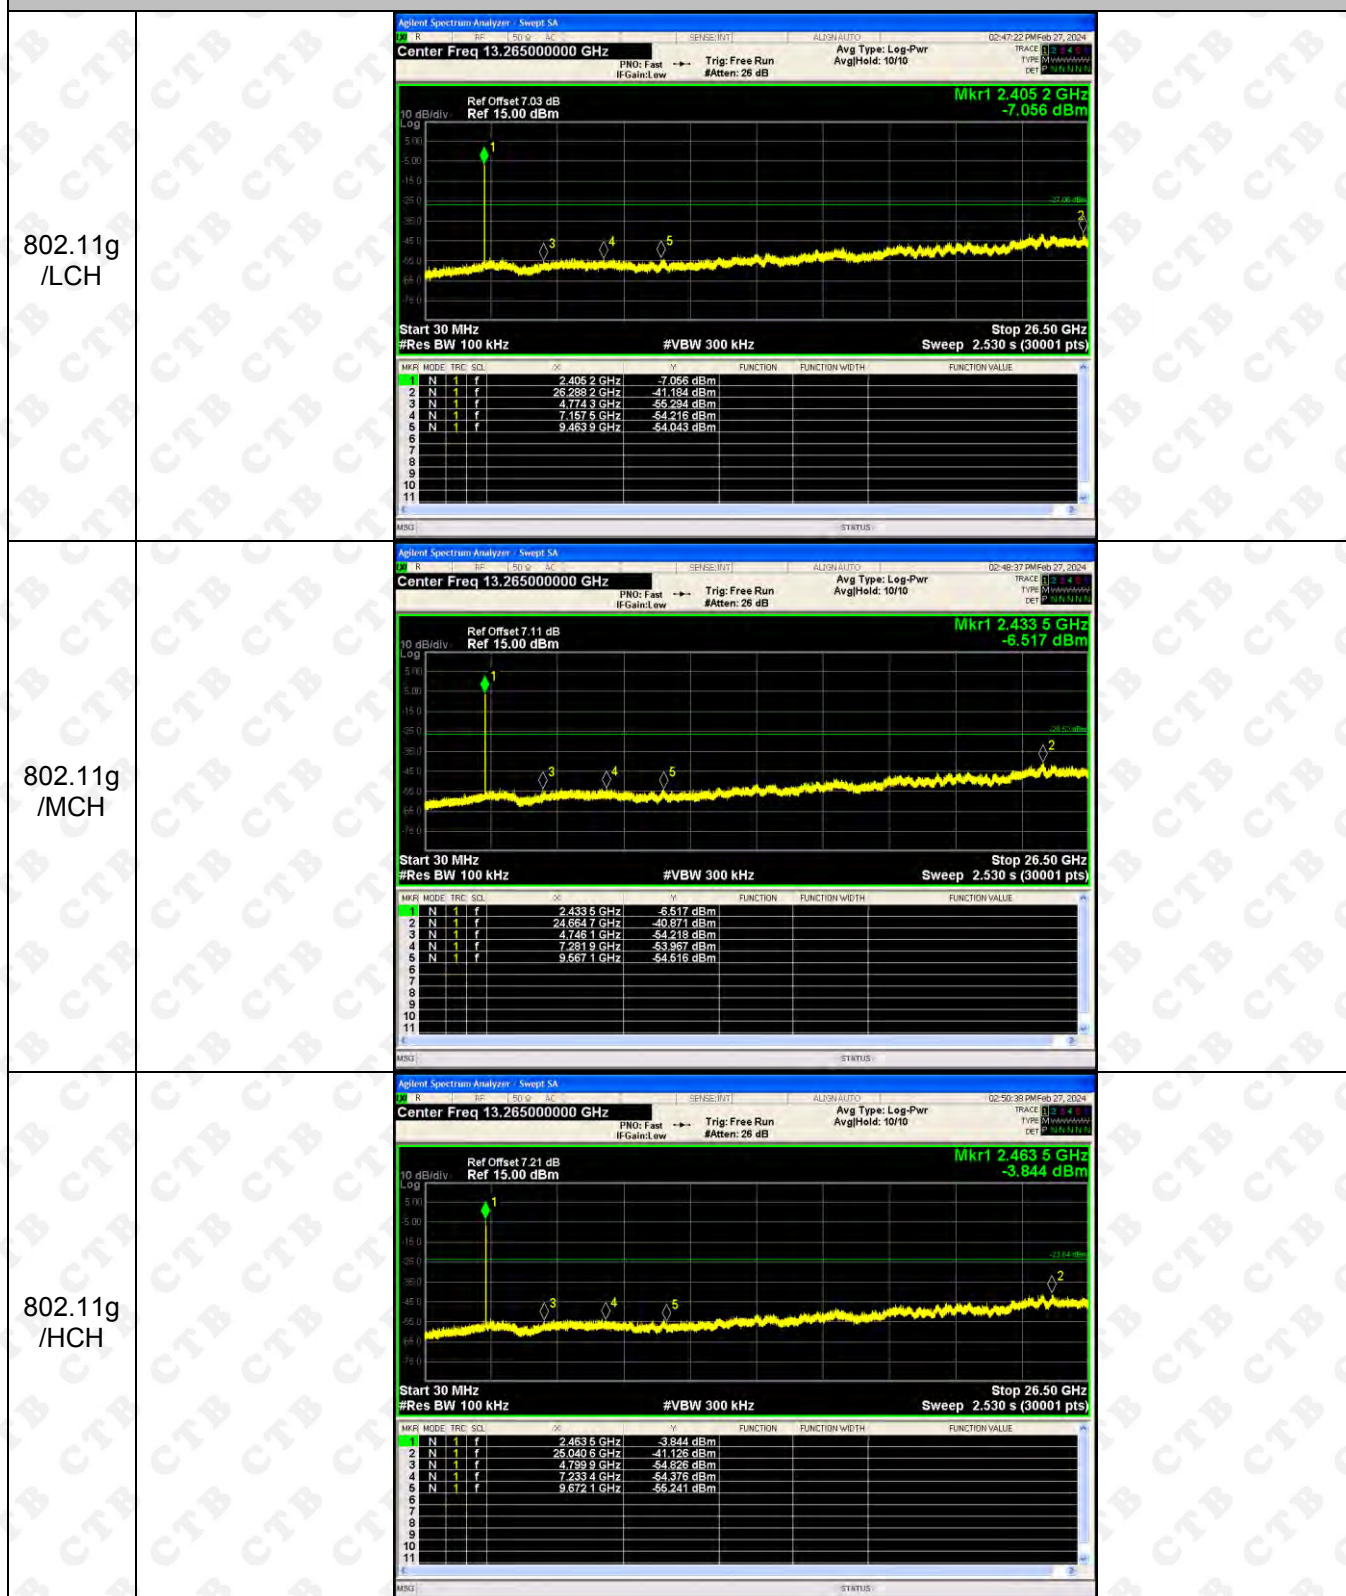

RF Conducted Spurious Emissions Graphs

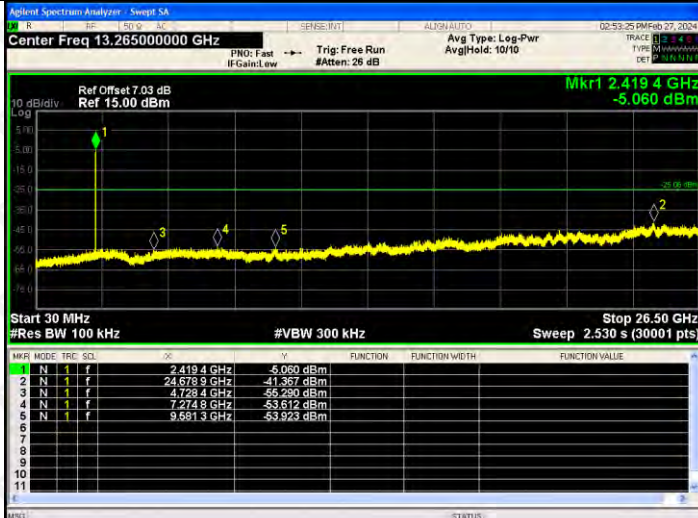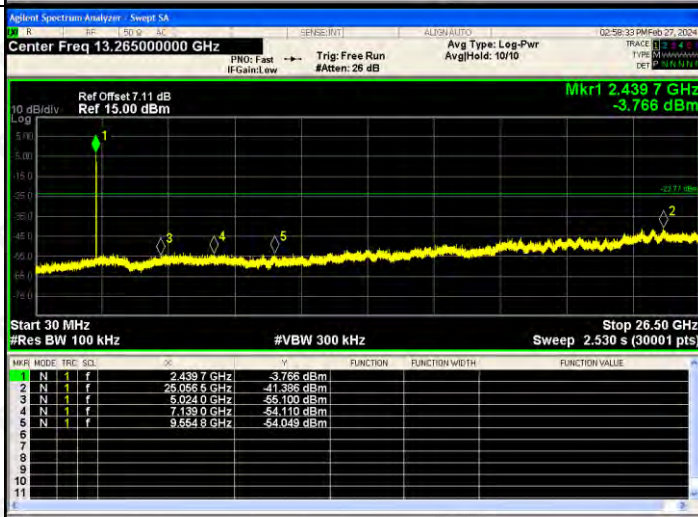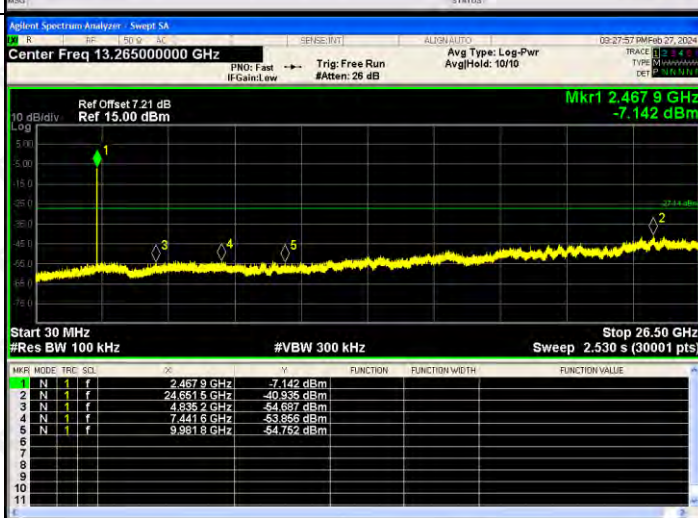
802.11n (HT20)/ LCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 7.03 dB Ref 15.00 dBm Mkr1 2.419 4 GHz -5.080 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SQL</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.419 4 GHz</td><td>-5.080 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.678 9 GHz</td><td>-41.367 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.728 4 GHz</td><td>-55.290 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.274 8 GHz</td><td>-53.612 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.581 3 GHz</td><td>-53.923 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.419 4 GHz	-5.080 dBm				2	N	1	f	24.678 9 GHz	-41.367 dBm				3	N	1	f	4.728 4 GHz	-55.290 dBm				4	N	1	f	7.274 8 GHz	-53.612 dBm				5	N	1	f	9.581 3 GHz	-53.923 dBm			
MNR	MODE	TRC	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.419 4 GHz	-5.080 dBm																																																		
2	N	1	f	24.678 9 GHz	-41.367 dBm																																																		
3	N	1	f	4.728 4 GHz	-55.290 dBm																																																		
4	N	1	f	7.274 8 GHz	-53.612 dBm																																																		
5	N	1	f	9.581 3 GHz	-53.923 dBm																																																		
802.11 n(HT20) /MCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 7.11 dB Ref 15.00 dBm Mkr1 2.439 7 GHz -3.786 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SQL</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.439 7 GHz</td><td>-3.786 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>25.056 6 GHz</td><td>-41.386 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>5.024 0 GHz</td><td>-55.100 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.135 0 GHz</td><td>-54.110 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.554 9 GHz</td><td>-54.049 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.439 7 GHz	-3.786 dBm				2	N	1	f	25.056 6 GHz	-41.386 dBm				3	N	1	f	5.024 0 GHz	-55.100 dBm				4	N	1	f	7.135 0 GHz	-54.110 dBm				5	N	1	f	9.554 9 GHz	-54.049 dBm			
MNR	MODE	TRC	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.439 7 GHz	-3.786 dBm																																																		
2	N	1	f	25.056 6 GHz	-41.386 dBm																																																		
3	N	1	f	5.024 0 GHz	-55.100 dBm																																																		
4	N	1	f	7.135 0 GHz	-54.110 dBm																																																		
5	N	1	f	9.554 9 GHz	-54.049 dBm																																																		
802.11 n(HT20) /HCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 7.21 dB Ref 15.00 dBm Mkr1 2.467 9 GHz -7.142 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SQL</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.467 9 GHz</td><td>-7.142 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.651 5 GHz</td><td>-40.936 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.835 2 GHz</td><td>-54.687 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.441 6 GHz</td><td>-53.856 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.981 9 GHz</td><td>-54.752 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.467 9 GHz	-7.142 dBm				2	N	1	f	24.651 5 GHz	-40.936 dBm				3	N	1	f	4.835 2 GHz	-54.687 dBm				4	N	1	f	7.441 6 GHz	-53.856 dBm				5	N	1	f	9.981 9 GHz	-54.752 dBm			
MNR	MODE	TRC	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.467 9 GHz	-7.142 dBm																																																		
2	N	1	f	24.651 5 GHz	-40.936 dBm																																																		
3	N	1	f	4.835 2 GHz	-54.687 dBm																																																		
4	N	1	f	7.441 6 GHz	-53.856 dBm																																																		
5	N	1	f	9.981 9 GHz	-54.752 dBm																																																		

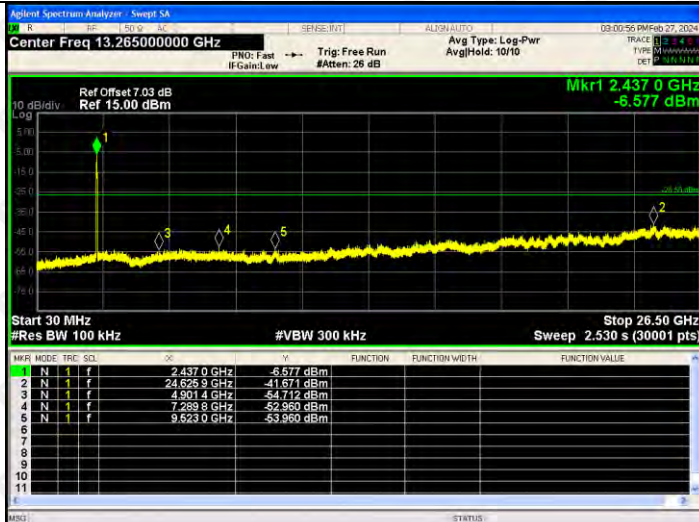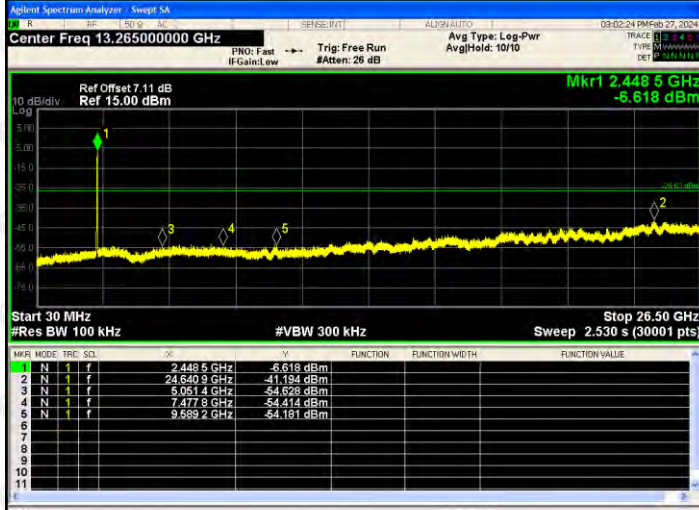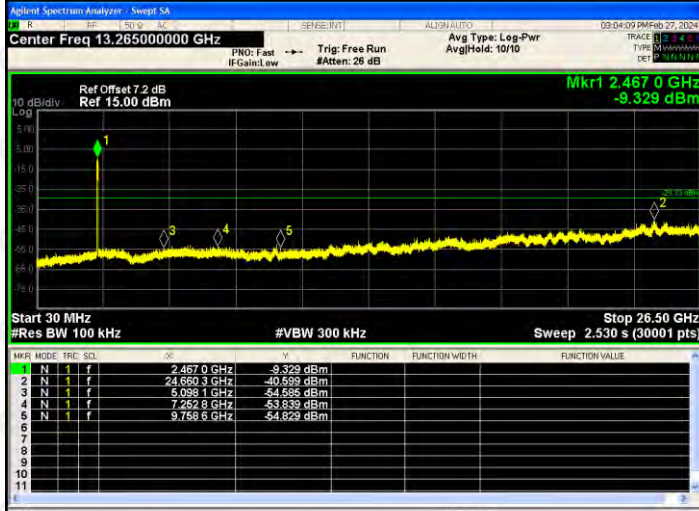802.11n (HT40)/ LCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 7.03 dB Ref 15.00 dBm Mkr1 2.437 0 GHz -6.577 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SOL</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.437 0 GHz</td><td>-6.577 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.625 9 GHz</td><td>-41.671 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.901 4 GHz</td><td>-54.712 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.289 8 GHz</td><td>-52.960 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.623 0 GHz</td><td>-53.960 dBm</td><td></td><td></td><td></td></tr></table>	MKR	MODE	TRC	SOL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.437 0 GHz	-6.577 dBm				2	N	1	f	24.625 9 GHz	-41.671 dBm				3	N	1	f	4.901 4 GHz	-54.712 dBm				4	N	1	f	7.289 8 GHz	-52.960 dBm				5	N	1	f	9.623 0 GHz	-53.960 dBm			
MKR	MODE	TRC	SOL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.437 0 GHz	-6.577 dBm																																																		
2	N	1	f	24.625 9 GHz	-41.671 dBm																																																		
3	N	1	f	4.901 4 GHz	-54.712 dBm																																																		
4	N	1	f	7.289 8 GHz	-52.960 dBm																																																		
5	N	1	f	9.623 0 GHz	-53.960 dBm																																																		
802.11 n(HT40) /MCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 7.11 dB Ref 15.00 dBm Mkr1 2.448 5 GHz -6.618 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SOL</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.448 5 GHz</td><td>-6.618 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.640 9 GHz</td><td>-41.194 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>5.051 4 GHz</td><td>-54.628 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.477 8 GHz</td><td>-54.414 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.689 2 GHz</td><td>-54.181 dBm</td><td></td><td></td><td></td></tr></table>	MKR	MODE	TRC	SOL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.448 5 GHz	-6.618 dBm				2	N	1	f	24.640 9 GHz	-41.194 dBm				3	N	1	f	5.051 4 GHz	-54.628 dBm				4	N	1	f	7.477 8 GHz	-54.414 dBm				5	N	1	f	9.689 2 GHz	-54.181 dBm			
MKR	MODE	TRC	SOL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.448 5 GHz	-6.618 dBm																																																		
2	N	1	f	24.640 9 GHz	-41.194 dBm																																																		
3	N	1	f	5.051 4 GHz	-54.628 dBm																																																		
4	N	1	f	7.477 8 GHz	-54.414 dBm																																																		
5	N	1	f	9.689 2 GHz	-54.181 dBm																																																		
802.11 n(HT40) /HCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 7.2 dB Ref 15.00 dBm Mkr1 2.467 0 GHz -9.329 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SOL</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.467 0 GHz</td><td>-9.329 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.660 3 GHz</td><td>-40.599 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>5.098 1 GHz</td><td>-54.885 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.252 8 GHz</td><td>-53.839 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.768 6 GHz</td><td>-54.829 dBm</td><td></td><td></td><td></td></tr></table>	MKR	MODE	TRC	SOL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.467 0 GHz	-9.329 dBm				2	N	1	f	24.660 3 GHz	-40.599 dBm				3	N	1	f	5.098 1 GHz	-54.885 dBm				4	N	1	f	7.252 8 GHz	-53.839 dBm				5	N	1	f	9.768 6 GHz	-54.829 dBm			
MKR	MODE	TRC	SOL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.467 0 GHz	-9.329 dBm																																																		
2	N	1	f	24.660 3 GHz	-40.599 dBm																																																		
3	N	1	f	5.098 1 GHz	-54.885 dBm																																																		
4	N	1	f	7.252 8 GHz	-53.839 dBm																																																		
5	N	1	f	9.768 6 GHz	-54.829 dBm																																																		


ANT2:

BAND EDGE Graphs

802.11b/LCH

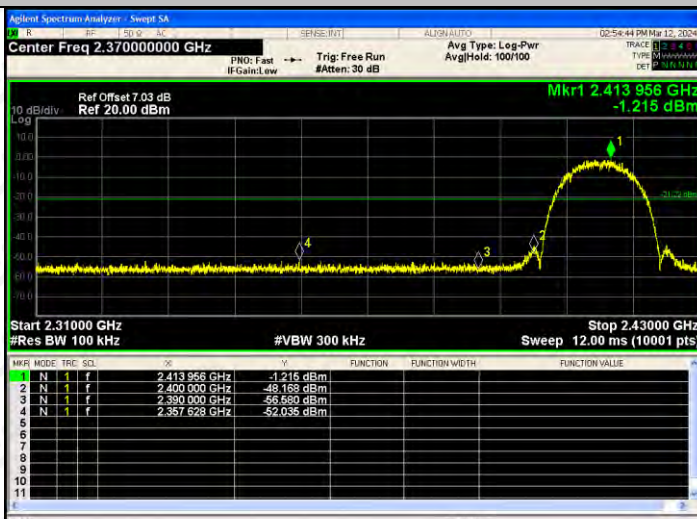


802.11b/HCH

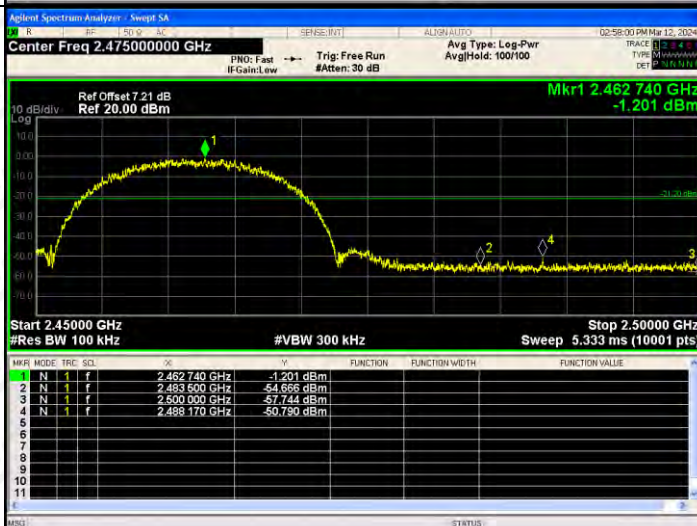


BAND EDGE Graphs

802.11g/LCH

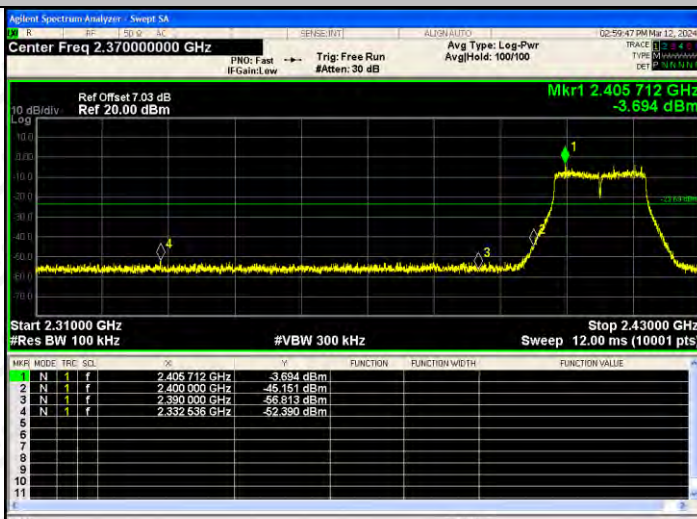


802.11g/HCH

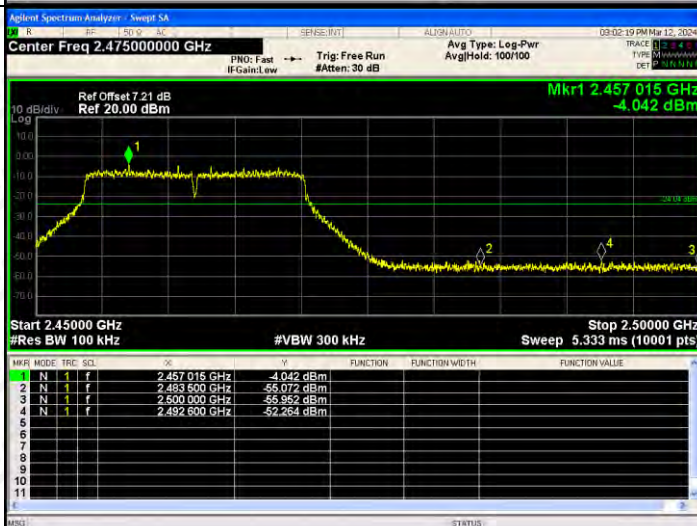


BAND EDGE Graphs

802.11n(HT20)/L
CH

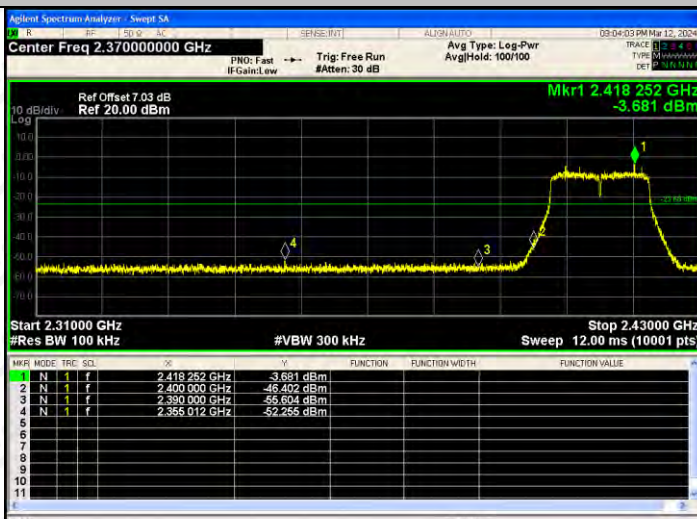


802.11n(HT20)/H
CH

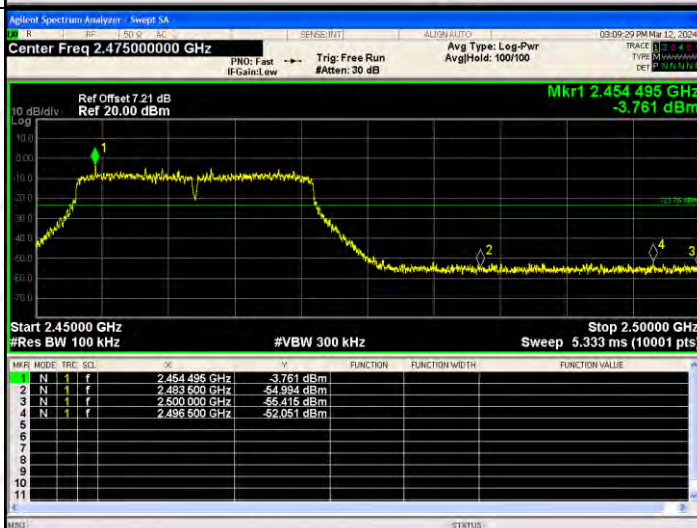


BAND EDGE Graphs




802.11n(HT40)/L
CH

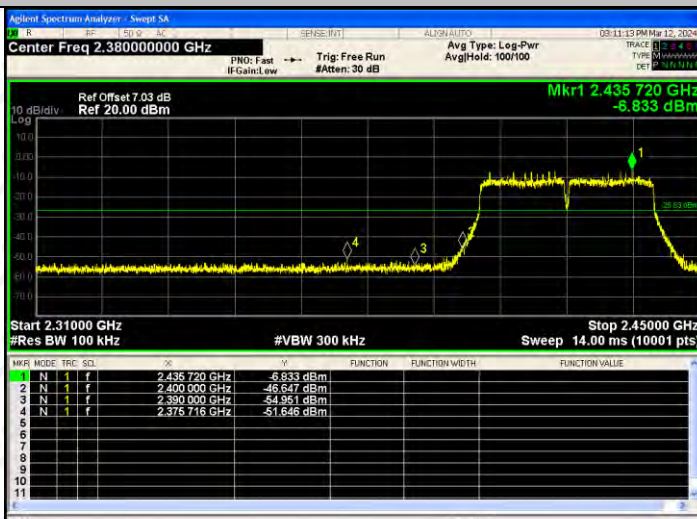




802.11n(HT40)/H
CH

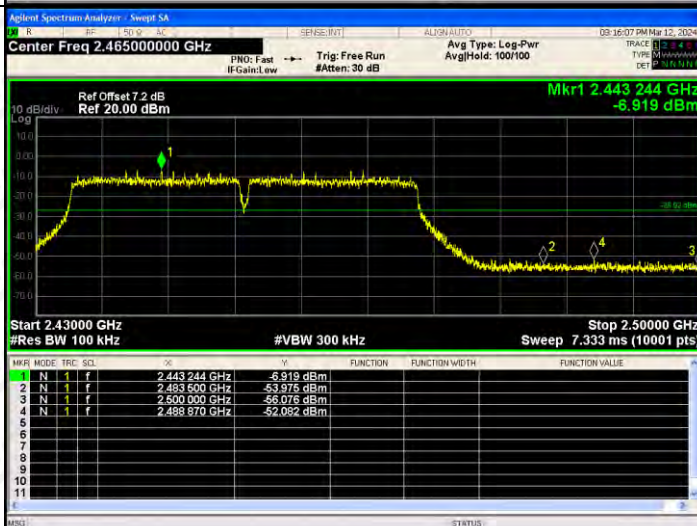

RF Conducted Spurious Emissions Graphs

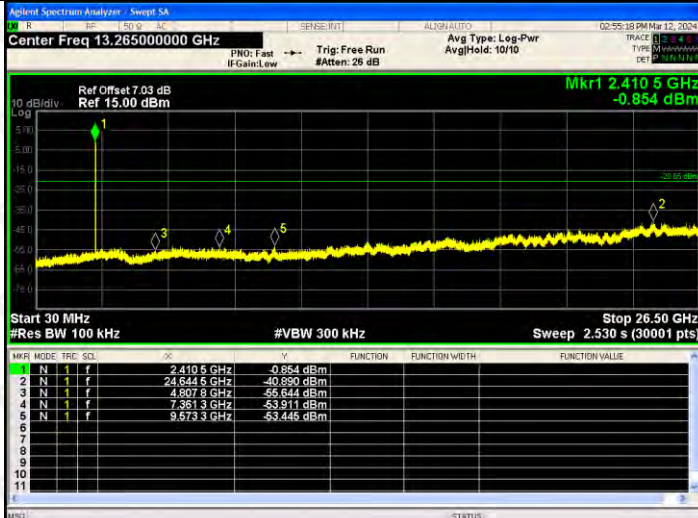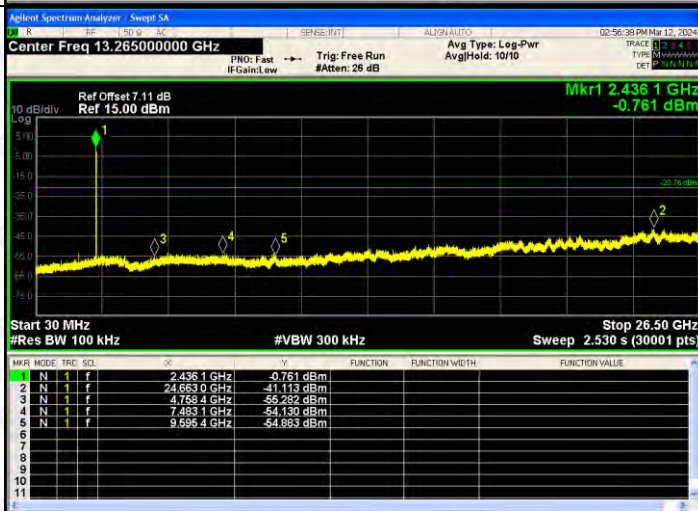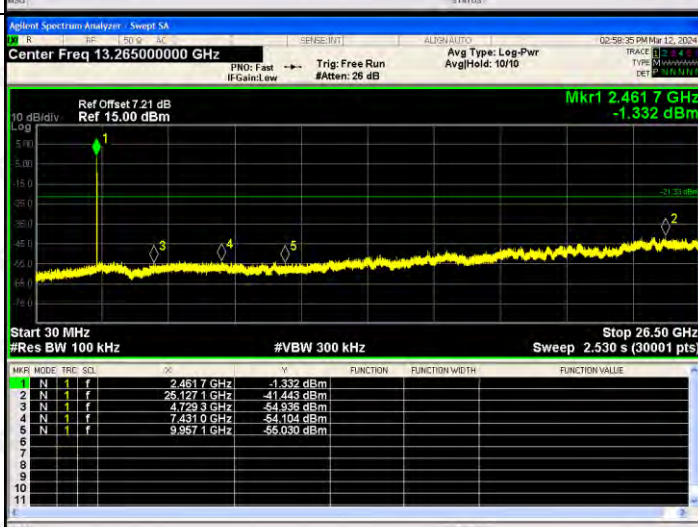802.11b /LCH	 <table><tr><th>MNR</th><th>MODE</th><th>FREQ</th><th>POWER</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>2.4105 GHz</td><td>-0.854 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>24.6445 GHz</td><td>-40.890 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>4.8073 GHz</td><td>-55.644 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>7.3613 GHz</td><td>-53.911 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>9.5733 GHz</td><td>-53.445 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	FREQ	POWER	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	2.4105 GHz	-0.854 dBm				2	N	24.6445 GHz	-40.890 dBm				3	N	4.8073 GHz	-55.644 dBm				4	N	7.3613 GHz	-53.911 dBm				5	N	9.5733 GHz	-53.445 dBm				
MNR	MODE	FREQ	POWER	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	2.4105 GHz	-0.854 dBm																																									
2	N	24.6445 GHz	-40.890 dBm																																									
3	N	4.8073 GHz	-55.644 dBm																																									
4	N	7.3613 GHz	-53.911 dBm																																									
5	N	9.5733 GHz	-53.445 dBm																																									
802.11b /MCH	 <table><tr><th>MNR</th><th>MODE</th><th>FREQ</th><th>POWER</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>2.4361 GHz</td><td>-0.761 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>24.6630 GHz</td><td>-41.113 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>4.7684 GHz</td><td>-55.282 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>7.4831 GHz</td><td>-54.130 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>9.5954 GHz</td><td>-54.853 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	FREQ	POWER	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	2.4361 GHz	-0.761 dBm				2	N	24.6630 GHz	-41.113 dBm				3	N	4.7684 GHz	-55.282 dBm				4	N	7.4831 GHz	-54.130 dBm				5	N	9.5954 GHz	-54.853 dBm				
MNR	MODE	FREQ	POWER	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	2.4361 GHz	-0.761 dBm																																									
2	N	24.6630 GHz	-41.113 dBm																																									
3	N	4.7684 GHz	-55.282 dBm																																									
4	N	7.4831 GHz	-54.130 dBm																																									
5	N	9.5954 GHz	-54.853 dBm																																									
802.11b /HCH	 <table><tr><th>MNR</th><th>MODE</th><th>FREQ</th><th>POWER</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>2.4617 GHz</td><td>-1.332 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>25.1271 GHz</td><td>-41.443 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>4.7293 GHz</td><td>-54.936 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>7.4310 GHz</td><td>-54.104 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>9.9571 GHz</td><td>-55.030 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	FREQ	POWER	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	2.4617 GHz	-1.332 dBm				2	N	25.1271 GHz	-41.443 dBm				3	N	4.7293 GHz	-54.936 dBm				4	N	7.4310 GHz	-54.104 dBm				5	N	9.9571 GHz	-55.030 dBm				
MNR	MODE	FREQ	POWER	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	2.4617 GHz	-1.332 dBm																																									
2	N	25.1271 GHz	-41.443 dBm																																									
3	N	4.7293 GHz	-54.936 dBm																																									
4	N	7.4310 GHz	-54.104 dBm																																									
5	N	9.9571 GHz	-55.030 dBm																																									




RF Conducted Spurious Emissions Graphs

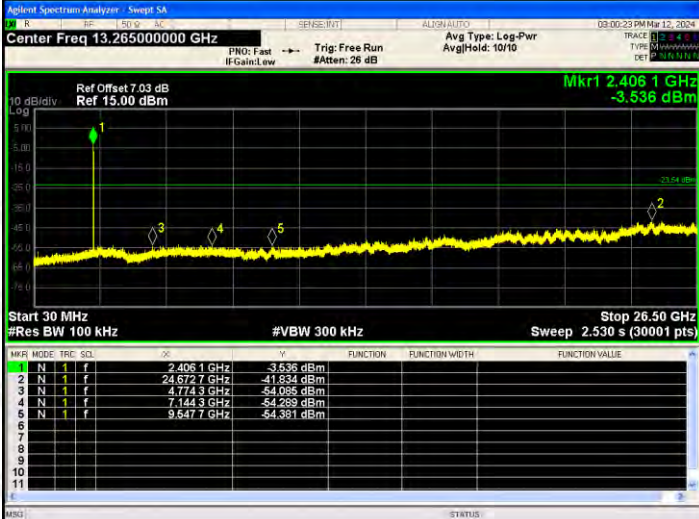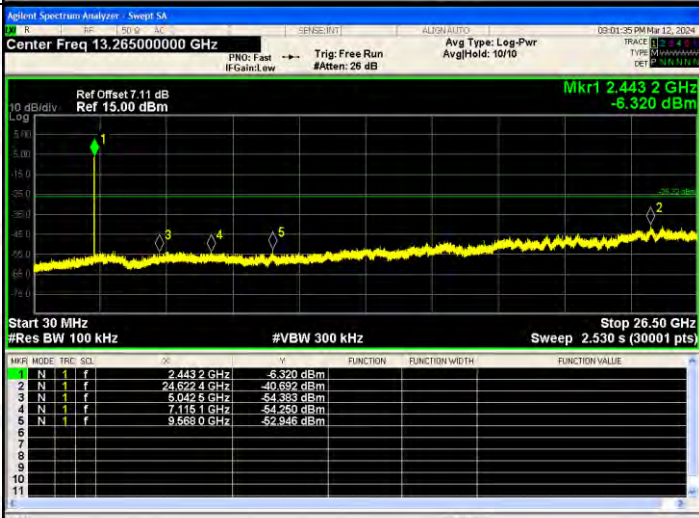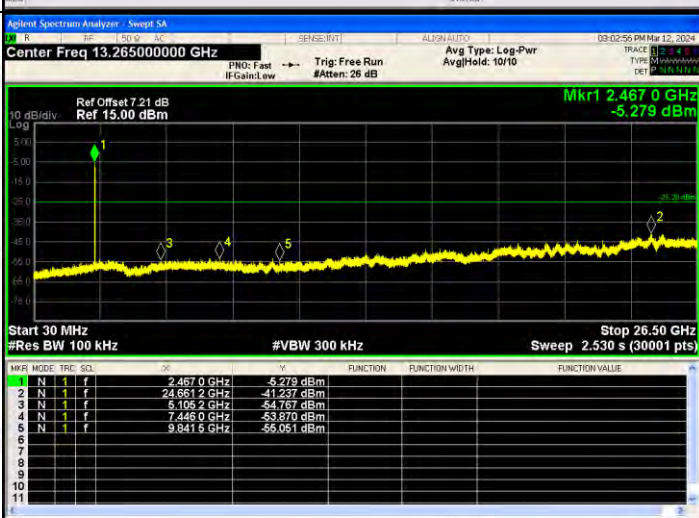802.11g /LCH	 <table border="1"> <thead> <tr> <th>CH</th> <th>Freq</th> <th>Power</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2.406 GHz</td> <td>-3.636 dBm</td> </tr> <tr> <td>2</td> <td>2.472 GHz</td> <td>-41.834 dBm</td> </tr> <tr> <td>3</td> <td>4.774 GHz</td> <td>-54.095 dBm</td> </tr> <tr> <td>4</td> <td>7.443 GHz</td> <td>-54.289 dBm</td> </tr> <tr> <td>5</td> <td>9.547 GHz</td> <td>-54.351 dBm</td> </tr> </tbody> </table>	CH	Freq	Power	1	2.406 GHz	-3.636 dBm	2	2.472 GHz	-41.834 dBm	3	4.774 GHz	-54.095 dBm	4	7.443 GHz	-54.289 dBm	5	9.547 GHz	-54.351 dBm	
CH	Freq	Power																		
1	2.406 GHz	-3.636 dBm																		
2	2.472 GHz	-41.834 dBm																		
3	4.774 GHz	-54.095 dBm																		
4	7.443 GHz	-54.289 dBm																		
5	9.547 GHz	-54.351 dBm																		
802.11g /MCH	 <table border="1"> <thead> <tr> <th>CH</th> <th>Freq</th> <th>Power</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2.443 GHz</td> <td>-6.320 dBm</td> </tr> <tr> <td>2</td> <td>2.622 GHz</td> <td>-40.692 dBm</td> </tr> <tr> <td>3</td> <td>5.042 GHz</td> <td>-54.353 dBm</td> </tr> <tr> <td>4</td> <td>7.115 GHz</td> <td>-54.250 dBm</td> </tr> <tr> <td>5</td> <td>9.568 GHz</td> <td>-52.946 dBm</td> </tr> </tbody> </table>	CH	Freq	Power	1	2.443 GHz	-6.320 dBm	2	2.622 GHz	-40.692 dBm	3	5.042 GHz	-54.353 dBm	4	7.115 GHz	-54.250 dBm	5	9.568 GHz	-52.946 dBm	
CH	Freq	Power																		
1	2.443 GHz	-6.320 dBm																		
2	2.622 GHz	-40.692 dBm																		
3	5.042 GHz	-54.353 dBm																		
4	7.115 GHz	-54.250 dBm																		
5	9.568 GHz	-52.946 dBm																		
802.11g /HCH	 <table border="1"> <thead> <tr> <th>CH</th> <th>Freq</th> <th>Power</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2.467 GHz</td> <td>-5.279 dBm</td> </tr> <tr> <td>2</td> <td>2.661 GHz</td> <td>-41.237 dBm</td> </tr> <tr> <td>3</td> <td>5.106 GHz</td> <td>-54.767 dBm</td> </tr> <tr> <td>4</td> <td>7.445 GHz</td> <td>-53.870 dBm</td> </tr> <tr> <td>5</td> <td>9.541 GHz</td> <td>-55.051 dBm</td> </tr> </tbody> </table>	CH	Freq	Power	1	2.467 GHz	-5.279 dBm	2	2.661 GHz	-41.237 dBm	3	5.106 GHz	-54.767 dBm	4	7.445 GHz	-53.870 dBm	5	9.541 GHz	-55.051 dBm	
CH	Freq	Power																		
1	2.467 GHz	-5.279 dBm																		
2	2.661 GHz	-41.237 dBm																		
3	5.106 GHz	-54.767 dBm																		
4	7.445 GHz	-53.870 dBm																		
5	9.541 GHz	-55.051 dBm																		

RF Conducted Spurious Emissions Graphs


802.11n (HT20)/ LCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 7.03 dB Ref 15.00 dBm Mkr1 2.416 7 GHz -7.326 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><thead><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SQL</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.416 7 GHz</td><td>-7.326 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>25.040 6 GHz</td><td>-41.344 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.799 0 GHz</td><td>-54.856 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.069 5 GHz</td><td>-53.646 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.542 4 GHz</td><td>-53.769 dBm</td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></tbody></table>	MNR	MODE	TRC	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.416 7 GHz	-7.326 dBm				2	N	1	f	25.040 6 GHz	-41.344 dBm				3	N	1	f	4.799 0 GHz	-54.856 dBm				4	N	1	f	7.069 5 GHz	-53.646 dBm				5	N	1	f	9.542 4 GHz	-53.769 dBm				6									7									8									9									10									11								
MNR	MODE	TRC	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	N	1	f	2.416 7 GHz	-7.326 dBm																																																																																																								
2	N	1	f	25.040 6 GHz	-41.344 dBm																																																																																																								
3	N	1	f	4.799 0 GHz	-54.856 dBm																																																																																																								
4	N	1	f	7.069 5 GHz	-53.646 dBm																																																																																																								
5	N	1	f	9.542 4 GHz	-53.769 dBm																																																																																																								
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													
802.11 n(HT20) /MCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 7.11 dB Ref 15.00 dBm Mkr1 2.434 4 GHz -4.246 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><thead><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SQL</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.434 4 GHz</td><td>-4.246 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>25.731 5 GHz</td><td>-40.680 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>5.027 5 GHz</td><td>-56.336 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.201 6 GHz</td><td>-54.461 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.597 1 GHz</td><td>-54.120 dBm</td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></tbody></table>	MNR	MODE	TRC	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.434 4 GHz	-4.246 dBm				2	N	1	f	25.731 5 GHz	-40.680 dBm				3	N	1	f	5.027 5 GHz	-56.336 dBm				4	N	1	f	7.201 6 GHz	-54.461 dBm				5	N	1	f	9.597 1 GHz	-54.120 dBm				6									7									8									9									10									11								
MNR	MODE	TRC	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	N	1	f	2.434 4 GHz	-4.246 dBm																																																																																																								
2	N	1	f	25.731 5 GHz	-40.680 dBm																																																																																																								
3	N	1	f	5.027 5 GHz	-56.336 dBm																																																																																																								
4	N	1	f	7.201 6 GHz	-54.461 dBm																																																																																																								
5	N	1	f	9.597 1 GHz	-54.120 dBm																																																																																																								
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													
802.11 n(HT20) /HCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 7.21 dB Ref 15.00 dBm Mkr1 2.466 1 GHz -4.631 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><thead><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SQL</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.466 1 GHz</td><td>-4.631 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.674 5 GHz</td><td>-41.459 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>5.070 8 GHz</td><td>-56.076 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.445 1 GHz</td><td>-54.292 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.930 7 GHz</td><td>-54.526 dBm</td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></tbody></table>	MNR	MODE	TRC	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.466 1 GHz	-4.631 dBm				2	N	1	f	24.674 5 GHz	-41.459 dBm				3	N	1	f	5.070 8 GHz	-56.076 dBm				4	N	1	f	7.445 1 GHz	-54.292 dBm				5	N	1	f	9.930 7 GHz	-54.526 dBm				6									7									8									9									10									11								
MNR	MODE	TRC	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	N	1	f	2.466 1 GHz	-4.631 dBm																																																																																																								
2	N	1	f	24.674 5 GHz	-41.459 dBm																																																																																																								
3	N	1	f	5.070 8 GHz	-56.076 dBm																																																																																																								
4	N	1	f	7.445 1 GHz	-54.292 dBm																																																																																																								
5	N	1	f	9.930 7 GHz	-54.526 dBm																																																																																																								
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													

RF Conducted Spurious Emissions Graphs

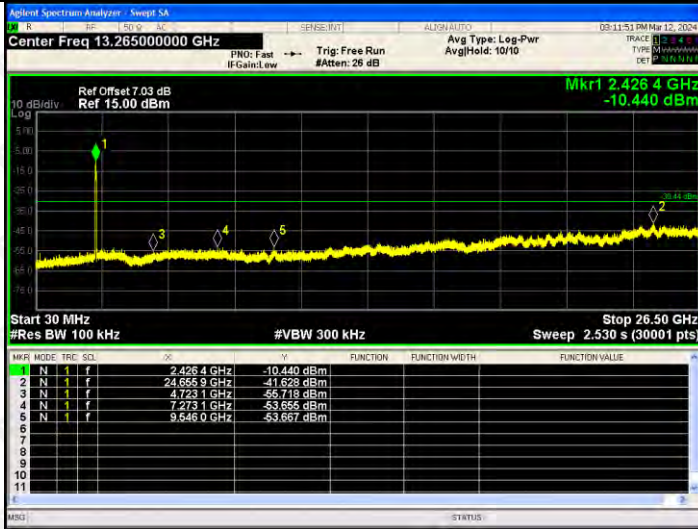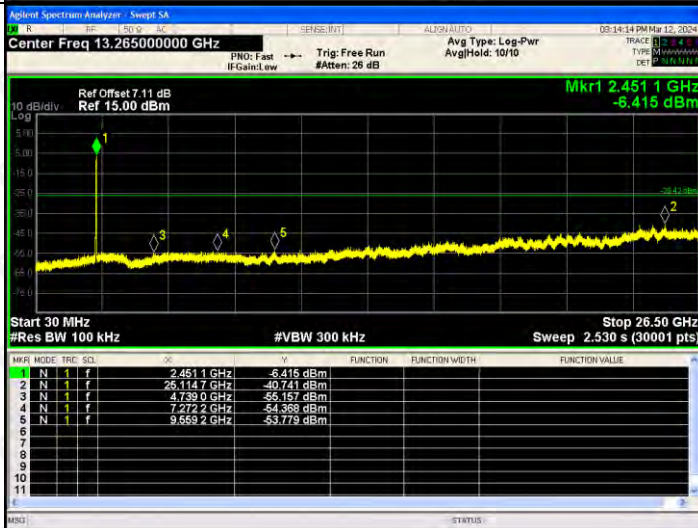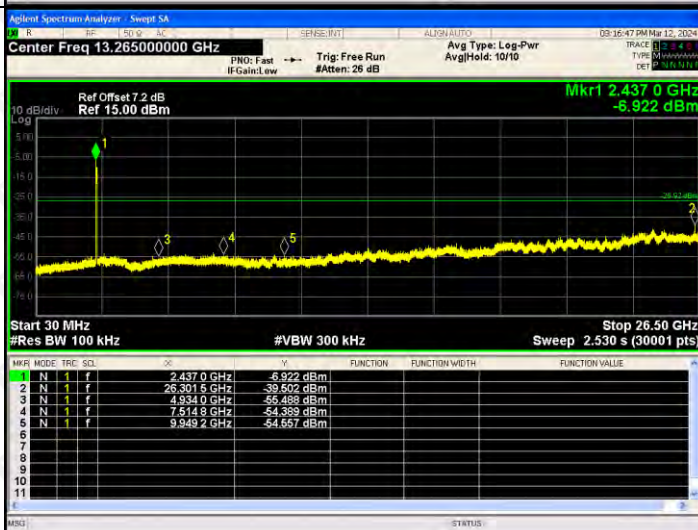802.11 n(HT40) /LCH	 <table><tr><th>MNR</th><th>MODE</th><th>TRF</th><th>SQL</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4264 GHz</td><td>-10.440 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.8559 GHz</td><td>-41.628 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.7231 GHz</td><td>-56.718 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.2731 GHz</td><td>-53.655 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.5460 GHz</td><td>-53.657 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRF	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4264 GHz	-10.440 dBm				2	N	1	f	24.8559 GHz	-41.628 dBm				3	N	1	f	4.7231 GHz	-56.718 dBm				4	N	1	f	7.2731 GHz	-53.655 dBm				5	N	1	f	9.5460 GHz	-53.657 dBm			
MNR	MODE	TRF	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4264 GHz	-10.440 dBm																																																		
2	N	1	f	24.8559 GHz	-41.628 dBm																																																		
3	N	1	f	4.7231 GHz	-56.718 dBm																																																		
4	N	1	f	7.2731 GHz	-53.655 dBm																																																		
5	N	1	f	9.5460 GHz	-53.657 dBm																																																		
802.11 n(HT40) /MCH	 <table><tr><th>MNR</th><th>MODE</th><th>TRF</th><th>SQL</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4511 GHz</td><td>-6.415 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>25.1147 GHz</td><td>-40.741 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.7390 GHz</td><td>-56.157 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.2722 GHz</td><td>-54.388 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.5592 GHz</td><td>-53.779 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRF	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4511 GHz	-6.415 dBm				2	N	1	f	25.1147 GHz	-40.741 dBm				3	N	1	f	4.7390 GHz	-56.157 dBm				4	N	1	f	7.2722 GHz	-54.388 dBm				5	N	1	f	9.5592 GHz	-53.779 dBm			
MNR	MODE	TRF	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4511 GHz	-6.415 dBm																																																		
2	N	1	f	25.1147 GHz	-40.741 dBm																																																		
3	N	1	f	4.7390 GHz	-56.157 dBm																																																		
4	N	1	f	7.2722 GHz	-54.388 dBm																																																		
5	N	1	f	9.5592 GHz	-53.779 dBm																																																		
802.11 n(HT40) /HCH	 <table><tr><th>MNR</th><th>MODE</th><th>TRF</th><th>SQL</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4370 GHz</td><td>-6.922 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>26.3015 GHz</td><td>-39.502 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.9340 GHz</td><td>-56.488 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.5148 GHz</td><td>-54.359 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.5492 GHz</td><td>-54.557 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRF	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4370 GHz	-6.922 dBm				2	N	1	f	26.3015 GHz	-39.502 dBm				3	N	1	f	4.9340 GHz	-56.488 dBm				4	N	1	f	7.5148 GHz	-54.359 dBm				5	N	1	f	9.5492 GHz	-54.557 dBm			
MNR	MODE	TRF	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4370 GHz	-6.922 dBm																																																		
2	N	1	f	26.3015 GHz	-39.502 dBm																																																		
3	N	1	f	4.9340 GHz	-56.488 dBm																																																		
4	N	1	f	7.5148 GHz	-54.359 dBm																																																		
5	N	1	f	9.5492 GHz	-54.557 dBm																																																		

9. COUDUCTED OUTPUT POWER

9.1 Block Diagram Of Test Setup

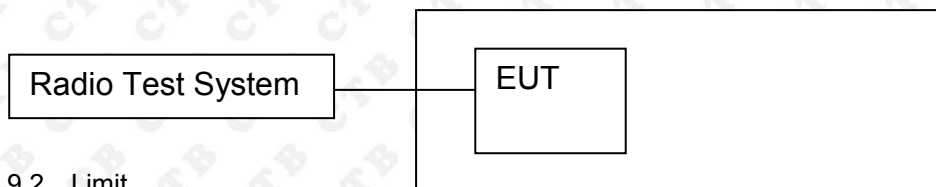

9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

9.3 Test procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1MHz. VBW = 3MHz. Sweep = auto; Detector Function = Peak. Channel power function is used
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.

9.4 Test Result

Mode	Channel.	Maximum Peak Power [dBm] ant 1	Maximum Peak Power [dBm] ant 2	Total Power Peak Output Power(dBm)	Limit[dBm]
802.11b	LCH	14.9	14.727	/	30
	MCH	14.921	14.92	/	30
	HCH	15.07	15.085	/	30
802.11g	LCH	14.778	14.629	/	30
	MCH	15.005	14.794	/	30
	HCH	15.086	14.699	/	30
802.11n(HT20)	LCH	14.645	14.474	17.571	30
	MCH	14.537	14.767	17.664	30
	HCH	14.974	14.419	17.716	30
802.11n(HT40)	LCH	14.173	14.023	17.109	30
	MCH	14.977	14.748	17.874	30
	HCH	14.592	14.417	17.516	30

10. 6DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

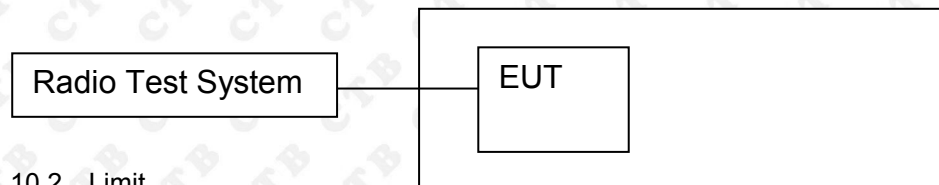

10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

10.3 Test procedure

1. Rem1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result

ANT1:

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	9.506	500	PASS
	MCH	9.732	500	PASS
	HCH	9.755	500	PASS
802.11g	LCH	16.334	500	PASS
	MCH	16.317	500	PASS
	HCH	16.347	500	PASS
802.11n(HT20)	LCH	17.171	500	PASS
	MCH	17.537	500	PASS
	HCH	17.11	500	PASS
802.11n(HT40)	LCH	35.881	500	PASS
	MCH	35.656	500	PASS
	HCH	35.632	500	PASS

ANT2:


Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	9.994	500	PASS
	MCH	10.459	500	PASS
	HCH	10.257	500	PASS
802.11g	LCH	16.336	500	PASS
	MCH	16.356	500	PASS
	HCH	16.07	500	PASS
802.11n(HT20)	LCH	17.133	500	PASS
	MCH	17.191	500	PASS
	HCH	17.292	500	PASS
802.11n(HT40)	LCH	35.536	500	PASS
	MCH	35.725	500	PASS
	HCH	35.233	500	PASS

ANT1:

Test Graph:



802.11g/LCH


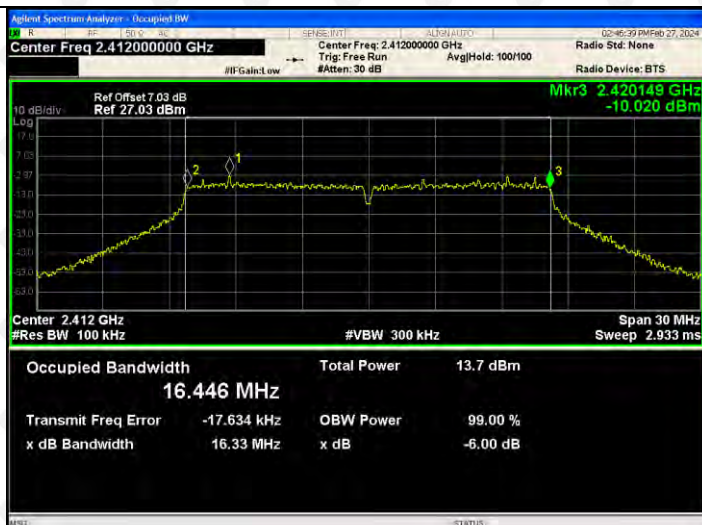





802.11g/MCH



802.11g/HCH

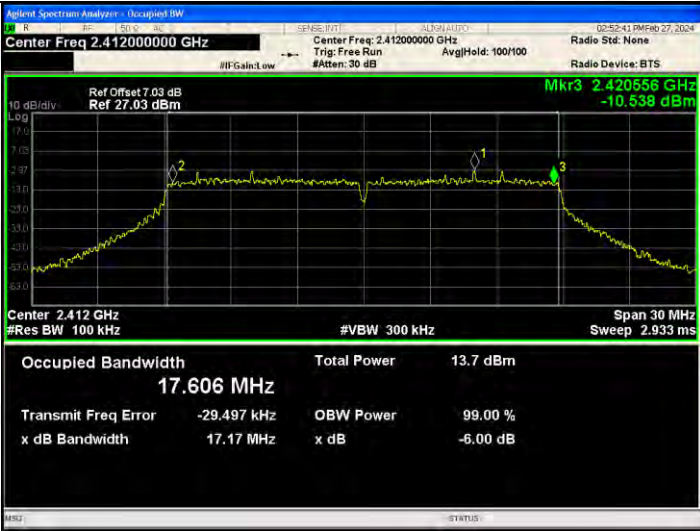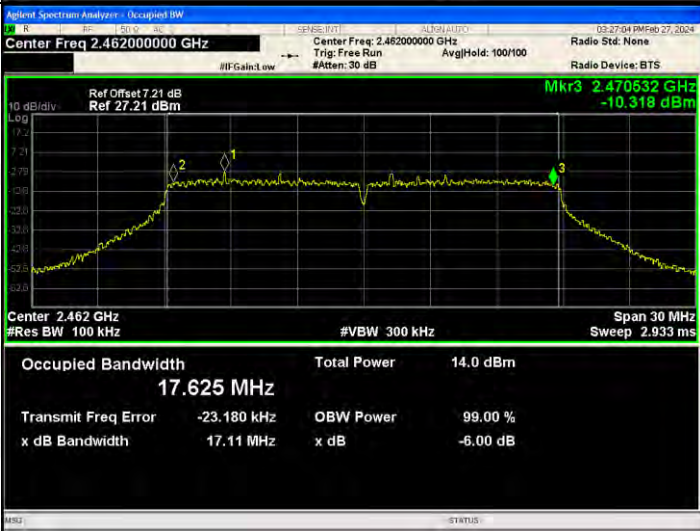

802.11n(HT20)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.41200000 GHz Ref Offset 7.03 dB Ref 27.03 dBm Mkr3 2.420556 GHz -10.538 dBm Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.606 MHz Total Power 13.7 dBm Transmit Freq Error -29.497 kHz OBW Power 99.00 % x dB Bandwidth 17.17 MHz x dB -6.00 dB
802.11n(HT20)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.43700000 GHz Ref Offset 7.11 dB Ref 27.11 dBm Mkr3 2.445746 GHz -10.077 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.614 MHz Total Power 13.8 dBm Transmit Freq Error -23.048 kHz OBW Power 99.00 % x dB Bandwidth 17.54 MHz x dB -6.00 dB
802.11n(HT20)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.46200000 GHz Ref Offset 7.21 dB Ref 27.21 dBm Mkr3 2.470532 GHz -10.318 dBm Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.625 MHz Total Power 14.0 dBm Transmit Freq Error -23.180 kHz OBW Power 99.00 % x dB Bandwidth 17.11 MHz x dB -6.00 dB

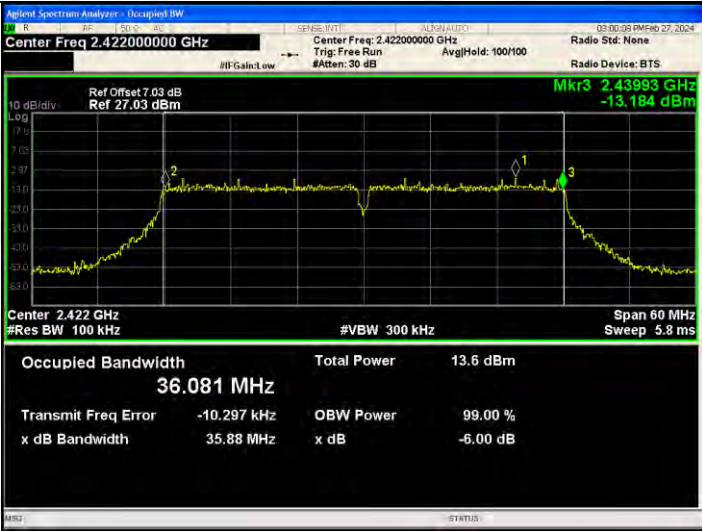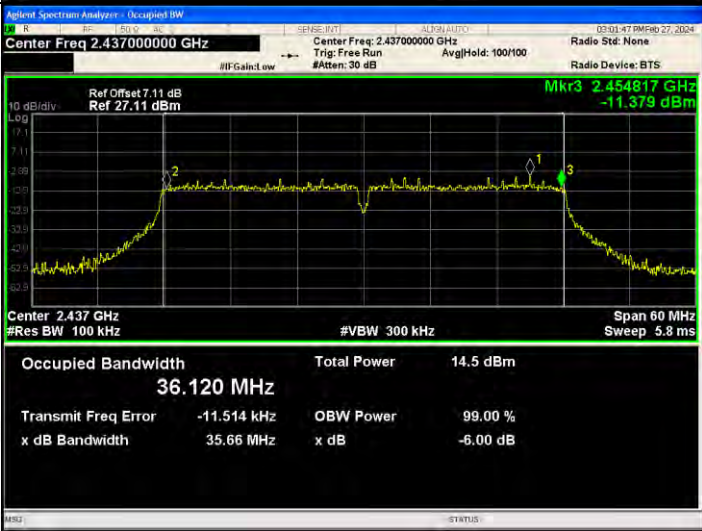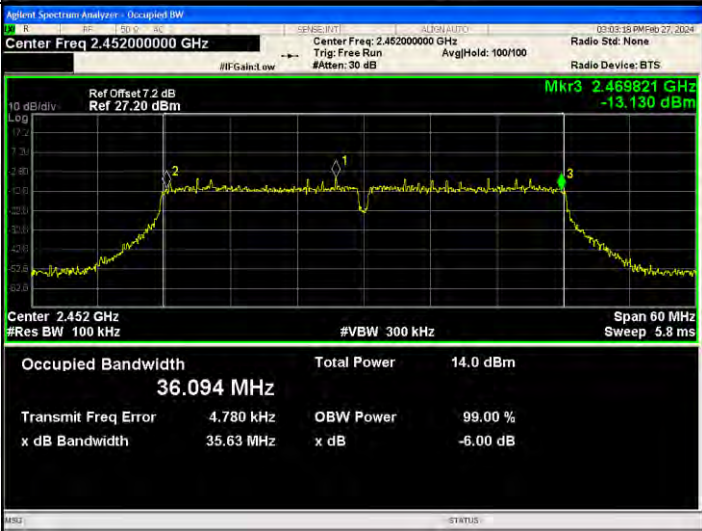
802.11n(HT40)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.42200000 GHz Ref Offset 7.03 dB Ref 27.03 dBm Mkr3 2.43993 GHz -13.184 dBm Center 2.422 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 36.081 MHz Total Power 13.6 dBm Transmit Freq Error -10.297 kHz OBW Power 99.00 % x dB Bandwidth 35.88 MHz x dB -6.00 dB Radio Device: BTS
802.11n(HT40)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.43700000 GHz Ref Offset 7.11 dB Ref 27.11 dBm Mkr3 2.454817 GHz -11.379 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 36.120 MHz Total Power 14.5 dBm Transmit Freq Error -11.514 kHz OBW Power 99.00 % x dB Bandwidth 35.66 MHz x dB -6.00 dB Radio Device: BTS
802.11n(HT40)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.45200000 GHz Ref Offset 7.2 dB Ref 27.20 dBm Mkr3 2.469821 GHz -13.130 dBm Center 2.452 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 36.094 MHz Total Power 14.0 dBm Transmit Freq Error 4.780 kHz OBW Power 99.00 % x dB Bandwidth 35.63 MHz x dB -6.00 dB Radio Device: BTS

ANT2:


Test Graph:




802.11g/LCH



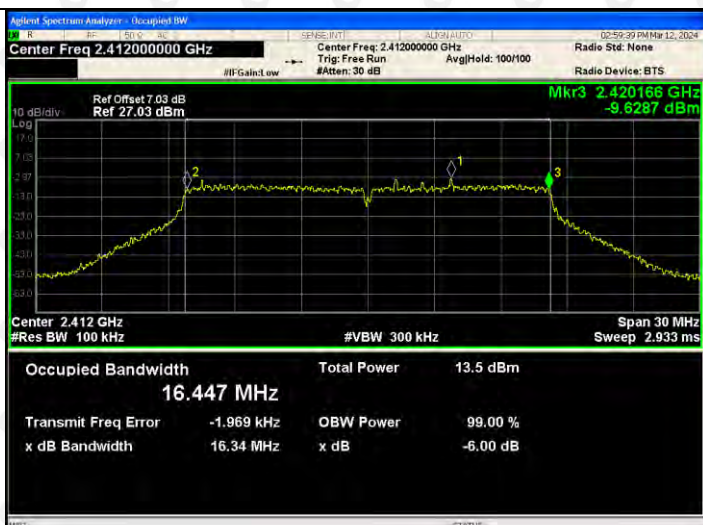





802.11g/MCH

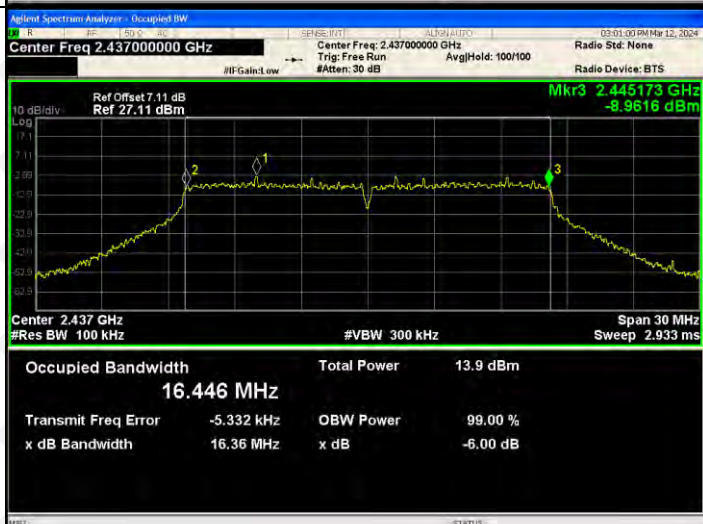

802.11g/HCH

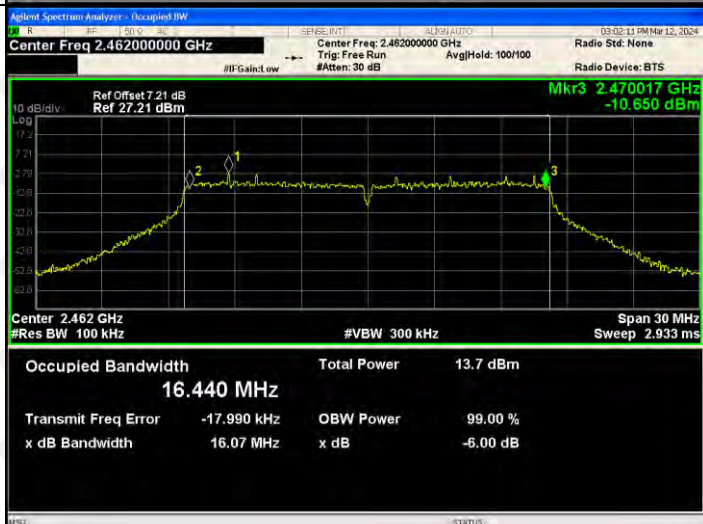


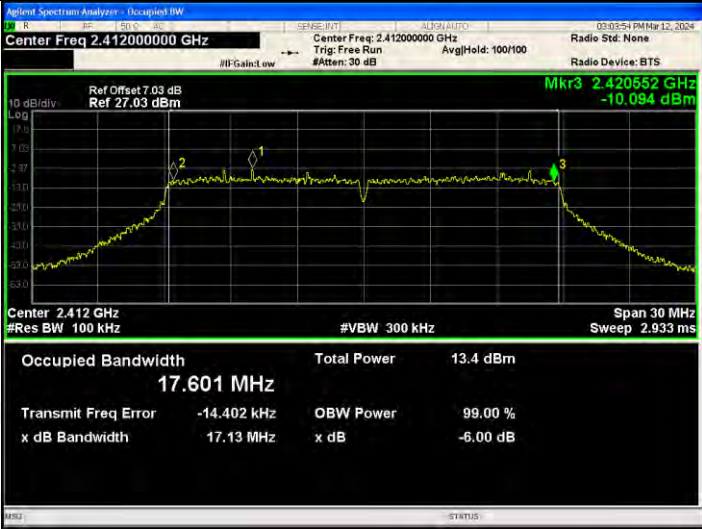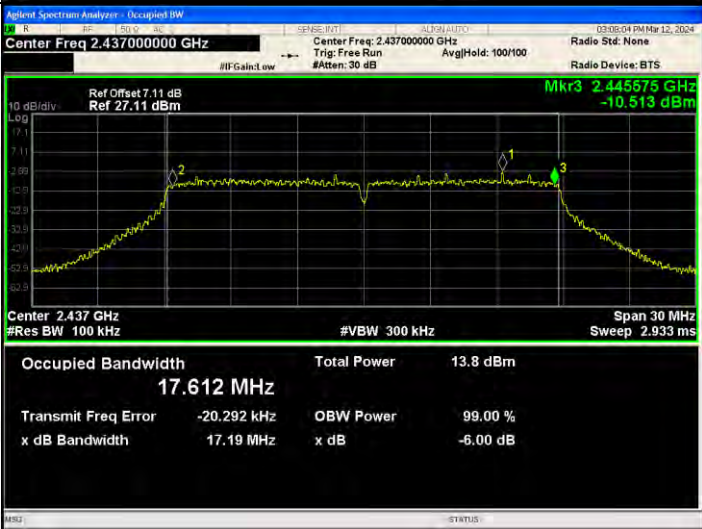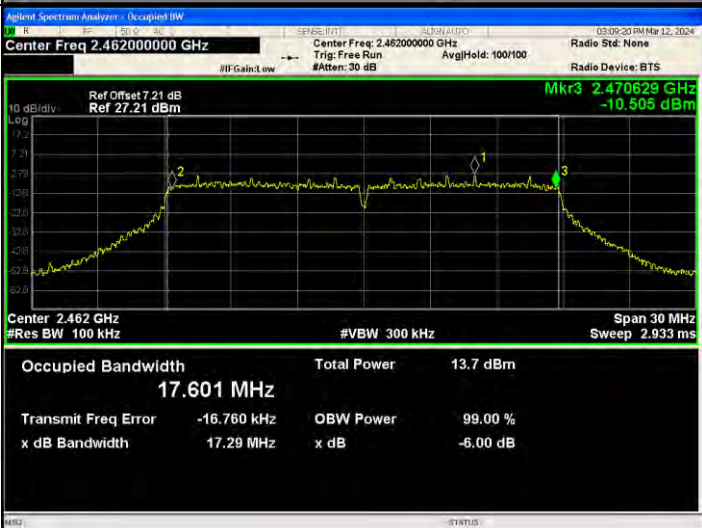802.11n(HT20)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.41200000 GHz Ref Offset 7.03 dB Ref 27.03 dBm Mkr3 2.420552 GHz -10.094 dBm Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.601 MHz Total Power 13.4 dBm Transmit Freq Error -14.402 kHz OBW Power 99.00 % x dB Bandwidth 17.13 MHz x dB -6.00 dB
802.11n(HT20)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.43700000 GHz Ref Offset 7.11 dB Ref 27.11 dBm Mkr3 2.445575 GHz -10.513 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.612 MHz Total Power 13.8 dBm Transmit Freq Error -20.292 kHz OBW Power 99.00 % x dB Bandwidth 17.19 MHz x dB -6.00 dB
802.11n(HT20)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.46200000 GHz Ref Offset 7.21 dB Ref 27.21 dBm Mkr3 2.470629 GHz -10.505 dBm Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.601 MHz Total Power 13.7 dBm Transmit Freq Error -16.760 kHz OBW Power 99.00 % x dB Bandwidth 17.29 MHz x dB -6.00 dB

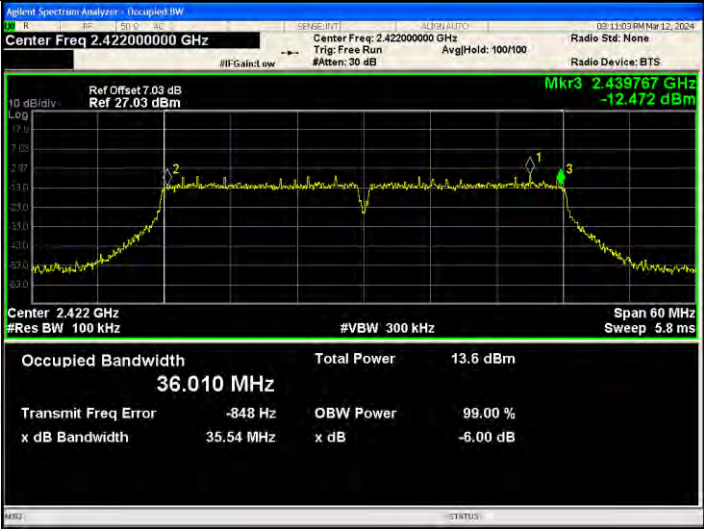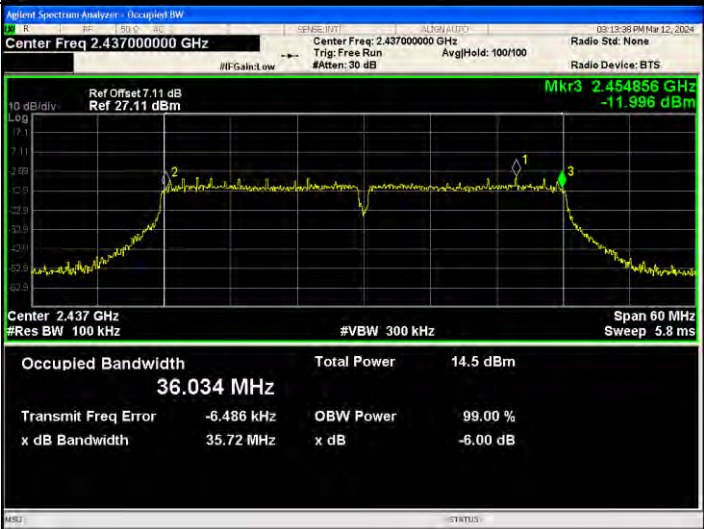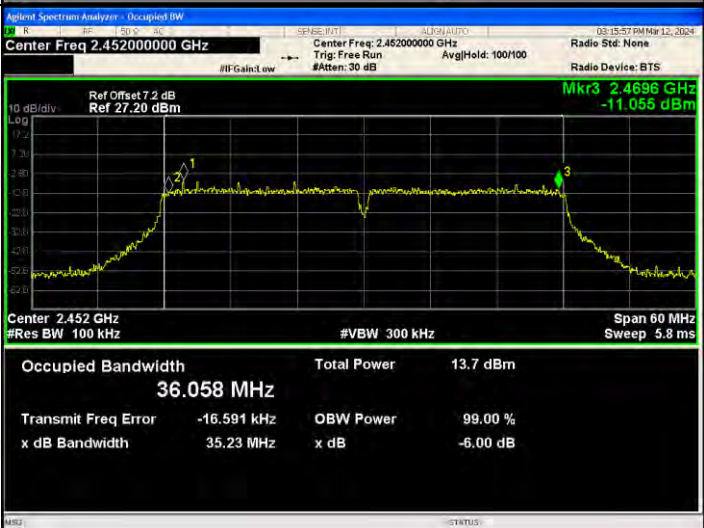802.11n(HT40)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.42200000 GHz Ref Offset 7.03 dB Ref 27.03 dBm Mkr3 2.439767 GHz -12.472 dBm Center 2.422 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 36.010 MHz Total Power 13.6 dBm Transmit Freq Error -848 Hz OBW Power 99.00 % x dB Bandwidth 35.54 MHz x dB -6.00 dB
802.11n(HT40)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.43700000 GHz Ref Offset 7.11 dB Ref 27.11 dBm Mkr3 2.454856 GHz -11.996 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 36.034 MHz Total Power 14.5 dBm Transmit Freq Error -6.486 kHz OBW Power 99.00 % x dB Bandwidth 35.72 MHz x dB -6.00 dB
802.11n(HT40)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.45200000 GHz Ref Offset 7.2 dB Ref 27.20 dBm Mkr3 2.4696 GHz -11.055 dBm Center 2.452 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 36.058 MHz Total Power 13.7 dBm Transmit Freq Error -16.591 kHz OBW Power 99.00 % x dB Bandwidth 35.23 MHz x dB -6.00 dB

11. POWER SPECTRAL DENSITY

11.1 Block Diagram Of Test Setup

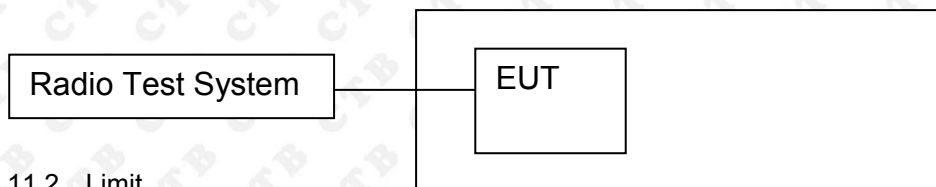

11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

11.3 Test procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = Peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


11.4 Test Result

Mode	Channel.	Power Spectral Density [dBm /3KHz] ANT 1	Power Spectral Density [dBm /3KHz] ANT 2	Power Spectral Density [dBm /3KHz] Total	Limit(dBm)
802.11b	LCH	-15.978	-14.693	/	8
	MCH	-15.121	-14.266	/	8
	HCH	-15.924	-15.958	/	8
802.11g	LCH	-17.893	-18.538	/	8
	MCH	-17.605	-18.404	/	8
	HCH	-17.611	-17.904	/	8
802.11n(H T20)	LCH	-17.689	-17.537	-14.602	8
	MCH	-17.564	-18.261	-14.888	8
	HCH	-17.735	-18.524	-15.101	8
802.11n(H T40)	LCH	-20.463	-21.936	-18.127	8
	MCH	-20.847	-22.039	-18.392	8
	HCH	-20.376	-21.622	-17.944	8

ANT1: Test Graph

Graphs

802.11b /LCH

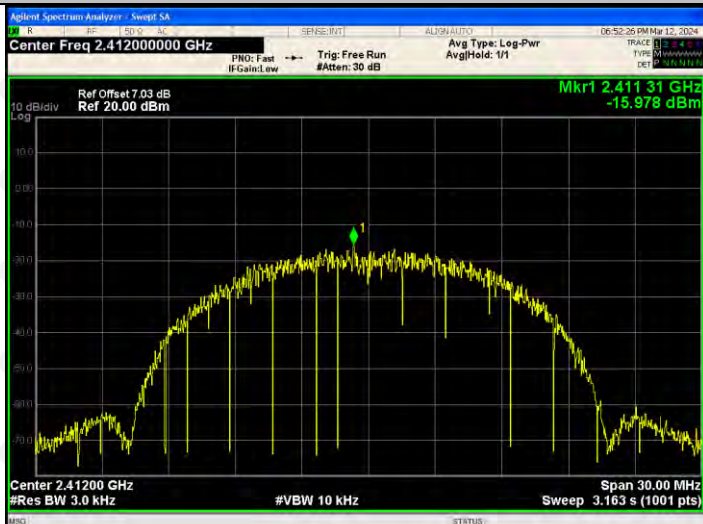


802.11b /MCH



802.11b/HCH



802.11g/LCH


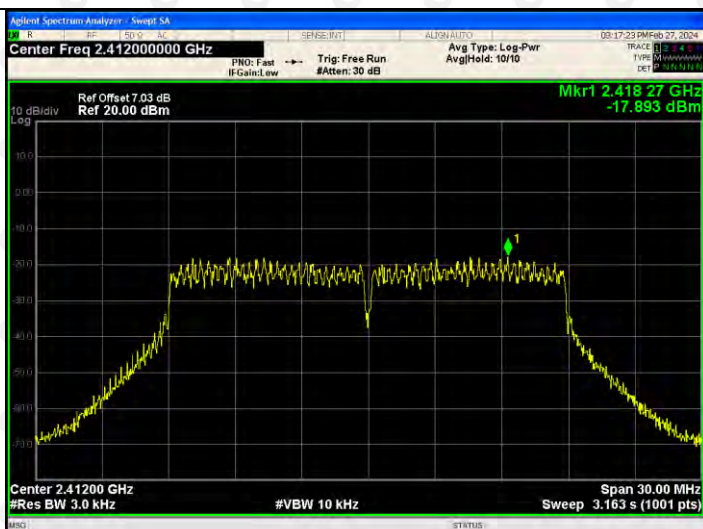



802.11g/MCH




802.11g/HCH

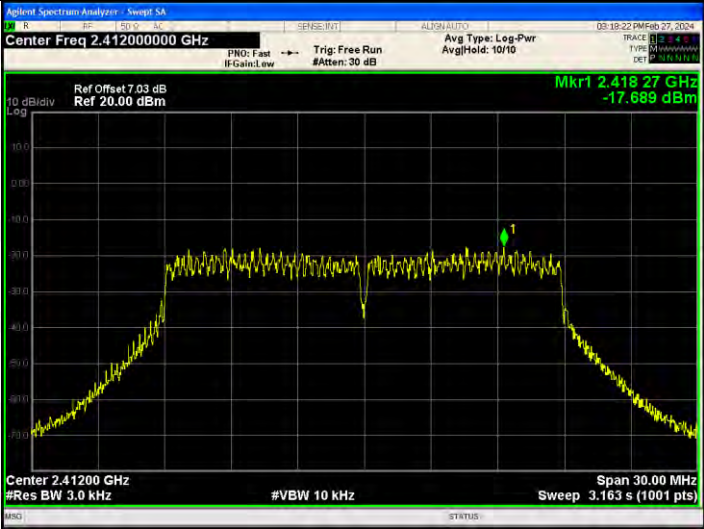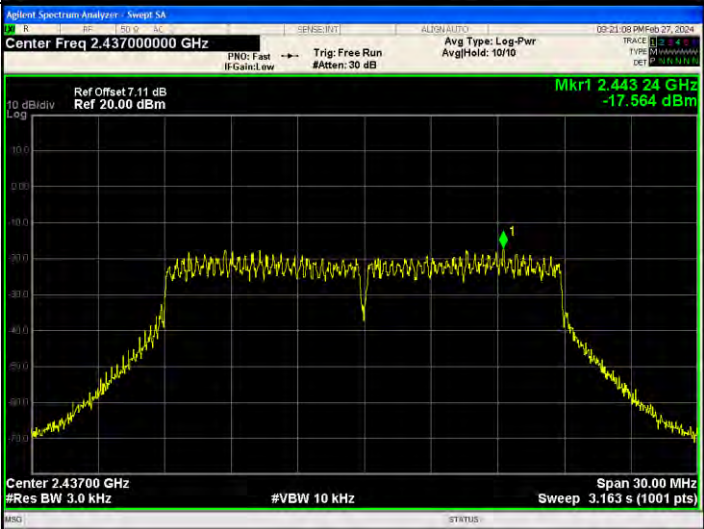

802.11n(HT20)/LC H	
802.11n(HT20)/MC H	
802.11n(HT20)/HC H	

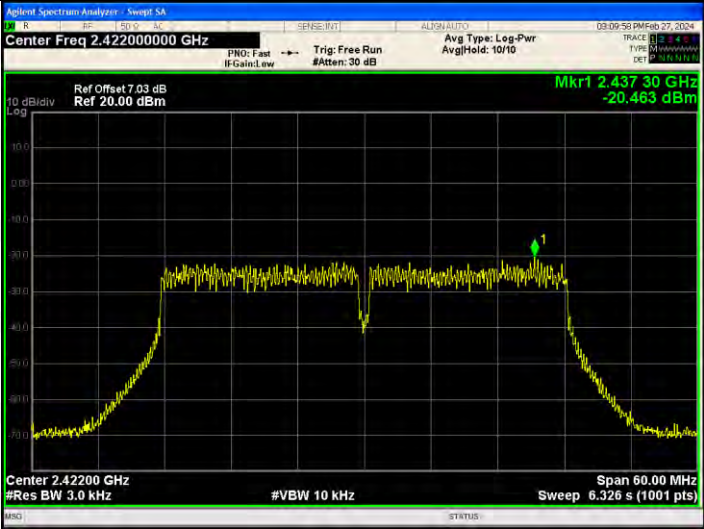802.11n(HT40)/LC H	
802.11n(HT40)/MC H	
802.11n(HT40)/HC H	

ANT 2: Test Graph

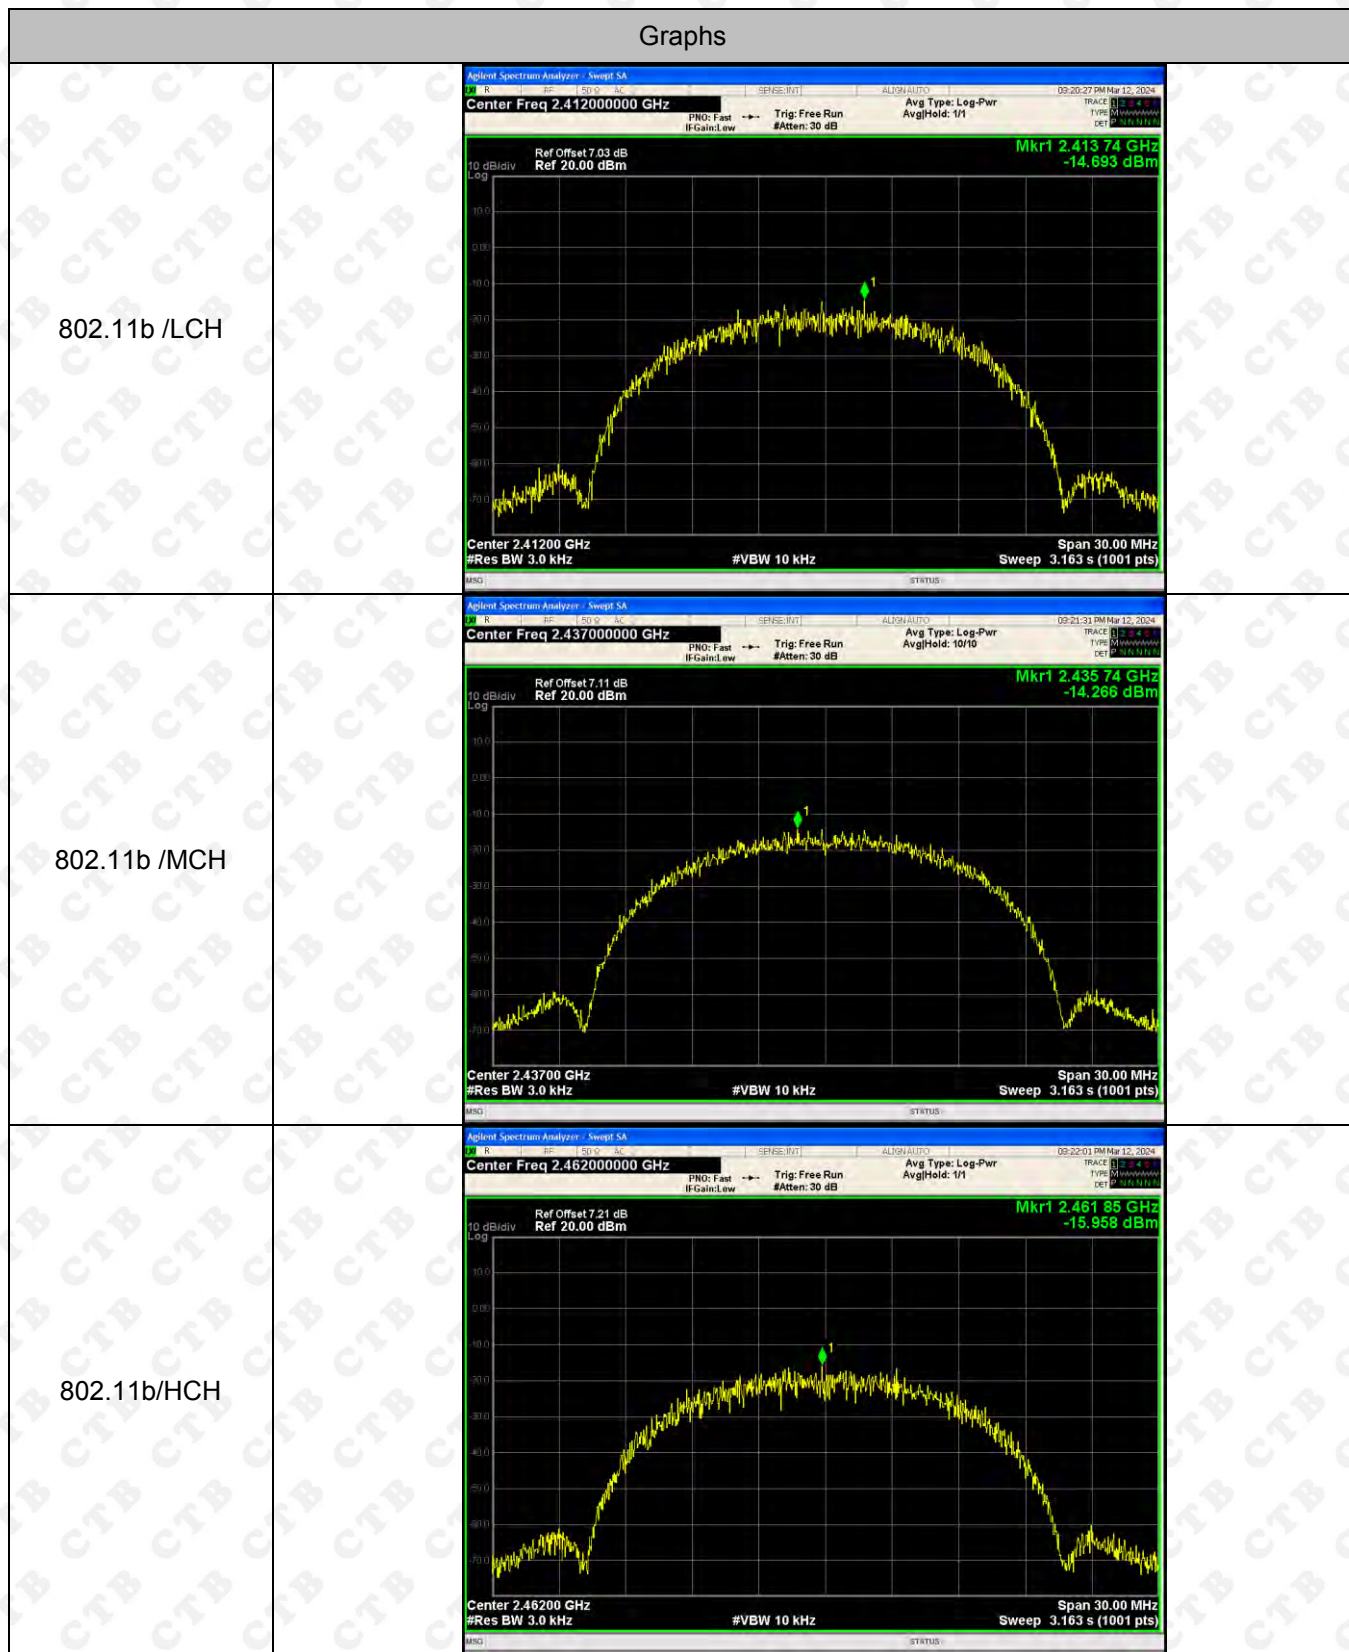

802.11g/LCH







802.11g/MCH



802.11g/HCH

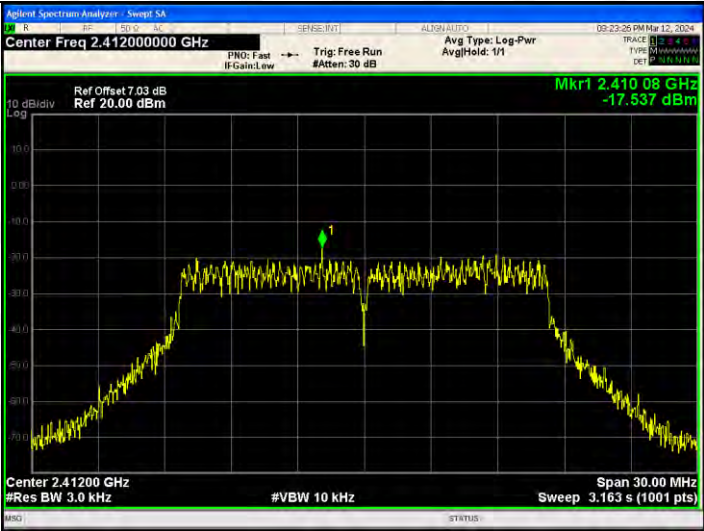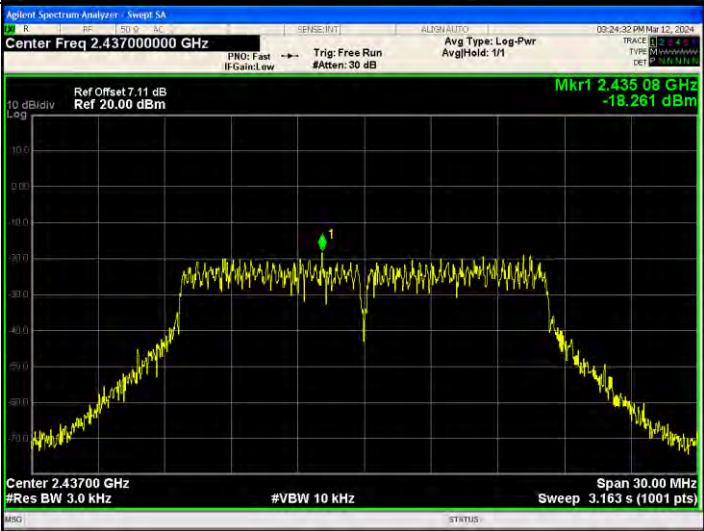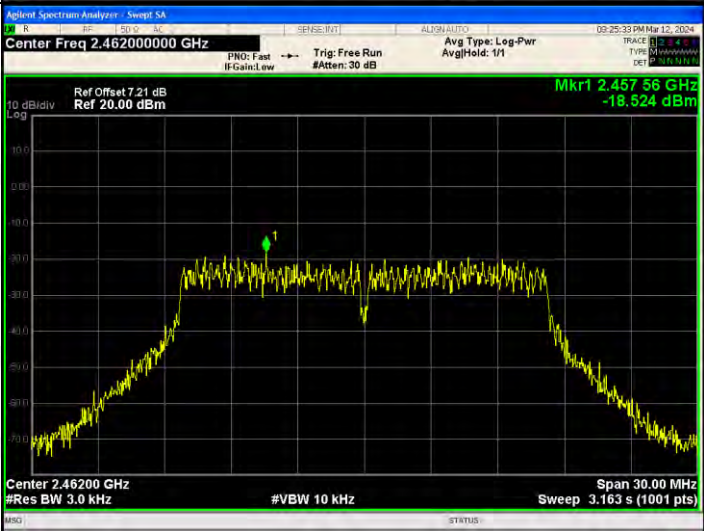

802.11n(HT20)/LC H	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.41200000 GHz Ref Offset 7.03 dB Ref 20.00 dBm Mkr1 2.410 08 GHz -17.537 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11n(HT20)/MC H	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.43700000 GHz Ref Offset 7.11 dB Ref 20.00 dBm Mkr1 2.435 08 GHz -18.261 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11n(HT20)/HC H	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.46200000 GHz Ref Offset 7.21 dB Ref 20.00 dBm Mkr1 2.457 56 GHz -18.524 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)

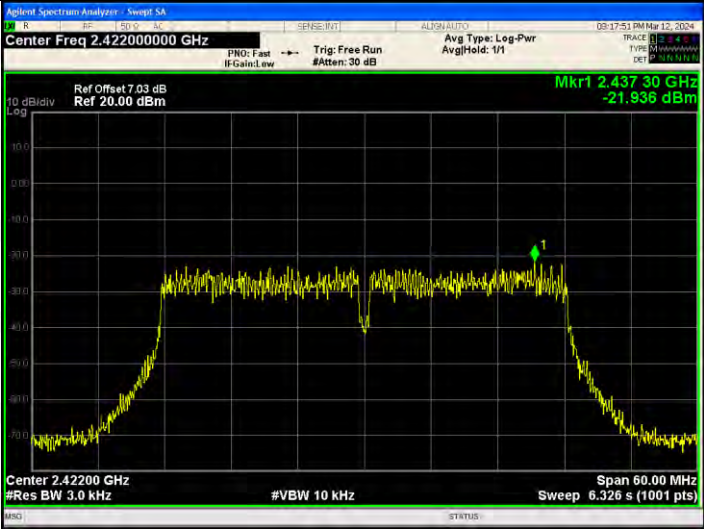802.11n(HT40)/LC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.422000000 GHz Ref Offset 7.03 dB Ref 20.00 dBm Mkr1 2.437 30 GHz -21.936 dBm Center 2.42200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/MC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.437000000 GHz Ref Offset 7.11 dB Ref 20.00 dBm Mkr1 2.438 26 GHz -22.039 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/HC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.452000000 GHz Ref Offset 7.2 dB Ref 20.00 dBm Mkr1 2.464 42 GHz -21.622 dBm Center 2.45200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)

12. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is Internal antenna and no consideration of replacement. The best case gain of the antenna is Ant1: 1.33dBi, Ant2: 1.07dBi

13. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission


Below 1G



Above 1G



Conducted Emission

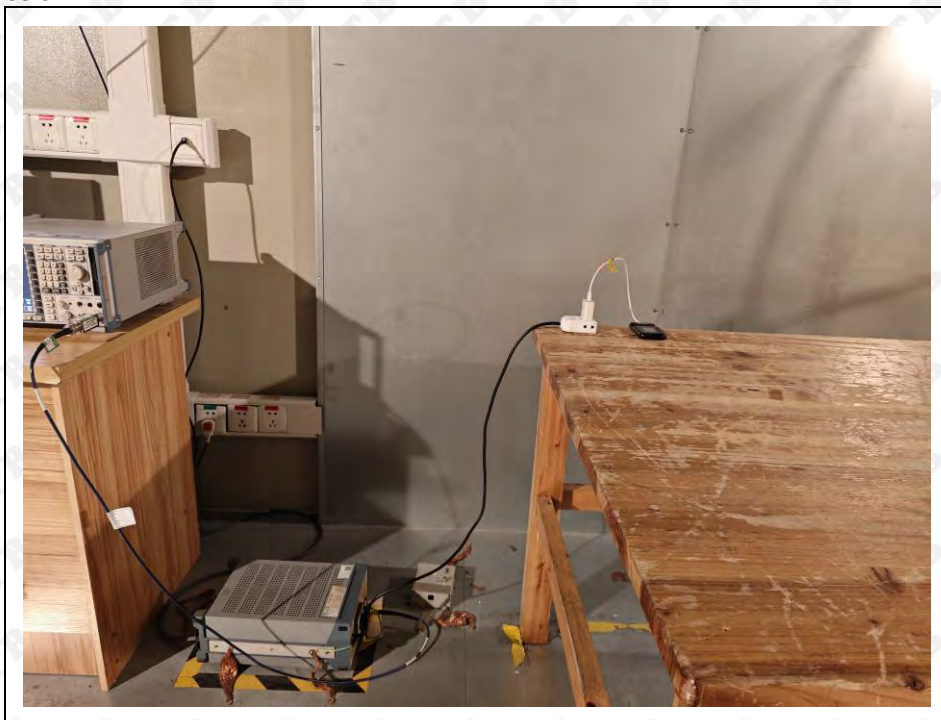

***** END OF REPORT *****