


mutalk 2 Quickstart Guide

Please check online manual for detail
<https://manual.shiftall.net/mutalk2/>


Voice guidance will be played from H/P output jack

1. Power ON/OFF




Press & Hold 3sec
then power on/off
Orange: Dongle Mode
Green: Bluetooth mode
Red: Power Off

2. Switch Mode



Triple Click
then power off and reboot
with another mode


3a. Connect to Dongle

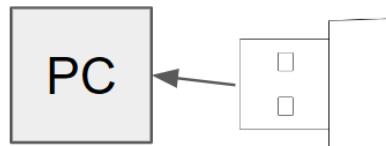

Plug the dongle to PC
Dongle is pre-paired and
shipped

Automatically connect to
dongle mode mutalk 2
after connected, LED blinks
3 times every 3 seconds

3b. Connect to PC/Smartphone



With BT mode, power off then
press & hold until red & green
LED blink alternately
to enter pairing mode

Then you can connect from
your PC or smartphone

after connected, LED blinks 3
times every 3 seconds

FCC Caution

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the distance between the equipment and receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirements. The device can be used in portable exposure conditions without restriction.