



## Appendix A

### RF Test Data for BT (Conducted Measurement)

Product Name: Network Media Player

Test Model: Player One 8K

#### Environmental Conditions

|                    |            |
|--------------------|------------|
| Temperature:       | 23.8° C    |
| Relative Humidity: | 52.1%      |
| ATM Pressure:      | 100.0 kPa  |
| Test Engineer:     | Paddi Chen |
| Supervised by:     | Nick Peng  |



Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity



## A.1 -20dB Bandwidth


| Condition | Mode  | Frequency (MHz) | Antenna | -20 dB Bandwidth (MHz) | Limit -20 dB Bandwidth (MHz) | Verdict |
|-----------|-------|-----------------|---------|------------------------|------------------------------|---------|
| NVNT      | 1-DH5 | 2402            | Ant1    | 1.038                  | N/A                          | Pass    |
| NVNT      | 1-DH5 | 2441            | Ant1    | 1.031                  | N/A                          | Pass    |
| NVNT      | 1-DH5 | 2480            | Ant1    | 0.964                  | N/A                          | Pass    |
| NVNT      | 2-DH5 | 2402            | Ant1    | 1.318                  | N/A                          | Pass    |
| NVNT      | 2-DH5 | 2441            | Ant1    | 1.324                  | N/A                          | Pass    |
| NVNT      | 2-DH5 | 2480            | Ant1    | 1.288                  | N/A                          | Pass    |
| NVNT      | 3-DH5 | 2402            | Ant1    | 1.3                    | N/A                          | Pass    |
| NVNT      | 3-DH5 | 2441            | Ant1    | 1.282                  | N/A                          | Pass    |
| NVNT      | 3-DH5 | 2480            | Ant1    | 1.3                    | N/A                          | Pass    |





## Test Graphs

-20dB Bandwidth NVNT 1-DH5 2402MHz Ant1

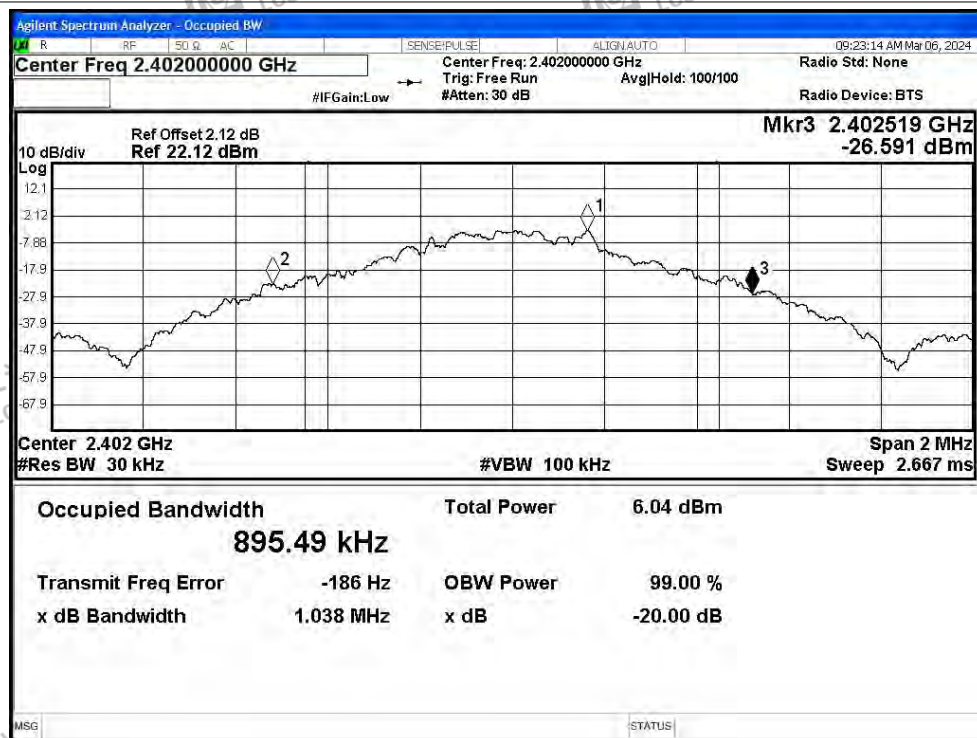


-20dB Bandwidth NVNT 1-DH5 2441MHz Ant1






## -20dB Bandwidth NVNT 1-DH5 2480MHz Ant1

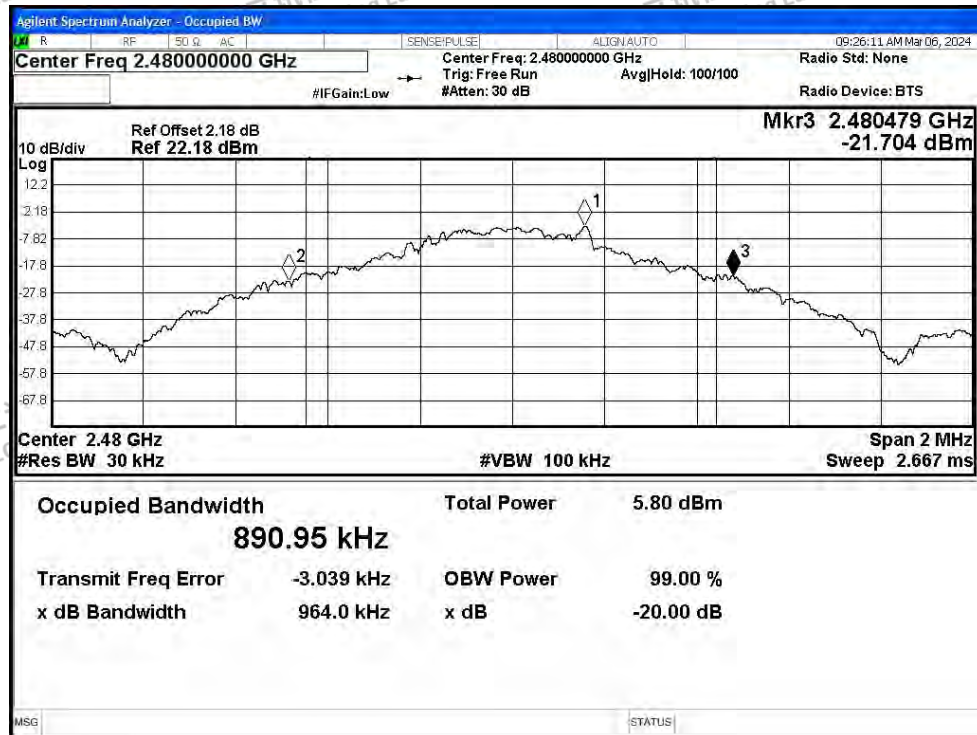


## -20dB Bandwidth NVNT 2-DH5 2402MHz Ant1

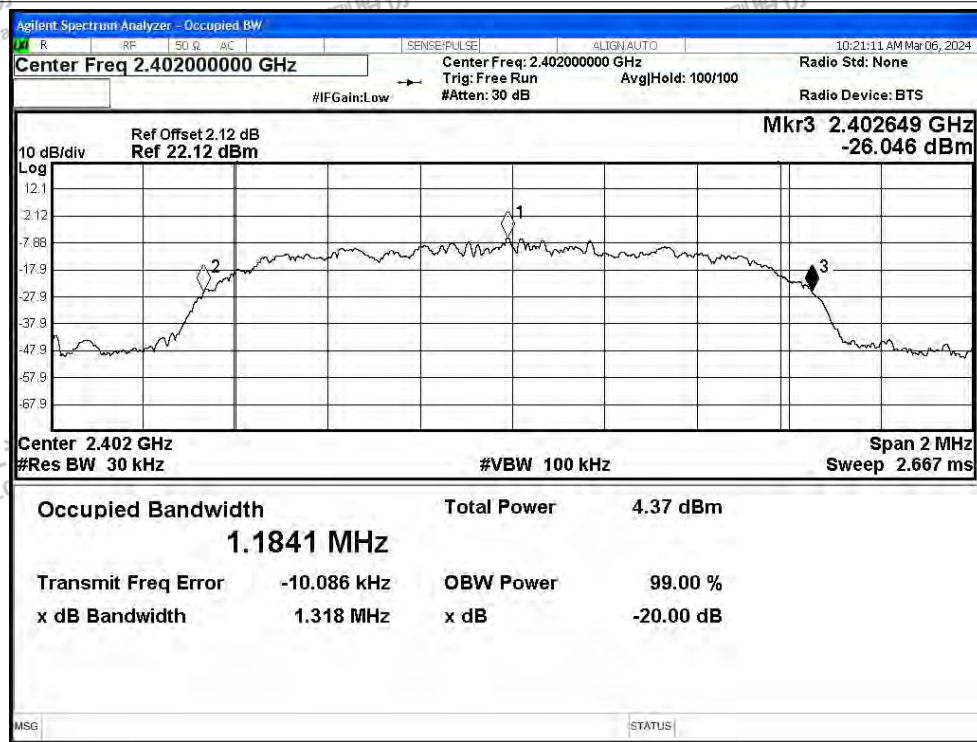




-20dB Bandwidth NVNT 2-DH5 2441MHz Ant1

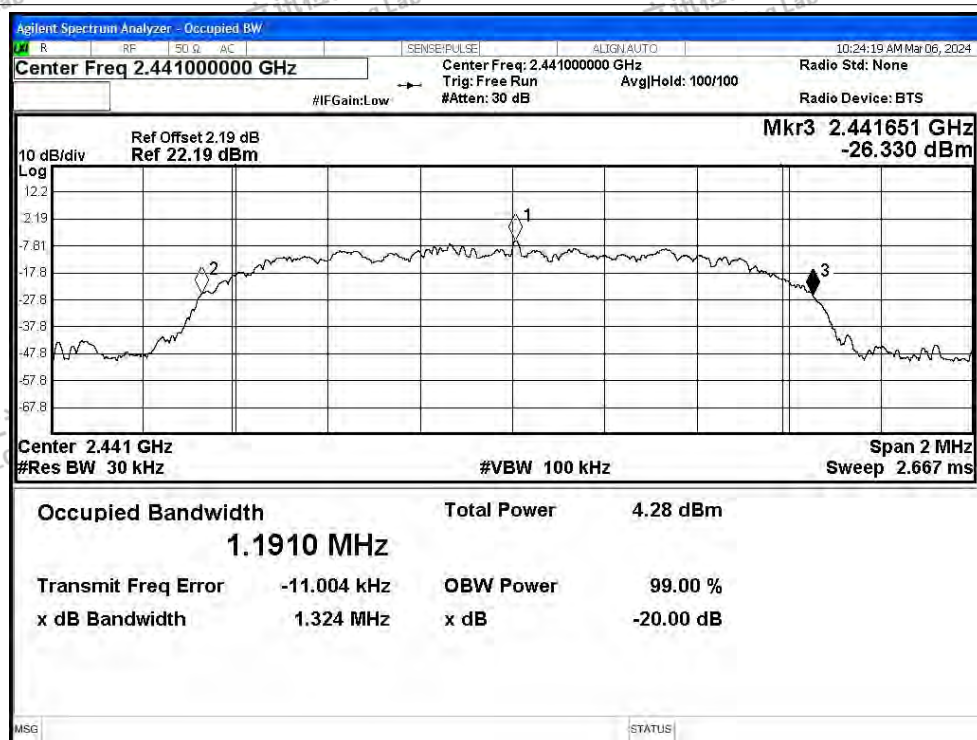

-20dB Bandwidth NVNT 2-DH5 2480MHz Ant1

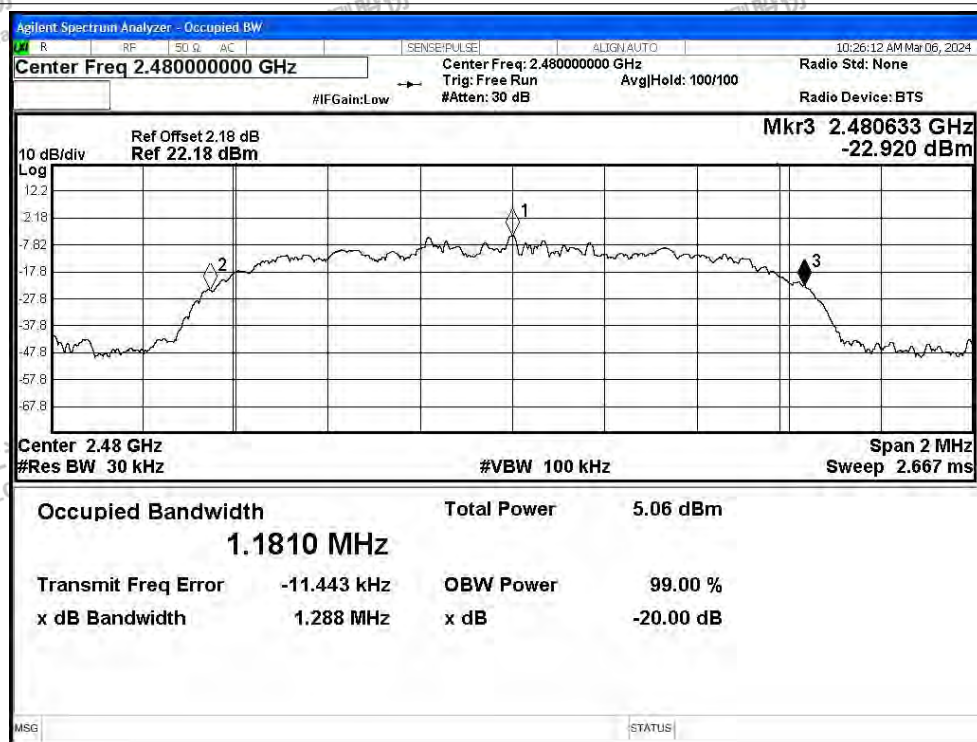

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



-20dB Bandwidth NVNT 3-DH5 2402MHz Ant1

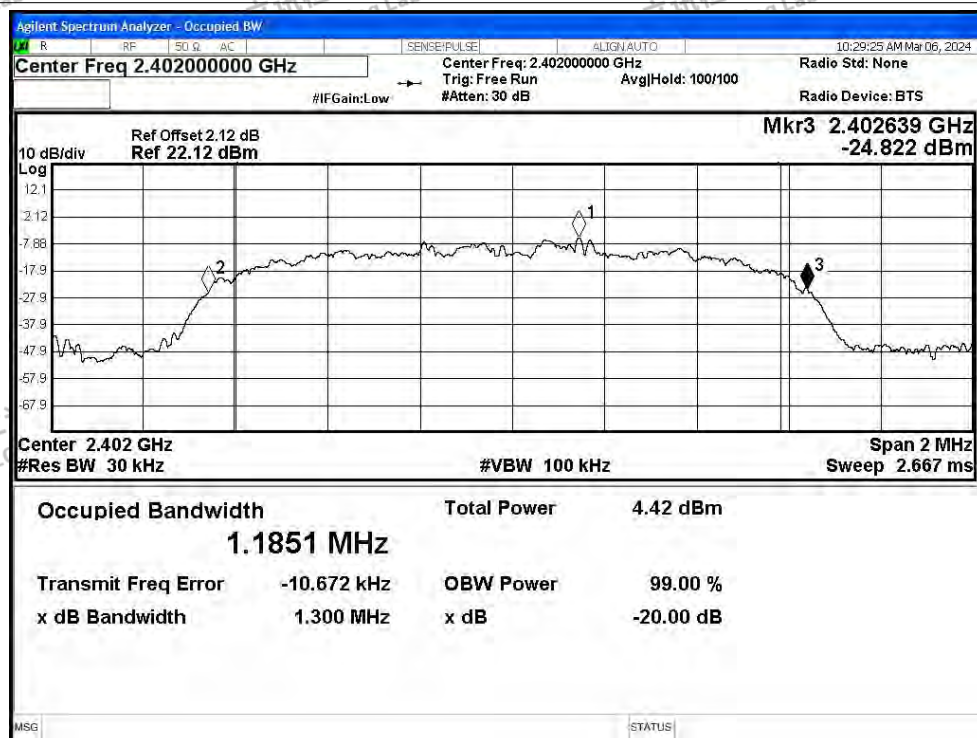

-20dB Bandwidth NVNT 3-DH5 2441MHz Ant1

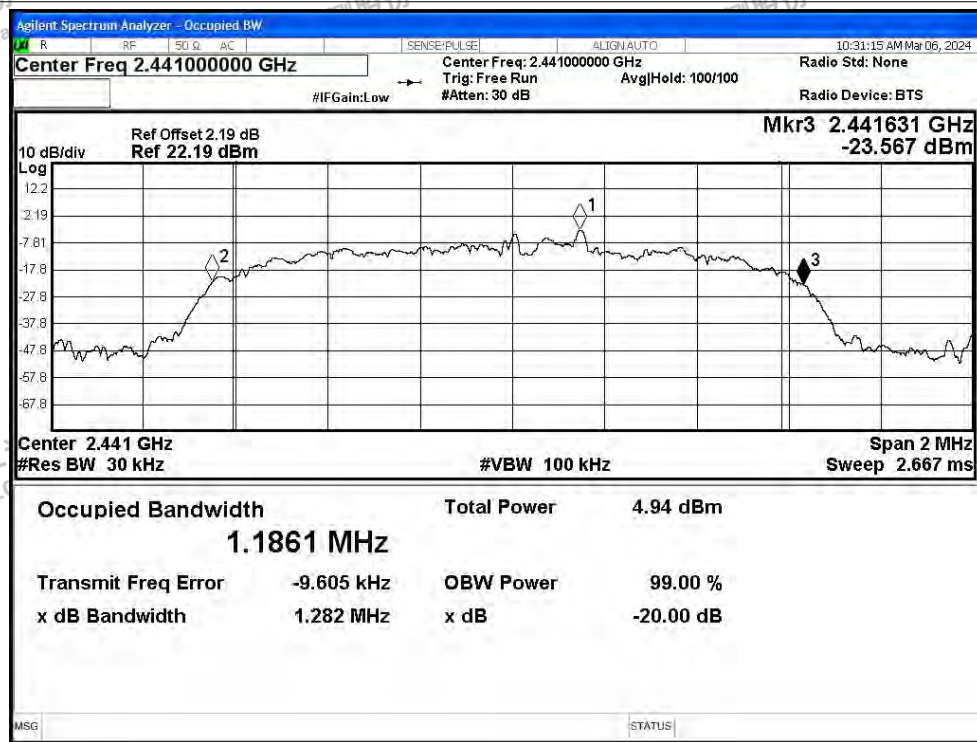

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



-20dB Bandwidth NVNT 3-DH5 2480MHz Ant1

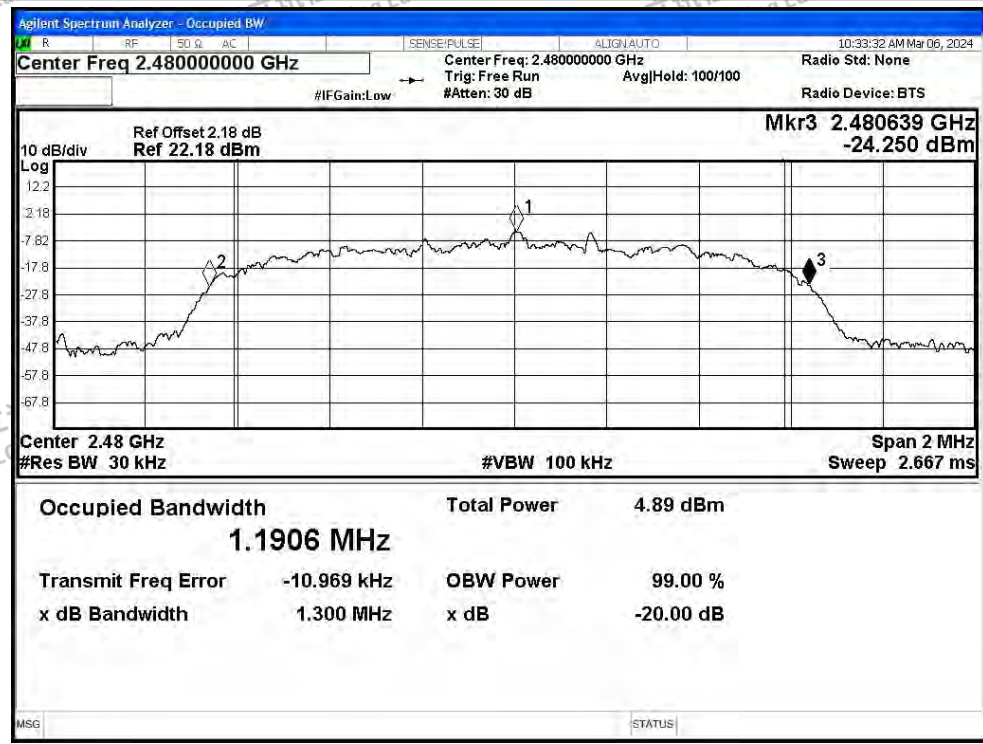



## A.2 Maximum Conducted Output Power


| Condition | Mode  | Frequency (MHz) | Antenna | Conducted Power (dBm) | Limit (dBm) | Verdict |
|-----------|-------|-----------------|---------|-----------------------|-------------|---------|
| NVNT      | 1-DH5 | 2402            | Ant1    | -0.49                 | 21          | Pass    |
| NVNT      | 1-DH5 | 2441            | Ant1    | -0.12                 | 21          | Pass    |
| NVNT      | 1-DH5 | 2480            | Ant1    | -0.45                 | 21          | Pass    |
| NVNT      | 2-DH5 | 2402            | Ant1    | 0.04                  | 21          | Pass    |
| NVNT      | 2-DH5 | 2441            | Ant1    | 0.39                  | 21          | Pass    |
| NVNT      | 2-DH5 | 2480            | Ant1    | 0.51                  | 21          | Pass    |
| NVNT      | 3-DH5 | 2402            | Ant1    | 0.07                  | 21          | Pass    |
| NVNT      | 3-DH5 | 2441            | Ant1    | 0.48                  | 21          | Pass    |
| NVNT      | 3-DH5 | 2480            | Ant1    | 0.57                  | 21          | Pass    |






## Test Graphs

Power NVNT 1-DH5 2402MHz Ant1

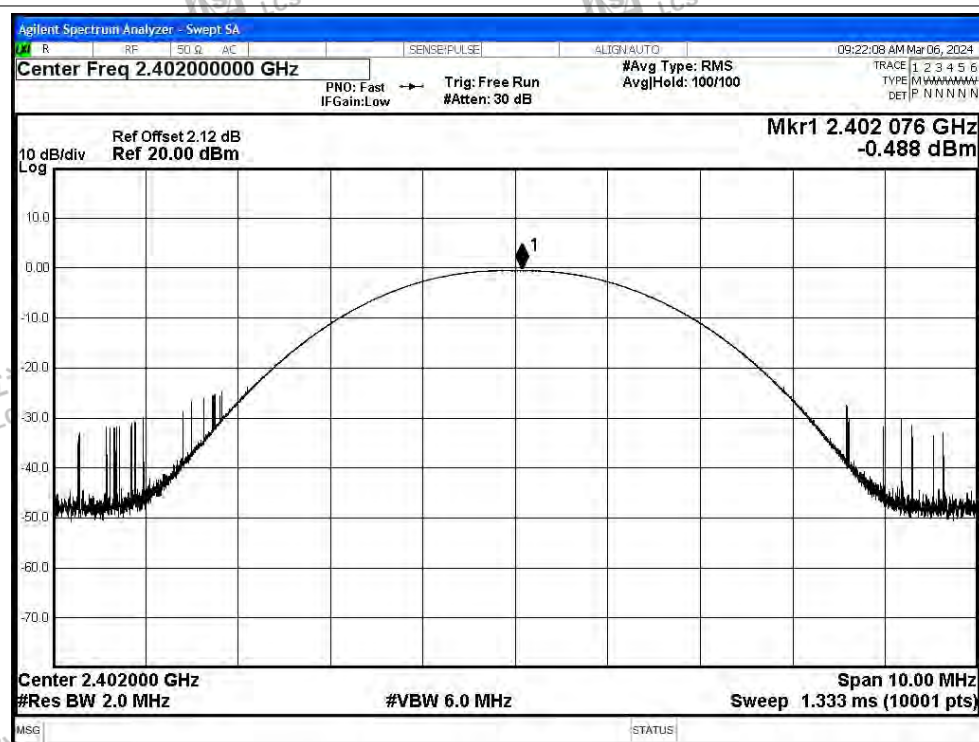


Power NVNT 1-DH5 2441MHz Ant1

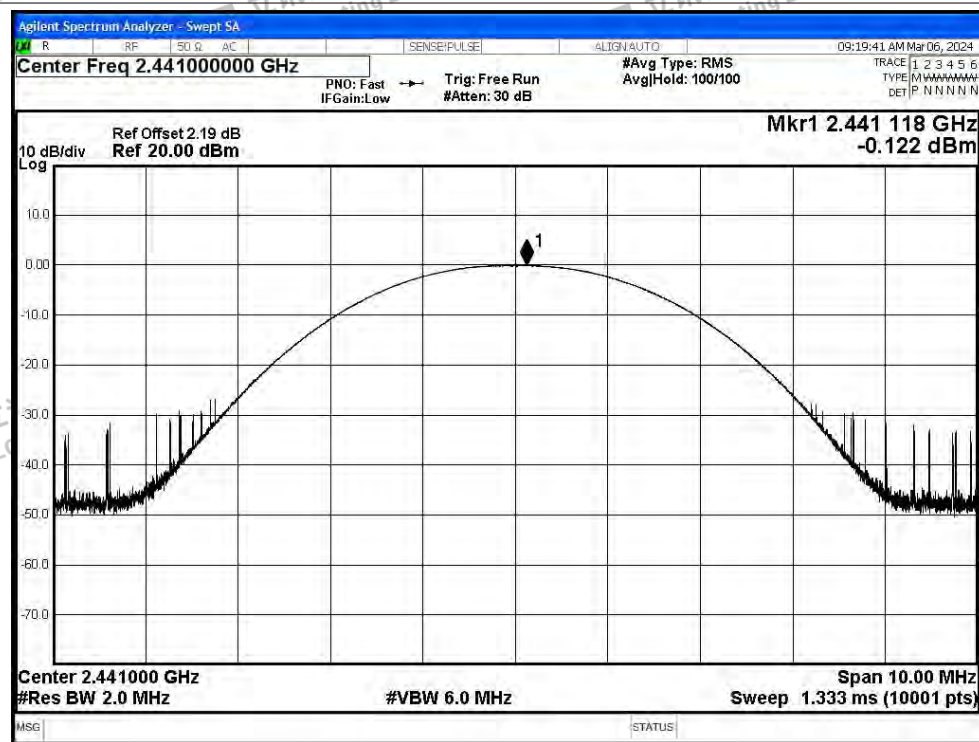




LCSA2274006EA

## Power NVNT 1-DH5 2480MHz Ant1

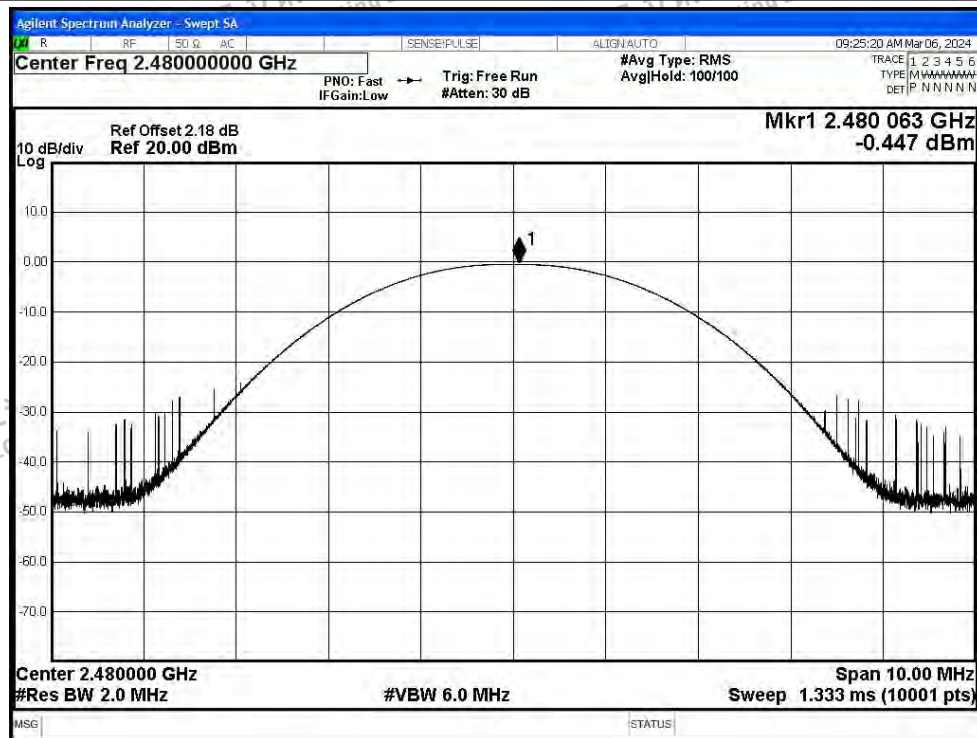


## Power NVNT 2-DH5 2402MHz Ant1

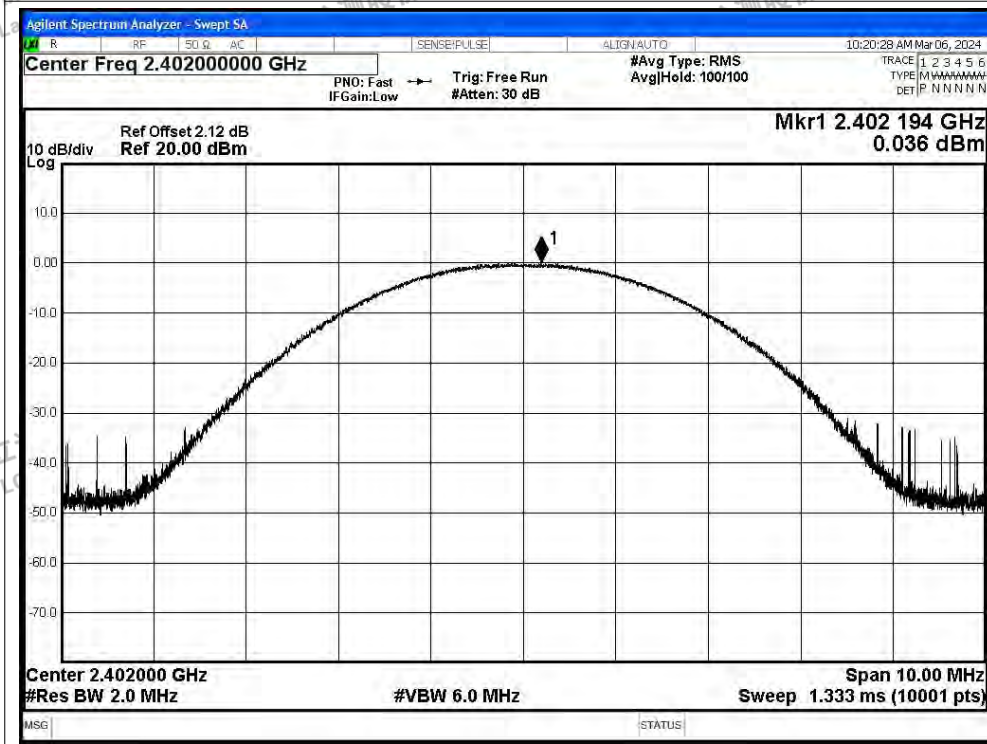




LCSA2274006EA

## Power NVNT 2-DH5 2441MHz Ant1

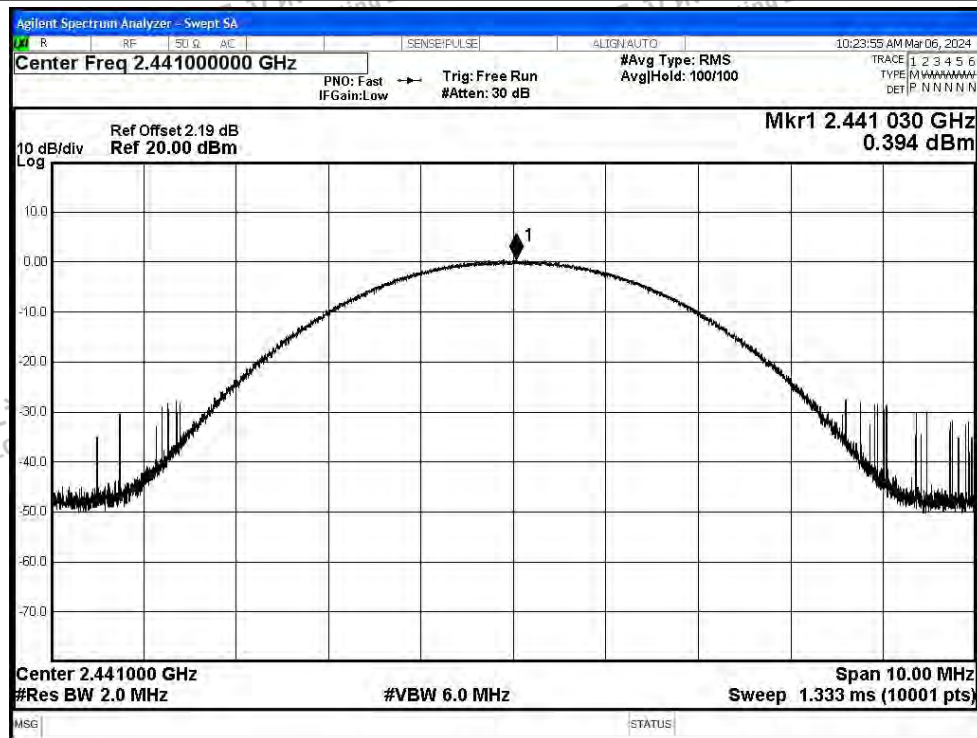


## Power NVNT 2-DH5 2480MHz Ant1

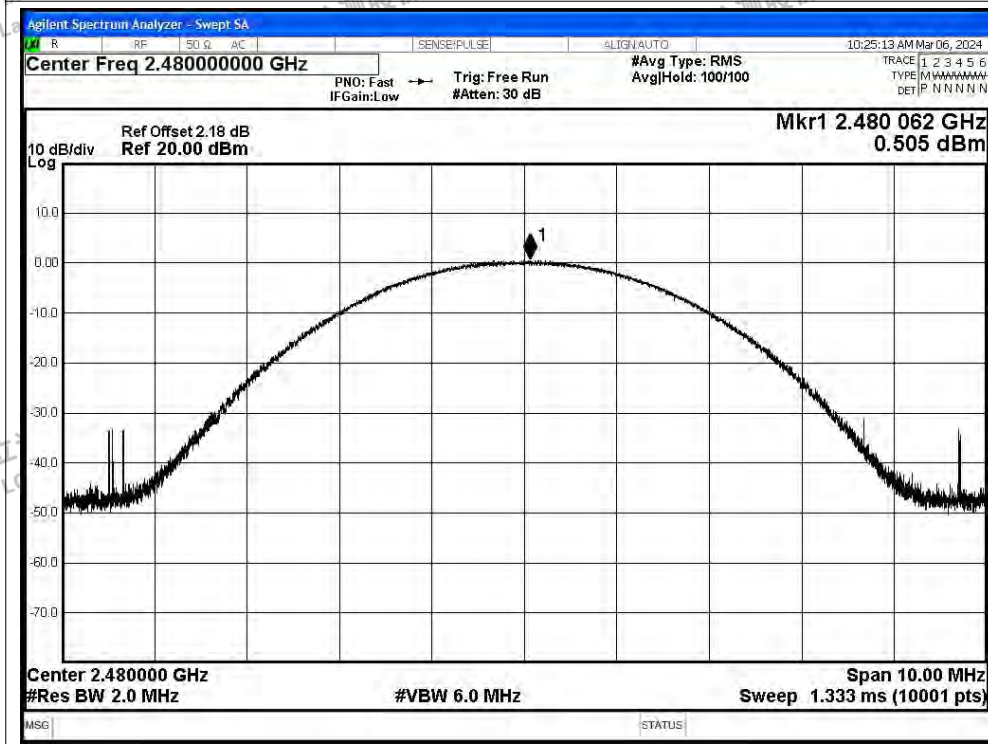




LCSA2274006EA

## Power NVNT 3-DH5 2402MHz Ant1

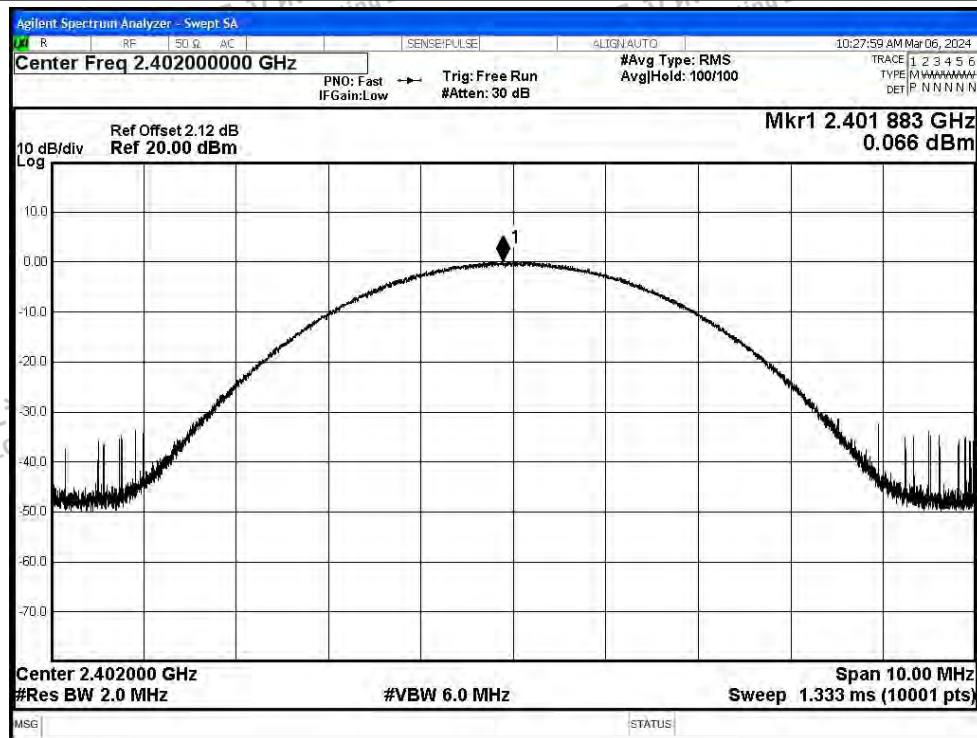


## Power NVNT 3-DH5 2441MHz Ant1

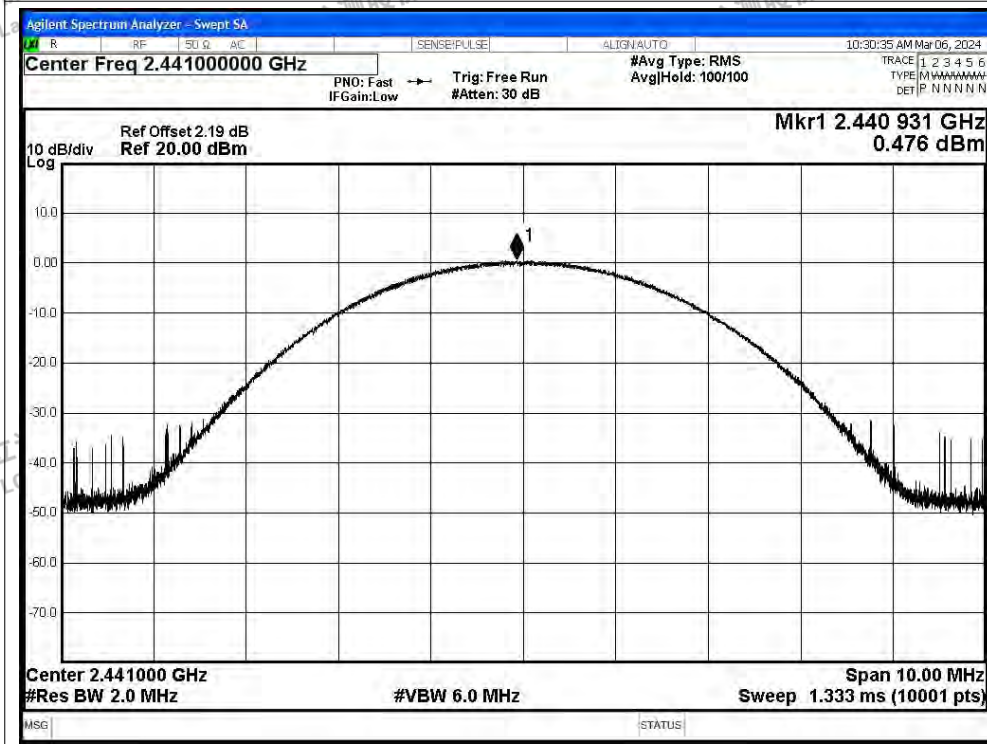



LCSA2274006EA

Power NVNT 3-DH5 2480MHz Ant1

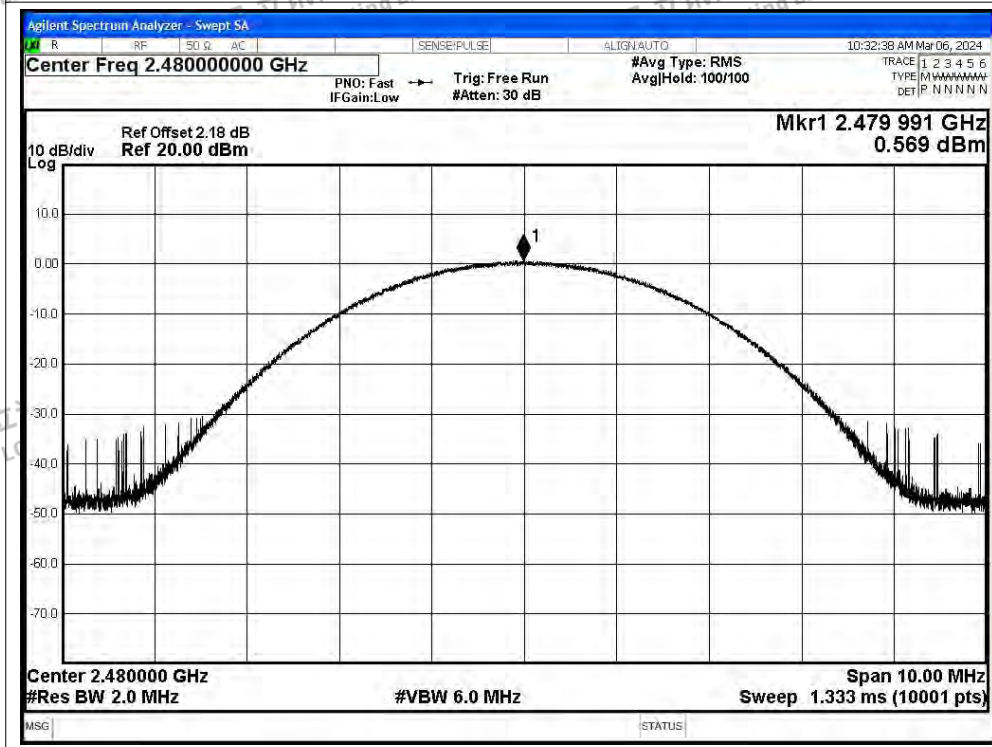

Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen,  
518000, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity



### A.3 Carrier Frequencies Separation

| Condition | Mode  | Antenna | Hopping Freq1 (MHz) | Hopping Freq2 (MHz) | HFS (MHz) | Limit (MHz) | Verdict |
|-----------|-------|---------|---------------------|---------------------|-----------|-------------|---------|
| NVNT      | 1-DH5 | Ant1    | 2401.884            | 2402.964            | 1.08      | 0.692       | Pass    |
| NVNT      | 2-DH5 | Ant1    | 2402.006            | 2403.166            | 1.16      | 0.883       | Pass    |
| NVNT      | 3-DH5 | Ant1    | 2402.142            | 2403.102            | 0.96      | 0.867       | Pass    |






LCSA2274006EA

## Test Graphs

## CFS NVNT 1-DH5 2402MHz Ant1




## CFS NVNT 2-DH5 2402MHz Ant1

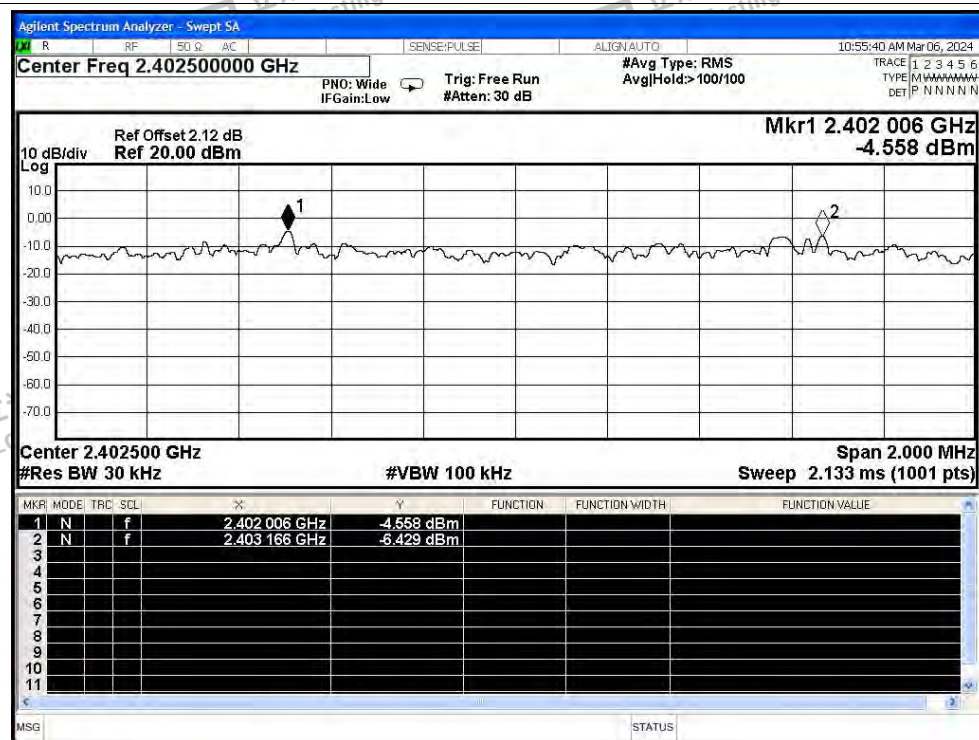



LCSA2274006EA

CFS NVNT 3-DH5 2402MHz Ant1

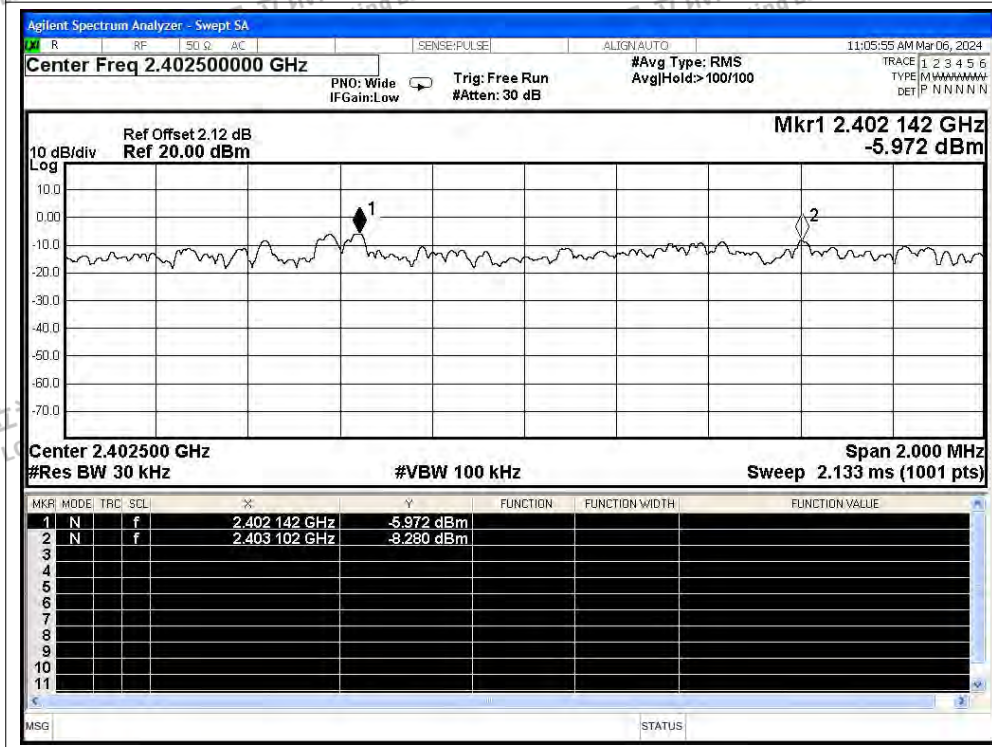

Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity



LCSA2274006EA

## A.4 Dwell Time

| Condition | Mode  | Frequency<br>(MHz) | Antenna | Pulse Time<br>(ms) | Total Dwell Time<br>(ms) | Burst<br>Count | Period Time<br>(ms) | Limit<br>(ms) | Verdict |
|-----------|-------|--------------------|---------|--------------------|--------------------------|----------------|---------------------|---------------|---------|
| NVNT      | 1-DH5 | 2402               | Ant1    | 2.881              | 316.91                   | 110            | 31600               | 400           | Pass    |
| NVNT      | 2-DH5 | 2402               | Ant1    | 2.881              | 360.125                  | 125            | 31600               | 400           | Pass    |
| NVNT      | 3-DH5 | 2402               | Ant1    | 2.887              | 282.926                  | 98             | 31600               | 400           | Pass    |




Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen,  
518000, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity




LCSA2274006EA

## Test Graphs

## Dwell NVNT 1-DH5 2402MHz Ant1 One Burst

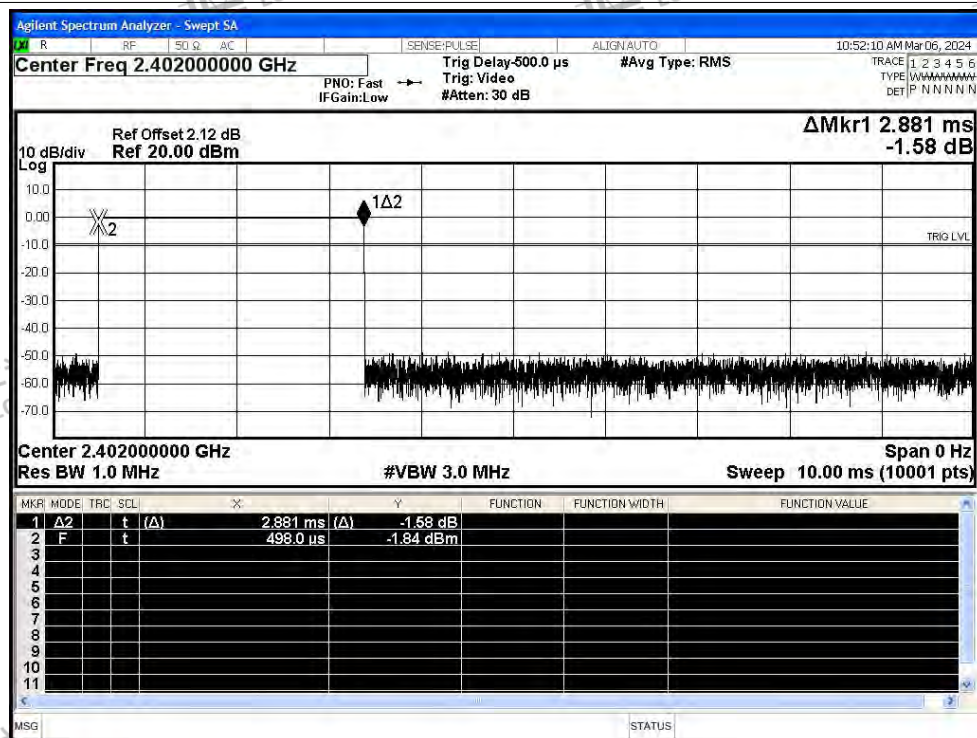


## Dwell NVNT 1-DH5 2402MHz Ant1 Accumulated

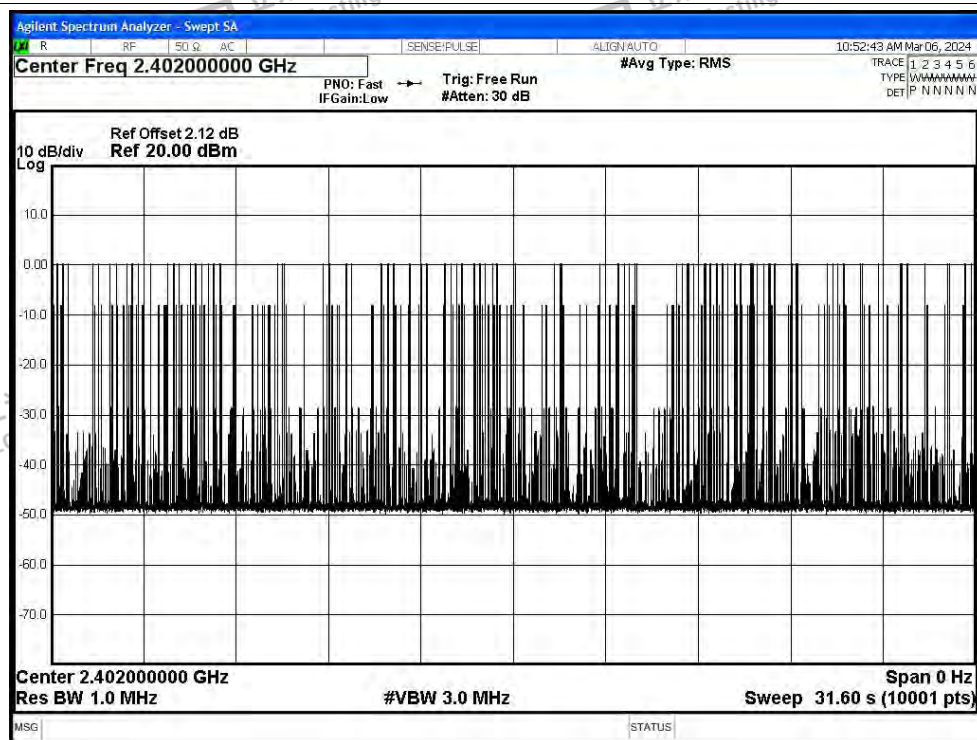




LCSA2274006EA

## Dwell NVNT 2-DH5 2402MHz Ant1 One Burst

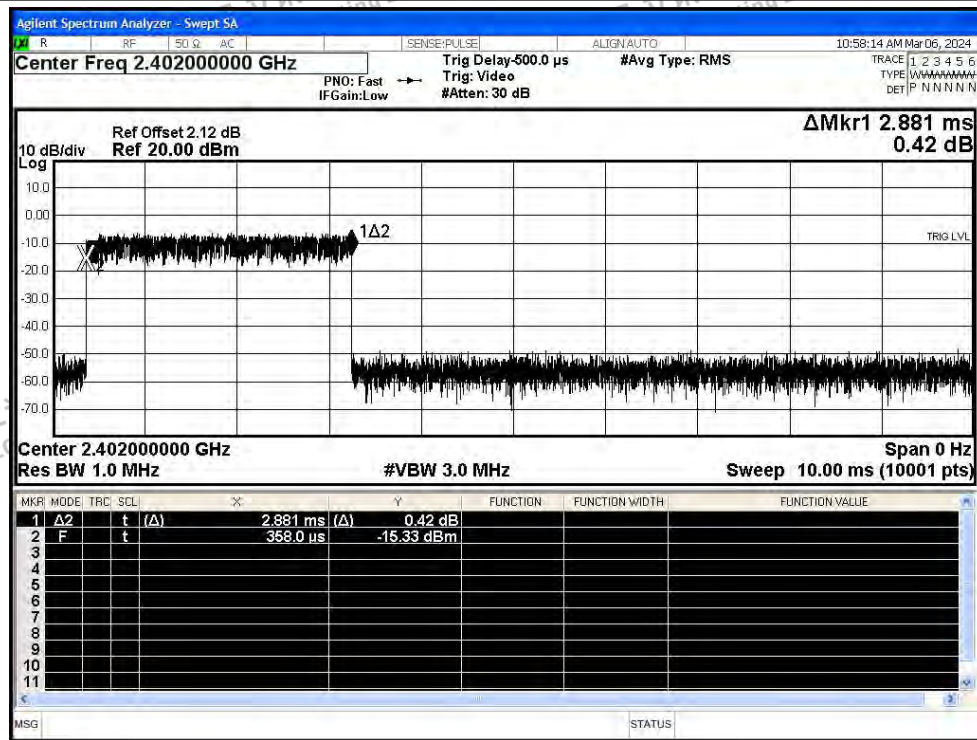


## Dwell NVNT 2-DH5 2402MHz Ant1 Accumulated

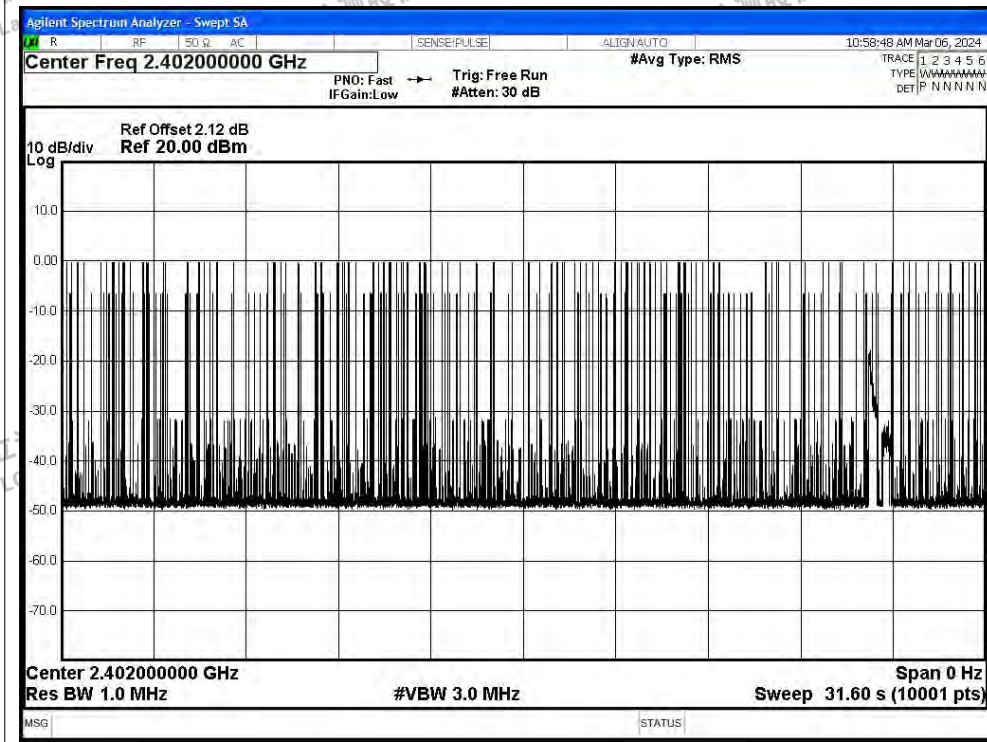




LCSA2274006EA

## Dwell NVNT 3-DH5 2402MHz Ant1 One Burst

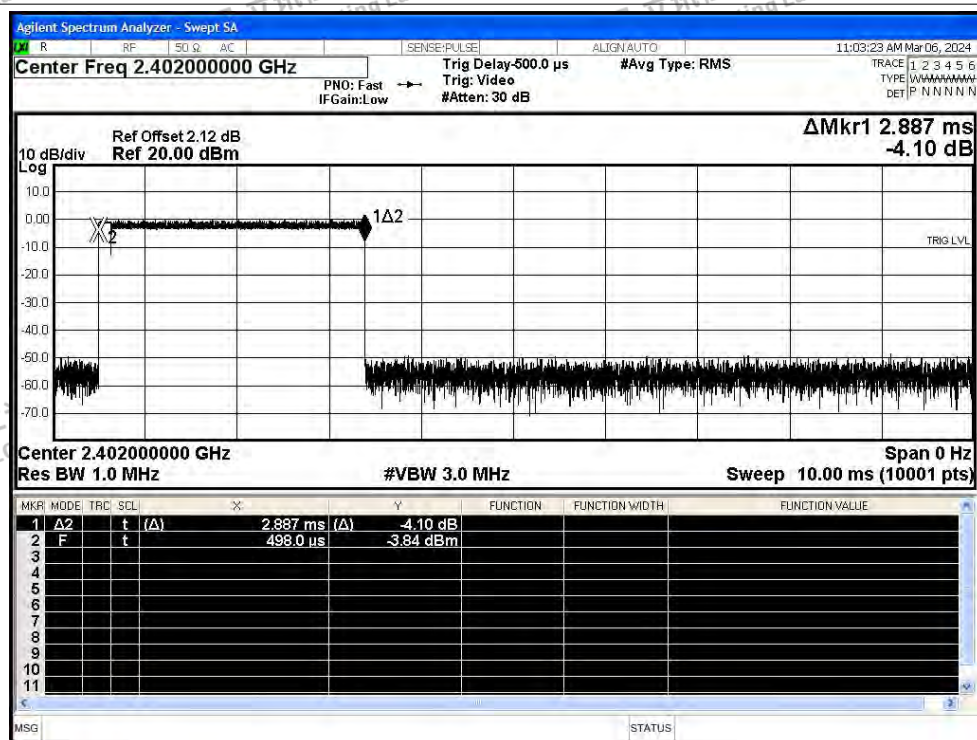

## Dwell NVNT 3-DH5 2402MHz Ant1 Accumulated

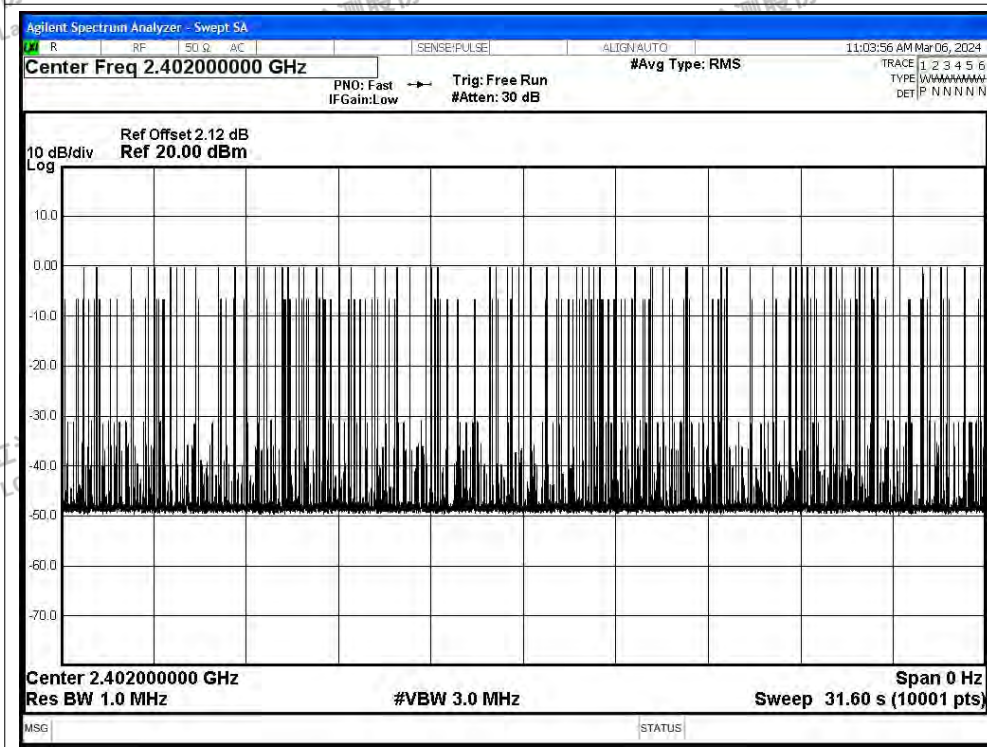



LCSA2274006EA

A.5 Number of Hopping Channel

| Condition | Mode  | Antenna | Hopping Number | Limit | Verdict |
|-----------|-------|---------|----------------|-------|---------|
| NVNT      | 1-DH5 | Ant1    | 79             | 15    | Pass    |
| NVNT      | 2-DH5 | Ant1    | 79             | 15    | Pass    |
| NVNT      | 3-DH5 | Ant1    | 79             | 15    | Pass    |




Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity




LCSA2274006EA

## Test Graphs

Hopping No. NVNT 1-DH5 2402MHz Ant1

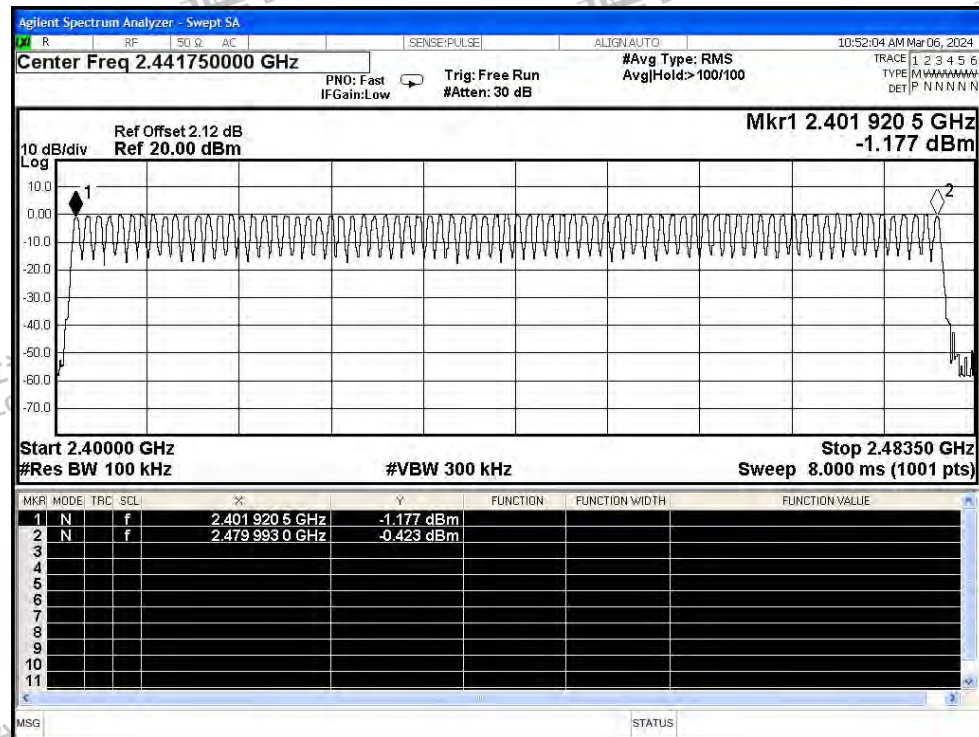


Hopping No. NVNT 2-DH5 2402MHz Ant1

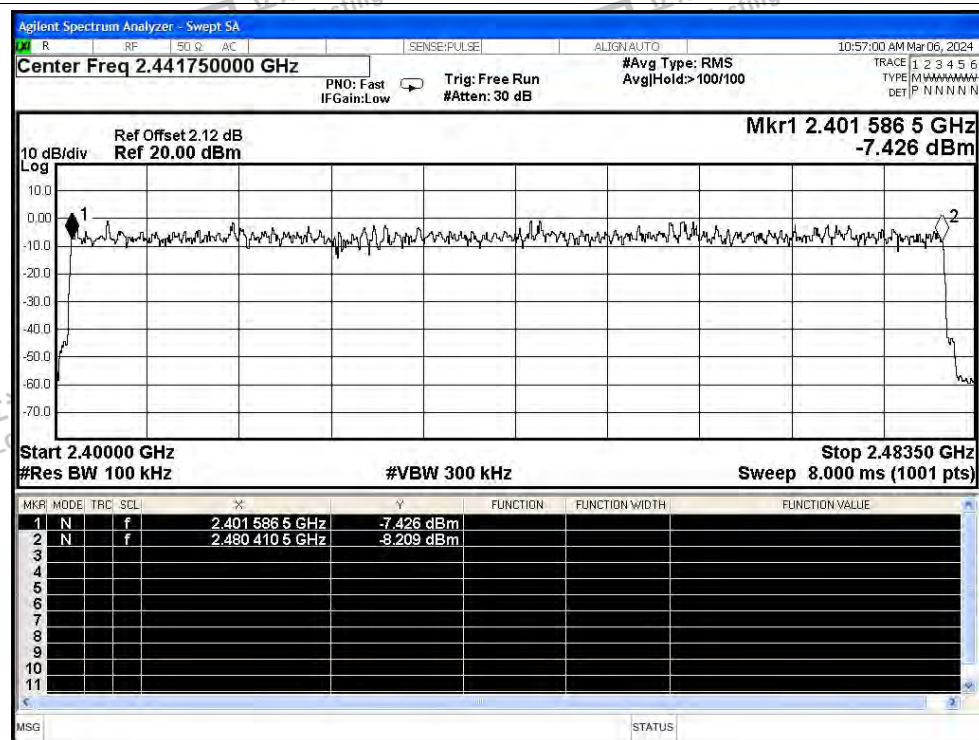



LCSA2274006EA

Hopping No. NVNT 3-DH5 2402MHz Ant1

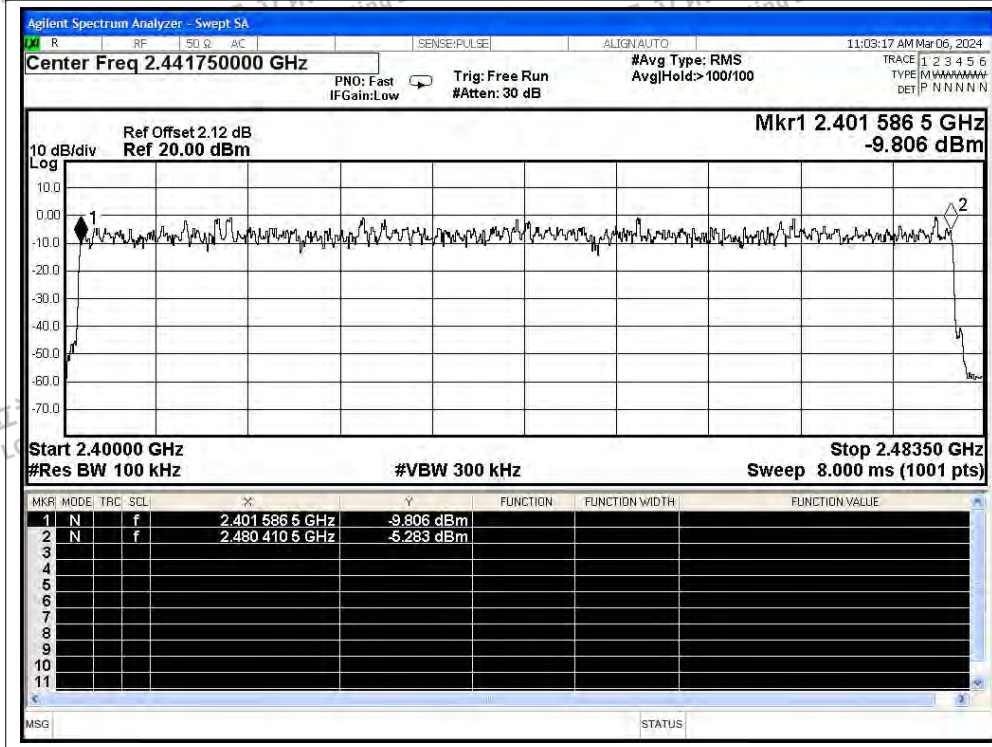

Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity



LCSA12274006EA

## A.6 Band Edge

| Condition | Mode  | Frequency (MHz) | Antenna | Hopping Mode | Max Value (dBc) | Limit (dBc) | Verdict |
|-----------|-------|-----------------|---------|--------------|-----------------|-------------|---------|
| NVNT      | 1-DH5 | 2402            | Ant1    | No-Hopping   | -44.57          | -20         | Pass    |
| NVNT      | 1-DH5 | 2480            | Ant1    | No-Hopping   | -52.03          | -20         | Pass    |
| NVNT      | 2-DH5 | 2402            | Ant1    | No-Hopping   | -52.19          | -20         | Pass    |
| NVNT      | 2-DH5 | 2480            | Ant1    | No-Hopping   | -54.23          | -20         | Pass    |
| NVNT      | 3-DH5 | 2402            | Ant1    | No-Hopping   | -52.05          | -20         | Pass    |
| NVNT      | 3-DH5 | 2480            | Ant1    | No-Hopping   | -29.96          | -20         | Pass    |







LCSA2274006EA

## Test Graphs


## Band Edge NVNT 1-DH5 2402MHz Ant1 No-Hopping Ref

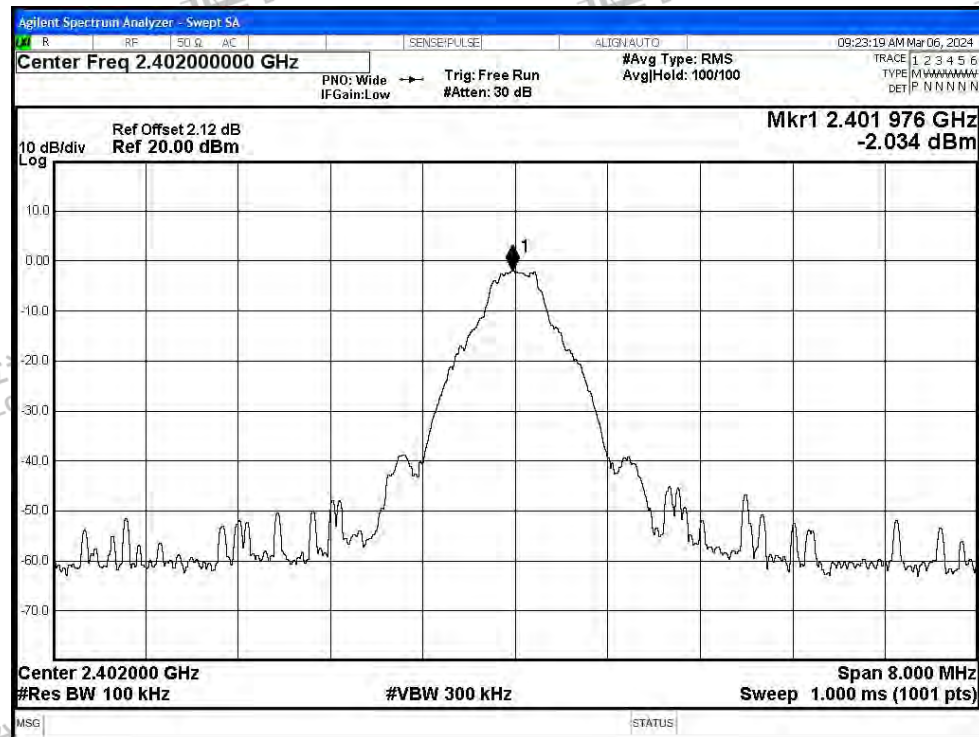


## Band Edge NVNT 1-DH5 2402MHz Ant1 No-Hopping Emission

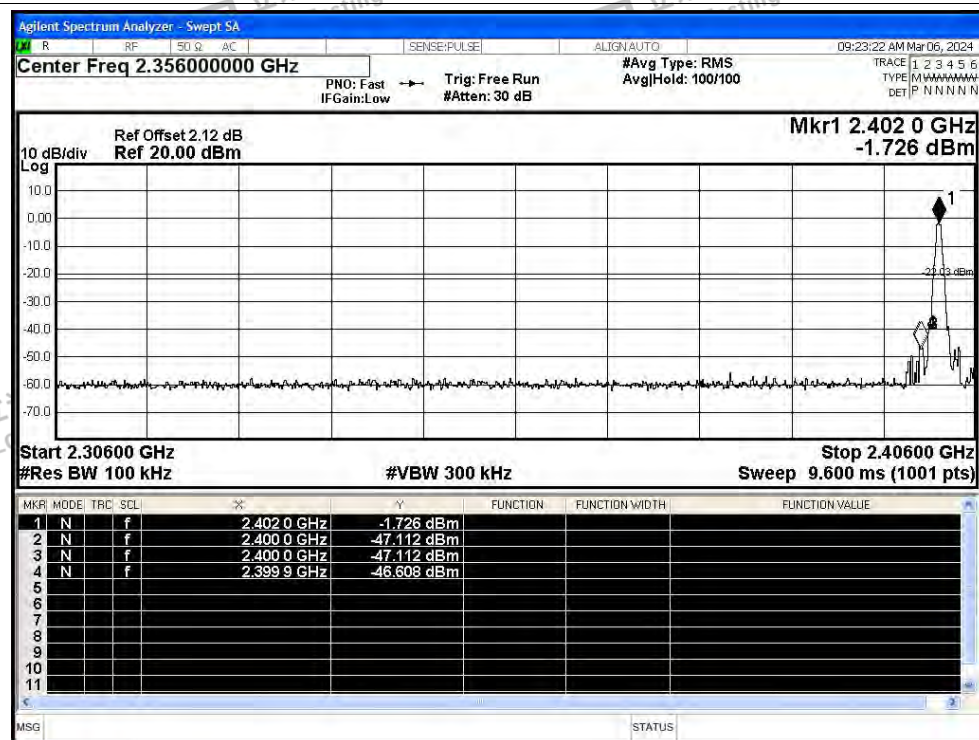


Band Edge NVNT 1-DH5 2480MHz Ant1 No-Hopping Ref

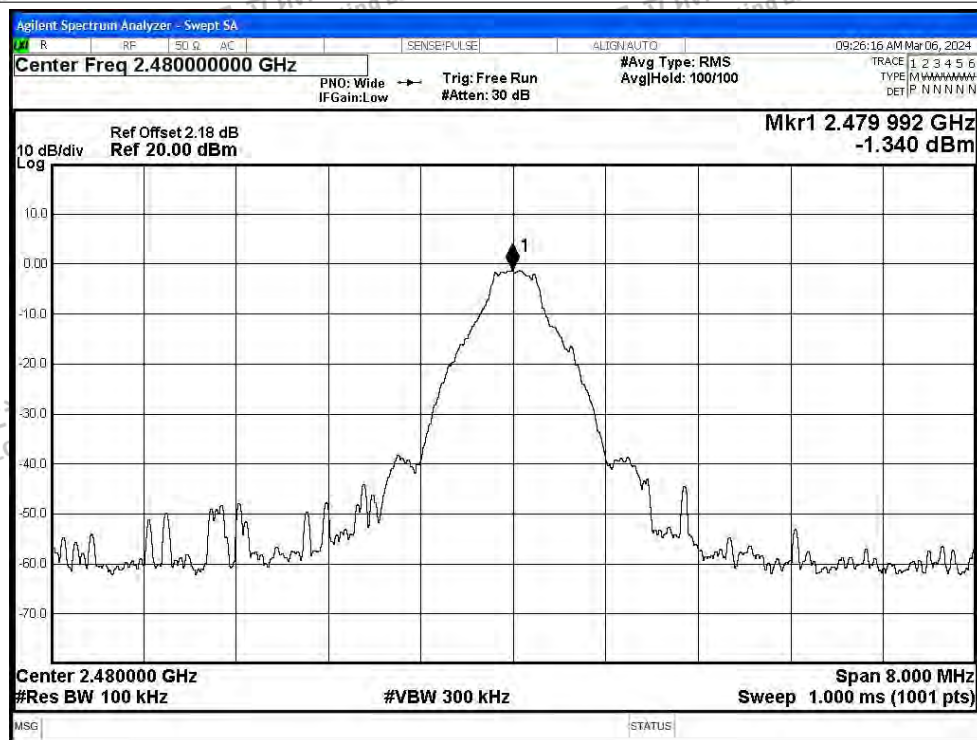


Band Edge NVNT 1-DH5 2480MHz Ant1 No-Hopping Emission

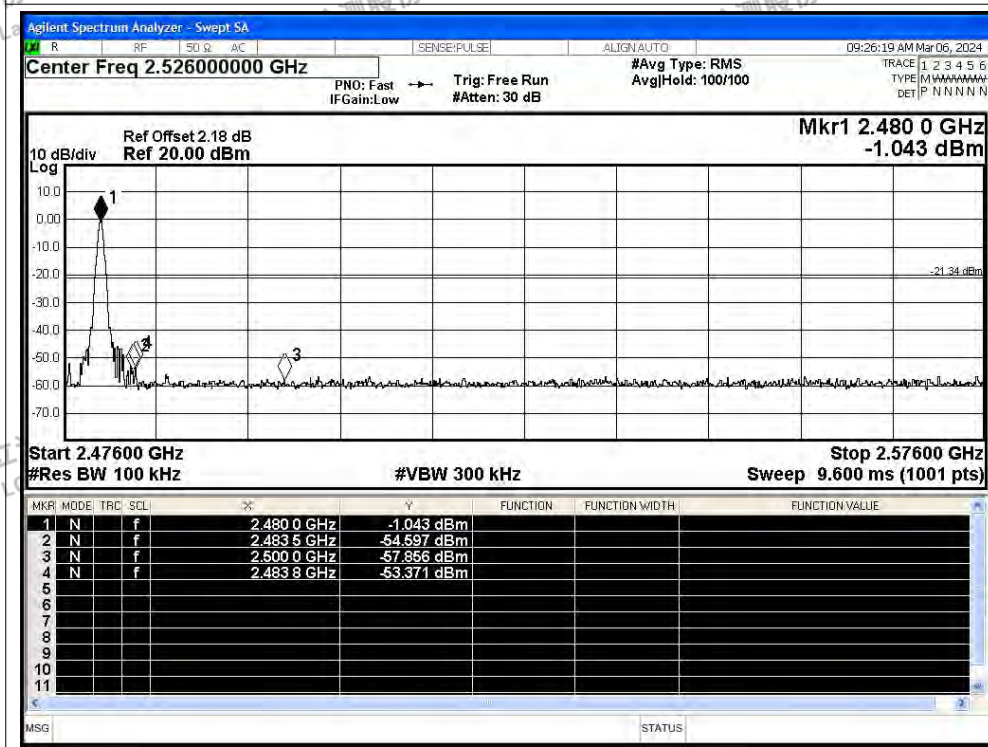


Band Edge NVNT 2-DH5 2402MHz Ant1 No-Hopping Ref

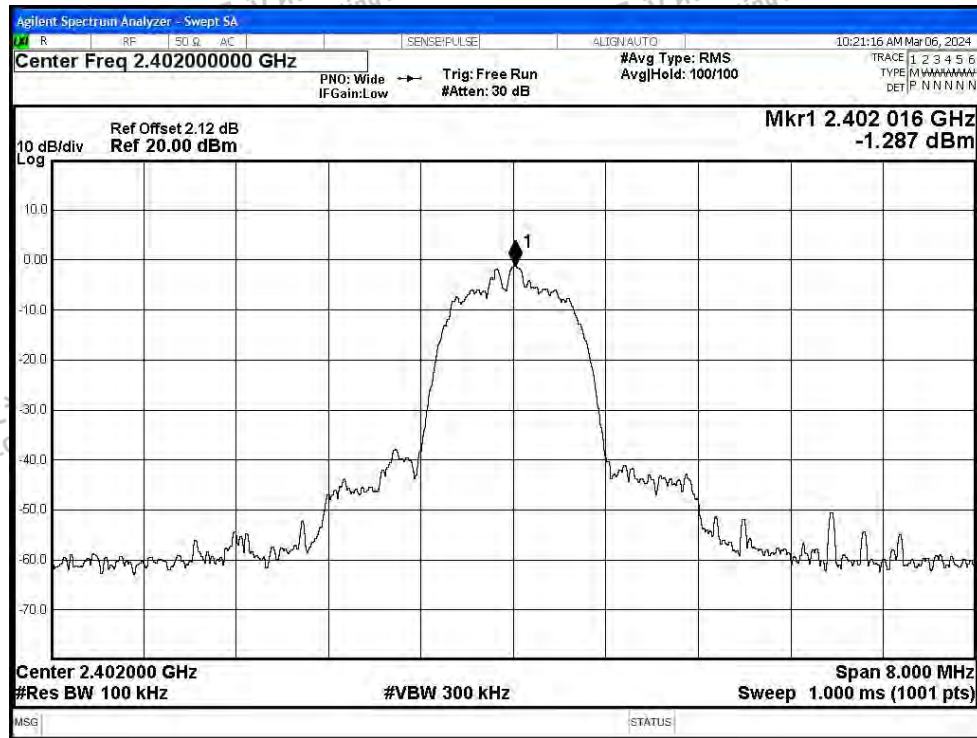


Band Edge NVNT 2-DH5 2402MHz Ant1 No-Hopping Emission

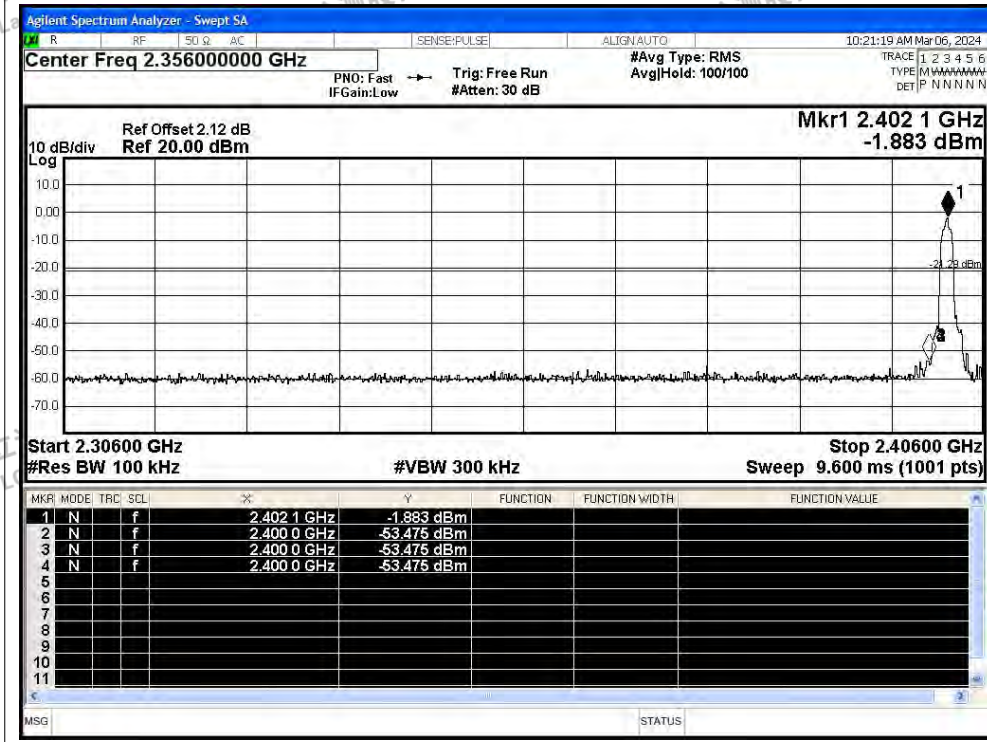


Band Edge NVNT 2-DH5 2480MHz Ant1 No-Hopping Ref

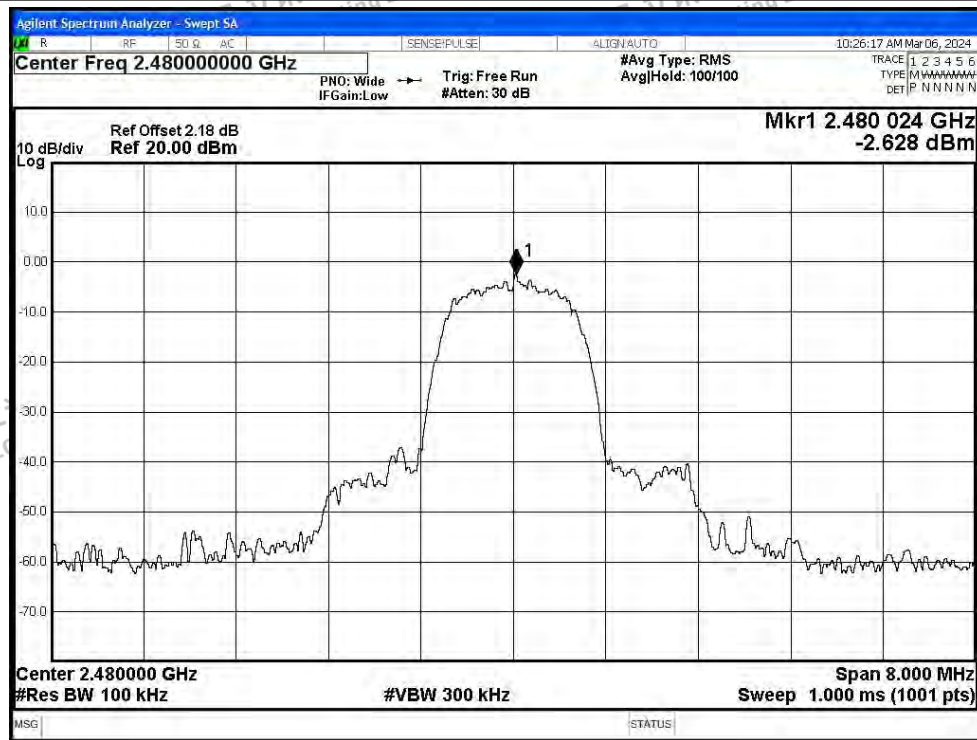


Band Edge NVNT 2-DH5 2480MHz Ant1 No-Hopping Emission

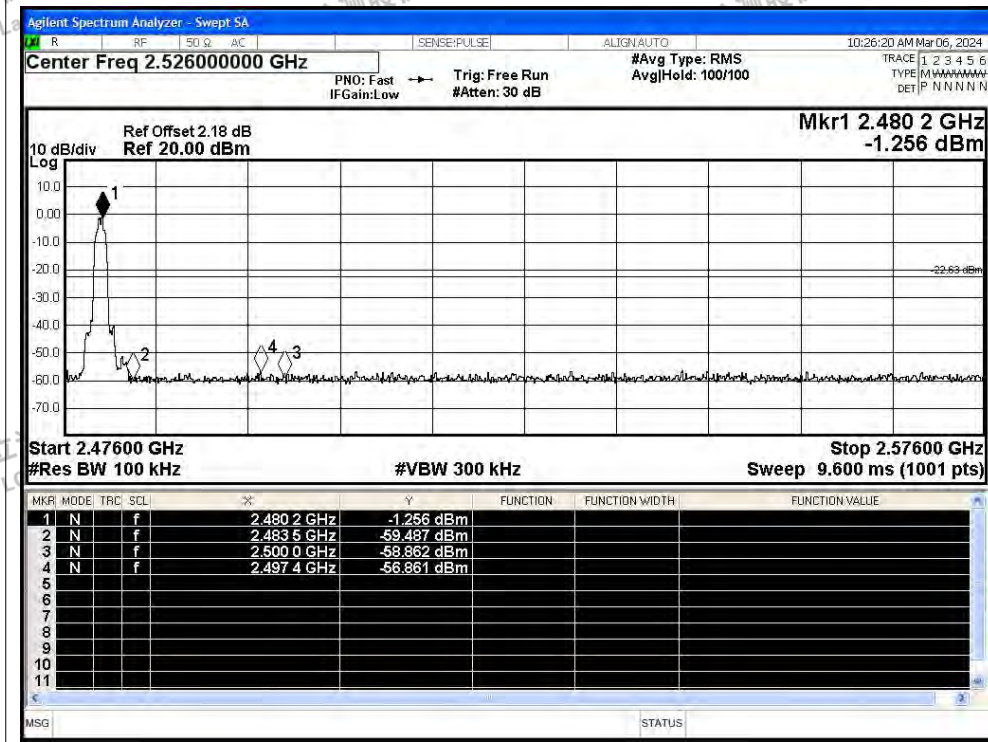


Band Edge NVNT 3-DH5 2402MHz Ant1 No-Hopping Ref

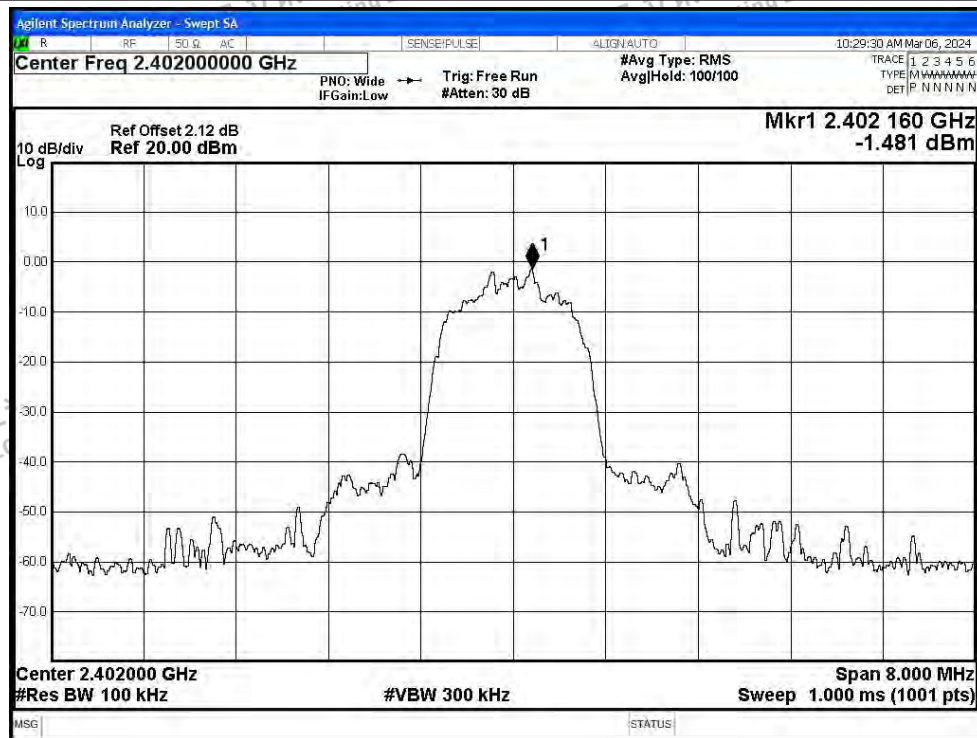


Band Edge NVNT 3-DH5 2402MHz Ant1 No-Hopping Emission

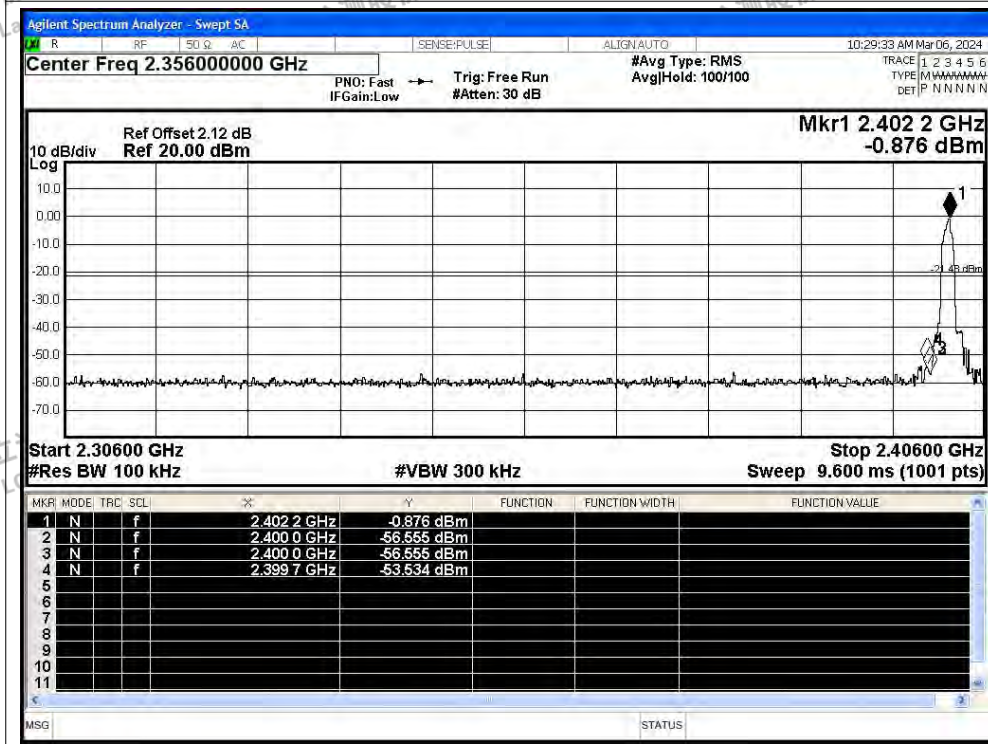

Band Edge NVNT 3-DH5 2480MHz Ant1 No-Hopping Ref

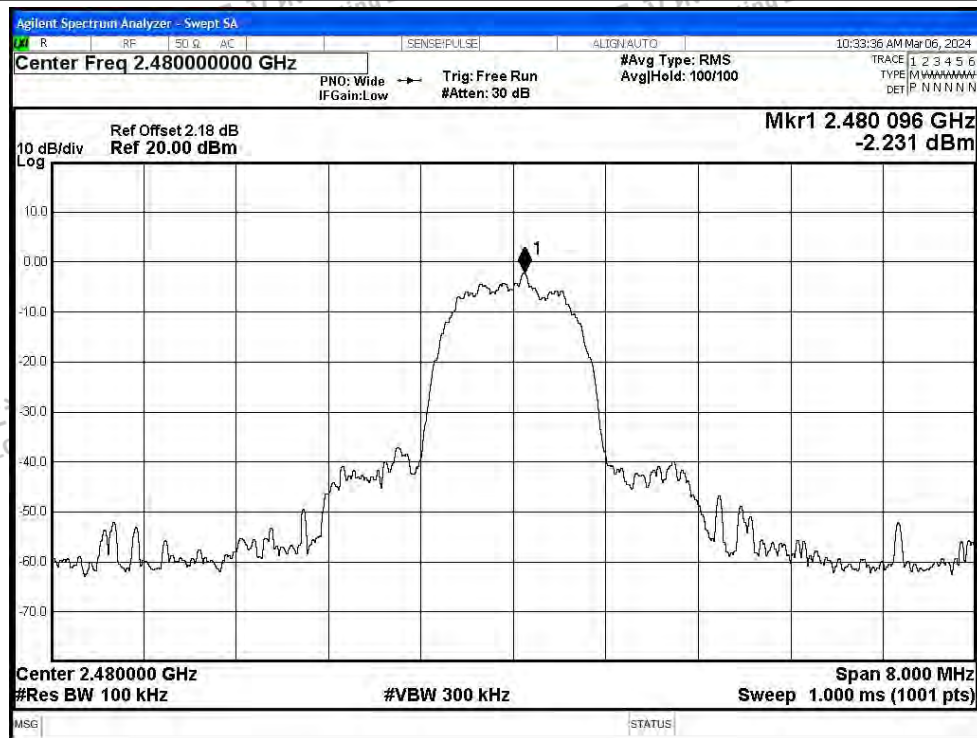

Band Edge NVNT 3-DH5 2480MHz Ant1 No-Hopping Emission

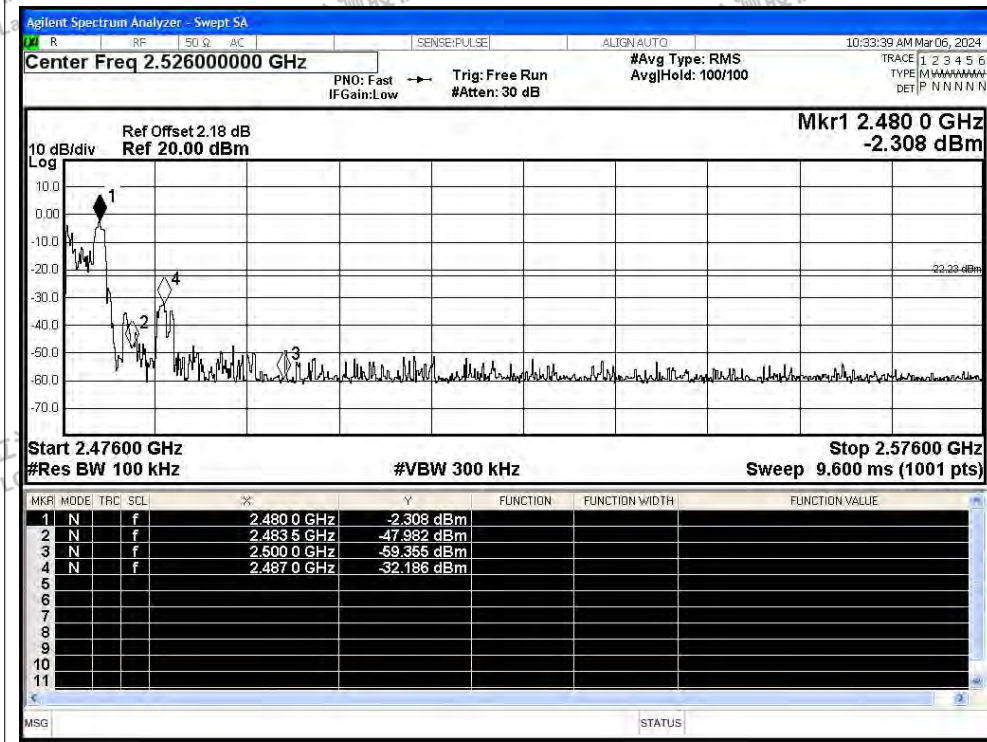



(Hopping)

| Condition | Mode  | Frequency (MHz) | Antenna | Hopping Mode | Max Value (dBc) | Limit (dBc) | Verdict |
|-----------|-------|-----------------|---------|--------------|-----------------|-------------|---------|
| NVNT      | 1-DH5 | 2402            | Ant1    | Hopping      | -49.24          | -20         | Pass    |
| NVNT      | 1-DH5 | 2480            | Ant1    | Hopping      | -56             | -20         | Pass    |
| NVNT      | 2-DH5 | 2402            | Ant1    | Hopping      | -53.35          | -20         | Pass    |
| NVNT      | 2-DH5 | 2480            | Ant1    | Hopping      | -53.89          | -20         | Pass    |
| NVNT      | 3-DH5 | 2402            | Ant1    | Hopping      | -54.92          | -20         | Pass    |
| NVNT      | 3-DH5 | 2480            | Ant1    | Hopping      | -53.52          | -20         | Pass    |







LCSA2274006EA

## Test Graphs

## Band Edge(Hopping) NVNT 1-DH5 2402MHz Ant1 Hopping Ref

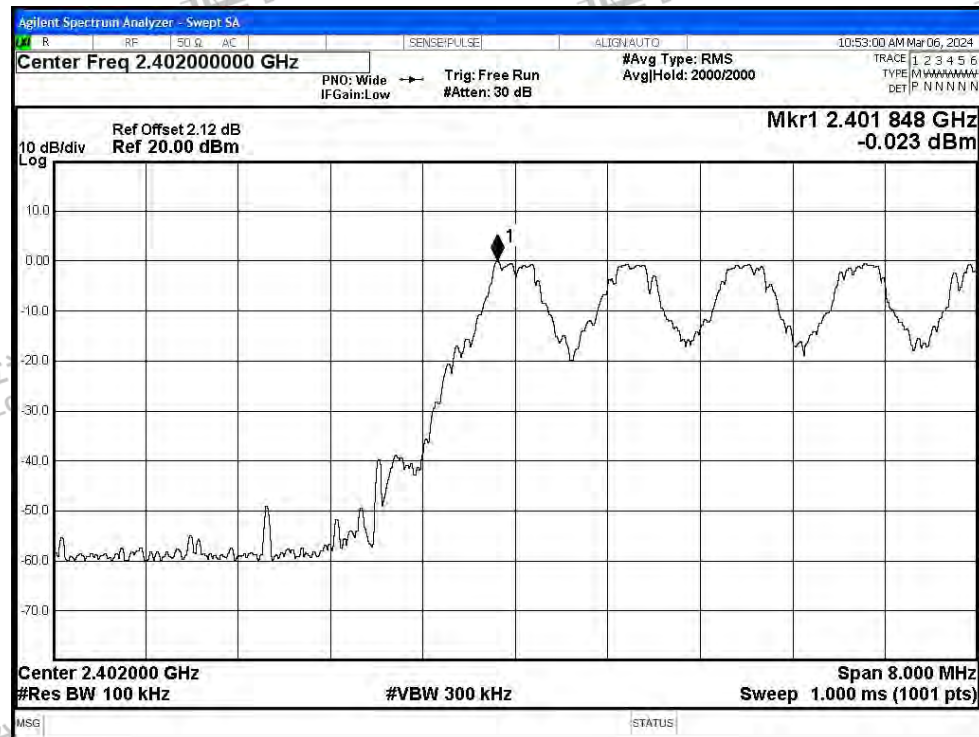

## Band Edge(Hopping) NVNT 1-DH5 2402MHz Ant1 Hopping Emission

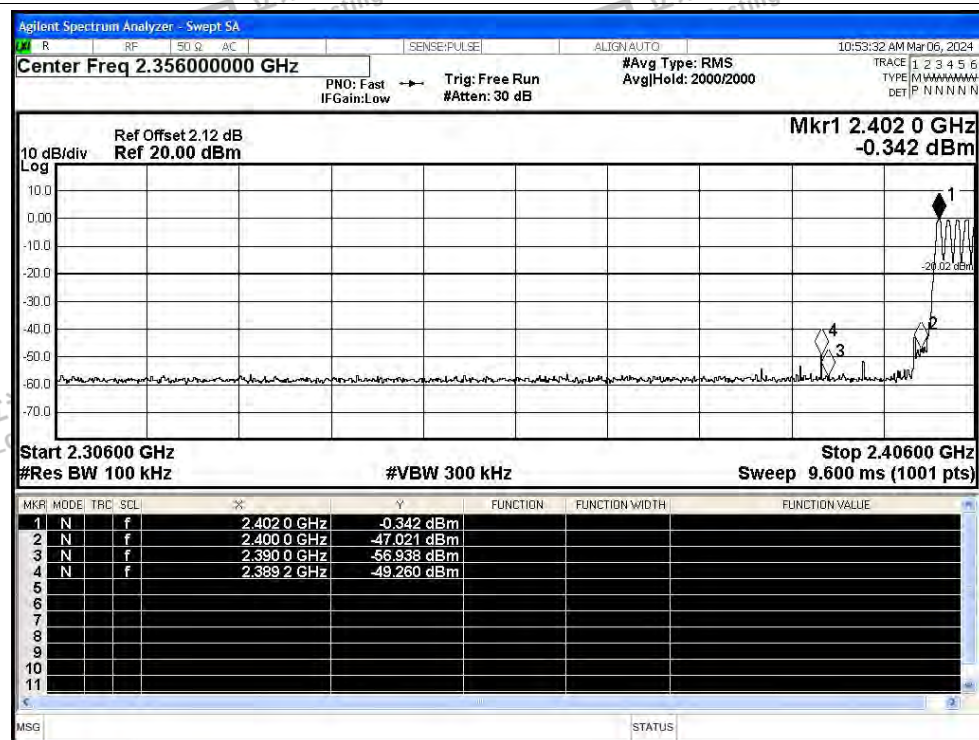

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




LCSA2274006EA


## Band Edge(Hopping) NVNT 1-DH5 2480MHz Ant1 Hopping Ref

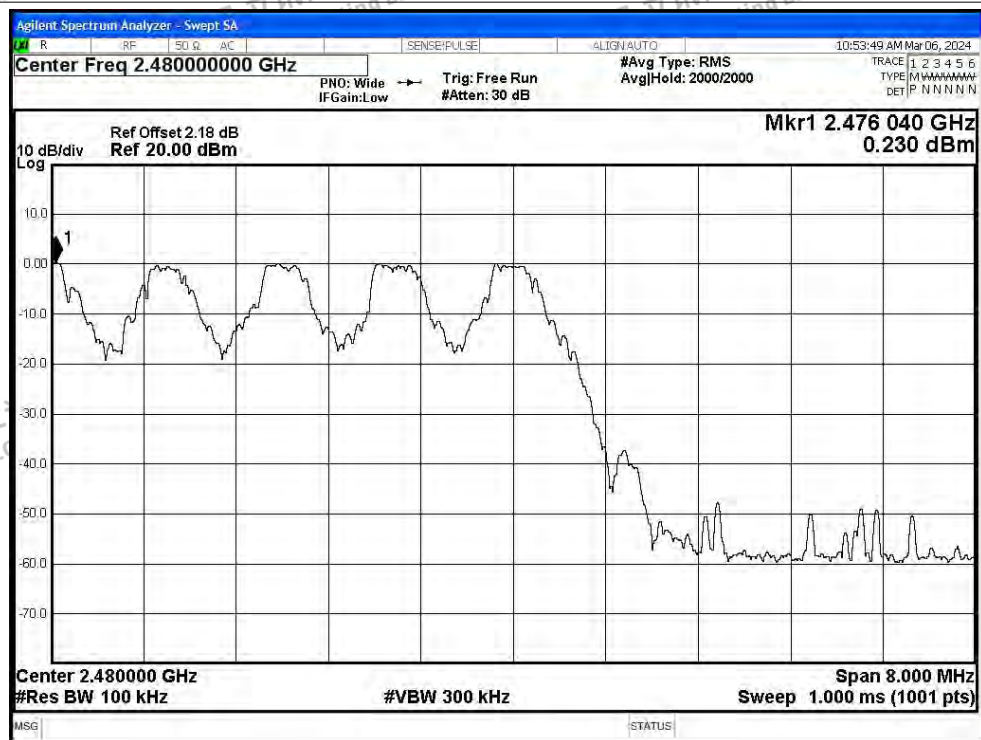


## Band Edge(Hopping) NVNT 1-DH5 2480MHz Ant1 Hopping Emission

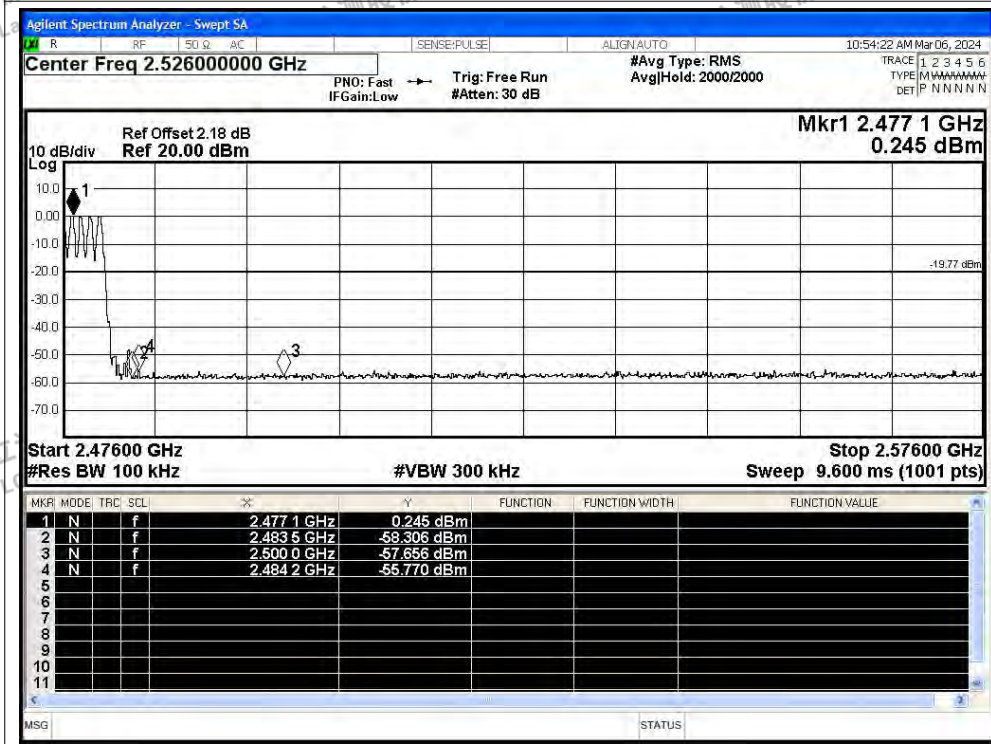

Band Edge(Hopping) NVNT 2-DH5 2402MHz Ant1 Hopping Ref

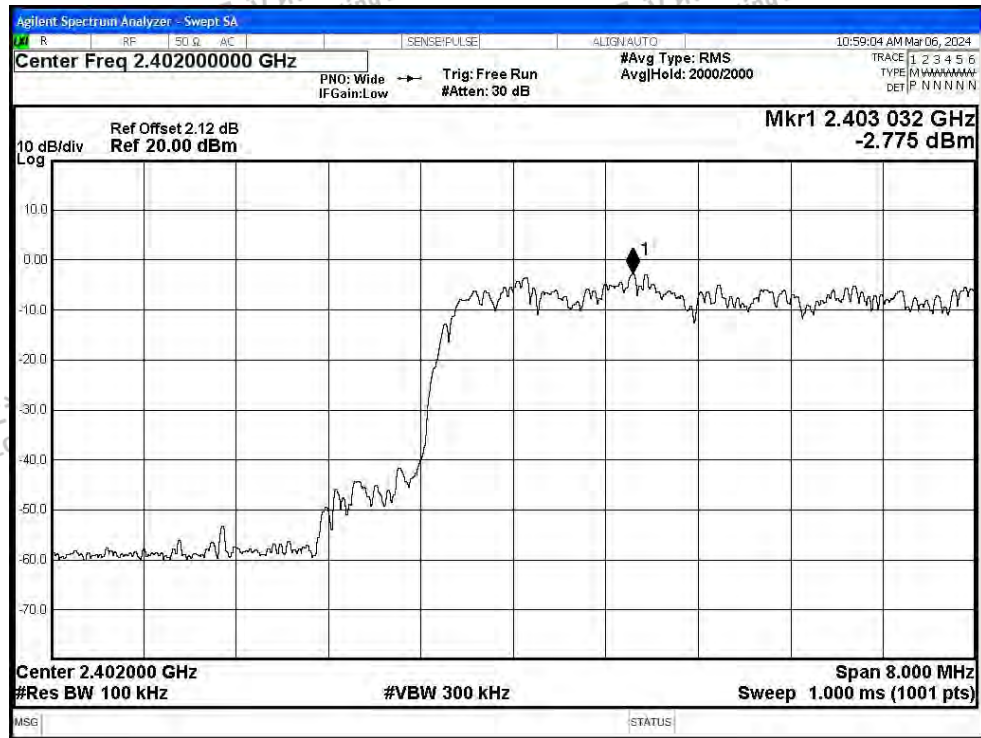


Band Edge(Hopping) NVNT 2-DH5 2402MHz Ant1 Hopping Emission

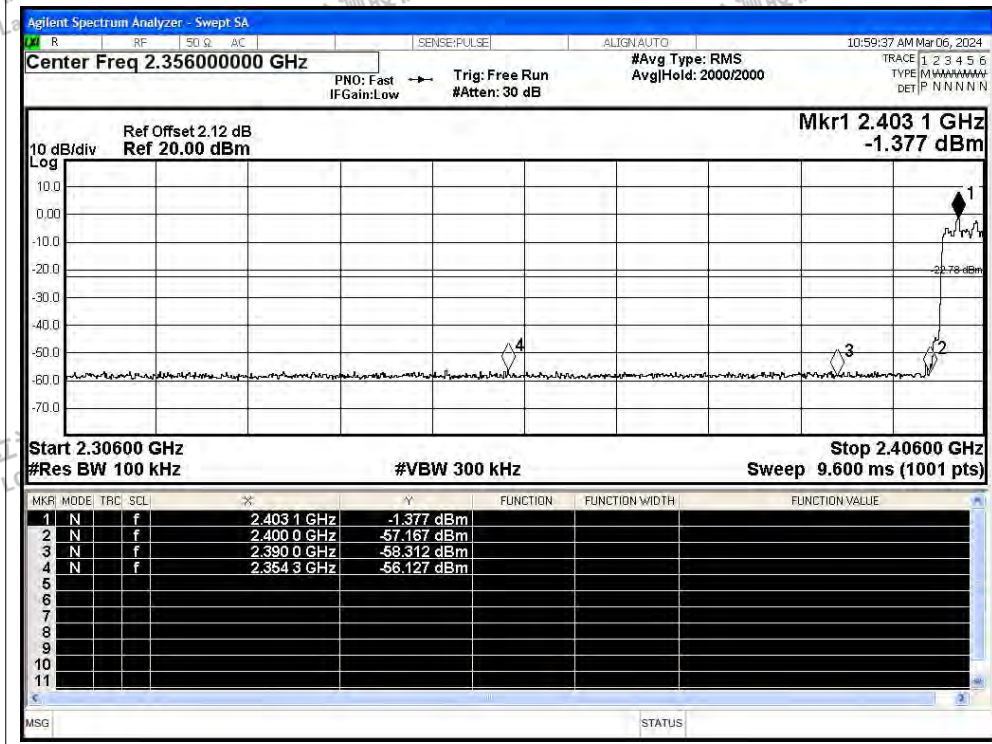




LCSA2274006EA

## Band Edge(Hopping) NVNT 2-DH5 2480MHz Ant1 Hopping Ref

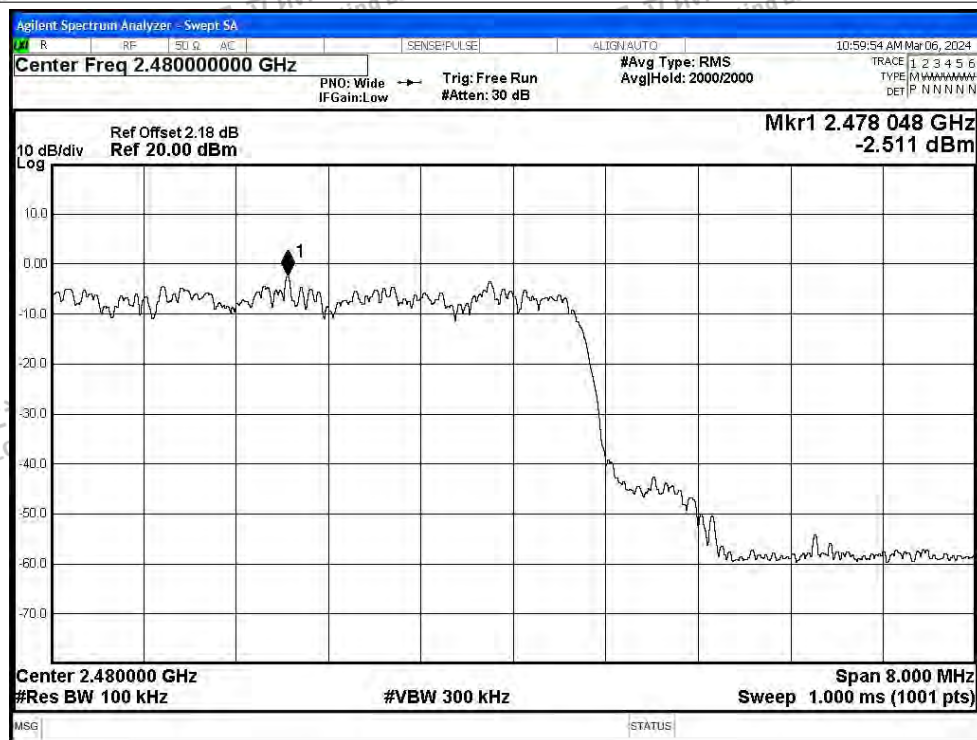

## Band Edge(Hopping) NVNT 2-DH5 2480MHz Ant1 Hopping Emission

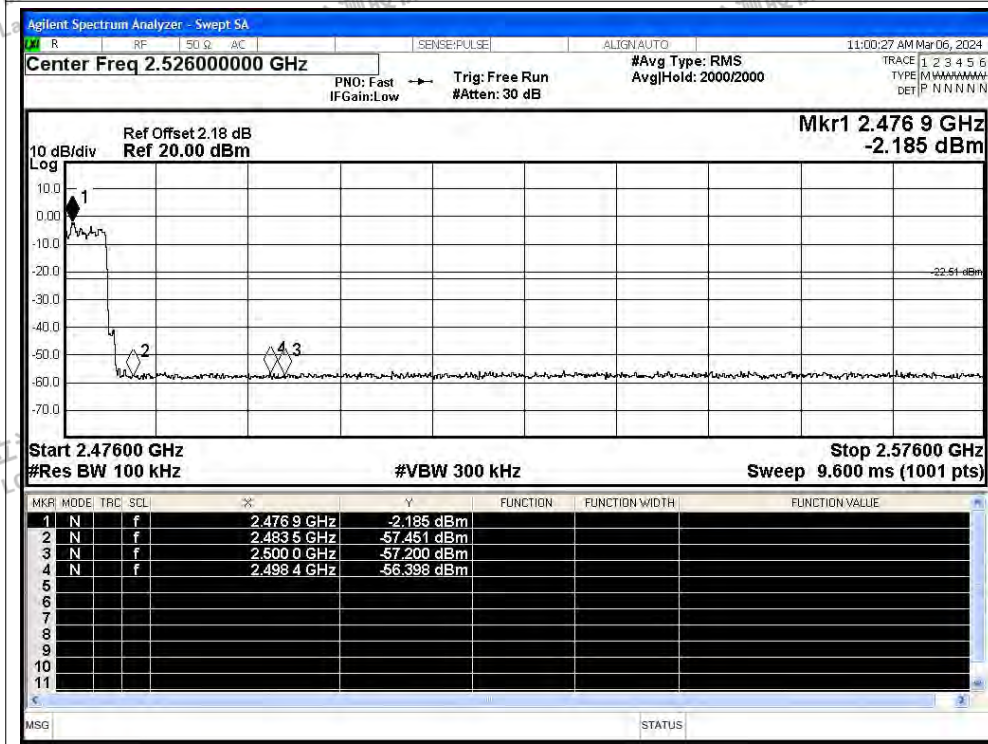




LCSA2274006EA

## Band Edge(Hopping) NVNT 3-DH5 2402MHz Ant1 Hopping Ref




## Band Edge(Hopping) NVNT 3-DH5 2402MHz Ant1 Hopping Emission

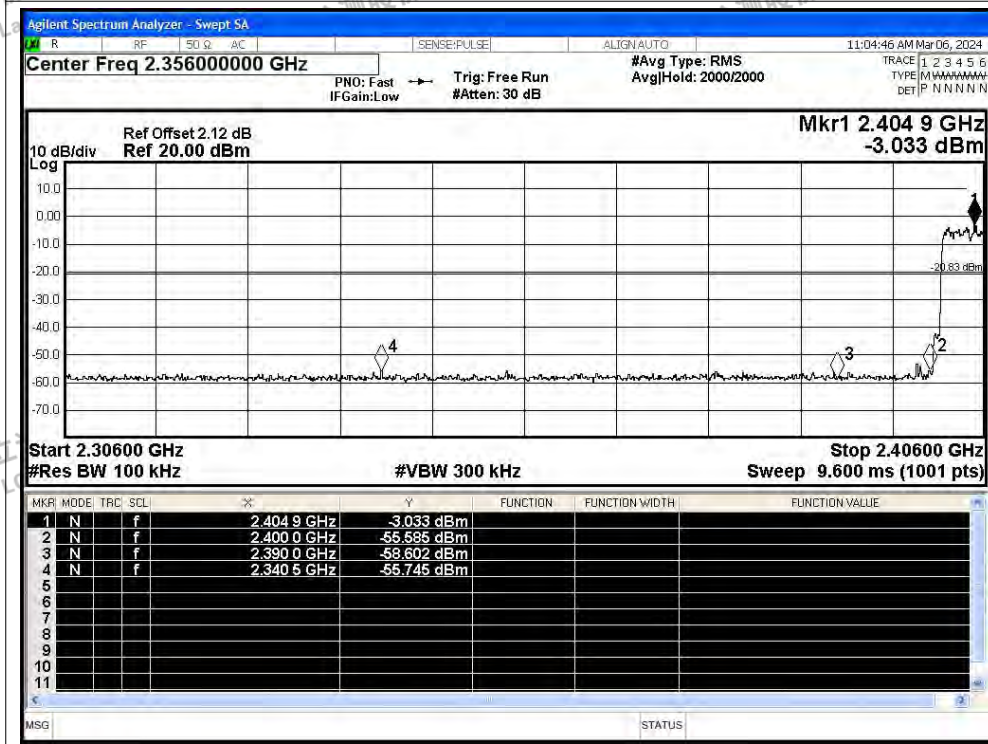




LCSA2274006EA

## Band Edge(Hopping) NVNT 3-DH5 2480MHz Ant1 Hopping Ref

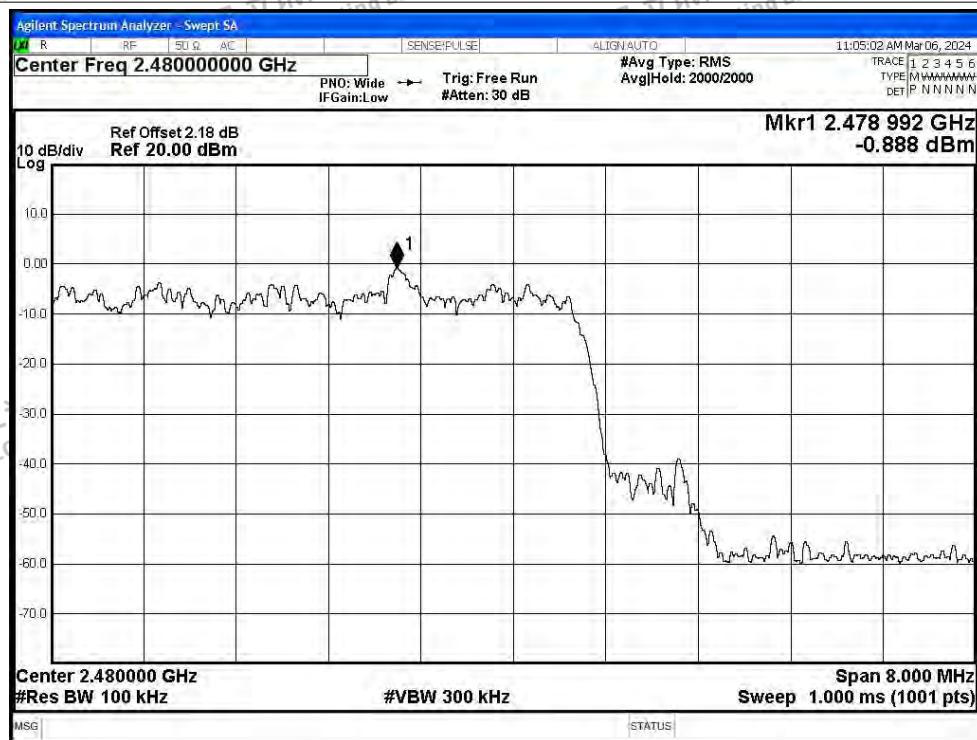

## Band Edge(Hopping) NVNT 3-DH5 2480MHz Ant1 Hopping Emission

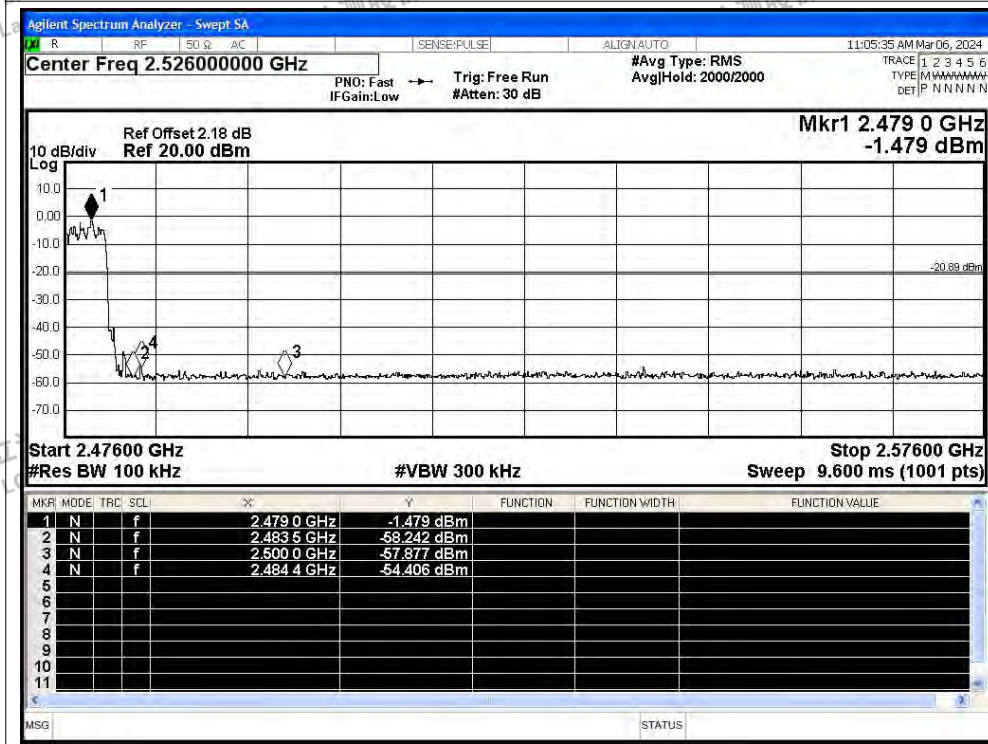



LCSA2274006EA

## A.7 Conducted RF Spurious Emission

| Condition | Mode  | Frequency (MHz) | Antenna | Max Value (dBc) | Limit (dBc) | Verdict |
|-----------|-------|-----------------|---------|-----------------|-------------|---------|
| NVNT      | 1-DH5 | 2402            | Ant1    | -53.6           | -20         | Pass    |
| NVNT      | 1-DH5 | 2441            | Ant1    | -55.12          | -20         | Pass    |
| NVNT      | 1-DH5 | 2480            | Ant1    | -55.37          | -20         | Pass    |
| NVNT      | 2-DH5 | 2402            | Ant1    | -53.75          | -20         | Pass    |
| NVNT      | 2-DH5 | 2441            | Ant1    | -53.99          | -20         | Pass    |
| NVNT      | 2-DH5 | 2480            | Ant1    | -53.68          | -20         | Pass    |
| NVNT      | 3-DH5 | 2402            | Ant1    | -53.15          | -20         | Pass    |
| NVNT      | 3-DH5 | 2441            | Ant1    | -54.6           | -20         | Pass    |
| NVNT      | 3-DH5 | 2480            | Ant1    | -53.48          | -20         | Pass    |




Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity




LCSA2274006EA

## Test Graphs

Tx: Spurious NVNT 1-DH5 2402MHz Ant1 Ref

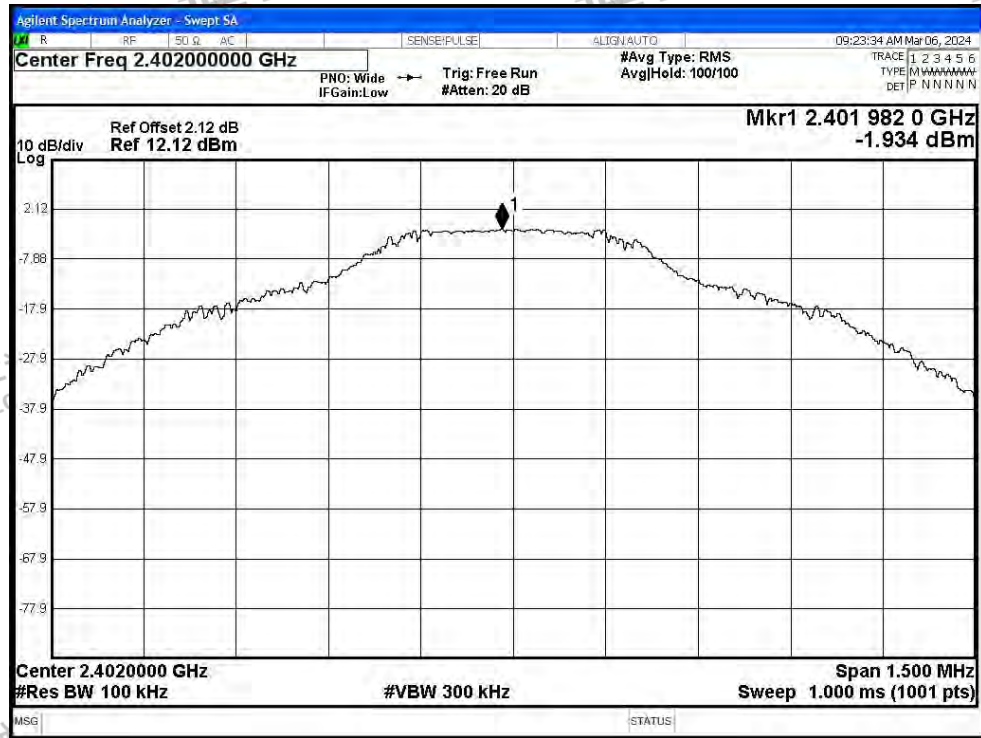

Tx: Spurious NVNT 1-DH5 2402MHz Ant1 Emission

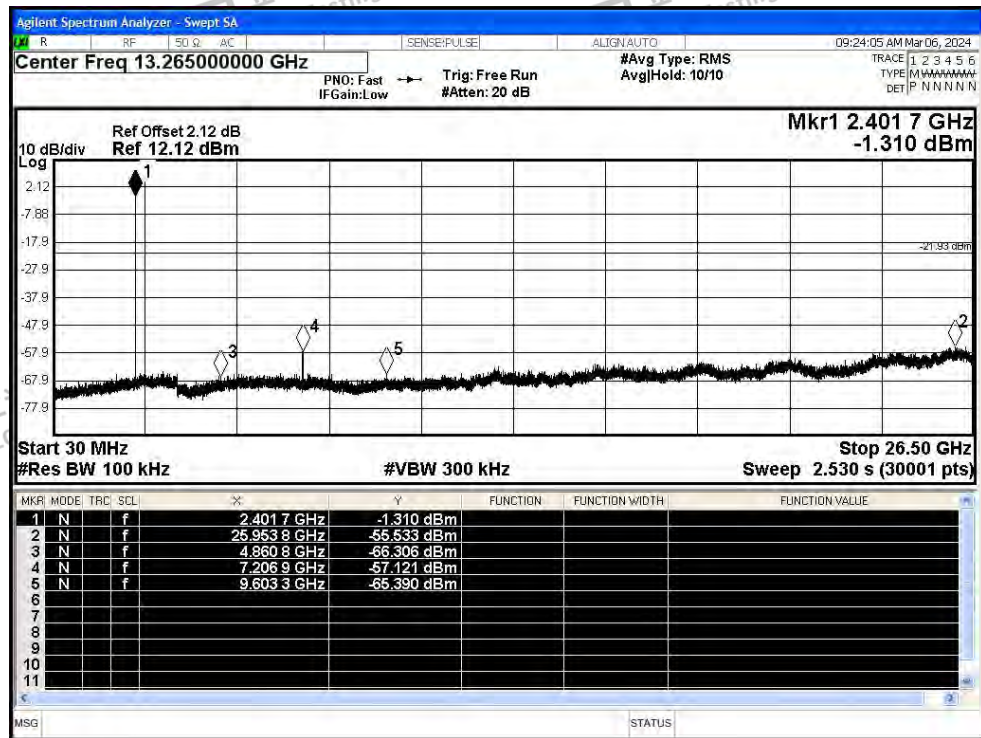

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity


Tx. Spurious NVNT 1-DH5 2441MHz Ant1 Ref




Tx. Spurious NVNT 1-DH5 2441MHz Ant1 Emission

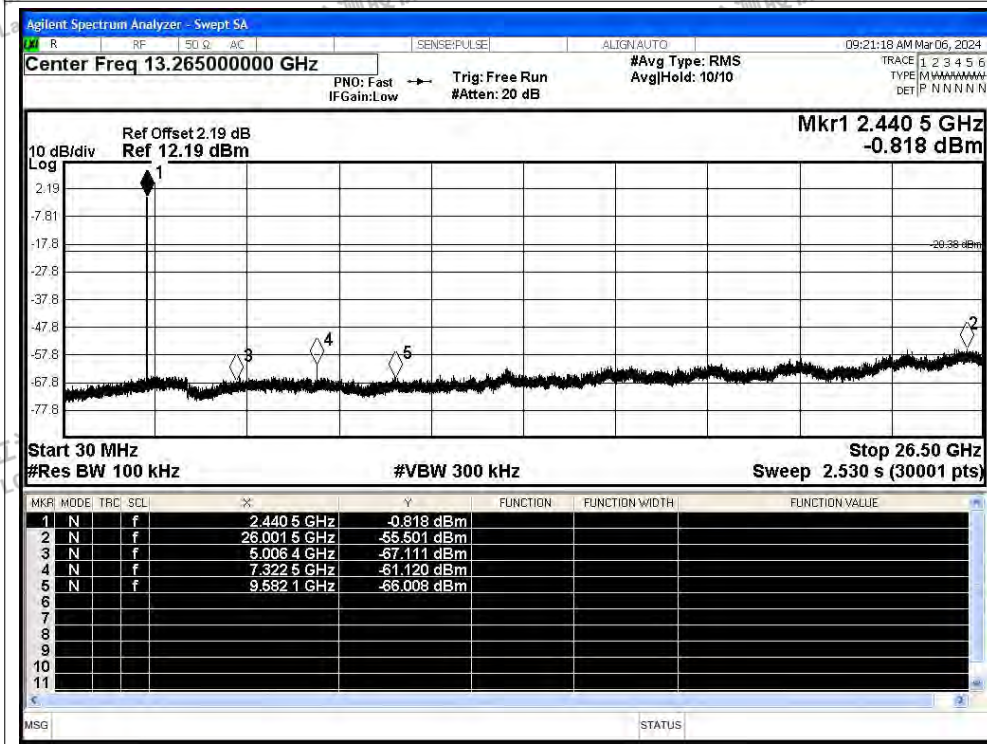

Tx. Spurious NVNT 1-DH5 2480MHz Ant1 Ref

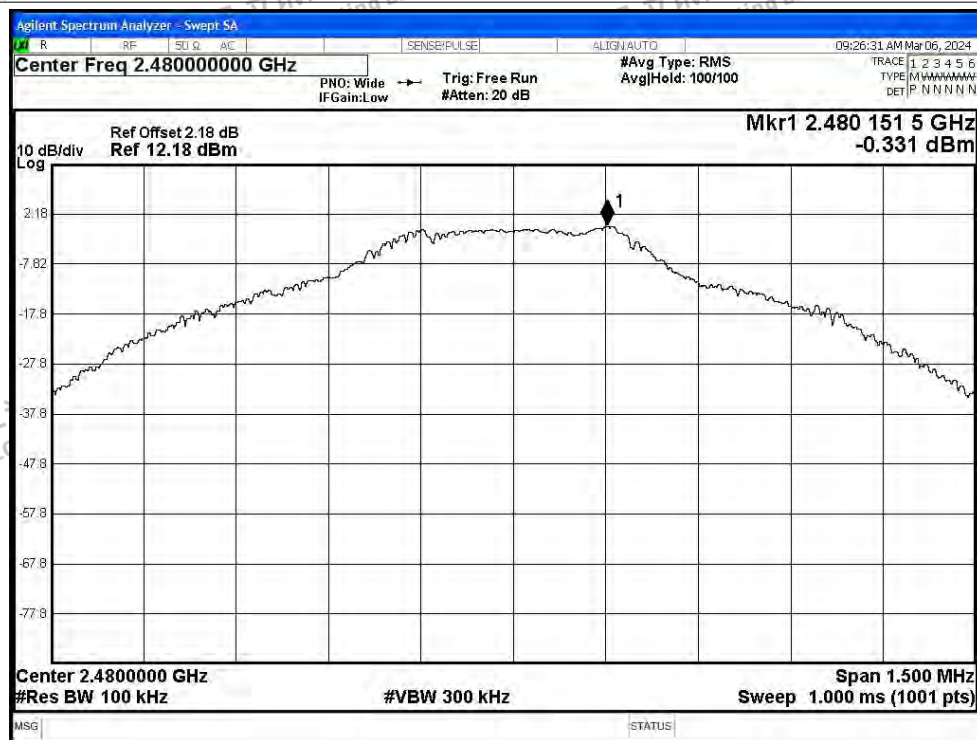


Tx. Spurious NVNT 1-DH5 2480MHz Ant1 Emission

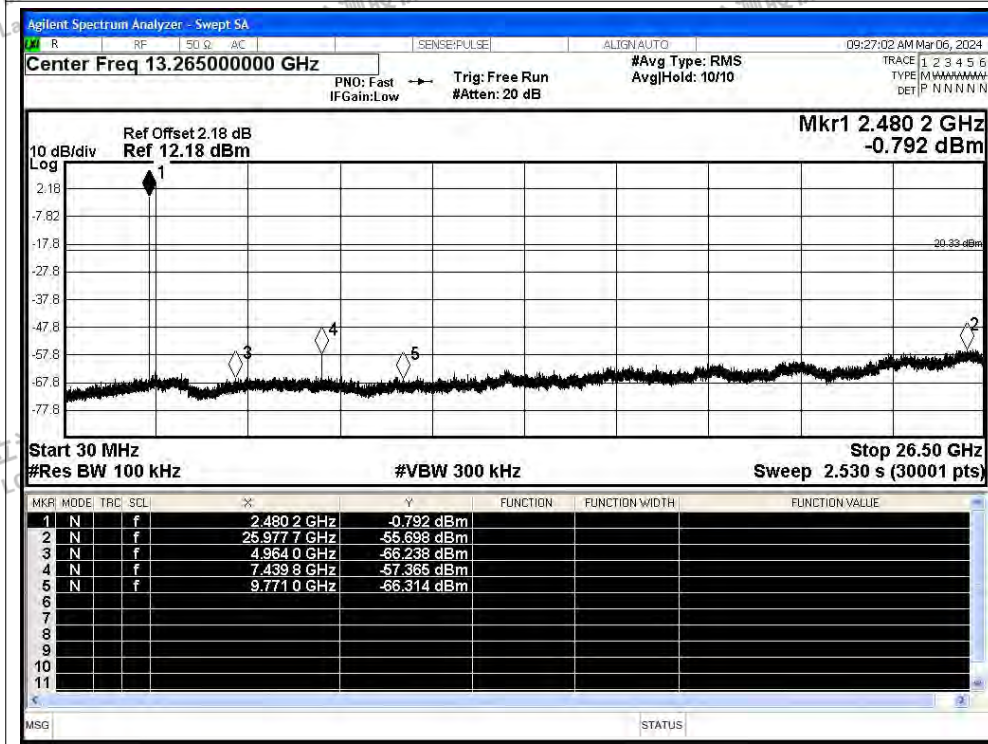




LCSA2274006EA


Tx. Spurious NVNT 2-DH5 2402MHz Ant1 Ref

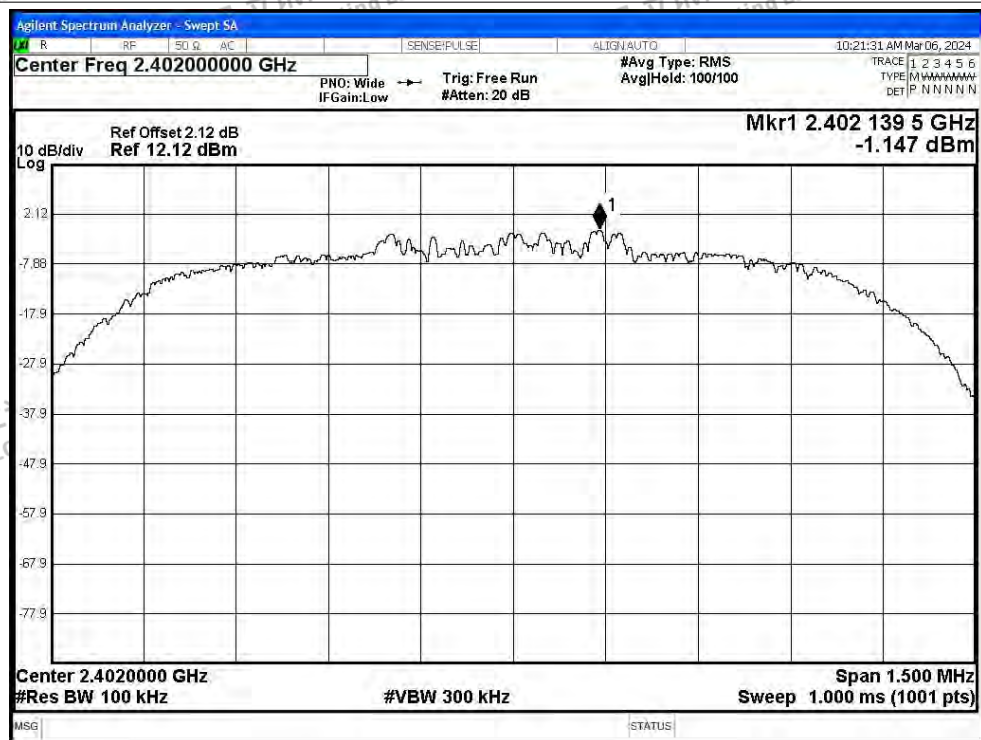


Tx. Spurious NVNT 2-DH5 2402MHz Ant1 Emission

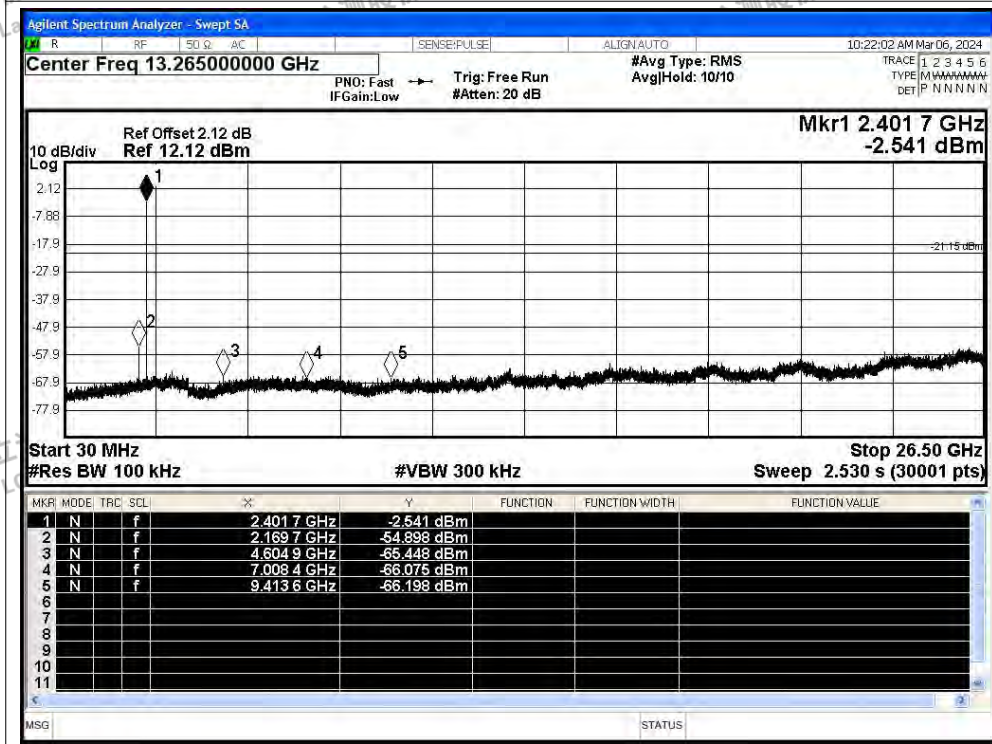


Tx. Spurious NVNT 2-DH5 2441MHz Ant1 Ref

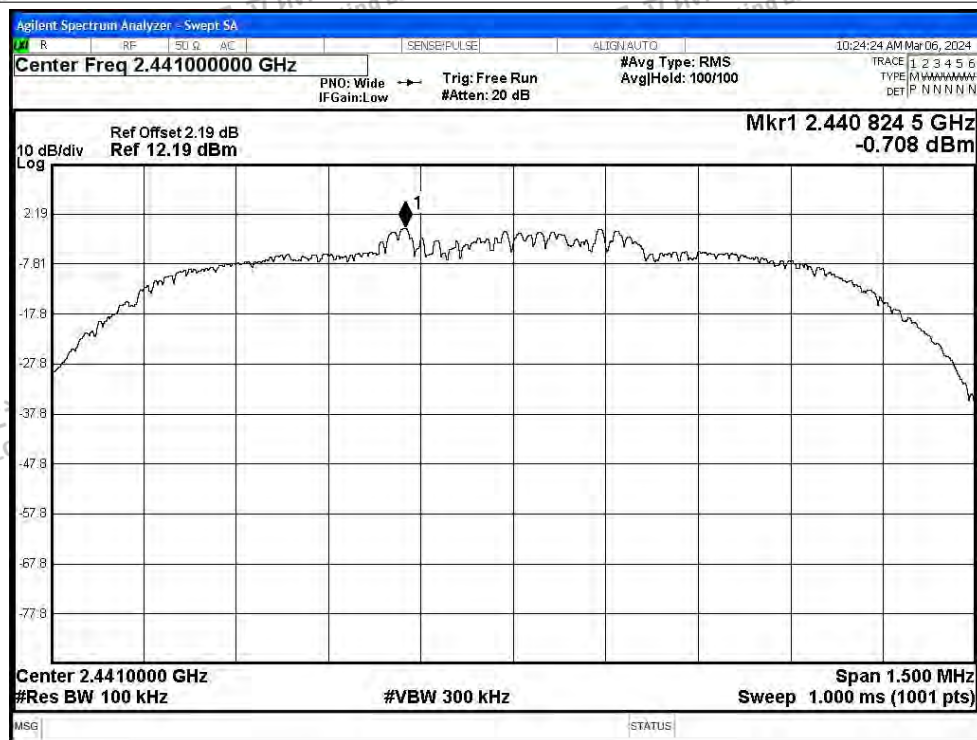


Tx. Spurious NVNT 2-DH5 2441MHz Ant1 Emission

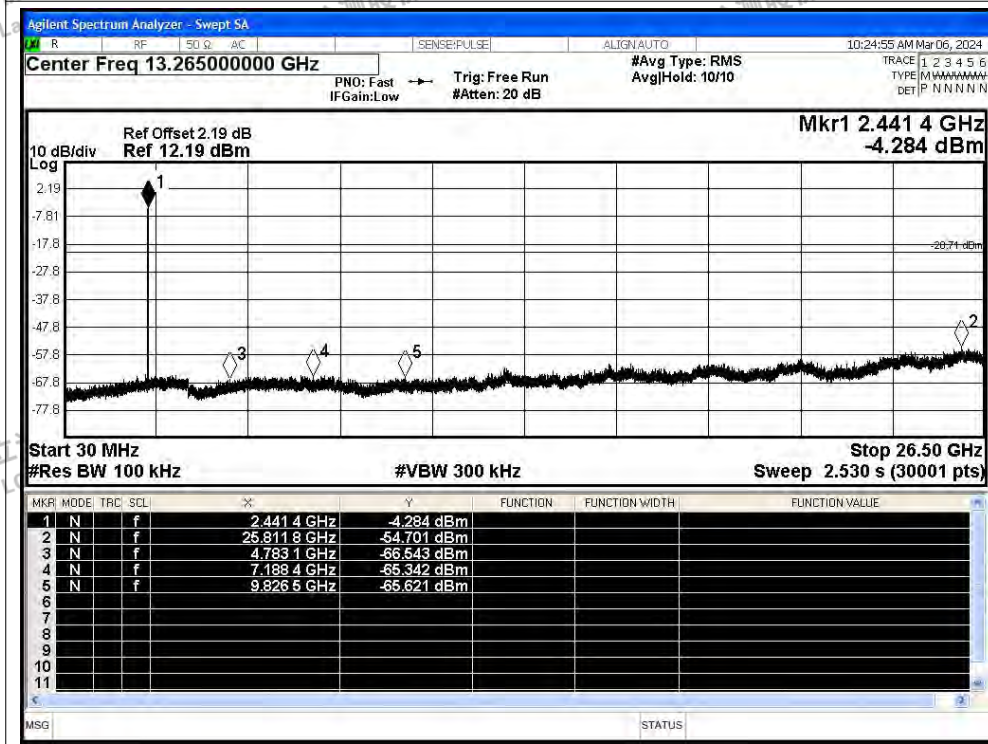

Tx. Spurious NVNT 2-DH5 2480MHz Ant1 Ref

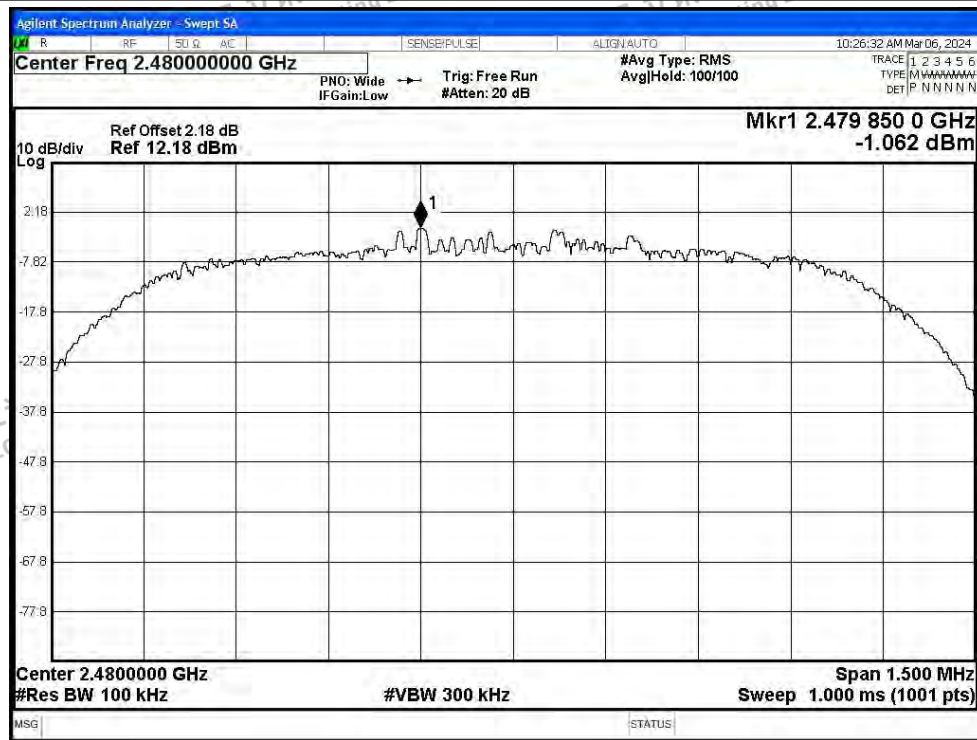


Tx. Spurious NVNT 2-DH5 2480MHz Ant1 Emission

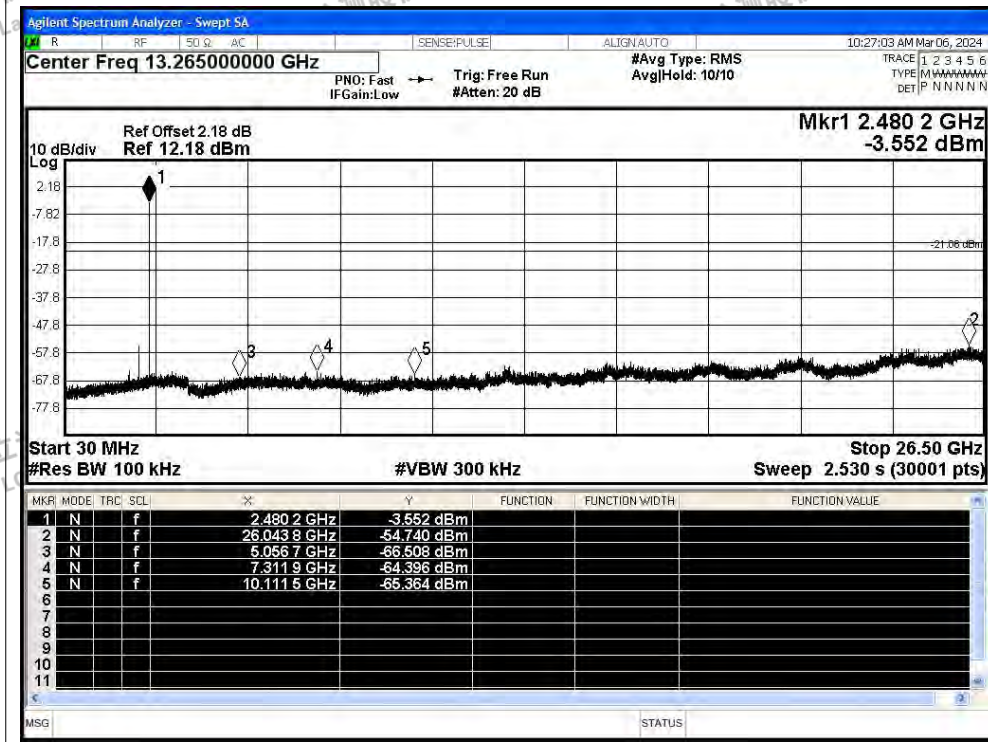




LCSA2274006EA

Tx. Spurious NVNT 3-DH5 2402MHz Ant1 Ref

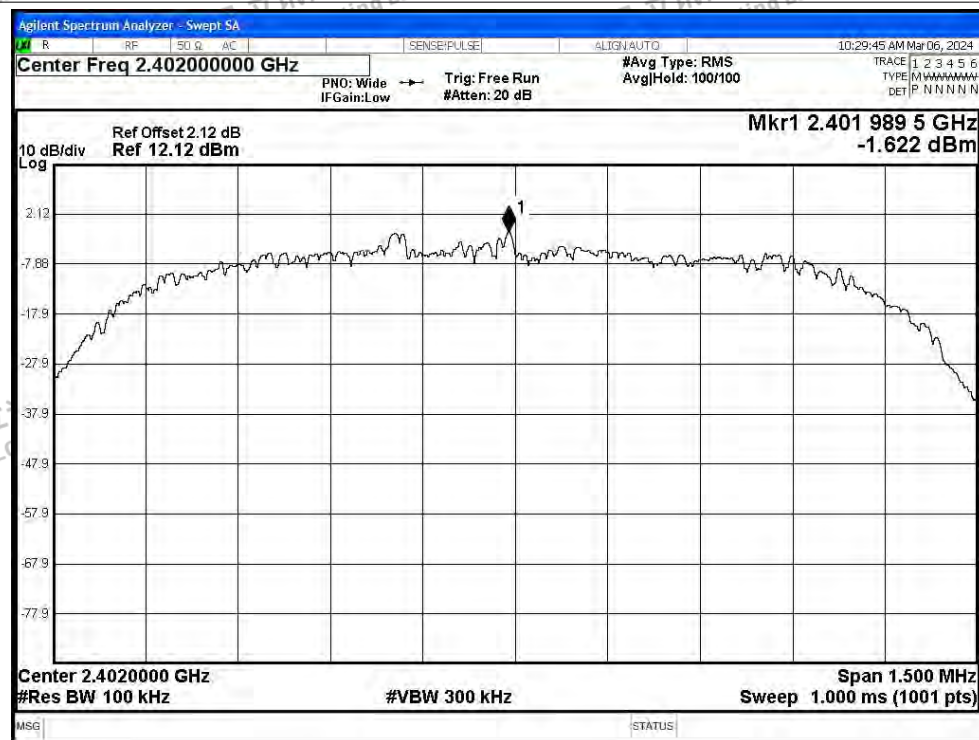


Tx. Spurious NVNT 3-DH5 2402MHz Ant1 Emission

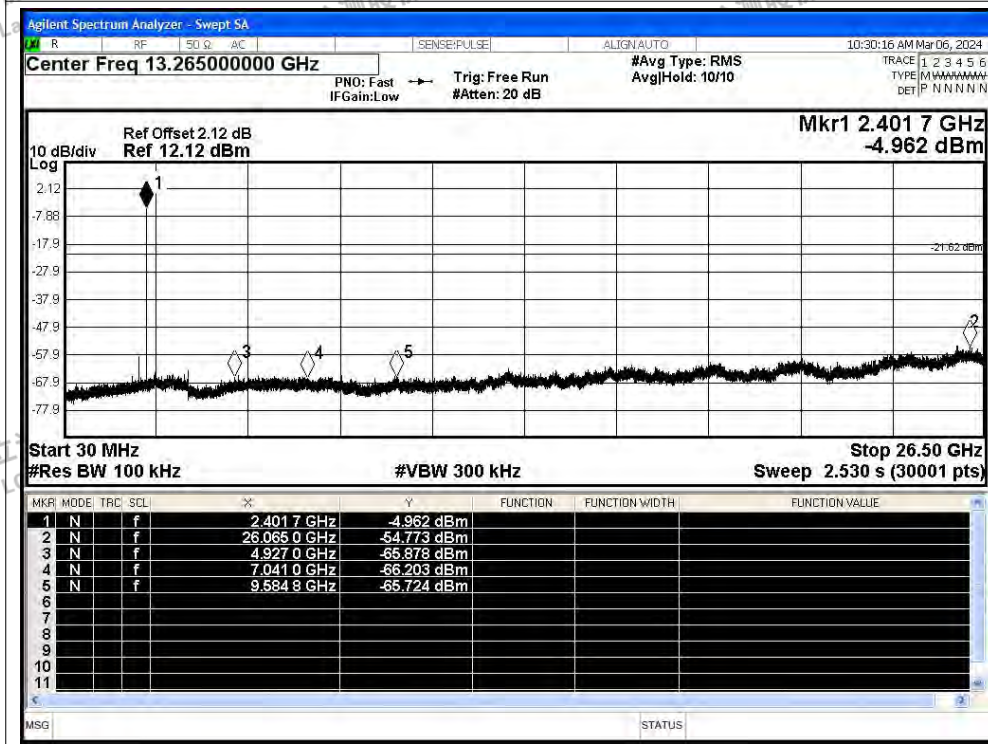




LCSA2274006EA

Tx. Spurious NVNT 3-DH5 2441MHz Ant1 Ref

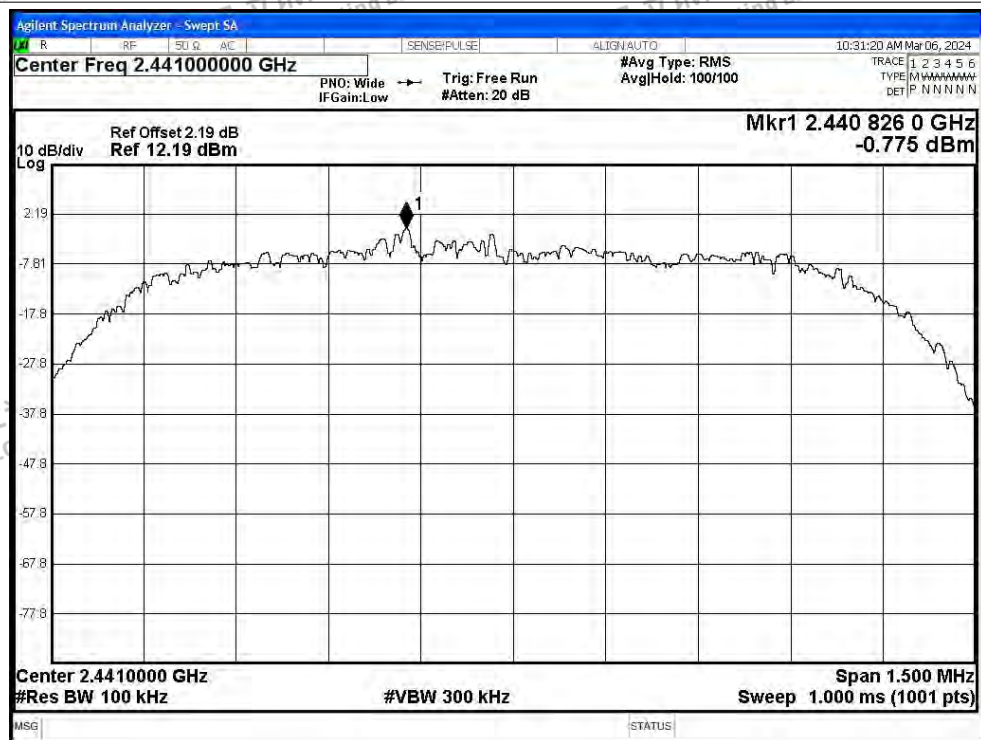

Tx. Spurious NVNT 3-DH5 2441MHz Ant1 Emission

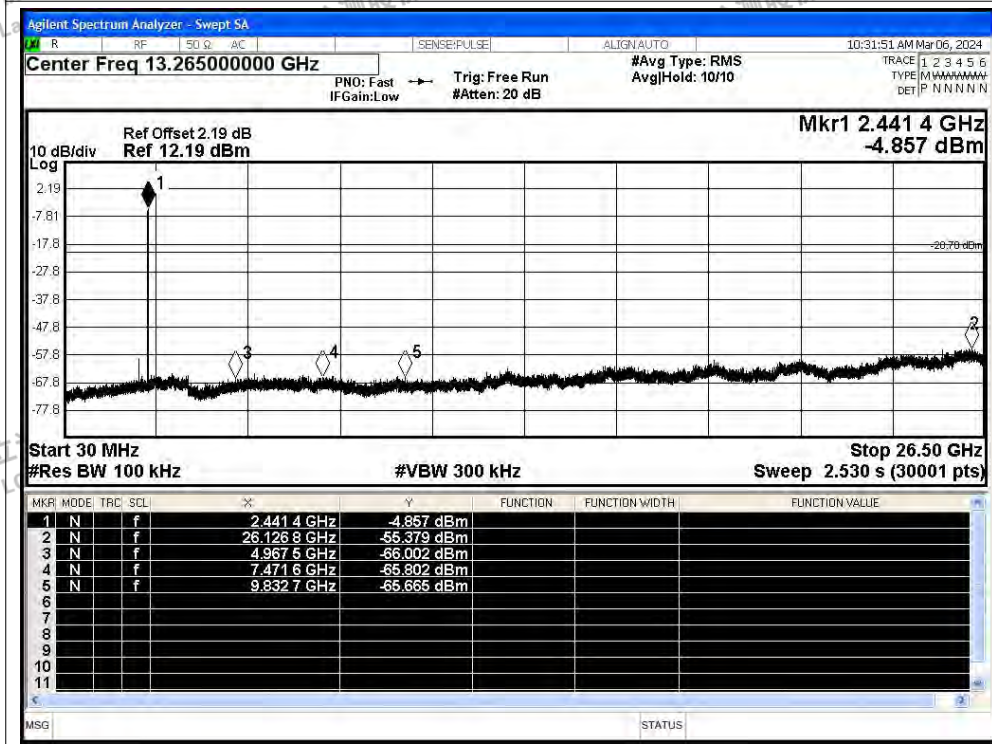


Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Tx. Spurious NVNT 3-DH5 2480MHz Ant1 Ref

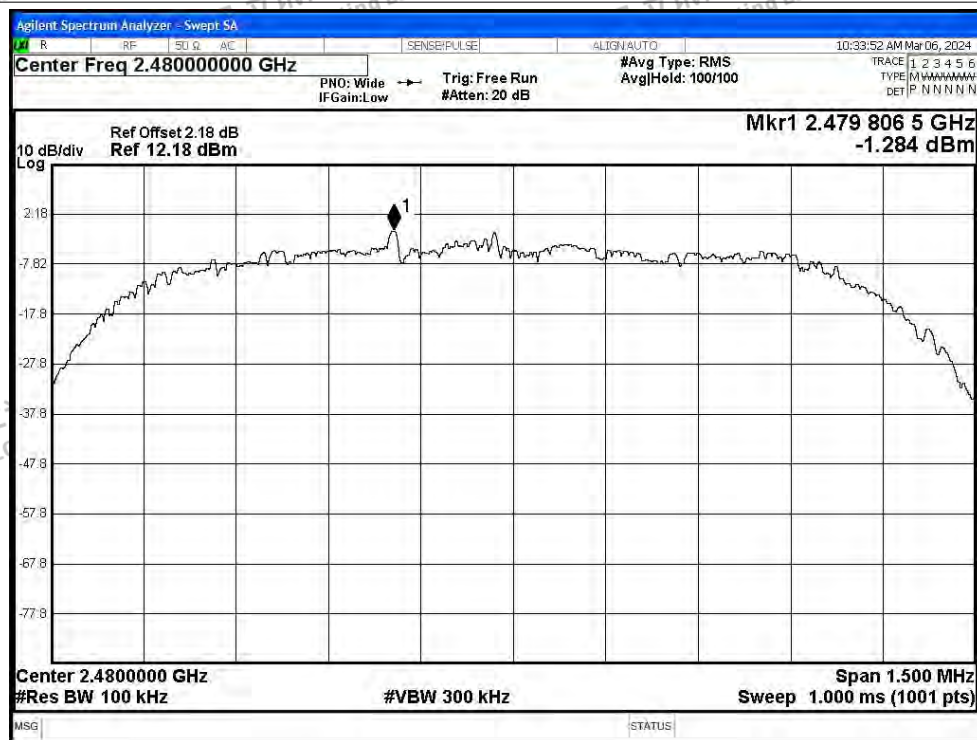

Tx. Spurious NVNT 3-DH5 2480MHz Ant1 Emission

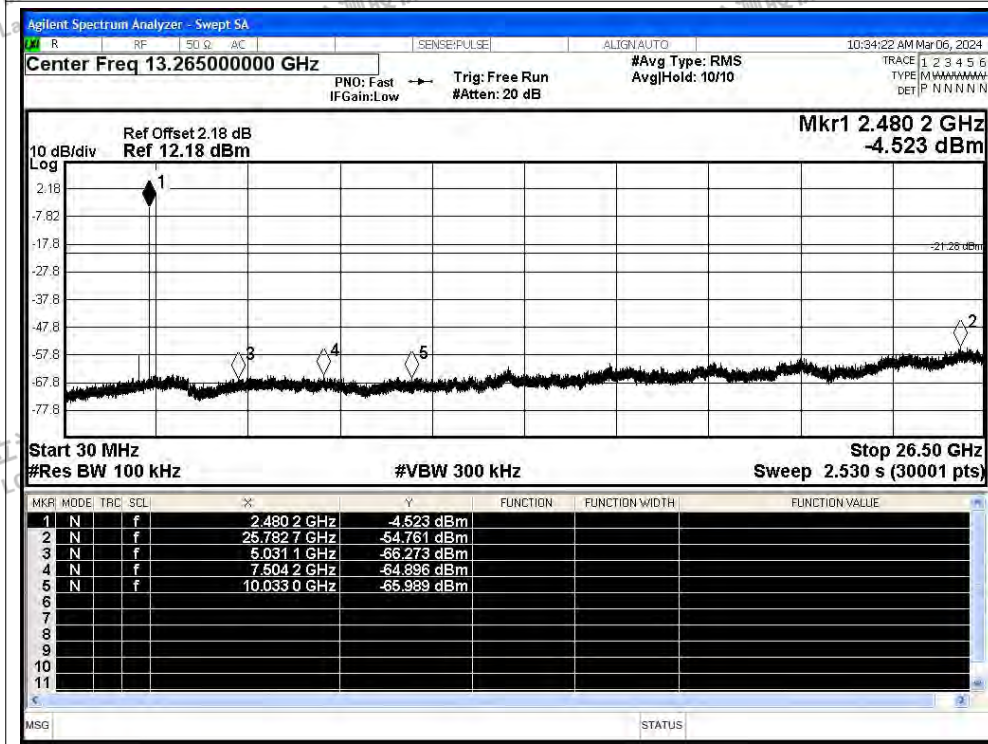



LCSA2274006EA

## A.8 Duty Cycle

| Condition | Mode  | Frequency (MHz) | Antenna | Duty Cycle (%) | Correction Factor (dB) | 1/T (kHz) |
|-----------|-------|-----------------|---------|----------------|------------------------|-----------|
| NVNT      | 1-DH5 | 2402            | Ant1    | 76.88          | 1.14                   | 0.35      |
| NVNT      | 1-DH5 | 2441            | Ant1    | 76.91          | 1.14                   | 0.35      |
| NVNT      | 1-DH5 | 2480            | Ant1    | 76.91          | 1.14                   | 0.35      |
| NVNT      | 2-DH5 | 2402            | Ant1    | 77.01          | 1.13                   | 0.35      |
| NVNT      | 2-DH5 | 2441            | Ant1    | 76.96          | 1.14                   | 0.35      |
| NVNT      | 2-DH5 | 2480            | Ant1    | 76.96          | 1.14                   | 0.35      |
| NVNT      | 3-DH5 | 2402            | Ant1    | 77.04          | 1.13                   | 0.35      |
| NVNT      | 3-DH5 | 2441            | Ant1    | 77.04          | 1.13                   | 0.35      |
| NVNT      | 3-DH5 | 2480            | Ant1    | 77.01          | 1.13                   | 0.35      |




Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity




LCSA2274006EA

## Test Graphs

## Duty Cycle NVNT 1-DH5 2402MHz Ant1

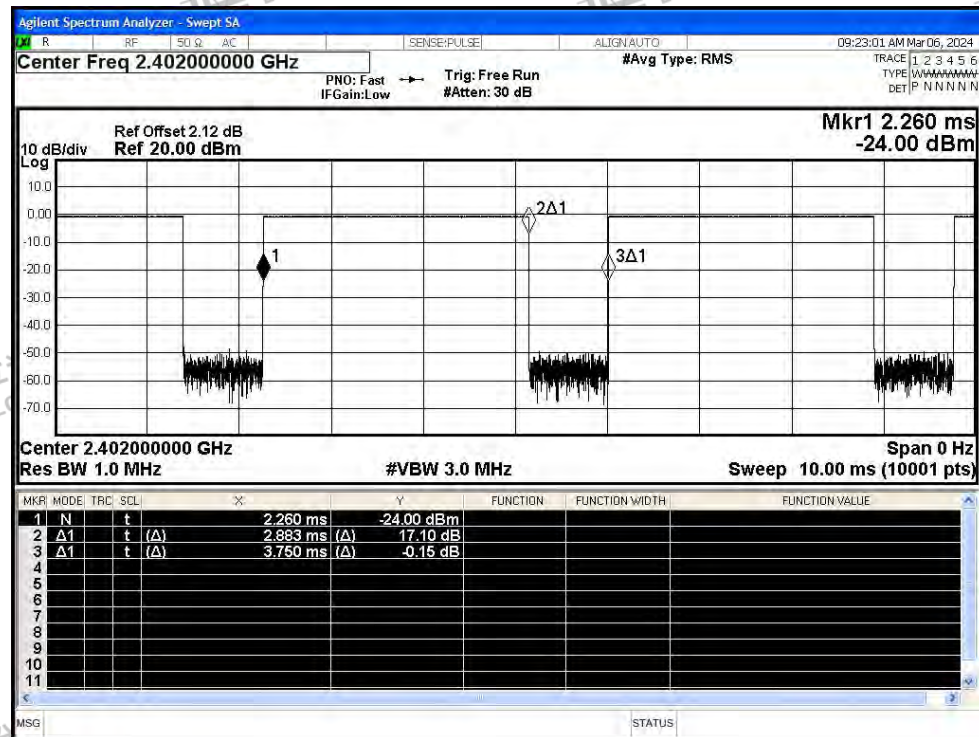

## Duty Cycle NVNT 1-DH5 2441MHz Ant1

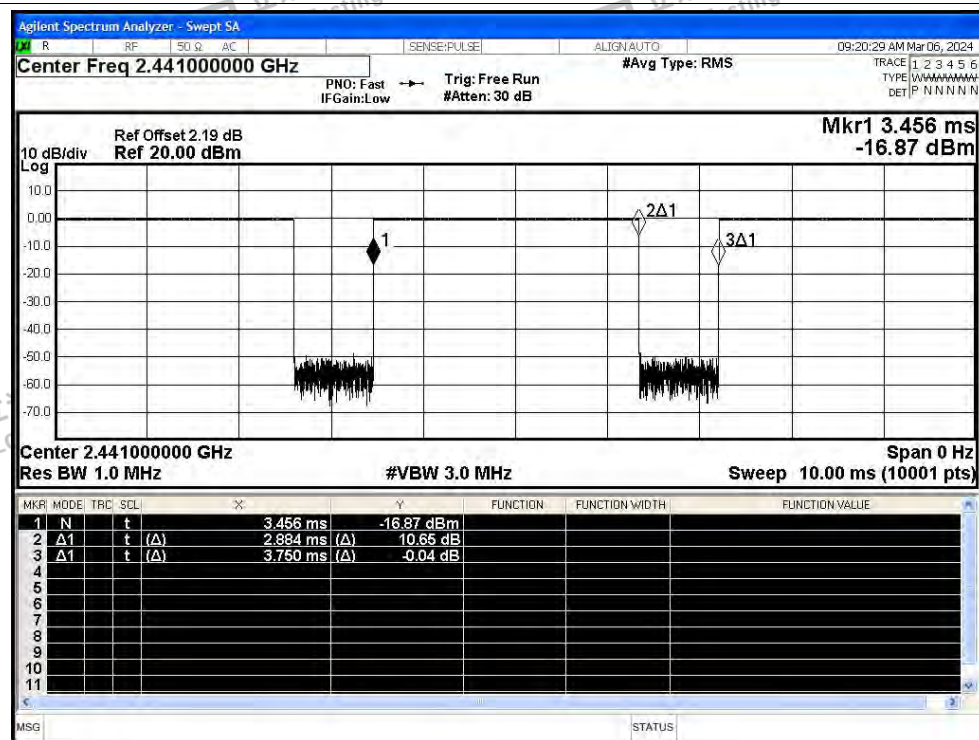


Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity




LCSA2274006EA

## Duty Cycle NVNT 1-DH5 2480MHz Ant1

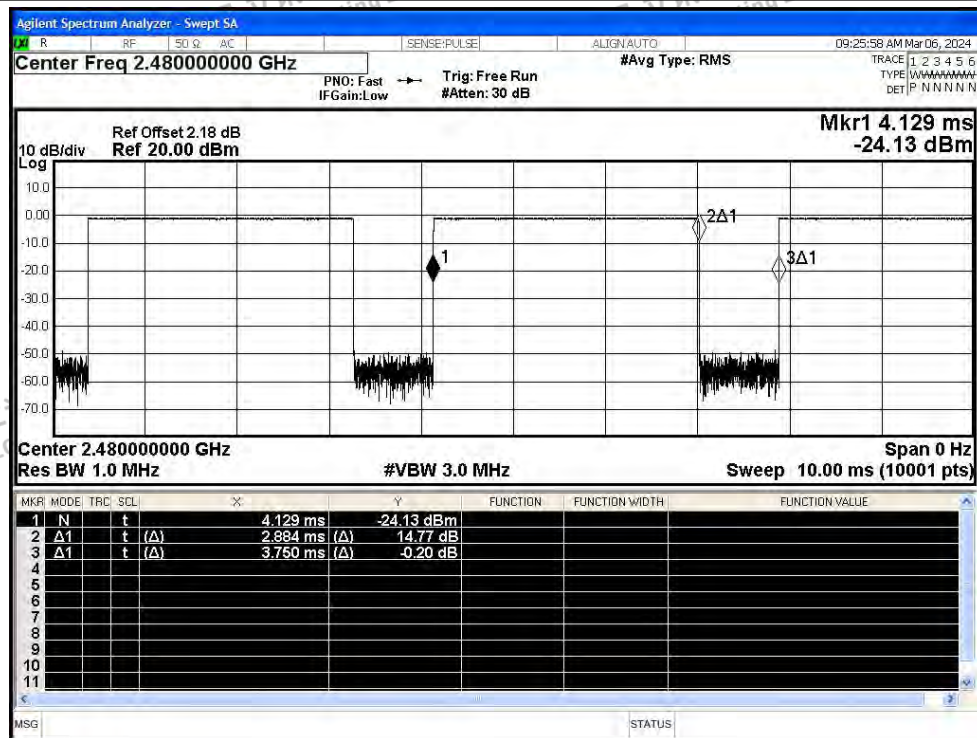


## Duty Cycle NVNT 2-DH5 2402MHz Ant1

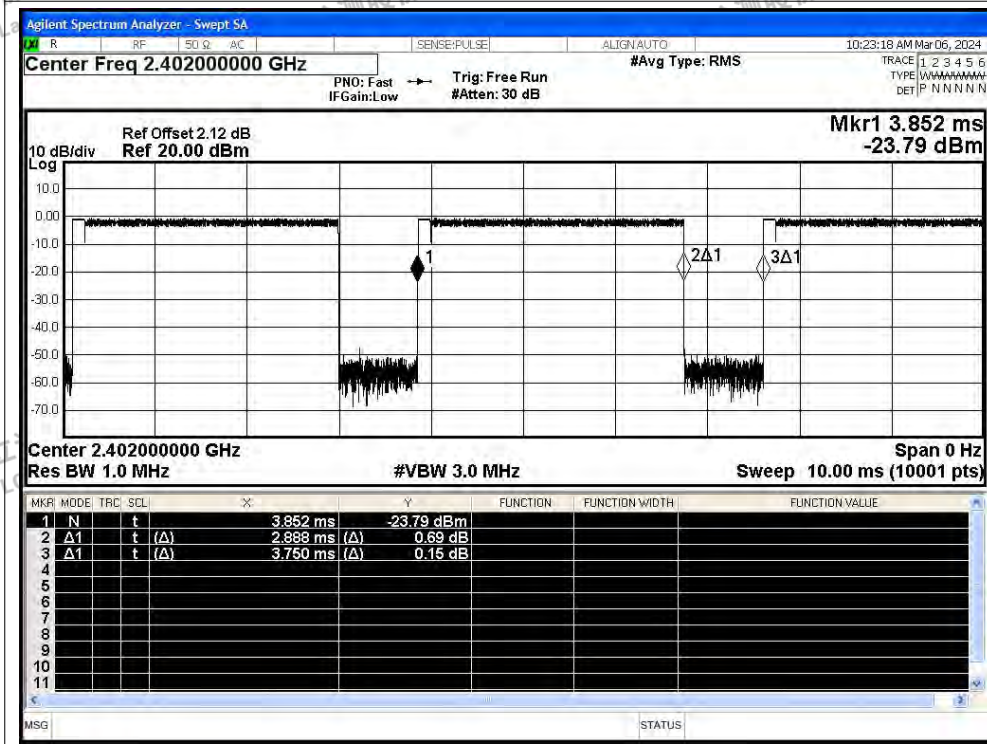




LCSA2274006EA

## Duty Cycle NVNT 2-DH5 2441MHz Ant1

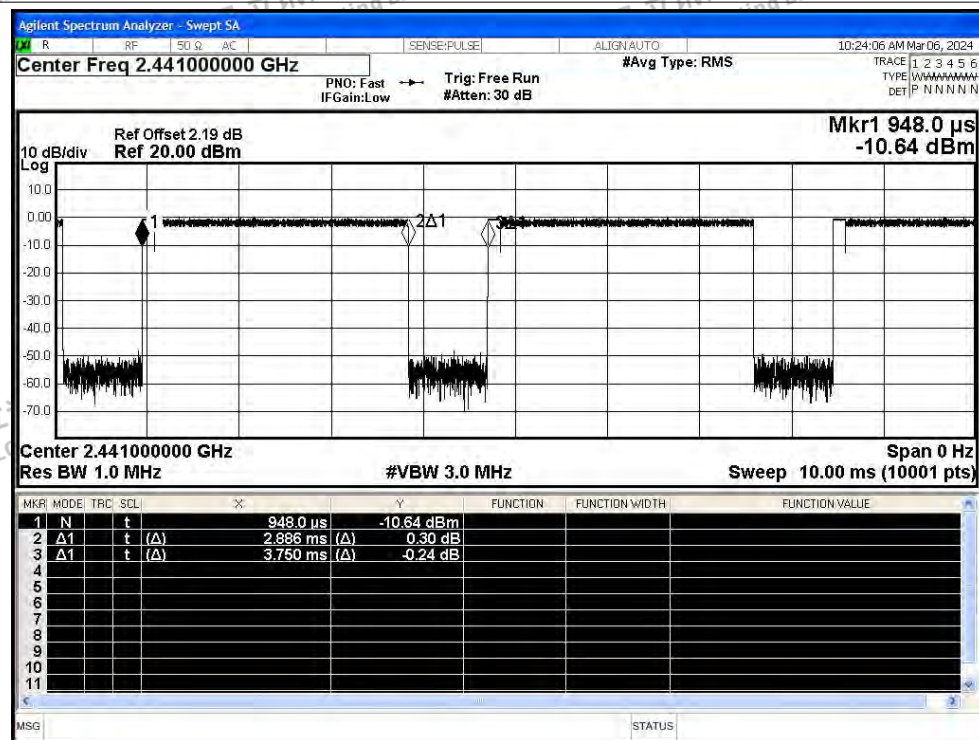


## Duty Cycle NVNT 2-DH5 2480MHz Ant1

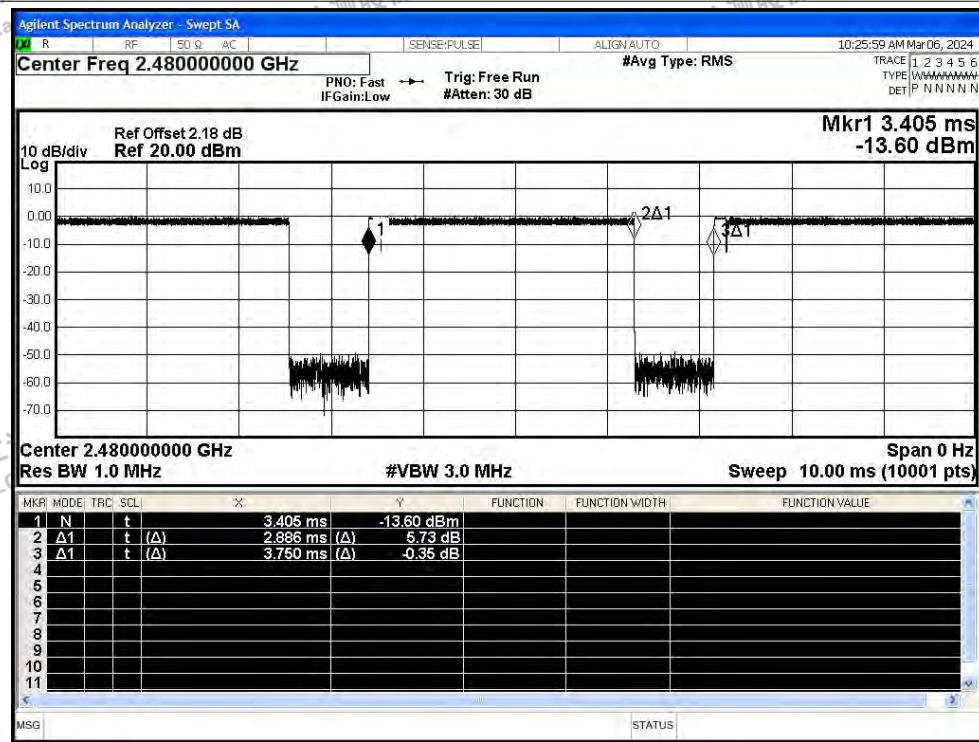




LCSA2274006EA

## Duty Cycle NVNT 3-DH5 2402MHz Ant1

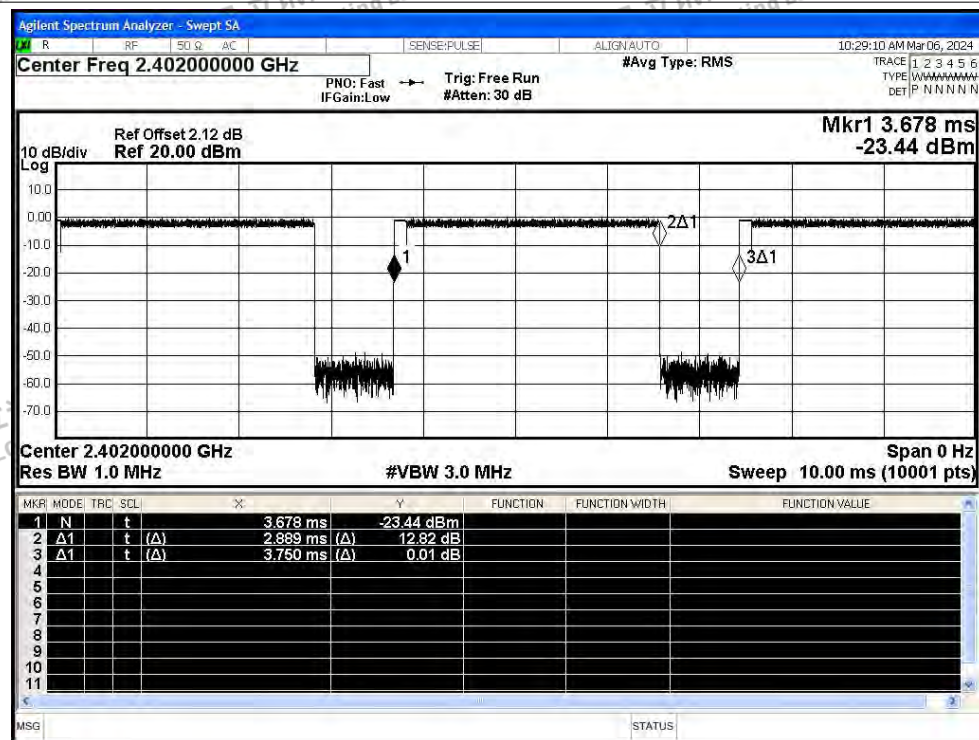


## Duty Cycle NVNT 3-DH5 2441MHz Ant1

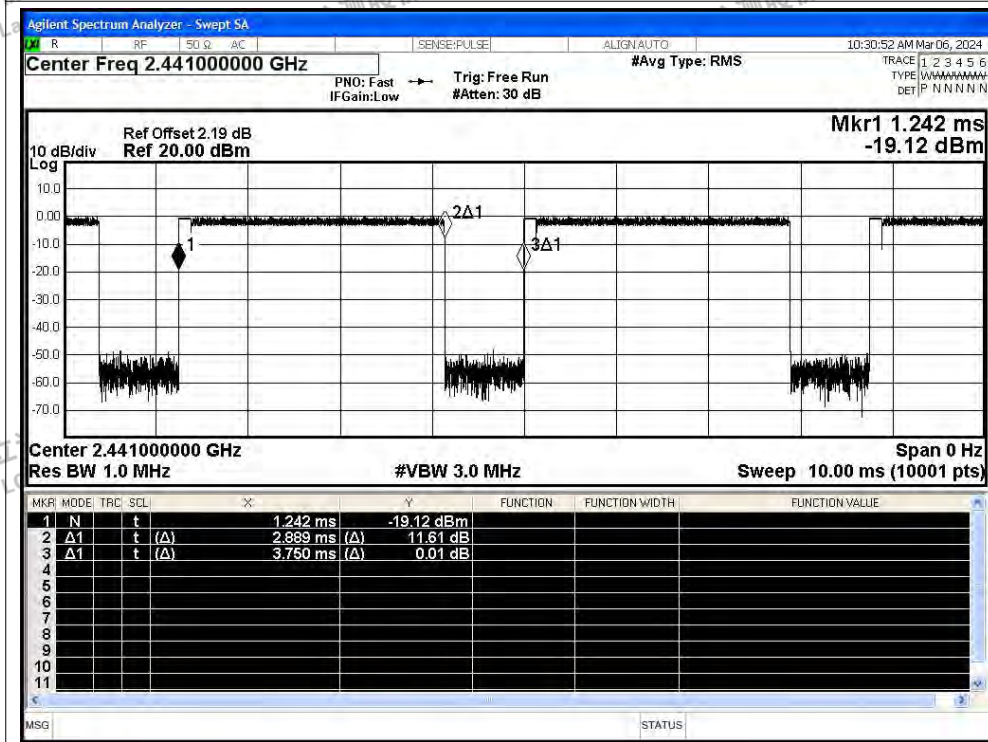



LCSA2274006EA

Duty Cycle NVNT 3-DH5 2480MHz Ant1

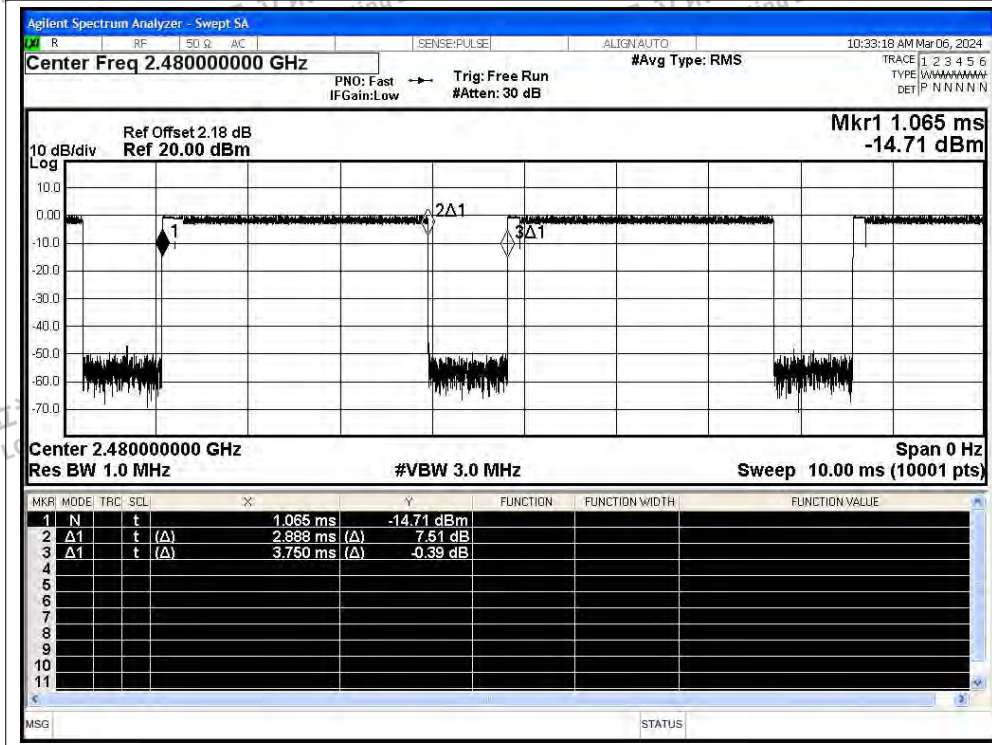



LCSA2274006EA

## A.9 Restrict Band

| Condition | Mode  | Frequency (MHz) | Antenna | Hopping Mode | Spur Freq (MHz) | Power (dBm) | Gain (dBi) | Duty Factor (dB) | E (dBuV/m) | Detector | Limit (dBuV/m) | Verdict |
|-----------|-------|-----------------|---------|--------------|-----------------|-------------|------------|------------------|------------|----------|----------------|---------|
| NVNT      | 1-DH5 | 2402            | Ant1    | No-Hopping   | 2310            | -50.81      | 2          | -                | 46.42      | Peak     | 74             | Pass    |
| NVNT      | 1-DH5 | 2402            | Ant1    | No-Hopping   | 2310            | -59.06      | 2          | 1.14             | 38.17      | Average  | 54             | Pass    |
| NVNT      | 1-DH5 | 2402            | Ant1    | No-Hopping   | 2383.632        | -47.2       | 2          | -                | 50.03      | Peak     | 74             | Pass    |
| NVNT      | 1-DH5 | 2402            | Ant1    | No-Hopping   | 2384.208        | -57.64      | 2          | 1.14             | 39.59      | Average  | 54             | Pass    |
| NVNT      | 1-DH5 | 2402            | Ant1    | No-Hopping   | 2390            | -47.63      | 2          | -                | 49.60      | Peak     | 74             | Pass    |
| NVNT      | 1-DH5 | 2402            | Ant1    | No-Hopping   | 2390            | -57.76      | 2          | 1.14             | 39.47      | Average  | 54             | Pass    |
| NVNT      | 1-DH5 | 2480            | Ant1    | No-Hopping   | 2483.5          | -50.81      | 2          | -                | 46.42      | Peak     | 74             | Pass    |
| NVNT      | 1-DH5 | 2480            | Ant1    | No-Hopping   | 2483.5          | -57.88      | 2          | 1.14             | 39.35      | Average  | 54             | Pass    |
| NVNT      | 1-DH5 | 2480            | Ant1    | No-Hopping   | 2483.872        | -36.2       | 2          | -                | 61.03      | Peak     | 74             | Pass    |
| NVNT      | 1-DH5 | 2480            | Ant1    | No-Hopping   | 2494.84         | -57.23      | 2          | 1.14             | 40.00      | Average  | 54             | Pass    |
| NVNT      | 1-DH5 | 2480            | Ant1    | No-Hopping   | 2500            | -51.43      | 2          | -                | 45.80      | Peak     | 74             | Pass    |
| NVNT      | 1-DH5 | 2480            | Ant1    | No-Hopping   | 2500            | -57.73      | 2          | 1.14             | 39.50      | Average  | 54             | Pass    |
| NVNT      | 2-DH5 | 2402            | Ant1    | No-Hopping   | 2310            | -51.73      | 2          | -                | 45.50      | Peak     | 74             | Pass    |
| NVNT      | 2-DH5 | 2402            | Ant1    | No-Hopping   | 2310            | -59.31      | 2          | 1.14             | 37.92      | Average  | 54             | Pass    |
| NVNT      | 2-DH5 | 2402            | Ant1    | No-Hopping   | 2356.752        | -46.75      | 2          | -                | 50.48      | Peak     | 74             | Pass    |
| NVNT      | 2-DH5 | 2402            | Ant1    | No-Hopping   | 2354.928        | -57.71      | 2          | 1.14             | 39.52      | Average  | 54             | Pass    |
| NVNT      | 2-DH5 | 2402            | Ant1    | No-Hopping   | 2390            | -49.25      | 2          | -                | 47.98      | Peak     | 74             | Pass    |
| NVNT      | 2-DH5 | 2402            | Ant1    | No-Hopping   | 2390            | -58.27      | 2          | 1.14             | 38.96      | Average  | 54             | Pass    |
| NVNT      | 2-DH5 | 2480            | Ant1    | No-Hopping   | 2483.5          | -50.76      | 2          | -                | 46.47      | Peak     | 74             | Pass    |
| NVNT      | 2-DH5 | 2480            | Ant1    | No-Hopping   | 2483.5          | -57.73      | 2          | 1.14             | 39.50      | Average  | 54             | Pass    |
| NVNT      | 2-DH5 | 2480            | Ant1    | No-Hopping   | 2483.776        | -38.67      | 2          | -                | 58.56      | Peak     | 74             | Pass    |
| NVNT      | 2-DH5 | 2480            | Ant1    | No-Hopping   | 2484.832        | -57.14      | 2          | 1.14             | 40.09      | Average  | 54             | Pass    |
| NVNT      | 2-DH5 | 2480            | Ant1    | No-Hopping   | 2500            | -48.69      | 2          | -                | 48.54      | Peak     | 74             | Pass    |
| NVNT      | 2-DH5 | 2480            | Ant1    | No-Hopping   | 2500            | -57.95      | 2          | 1.14             | 39.28      | Average  | 54             | Pass    |
| NVNT      | 3-DH5 | 2402            | Ant1    | No-Hopping   | 2310            | -49.65      | 2          | -                | 47.58      | Peak     | 74             | Pass    |
| NVNT      | 3-DH5 | 2402            | Ant1    | No-Hopping   | 2310            | -58.29      | 2          | 1.13             | 38.94      | Average  | 54             | Pass    |
| NVNT      | 3-DH5 | 2402            | Ant1    | No-Hopping   | 2357.712        | -46.72      | 2          | -                | 50.51      | Peak     | 74             | Pass    |
| NVNT      | 3-DH5 | 2402            | Ant1    | No-Hopping   | 2389.008        | -57.44      | 2          | 1.13             | 39.79      | Average  | 54             | Pass    |
| NVNT      | 3-DH5 | 2402            | Ant1    | No-Hopping   | 2390            | -47.3       | 2          | -                | 49.93      | Peak     | 74             | Pass    |
| NVNT      | 3-DH5 | 2402            | Ant1    | No-Hopping   | 2390            | -58.66      | 2          | 1.13             | 38.57      | Average  | 54             | Pass    |
| NVNT      | 3-DH5 | 2480            | Ant1    | No-Hopping   | 2483.5          | -50.39      | 2          | -                | 46.84      | Peak     | 74             | Pass    |
| NVNT      | 3-DH5 | 2480            | Ant1    | No-Hopping   | 2483.5          | -57.83      | 2          | 1.13             | 39.40      | Average  | 54             | Pass    |
| NVNT      | 3-DH5 | 2480            | Ant1    | No-Hopping   | 2483.584        | -38.79      | 2          | -                | 58.44      | Peak     | 74             | Pass    |
| NVNT      | 3-DH5 | 2480            | Ant1    | No-Hopping   | 2483.824        | -56.96      | 2          | 1.13             | 40.27      | Average  | 54             | Pass    |
| NVNT      | 3-DH5 | 2480            | Ant1    | No-Hopping   | 2500            | -48.64      | 2          | -                | 48.59      | Peak     | 74             | Pass    |
| NVNT      | 3-DH5 | 2480            | Ant1    | No-Hopping   | 2500            | -58.26      | 2          | 1.13             | 38.97      | Average  | 54             | Pass    |



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity




LCSA2274006EA

## Test Graphs

## Restrict Band NVNT 1-DH5 2402MHz Ant1 No-Hopping Peak

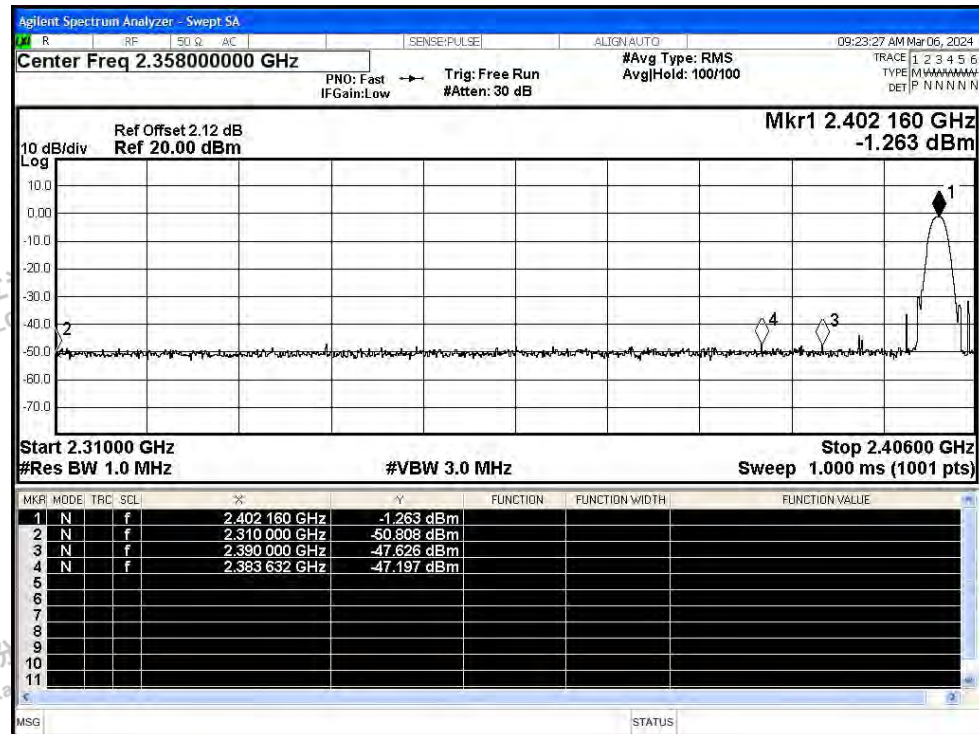

## Restrict Band NVNT 1-DH5 2402MHz Ant1 No-Hopping Average

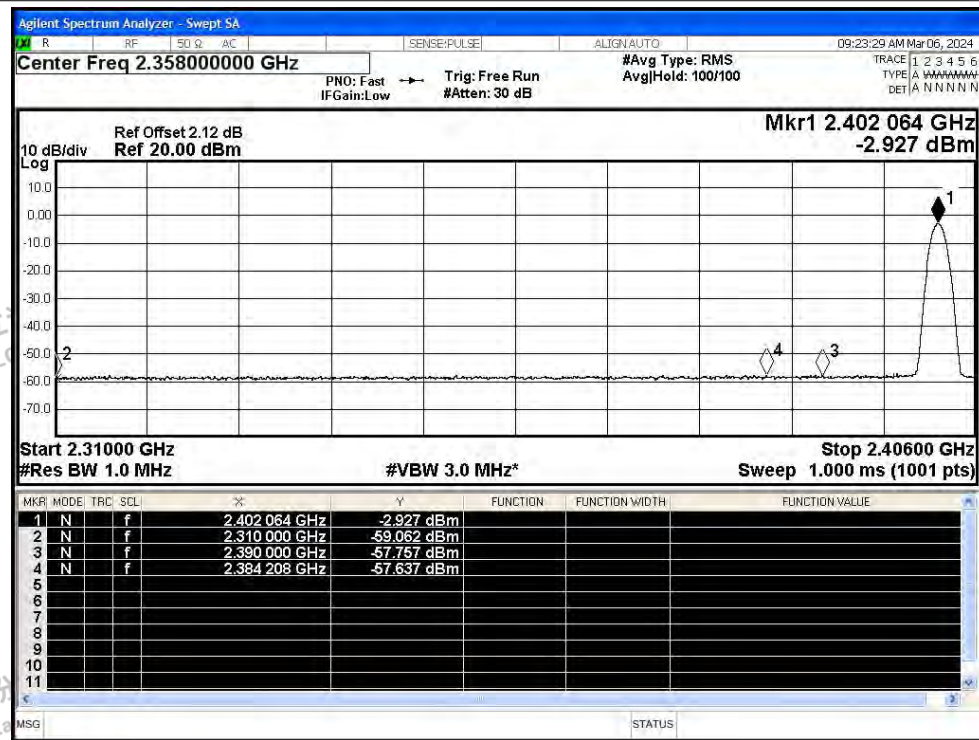



LCSA2274006EA

Page 56 of 61

FCC ID: 2BFIJ-PLAYERONE8K

Report No.:

立讯检测股份  
LCS Testing Lab

立讯检测股份  
LCS Testing Lab

立讯检测股份  
LCS Testing Lab

立讯检测股份  
LCS Testing Lab

立讯检测股份  
LCS Testing Lab

立讯检测股份  
LCS Testing Lab

立讯检测股份  
LCS Testing Lab

立讯检测股份  
LCS Testing Lab

立讯检测股份  
LCS Testing Lab

立讯检测股份  
LCS Testing Lab

立讯检测股份  
LCS Testing Lab

立讯检测股份  
LCS Testing Lab

立讯检测股份  
LCS Testing Lab

立讯检测股份  
LCS Testing Lab

立讯检测股份  
LCS Testing Lab

立讯检测股份  
LCS Testing Lab

立讯检测股份  
LCS Testing Lab

立讯检测股份  
LCS Testing Lab




Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen,  
518000, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity




LCSA2274006EA


## Restrict Band NVNT 1-DH5 2480MHz Ant1 No-Hopping Peak

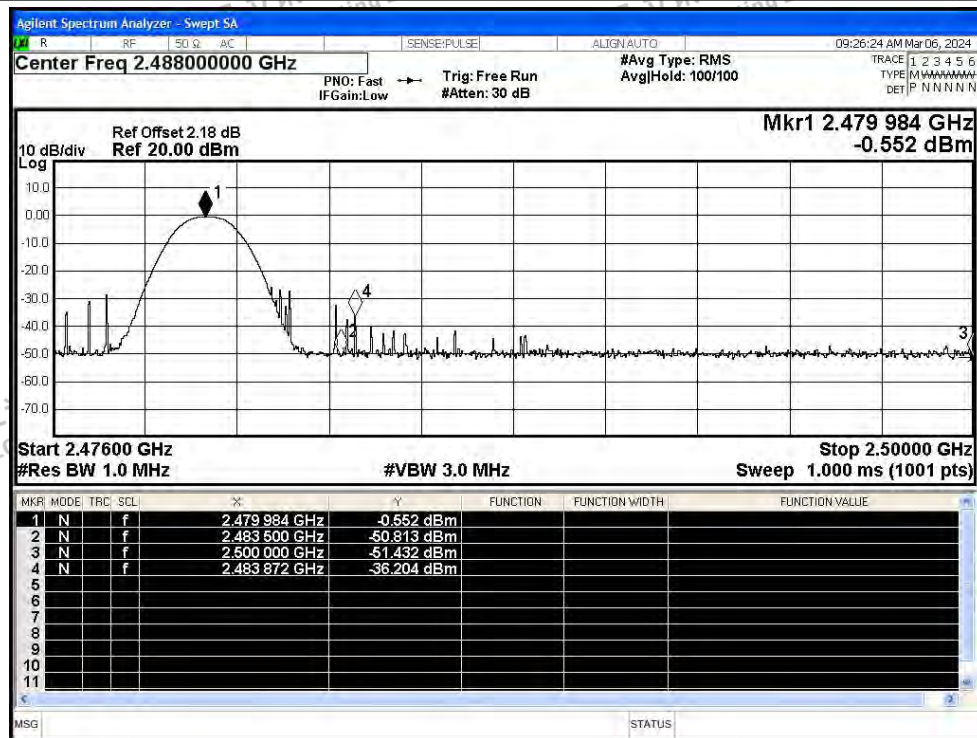


## Restrict Band NVNT 1-DH5 2480MHz Ant1 No-Hopping Average

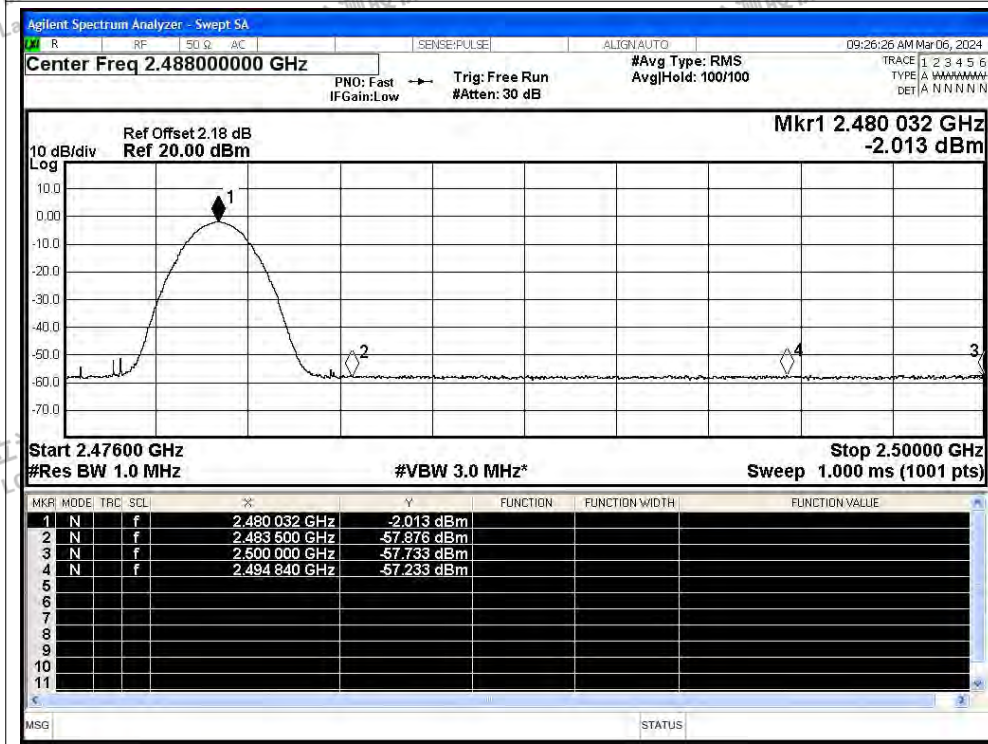


## Restrict Band NVNT 2-DH5 2402MHz Ant1 No-Hopping Peak

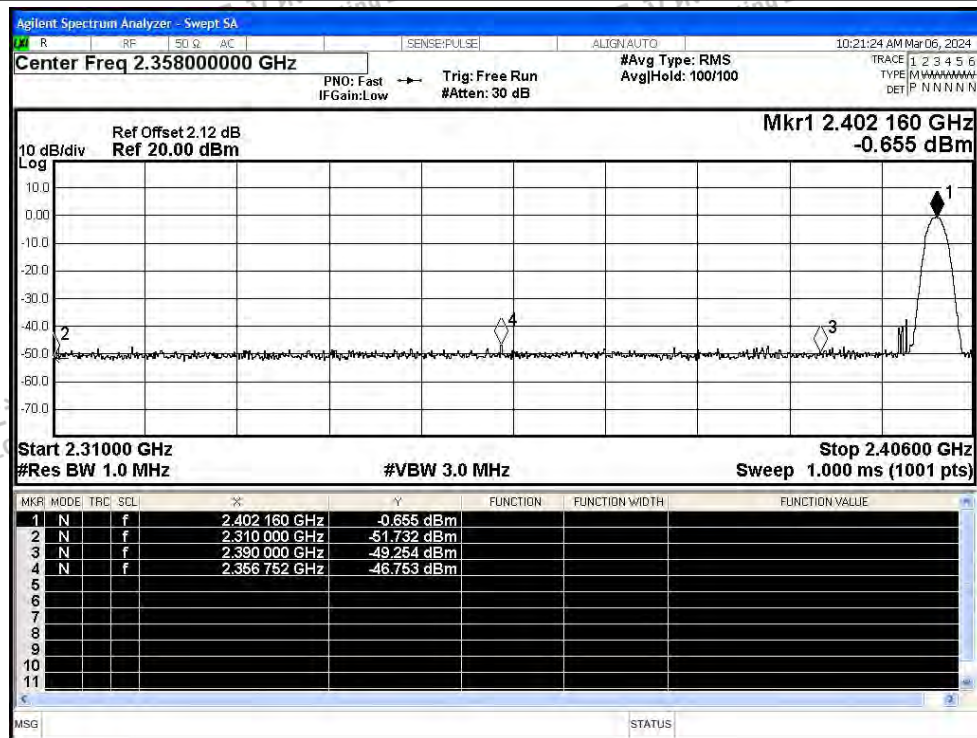


## Restrict Band NVNT 2-DH5 2402MHz Ant1 No-Hopping Average

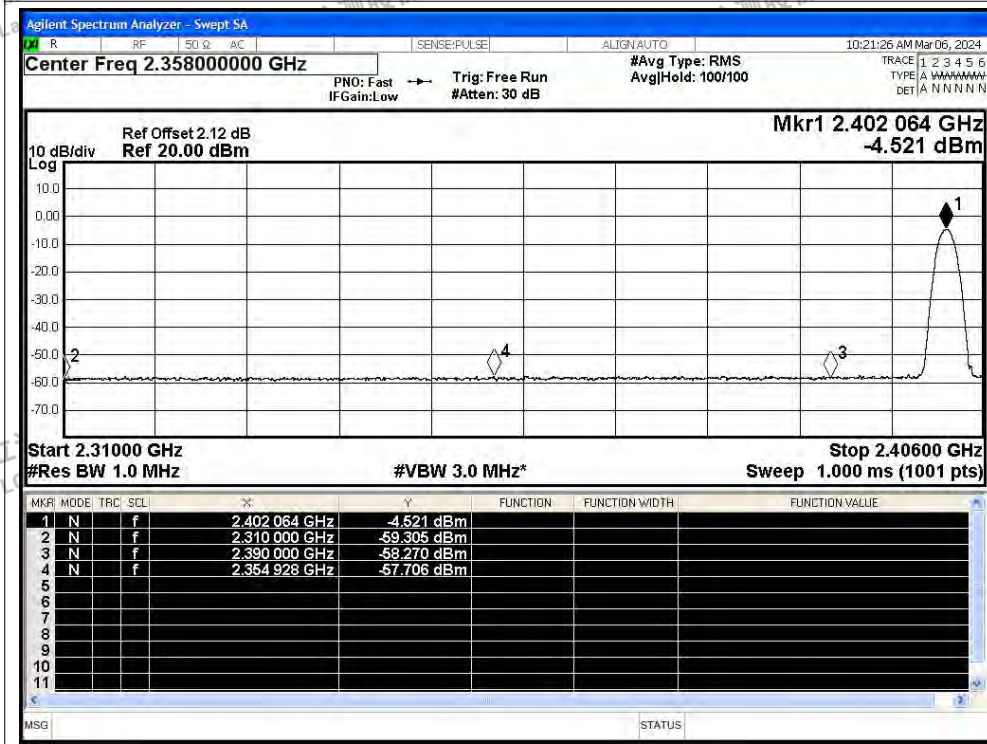

Restrict Band NVNT 2-DH5 2480MHz Ant1 No-Hopping Peak

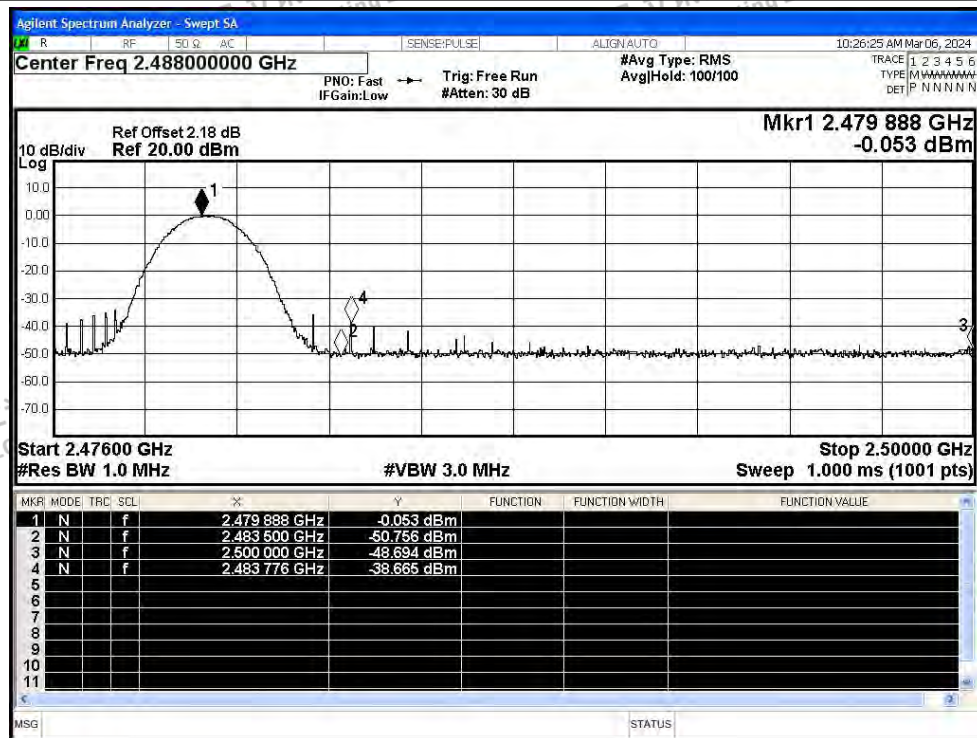


Restrict Band NVNT 2-DH5 2480MHz Ant1 No-Hopping Average

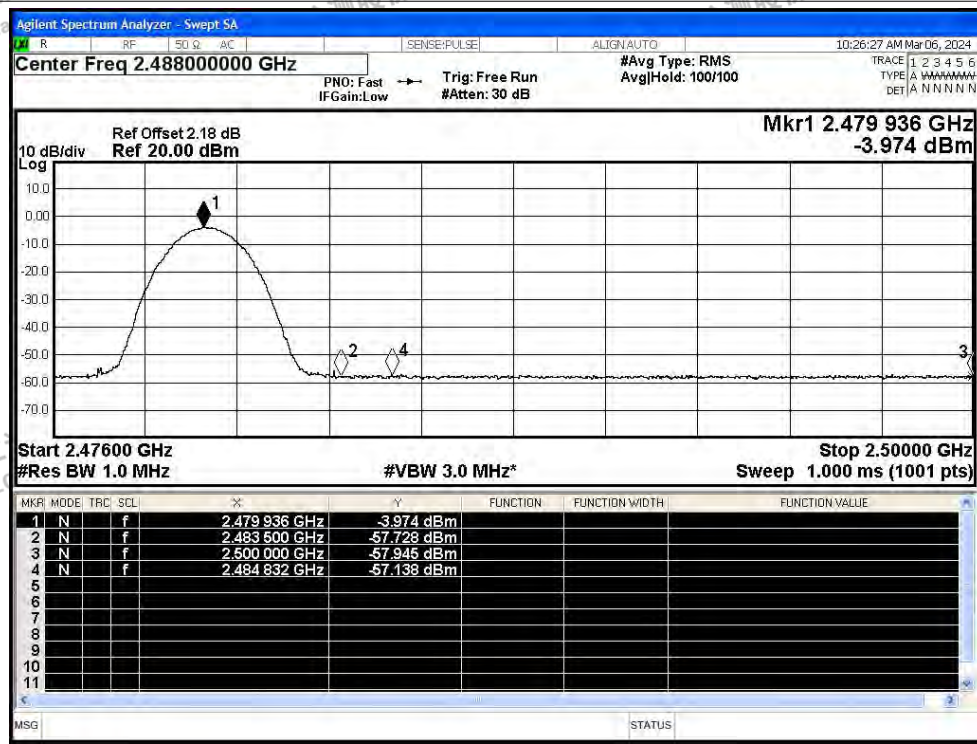




LCSA2274006EA

## Restrict Band NVNT 3-DH5 2402MHz Ant1 No-Hopping Peak

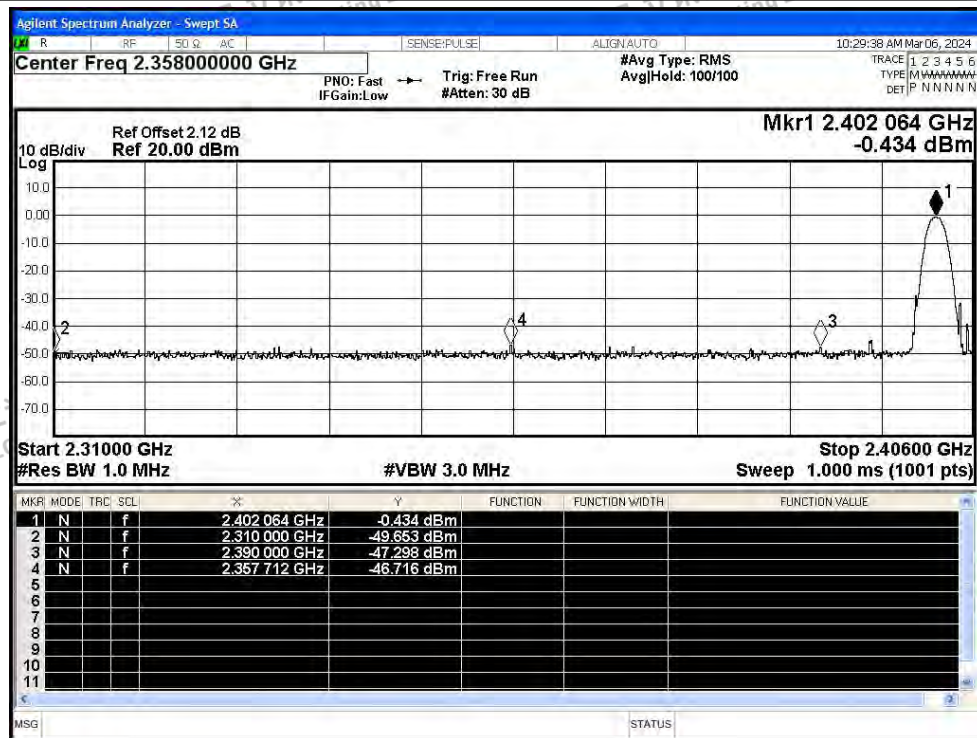


## Restrict Band NVNT 3-DH5 2402MHz Ant1 No-Hopping Average

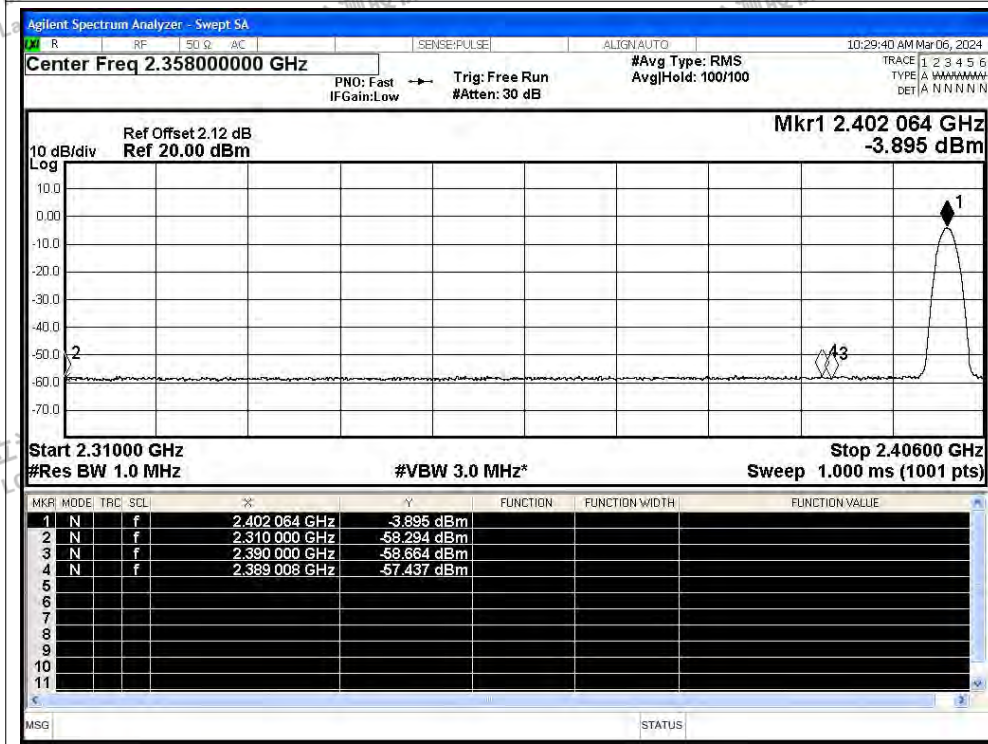



LCSA2274006EA

## Restrict Band NVNT 3-DH5 2480MHz Ant1 No-Hopping Peak

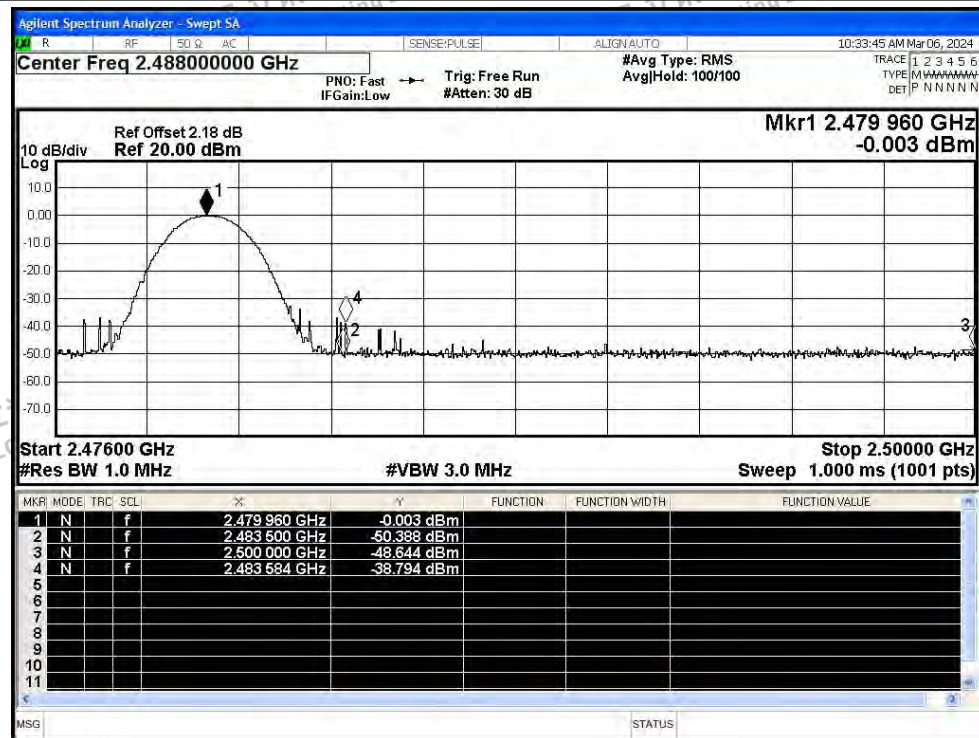

## Restrict Band NVNT 3-DH5 2480MHz Ant1 No-Hopping Average

