

## Technical Specifications

Standard:	IEC 62056-21(IEC 61107) / ANSI C12.18 compliant
Interface:	Infrared optical
Connector:	USB 2.0
Max. Communication Distance:	9 Meters (29.6 feet)
Max. B.R.:	Fixed 9600bps / Dynamic 300 ~ 57600bps
Attachment:	Strong magnetic, complied with IEC 62056-21(IEC 61107) or ANSI C12.18
Computer compatibility:	Microsoft Windows, Mac OS X, Linux, Android, Windows CE
Battery:	800mAh, 20 hours
Voltage:	3.7 ~ 4.2V
Power Adapter:	AC 85 ~ 220V, DC 5V
Cable:	2 meters(6.5 feet)
Enviroment:	-15°C ~ 80°C (5°F - 176°F)

# TesPro™




## TP-BT

Bluetooth Optical Probe  
for Meter Communication


## Default Bluetooth Pair Code:

1234

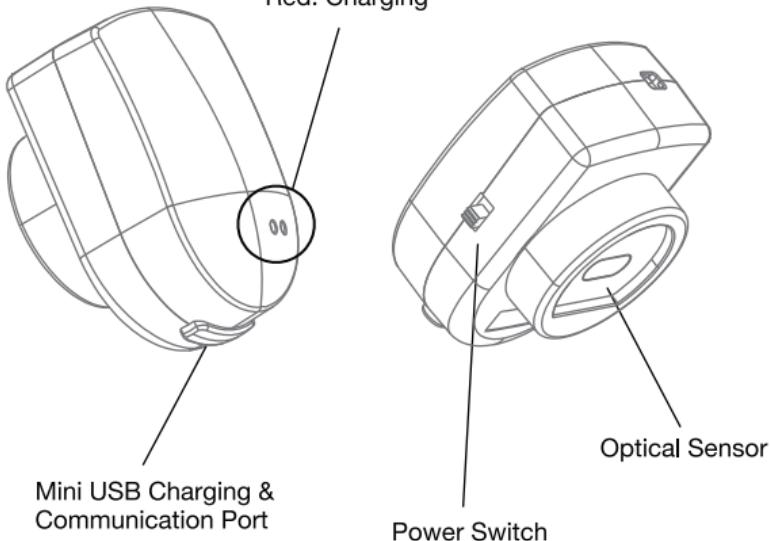

### Battery Indicator

Battery Full: Green  
Deem Green: Battery Low  
Indicator Off: Battery Out  
Charging: Red

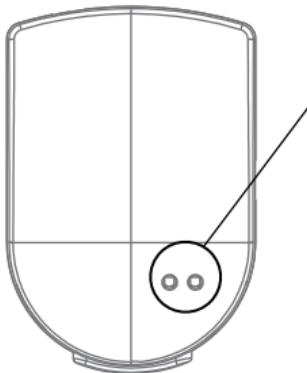

### Battery Usage

- TP-BT come with advanced power management to protect the battery from over charge.
- Always keep battery fully charged to be ready for work.
- Exhausted battery may damage the battery life.

**FCC STATEMENT :**

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

This device may not cause harmful interference, and

This device must accept any interference received, including interference that may cause undesired operation.

Warning: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver.

Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.

**RF warning statement:**

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.