



TEST REPORT

Product Name: Mini PC
FCC ID: 2BFL2-TLM002
Trademark: MOUGOL, SOYO
Model Number: TLM002, TLM001, TLM003, TLM004, TLM005, TLM006, TLM007, TLM008, TLM009, TLM010, TLM011, TLM012, TLM013, TLM014, TLM015, TLM016, TLM017, TLM018, TLM019, TLM020, TLM021, TLM022, TLM023, TLM024, TLM025, TLM026, TLM027, TLM028, TLM029, TLM030
Prepared For: Shenzhen Mogu Youpin Digital Technology Co., Ltd.
Address: 1511L30, Building A, Xinghe Century, No. 3069 Caitian Road, Gangxia Community, Futian Street, Futian District, Shenzhen, China
Manufacturer: Shenzhen Mogu Youpin Digital Technology Co., Ltd.
Address: 1511L30, Building A, Xinghe Century, No. 3069 Caitian Road, Gangxia Community, Futian Street, Futian District, Shenzhen, China
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinghe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: Mar. 08, 2024
Sample tested Date: Mar. 08, 2024 to Mar. 29, 2024
Issue Date: Mar. 29, 2024
Report No.: CTB240315026RFX
Test Standards: FCC Part15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is WIFI-2.4GHz band radio test report.

Compiled by:

Reviewed by:

Approved by:

Zhou kui

Arron Liu



Zhou Kui

Arron Liu

Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	4
2. TEST SUMMARY	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP	7
4.1 Product Information	7
4.2 Test Setup Configuration	7
4.3 Support Equipment	7
4.4 Channel List	8
4.5 Test Mode	8
4.6 Test Environment	8
5. TEST FACILITY AND TEST INSTRUMENT USED	9
5.1 Test Facility	9
5.2 Test Instrument Used	9
6. AC POWER LINE CONDUCTED EMISSION	11
6.1 Block Diagram Of Test Setup	11
6.2 Limit	11
6.3 Test procedure	11
6.4 Test Result	13
7. RADIATED SPURIOUS EMISSION	15
7.1 Block Diagram Of Test Setup	15
7.2 Limit	15
7.3 Test procedure	16
7.4 Test Result	17
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	39
8.1 Block Diagram Of Test Setup	39
8.2 Limit	39
8.3 Test procedure	39
8.4 Test Result	40
9. CONDUCTED OUTPUT POWER	54
9.1 Block Diagram Of Test Setup	54
9.2 Limit	54
9.3 Test procedure	54
9.4 Test Result	55
10. 6DB OCCUPIED BANDWIDTH	56
10.1 Block Diagram Of Test Setup	56
10.2 Limit	56
10.3 Test procedure	56
10.4 Test Result	57
11. POWER SPECTRAL DENSITY	67
11.1 Block Diagram Of Test Setup	67
11.2 Limit	67



11.3	Test procedure	67
11.4	Test Result	68
12.	ANTENNA REQUIREMENT	77
13.	EUT TEST SETUP PHOTOGRAPHS	78

(Note: N/A means not applicable)



1. VERSION

Report No.	Issue Date	Description	Approved
CTB240315026RFX	Mar. 29, 2024	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013/ KDB 558074 D05v02	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1091	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	$U=\pm 54.3\text{Hz}$
Conducted output power Above 1G	$U=\pm 1.0\text{dB}$
Conducted output power below 1G	$U=\pm 0.9\text{dB}$
Power Spectral Density , Conduction	$U=\pm 1.0\text{dB}$
Conduction spurious emissions	$U=\pm 2.8\text{dB}$
Out of band emission	$U=\pm 54\text{Hz}$
3m chamber Radiated spurious emission(9KHz-30MHz)	$U=\pm 4.8\text{dB}$
3m chamber Radiated spurious emission(30MHz-1GHz)	$U=\pm 4.3\text{dB}$
3m chamber Radiated spurious emission(1GHz-18GHz)	$U=\pm 4.5\text{dB}$
3m chamber Radiated spurious emission(18GHz-40GHz)	$U=\pm 3.4\text{dB}$
humidity uncertainty	$U=\pm 5.3\%$
Temperature uncertainty	$U=\pm 0.59^{\circ}\text{C}$
Supply voltages	$U=\pm 3\%$
Time	$U=\pm 5\%$

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	TLM002, TLM001, TLM003, TLM004, TLM005, TLM006, TLM007, TLM008, TLM009, TLM010, TLM011, TLM012, TLM013, TLM014, TLM015, TLM016, TLM017, TLM018, TLM019, TLM020, TLM021, TLM022, TLM023, TLM024, TLM025, TLM026, TLM027, TLM028, TLM029, TLM030
Model Description:	All the model are the same circuit and RF module, only different for model name .Test sample model: TLM002
Wi-Fi Specification:	IEEE 802.11b/g/n
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	WiFi: IEEE 802.11b/g/n 20: 2412-2462MHz/ 11 channel IEEE 802.11n 40: 2422-2452MHz/ 7 channel
Max. RF output power:	WiFi (2.4G): 17.248dBm
Type of Modulation:	WiFi: DSSS, OFDM
Antenna installation:	WiFi: FPC Antenna
Antenna Gain:	WiFi (2.4G): ANT1:3.93dBi, ANT2: 3.79dBi
Ratings:	DC 12V

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/TypeNo.	SeriesNo.	Note
1	Keyboard	DELL	KB216t	N/A	N/A
2	Mouse	DELL	MS116c	N/A	N/A
3	Monitor	DELL	SE2218HV	N/A	N/A

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462		

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

ANT 1, ANT 2

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11b/g/n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

MIMO(ANT 1+ANT 2)

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

NOTE: DutyCycle>98%.

Test mode	Rate
802.11b	11M
802.11g	54M
802.11n20	65M
802.11n40	65M

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(DC):	12V
Normal Temperature(℃)	23
Low Temperature(℃)	0
High Temperature(℃)	50

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinghe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

Item	Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	2024.07.05
2	Power Sensor	Agilent	U2021XA	MY56120032	2024.07.05
3	Power Sensor	Agilent	U2021XA	MY56120034	2024.07.05
4	Communication test set	R&S	CMW500	108058	2024.07.05
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	2024.07.05
6	Signal Generator	Agilent	N5181A	MY50140365	2024.07.05
7	Vector signal generator	Agilent	N5182A	MY47420195	2024.07.05
8	Communication test set	Agilent	E5515C	MY50102567	2024.07.06
9	2.4 GHz Filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	2024.07.05
10	5 GHz Filter	Shenxiang	MSF5150-5850 MS-1155	20181015001	2024.07.06
11	Filter	Xingbo	XBLBQ-DZA120	190821-1-1	2024.07.06
12	BT&WI-FI Automatic test software	Microwave	MTS8000	Ver. 2.0.0.0	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2024.10.30
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2024.07.05
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/
16	966 chamber	C.R.T.	966	/	2024.08.11
17	Receiver	R&S	ESPI	100362	2024.07.05
18	Amplifier	HP	8447E	2945A02747	2024.07.05
19	Amplifier	Agilent	8449B	3008A01838	2024.07.05
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2024.07.08

21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	2024.07.08
22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	2024.07.08
24	loop antenna	ZHINAN	ZN30900A	GTS534	/
25	40G Horn antenna	A/H/System	SAS-574	588	2024.10.30
26	Amplifier	AEROFLEX	Aeroflex	097	2024.07.05

Continuous disturbance


No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	LISN	ROHDE&SCHWARZ	ESH3-Z5	100318	2024.07.05
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	2024.07.05
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2024.07.05
4	Coaxial cable	ZDECL	Z302S-NJ-SMA J-12M	18091905	2024.07.05
5	ISN	Schwarzbeck	NTFM8158	183	2024.07.05
6	Communication test set	Agilent	E5515C	MY50102567	2024.07.05
7	Communication test set	R&S	CMW500	108058	2024.07.05
8	EZ-EMC	Frad	EMC-con3A1.1	/	/

Radiated emission

No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	2024.07.08
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2024.07.08
3	Amplifier	Agilent	8449B	3008A01838	2024.07.05
4	Amplifier	HP	8447E	2945A02747	2024.07.05
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2024.07.05
6	Coaxial cable	ETS	RFC-SNS-100-NMS-80 NI	/	2024.07.05
7	Coaxial cable	ETS	RFC-SNS-100-NMS-20 NI	/	2024.07.05
8	Coaxial cable	ETS	RFC-SNS-100-SMS-20 NI	/	2024.07.05
9	Coaxial cable	ETS	RFC-NNS-100-NMS-300 NI	/	2024.07.05
10	Communication test set	Agilent	E5515C	MY50102567	2024.07.05
11	Communication test set	R&S	CMW500	108058	2024.07.05
12	EZ-EMC	Frad	EMC-con3A1.1	/	/

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

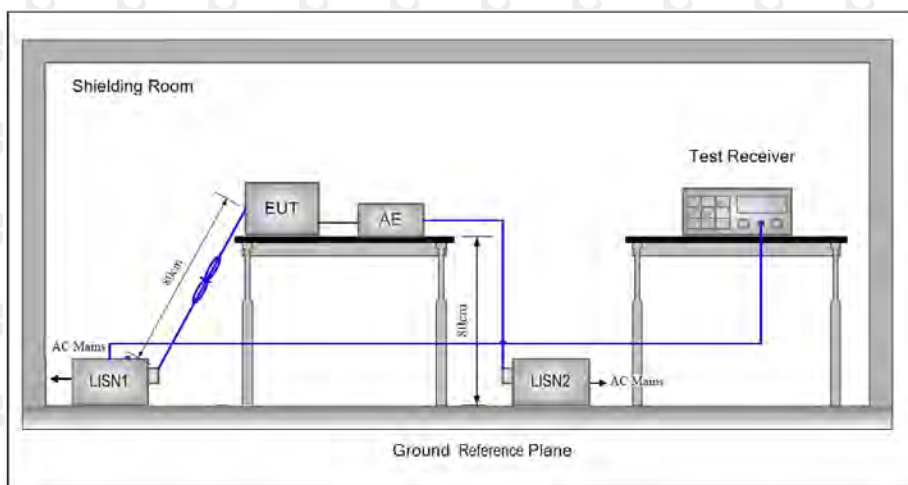

6.2 Limit

Table 4 – AC power-line conducted emissions limits

Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 Ω /50 μ H + 5 Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.


- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.

6.4 Test Result

Test Specification: Line

AC 120V 60Hz

the worst: 802.11b (low channel)

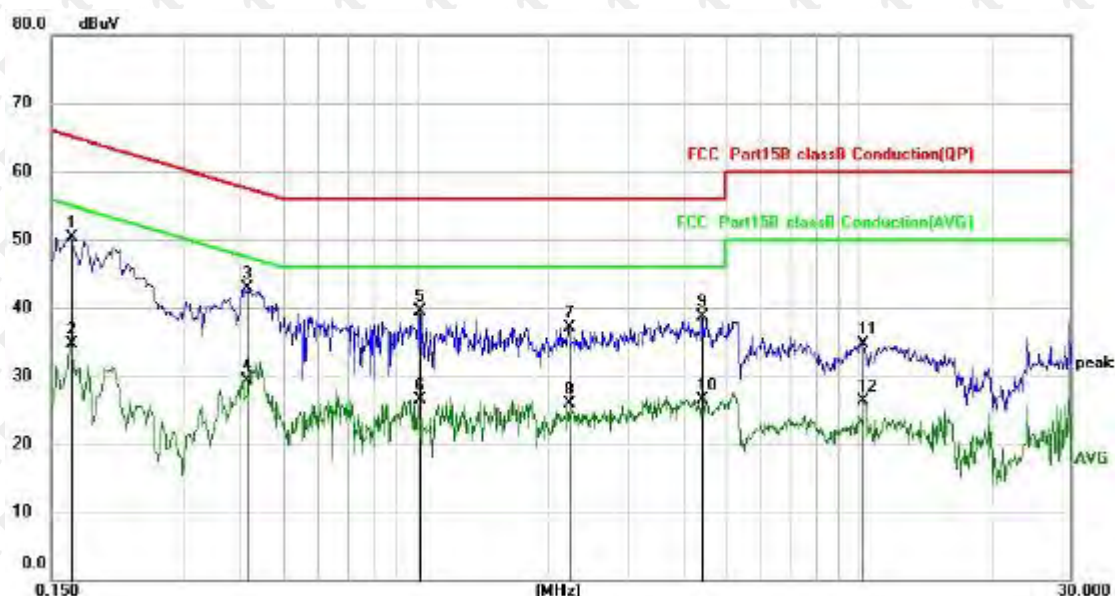

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1660	40.35	9.95	50.30	65.16	-14.86	QP
2		0.1660	24.85	9.95	34.80	55.16	-20.36	AVG
3	*	0.4148	32.96	9.98	42.94	57.55	-14.61	QP
4		0.4148	19.32	9.98	29.30	47.55	-18.25	AVG
5		1.0180	29.49	10.01	39.50	56.00	-16.50	QP
6		1.0180	16.43	10.01	26.44	46.00	-19.56	AVG
7		2.2058	27.01	10.11	37.12	56.00	-18.88	QP
8		2.2058	15.88	10.11	25.99	46.00	-20.01	AVG
9		4.4138	28.29	10.32	38.61	56.00	-17.39	QP
10		4.4138	16.28	10.32	26.60	46.00	-19.40	AVG
11		10.1418	24.21	10.58	34.79	60.00	-25.21	QP
12		10.1418	15.71	10.58	26.29	50.00	-23.71	AVG


Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Test Specification: Neutral

AC 120V 60Hz

the worst: 802.11b (low channel)

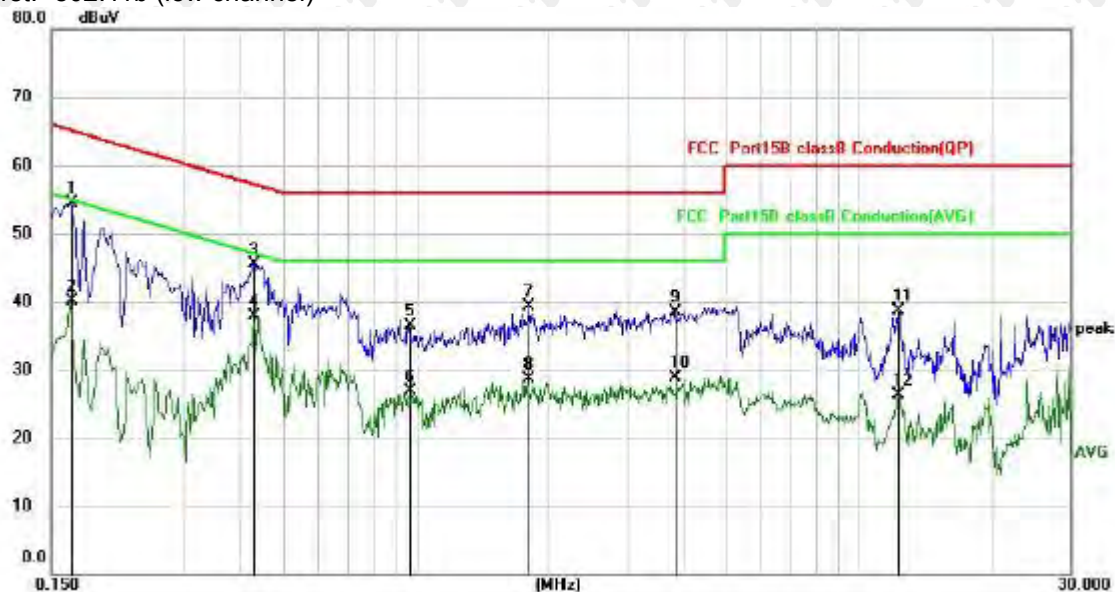

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV	dBuV	dB	
1		0.1660	44.60	9.95	54.55	65.16	-10.61	QP
2		0.1660	30.13	9.95	40.08	55.16	-15.08	AVG
3		0.4304	35.61	9.98	45.59	57.24	-11.65	QP
4	*	0.4304	27.84	9.98	37.82	47.24	-9.42	AVG
5		0.9657	26.58	10.01	36.59	56.00	-19.41	QP
6		0.9657	16.81	10.01	26.82	46.00	-19.18	AVG
7		1.7860	29.32	10.07	39.39	56.00	-16.61	QP
8		1.7860	18.64	10.07	28.71	46.00	-17.29	AVG
9		3.8300	28.18	10.27	38.45	56.00	-17.55	QP
10		3.8300	18.59	10.27	28.86	46.00	-17.14	AVG
11		12.2299	28.08	10.65	38.73	60.00	-21.27	QP
12		12.2299	15.57	10.65	26.22	50.00	-23.78	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

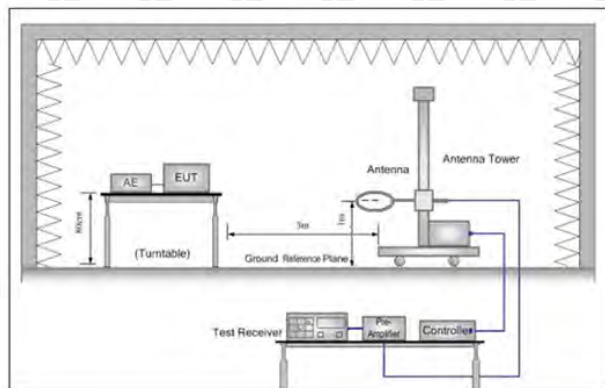


Figure 1. Below 30MHz

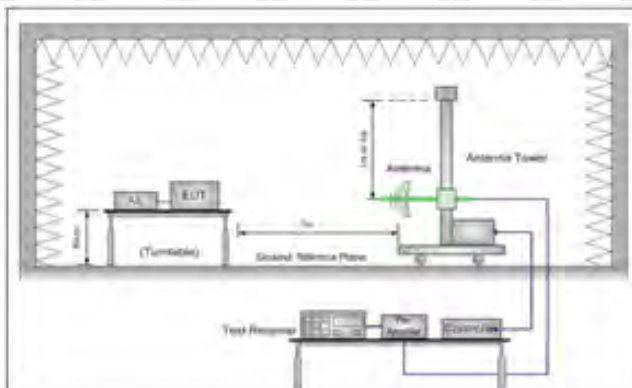


Figure 2. 30MHz to 1GHz

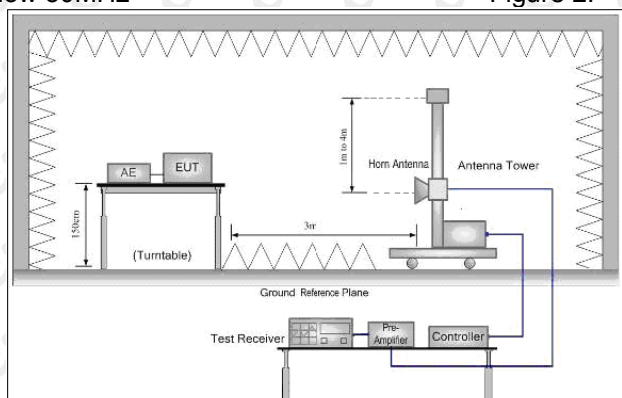


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- Repeat above procedures until all frequencies measured was complete.


Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

7.4 Test Result

Below 1GHz Test Results:


Antenna polarity: H

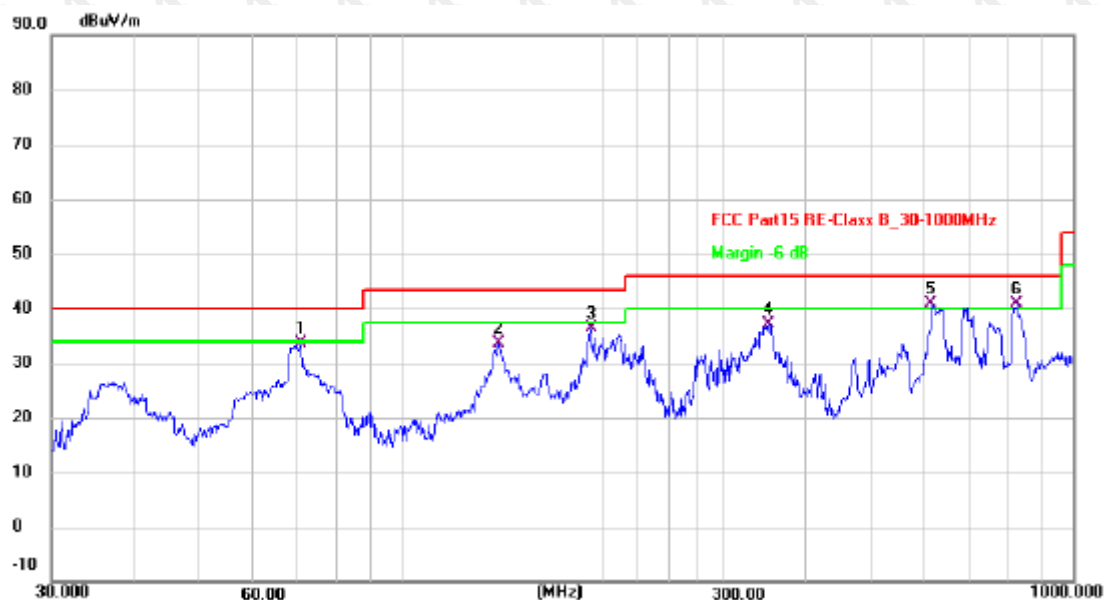

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	70.5835	56.12	-22.54	33.58	40.00	-6.42	QP
2	139.3611	51.66	-18.11	33.55	43.50	-9.95	QP
3	191.0738	57.02	-20.54	36.48	43.50	-7.02	QP
4	351.7080	53.61	-16.41	37.20	46.00	-8.80	QP
5 *	616.3716	50.26	-9.33	40.93	46.00	-5.07	QP
6 !	824.5968	45.64	-4.88	40.76	46.00	-5.24	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Antenna polarity: V

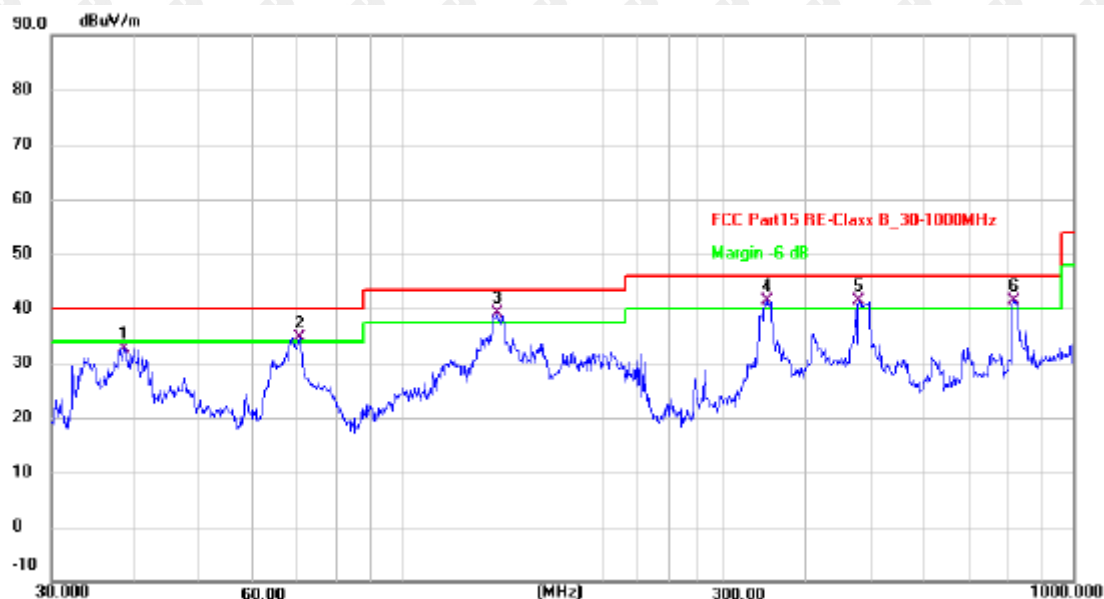

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	38.4810	46.79	-14.06	32.73	40.00	-7.27	QP
2 !	70.3365	53.23	-18.53	34.70	40.00	-5.30	QP
3 *	138.3873	55.09	-16.01	39.08	43.50	-4.42	QP
4 !	350.4766	54.96	-13.51	41.45	46.00	-4.55	QP
5 !	478.8455	48.09	-6.69	41.40	46.00	-4.60	QP
6 !	815.9678	41.26	0.23	41.49	46.00	-4.51	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

1. The margin of 9K-30MH measurement exceeds 20dB, so the test chart is not included. Test Mode: 802.11b low channel (the worst)
2. All modes have been tested, and the test results show that b-mode data is the worst, only b-mode test chart is put. Test Mode: 802.11b low channel (the worst)
3. After pre-scanning three directions, the report recorded the worst case Test Mode: 802.11b low channel (the worst)

Above 1 GHz Test Results:

ANT1 LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	65.72	-3.64	62.08	74	-11.92	peak
4824	49.30	-3.64	45.66	54	-8.34	AVG
7236	58.75	-0.95	57.80	74	-16.20	peak
7236	44.85	-0.95	43.90	54	-10.10	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	66.32	-3.64	62.68	74	-11.32	peak
4824	48.42	-3.64	44.78	54	-9.22	AVG
7236	56.11	-0.95	55.16	74	-18.84	peak
7236	44.04	-0.95	43.09	54	-10.91	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1 MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detect Type
4874	65.56	-3.51	62.05	74	-11.95	peak
4874	50.22	-3.51	46.71	54	-7.29	AVG
7311	57.76	-0.82	56.94	74	-17.06	peak
7311	43.28	-0.82	42.46	54	-11.54	AVG

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detect Type
4874	65.59	-3.51	62.08	74	-11.92	peak
4874	47.18	-3.51	43.67	54	-10.33	AVG
7311	60.39	-0.82	59.57	74	-14.43	peak
7311	43.95	-0.82	43.13	54	-10.87	AVG

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level
Margin = Emission level - Limits

ANT1 HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Correction Factor (dB)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detection Type
4924	64.01	-3.43	60.58	74	-13.42	peak
4924	47.32	-3.43	43.89	54	-10.11	AVG
7386	59.20	-0.75	58.45	74	-15.55	peak
7386	42.97	-0.75	42.22	54	-11.78	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Correction Factor (dB)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detection Type
4924	64.72	-3.43	61.29	74	-12.71	peak
4924	47.14	-3.43	43.71	54	-10.29	AVG
7386	56.81	-0.75	56.06	74	-17.94	peak
7386	42.50	-0.75	41.75	54	-12.25	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown "----" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT1 LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	64.23	-3.64	60.59	74	-13.41	peak
4824	49.07	-3.64	45.43	54	-8.57	AVG
7236	59.33	-0.95	58.38	74	-15.62	peak
7236	44.81	-0.95	43.86	54	-10.14	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	65.72	-3.64	62.08	74	-11.92	peak
4824	46.85	-3.64	43.21	54	-10.79	AVG
7236	58.92	-0.95	57.97	74	-16.03	peak
7236	45.13	-0.95	44.18	54	-9.82	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1 MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	ingFactor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detecto Type
4874	64.33	-3.51	60.82	74	-13.18	peak
4874	48.94	-3.51	45.43	54	-8.57	AVG
7311	59.38	-0.82	58.56	74	-15.44	peak
7311	44.98	-0.82	44.16	54	-9.84	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission le
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	ingFactor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detecto Type
4874	63.70	-3.51	60.19	74	-13.81	peak
4874	49.11	-3.51	45.60	54	-8.40	AVG
7311	60.38	-0.82	59.56	74	-14.44	peak
7311	44.83	-0.82	44.01	54	-9.99	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission le
Margin = Emission level - Limits

ANT1 HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Cable Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detected Type
4924	63.85	-3.43	60.42	74	-13.58	peak
4924	47.03	-3.43	43.60	54	-10.40	AVG
7386	59.62	-0.75	58.87	74	-15.13	peak
7386	43.68	-0.75	42.93	54	-11.07	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Cable Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detected Type
4924	62.67	-3.43	59.24	74	-14.76	peak
4924	46.08	-3.43	42.65	54	-11.35	AVG
7386	56.89	-0.75	56.14	74	-17.86	peak
7386	42.19	-0.75	41.44	54	-12.56	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown "----" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

Above 1GHz ANT1+ANT2 :

LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	66.13	-3.64	62.49	74	-11.51	peak
4824	50.19	-3.64	46.55	54	-7.45	AVG
7236	59.04	-0.95	58.09	74	-15.91	peak
7236	44.09	-0.95	43.14	54	-10.86	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	66.61	-3.64	62.97	74	-11.03	peak
4824	49.32	-3.64	45.68	54	-8.32	AVG
7236	56.30	-0.95	55.35	74	-18.65	peak
7236	43.46	-0.95	42.51	54	-11.49	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

LOW CH1 (802.11n/H20 Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detect Type
4874	66.16	-3.51	62.65	74	-11.35	peak
4874	50.64	-3.51	47.13	54	-6.87	AVG
7311	58.36	-0.82	57.54	74	-16.46	peak
7311	43.30	-0.82	42.48	54	-11.52	AVG

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detect Type
4874	63.08	-3.51	59.57	74	-14.43	peak
4874	48.67	-3.51	45.16	54	-8.84	AVG
7311	60.46	-0.82	59.64	74	-14.36	peak
7311	43.31	-0.82	42.49	54	-11.51	AVG

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level
Margin = Emission level - Limits

LOW CH1 (802.11n/H20 Mode)/2462

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Correction Factor (dB)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detection Type
4924	63.96	-3.43	60.53	74	-13.47	peak
4924	47.65	-3.43	44.22	54	-9.78	AVG
7386	58.75	-0.75	58.00	74	-16.00	peak
7386	43.89	-0.75	43.14	54	-10.86	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Correction Factor (dB)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detection Type
4924	63.25	-3.43	59.82	74	-14.18	peak
4924	45.75	-3.43	42.32	54	-11.68	AVG
7386	57.48	-0.75	56.73	74	-17.27	peak
7386	42.07	-0.75	41.32	54	-12.68	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown "----" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT1+ANT2 LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4844	63.49	-3.63	59.86	74	-14.14	peak
4844	47.05	-3.63	43.42	54	-10.58	AVG
7266	58.27	-0.94	57.33	74	-16.67	peak
7266	44.99	-0.94	44.05	54	-9.95	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4844	64.86	-3.63	61.23	74	-12.77	peak
4844	47.82	-3.63	44.19	54	-9.81	AVG
7266	58.15	-0.94	57.21	74	-16.79	peak
7266	45.30	-0.94	44.36	54	-9.64	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

ANT1+ANT2 MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	ingFactor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector T
4874	64.79	-3.51	61.28	74	-12.72	peak
4874	49.13	-3.51	45.62	54	-8.38	AVG
7311	59.69	-0.82	58.87	74	-15.13	peak
7311	45.49	-0.82	44.67	54	-9.33	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	ingFactor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector T
4874	62.31	-3.51	58.80	74	-15.20	peak
4874	46.53	-3.51	43.02	54	-10.98	AVG
7311	56.68	-0.82	55.86	74	-18.14	peak
7311	43.32	-0.82	42.50	54	-11.50	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level
Margin = Emission level - Limits

ANT1+ANT2 HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Cable Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4904	64.88	-3.43	61.45	74	-12.55	peak
4904	47.03	-3.43	43.60	54	-10.40	AVG
7356	57.77	-0.75	57.02	74	-16.98	peak
7356	42.42	-0.75	41.67	54	-12.33	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Cable Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4904	62.97	-3.43	59.54	74	-14.46	peak
4904	47.98	-3.43	44.55	54	-9.45	AVG
7356	56.42	-0.75	55.67	74	-18.33	peak
7356	44.34	-0.75	43.59	54	-10.41	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level
Margin = Emission level - Limits

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

Restricted bands around fundamental frequency (Radiated)

Operation Mode:

ANT 1 802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.17	-5.81	51.36	74	-22.64	peak
2390	/	-5.81	/	54	/	AVG
2399	63.33	-5.84	57.49	74	-16.51	peak
2399	49.82	-5.84	43.98	54	-10.02	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.89	-5.81	51.08	74	-22.92	peak
2390	/	-5.81	/	54	/	AVG
2399	62.97	-5.84	57.13	74	-16.87	peak
2399	47.68	-5.84	41.84	54	-12.16	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode:

ANT1 802.11b Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.14	-5.65	51.49	74	-22.51	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.83	-5.65	51.18	74	-22.82	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode:

ANT1 802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.23	-5.81	52.42	74	-21.58	peak
2390	/	-5.81	/	54	/	AVG
2399	62.47	-5.84	56.63	74	-17.37	peak
2399	47.18	-5.84	41.34	54	-12.66	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.65	-5.81	50.84	74	-23.16	peak
2390	/	-5.81	/	54	/	AVG
2399	61.53	-5.84	55.69	74	-18.31	peak
2399	46.73	-5.84	40.89	54	-13.11	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode:

ANT1 802.11g Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.75	-5.65	52.10	74	-21.90	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.50	-5.65	50.85	74	-23.15	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Operation Mode:

ANT1+ANT2 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.42	-5.81	51.61	74	-22.39	peak
2390	/	-5.81	/	54	/	AVG
2399	63.21	-5.84	57.37	74	-16.63	peak
2399	48.78	-5.84	42.94	54	-11.06	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.83	-5.81	51.02	74	-22.98	peak
2390	/	-5.81	/	54	/	AVG
2399	61.06	-5.84	55.22	74	-18.78	peak
2399	46.43	-5.84	40.59	54	-13.41	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode:

ANT1+ANT2 802.11n/H20 Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.82	-5.65	51.17	74	-22.83	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.30	-5.65	49.65	74	-24.35	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode:

ANT1+ANT2 802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	59.04	-5.81	53.23	74	-20.77	peak
2390	/	-5.81	/	54	/	AVG
2399	63.40	-5.84	57.56	74	-16.44	peak
2399	45.69	-5.84	39.85	54	-14.15	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.69	-5.81	51.88	74	-22.12	peak
2390	/	-5.81	/	54	/	AVG
2399	62.10	-5.84	56.26	74	-17.74	peak
2399	45.46	-5.84	39.62	54	-14.38	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode:

ANT1+ANT2 802.11n/H40 Mode TX CH High (2452MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.23	-5.65	51.58	74	-22.42	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.91	-5.65	50.26	74	-23.74	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

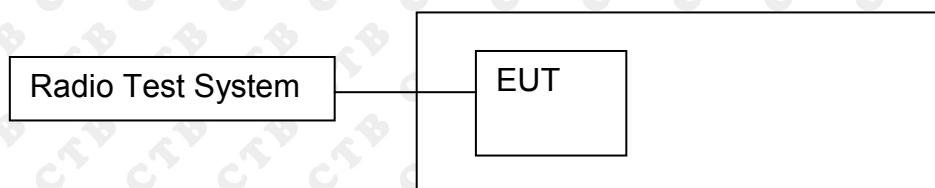

8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
 - Below 30MHz:
 - RBW = 100kHz, VBW = 300kHz, Sweep = auto
 - Detector function = peak, Trace = max hold
 - Above 30MHz:
 - RBW = 100KHz, VBW = 300KHz, Sweep = auto
 - Detector function = peak, Trace = max hold


8.4 Test Result

ANT1:




BAND EDGE Graphs


802.11g/LCH

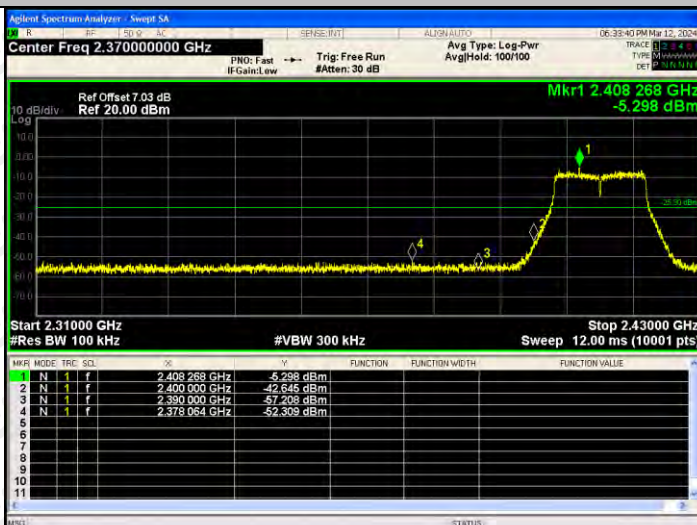


802.11g/HCH

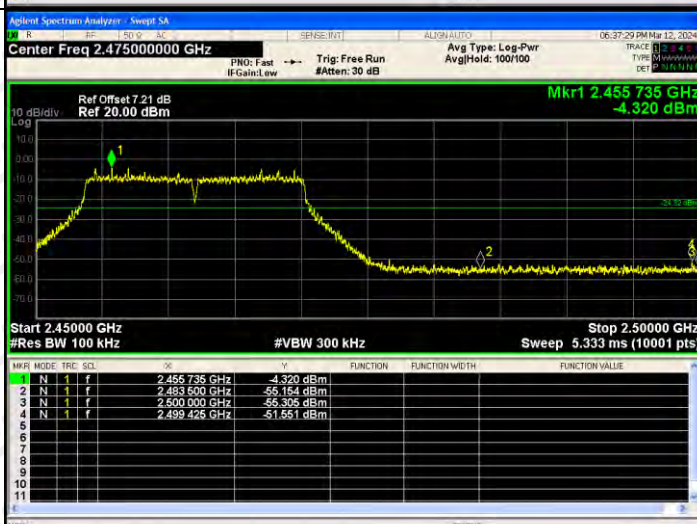


802.11n(HT20)/L
CH

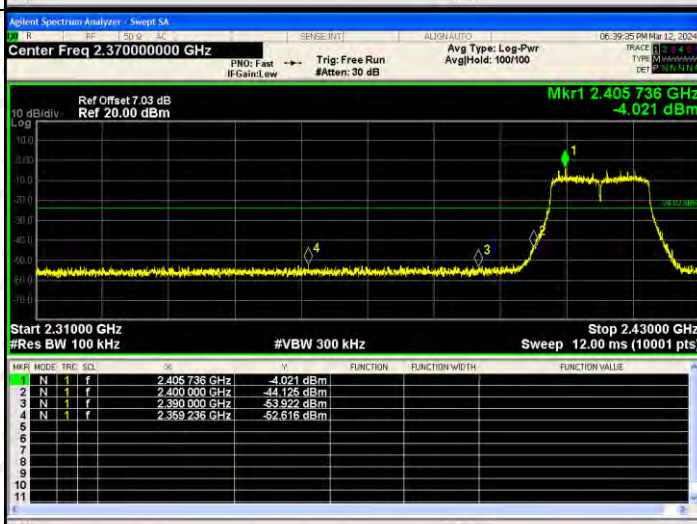

802.11n(HT20)/H
CH

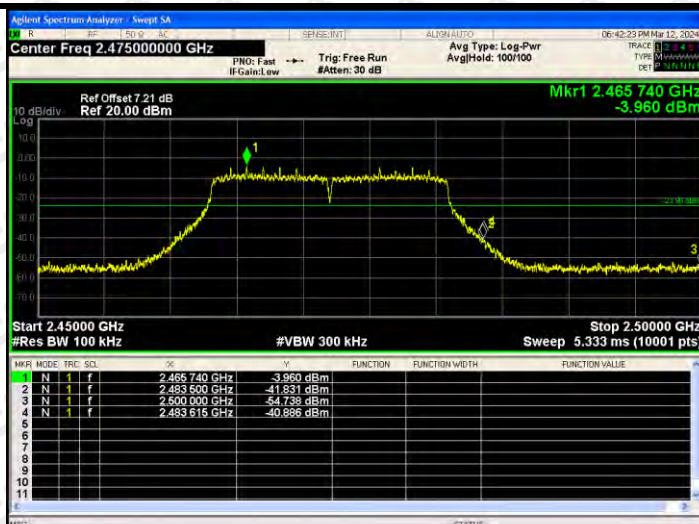

802.11n(HT40)/L
CH

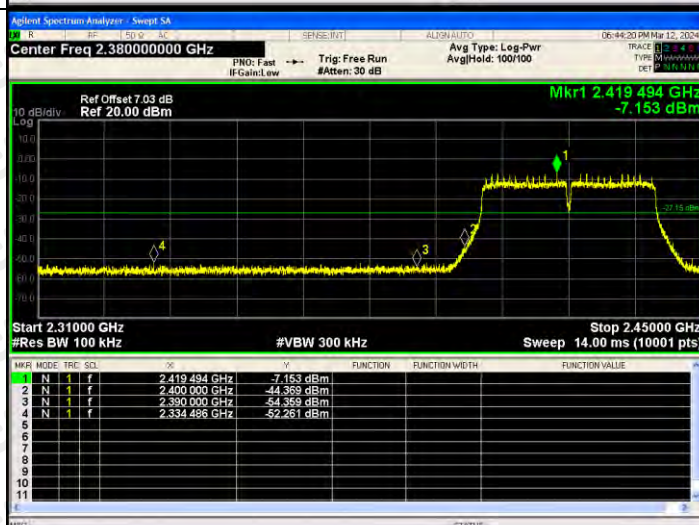


802.11n(HT40)/H
CH




RF Conducted Spurious Emissions Graphs


802.11b/LCH

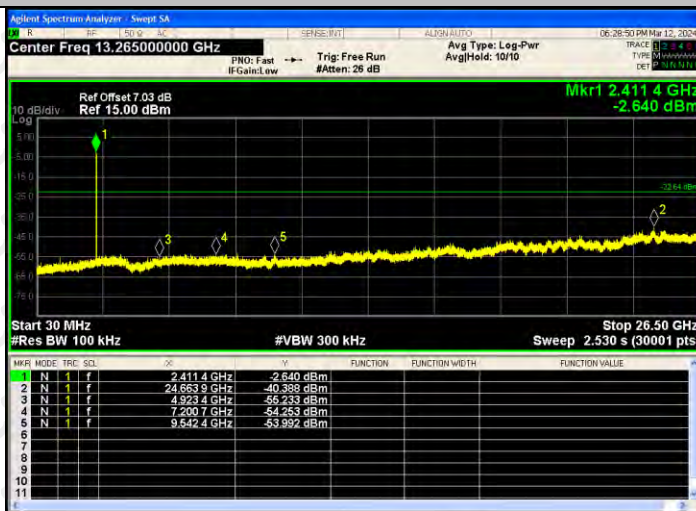

802.11b/MCH

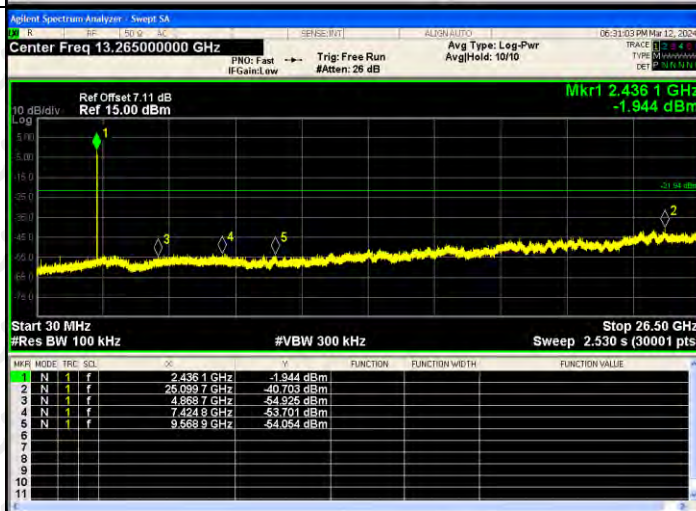


802.11b/HCH

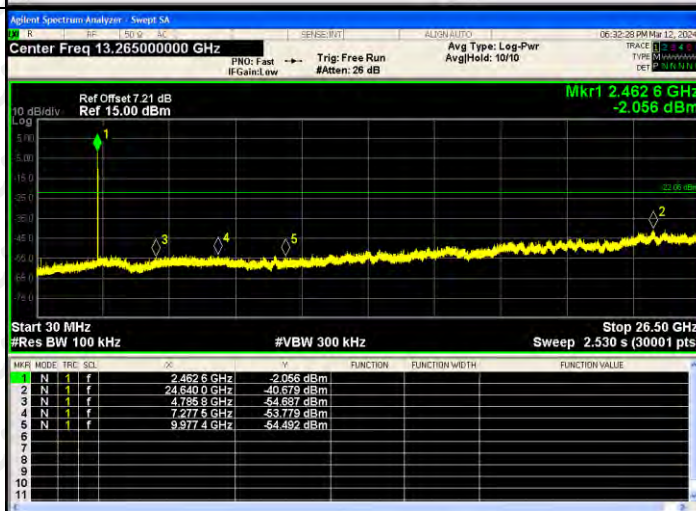


RF Conducted Spurious Emissions Graphs


802.11g/LCH

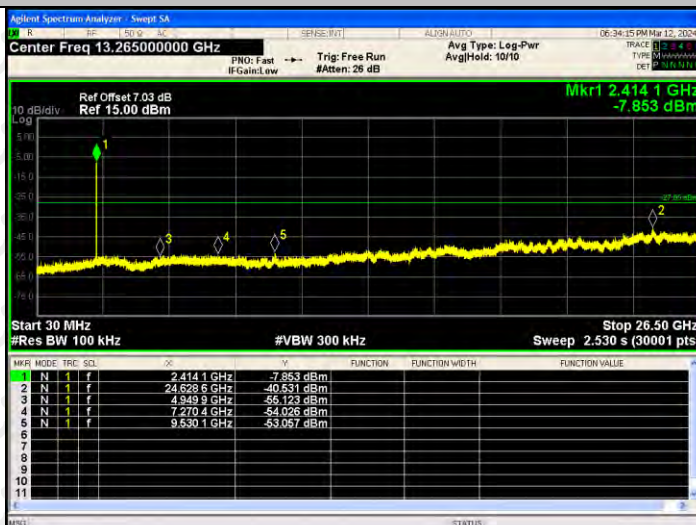

802.11g/MCH

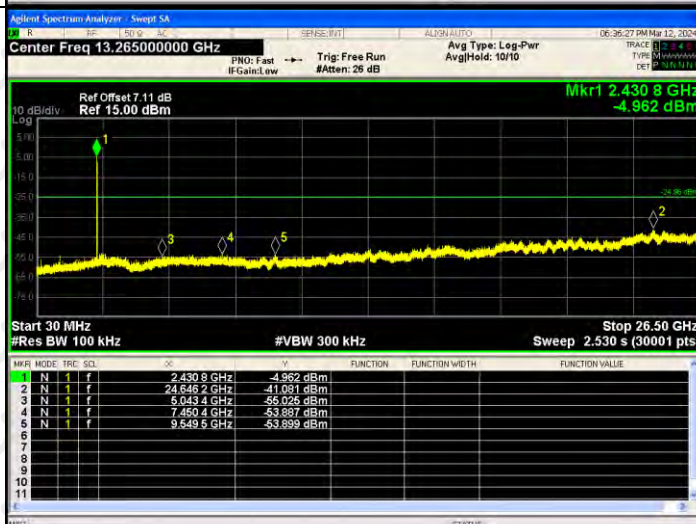


802.11g/HCH

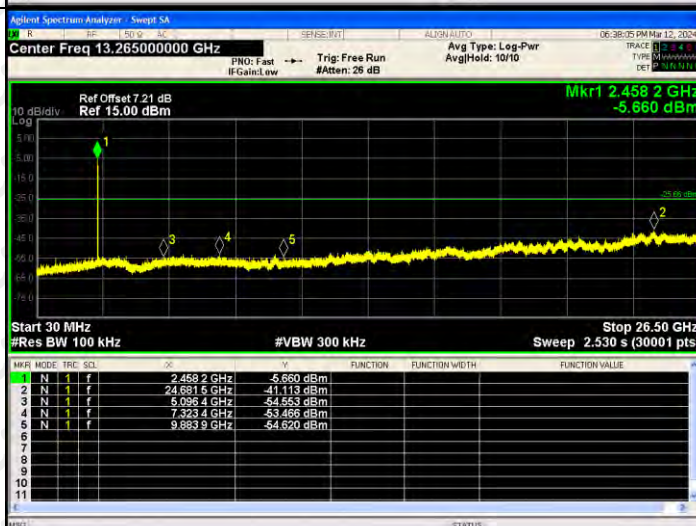


RF Conducted Spurious Emissions Graphs


802.11n(HT20)/LCH

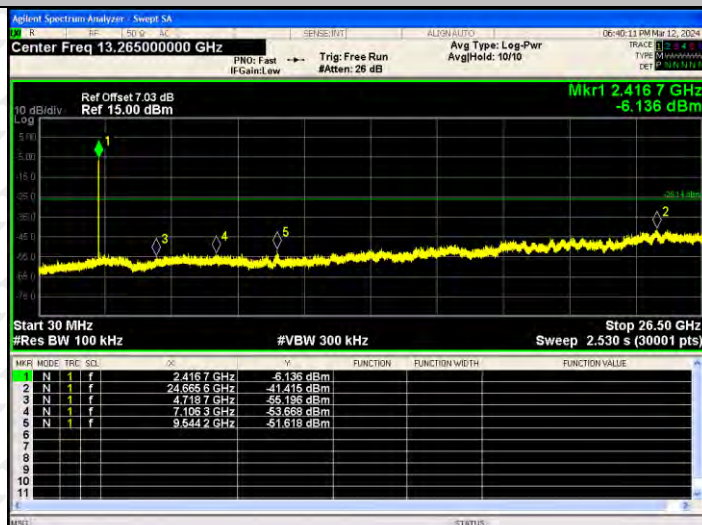


802.11 n(HT20)/MCH

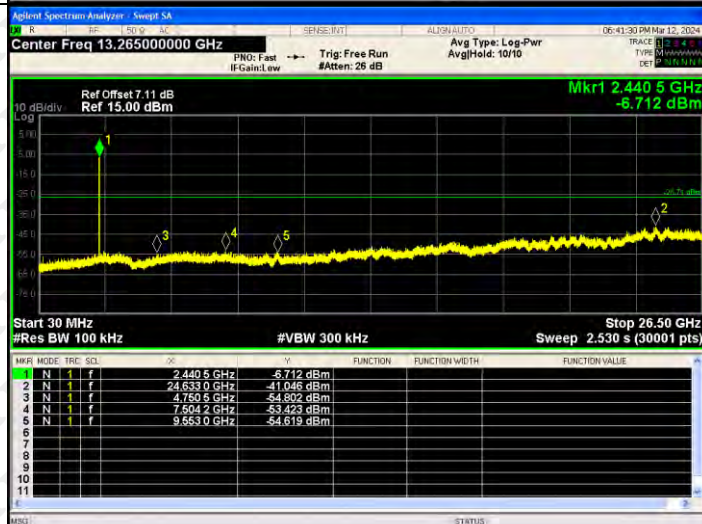


802.11 n(HT20)/HCH

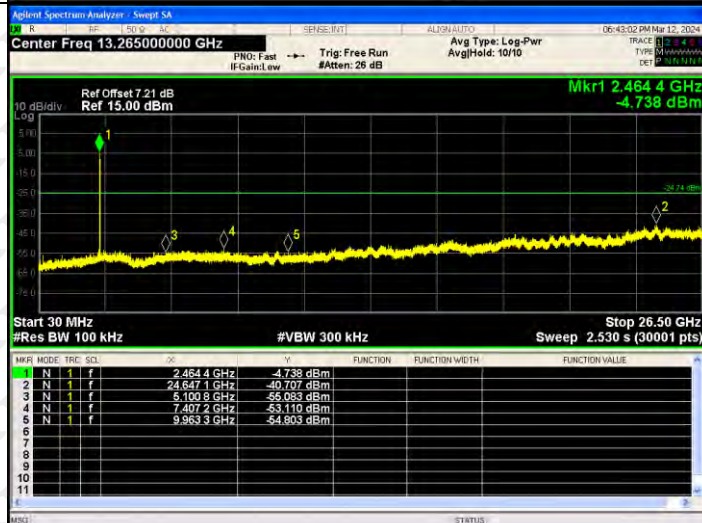


802.11n(HT40)/LCH

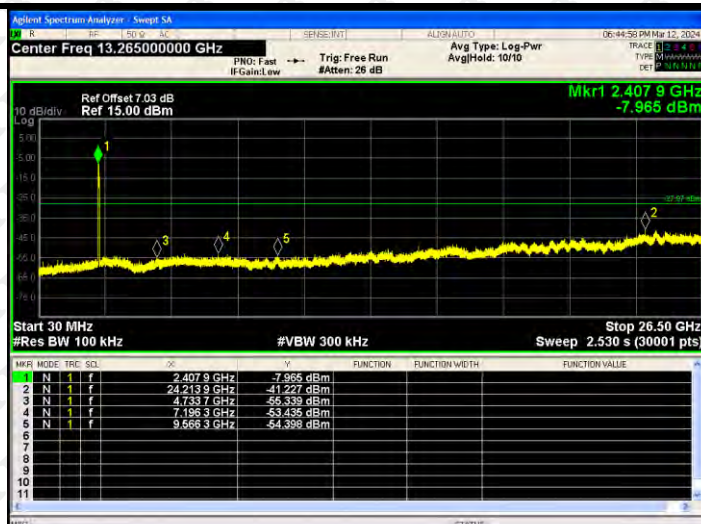

802.11 n(HT40)/MCH

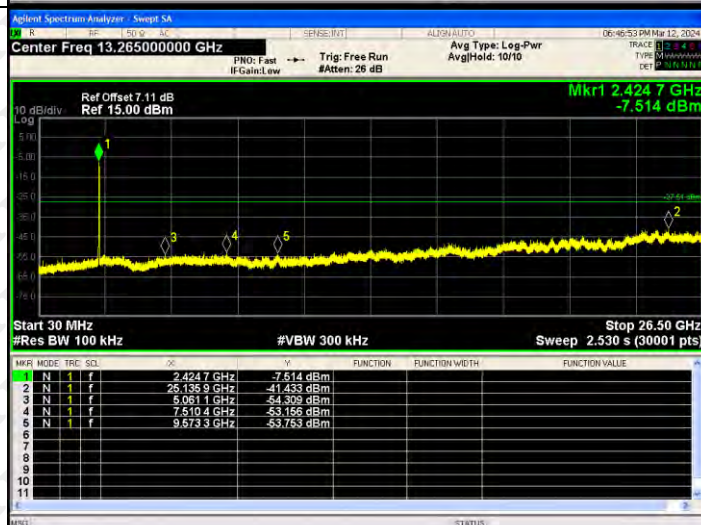


802.11 n(HT40)/HCH

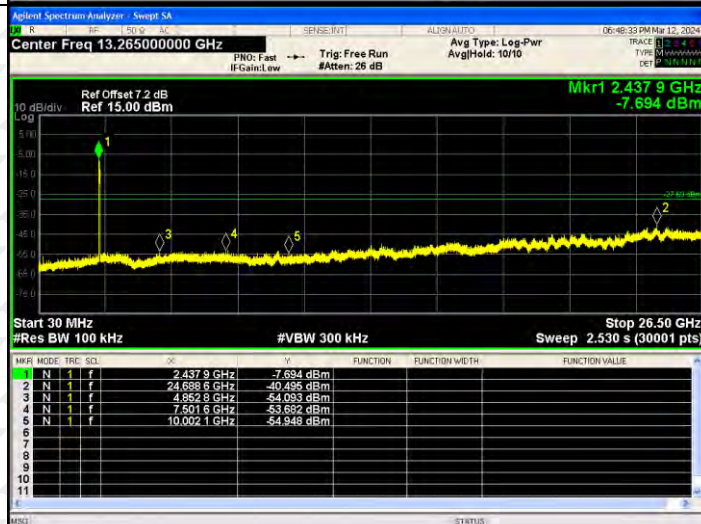


ANT2:

BAND EDGE Graphs

802.11b/LCH

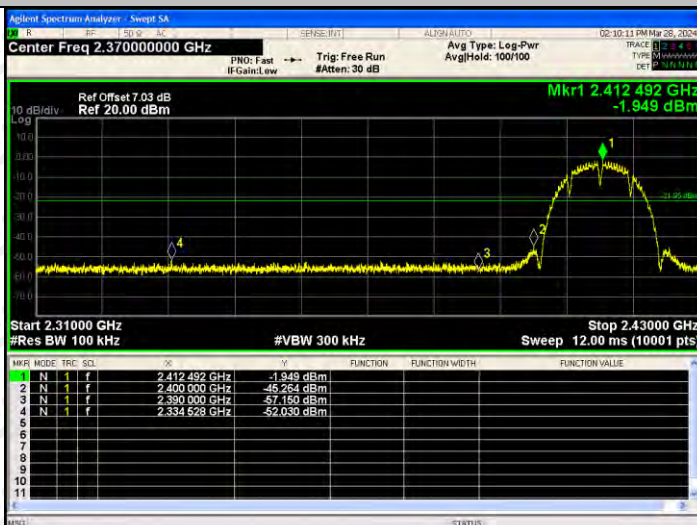


802.11b/HCH

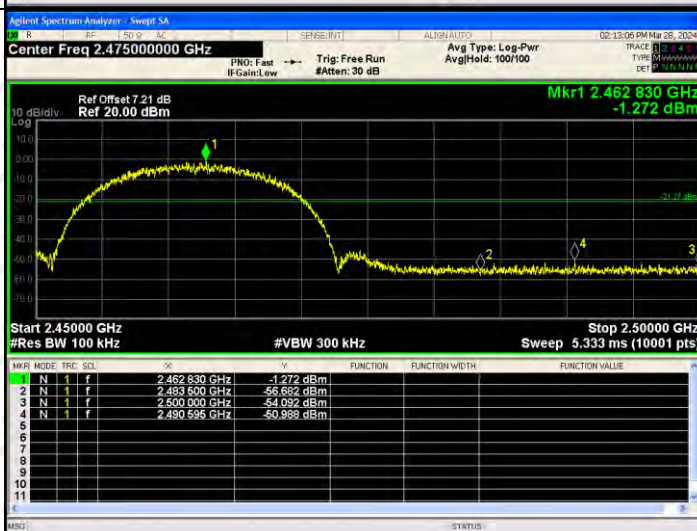


BAND EDGE Graphs


802.11g/LCH

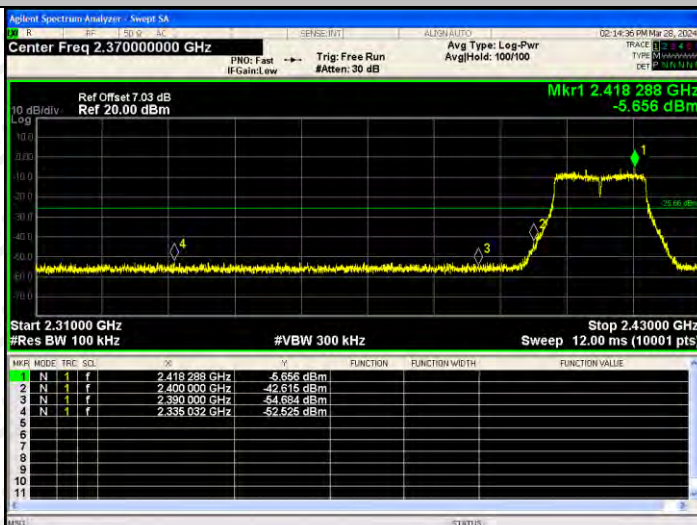


802.11g/HCH

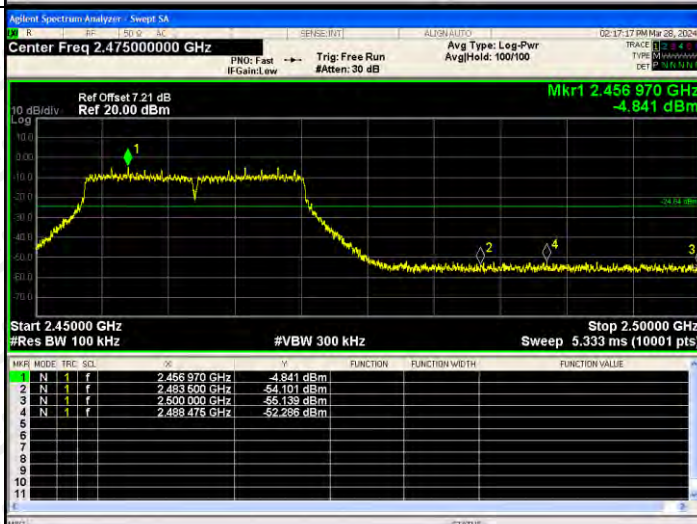


802.11n(HT20)/L
CH

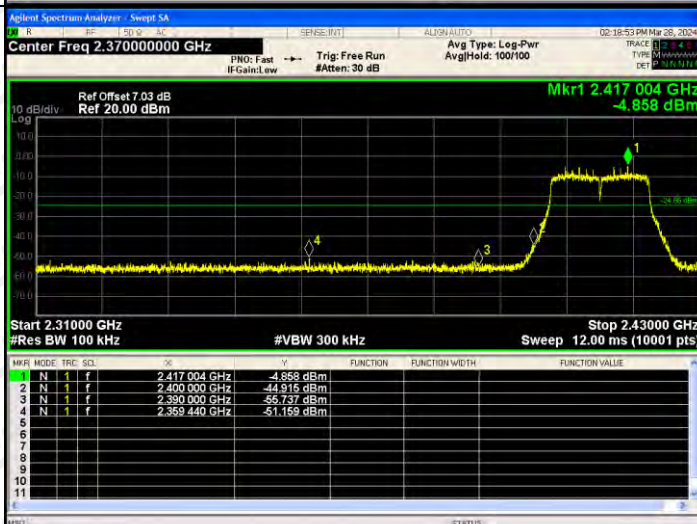


802.11n(HT20)/H
CH

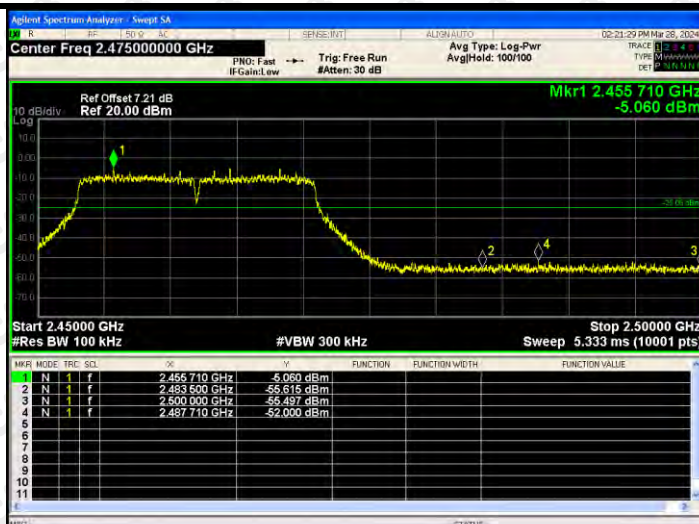

802.11n(HT40)/L
CH

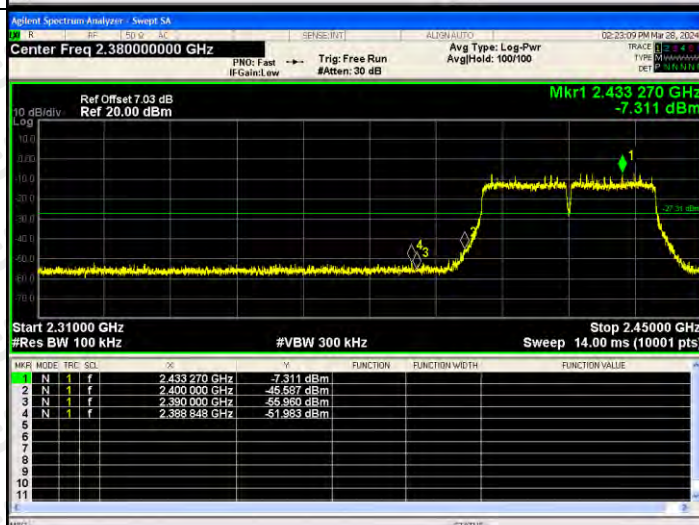


802.11n(HT40)/H
CH

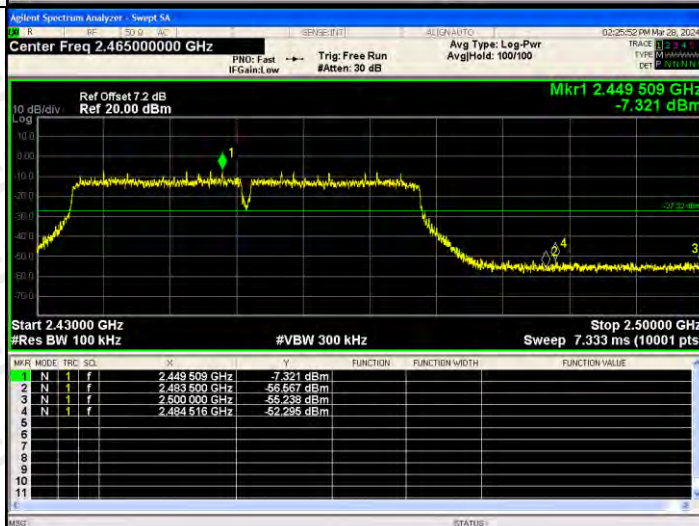


RF Conducted Spurious Emissions Graphs


802.11b/LCH

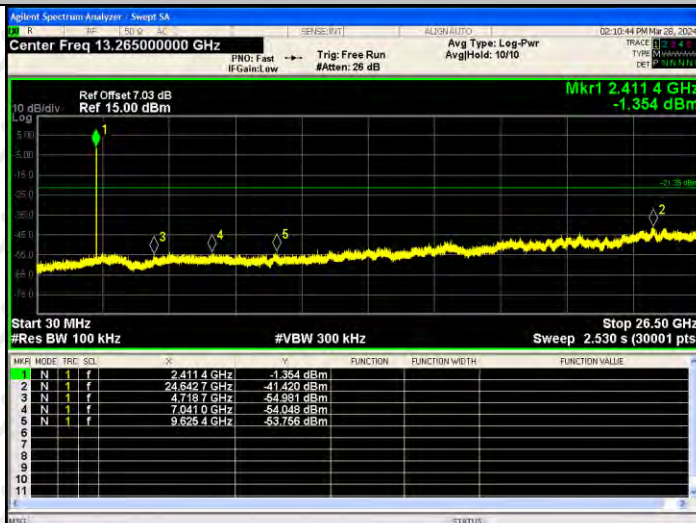

802.11b/MCH

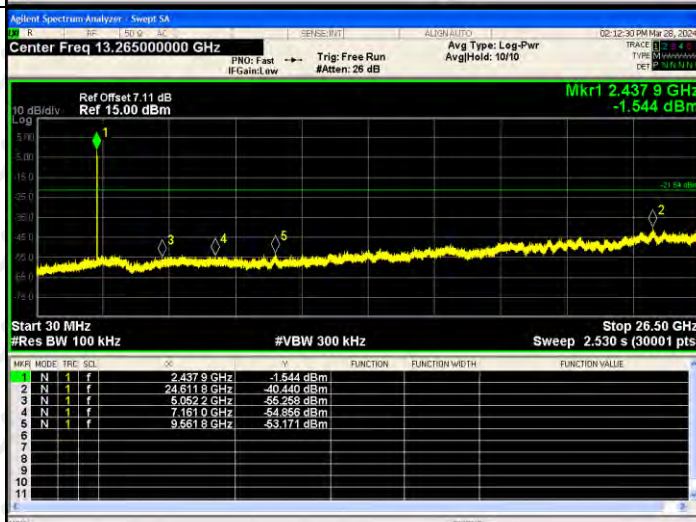


802.11b/HCH

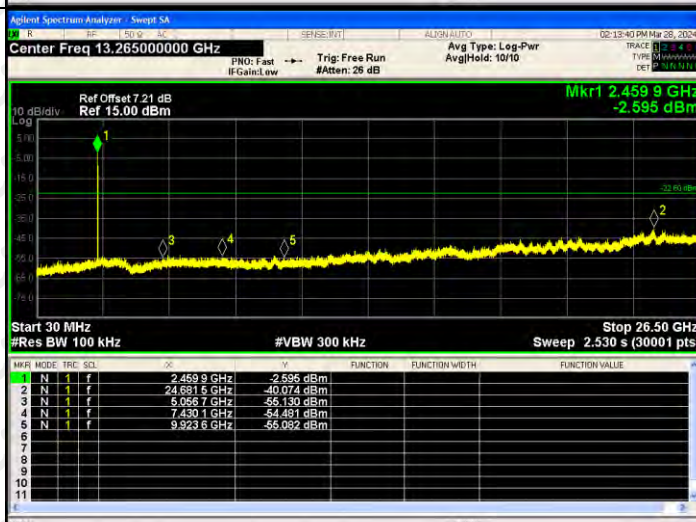


RF Conducted Spurious Emissions Graphs


802.11g/LCH

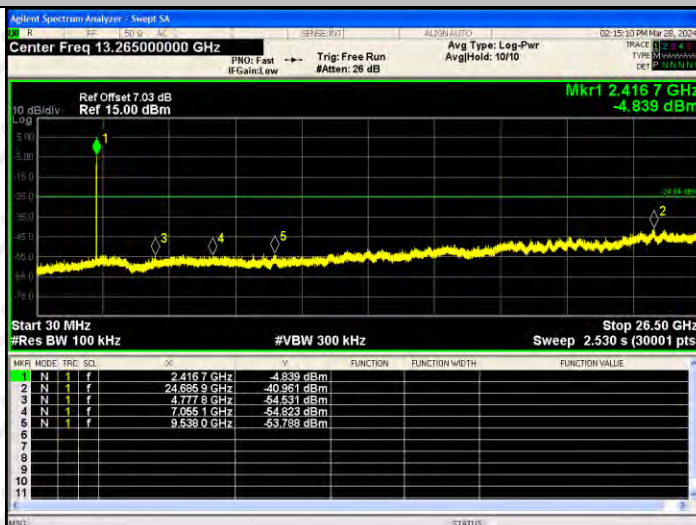

802.11g/MCH

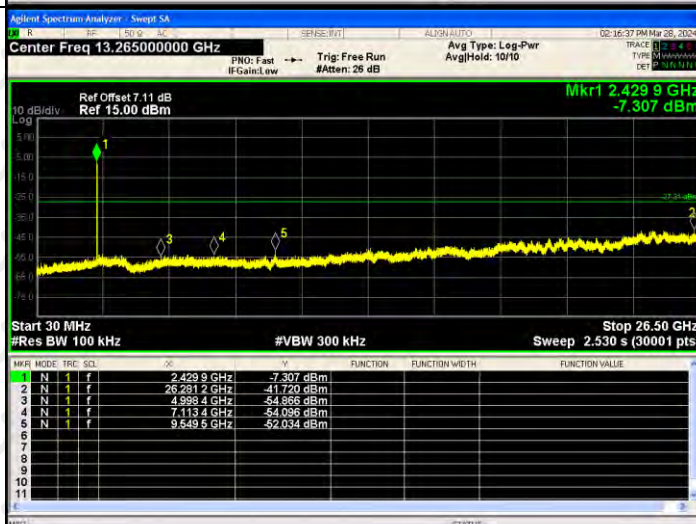


802.11g/HCH

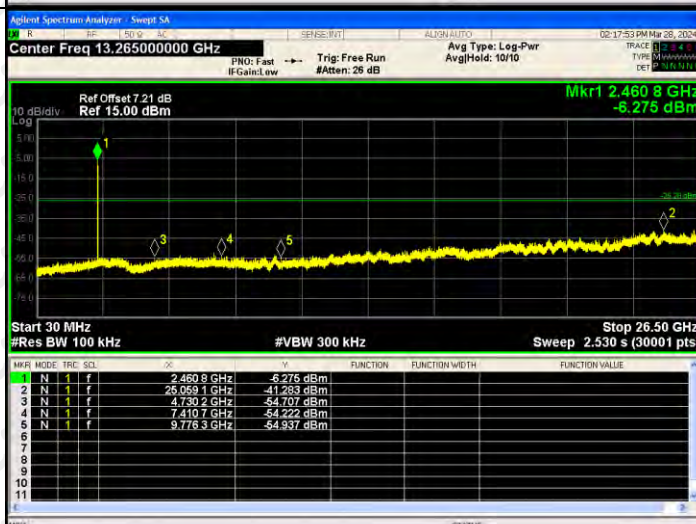


RF Conducted Spurious Emissions Graphs


802.11n(HT20)/LCH

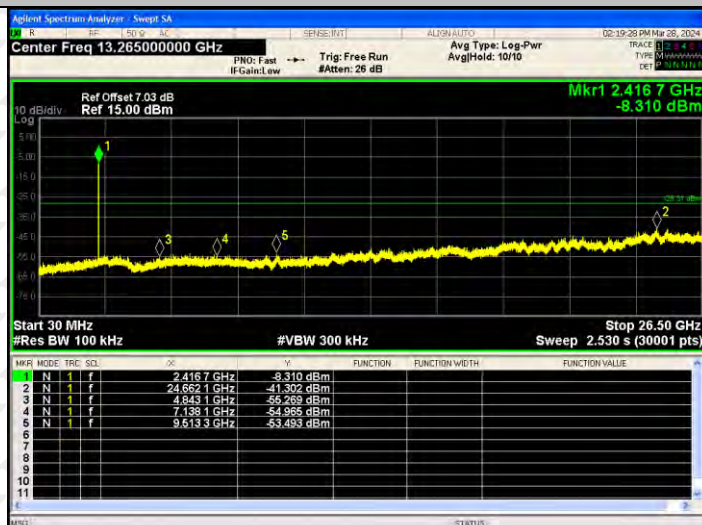

802.11 n(HT20)/MCH

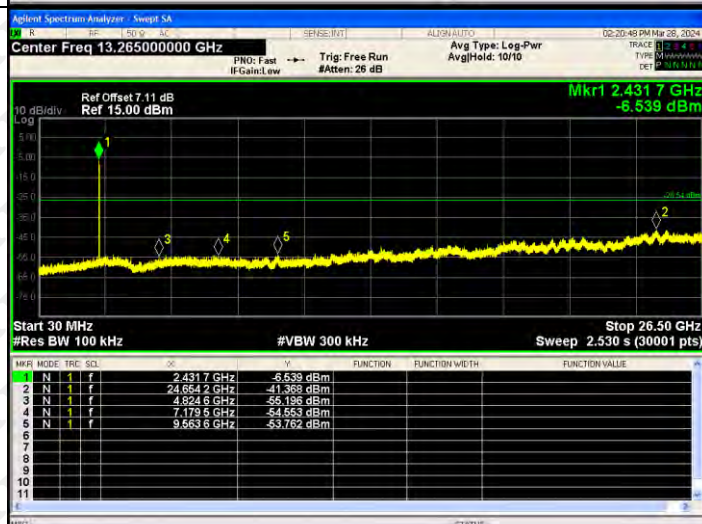

802.11 n(HT20)/HCH

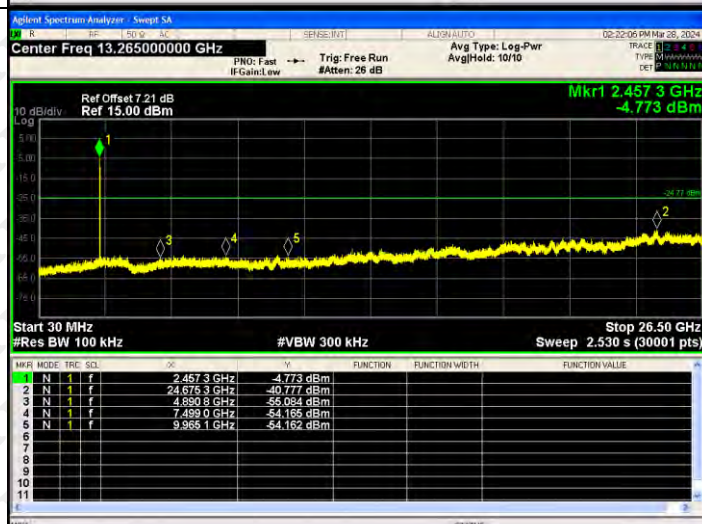

802.11n(HT40)/LCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 7.03 dB Ref 15.00 dBm Mkr1 2.425 5 GHz -7.736 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.530 s (30001 pts) <table><tr><th>Mkr</th><th>Mode</th><th>Freq</th><th>Power</th><th>Function</th><th>Function Width</th><th>Function Value</th></tr><tr><td>1</td><td>N</td><td>2.425 5 GHz</td><td>-7.736 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>24.654 2 GHz</td><td>-41.546 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>4.762 9 GHz</td><td>-55.232 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>7.109 8 GHz</td><td>-54.246 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>9.627 4 GHz</td><td>-53.912 dBm</td><td></td><td></td><td></td></tr></table>	Mkr	Mode	Freq	Power	Function	Function Width	Function Value	1	N	2.425 5 GHz	-7.736 dBm				2	N	24.654 2 GHz	-41.546 dBm				3	N	4.762 9 GHz	-55.232 dBm				4	N	7.109 8 GHz	-54.246 dBm				5	N	9.627 4 GHz	-53.912 dBm			
Mkr	Mode	Freq	Power	Function	Function Width	Function Value																																					
1	N	2.425 5 GHz	-7.736 dBm																																								
2	N	24.654 2 GHz	-41.546 dBm																																								
3	N	4.762 9 GHz	-55.232 dBm																																								
4	N	7.109 8 GHz	-54.246 dBm																																								
5	N	9.627 4 GHz	-53.912 dBm																																								
802.11 n(HT40)/MCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 7.11 dB Ref 15.00 dBm Mkr1 2.452 9 GHz -7.980 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.530 s (30001 pts) <table><tr><th>Mkr</th><th>Mode</th><th>Freq</th><th>Power</th><th>Function</th><th>Function Width</th><th>Function Value</th></tr><tr><td>1</td><td>N</td><td>2.452 9 GHz</td><td>-7.980 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>24.613 6 GHz</td><td>-41.376 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>4.869 0 GHz</td><td>-55.054 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>7.235 1 GHz</td><td>-54.551 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>9.690 1 GHz</td><td>-54.240 dBm</td><td></td><td></td><td></td></tr></table>	Mkr	Mode	Freq	Power	Function	Function Width	Function Value	1	N	2.452 9 GHz	-7.980 dBm				2	N	24.613 6 GHz	-41.376 dBm				3	N	4.869 0 GHz	-55.054 dBm				4	N	7.235 1 GHz	-54.551 dBm				5	N	9.690 1 GHz	-54.240 dBm			
Mkr	Mode	Freq	Power	Function	Function Width	Function Value																																					
1	N	2.452 9 GHz	-7.980 dBm																																								
2	N	24.613 6 GHz	-41.376 dBm																																								
3	N	4.869 0 GHz	-55.054 dBm																																								
4	N	7.235 1 GHz	-54.551 dBm																																								
5	N	9.690 1 GHz	-54.240 dBm																																								
802.11 n(HT40)/HCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 7.2 dB Ref 15.00 dBm Mkr1 2.437 0 GHz -7.269 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.530 s (30001 pts) <table><tr><th>Mkr</th><th>Mode</th><th>Freq</th><th>Power</th><th>Function</th><th>Function Width</th><th>Function Value</th></tr><tr><td>1</td><td>N</td><td>2.437 0 GHz</td><td>-7.269 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>24.656 9 GHz</td><td>-40.877 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>5.096 4 GHz</td><td>-55.027 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>7.180 4 GHz</td><td>-54.489 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>9.620 1 GHz</td><td>-54.921 dBm</td><td></td><td></td><td></td></tr></table>	Mkr	Mode	Freq	Power	Function	Function Width	Function Value	1	N	2.437 0 GHz	-7.269 dBm				2	N	24.656 9 GHz	-40.877 dBm				3	N	5.096 4 GHz	-55.027 dBm				4	N	7.180 4 GHz	-54.489 dBm				5	N	9.620 1 GHz	-54.921 dBm			
Mkr	Mode	Freq	Power	Function	Function Width	Function Value																																					
1	N	2.437 0 GHz	-7.269 dBm																																								
2	N	24.656 9 GHz	-40.877 dBm																																								
3	N	5.096 4 GHz	-55.027 dBm																																								
4	N	7.180 4 GHz	-54.489 dBm																																								
5	N	9.620 1 GHz	-54.921 dBm																																								

9. COUDUCTED OUTPUT POWER

9.1 Block Diagram Of Test Setup



9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Maximum Conducted Output Power	1 watt or 30dBm	2400-2483.5	PASS

9.3 Test procedure


1. The EUT was directly connected to the Power meter

9.4 Test Result

Mode	Channel.	Maximum Peak Power [dBm] ant 1	Maximum Peak Power [dBm] ant 2	Total Power Peak Output Power(dBm)	Limit[dBm]
802.11b	LCH	14.297	14.324	/	30
	MCH	14.712	14.637	/	30
	HCH	14.517	14.206	/	30
802.11g	LCH	14.205	13.322	/	30
	MCH	14.55	14.204	/	30
	HCH	13.903	13.536	/	30
802.11n(HT20)	LCH	14.241	13.231	16.776	30
	MCH	14.521	13.676	17.129	30
	HCH	11.215	13.35	15.423	30
802.11n(HT40)	LCH	14.001	13.443	16.741	30
	MCH	14.702	13.717	17.248	30
	HCH	14.259	13.684	16.991	30

10. 6DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

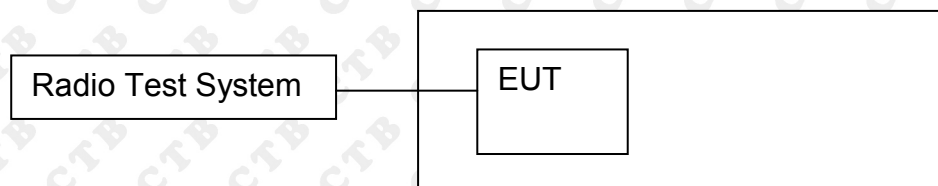

10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

10.3 Test procedure

1. Rem1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result

ANT1:

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	10.787	500	PASS
	MCH	9.234	500	PASS
	HCH	10.645	500	PASS
802.11g	LCH	16.345	500	PASS
	MCH	16.366	500	PASS
	HCH	16.365	500	PASS
802.11n(HT20)	LCH	17.597	500	PASS
	MCH	17.541	500	PASS
	HCH	13.8	500	PASS
802.11n(HT40)	LCH	35.459	500	PASS
	MCH	35.53	500	PASS
	HCH	35.343	500	PASS

ANT2:

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	10.252	500	PASS
	MCH	10.253	500	PASS
	HCH	11.158	500	PASS
802.11g	LCH	16.339	500	PASS
	MCH	16.357	500	PASS
	HCH	16.3	500	PASS
802.11n(HT20)	LCH	17.296	500	PASS
	MCH	17.574	500	PASS
	HCH	17.179	500	PASS
802.11n(HT40)	LCH	35.538	500	PASS
	MCH	35.552	500	PASS
	HCH	35.505	500	PASS

ANT1:


Test Graph:

Graphs

802.11b /LCH




802.11b /MCH

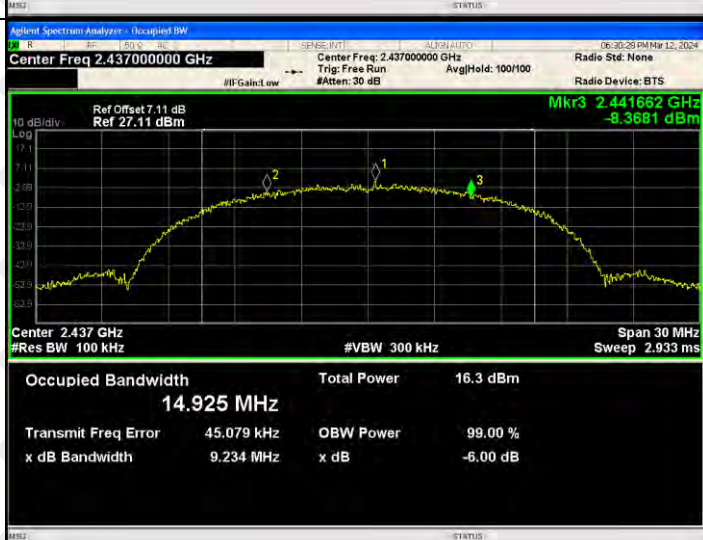


802.11b/HCH




802.11g/LCH



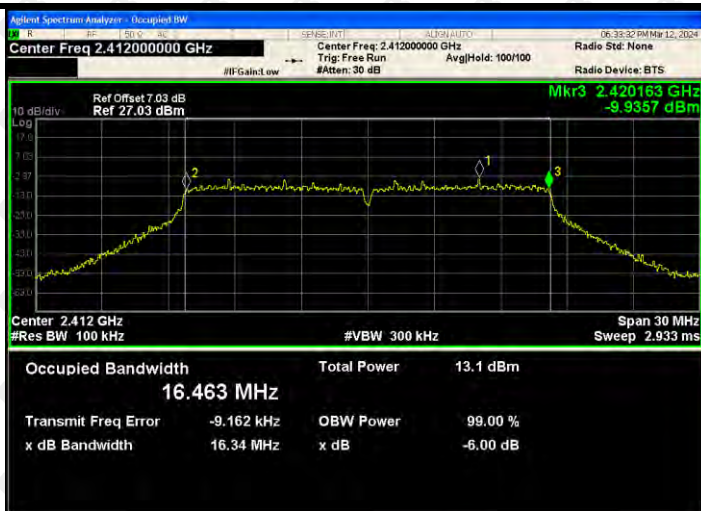





802.11g/MCH

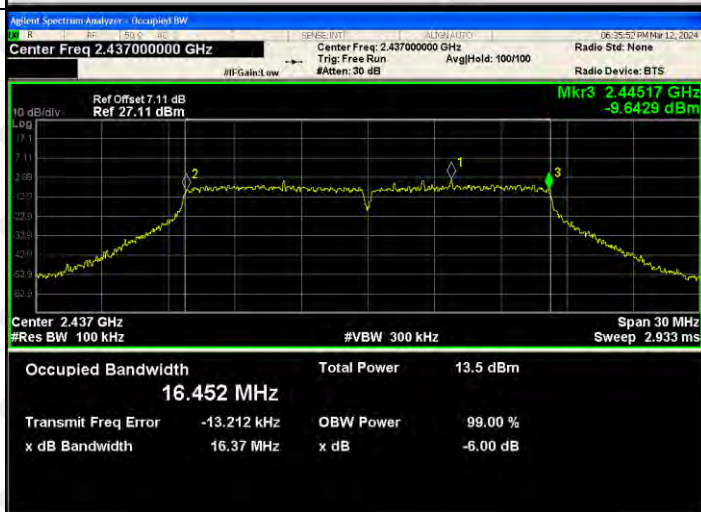

802.11g/HCH

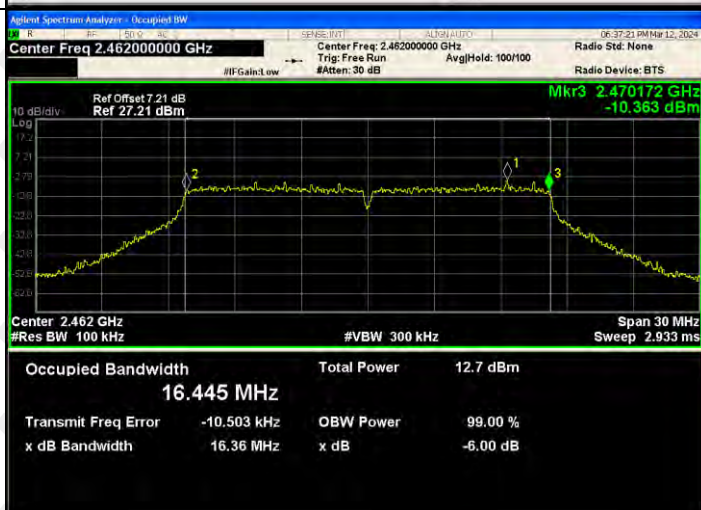

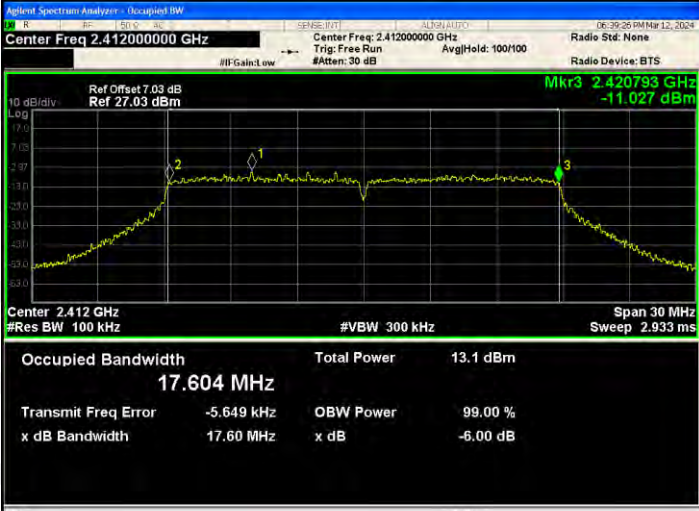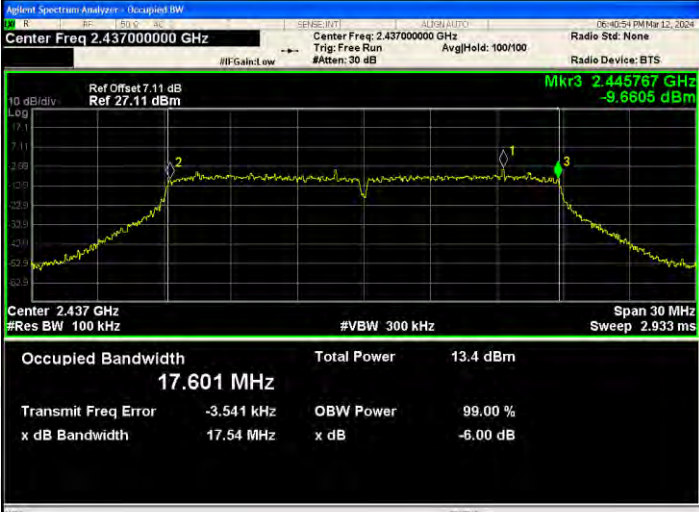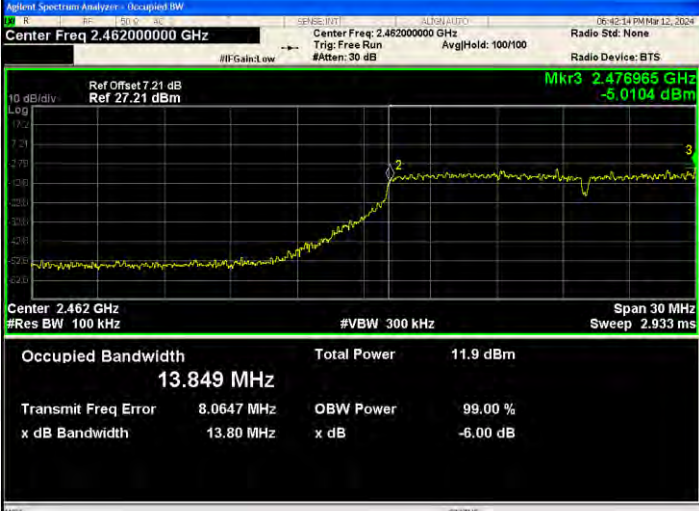802.11n(HT20)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.41200000 GHz Ref Offset: 7.03 dB Ref: 27.03 dBm Mkr3: 2.420793 GHz -11.027 dBm Center: 2.412 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms Occupied Bandwidth: 17.604 MHz Total Power: 13.1 dBm Transmit Freq Error: -5.649 kHz OBW Power: 99.00 % x dB Bandwidth: 17.60 MHz x dB: -6.00 dB
802.11n(HT20)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.43700000 GHz Ref Offset: 7.11 dB Ref: 27.11 dBm Mkr3: 2.445767 GHz -9.6605 dBm Center: 2.437 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms Occupied Bandwidth: 17.601 MHz Total Power: 13.4 dBm Transmit Freq Error: -3.541 kHz OBW Power: 99.00 % x dB Bandwidth: 17.54 MHz x dB: -6.00 dB
802.11n(HT20)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.46200000 GHz Ref Offset: 7.21 dB Ref: 27.21 dBm Mkr3: 2.476965 GHz -5.0104 dBm Center: 2.462 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms Occupied Bandwidth: 13.849 MHz Total Power: 11.9 dBm Transmit Freq Error: 8.0647 MHz OBW Power: 99.00 % x dB Bandwidth: 13.80 MHz x dB: -6.00 dB

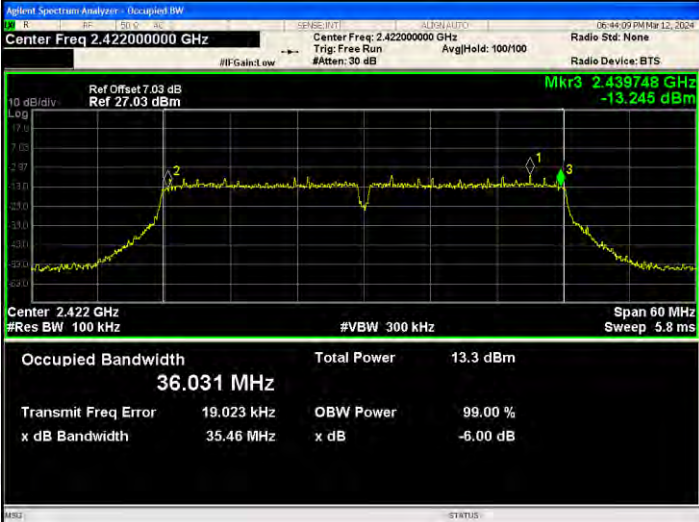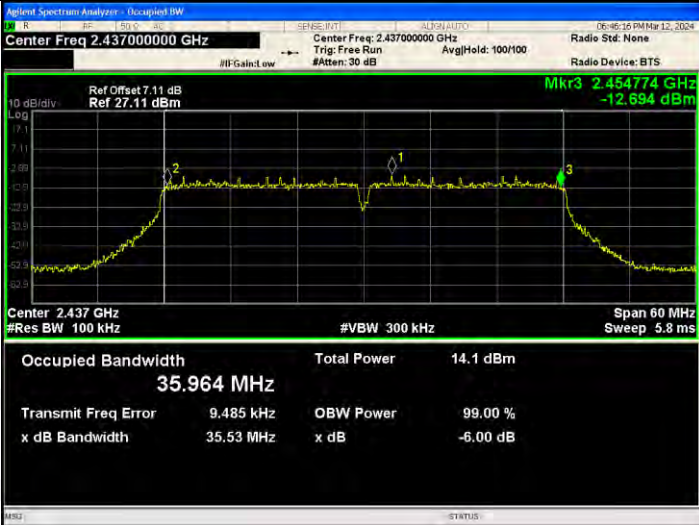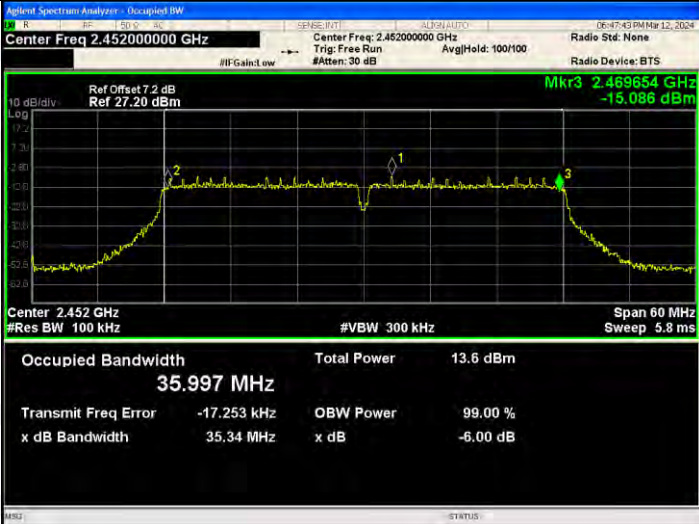802.11n(HT40)/LC H	
802.11n(HT40)/MC H	
802.11n(HT40)/HC H	

Graphs

Agilent Spectrum Analyzer - Occupied BW

02-11-17 PM14w 26, 2024

Center Freq 2.412000000 GHz

Ref Offset 7.03 dB
Ref 27.03 dBm

HP Gain Low

Center Freq: 2.412000000 GHz
Trig: Free Run
#Atten: 30 dB

ALPHA1170

Avg/Hold: 100/100

Radio Std: None

Radio Device: BTS

10 dB/div
Log

Mkr3 2.417085 GHz
-5.8957 dBm

Center 2.412 GHz
#Res BW 100 kHz

#VBW 300 kHz

Span 30 MHz
Sweep 2.933 ms

Occupied Bandwidth	Total Power	15.9 dBm
14.860 MHz		
Transmit Freq Error	-41.067 kHz	OBW Power
x dB Bandwidth	10.25 MHz	x dB

Agilent Spectrum Analyzer - Occupied BW

Center Freq 2.43700000 GHz

Ref Offset 7.11 dB
Ref 27.11 dBm

IF Gain: Low

Center Freq: 2.43700000 GHz
Trig: Free Run
AvalgHold: 100/100
#Atten: 30 dB

Radio Std: None
Radio Device: BTS

Mkr3 2.442101 GHz
-9.2299 dBm

10 dB/div
Log
7.11
2.00
10.0
20.0
30.0
40.0
50.0
60.0
70.0

Center 2.437 GHz
#Res BW 100 kHz

#VBW 300 kHz

Span 30 MHz
Sweep 2.933 ms

Occupied Bandwidth	Total Power
14.743 MHz	16.3 dBm

Transmit Freq Error	OBW Power
-25.322 kHz	99.00 %

x dB Bandwidth	x dB
10.25 MHz	-6.00 dB

Agilent Spectrum Analyzer - Occupied BW

Center Freq: 2.462000000 GHz
 #IF Gain: 1.00

Center Freq: 2.462000000 GHz
 Trig: Free Run
 Aftten: 30 dB
 Avg/Hold: 100/100

Radio Std: None
 Radio Device: BTS

Ref Offset: 7.21 dB
 Ref: 27.21 dBm

Mkr3: 2.467528 GHz
 -8.3065 dBm


Center 2.462 GHz
 #Res BW 100 kHz
 #VBW 300 kHz
 Span 30 MHz
 Sweep 2.933 ms

Occupied Bandwidth	Total Power
14.989 MHz	15.5 dBm


Transmit Freq Error	OBW Power
-51.083 kHz	99.00 %

x dB Bandwidth	x dB
11.16 MHz	-6.00 dB

802.11g/LCH

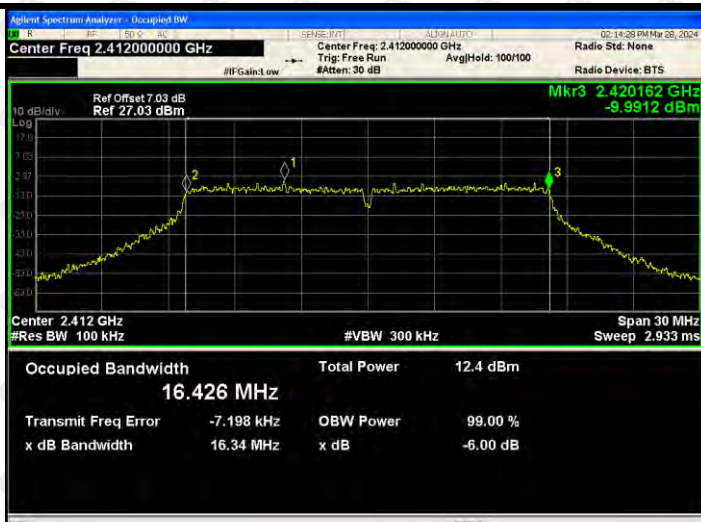


802.11g/MCH

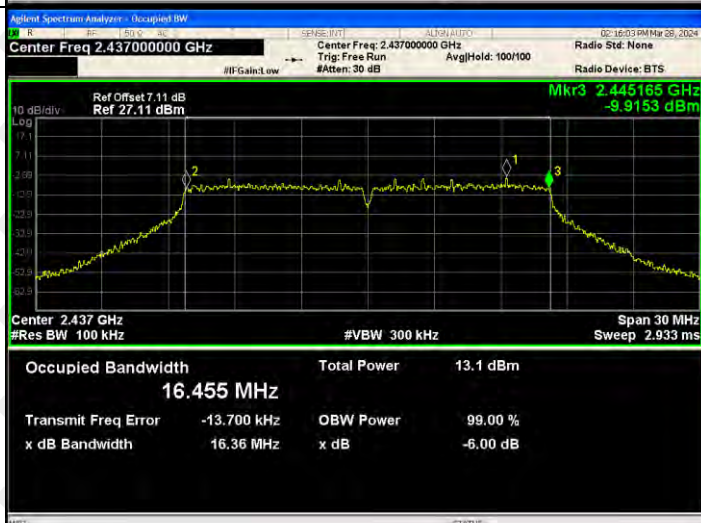


802.11g/HCH



802.11n(HT20)/LC
H



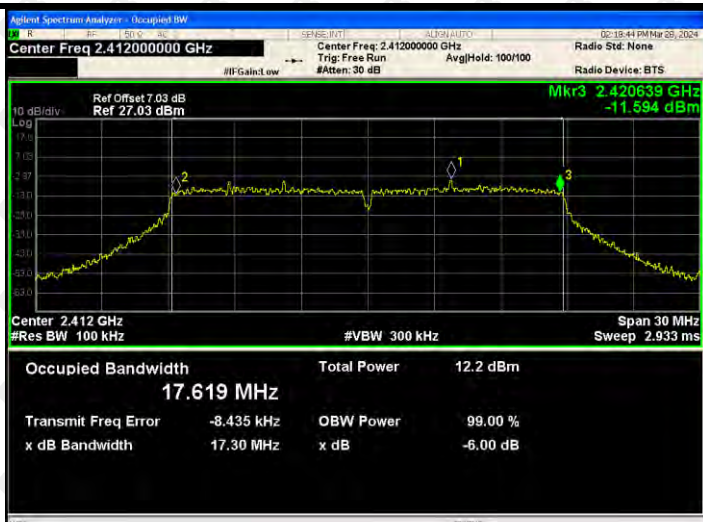


802.11n(HT20)/MC
H

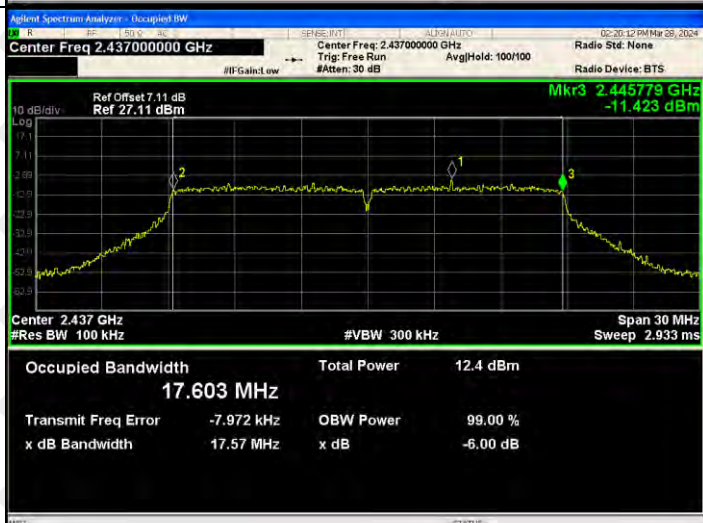


802.11n(HT20)/HC
H

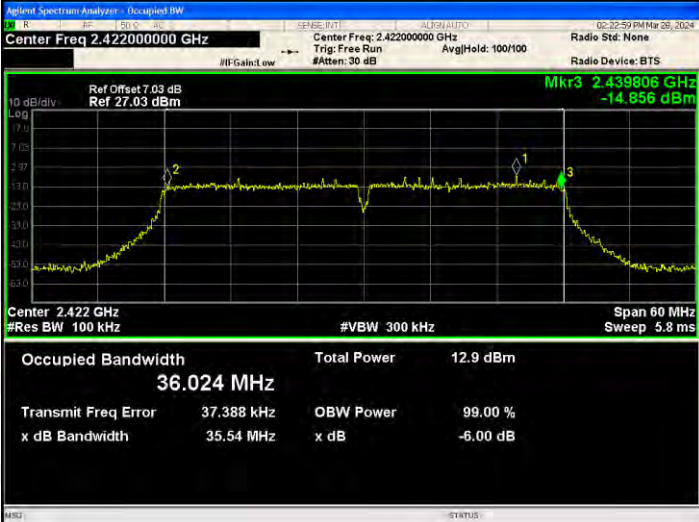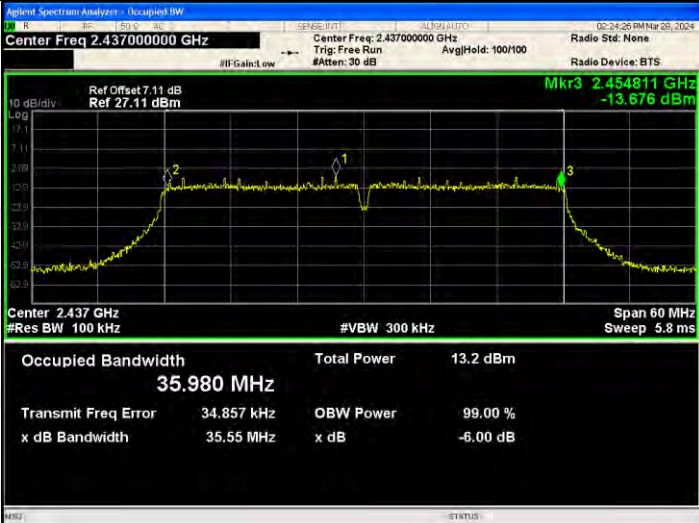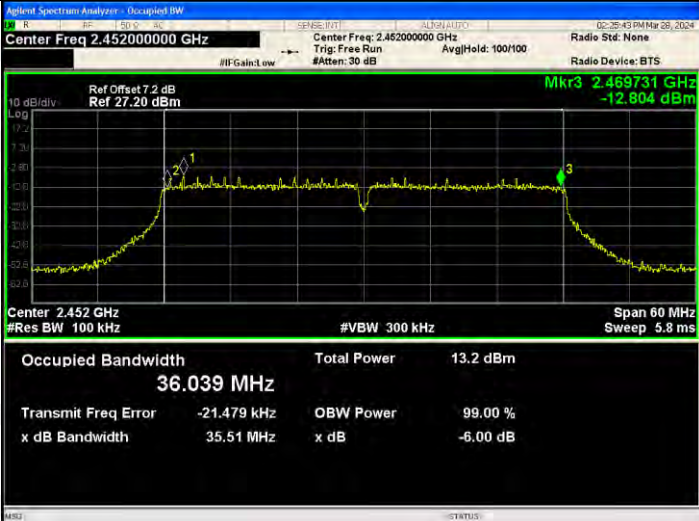

802.11n(HT40)/LC H	
802.11n(HT40)/MC H	
802.11n(HT40)/HC H	

11. POWER SPECTRAL DENSITY

11.1 Block Diagram Of Test Setup

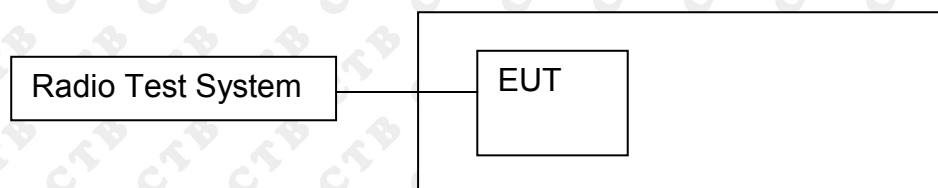

11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS


11.3 Test procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = PEAK.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


11.4 Test Result

Mode	Channel.	Power Spectral Density [dBm /3KHz] ANT 1	Power Spectral Density [dBm /3KHz] ANT 2	Power Spectral Density [dBm /3KHz] Total	Limit(dBm)
802.11b	LCH	-15.978	-16.286	/	8
	MCH	-15.121	-14.823	/	8
	HCH	-15.924	-17.051	/	8
802.11g	LCH	-19.865	-18.985	/	8
	MCH	-19.193	-19.785	/	8
	HCH	-20.228	-20.205	/	8
802.11n(H T20)	LCH	-19.021	-19.677	-16.326	8
	MCH	-19.162	-18.84	-15.988	8
	HCH	-19.656	-19.776	-16.705	8
802.11n(H T40)	LCH	-22.917	-23.717	-20.288	8
	MCH	-22.057	-22.567	-19.294	8
	HCH	-22.118	-22.743	-19.409	8

ANT1: Test Graph

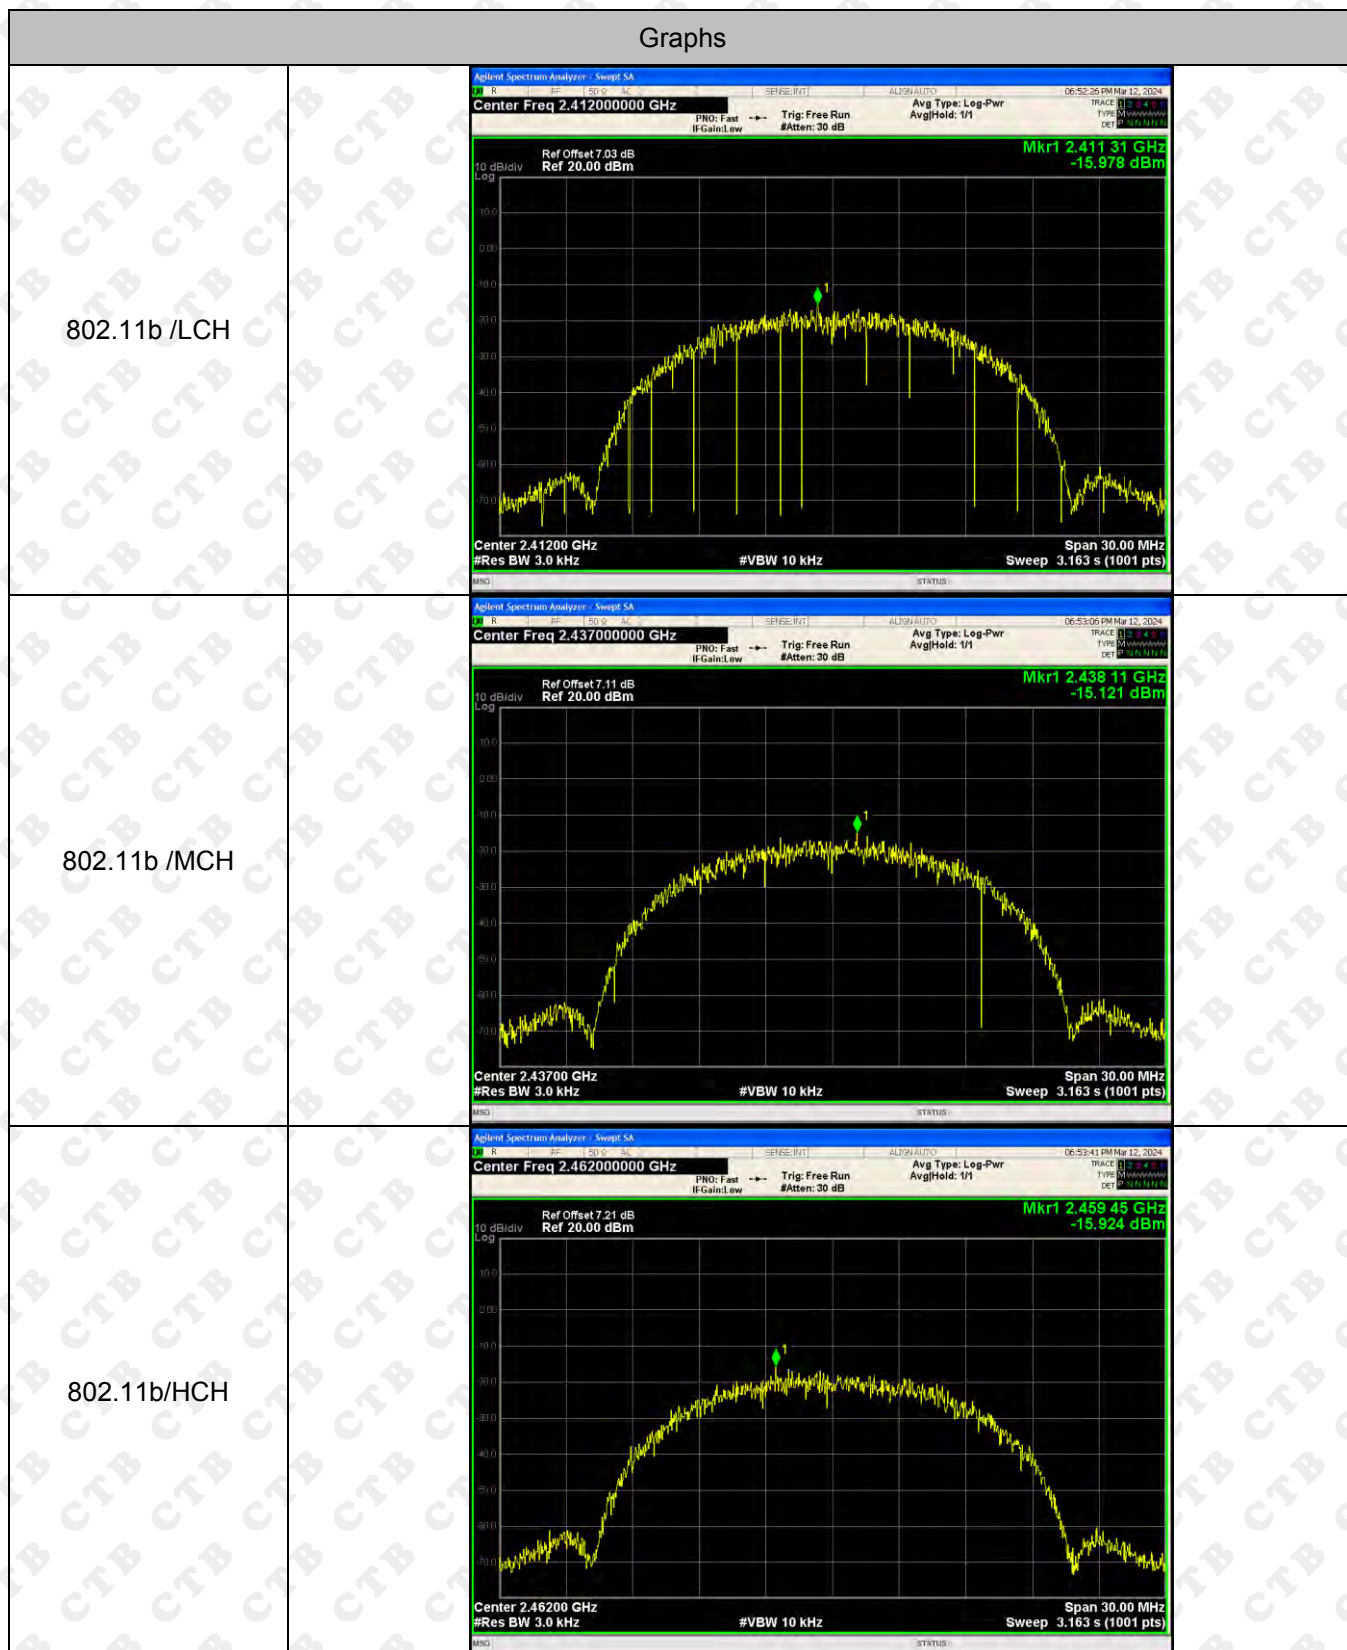


802.11g/LCH

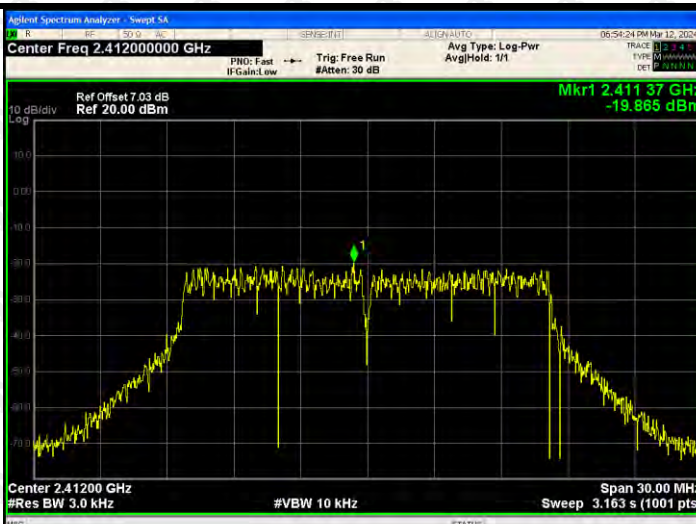




802.11g/MCH




802.11g/HCH

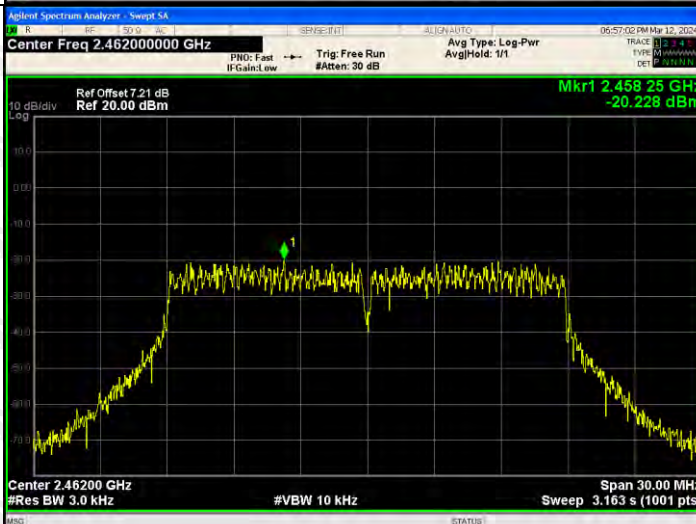

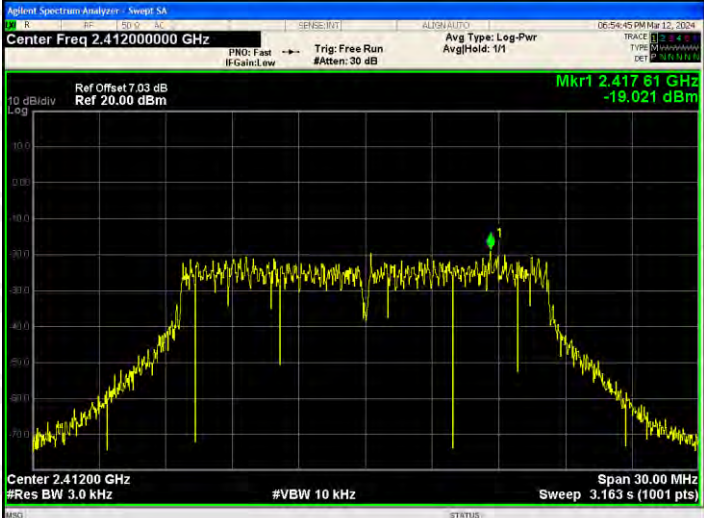802.11n(HT20)/LCH	
802.11n(HT20)/MCH	
802.11n(HT20)/HCH	

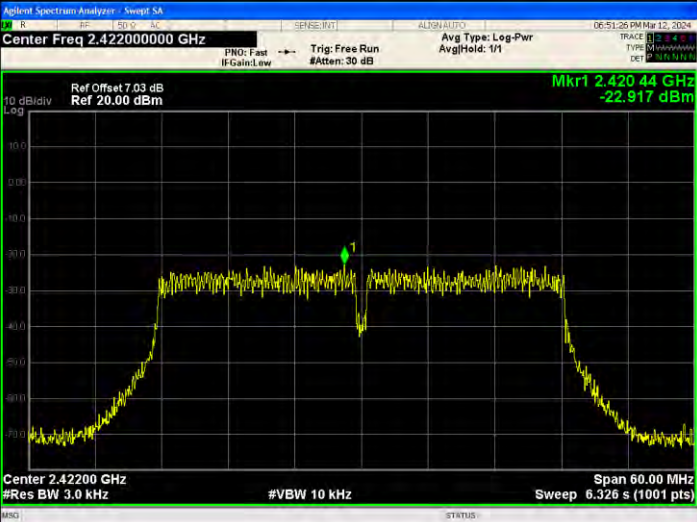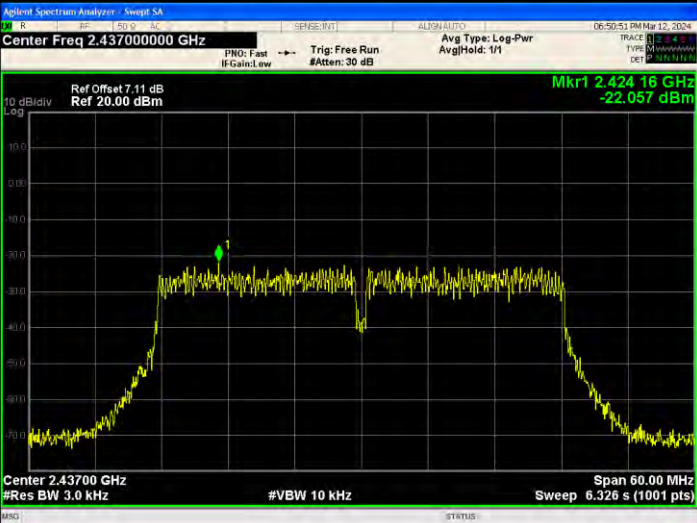802.11n(HT40)/LCH	
802.11n(HT40)/MCH	
802.11n(HT40)/HCH	


ANT2: Test Graph

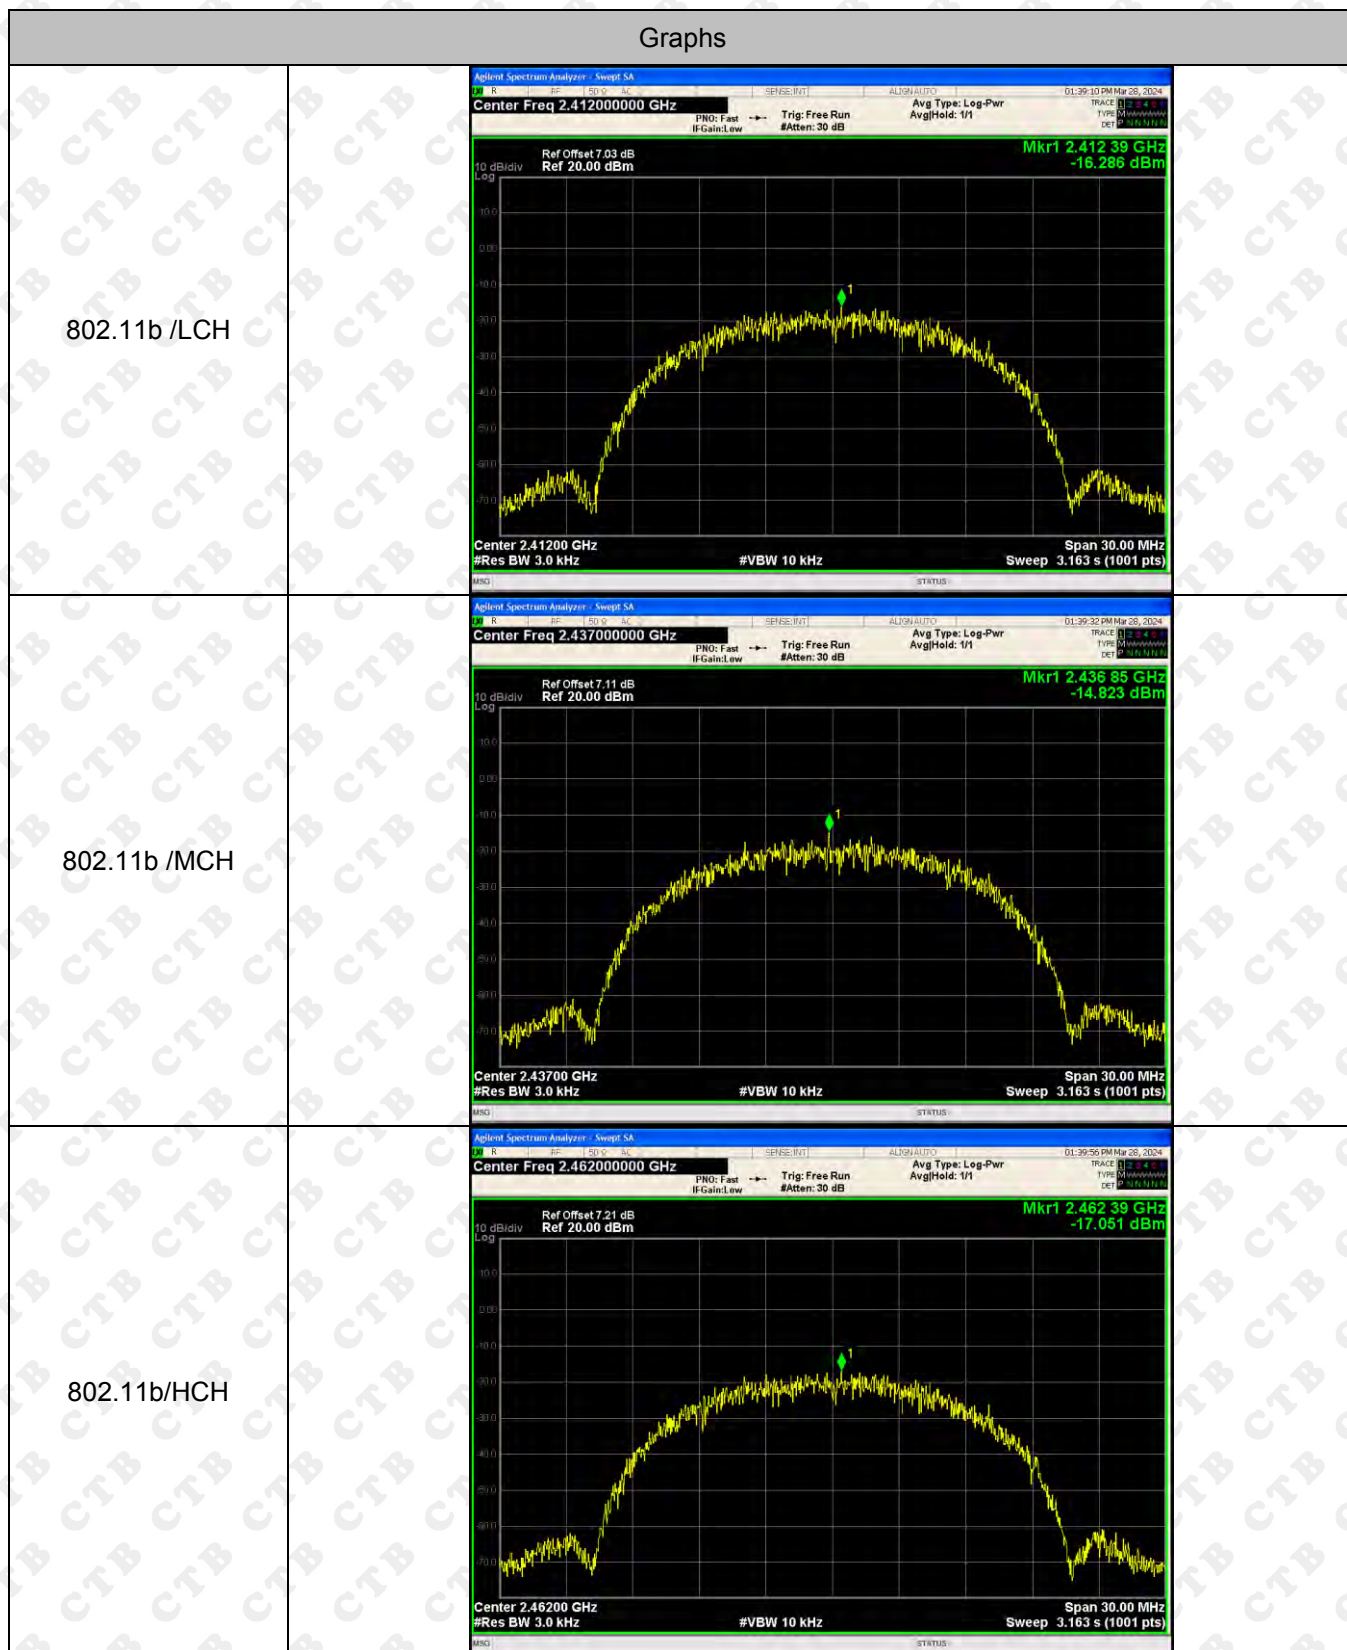


802.11g/LCH




802.11g/MCH

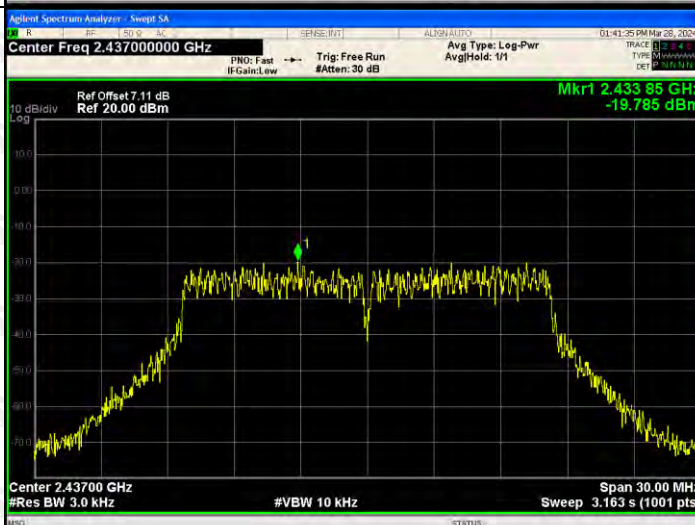

802.11g/HCH

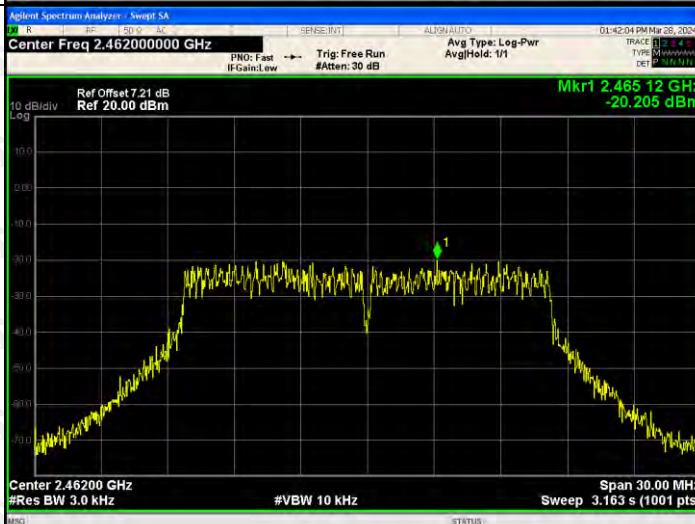

802.11n(HT20)/LCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.41200000 GHz Ref Offset 7.03 dB Ref 20.00 dBm Mkr1 2.41911 GHz -19.677 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11n(HT20)/MCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.43700000 GHz Ref Offset 7.11 dB Ref 20.00 dBm Mkr1 2.43265 GHz -18.840 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11n(HT20)/HCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.46200000 GHz Ref Offset 7.21 dB Ref 20.00 dBm Mkr1 2.46698 GHz -19.776 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)

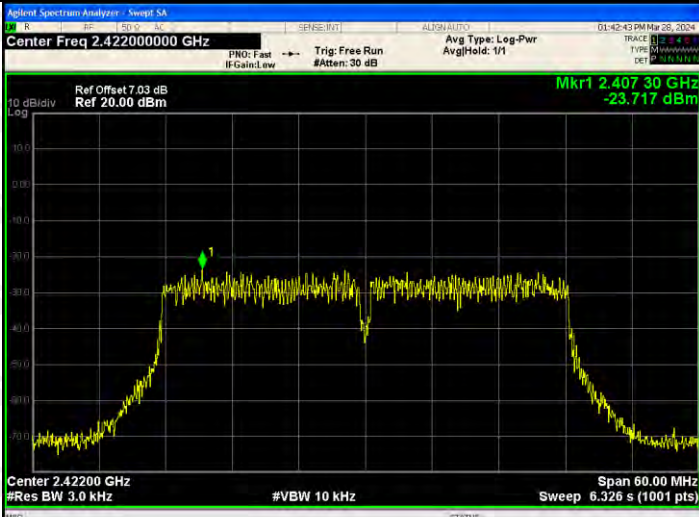802.11n(HT40)/LCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.42200000 GHz Ref Offset 7.03 dB Ref 20.00 dBm Mkr1 2.40730 GHz -23.717 dBm Center 2.42200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/MCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.43700000 GHz Ref Offset 7.11 dB Ref 20.00 dBm Mkr1 2.44264 GHz -22.567 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/HCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.45200000 GHz Ref Offset 7.2 dB Ref 20.00 dBm Mkr1 2.45044 GHz -22.743 dBm Center 2.45200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)

12. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


EUT Antenna:

The antenna is FPC antenna and no consideration of replacement. The best case gain of the antenna is ANT1:3.93dBi, ANT2:3.79dBi.

13. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission

Below 1G

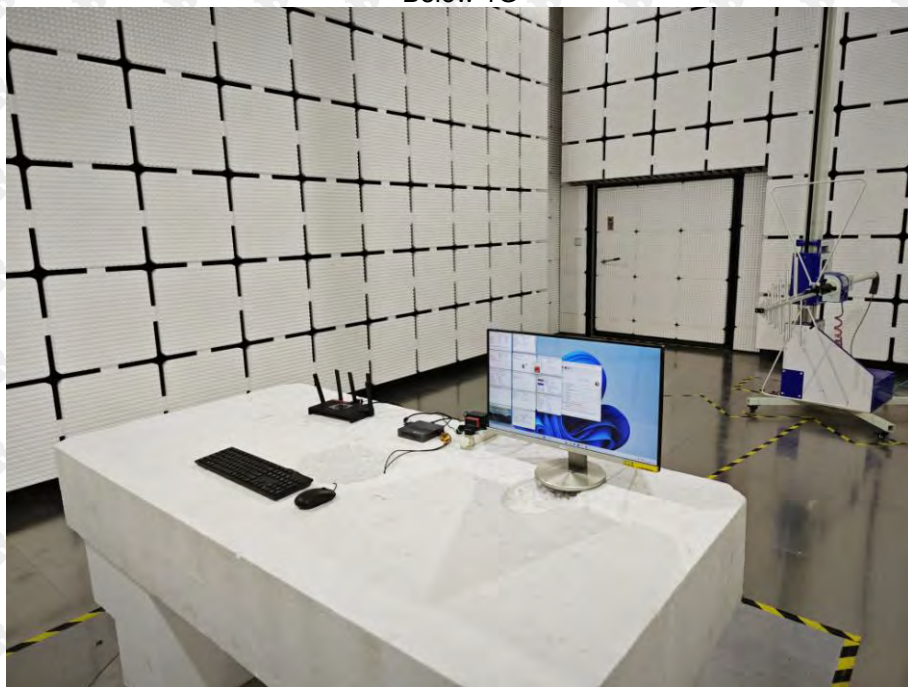

Above 1G



Conducted Emission



***** END OF REPORT *****