


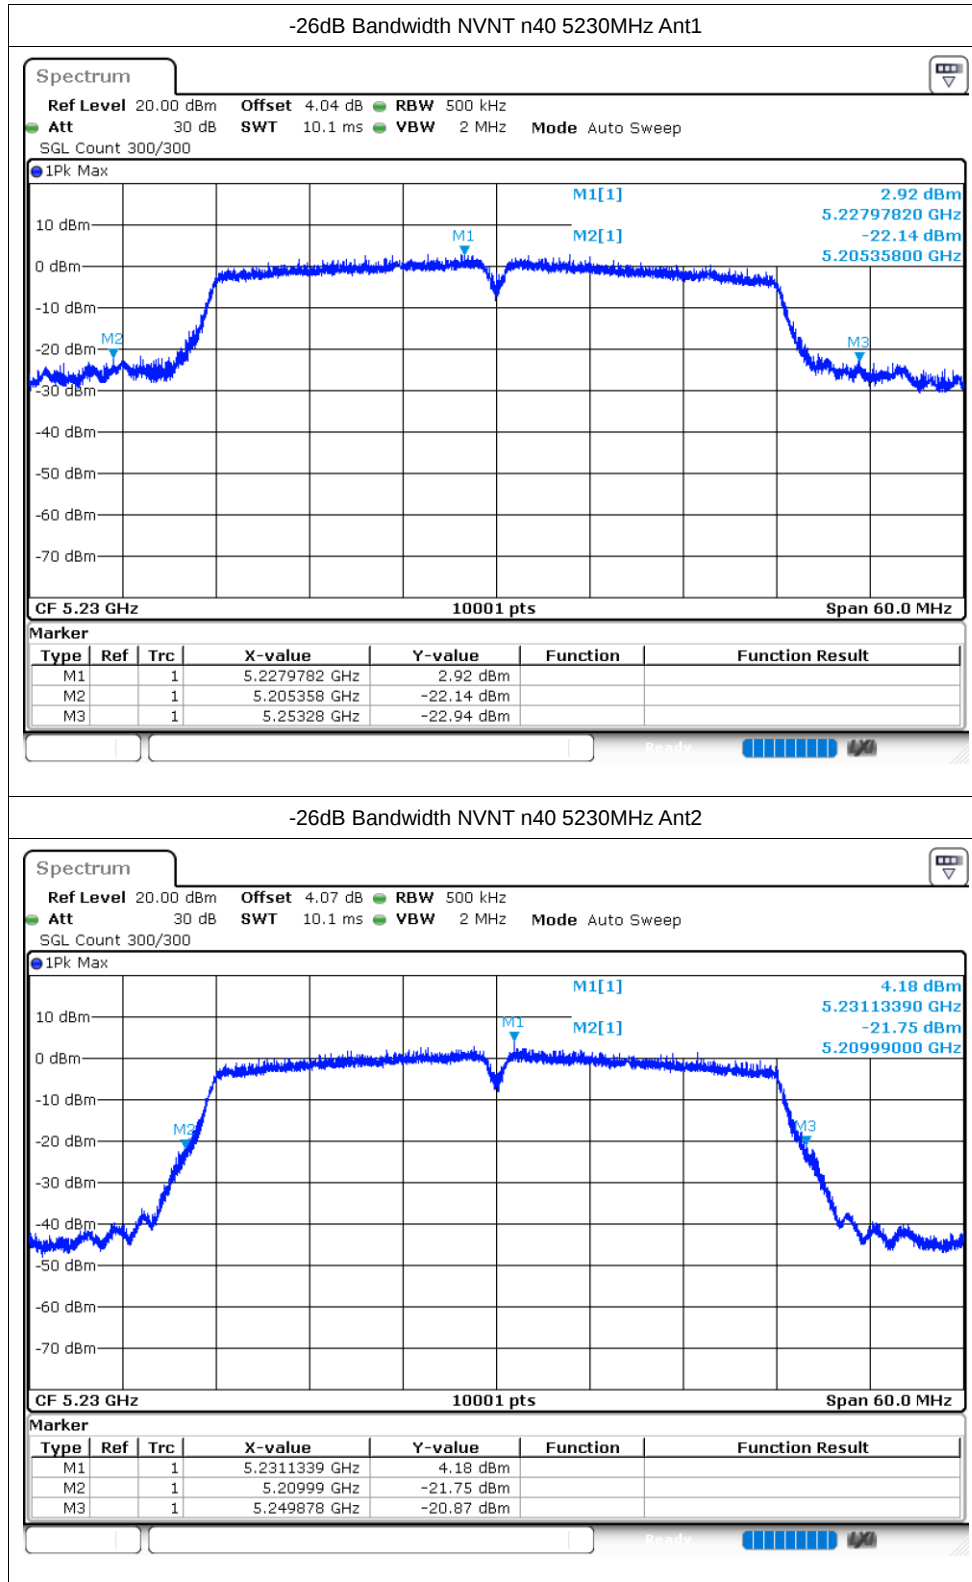

Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	ac20	5180	Ant1	17.515
NVNT	ac20	5180	Ant2	17.494
NVNT	ac20	5200	Ant1	17.476
NVNT	ac20	5200	Ant2	17.566
NVNT	ac20	5240	Ant1	17.62
NVNT	ac20	5240	Ant2	17.596
NVNT	ac40	5190	Ant1	35.894
NVNT	ac40	5190	Ant2	35.918
NVNT	ac40	5230	Ant1	36.134
NVNT	ac40	5230	Ant2	35.96
NVNT	ac80	5210	Ant1	75.484
NVNT	ac80	5210	Ant2	75.352
NVNT	n20	5180	Ant1	17.53
NVNT	n20	5180	Ant2	17.611
NVNT	n20	5200	Ant1	17.596
NVNT	n20	5200	Ant2	17.542
NVNT	n20	5240	Ant1	17.617
NVNT	n20	5240	Ant2	17.536
NVNT	n40	5190	Ant1	35.906
NVNT	n40	5190	Ant2	36.026
NVNT	n40	5230	Ant1	36.272
NVNT	n40	5230	Ant2	36.056


Test Graphs

OBW NVNT ac20 5180MHz Ant1

Spectrum

Ref Level 20.00 dBm Offset 3.96 dB RBW 200 kHz
Att 35 dB SWT 37.8 μ s VBW 1 MHz Mode Auto FFT
SGL Count 100/100

1Pk Max

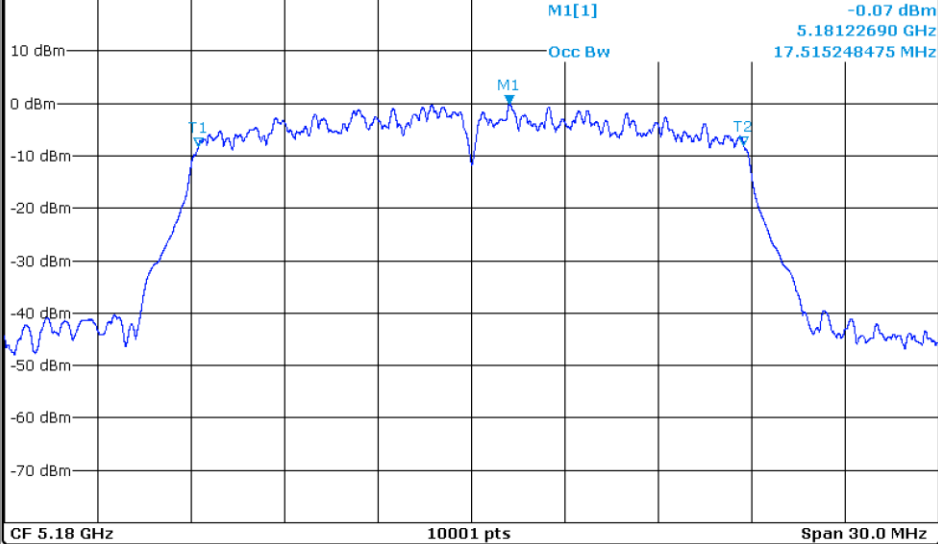



OBW NVNT ac20 5180MHz Ant2


Spectrum


Ref Level 20.00 dBm Offset 3.98 dB RBW 200 kHz
Att 35 dB SWT 37.8 μ s VBW 1 MHz Mode Auto FFT
SGL Count 100/100


1Pk Max

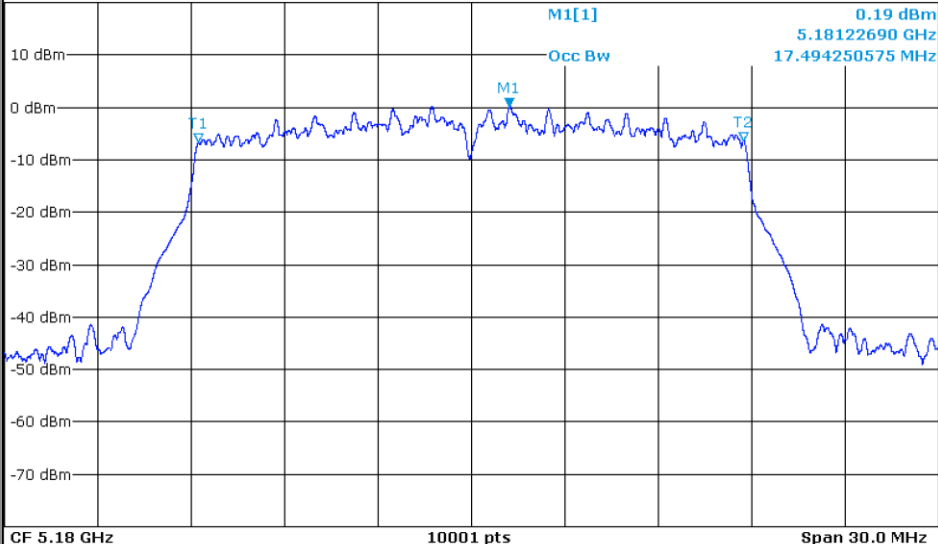


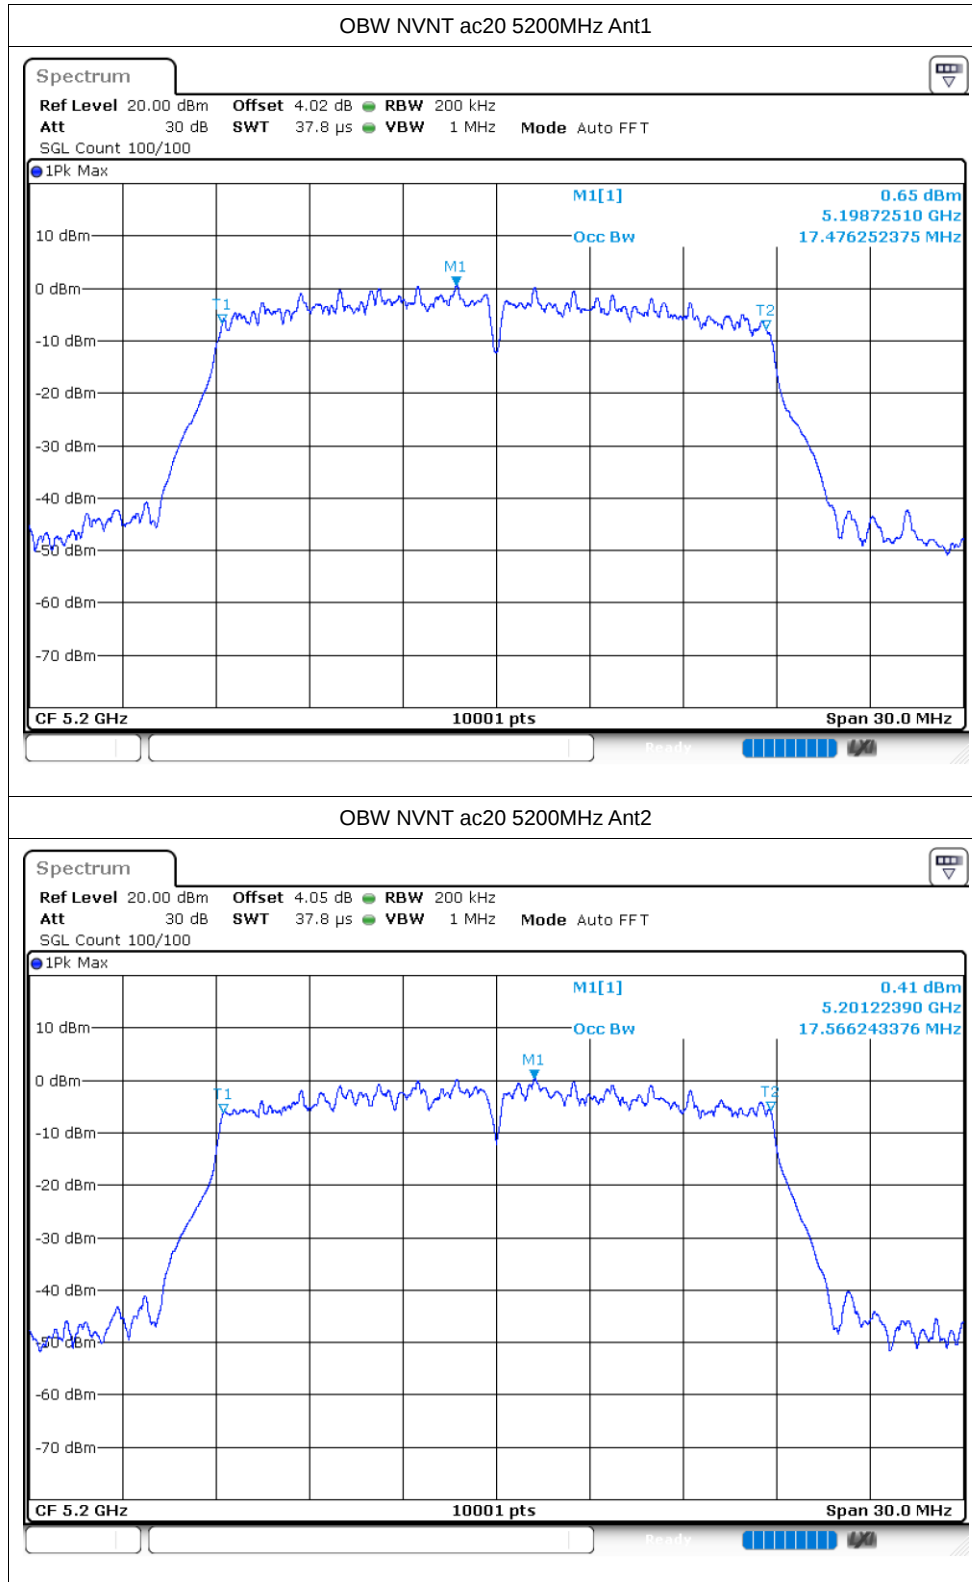


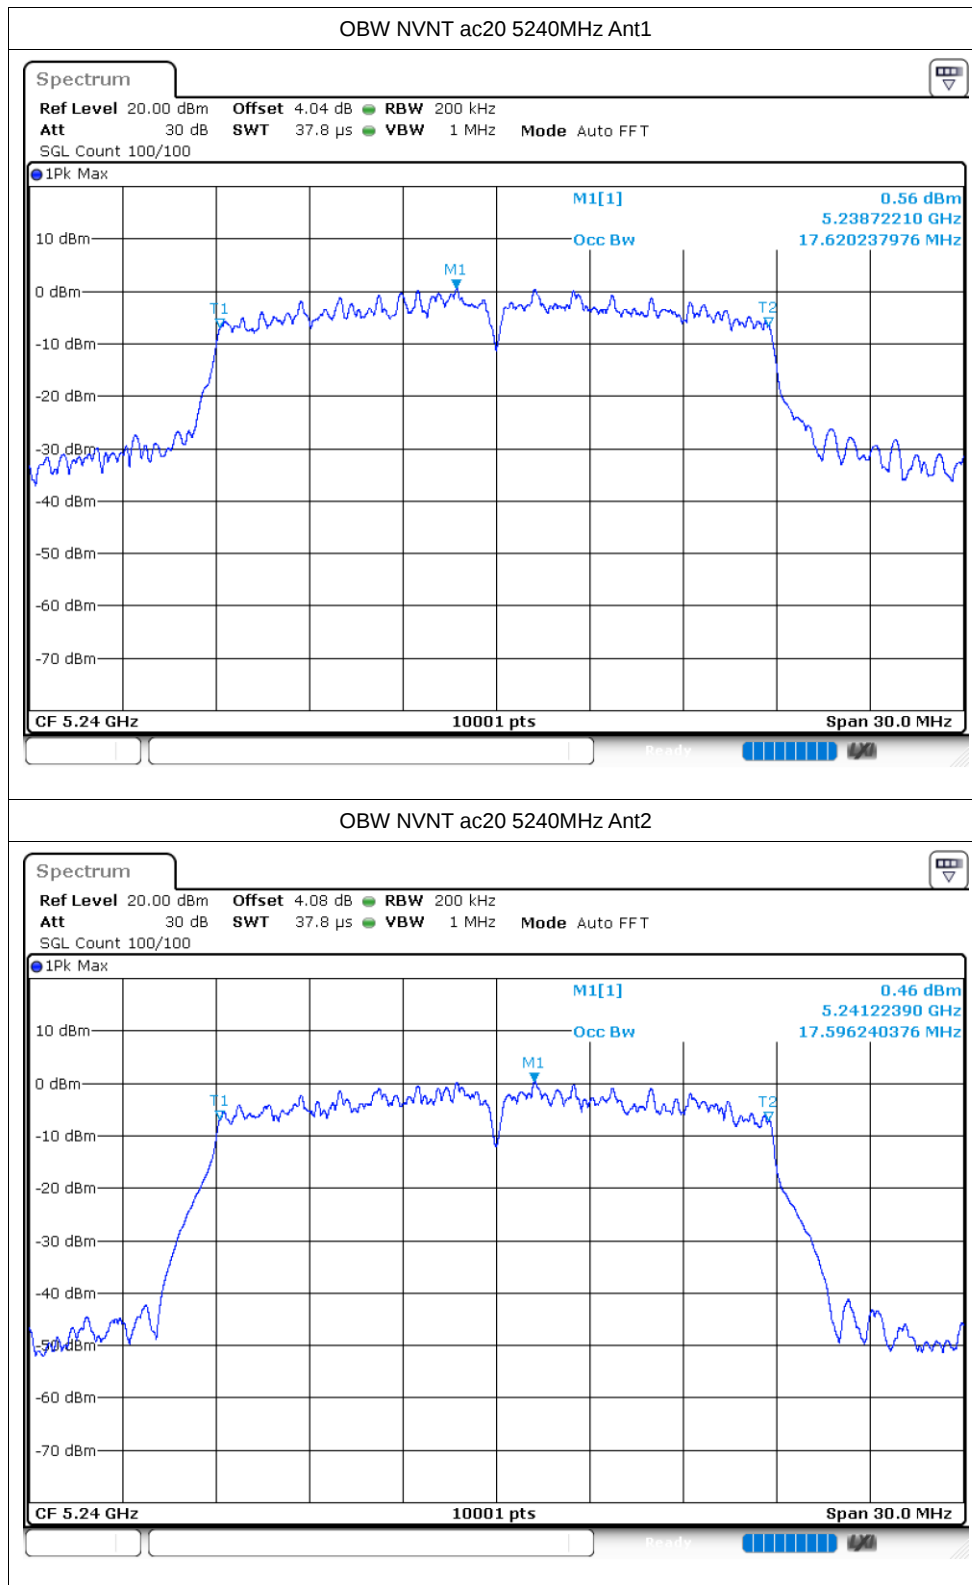


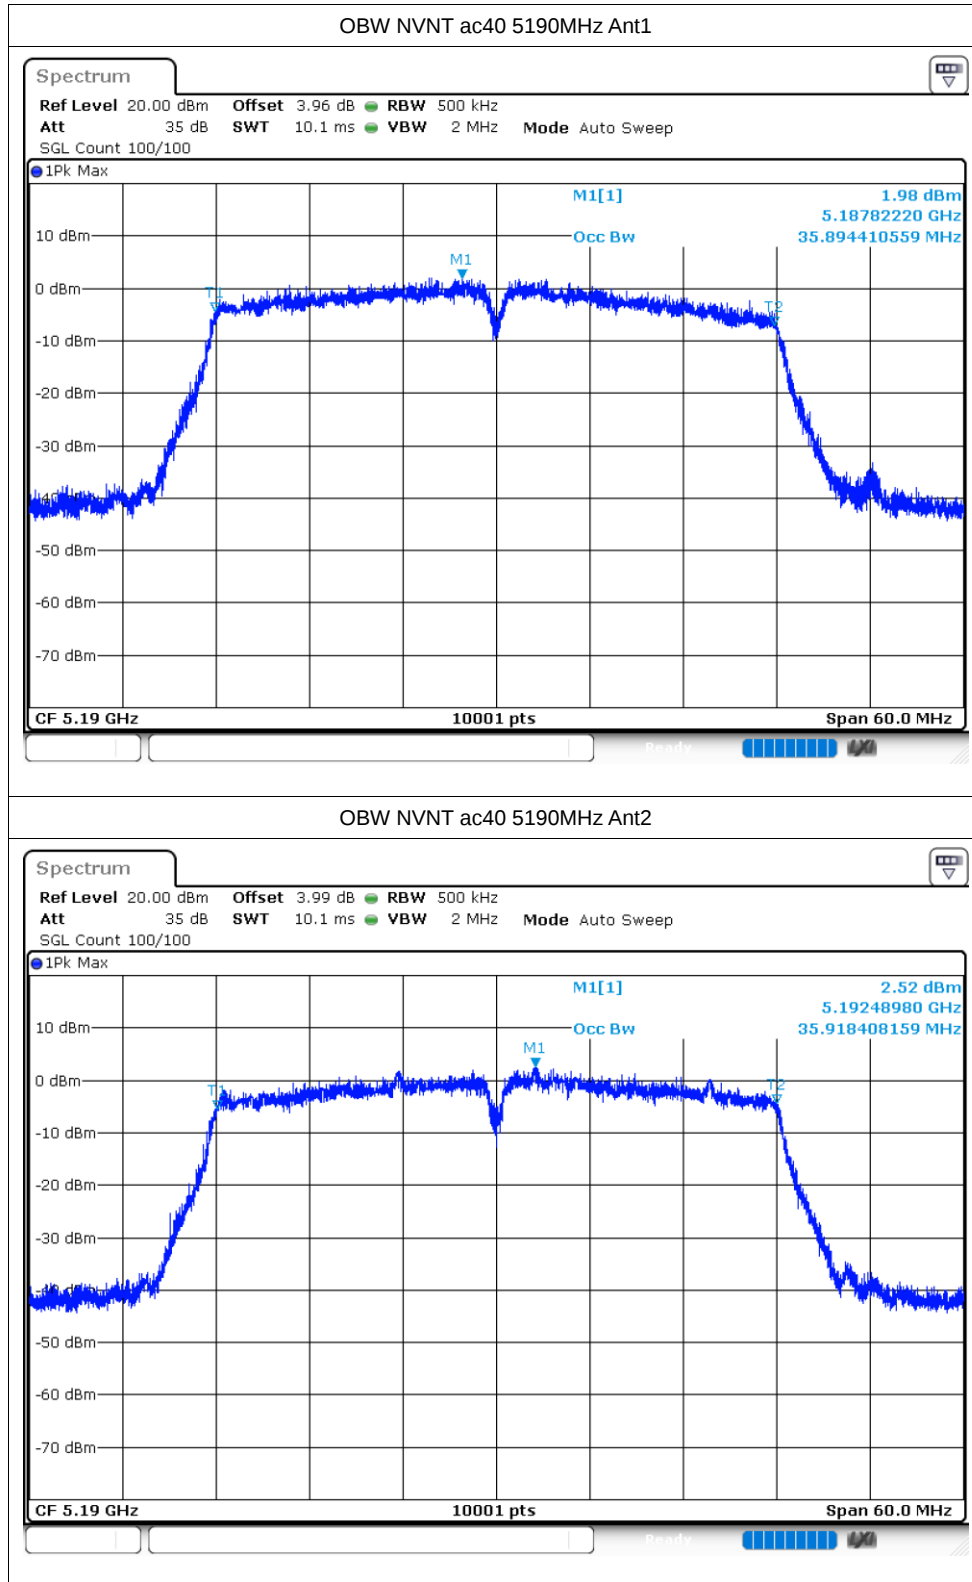


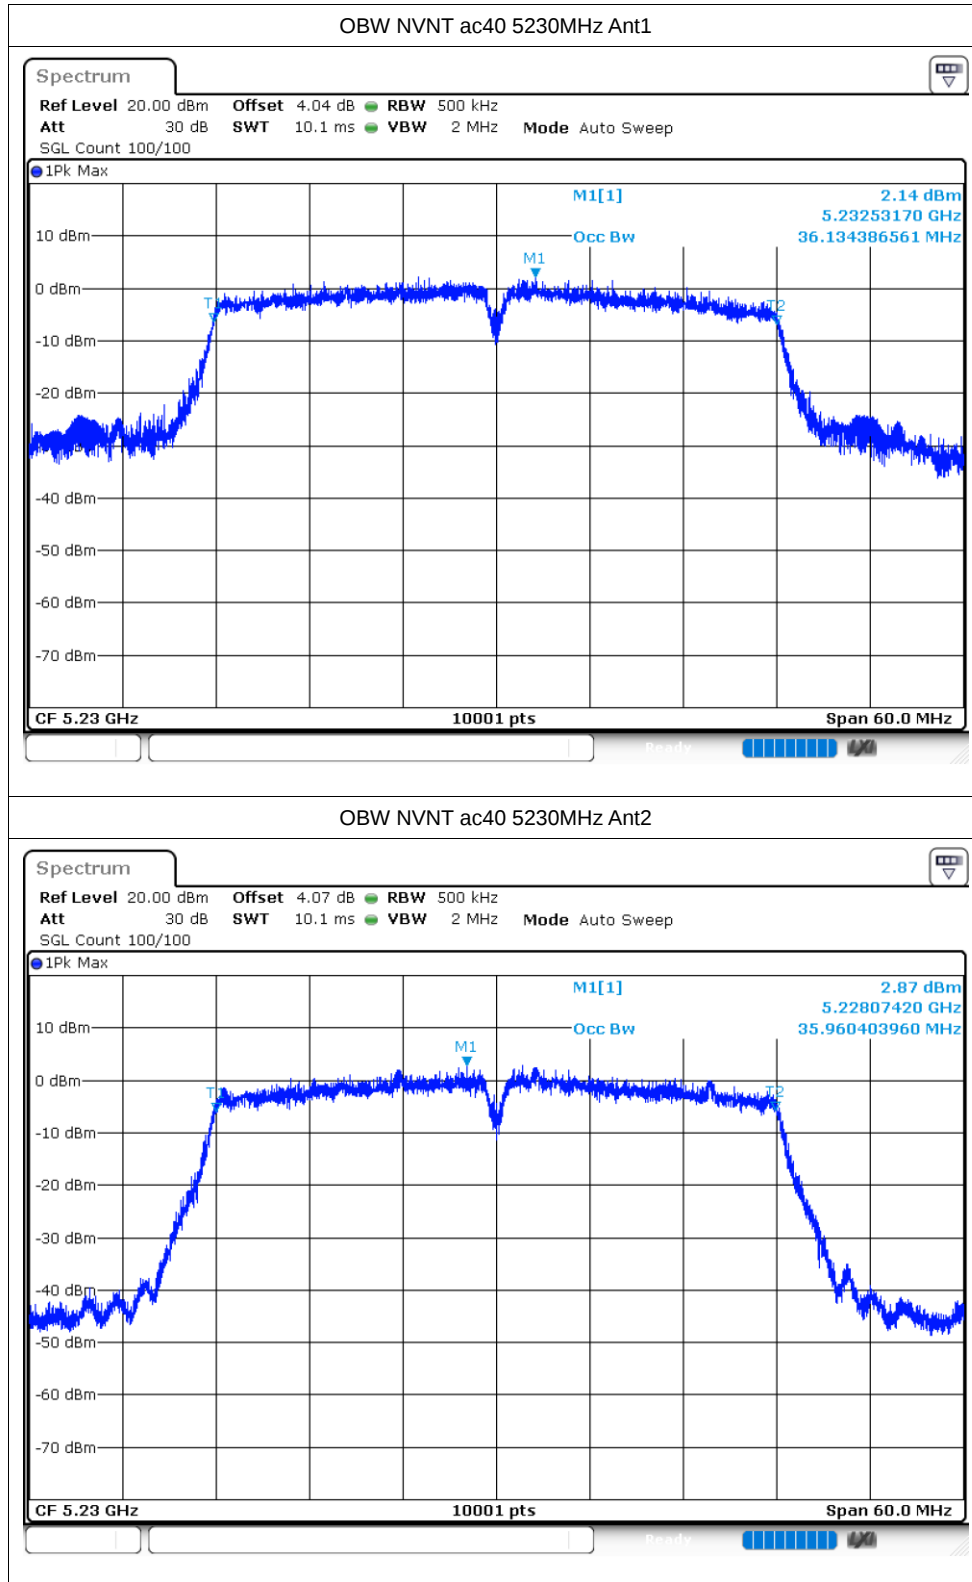


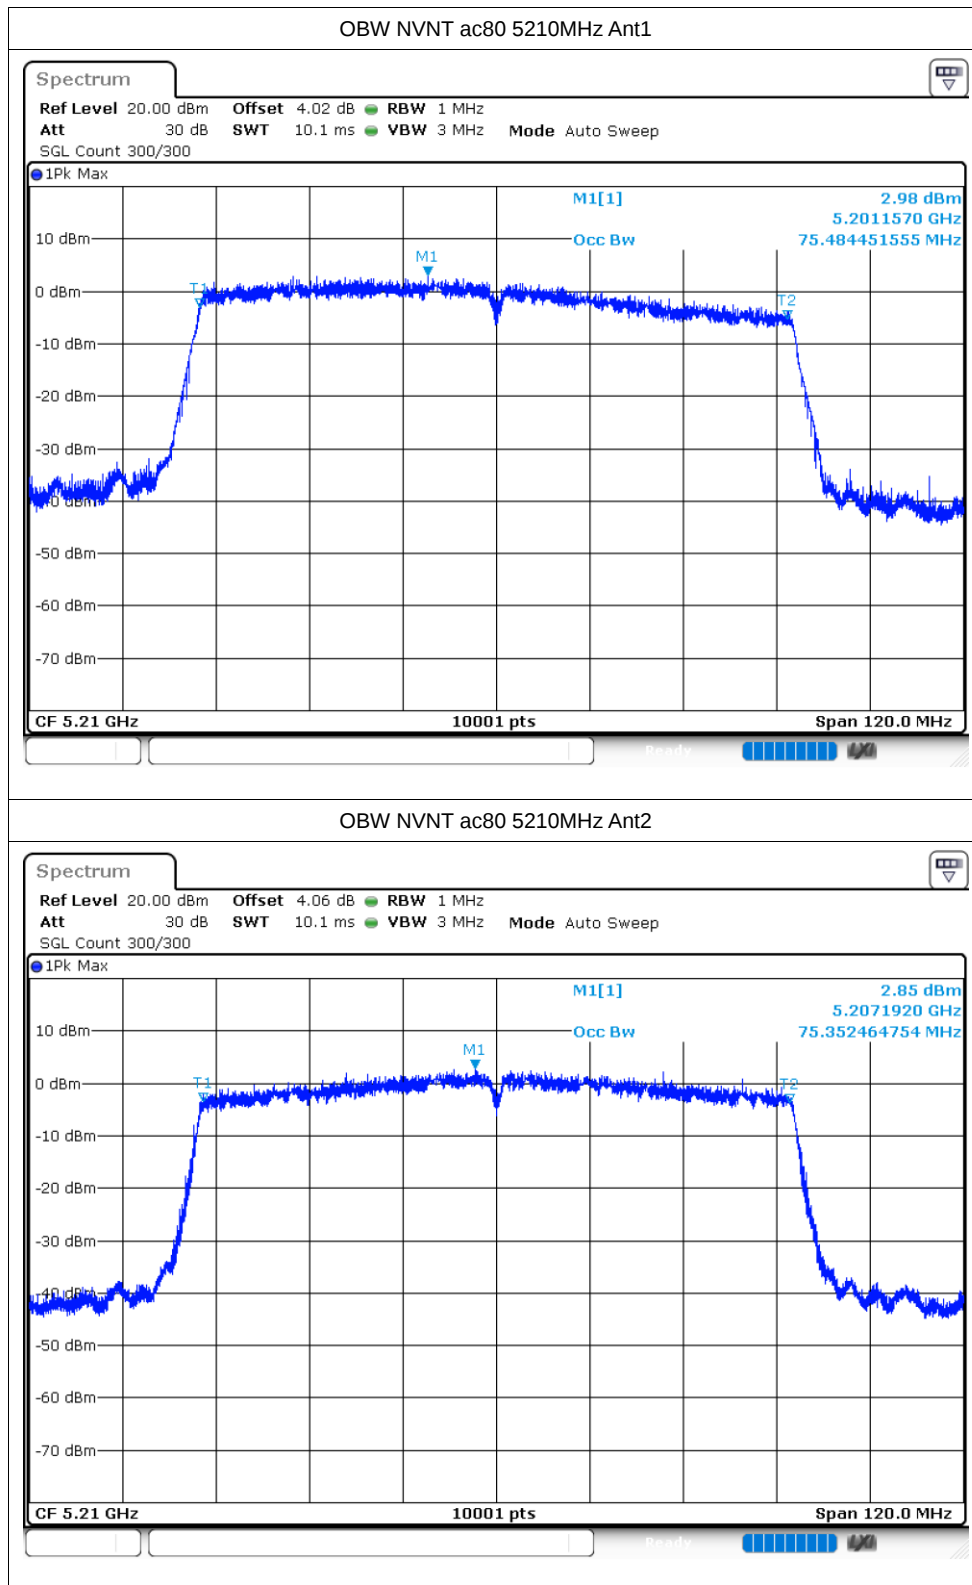


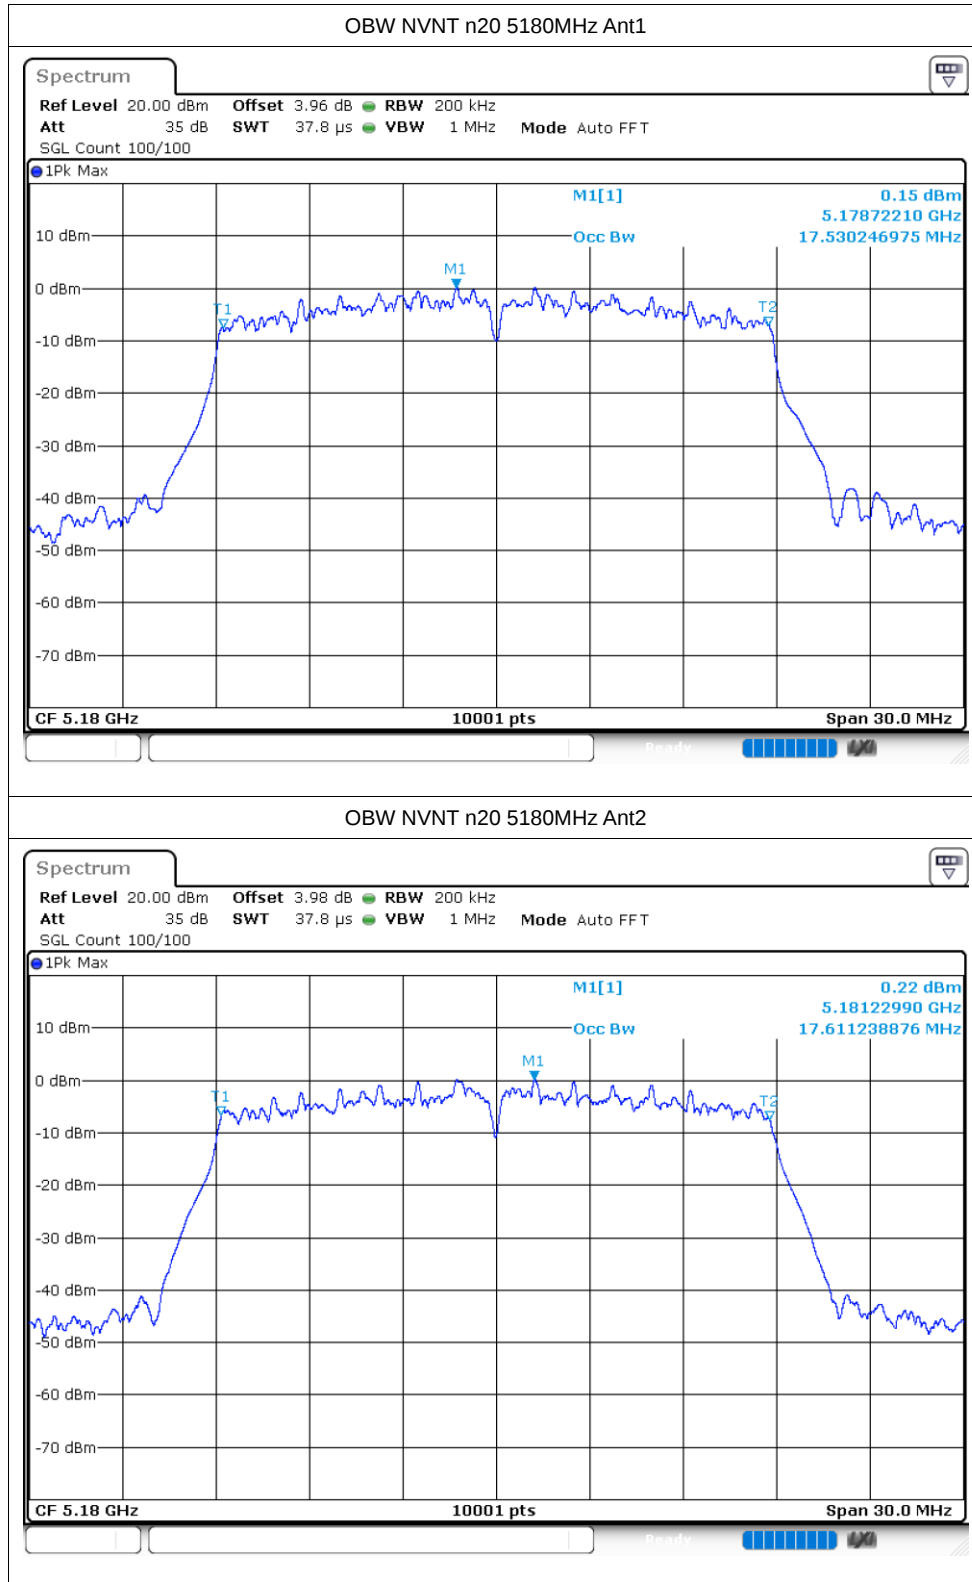

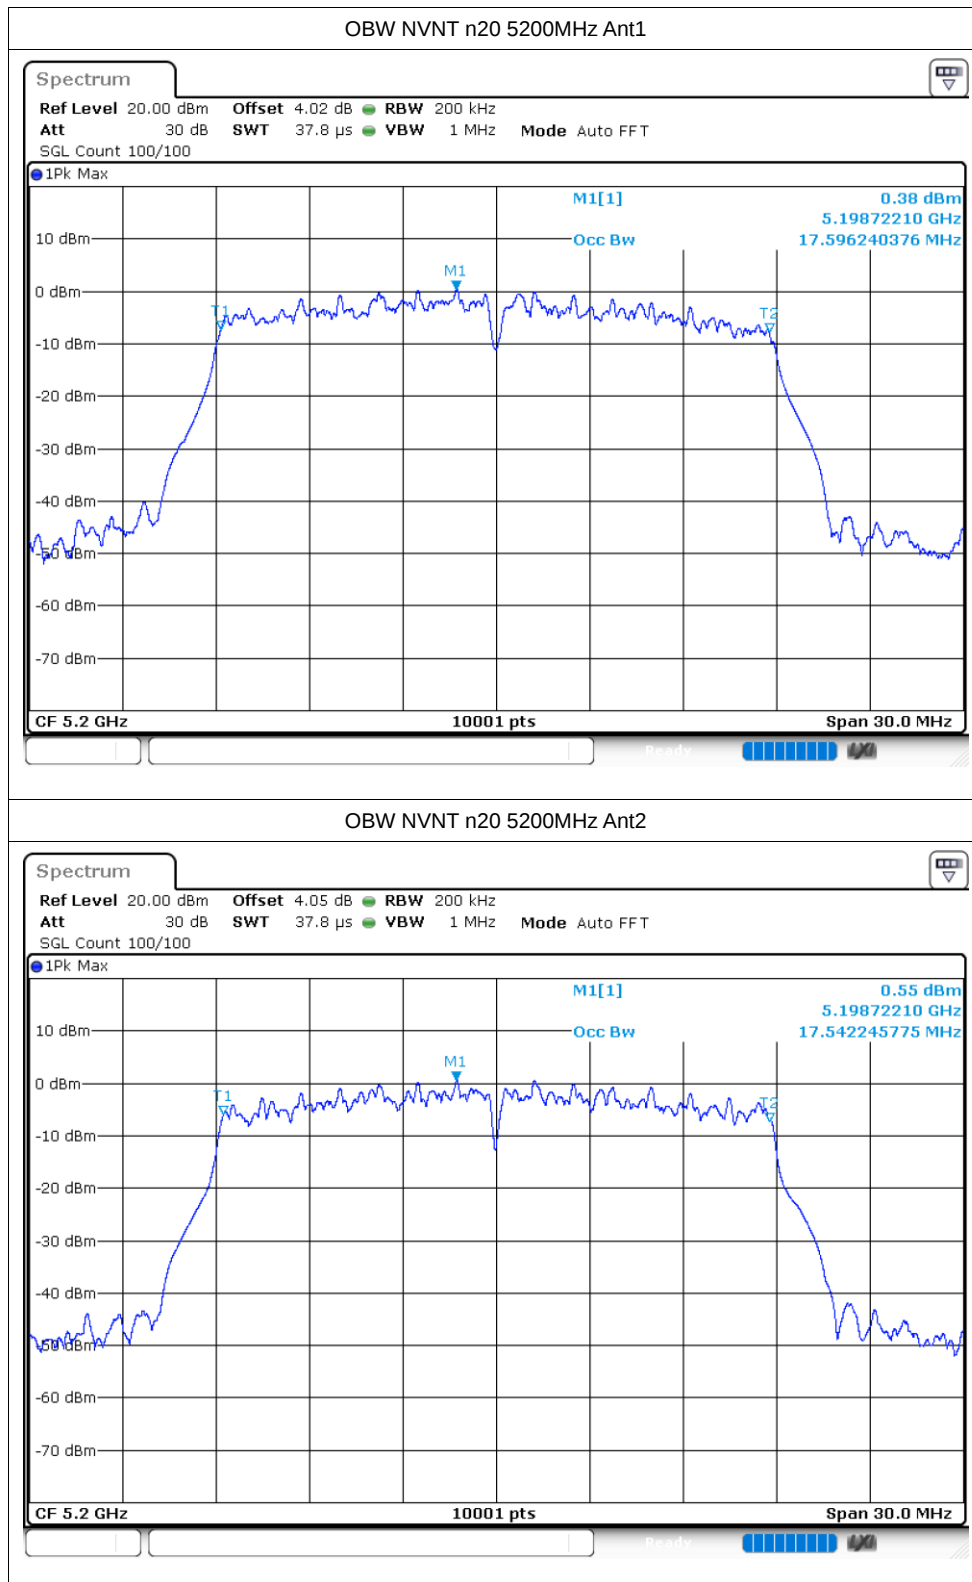

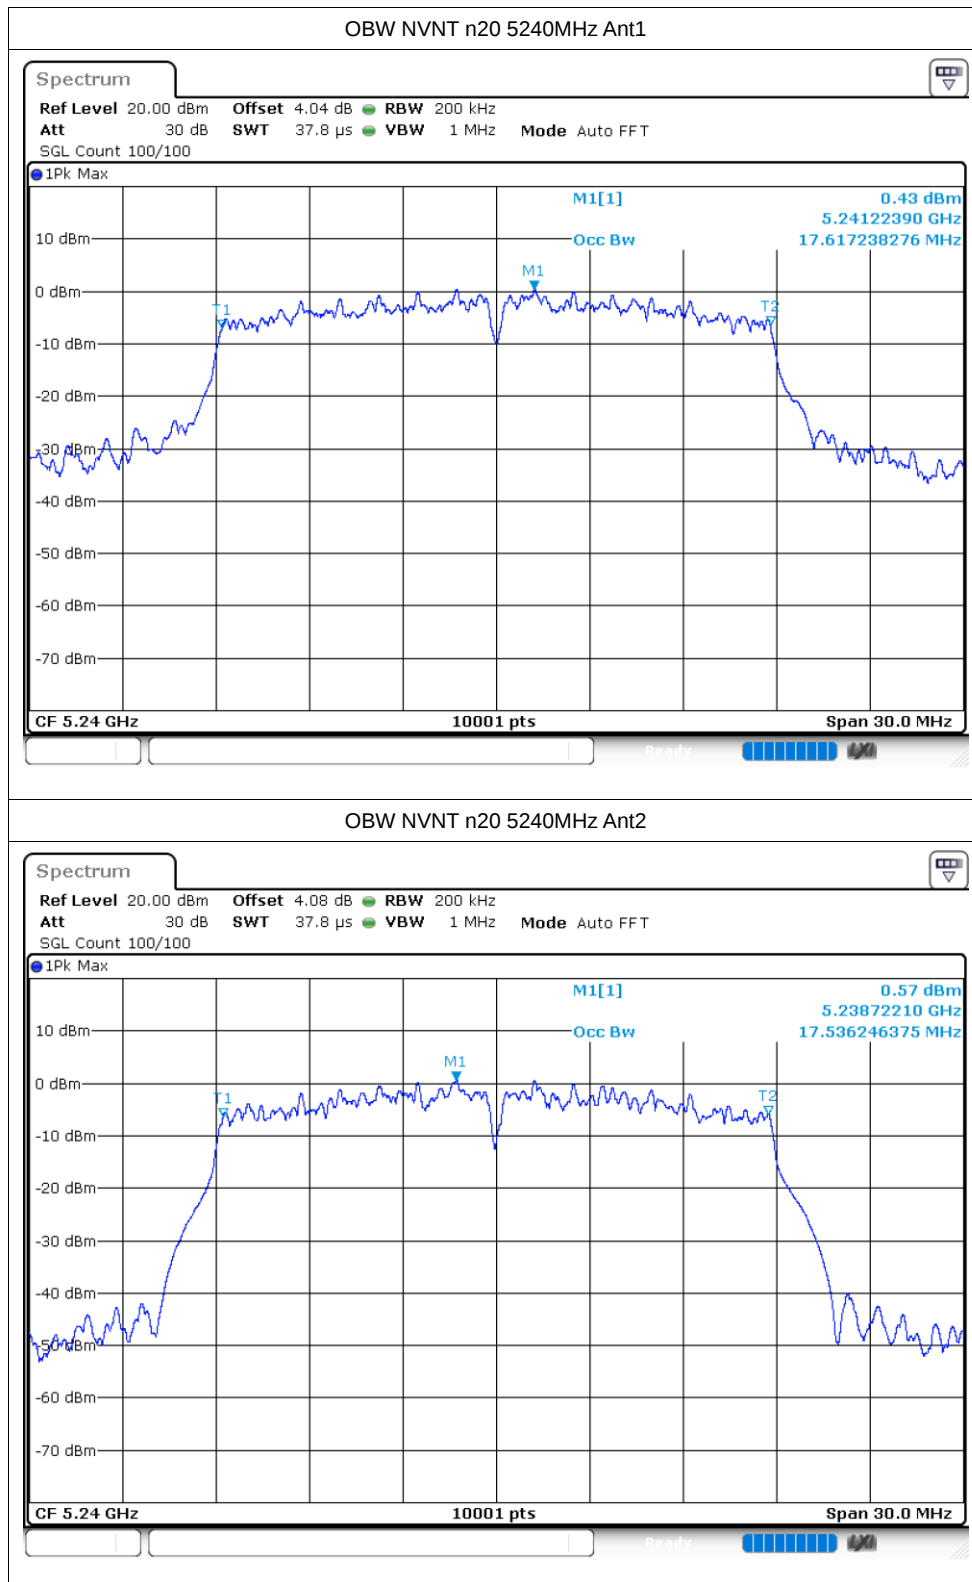

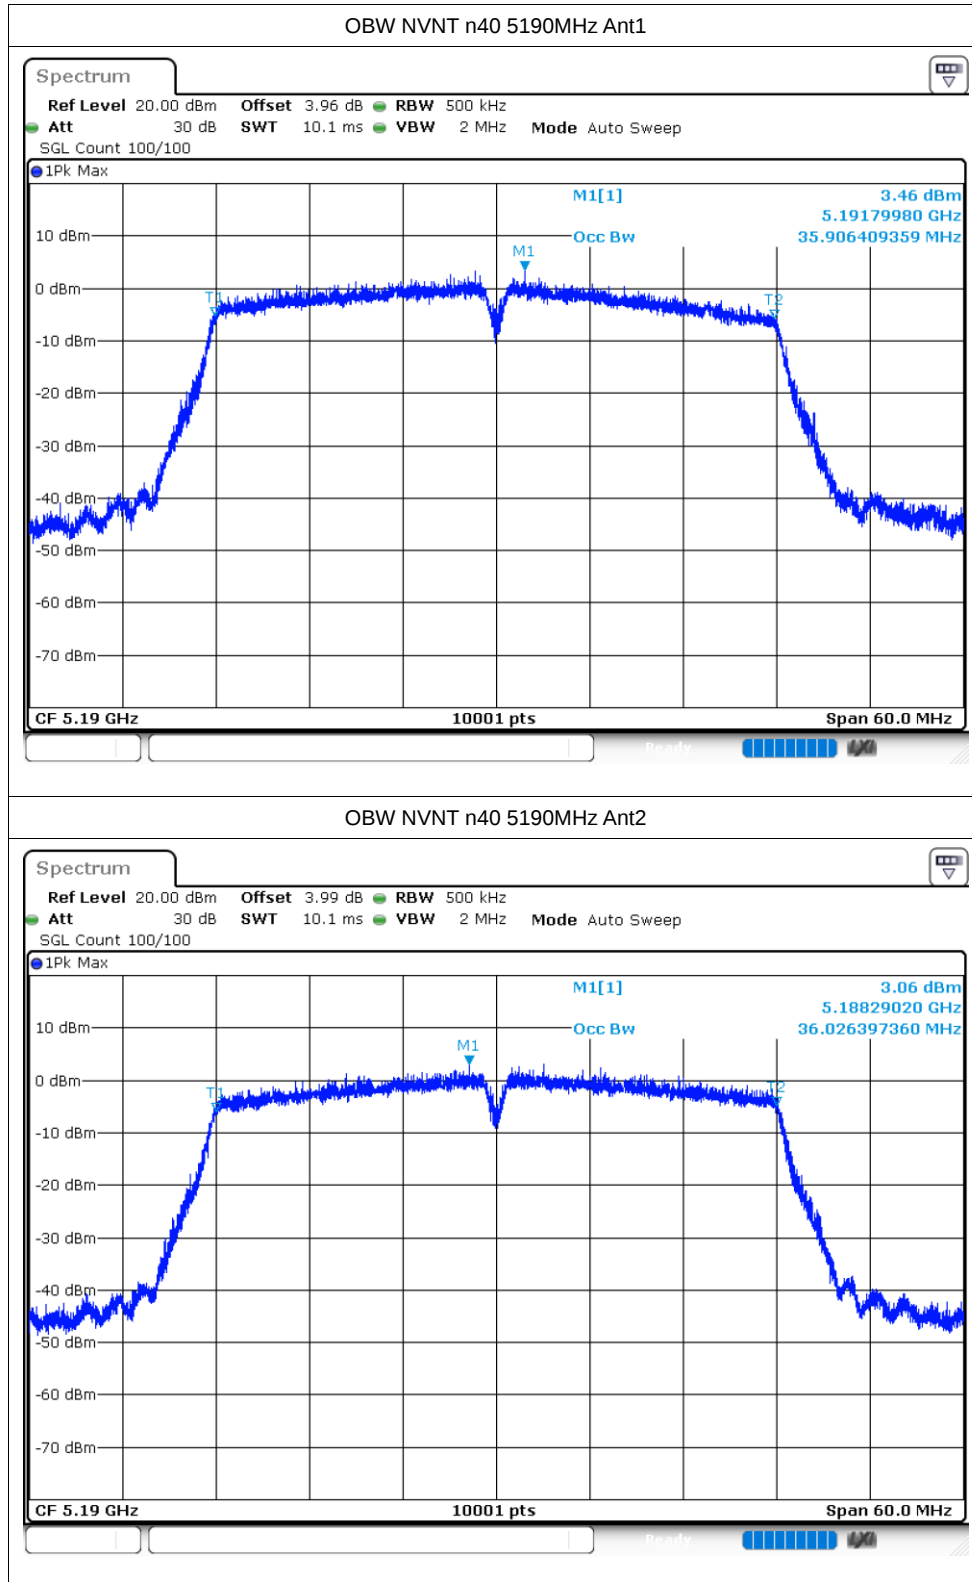

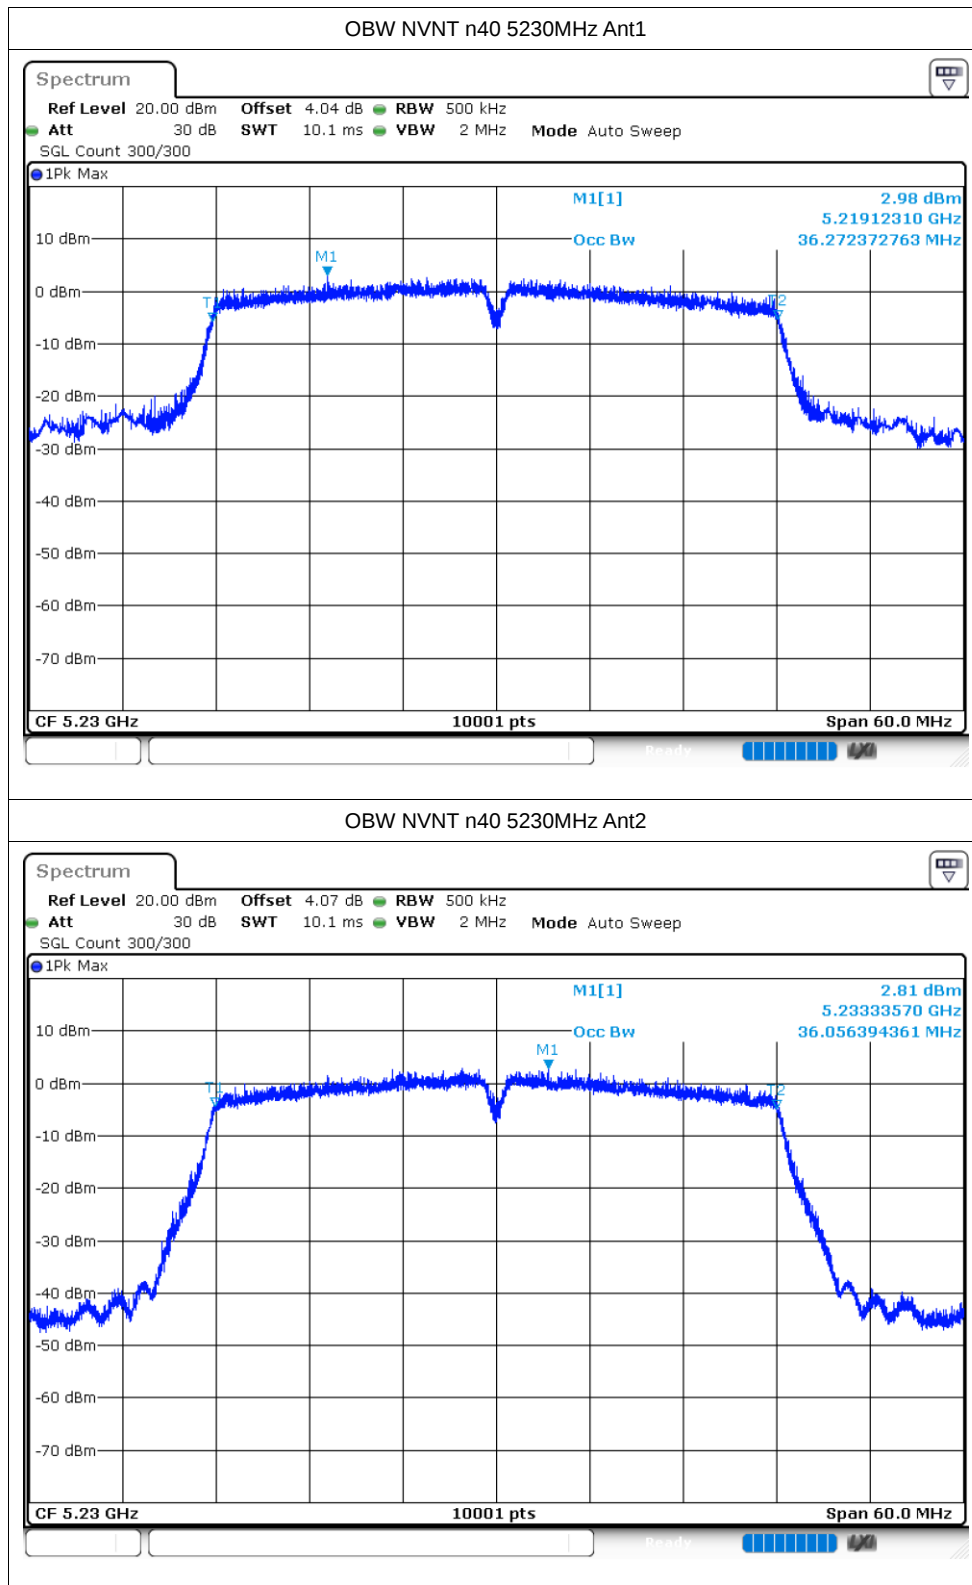


Maximum Power Spectral Density Level


Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	ac20	5180	Ant1	-10.11	1.13	-8.98	9.05	Pass
NVNT	ac20	5180	Ant2	-11.69	1.13	-10.56	9.05	Pass
NVNT	ac20	5180	Sum	-7.82	1.13	-6.69	9.05	Pass
NVNT	ac20	5200	Ant1	-12.31	1.13	-11.18	9.05	Pass
NVNT	ac20	5200	Ant2	-13.68	1.13	-12.55	9.05	Pass
NVNT	ac20	5200	Sum	-9.93	1.13	-8.8	9.05	Pass
NVNT	ac20	5240	Ant1	-10.94	1.12	-9.82	9.05	Pass
NVNT	ac20	5240	Ant2	-12.26	1.12	-11.14	9.05	Pass
NVNT	ac20	5240	Sum	-8.54	1.12	-7.42	9.05	Pass
NVNT	ac40	5190	Ant1	-17.77	1.76	-16.01	9.05	Pass
NVNT	ac40	5190	Ant2	-19.72	1.76	-17.96	9.05	Pass
NVNT	ac40	5190	Sum	-15.63	1.76	-13.87	9.05	Pass
NVNT	ac40	5230	Ant1	-19.28	1.25	-18.03	9.05	Pass
NVNT	ac40	5230	Ant2	-19.35	1.25	-18.1	9.05	Pass
NVNT	ac40	5230	Sum	-16.3	1.25	-15.05	9.05	Pass
NVNT	ac80	5210	Ant1	-21.94	1.71	-20.23	9.05	Pass
NVNT	ac80	5210	Ant2	-21.71	1.71	-20	9.05	Pass
NVNT	ac80	5210	Sum	-18.81	1.71	-17.1	9.05	Pass
NVNT	n20	5180	Ant1	-8.51	0.79	-7.72	9.05	Pass
NVNT	n20	5180	Ant2	-8.06	0.79	-7.27	9.05	Pass
NVNT	n20	5180	Sum	-5.27	0.79	-4.48	9.05	Pass
NVNT	n20	5200	Ant1	-8.59	0.79	-7.8	9.05	Pass
NVNT	n20	5200	Ant2	-7.89	0.79	-7.1	9.05	Pass
NVNT	n20	5200	Sum	-5.22	0.79	-4.43	9.05	Pass
NVNT	n20	5240	Ant1	-7.86	0.79	-7.07	9.05	Pass
NVNT	n20	5240	Ant2	-8.55	0.79	-7.76	9.05	Pass
NVNT	n20	5240	Sum	-5.18	0.79	-4.39	9.05	Pass
NVNT	n40	5190	Ant1	-16.62	1.18	-15.44	9.05	Pass
NVNT	n40	5190	Ant2	-16.1	1.18	-14.92	9.05	Pass
NVNT	n40	5190	Sum	-13.34	1.18	-12.16	9.05	Pass
NVNT	n40	5230	Ant1	-15.82	1.17	-14.65	9.05	Pass
NVNT	n40	5230	Ant2	-14.8	1.17	-13.63	9.05	Pass
NVNT	n40	5230	Sum	-12.27	1.17	-11.1	9.05	Pass


Test Graphs


PSD NVNT ac20 5180MHz Ant1

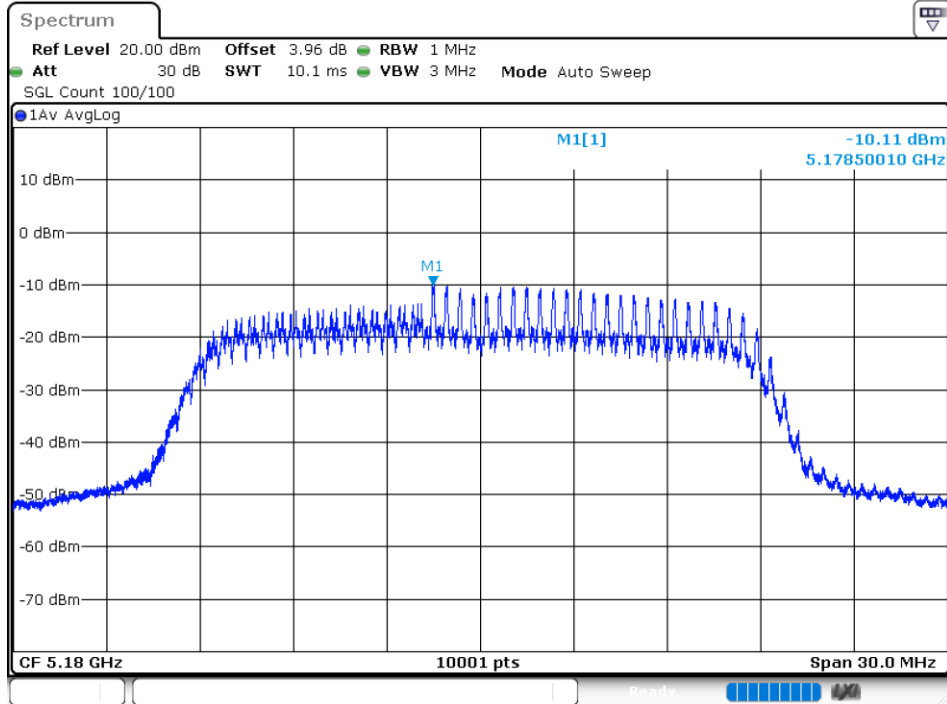



PSD NVNT ac20 5180MHz Ant2

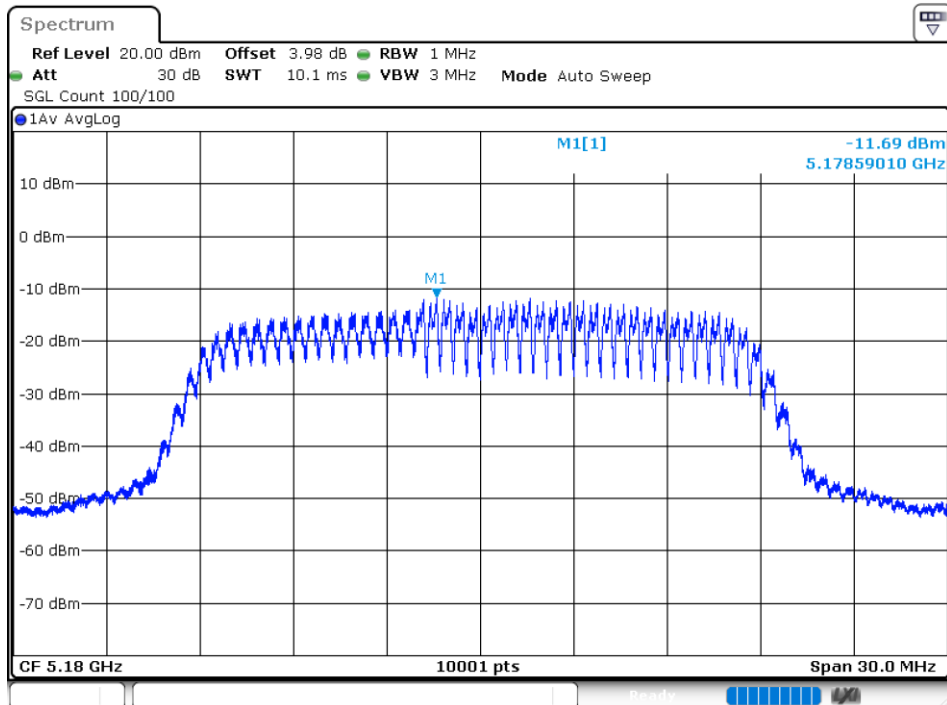


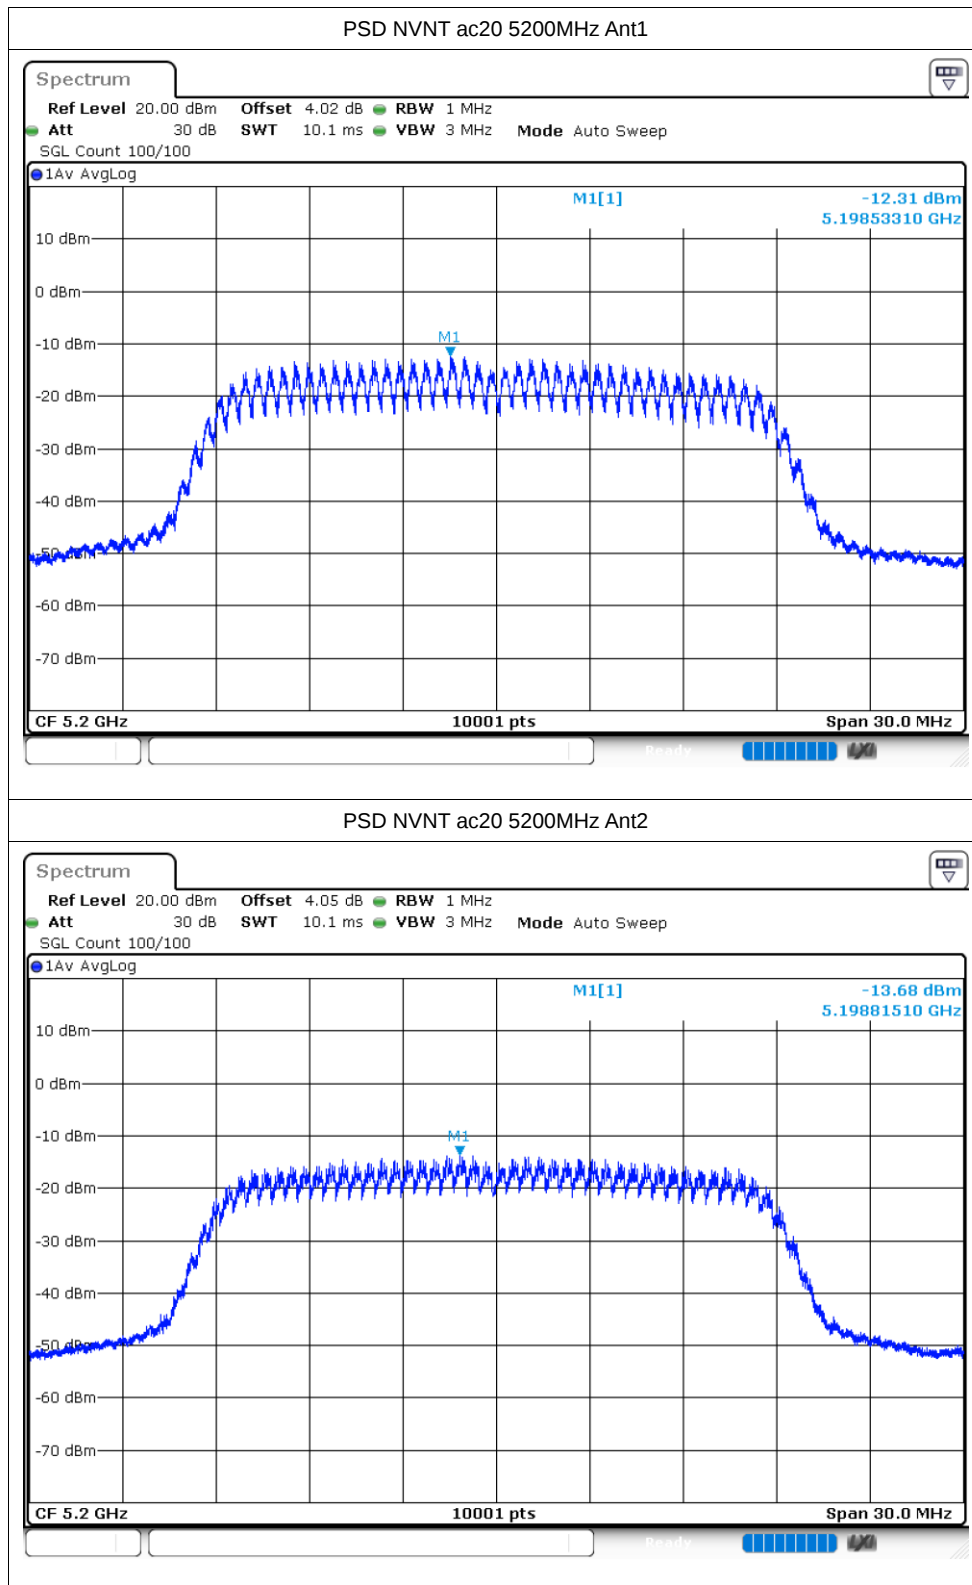


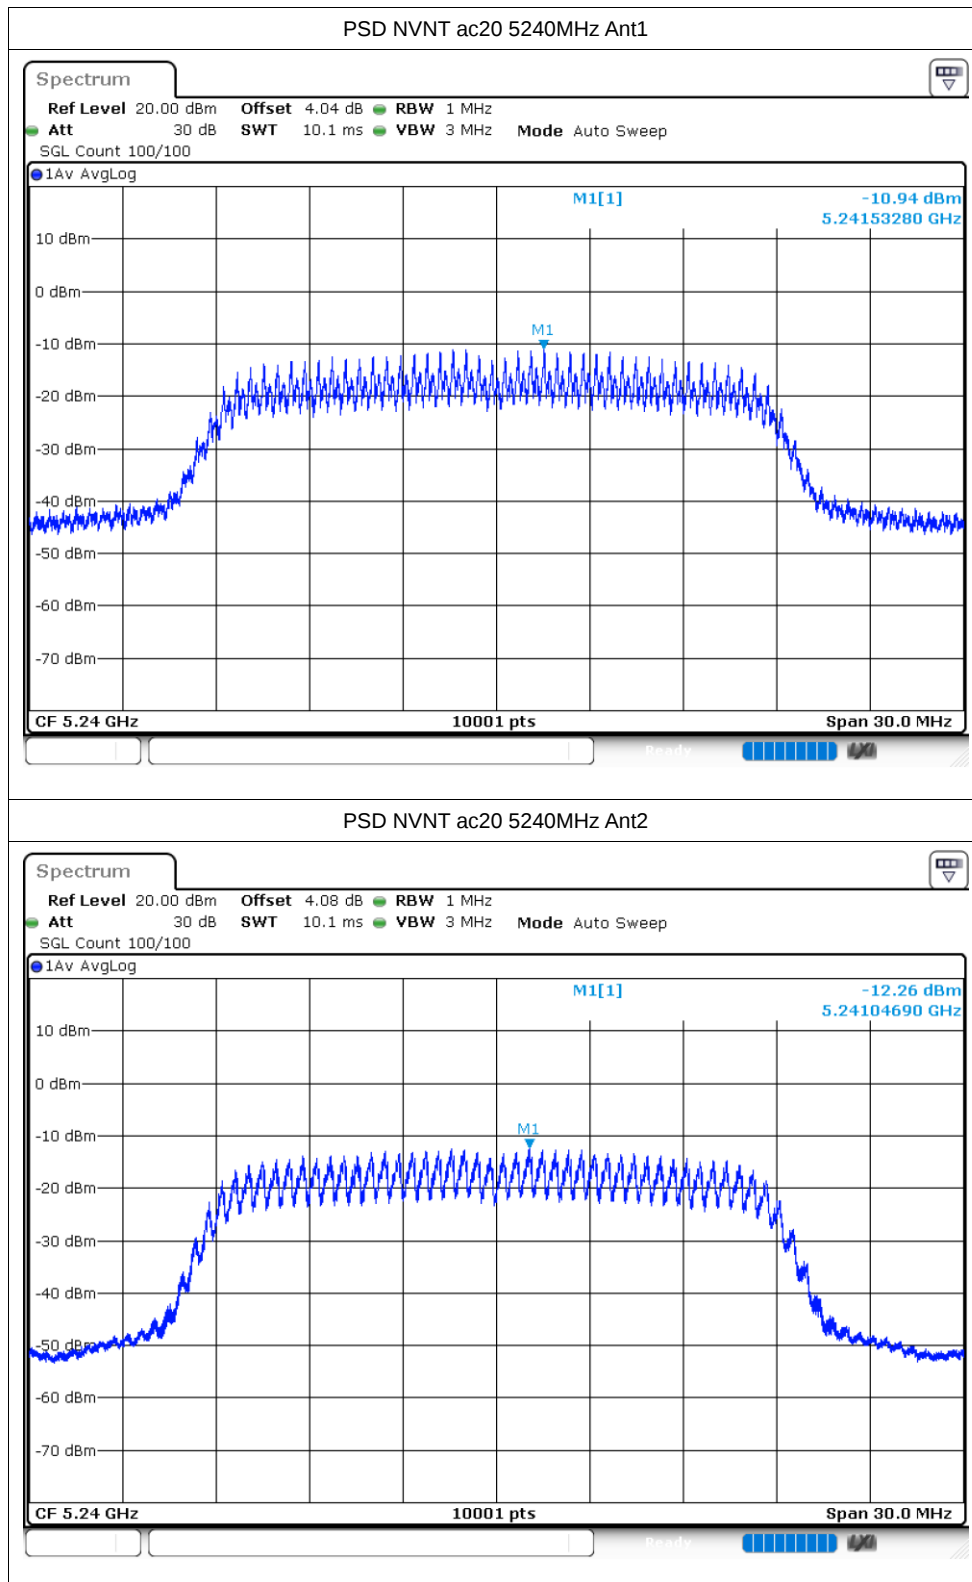


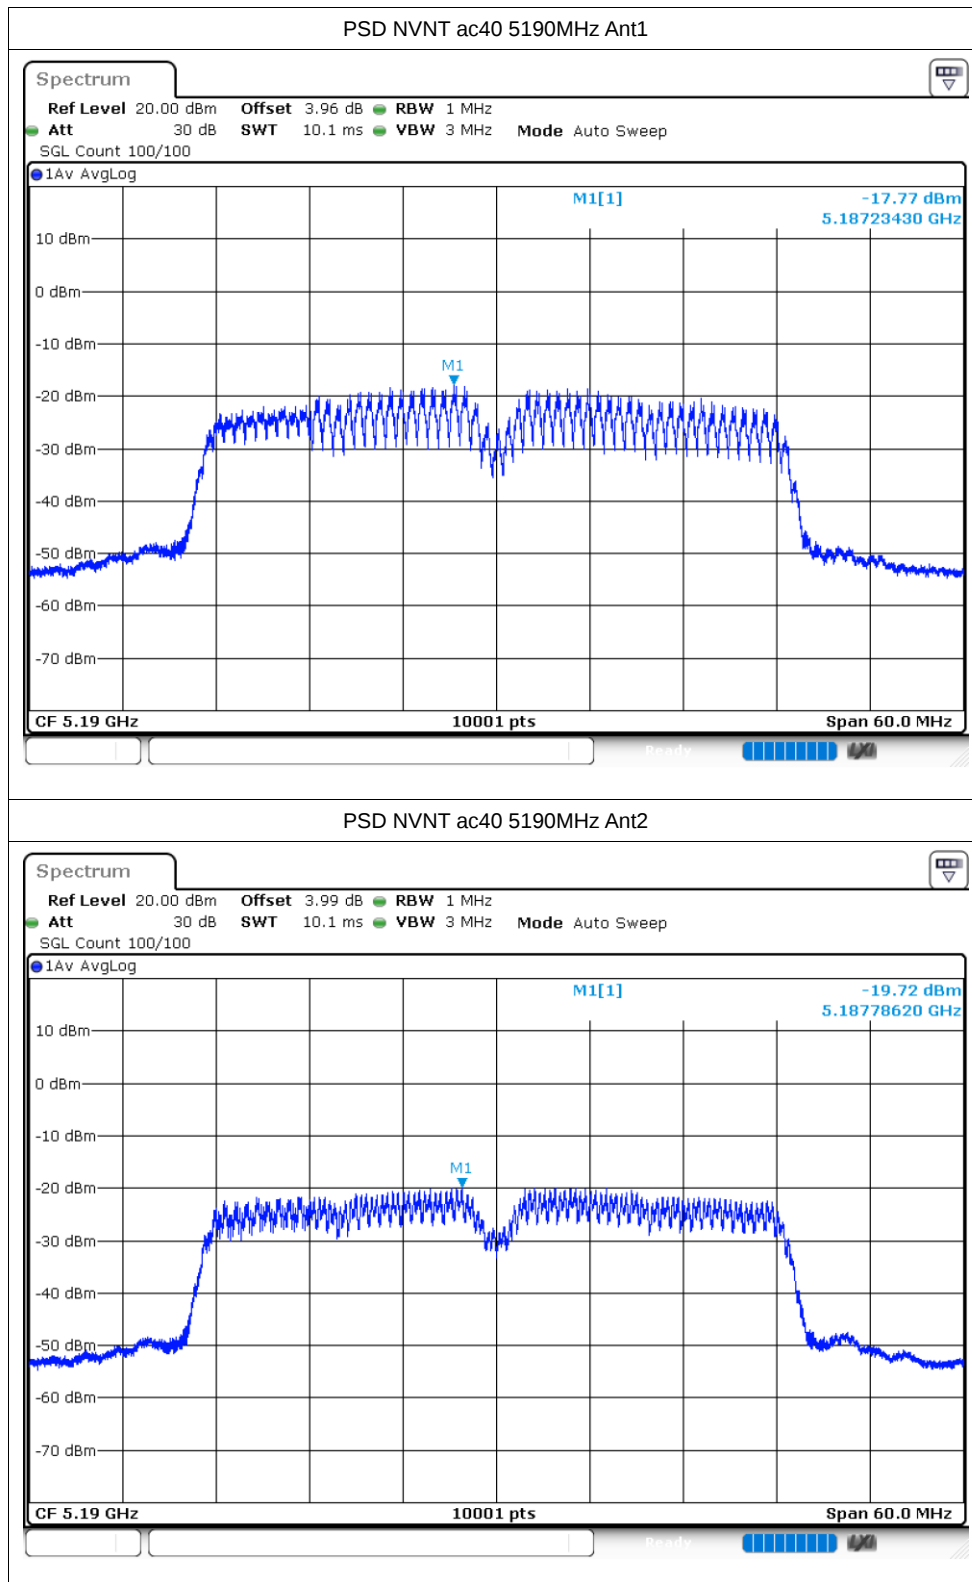


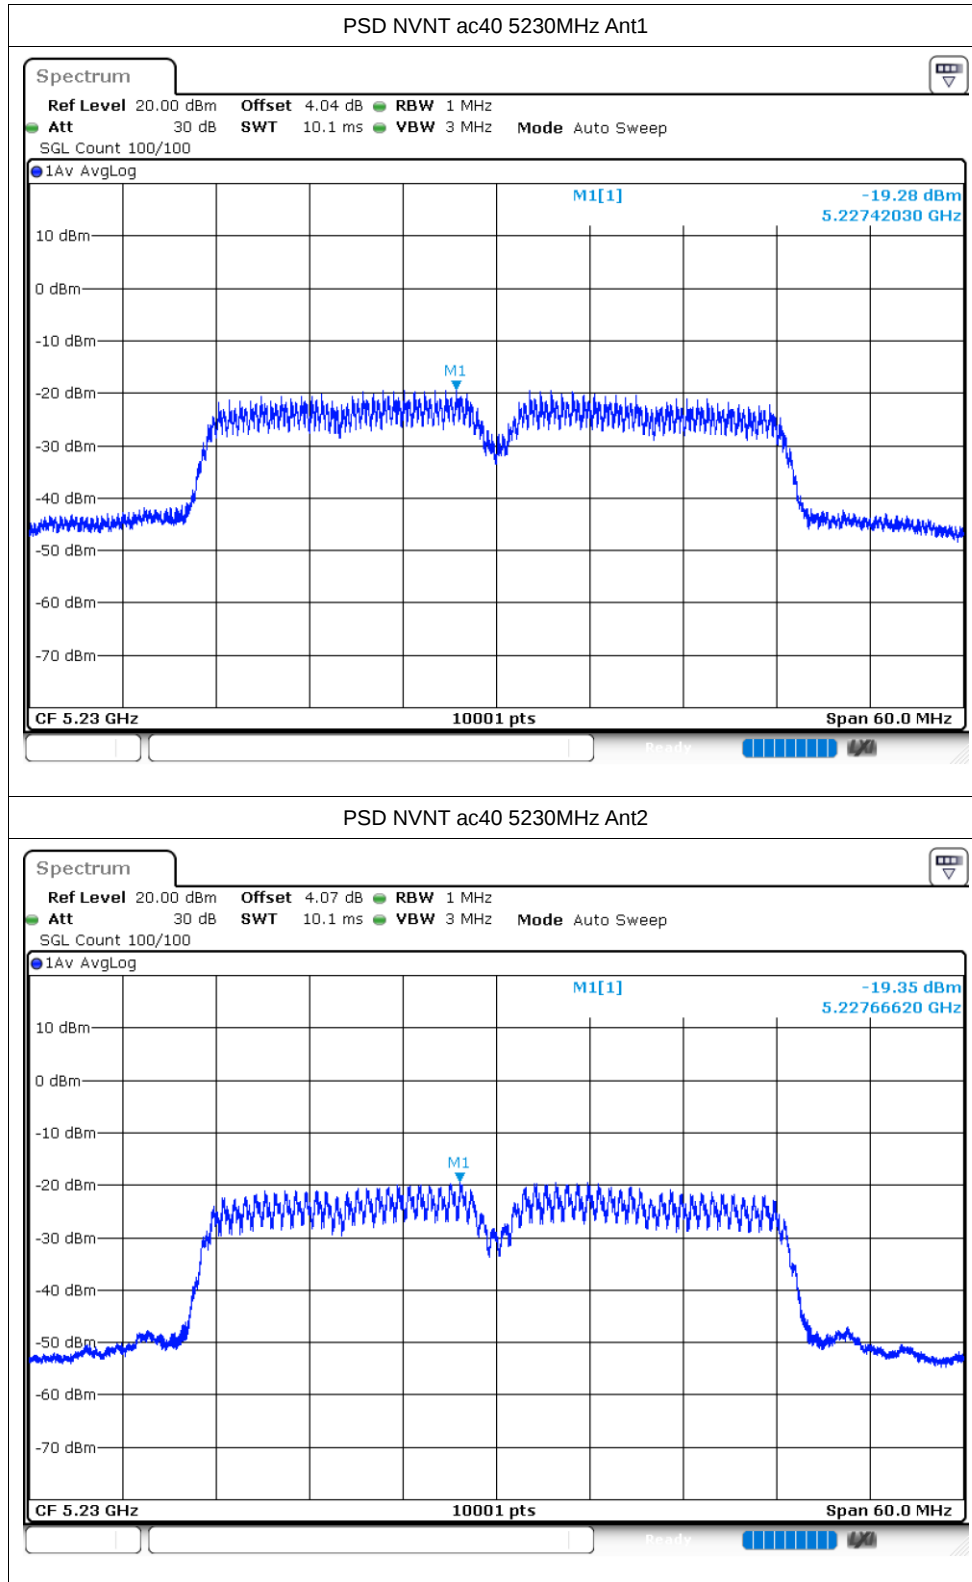


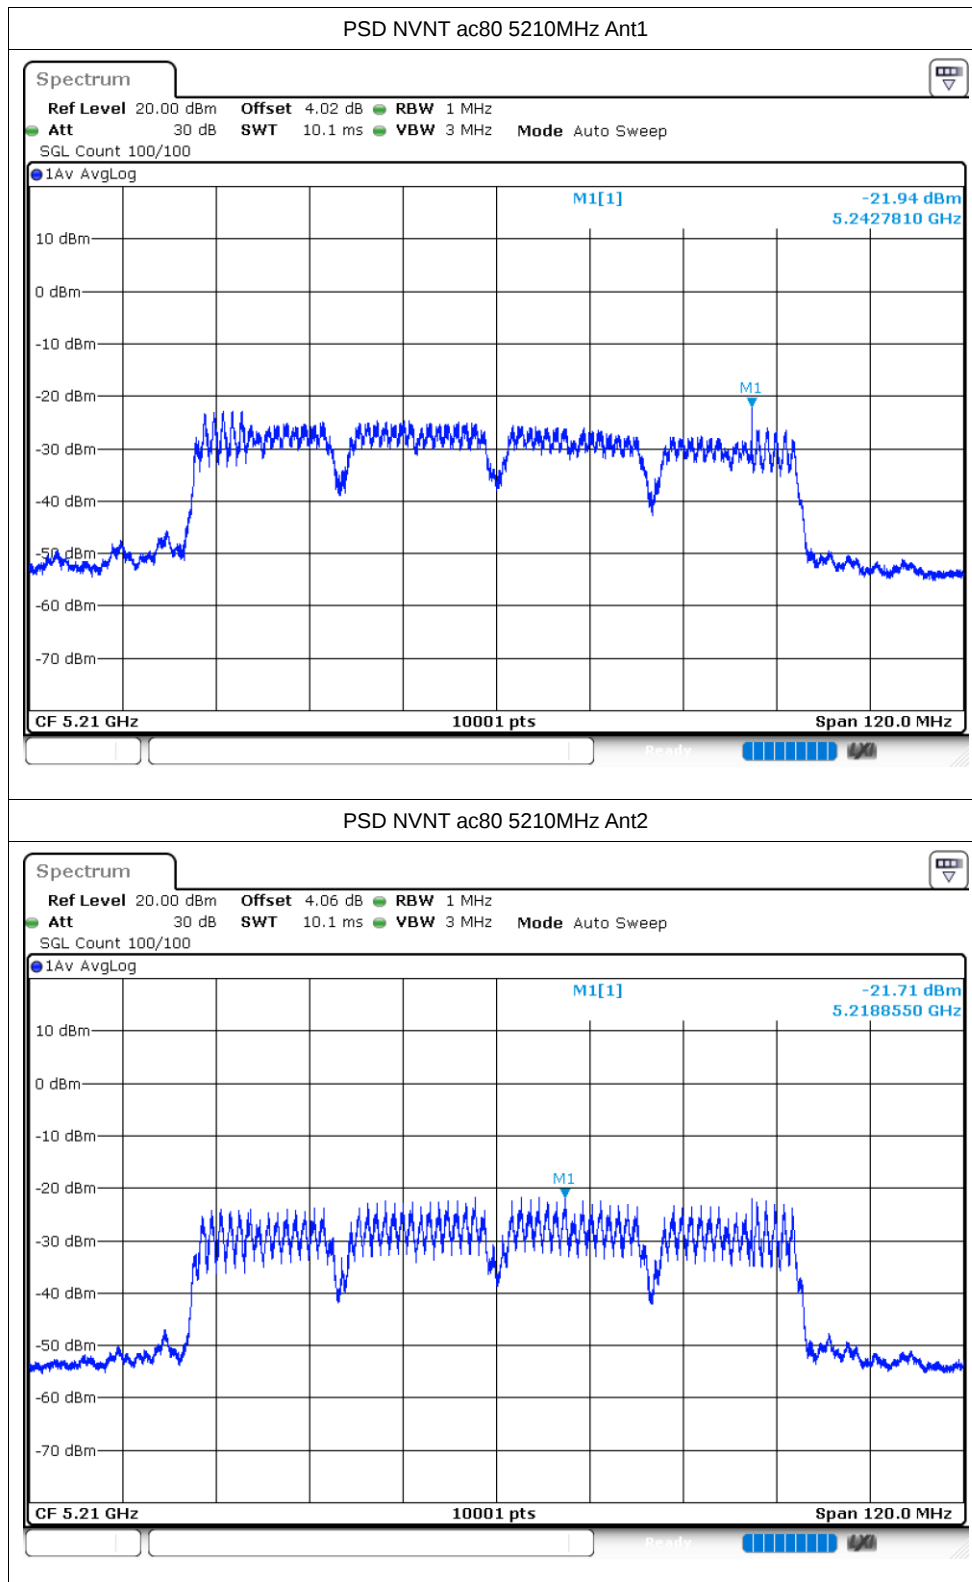


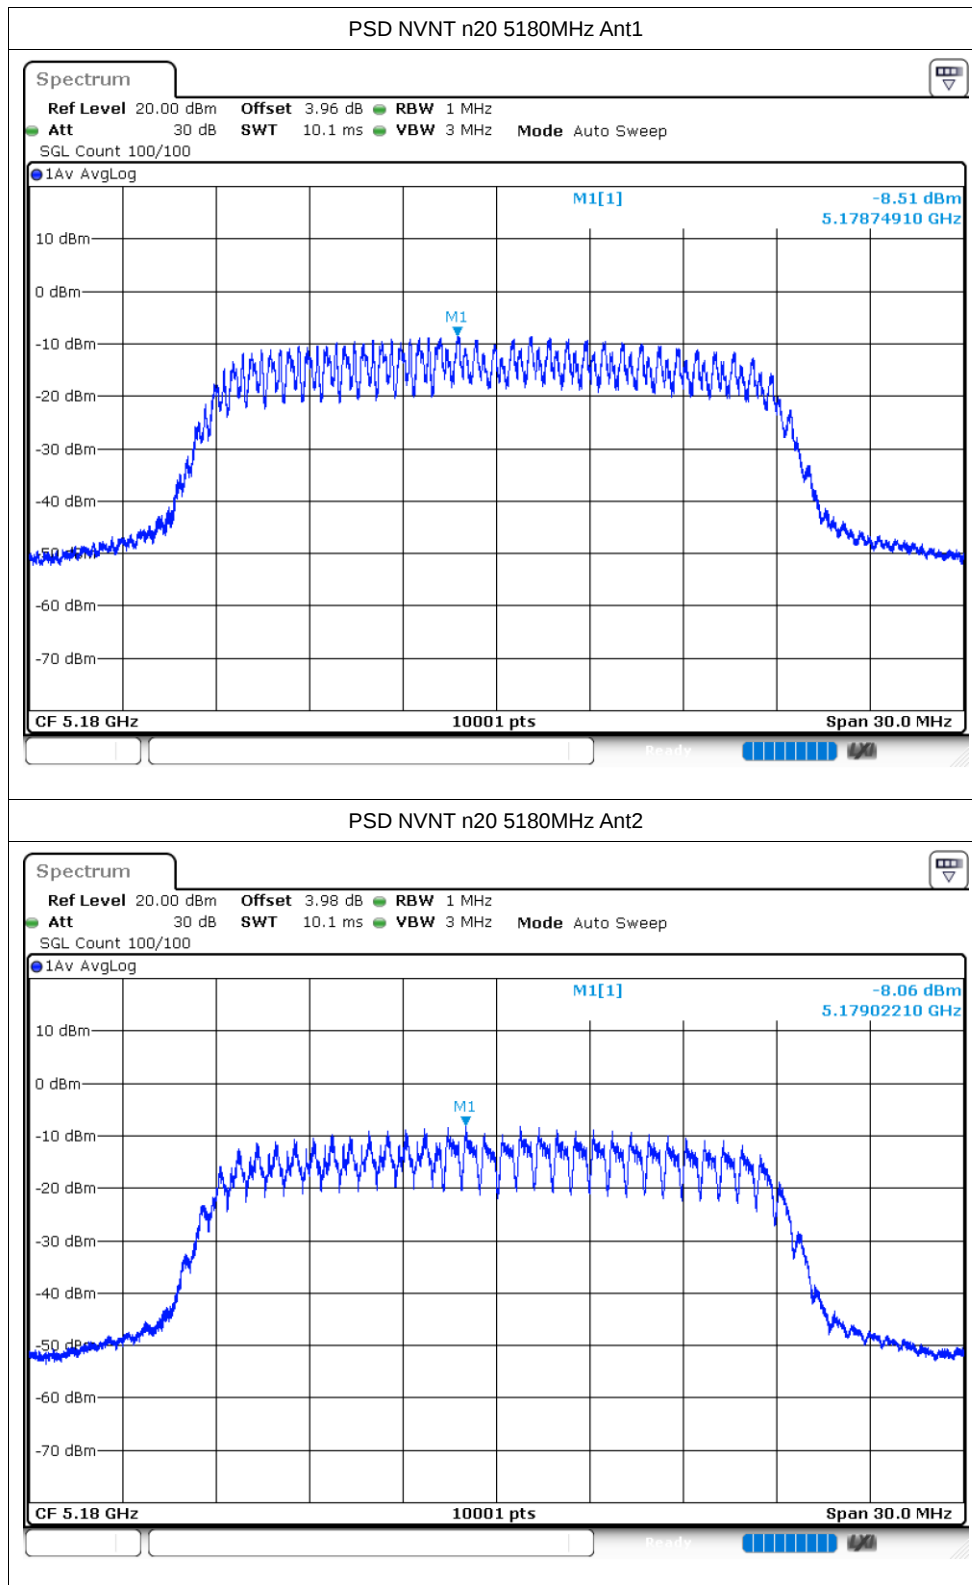

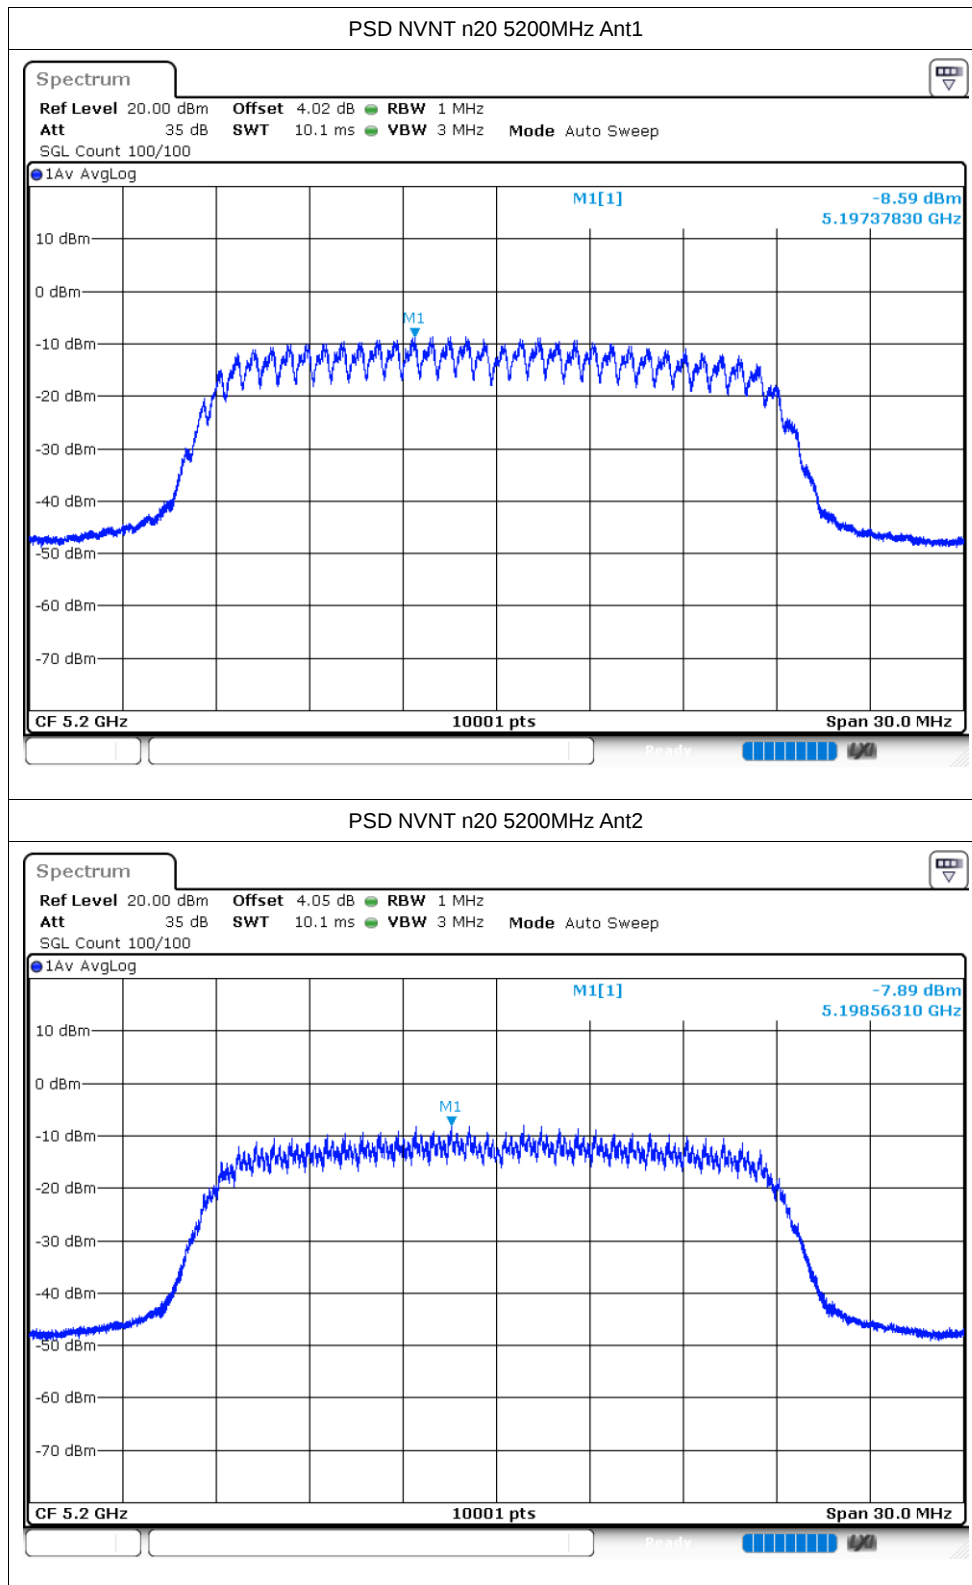

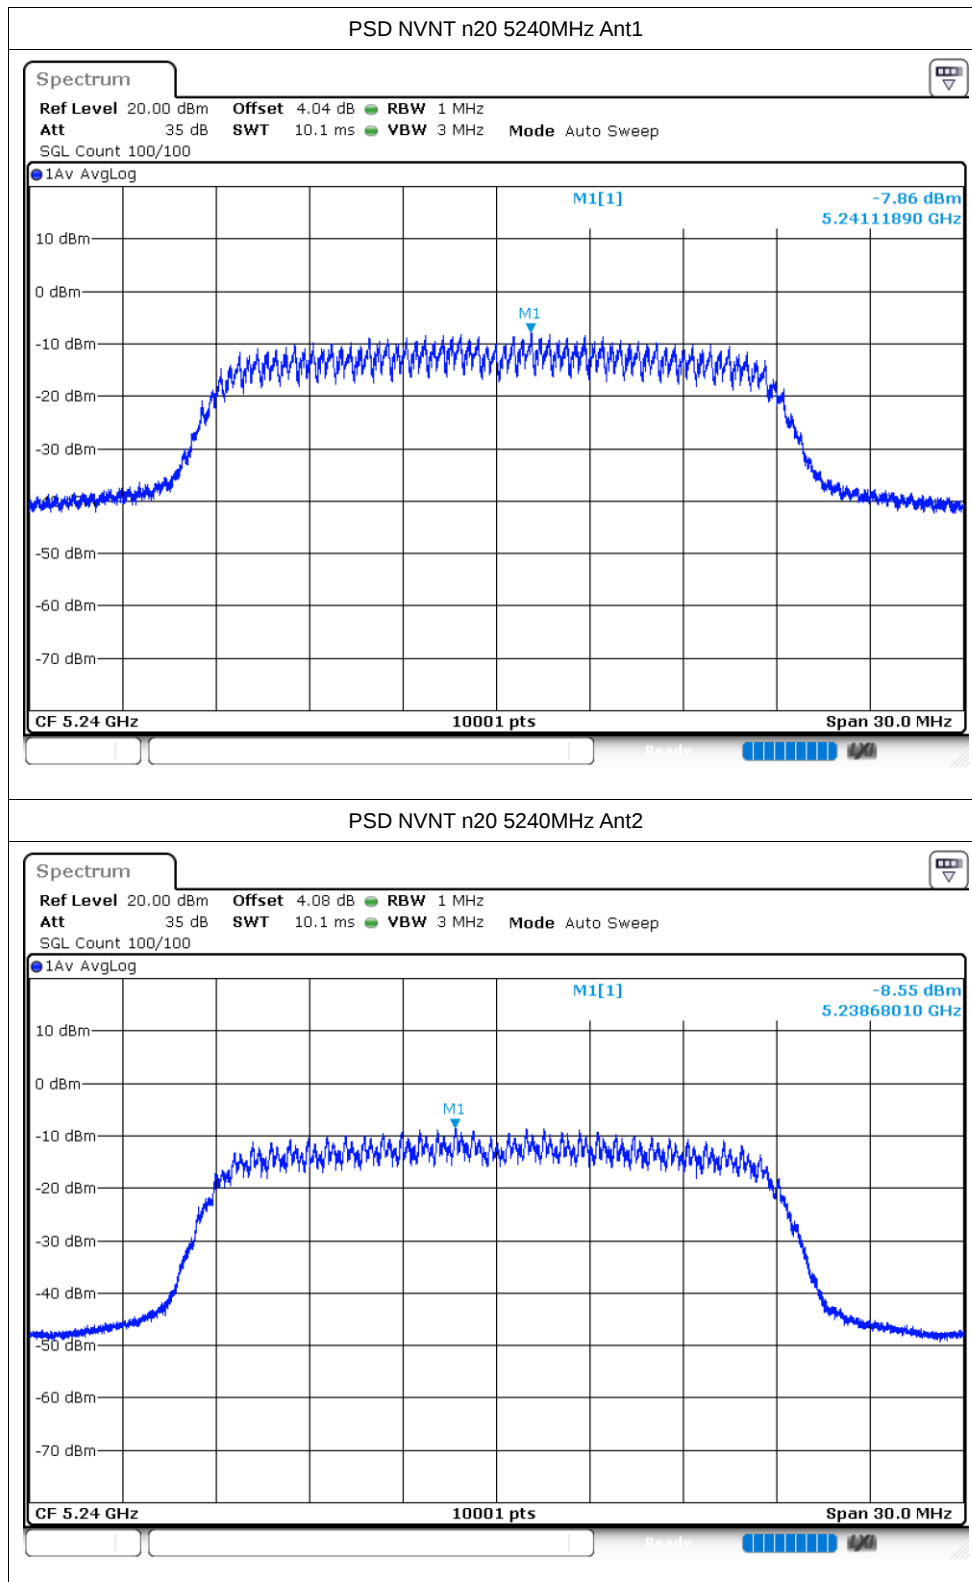

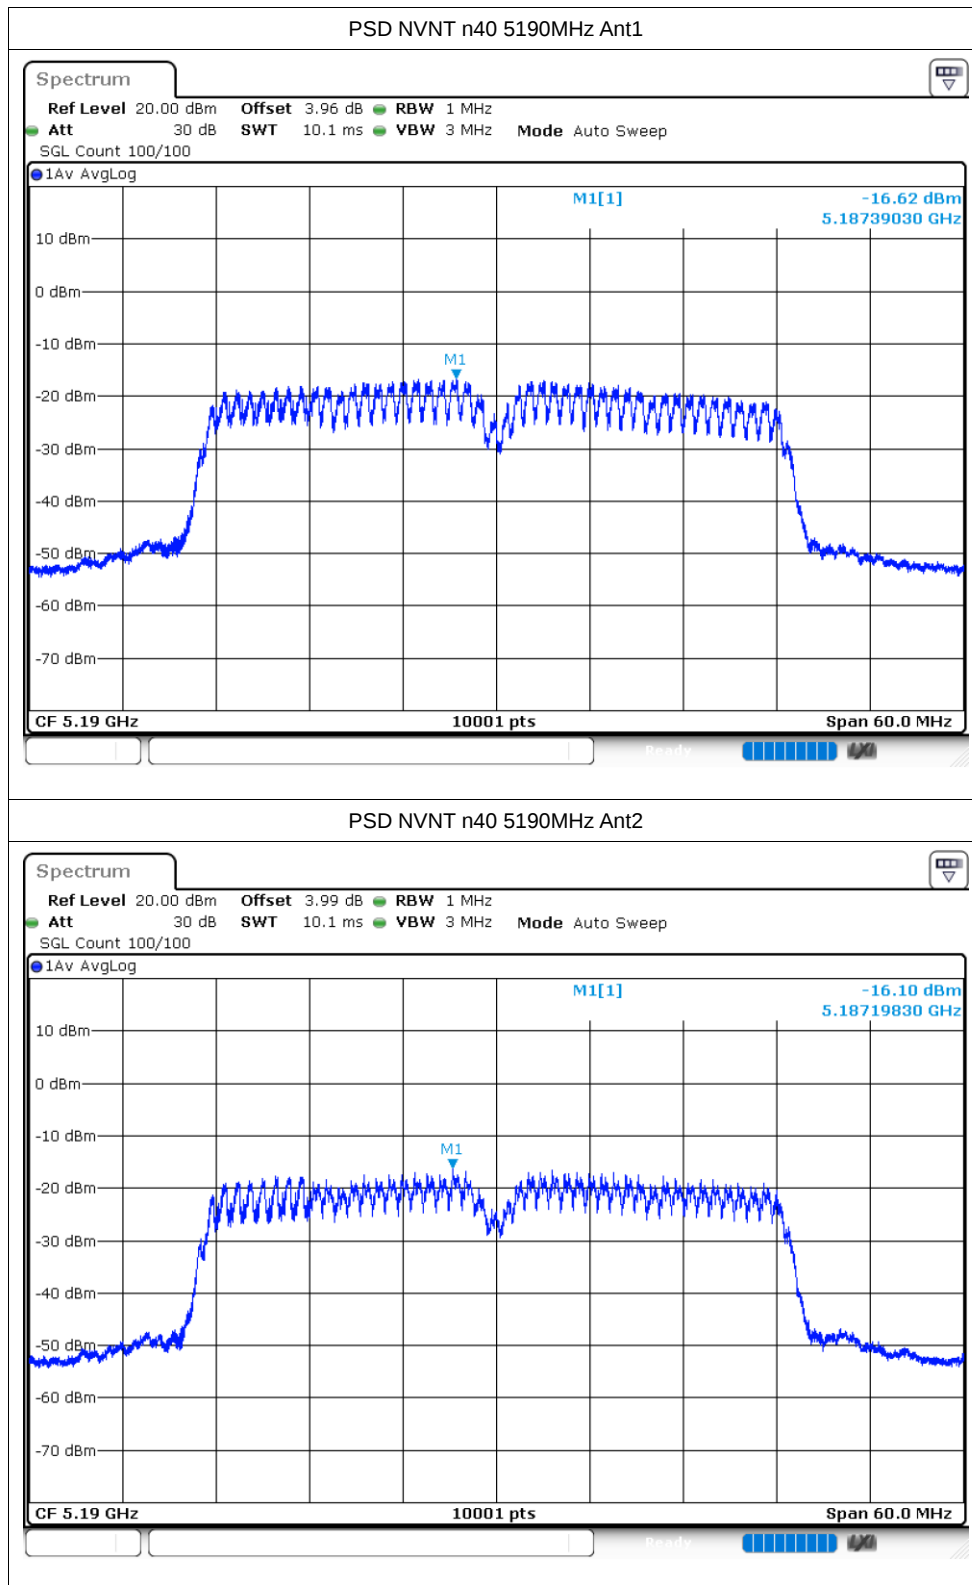

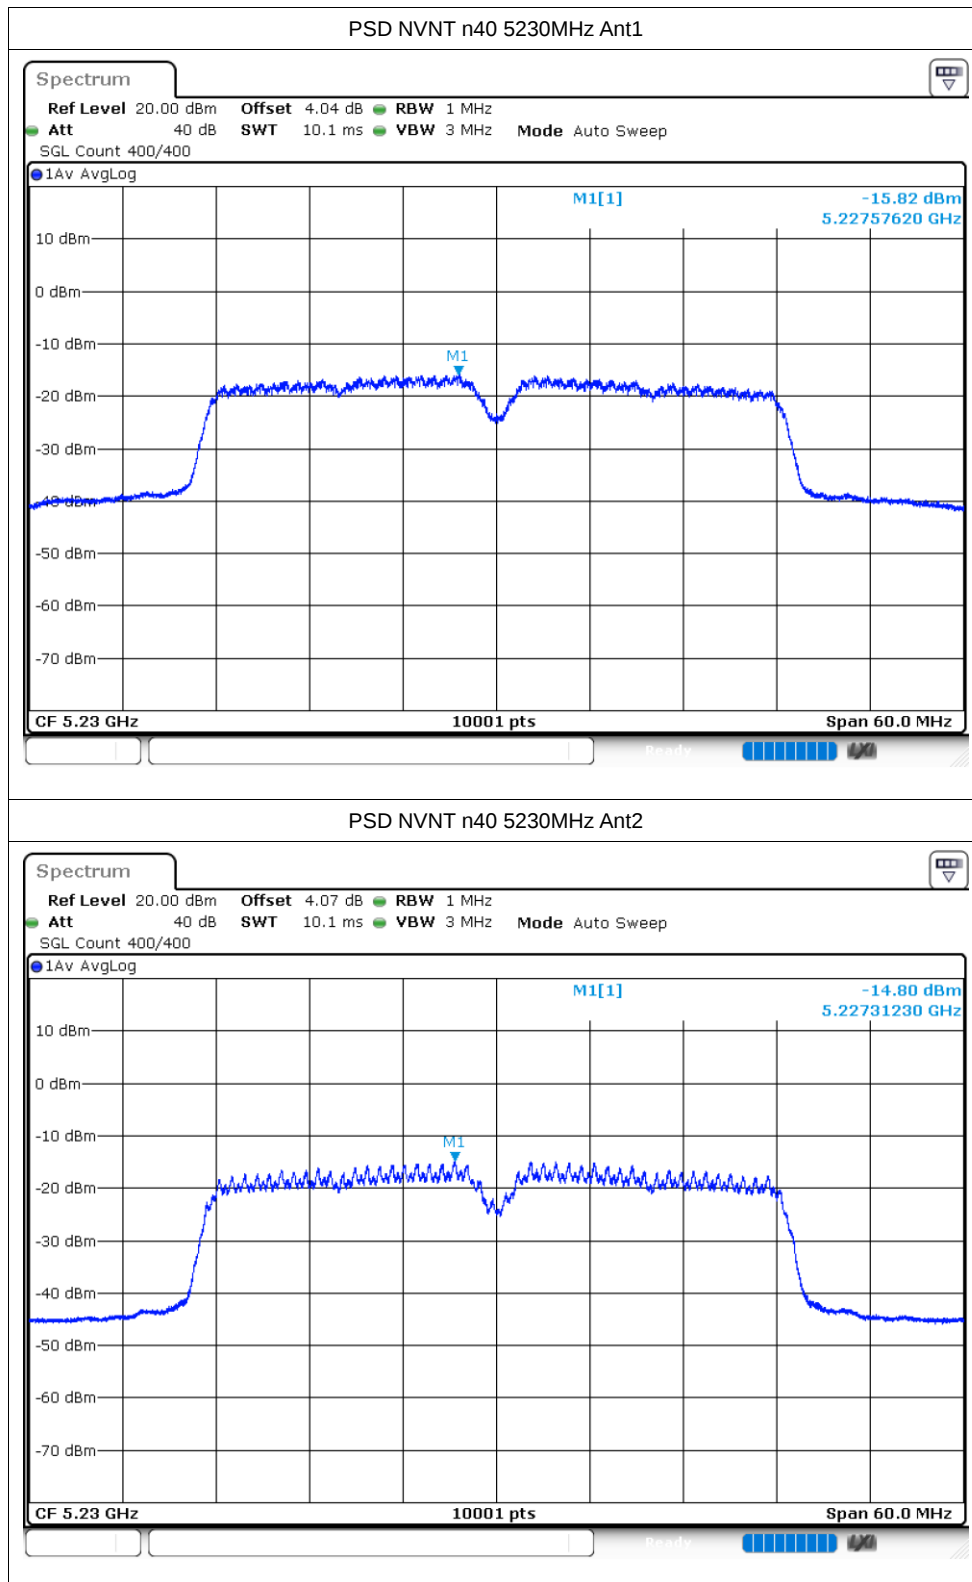

5.8G WIFI

Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5745	Ant1	84.26	0.74	5.88
NVNT	a	5785	Ant1	84.17	0.75	5.56
NVNT	a	5825	Ant1	96.37	0.16	100
NVNT	a	5745	Ant2	85.34	0.69	5.56
NVNT	a	5785	Ant2	84.94	0.71	5.56
NVNT	a	5825	Ant2	84.77	0.72	5.56
NVNT	n20	5745	Ant1	83.32	0.79	6.25
NVNT	n20	5785	Ant1	83.3	0.79	5.88
NVNT	n20	5825	Ant1	96.48	0.16	2.7
NVNT	n20	5745	Ant2	84.64	0.72	5.88
NVNT	n20	5785	Ant2	84.52	0.73	5.88
NVNT	n20	5825	Ant2	84.43	0.73	6.25
NVNT	n40	5755	Ant1	91.9	0.37	8.33
NVNT	n40	5795	Ant1	93.91	0.27	8.33
NVNT	n40	5755	Ant2	77.83	1.09	9.09
NVNT	n40	5795	Ant2	77.03	1.13	10
NVNT	ac20	5745	Ant1	77.19	1.12	9.09
NVNT	ac20	5785	Ant1	77.15	1.13	10
NVNT	ac20	5825	Ant1	77.18	1.12	9.09
NVNT	ac20	5745	Ant2	78.75	1.04	9.09
NVNT	ac20	5785	Ant2	78.7	1.04	8.33
NVNT	ac20	5825	Ant2	78.39	1.06	9.09
NVNT	ac40	5755	Ant1	74.99	1.25	12.5
NVNT	ac40	5795	Ant1	74.98	1.25	12.5
NVNT	ac40	5755	Ant2	67.4	1.71	14.29
NVNT	ac40	5795	Ant2	66.64	1.76	14.29
NVNT	ac80	5775	Ant1	67.57	1.7	16.67
NVNT	ac80	5775	Ant2	68.35	1.65	16.67


Test Graphs

Duty Cycle NVNT a 5745MHz Ant1

Spectrum

Ref Level 30.00 dBm Offset 4.25 dB RBW 10 MHz
Att 45 dB SWT 100 ms VBW 10 MHz
SGL

1Pk Clrw

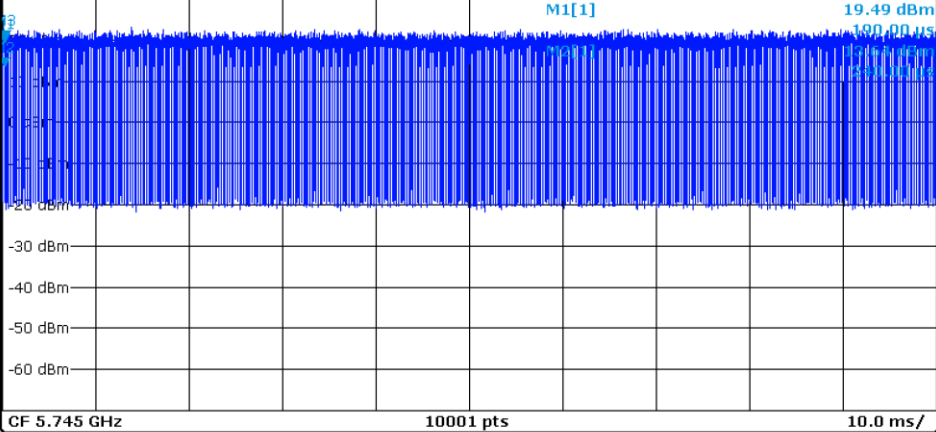



Duty Cycle NVNT a 5785MHz Ant1


Spectrum


Ref Level 30.00 dBm Offset 4.24 dB RBW 10 MHz
Att 40 dB SWT 100 ms VBW 10 MHz
SGL


1Pk Clrw

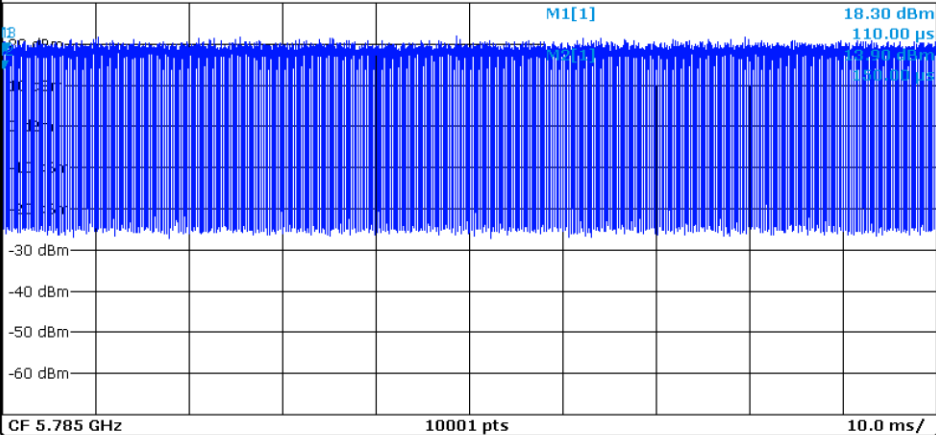

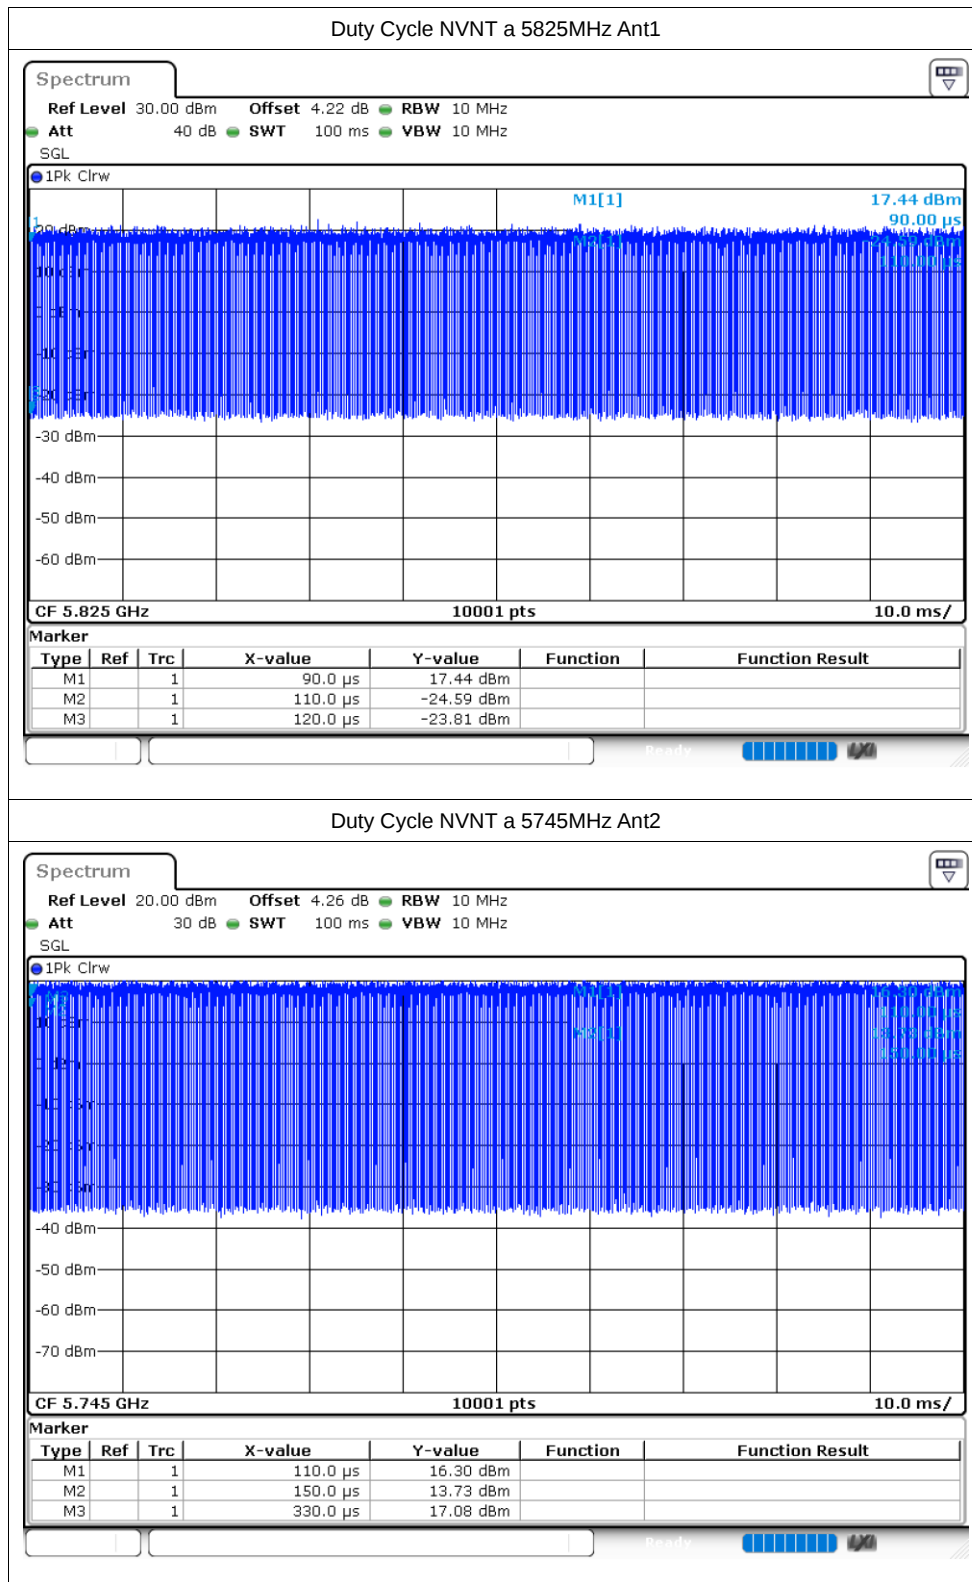


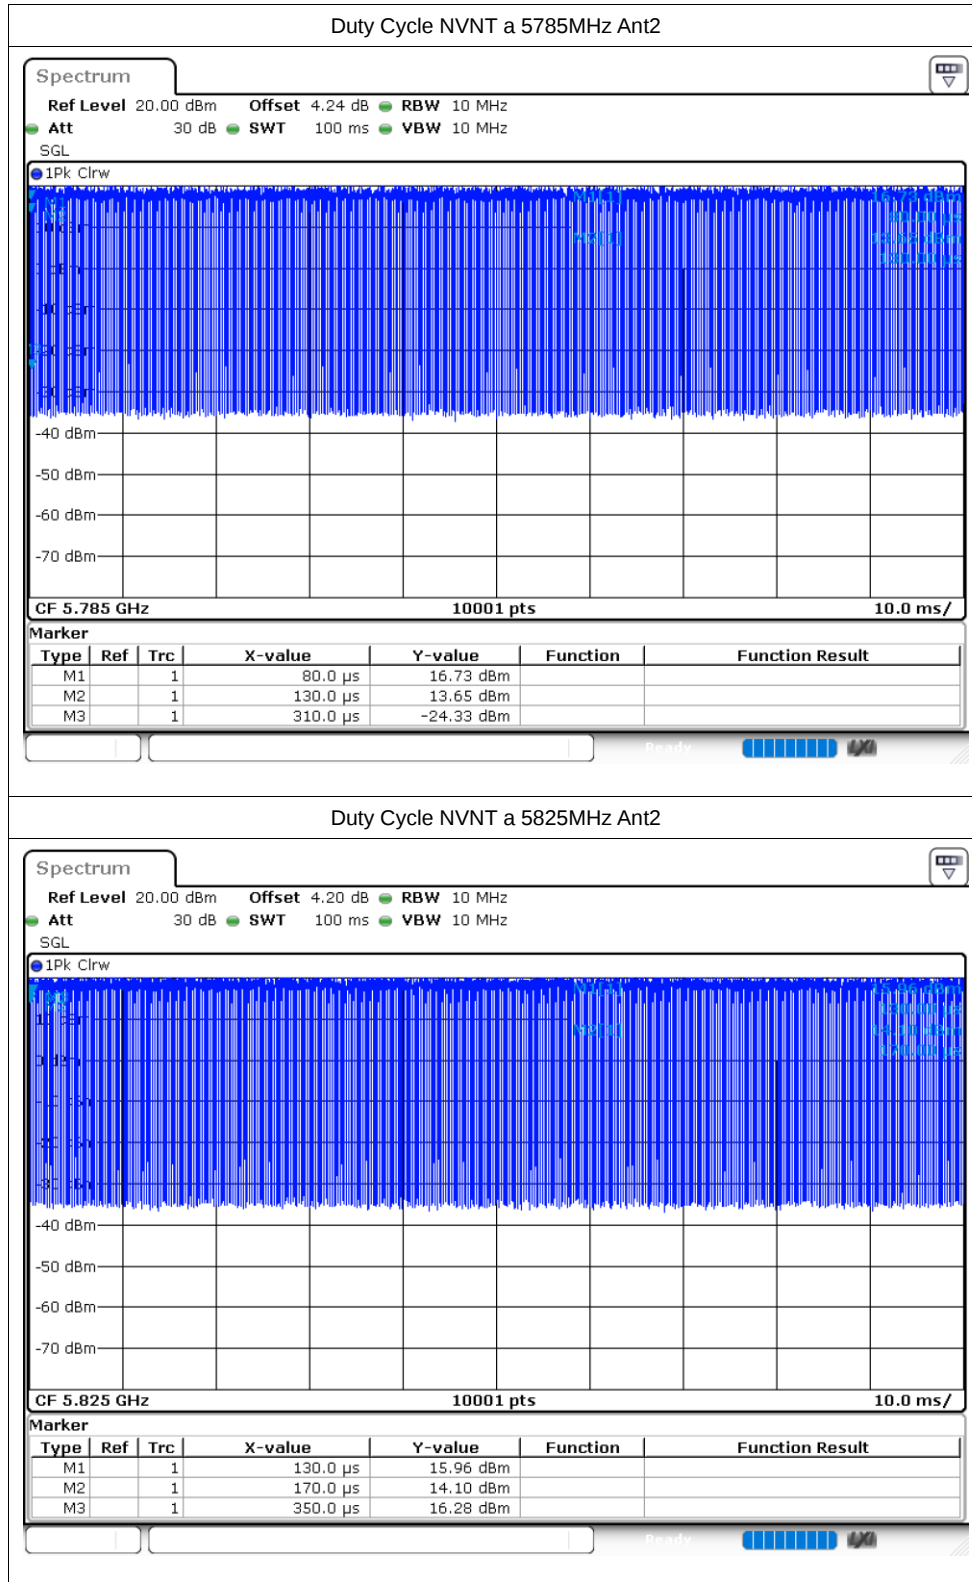

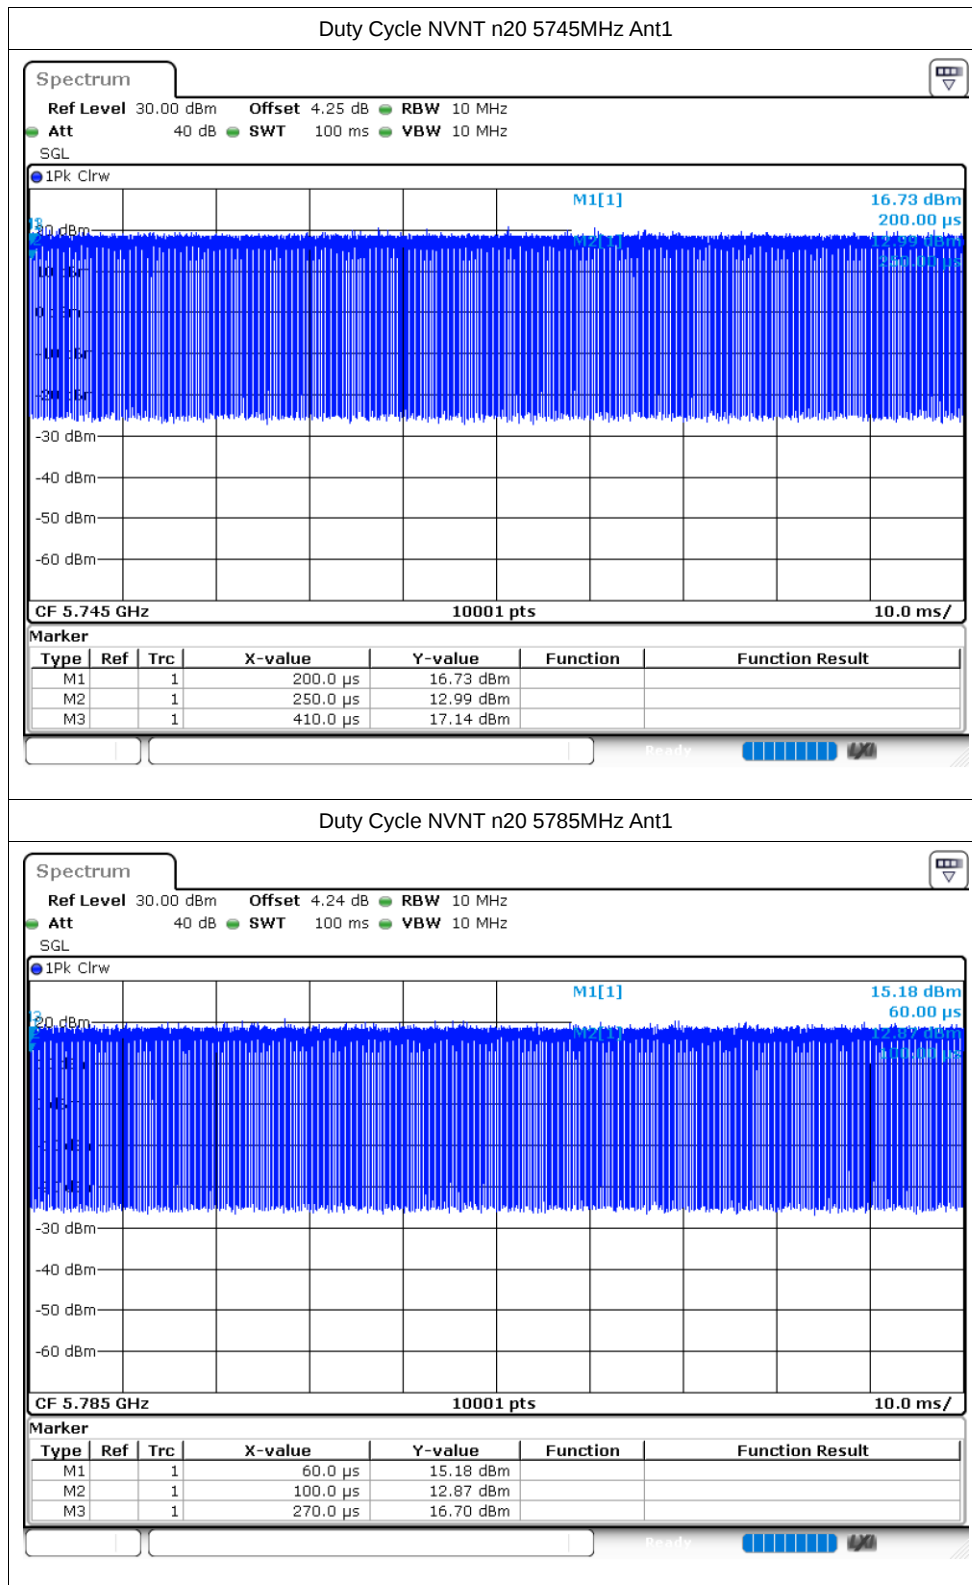


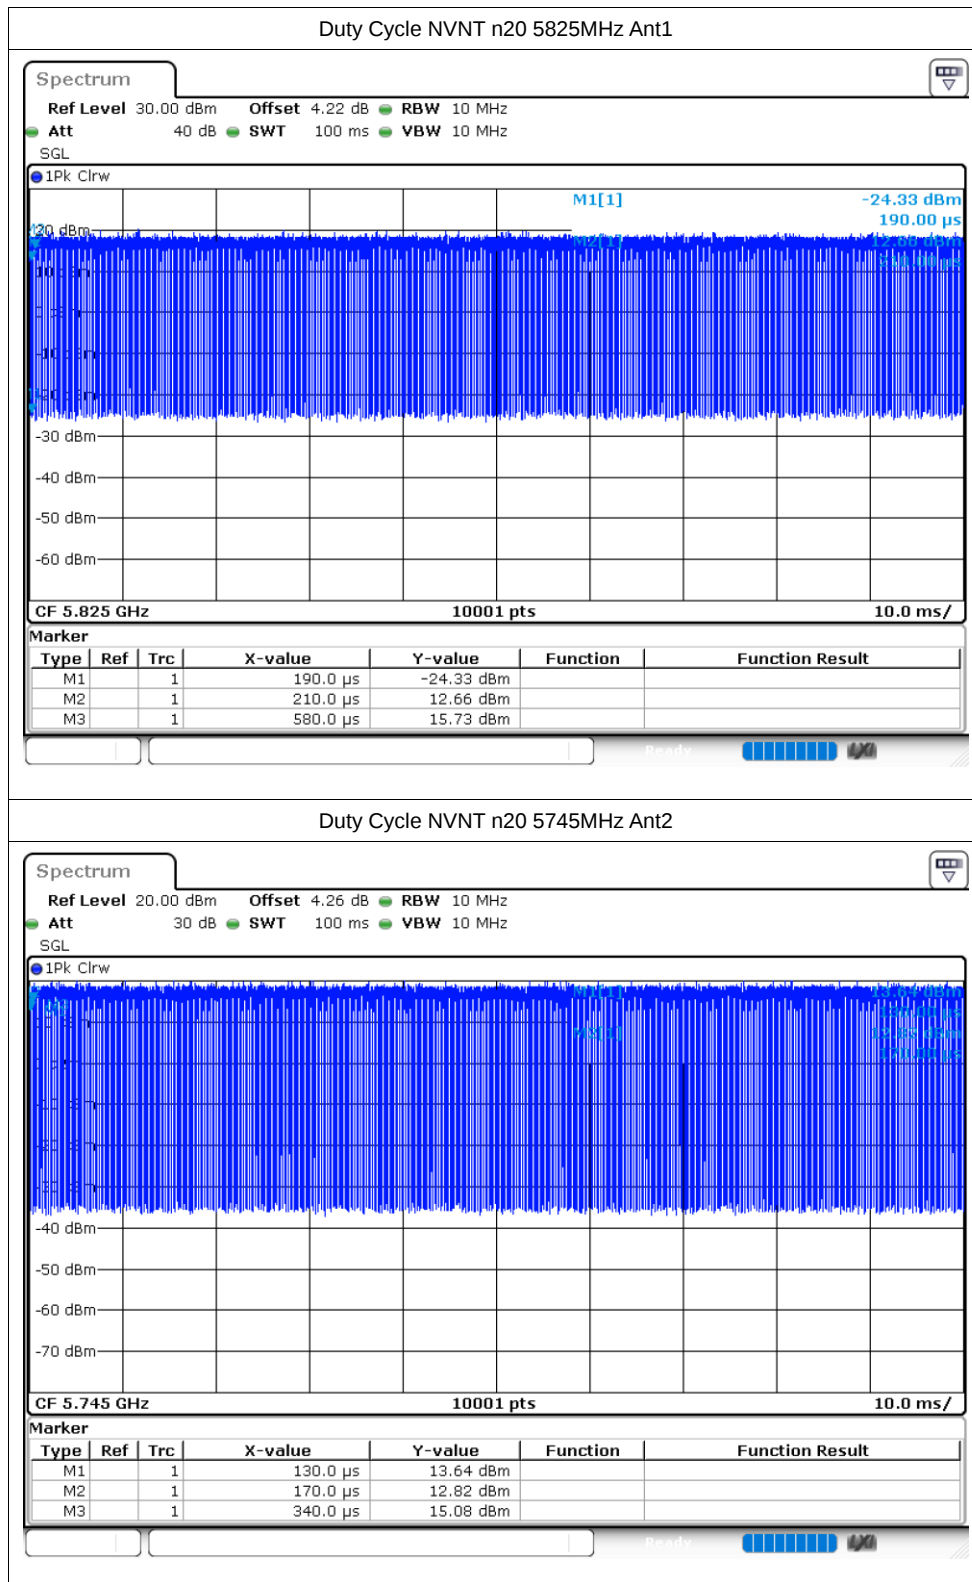



Duty Cycle NVNT n20 5785MHz Ant2

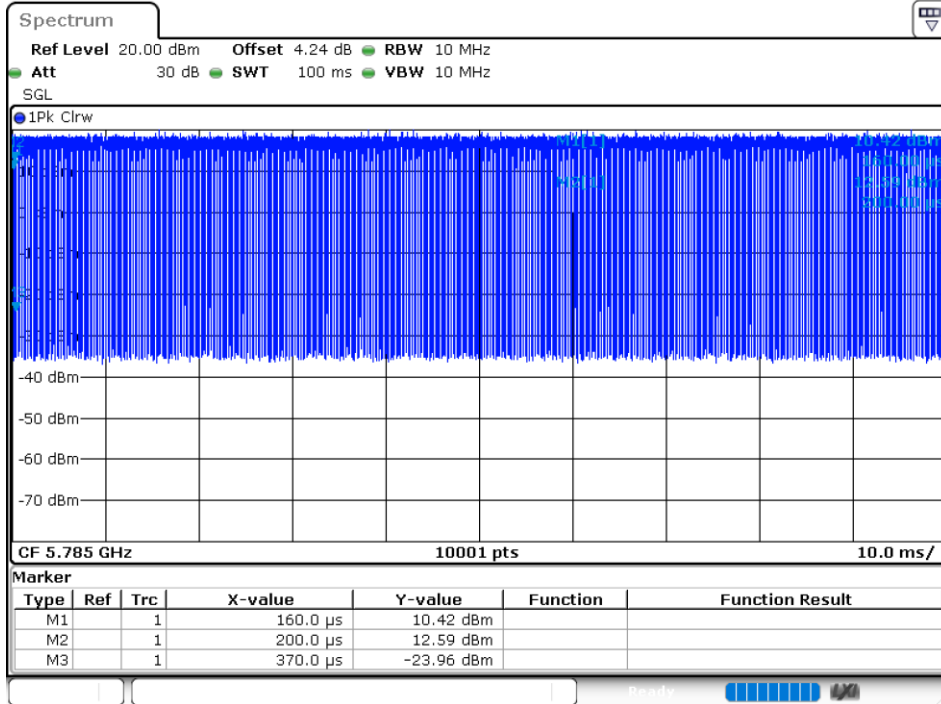



Duty Cycle NVNT n20 5825MHz Ant2

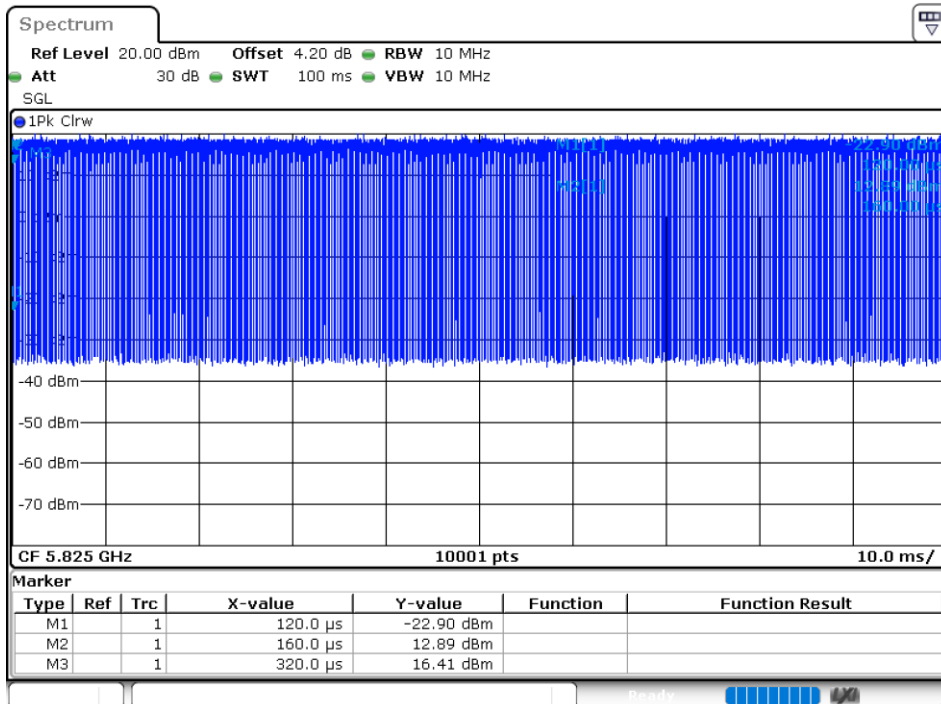


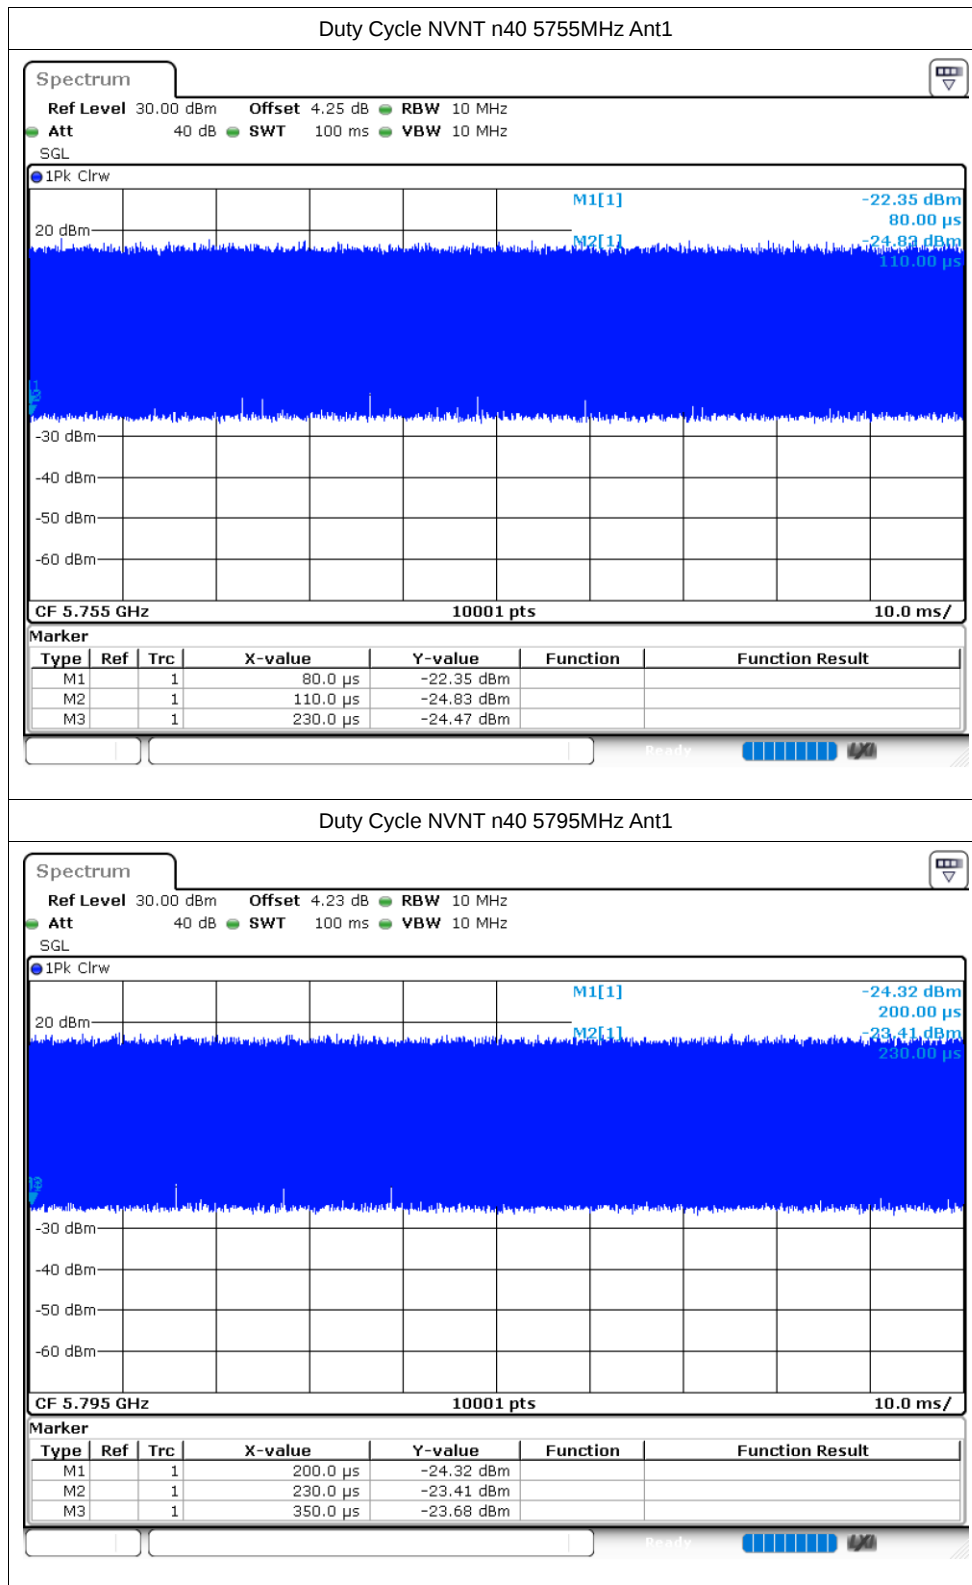

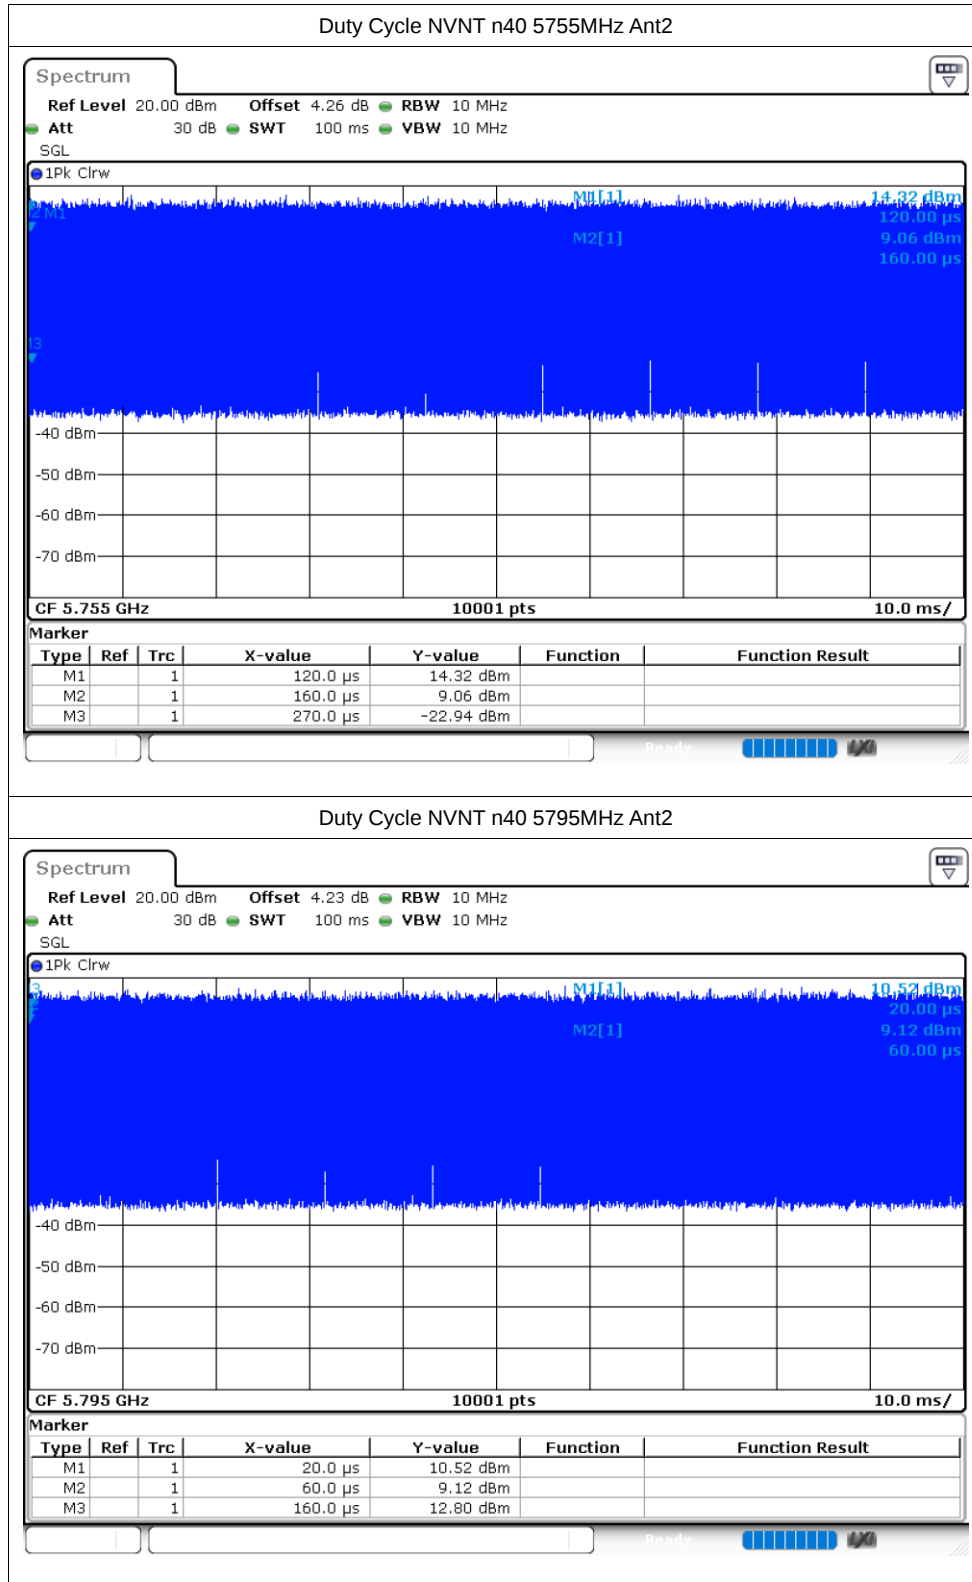


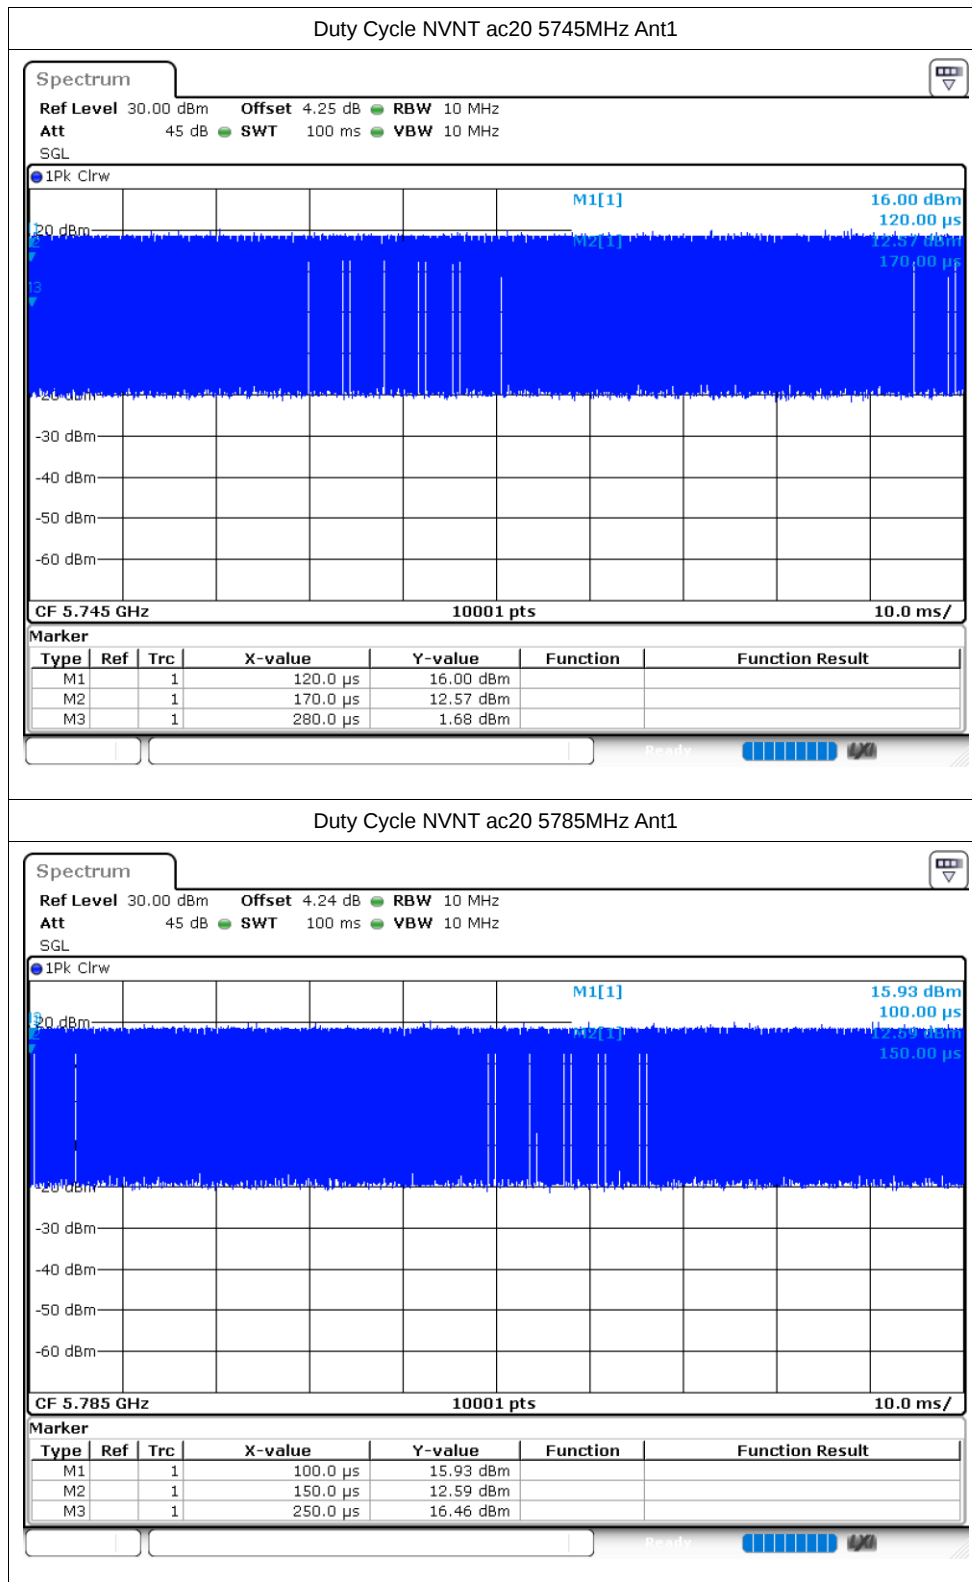

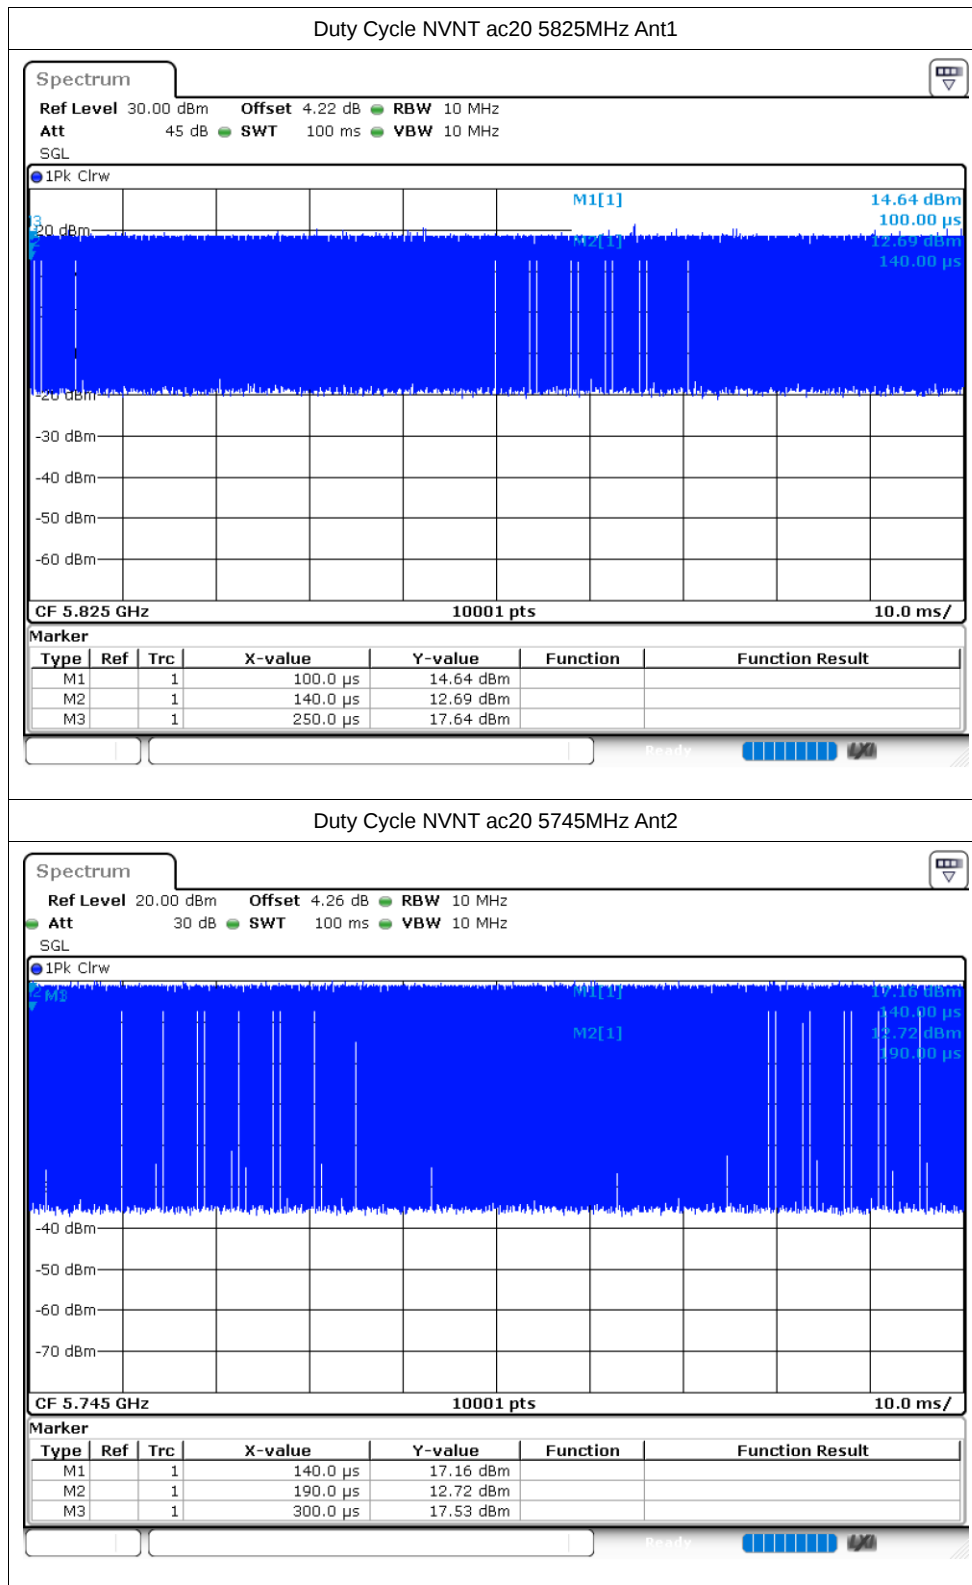


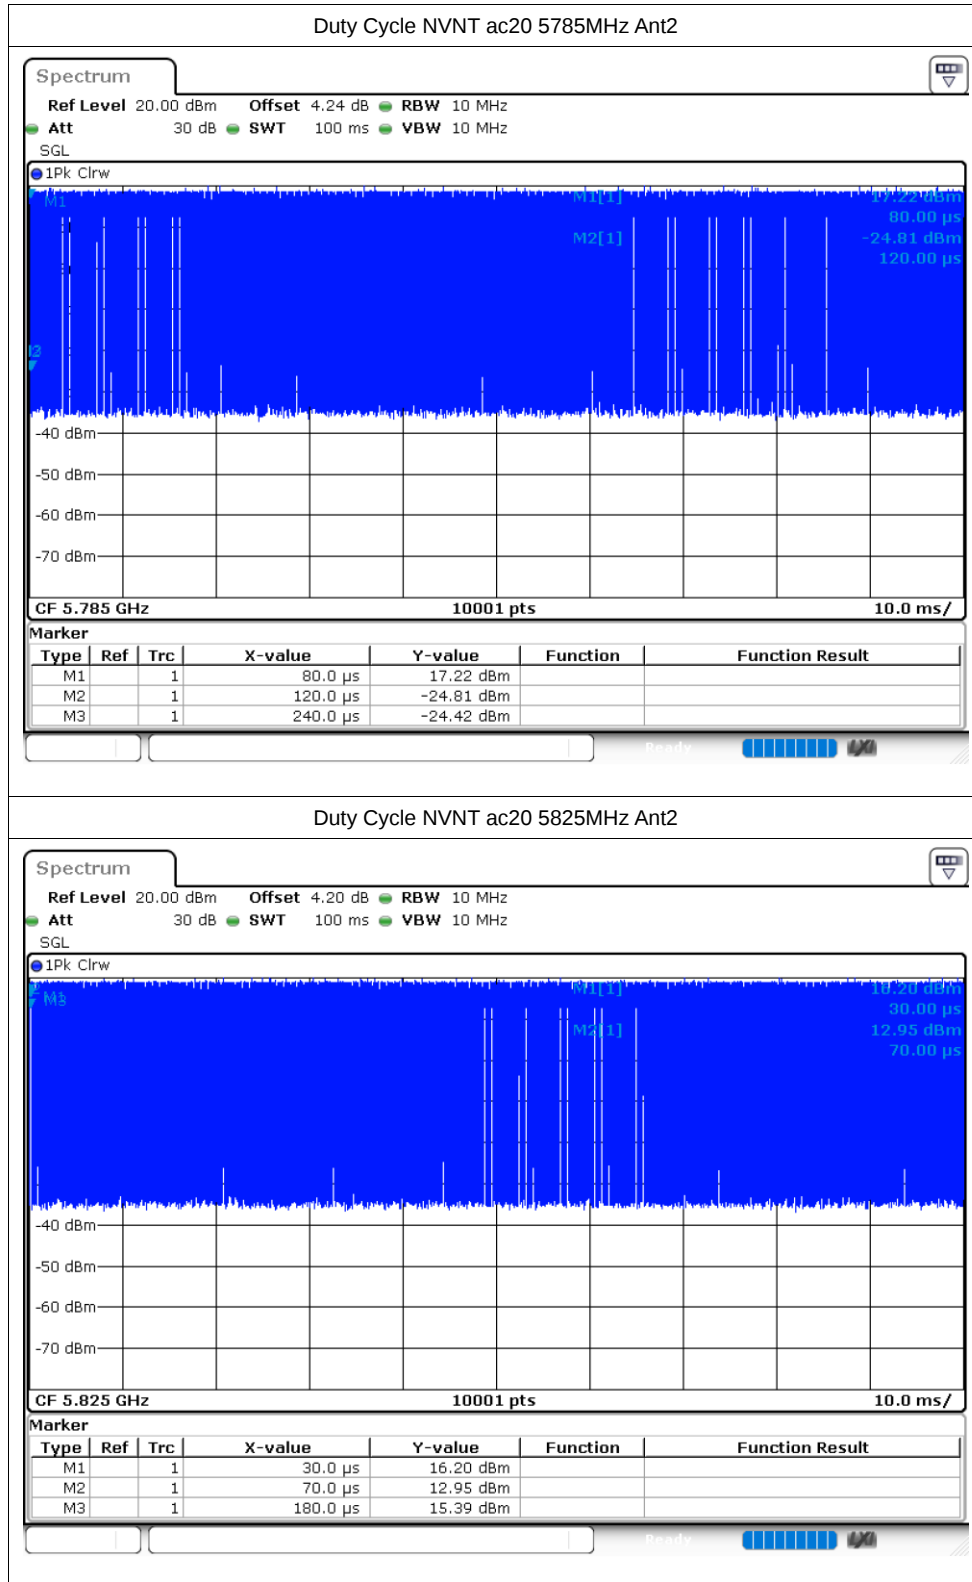



Duty Cycle NVNT ac40 5755MHz Ant1

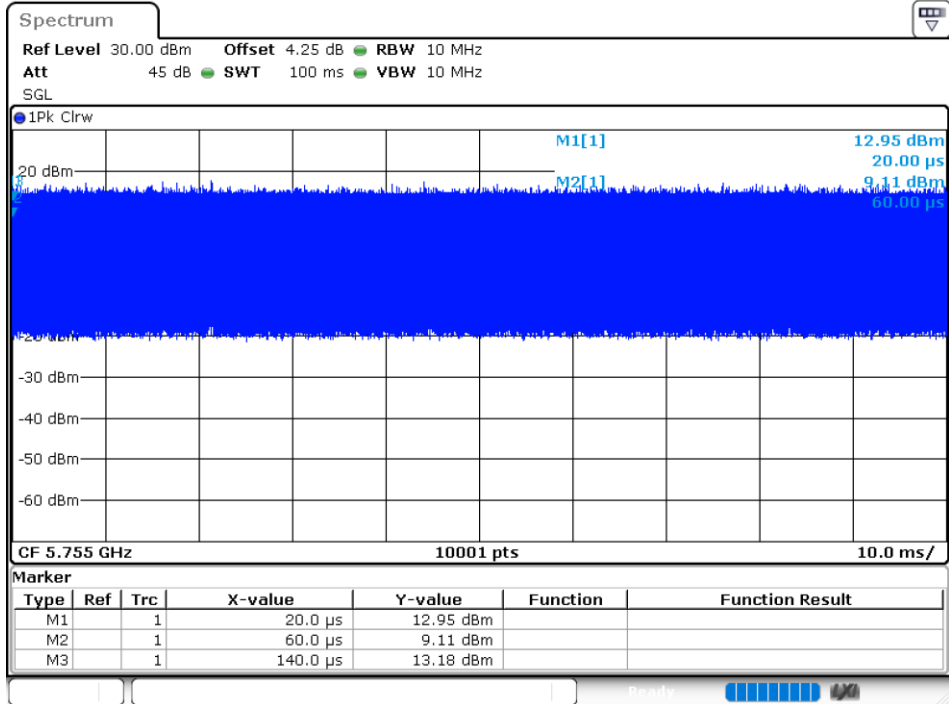

Duty Cycle NVNT ac40 5795MHz Ant1

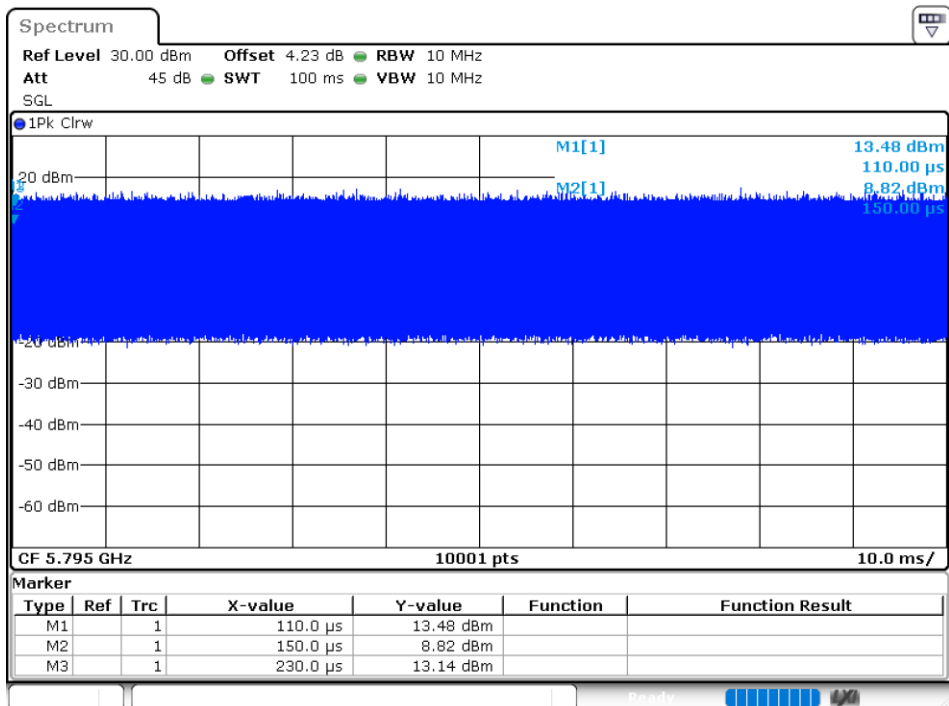

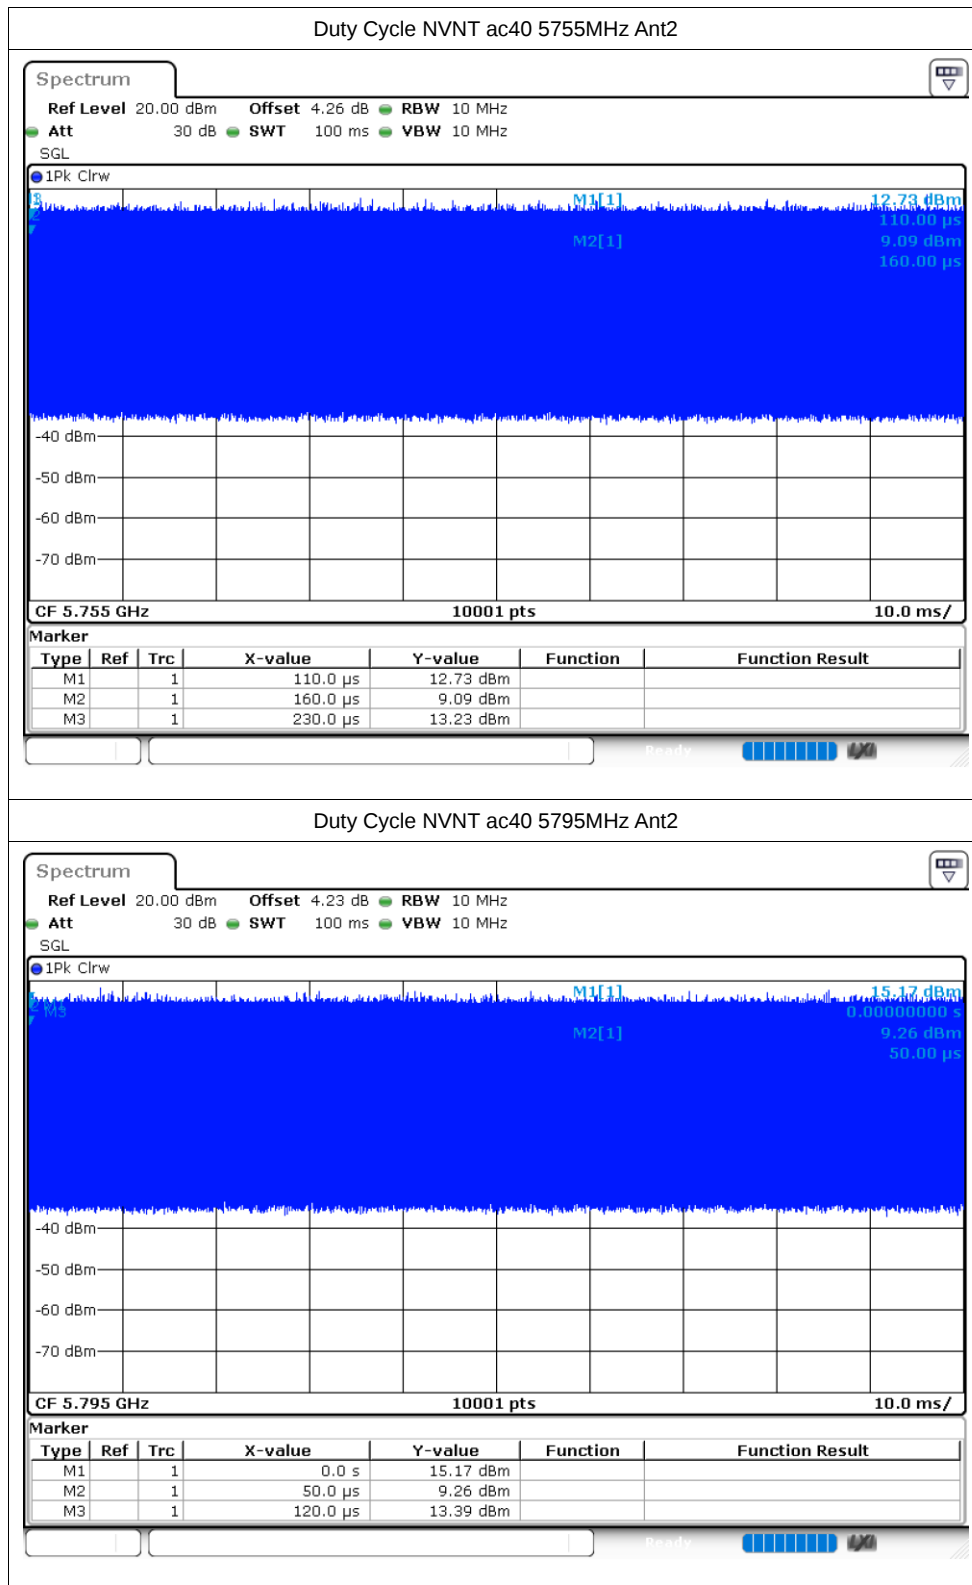

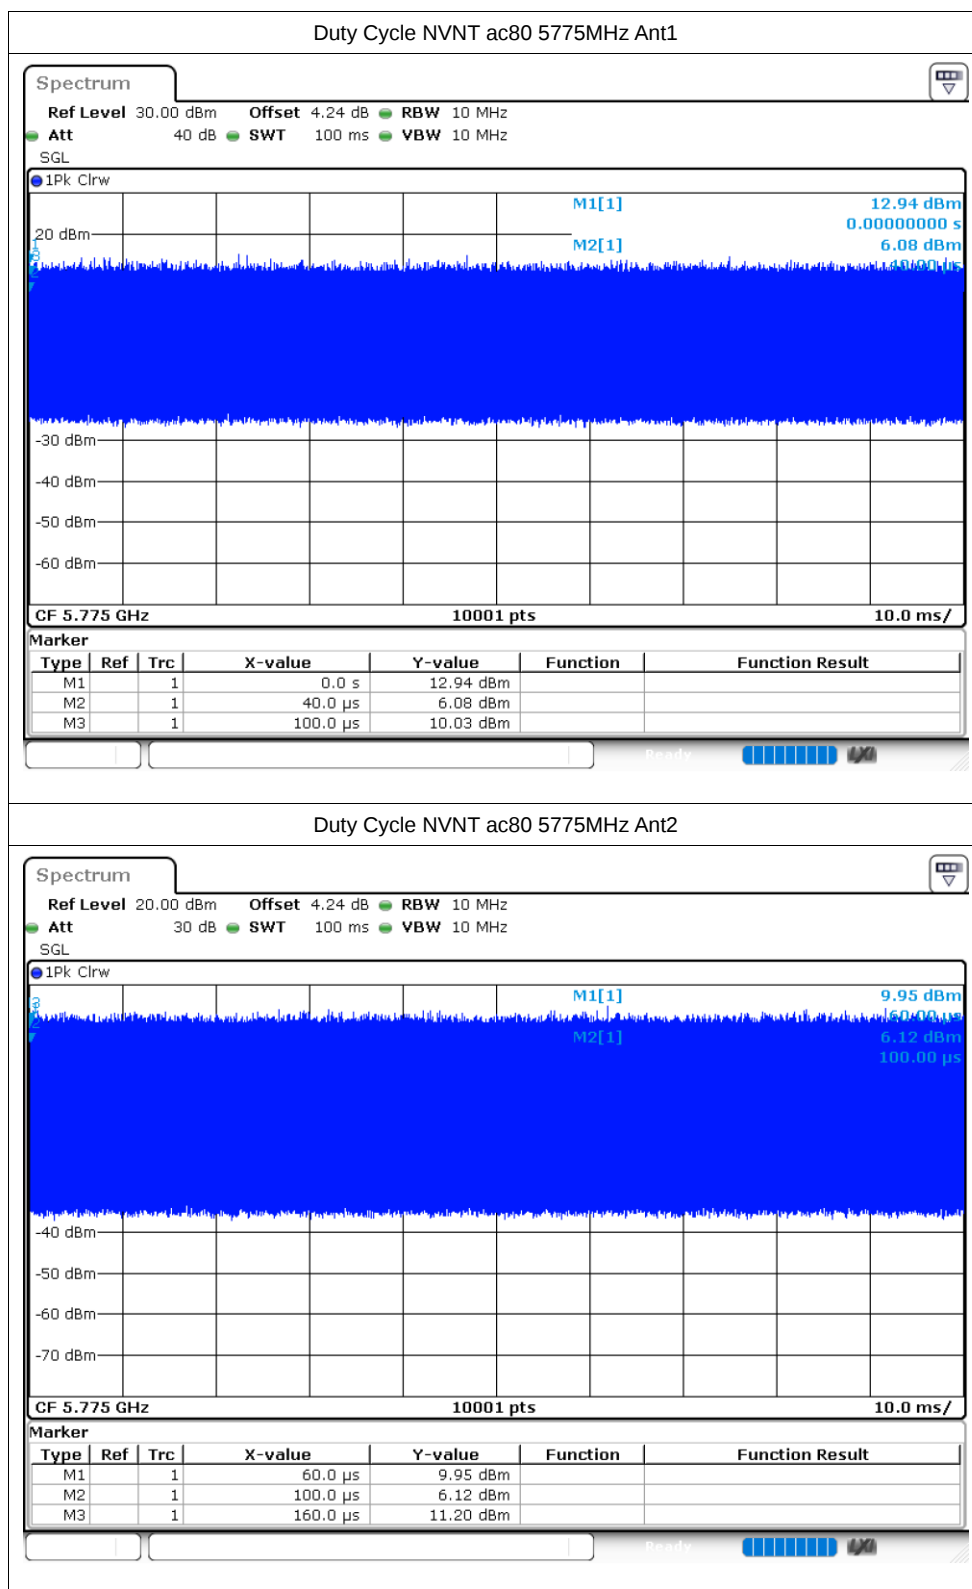

Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant1	12.54	30	Pass
NVNT	a	5785	Ant1	12.78	30	Pass
NVNT	a	5825	Ant1	13.02	30	Pass
NVNT	a	5745	Ant2	12.67	30	Pass
NVNT	a	5785	Ant2	12.98	30	Pass
NVNT	a	5825	Ant2	13.37	30	Pass
NVNT	n20	5745	Ant1	11.16	30	Pass
NVNT	n20	5785	Ant1	11.72	30	Pass
NVNT	n20	5825	Ant1	11.74	30	Pass
NVNT	n20	5745	Ant2	11.66	30	Pass
NVNT	n20	5785	Ant2	11.86	30	Pass
NVNT	n20	5825	Ant2	12.24	30	Pass
NVNT	n40	5755	Ant1	11.44	30	Pass
NVNT	n40	5795	Ant1	11.86	30	Pass
NVNT	n40	5755	Ant2	11.59	30	Pass
NVNT	n40	5795	Ant2	11.96	30	Pass
NVNT	ac20	5745	Ant1	11.27	30	Pass
NVNT	ac20	5785	Ant1	11.78	30	Pass
NVNT	ac20	5825	Ant1	11.86	30	Pass
NVNT	ac20	5745	Ant2	11.76	30	Pass
NVNT	ac20	5785	Ant2	11.95	30	Pass
NVNT	ac20	5825	Ant2	12.32	30	Pass
NVNT	ac40	5755	Ant1	11.33	30	Pass
NVNT	ac40	5795	Ant1	11.48	30	Pass
NVNT	ac40	5755	Ant2	11.61	30	Pass
NVNT	ac40	5795	Ant2	11.92	30	Pass
NVNT	ac80	5775	Ant1	11.45	30	Pass
NVNT	ac80	5775	Ant2	11.74	30	Pass