



802.11ax-HE40 26dB Bandwidth & 99% Bandwidth


Channel 38 (5190MHz)

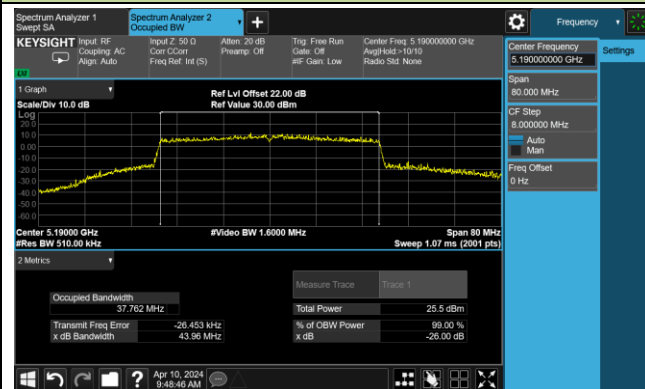


Channel 46 (5230MHz)

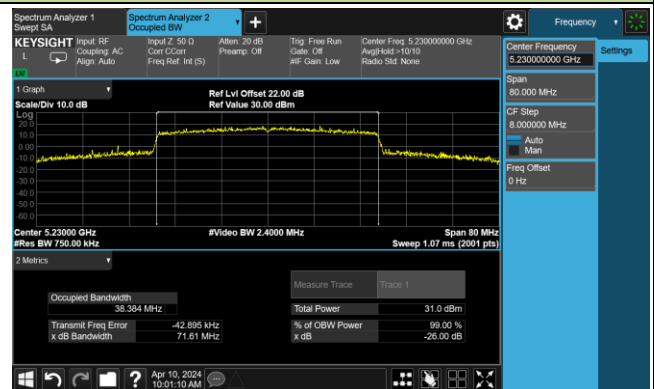


Channel 54 (5270MHz)

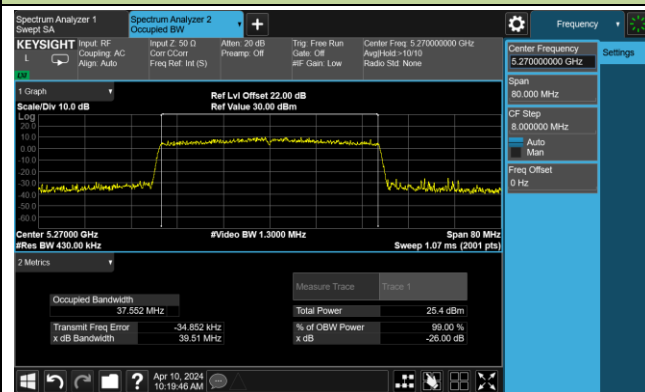


Channel 62 (5310MHz)

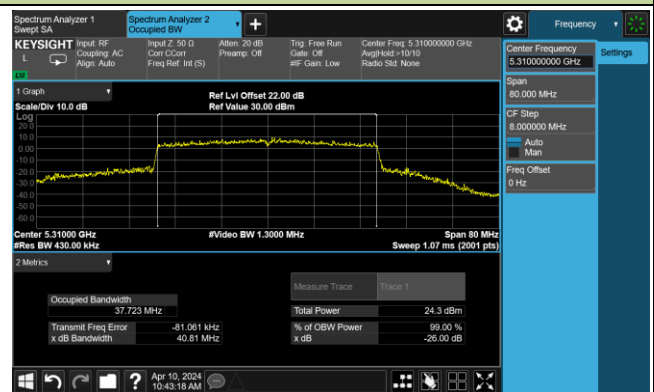


Channel 102 (5510MHz)

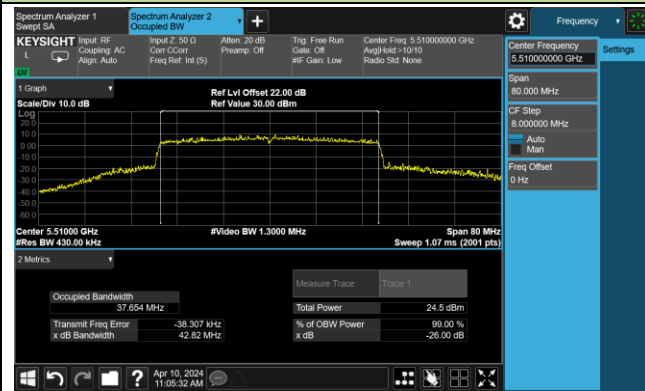


Channel 110 (5550MHz)

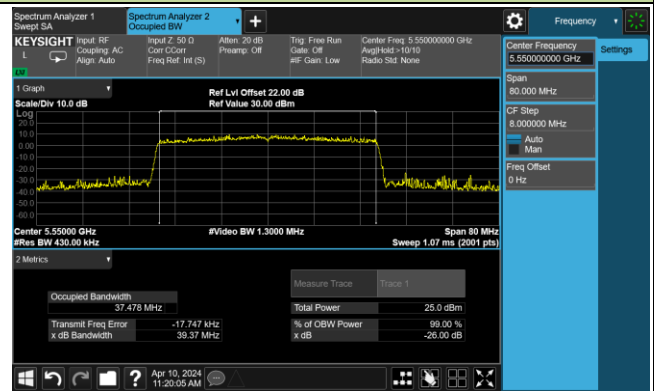


Channel 134 (5670MHz)

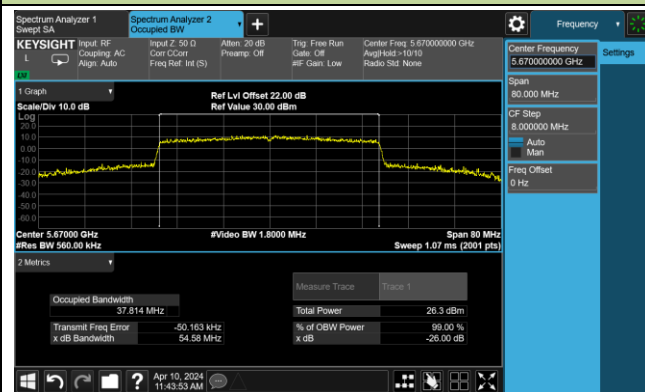


Channel 142(5710MHz)

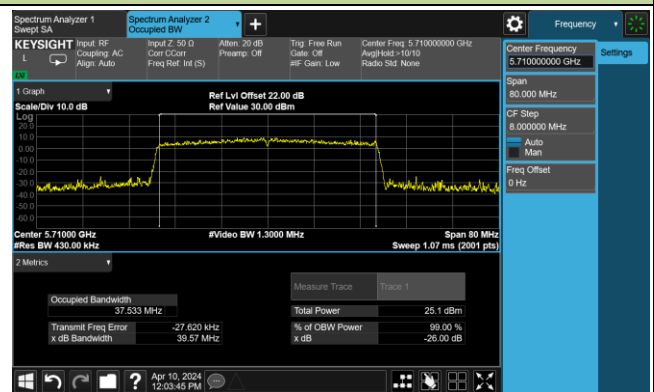

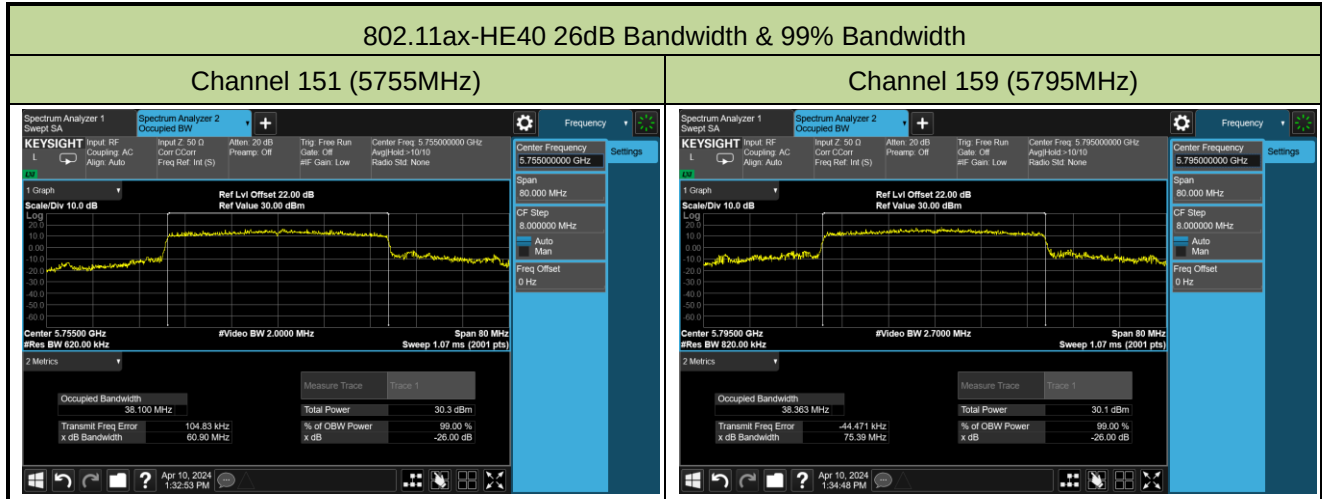


802.11ax-HE80 26dB Bandwidth & 99% Bandwidth


Channel 42 (5210MHz)

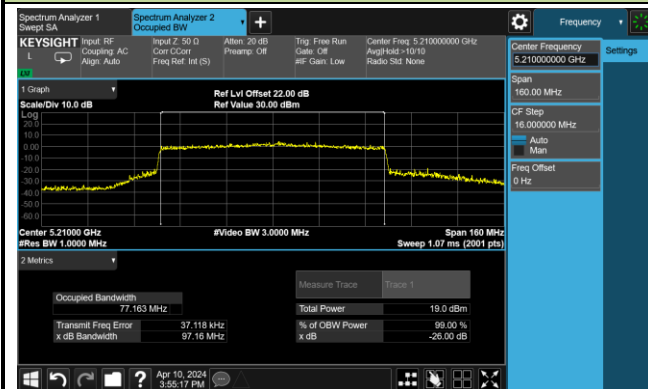


Channel 58 (5290MHz)

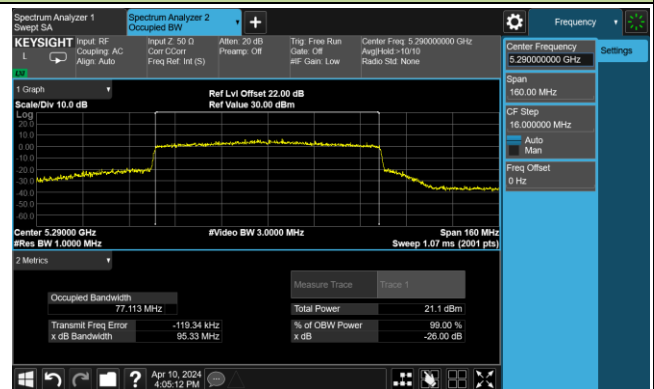


Channel 106 (5530MHz)

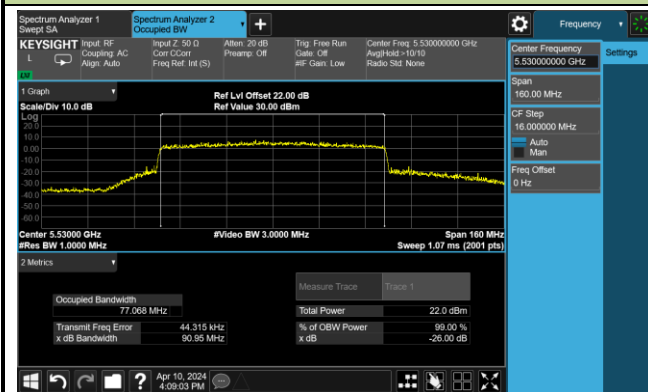


Channel 122 (5610MHz)

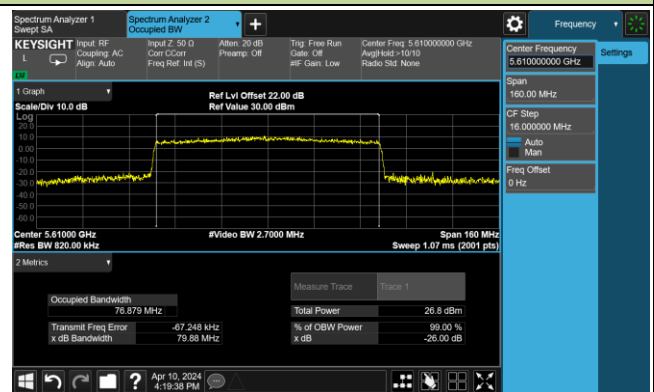


Channel 138 (5690MHz)

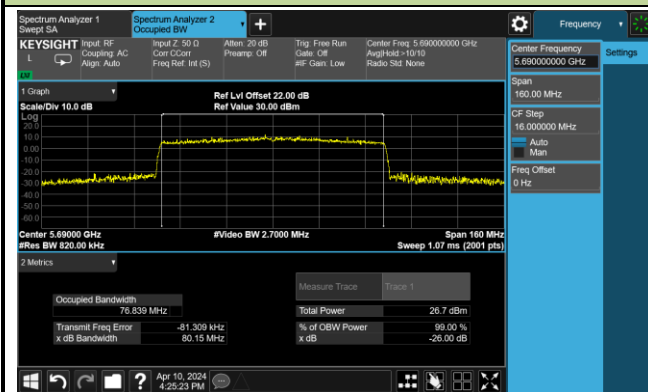

Channel 155 (5775MHz)

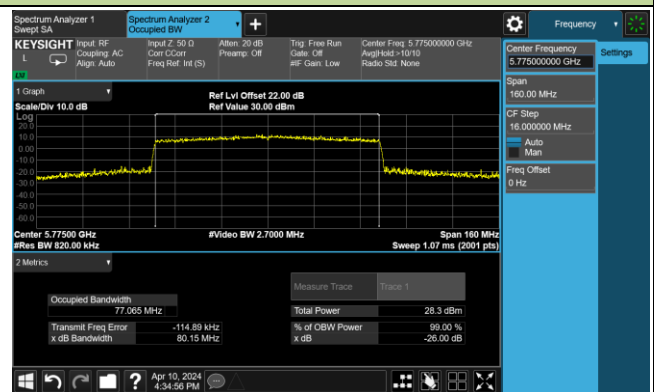

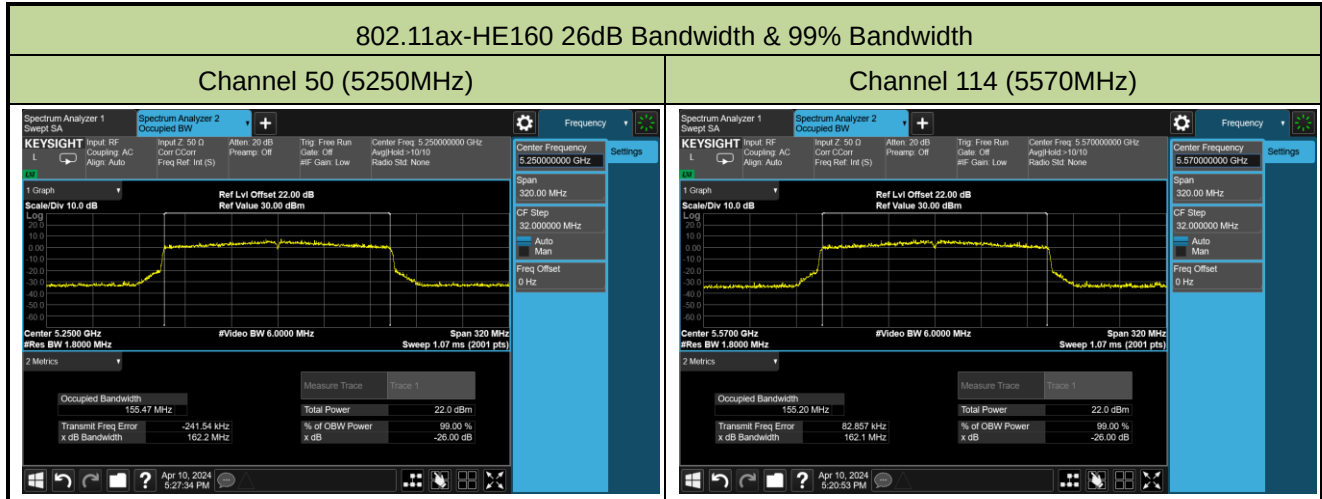


A.3 6dB Bandwidth Test Result

Test Site	SIP-TR1	Test Engineer	Ryan Wang
Test Date	2024-05-22 ~ 2024-06-01		


Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
11a	6Mbps	149	5745	16.34	≥0.5
11a	6Mbps	157	5785	16.34	≥0.5
11a	6Mbps	165	5825	16.32	≥0.5
11ac-VHT20	MCS0	149	5745	17.23	≥0.5
11ac-VHT20	MCS0	157	5785	16.31	≥0.5
11ac-VHT20	MCS0	165	5825	16.92	≥0.5
11ac-VHT40	MCS0	151	5755	32.61	≥0.5
11ac-VHT40	MCS0	159	5795	35.00	≥0.5
11ac-VHT80	MCS0	155	5775	72.71	≥0.5
11ax-HE20	MCS0	149	5745	19.00	≥0.5
11ax-HE20	MCS0	157	5785	18.79	≥0.5
11ax-HE20	MCS0	165	5825	18.68	≥0.5
11ax-HE40	MCS0	151	5755	35.87	≥0.5
11ax-HE40	MCS0	159	5795	33.79	≥0.5
11ax-HE80	MCS0	155	5775	75.12	≥0.5

802.11a 6dB Bandwidth

Channel 149 (5745MHz)

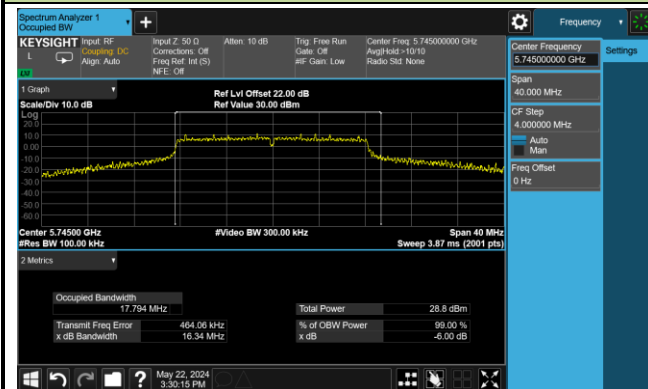

Channel 157 (5785MHz)

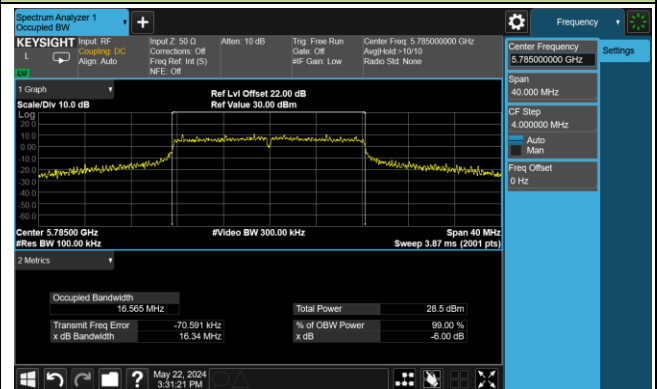


Channel 165 (5825MHz)




802.11ac-VHT20 6dB Bandwidth


Channel 149 (5745MHz)

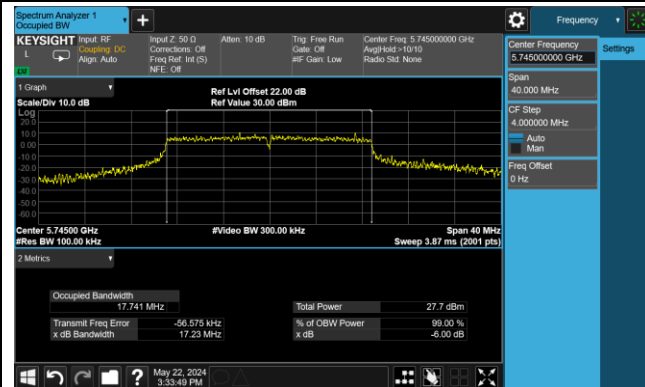

Channel 157 (5785MHz)

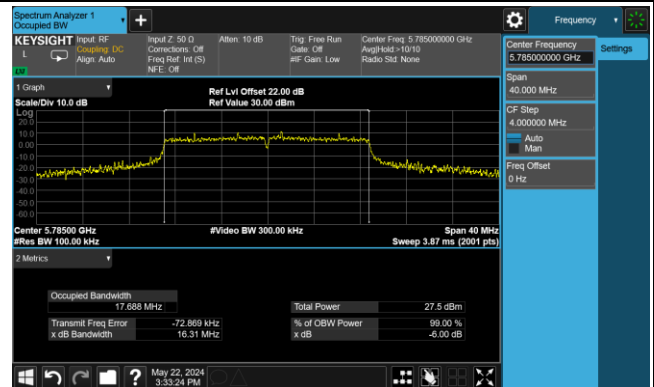


Channel 165 (5825MHz)

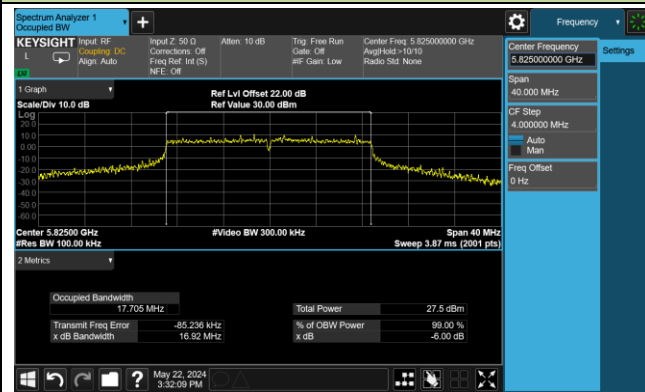



802.11ac-VHT40 6dB Bandwidth

Channel 151 (5755MHz)

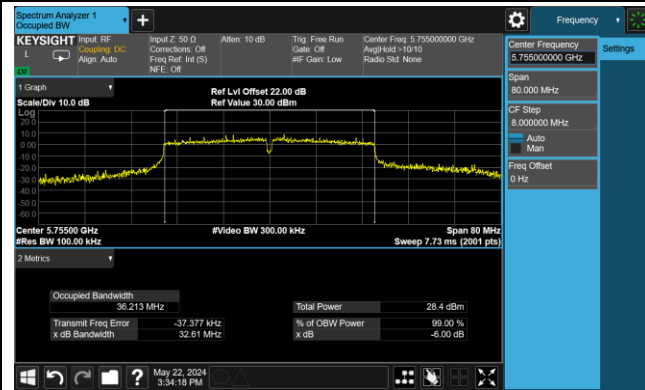


Channel 159 (5795MHz)

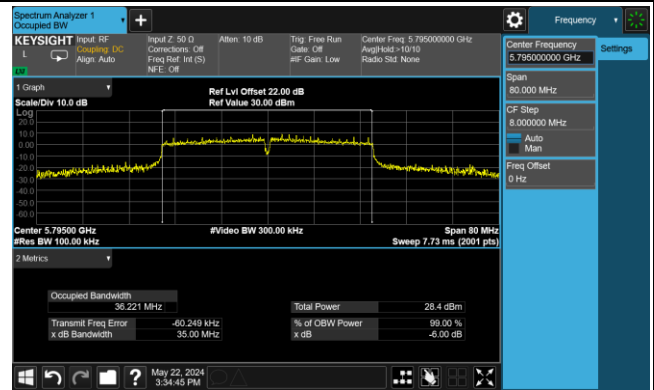

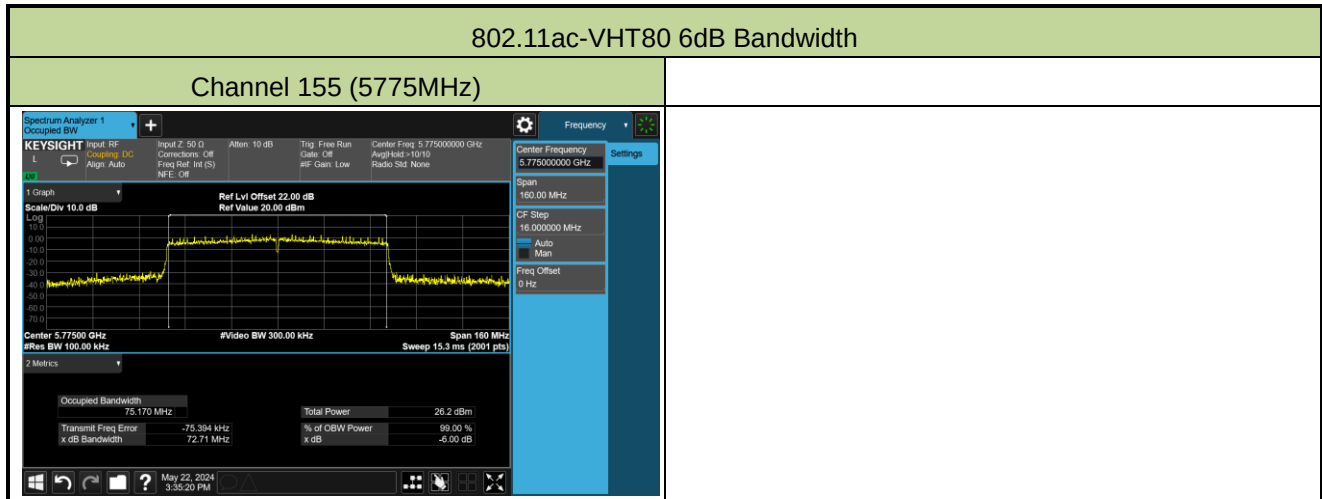


802.11ax-HE20 6dB Bandwidth


Channel 149 (5745MHz)

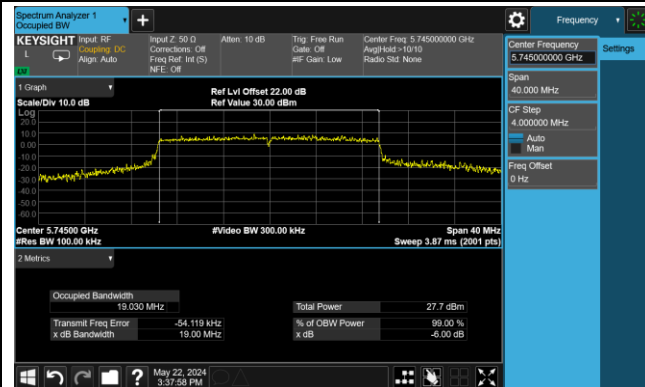

Channel 157 (5785MHz)

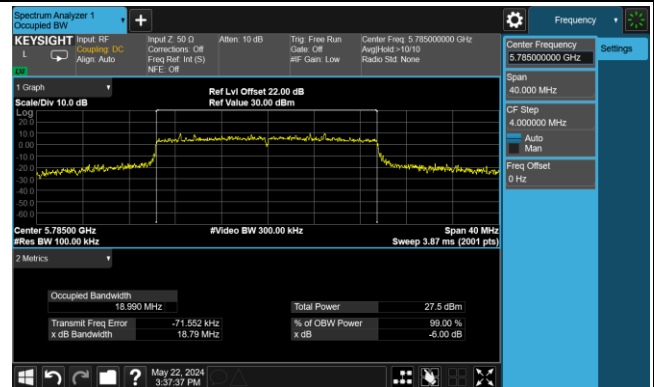


Channel 165 (5825MHz)

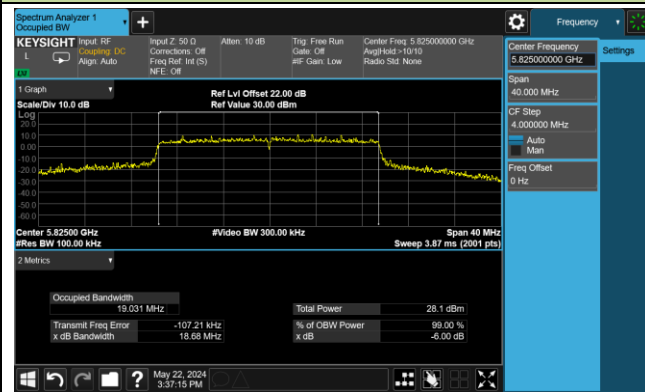



802.11ax-HE40 6dB Bandwidth

Channel 151 (5755MHz)

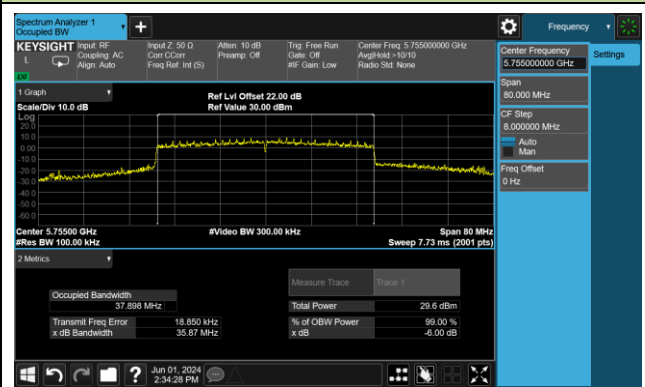

Channel 159 (5795MHz)

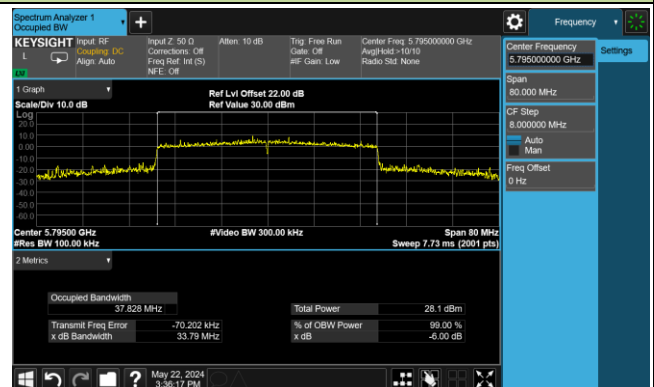

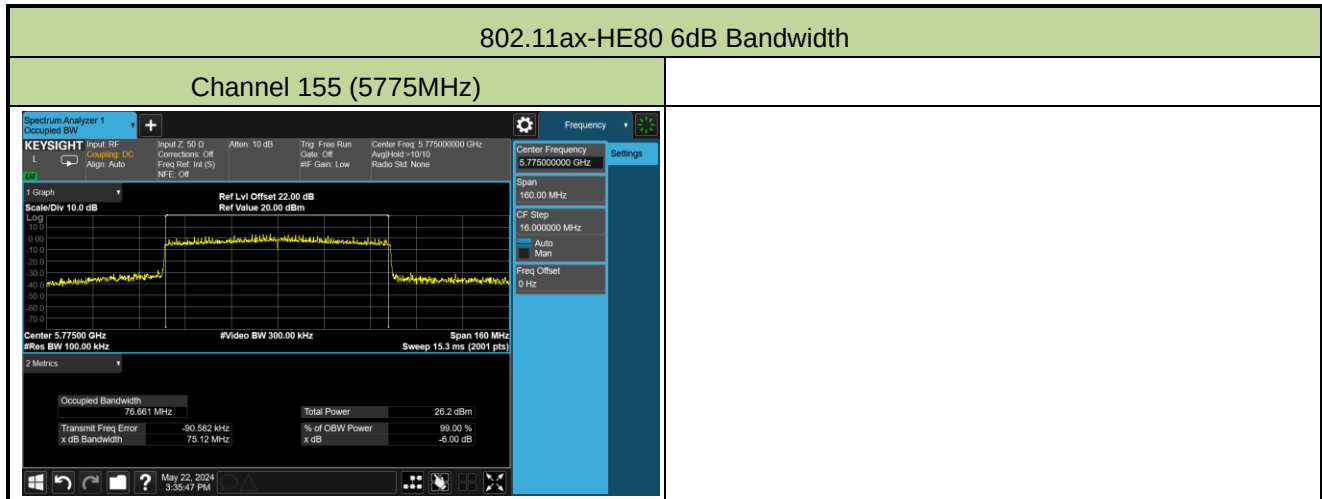

A.4 Output Power Test Result

Test Site	SIP-TR1	Test Engineer	Ryan Wang
Test Date	2024-04-07~2024-04-10		

Test Mode	Data Rate MCS	Channel No.	Freq. (MHz)	Average Power (dBm)			Total Average Power (dBm)	Power Limit (dBm)
				Ant 0	Ant 1	Ant 2		
11a	6Mbps	36	5180	20.96	21.19	21.21	25.89	≤ 30.00
11a	6Mbps	44	5220	21.33	21.53	21.52	26.23	≤ 30.00
11a	6Mbps	48	5240	21.39	21.48	21.45	26.21	≤ 30.00
11a	6Mbps	52	5260	15.11	15.32	15.38	20.04	≤ 23.98
11a	6Mbps	60	5300	15.21	15.55	15.56	20.21	≤ 23.98
11a	6Mbps	64	5320	15.33	15.78	15.62	20.35	≤ 23.98
11a	6Mbps	100	5500	15.41	15.43	15.37	20.17	≤ 23.98
11a	6Mbps	116	5580	15.34	15.21	15.32	20.06	≤ 23.98
11a	6Mbps	140	5700	15.22	15.45	15.14	20.04	≤ 23.98
11a	6Mbps	144	5720	15.07	15.24	14.97	19.87	≤ 22.75
11a	6Mbps	149	5745	22.66	22.46	22.56	27.33	≤ 30.00
11a	6Mbps	157	5785	22.75	22.51	22.63	27.40	≤ 30.00
11a	6Mbps	165	5825	22.61	22.36	22.41	27.23	≤ 30.00
11ac-VHT20	MCS0	36	5180	20.92	21.22	20.88	25.78	≤ 30.00
11ac-VHT20	MCS0	44	5220	21.26	21.67	21.45	26.23	≤ 30.00
11ac-VHT20	MCS0	48	5240	21.22	21.56	21.47	26.19	≤ 30.00
11ac-VHT20	MCS0	52	5260	15.21	15.49	15.42	20.15	≤ 23.98
11ac-VHT20	MCS0	60	5300	15.27	15.64	15.71	20.32	≤ 23.98
11ac-VHT20	MCS0	64	5320	15.23	15.61	15.70	20.29	≤ 23.98
11ac-VHT20	MCS0	100	5500	15.59	15.70	15.60	20.40	≤ 23.98
11ac-VHT20	MCS0	116	5580	15.32	15.53	15.41	20.19	≤ 23.98
11ac-VHT20	MCS0	140	5700	15.69	15.53	15.62	20.39	≤ 23.98
11ac-VHT20	MCS0	144	5720	15.49	15.73	15.51	20.35	≤ 22.97
11ac-VHT20	MCS0	149	5745	22.59	22.33	22.42	27.22	≤ 30.00
11ac-VHT20	MCS0	157	5785	22.34	22.08	22.23	26.99	≤ 30.00
11ac-VHT20	MCS0	165	5825	22.24	21.88	22.06	26.83	≤ 30.00

Test Mode	Data Rate MCS	Channel No.	Freq. (MHz)	Average Power (dBm)			Total Average Power (dBm)	Power Limit (dBm)
				Ant 0	Ant 1	Ant 2		
11ac-VHT40	MCS0	38	5190	18.16	18.46	18.39	23.11	≤ 30.00
11ac-VHT40	MCS0	46	5230	22.75	23.10	23.12	27.76	≤ 30.00
11ac-VHT40	MCS0	54	5270	17.63	17.95	18.02	22.64	≤ 23.98
11ac-VHT40	MCS0	62	5310	17.91	18.26	18.24	22.91	≤ 23.98
11ac-VHT40	MCS0	102	5510	17.73	17.92	17.77	22.58	≤ 23.98
11ac-VHT40	MCS0	110	5550	17.58	17.62	17.60	22.37	≤ 23.98
11ac-VHT40	MCS0	134	5670	17.93	17.71	17.94	22.63	≤ 23.98
11ac-VHT40	MCS0	142	5710	17.79	17.90	17.71	22.57	≤ 23.98
11ac-VHT40	MCS0	151	5755	22.78	22.51	22.61	27.41	≤ 30.00
11ac-VHT40	MCS0	159	5795	22.76	22.42	22.60	27.37	≤ 30.00
11ac-VHT80	MCS0	42	5210	12.12	12.52	12.36	17.11	≤ 30.00
11ac-VHT80	MCS0	58	5290	12.89	13.31	13.14	17.89	≤ 23.98
11ac-VHT80	MCS0	106	5530	14.08	14.28	14.09	18.92	≤ 23.98
11ac-VHT80	MCS0	122	5610	18.33	18.45	18.40	23.16	≤ 23.98
11ac-VHT80	MCS0	138	5690	18.98	18.83	18.94	23.69	≤ 23.98
11ac-VHT80	MCS0	155	5775	19.74	19.54	19.68	24.43	≤ 30.00
11ac-VHT160	MCS0	50	5250	12.28	12.62	12.37	17.20	≤ 23.98
11ac-VHT160	MCS0	114	5570	12.31	12.48	12.34	17.15	≤ 23.98
11ax-HE20	MCS0	36	5180	21.68	21.93	21.88	26.60	≤ 30.00
11ax-HE20	MCS0	44	5220	21.94	22.21	22.11	26.86	≤ 30.00
11ax-HE20	MCS0	48	5240	21.42	21.82	21.65	26.40	≤ 30.00
11ax-HE20	MCS0	52	5260	15.78	16.07	16.23	20.80	≤ 23.98
11ax-HE20	MCS0	60	5300	15.57	15.92	15.80	20.54	≤ 23.98
11ax-HE20	MCS0	64	5320	15.58	15.98	16.01	20.63	≤ 23.98
11ax-HE20	MCS0	100	5500	15.95	16.13	15.75	20.72	≤ 23.98
11ax-HE20	MCS0	116	5580	15.56	15.97	15.79	20.55	≤ 23.98
11ax-HE20	MCS0	140	5700	15.75	15.92	15.64	20.54	≤ 23.98
11ax-HE20	MCS0	144	5720	15.62	15.88	15.57	20.46	≤ 23.03
11ax-HE20	MCS0	149	5745	22.63	22.33	22.46	27.25	≤ 30.00
11ax-HE20	MCS0	157	5785	22.36	21.86	22.16	26.90	≤ 30.00
11ax-HE20	MCS0	165	5825	22.25	21.85	22.06	26.83	≤ 30.00

Test Mode	Data Rate MCS	Channel No.	Freq. (MHz)	Average Power (dBm)			Total Average Power (dBm)	Power Limit (dBm)
				Ant 0	Ant 1	Ant 2		
11ax-HE40	MCS0	38	5190	17.46	17.88	17.75	22.47	≤ 30.00
11ax-HE40	MCS0	46	5230	23.26	23.61	23.45	28.21	≤ 30.00
11ax-HE40	MCS0	54	5270	17.32	17.79	17.63	22.36	≤ 23.98
11ax-HE40	MCS0	62	5310	17.09	17.55	17.38	22.12	≤ 23.98
11ax-HE40	MCS0	102	5510	17.87	17.95	17.88	22.67	≤ 23.98
11ax-HE40	MCS0	110	5550	17.42	17.51	17.55	22.26	≤ 23.98
11ax-HE40	MCS0	134	5670	17.95	17.71	18.06	22.68	≤ 23.98
11ax-HE40	MCS0	142	5710	17.65	17.88	17.73	22.53	≤ 23.98
11ax-HE40	MCS0	151	5755	22.76	22.49	22.58	27.38	≤ 30.00
11ax-HE40	MCS0	159	5795	22.45	22.37	22.28	27.14	≤ 30.00
11ax-HE80	MCS0	42	5210	11.12	11.43	11.32	16.06	≤ 30.00
11ax-HE80	MCS0	58	5290	13.11	13.49	13.29	18.07	≤ 23.98
11ax-HE80	MCS0	106	5530	14.22	14.39	14.27	19.07	≤ 23.98
11ax-HE80	MCS0	122	5610	18.97	19.16	19.01	23.82	≤ 23.98
11ax-HE80	MCS0	138	5690	18.66	18.49	18.65	23.37	≤ 23.98
11ax-HE80	MCS0	155	5775	19.96	19.77	19.85	24.63	≤ 30.00
11ax-HE160	MCS0	50	5250	13.52	13.81	13.46	18.37	≤ 23.98
11ax-HE160	MCS0	114	5570	14.03	14.21	14.10	18.89	≤ 23.98

Note 1: Since the measurement using a wideband gated RF power meter is made only during the ON time of the transmitter, no duty cycle correction factor is required.

Note 2: Total Average Power (dBm) = $10 \cdot \log \{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)} + 10^{(\text{Ant 2 Average Power} / 10)}\}$ (dBm).

Note 3: For Band-Crossing channel, Average Power Limit = 23.98dBm or $11 + 10 \cdot \log_{10} \text{EBW}_{2C}$ which is less.

A.5 Power Spectral Density Test Result

Test Site	SIP-TR1	Test Engineer	Ryan Wang
Test Date	2024-04-07~2024-04-19		
Test Item	Power Spectral Density (UNII-Band 1 & UNII-2a & UNII-2c)		

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	AVPSD (dBm/ MHz)			Duty Cycle (%)	Total PSD (dBm/MHz)	PSD Limit (dBm/MHz)
				Ant 0	Ant 1	Ant 2			
11a	6Mbps	36	5180	9.428	9.696	9.674	95.80	14.56	≤ 15.52
11a	6Mbps	44	5220	9.867	9.876	9.934	95.80	14.85	≤ 15.52
11a	6Mbps	48	5240	9.831	9.963	9.882	95.80	14.85	≤ 15.52
11a	6Mbps	52	5260	3.817	4.170	4.266	95.80	9.05	≤ 9.73
11a	6Mbps	60	5300	3.748	4.118	4.154	95.80	8.97	≤ 9.73
11a	6Mbps	64	5320	3.969	4.197	4.025	95.80	9.02	≤ 9.73
11a	6Mbps	100	5500	3.634	3.891	3.918	95.80	8.77	≤ 9.41
11a	6Mbps	116	5580	4.160	3.899	3.987	95.80	8.97	≤ 9.41
11a	6Mbps	140	5700	3.634	4.269	3.566	95.80	8.79	≤ 9.41
11a	6Mbps	144	5720	3.446	4.067	3.485	95.80	8.63	≤ 9.41
11ac-VHT20	MCS0	36	5180	9.263	9.618	9.508	95.28	14.45	≤ 15.52
11ac-VHT20	MCS0	44	5220	9.519	9.924	9.886	95.28	14.76	≤ 15.52
11ac-VHT20	MCS0	48	5240	9.312	9.708	9.699	95.28	14.56	≤ 15.52
11ac-VHT20	MCS0	52	5260	3.631	3.898	3.687	95.28	8.72	≤ 9.73
11ac-VHT20	MCS0	60	5300	3.686	4.295	4.001	95.28	8.98	≤ 9.73
11ac-VHT20	MCS0	64	5320	3.647	4.359	4.033	95.28	9.00	≤ 9.73
11ac-VHT20	MCS0	100	5500	3.684	3.784	3.533	95.28	8.65	≤ 9.41
11ac-VHT20	MCS0	116	5580	3.738	4.016	3.778	95.28	8.83	≤ 9.41
11ac-VHT20	MCS0	140	5700	3.821	3.903	3.754	95.28	8.81	≤ 9.41
11ac-VHT20	MCS0	144	5720	3.682	3.748	3.655	95.28	8.68	≤ 9.41
11ac-VHT40	MCS0	38	5190	3.841	4.263	4.000	91.82	9.18	≤ 15.52
11ac-VHT40	MCS0	46	5230	8.539	8.879	8.741	91.82	13.86	≤ 15.52
11ac-VHT40	MCS0	54	5270	3.494	3.950	4.055	91.82	8.98	≤ 9.73
11ac-VHT40	MCS0	62	5310	3.933	4.584	4.297	91.82	9.42	≤ 9.73
11ac-VHT40	MCS0	102	5510	3.216	3.460	3.442	91.82	8.52	≤ 9.41
11ac-VHT40	MCS0	110	5550	3.317	3.328	3.308	91.82	8.46	≤ 9.41
11ac-VHT40	MCS0	134	5670	3.413	3.418	3.614	91.82	8.62	≤ 9.41
11ac-VHT40	MCS0	142	5710	3.384	3.819	3.217	91.82	8.62	≤ 9.41

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	AVPSD (dBm/ MHz)			Duty Cycle (%)	Total PSD (dBm/MHz)	PSD Limit (dBm/MHz)
				Ant 0	Ant 1	Ant 2			
11ac-VHT80	MCS0	42	5210	-5.030	-5.010	-4.818	85.00	0.53	≤ 15.52
11ac-VHT80	MCS0	58	5290	-4.240	-3.946	-4.237	85.00	1.34	≤ 9.73
11ac-VHT80	MCS0	106	5530	-3.301	-3.187	-3.376	85.00	2.19	≤ 9.41
11ac-VHT80	MCS0	122	5610	1.043	1.008	1.130	85.00	6.54	≤ 9.41
11ac-VHT80	MCS0	138	5690	1.329	1.309	1.619	85.00	6.90	≤ 9.41
11ac-VHT160	MCS0	50	5250	-7.679	-7.304	-7.868	76.07	-1.65	≤ 9.48
11ac-VHT160	MCS0	114	5570	-7.953	-7.607	-8.219	76.07	-1.96	≤ 9.41
11ax-HE20	MCS0	36	5180	9.125	9.493	9.259	94.37	14.32	≤ 15.52
11ax-HE20	MCS0	44	5220	9.745	10.067	9.903	94.37	14.93	≤ 15.52
11ax-HE20	MCS0	48	5240	9.437	9.723	9.570	94.37	14.60	≤ 15.52
11ax-HE20	MCS0	52	5260	4.039	4.331	4.076	94.37	9.17	≤ 9.73
11ax-HE20	MCS0	60	5300	3.416	4.034	3.781	94.37	8.77	≤ 9.73
11ax-HE20	MCS0	64	5320	3.815	4.303	4.290	94.37	9.16	≤ 9.73
11ax-HE20	MCS0	100	5500	3.770	4.042	3.801	94.37	8.90	≤ 9.41
11ax-HE20	MCS0	116	5580	3.815	3.984	4.118	94.37	9.00	≤ 9.41
11ax-HE20	MCS0	140	5700	3.691	4.015	3.616	94.37	8.80	≤ 9.41
11ax-HE20	MCS0	144	5720	3.601	3.996	3.511	94.37	8.73	≤ 9.41
11ax-HE40	MCS0	38	5190	3.624	3.896	3.579	90.10	8.93	≤ 15.52
11ax-HE40	MCS0	46	5230	9.096	9.551	9.634	90.10	14.66	≤ 15.52
11ax-HE40	MCS0	54	5270	3.394	3.670	3.454	90.10	8.73	≤ 9.73
11ax-HE40	MCS0	62	5310	3.153	3.640	3.324	90.10	8.60	≤ 9.73
11ax-HE40	MCS0	102	5510	3.548	3.683	3.746	90.10	8.88	≤ 9.41
11ax-HE40	MCS0	110	5550	3.440	3.593	3.696	90.10	8.80	≤ 9.41
11ax-HE40	MCS0	134	5670	3.616	3.587	3.902	90.10	8.93	≤ 9.41
11ax-HE40	MCS0	142	5710	3.494	3.631	3.555	90.10	8.78	≤ 9.41
11ax-HE80	MCS0	42	5210	-6.634	-6.190	-6.282	83.62	-0.82	≤ 15.52
11ax-HE80	MCS0	58	5290	-4.409	-3.911	-4.368	83.62	1.32	≤ 9.73
11ax-HE80	MCS0	106	5530	-3.614	-3.233	-3.550	83.62	2.09	≤ 9.41
11ax-HE80	MCS0	122	5610	1.818	1.833	1.674	83.62	7.32	≤ 9.41
11ax-HE80	MCS0	138	5690	1.153	0.983	1.030	83.62	6.60	≤ 9.41
11ax-HE160	MCS0	50	5250	-6.799	-6.172	-6.432	83.85	-0.92	≤ 9.48
11ax-HE160	MCS0	114	5570	-6.464	-6.234	-6.202	83.85	-0.76	≤ 9.41

Note 1: When EUT duty cycle < 98%, the total PSD (dBm/MHz) = $10 \cdot \log \{10^{(\text{Ant 0 AVGPSD}/10)} + 10^{(\text{Ant 1 AVGPSD}/10)} + 10^{(\text{Ant 2 AVGPSD}/10)}\} + 10 \cdot \log (1/\text{Duty cycle})$.

When EUT duty cycle $\geq 98\%$, the total PSD (dBm/MHz) = $10 \cdot \log \{10^{(\text{Ant 0 AVGPSD}/10)} + 10^{(\text{Ant 1 AVGPSD}/10)} + 10^{(\text{Ant 2 AVGPSD}/10)}\}$ (dBm/MHz).

Note 2:

20M/40M/80M:

For 5125 - 5250MHz Band: PSD Limit (dBm/MHz) = $17 - (7.48 - 6) = 15.52\text{dBm/MHz}$

For 5250 - 5350MHz Band: PSD Limit (dBm/MHz) = $11 - (7.27 - 6) = 9.73\text{dBm/MHz}$.

For 5470 - 5725MHz Band: PSD Limit (dBm/MHz) = $11 - (7.59 - 6) = 9.41\text{dBm/MHz}$.

160M:

For 5250MHz: PSD Limit (dBm/MHz) = $11 - (7.52 - 6) = 9.48\text{dBm/MHz}$.

For 5570MHz: PSD Limit (dBm/MHz) = $11 - (7.59 - 6) = 9.41\text{dBm/MHz}$.

Test Site	SIP-TR1	Test Engineer	Ryan Wang
Test Date	2024-04-08~2024-04-10		
Test Item	Power Spectral Density (UNII-Band 3)		

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	AVPSD (dBm/ 510kHz)			Duty Cycle (%)	Total PSD (dBm/ 510kHz)	PSD Limit (dBm/ 500kHz)
				Ant 0	Ant 1	Ant 2			
11a	6Mbps	149	5745	8.342	8.377	8.193	95.80	13.26	≤ 28.02
11a	6Mbps	157	5785	8.276	8.333	8.320	95.80	13.27	≤ 28.02
11a	6Mbps	165	5825	8.392	8.169	7.984	95.80	13.14	≤ 28.02
11ac-VHT20	MCS0	149	5745	7.905	7.619	7.818	95.28	12.76	≤ 28.02
11ac-VHT20	MCS0	157	5785	7.652	7.334	7.494	95.28	12.48	≤ 28.02
11ac-VHT20	MCS0	165	5825	7.643	7.333	7.303	95.28	12.41	≤ 28.02
11ac-VHT40	MCS0	151	5755	5.583	5.543	5.626	91.82	10.73	≤ 28.02
11ac-VHT40	MCS0	159	5795	5.429	5.503	5.443	91.82	10.60	≤ 28.02
11ac-VHT80	MCS0	155	5775	-0.379	-0.350	-0.174	85.00	5.18	≤ 28.02
11ax-HE20	MCS0	149	5745	7.650	7.656	7.520	94.37	12.63	≤ 28.02
11ax-HE20	MCS0	157	5785	7.422	7.236	7.333	94.37	12.35	≤ 28.02
11ax-HE20	MCS0	165	5825	7.295	7.110	7.053	94.37	12.18	≤ 28.02
11ax-HE40	MCS0	151	5755	5.583	5.489	5.476	90.10	10.74	≤ 28.02
11ax-HE40	MCS0	159	5795	5.714	5.180	5.552	90.10	10.71	≤ 28.02
11ax-HE80	MCS0	155	5775	-0.366	-0.534	0.273	83.62	5.35	≤ 28.02

Note 1:


When EUT duty cycle < 98%, the total PSD (dBm/510kHz) = $10 \cdot \log \{10^{(\text{Ant 0 AVGPSD}/10)} + 10^{(\text{Ant 1 AVGPSD}/10)} + 10^{(\text{Ant 2 AVGPSD}/10)}\}$ (dBm/510kHz) + $10 \cdot \log (1/\text{Duty cycle})$.

When EUT duty cycle ≥ 98%, the total PSD (dBm/510kHz) = $10 \cdot \log \{10^{(\text{Ant 0 AVGPSD}/10)} + 10^{(\text{Ant 1 AVGPSD}/10)} + 10^{(\text{Ant 2 AVGPSD}/10)}\}$ (dBm/510kHz).

Note 2: PSD Limit (dBm/500kHz) = 30 - (7.98 - 6) = 28.02dBm/500kHz.

802.11a Power Spectral Density- Ant 0

Channel 36 (5180MHz)

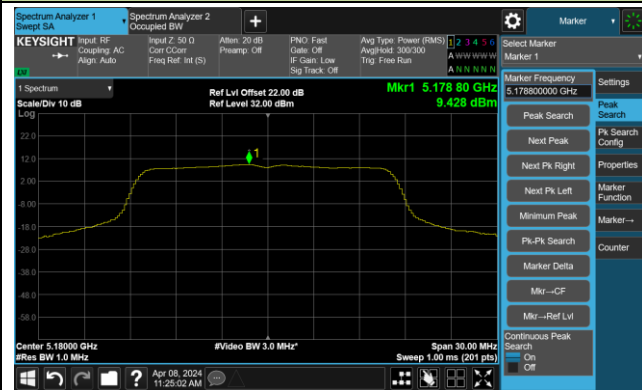


Channel 44 (5220MHz)



Channel 48 (5240MHz)



Channel 52 (5260MHz)

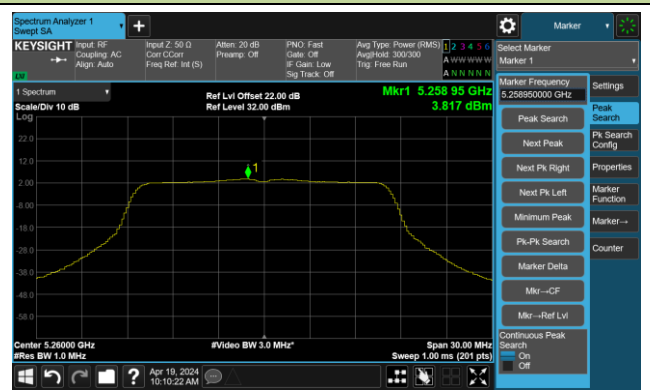


Channel 60 (5300MHz)




Channel 64 (5320MHz)



Channel 100 (5500MHz)

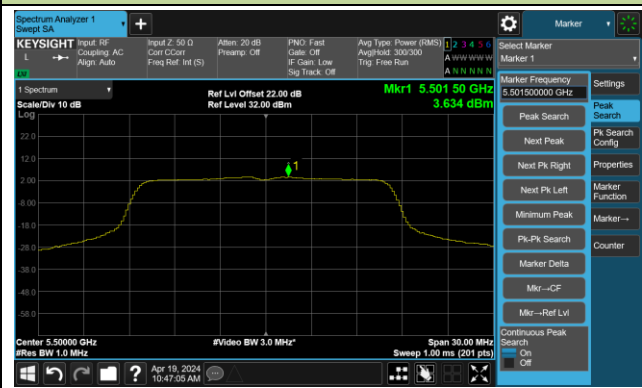


Channel 116 (5580MHz)

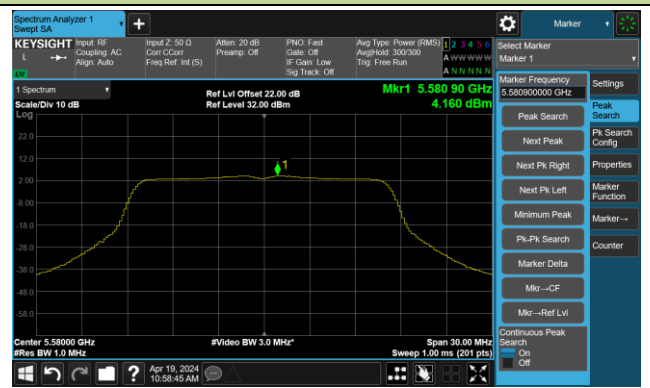


802.11a Power Spectral Density- Ant 0

Channel 140 (5700MHz)

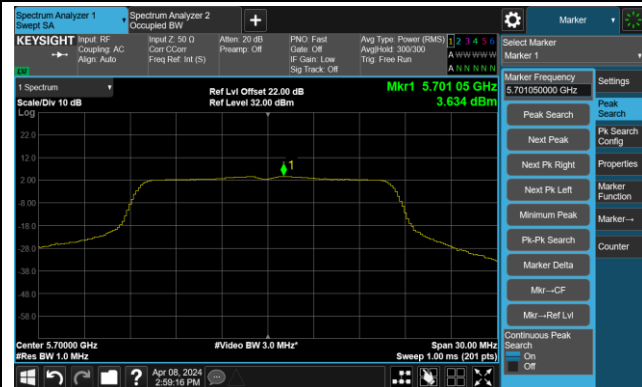


Channel 144(5720MHz)

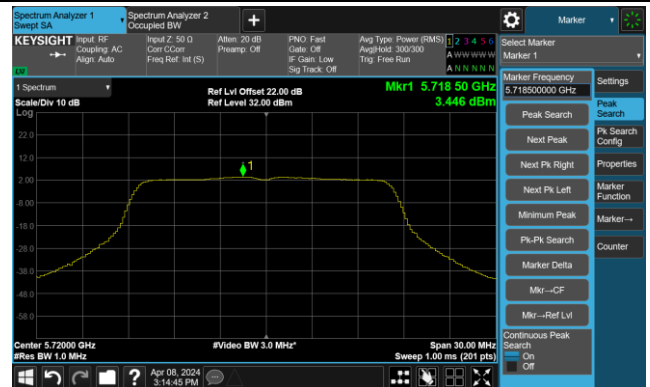


Channel 149 (5745MHz)



Channel 157 (5785MHz)

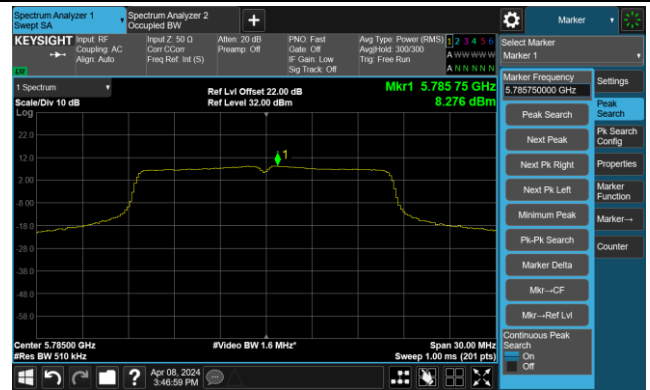


Channel 165 (5825MHz)

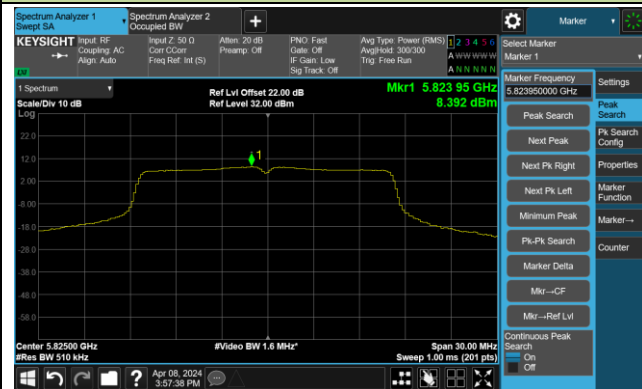


802.11ac-VHT20 Power Spectral Density- Ant 0


Channel 36 (5180MHz)

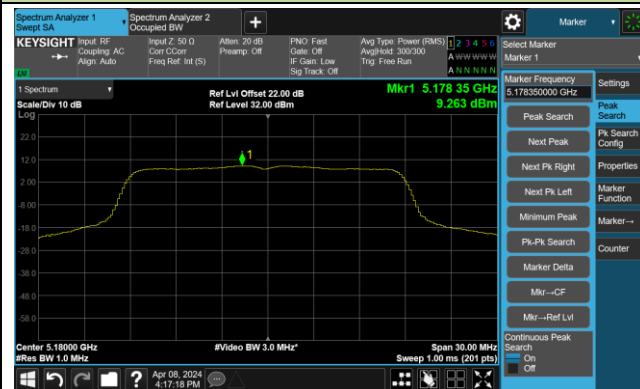


Channel 44 (5220MHz)

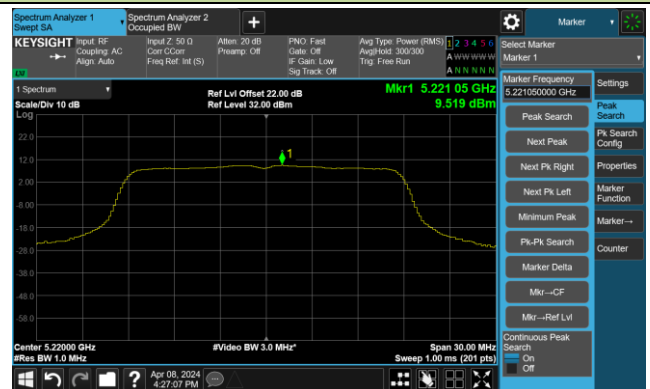

Channel 48 (5240MHz)

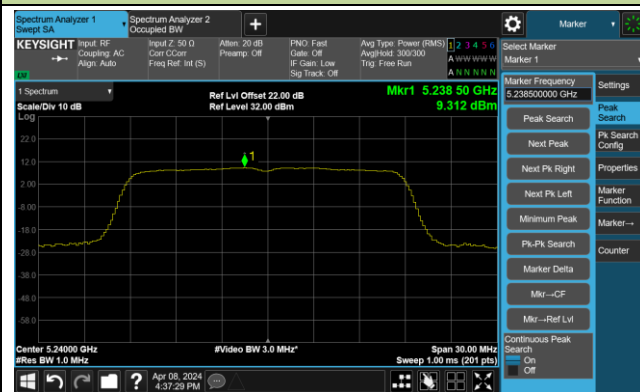


Channel 52 (5260MHz)

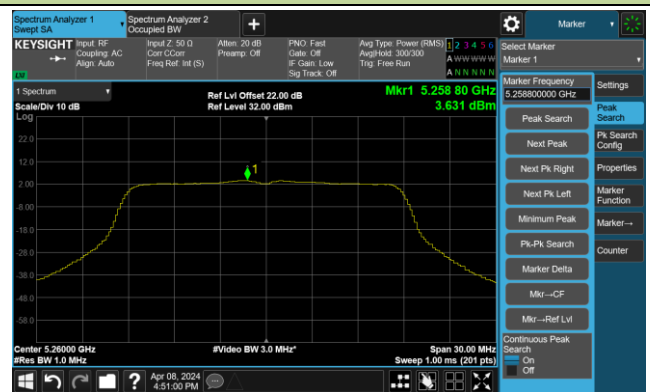


Channel 60 (5300MHz)



Channel 64 (5320MHz)

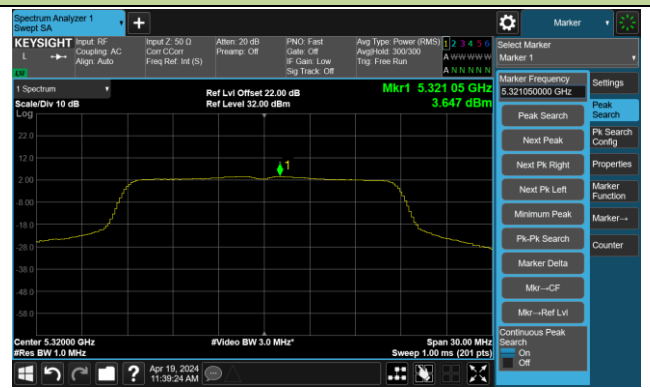

Channel 100 (5500MHz)

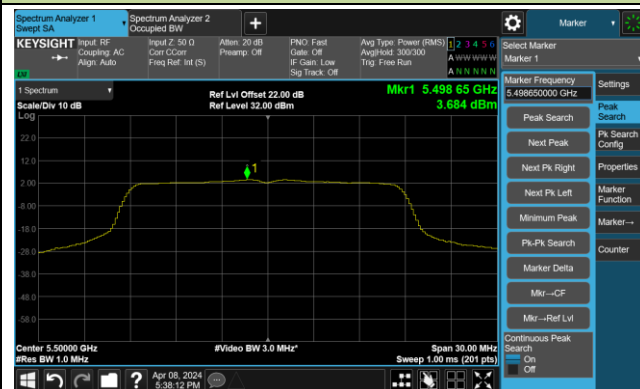


Channel 116 (5580MHz)




802.11ac-VHT20 Power Spectral Density- Ant 0


Channel 140 (5700MHz)

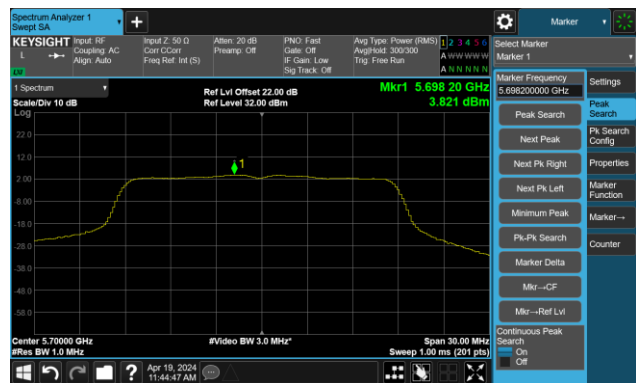

Channel 144(5720MHz)

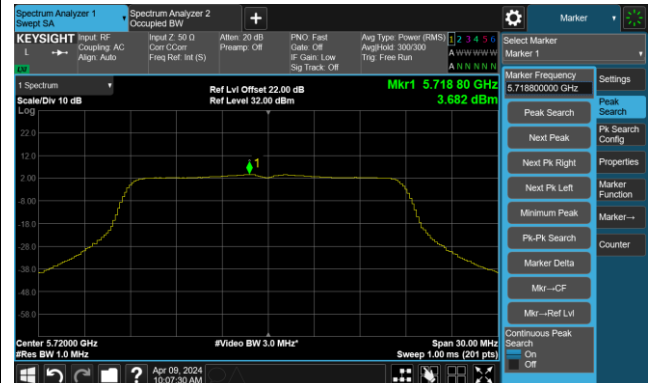


Channel 149 (5745MHz)

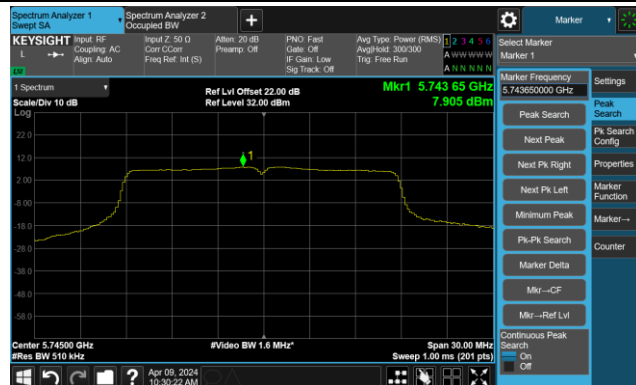

Channel 157 (5785MHz)




Channel 165 (5825MHz)

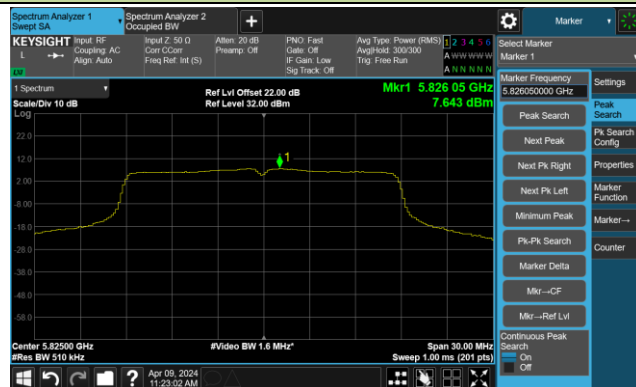


802.11ac-VHT40 Power Spectral Density- Ant 0

Channel 38 (5190MHz)

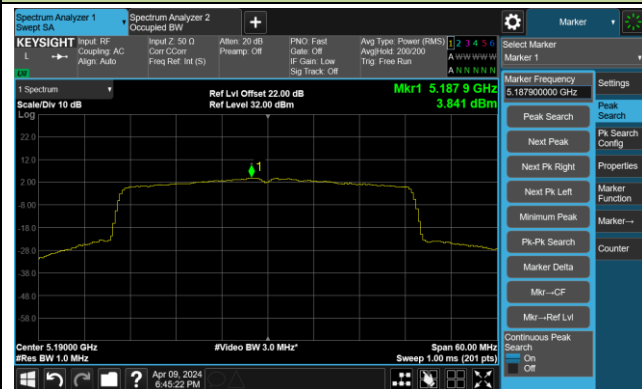

Channel 46 (5230MHz)

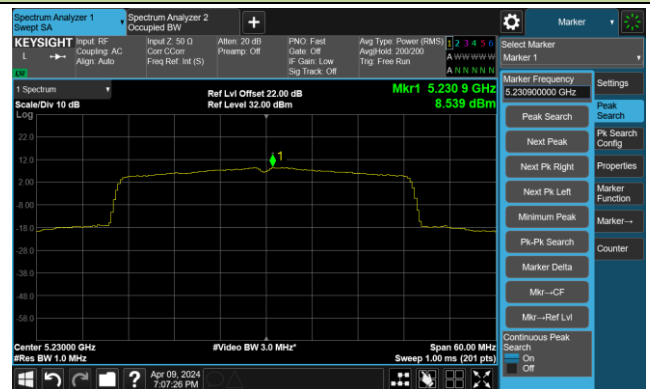


Channel 54 (5270MHz)




Channel 62 (5310MHz)




Channel 102 (5510MHz)

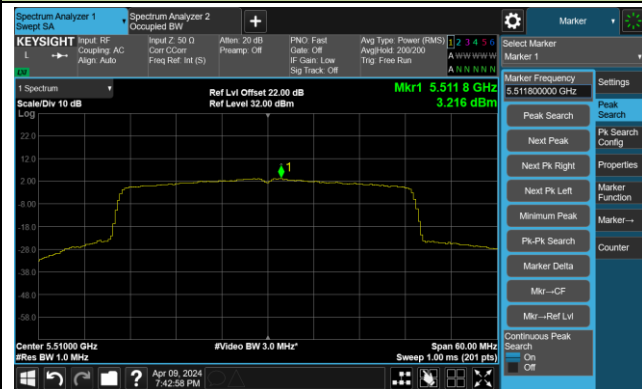


Channel 110 (5550MHz)

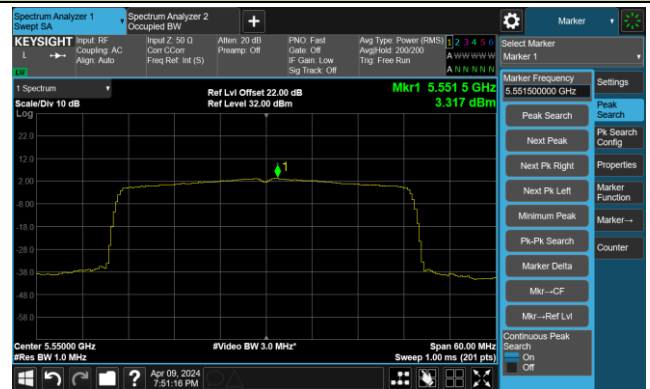

Channel 134 (5670MHz)

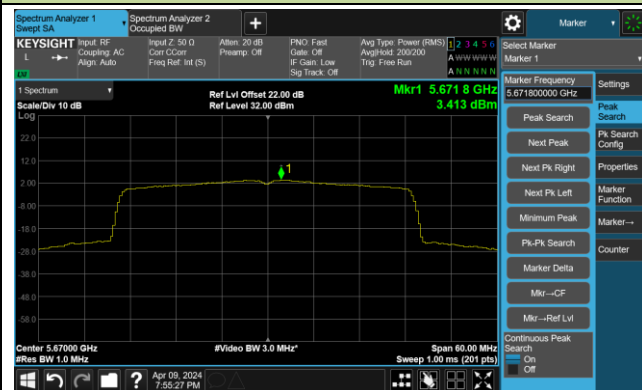

Channel 142(5710MHz)

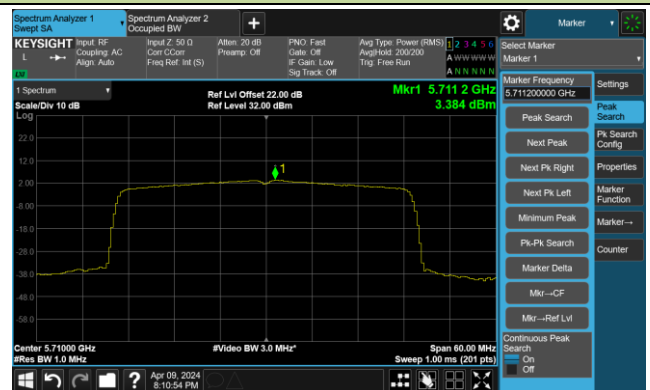


802.11ac-VHT40 Power Spectral Density- Ant 0

Channel 151 (5755MHz)




Channel 159 (5795MHz)

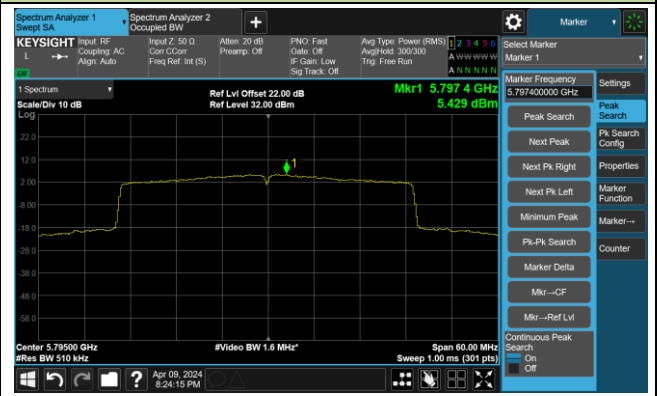

802.11ac-VHT80 Power Spectral Density- Ant 0


Channel 42 (5210MHz)

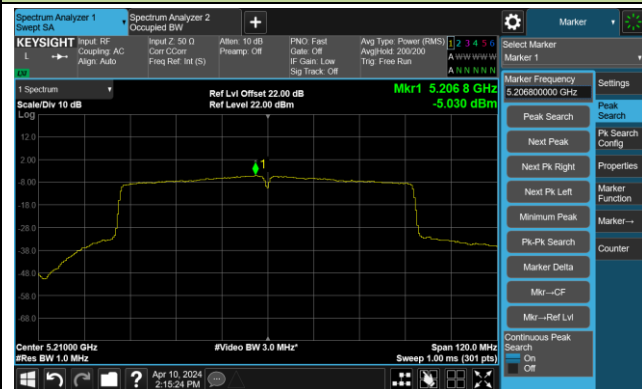


Channel 58 (5290MHz)




Channel 106 (5530MHz)

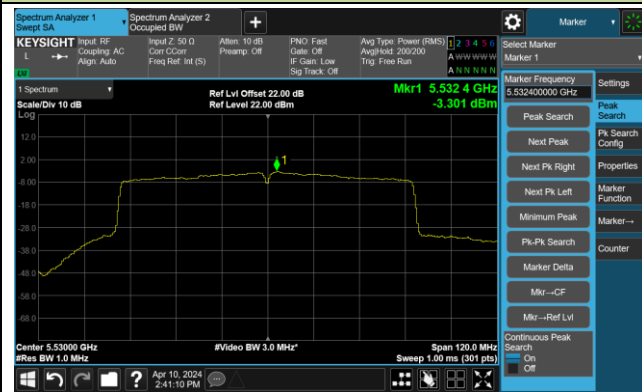


Channel 122 (5610MHz)

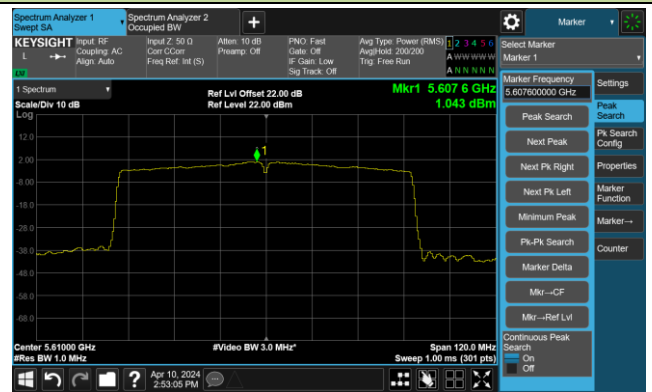

Channel 138 (5690MHz)

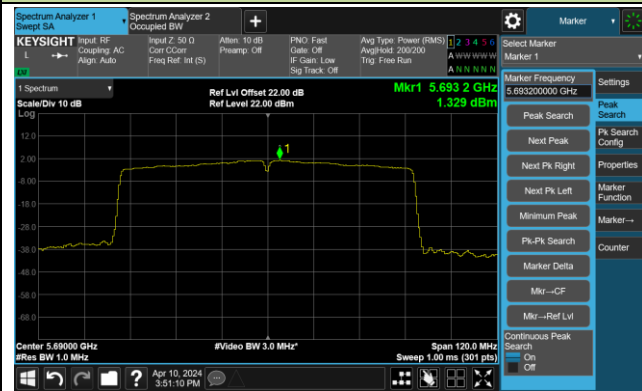


Channel 155 (5775MHz)

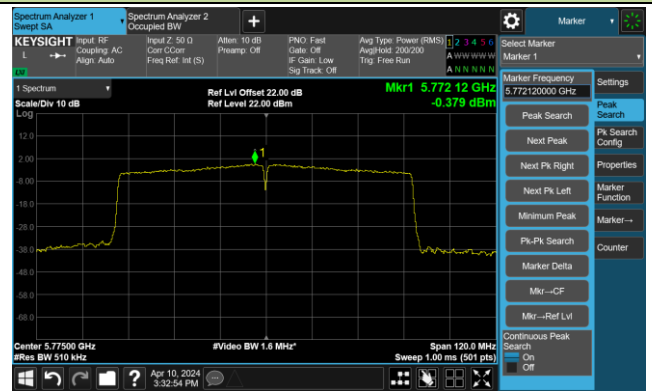

802.11ac-VHT160 Power Spectral Density- Ant 0

Channel 50 (5250MHz)

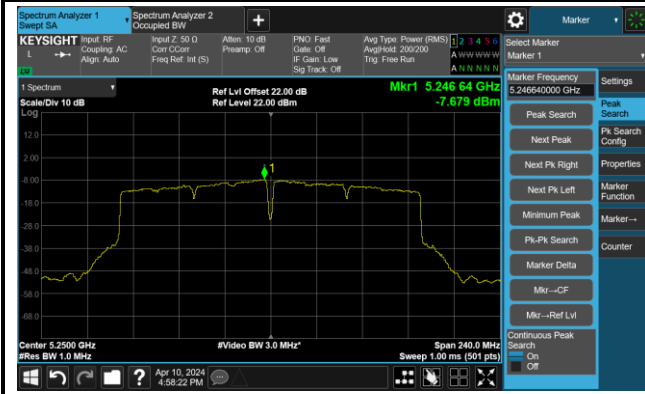

Channel 114 (5570MHz)

