




TEST REPORT

Report No.: CTC2024281903
FCC ID: 2BFQX-OPS-G5UPGRADE
Applicant: Moka Technology(Guangdong) Co., Ltd.
Address: No. 1, Qiaoguang Road, Chenjiang Street, Zhongkai New and High-tech Industries Development Zone, 516029 Huizhou Guangdong, P.R. China
Manufacturer: Moka Technology(Guangdong) Co., Ltd.
Address: No. 1, Qiaoguang Road, Chenjiang Street, Zhongkai New and High-tech Industries Development Zone, 516029 Huizhou Guangdong, P.R. China
Product Name: Android EDLA Upgrade Module
Trade Mark: Touchview Interactive
Model/Type reference: TV-G5UPGRADE
Listed Model(s): /
Standard: FCC CFR Title 47 Part 15 Subpart C Section 15.247
Test Report Form No: CTC-TR-057_A1
Master TRF: Dated 2024-09-20
Date of receipt of test sample: Nov. 27, 2024
Date of testing: Nov. 27, 2024 ~ Jan. 12, 2025
Date of issue: Jan. 13, 2025
Result: PASS

Compiled by:
(Printed name+signature) Jim Jiang 

Supervised by:
(Printed name+signature) Eric Zhang 

Approved by:
(Printed name+signature) Totti Zhao 

This test report may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CTC. The Test Result in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CTC within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.

**Table of Contents**

	Page
1. TEST SUMMARY	3
1.1. TEST STANDARDS.....	3
1.2. REPORT VERSION	3
1.3. TEST DESCRIPTION.....	3
1.4. TEST FACILITY	4
1.5. MEASUREMENT UNCERTAINTY.....	5
1.6. ENVIRONMENTAL CONDITIONS.....	5
2. GENERAL INFORMATION	6
2.1. CLIENT INFORMATION	6
2.2. GENERAL DESCRIPTION OF EUT.....	6
2.3. ACCESSORY EQUIPMENT INFORMATION	7
2.4. OPERATION STATE	8
2.5. MEASUREMENT INSTRUMENTS LIST	10
3. TEST ITEM AND RESULTS	12
3.1. CONDUCTED EMISSION.....	12
3.2. RADIATED EMISSION.....	15
3.3. BAND EDGE EMISSIONS (RADIATED)	38
3.4. BAND EDGE AND SPURIOUS EMISSIONS (CONDUCTED).....	63
3.5. DTS BANDWIDTH.....	78
3.6. PEAK OUTPUT POWER	90
3.7. POWER SPECTRAL DENSITY	92
3.8. DUTY CYCLE	99
3.9. ANTENNA REQUIREMENT.....	101



1. TEST SUMMARY

1.1. Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.247: Operation within the bands 902–928MHz, 2400–2483.5MHz, and 5725–5850MHz.

RSS-247 Issue 3: Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices.

RSS-Gen Issue 5: General Requirements for Compliance of Radio Apparatus.

ANSI C63.10-2013: American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

1.2. Report Version

Revised No.	Report No.	Date of issue	Description
01	CTC2024281903	Jan. 13, 2025	Original

1.3. Test Description

FCC Part 15 Subpart C (15.247) / RSS-247 Issue 3				
Test Item	Standard Section		Result	Test Engineer
	FCC	ISED		
Antenna Requirement	15.203	RSS-Gen 6.8	Pass	Jim Jiang
Conducted Emission	15.207	RSS-Gen 8.8	Pass	Jim Jiang
Conducted Band Edge and Spurious Emissions	15.247(d)	RSS-247 5.5	Pass	Jim Jiang
Radiated Band Edge and Spurious Emissions	15.205&15.209&15.247(d)	RSS-247 5.5	Pass	Jim Jiang
6dB Bandwidth	15.247(a)(2)	RSS-247 5.2 (a)	Pass	Jim Jiang
Occupied Bandwidth	/	RSS-Gen 6.7	Pass	Jim Jiang
Conducted Max Output Power	15.247(b)(3)	RSS-247 5.4 (d)	Pass	Jim Jiang
Power Spectral Density	15.247(e)	RSS-247 5.2 (b)	Pass	Jim Jiang
Transmitter Radiated Spurious	15.209&15.247(d)	RSS-247 5.5&RSS-Gen 8.9	Pass	Jim Jiang

Note:

1. The measurement uncertainty is not included in the test result.
2. N/A: means this test item is not applicable for this device according to the technology characteristic of device.



1.4. Test Facility

Address of the report laboratory

CTC Laboratories, Inc.

Address: Room 101 of Building B, Room 107, 108, 207, 208 of Building A, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China

Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

A2LA-Lab Cert. No.: 4340.01

CTC Laboratories, Inc. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

Industry Canada (Registration No.: 9783A, CAB Identifier: CN0029)

CTC Laboratories, Inc. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 9783A on Jan, 2016.

FCC (Registration No.: 951311, Designation Number CN1208)

CTC Laboratories, Inc. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 951311, Aug 26, 2017.



1.5. Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the CTC Laboratories, Inc. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Below is the best measurement capability for CTC Laboratories, Inc.

Test Items	Measurement Uncertainty	Notes
DTS Bandwidth	±0.0196%	(1)
Maximum Conducted Output Power	±0.686 dB	(1)
Maximum Power Spectral Density Level	±0.743 dB	(1)
Band-edge Compliance	±1.328 dB	(1)
Unwanted Emissions In Non-restricted Freq Bands	9kHz-1GHz: ±0.746dB 1GHz-26GHz: ±1.328dB	(1)
Conducted Emissions 9kHz~30MHz	±3.08 dB	(1)
Radiated Emissions 30~1000MHz	±4.51 dB	(1)
Radiated Emissions 1~18GHz	±5.84 dB	(1)
Radiated Emissions 18~40GHz	±6.12 dB	(1)

Note (1): This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

1.6. Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15 °C to 35 °C
Relative Humidity:	20 % to 75 %
Air Pressure:	101 kPa



2. GENERAL INFORMATION

2.1. Client Information

Applicant:	Moka Technology(Guangdong) Co., Ltd.
Address:	No. 1, Qiaoguang Road, Chenjiang Street, Zhongkai New and High-tech Industries Development Zone, 516029 Huizhou Guangdong, P.R. China
Manufacturer:	Moka Technology(Guangdong) Co., Ltd.
Address:	No. 1, Qiaoguang Road, Chenjiang Street, Zhongkai New and High-tech Industries Development Zone, 516029 Huizhou Guangdong, P.R. China

2.2. General Description of EUT

Product Name:	Android EDLA Upgrade Module
Trade Mark:	Touchview Interactive
Model/Type reference:	TV-G5UPGRADE
Listed Model(s):	/
Model Difference:	/
Sample ID:	CTC241127-007-S001
Power Supply:	Input: 12~19Vdc/3A
Hardware Version:	/
Software Version:	/
2.4G Wi-Fi	
Modulation:	802.11b: DSSS (CCK, DQPSK, DBPSK) 802.11g/ n: OFDM (BPSK, QPSK, 16QAM, 64QAM) 802.11ax: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM)
Operation Frequency:	802.11b/ g/ n(HT20)/ ax(HE20): 2412MHz~2462MHz 802.11n(HT40)/ ax(HE40): 2422MHz~2452MHz
Channel Number:	802.11b/ g/ n(HT20)/ ax(HE20): 11 channels 802.11n(HT40)/ ax(HE40): 7 channels
Channel Separation:	5MHz
Antenna 1&2 Type:	External Antenna
Antenna 1&2 Gain:	3.04dBi
Directional Gain:	6.05dBi

CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-057_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn



2.3. Accessory Equipment Information

Equipment Information			
Name	Model	S/N	Manufacturer
Notebook	ThinkPad T460s	MP246QDR	Lenovo
Power Supply	FJ-GN636S1203000S	/	FUJIA
Cable Information			
Name	Shielded Type	Ferrite Core	Length
USB Cable	Unshielded	NO	100cm
Test Software Information			
Name	Version	/	/
SecureCRTPortable	7.1.1	/	/

CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-057_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn



2.4. Operation State

Operation Frequency List: The EUT has been tested under typical operating condition. The Applicant provides communication tools software to control the EUT for staying in continuous transmitting and receiving mode for testing.

Operation Frequency List:

Channel	Frequency (MHz)
01	2412
02	2417
03	2422
04	2427
05	2432
06	2437
07	2442
08	2447
09	2452
10	2457
11	2462

Note: CH 01~CH 11 for 802.11b/g/n(HT20)/ax(HE20), CH 03~CH 09 for 802.11n(HT40)/ax(HE40).

Data Rated:

Preliminary tests were performed in different data rate, and found which the below bit rate is worst case mode, so only show data which it is the worst case mode.

Test Mode	Data Rate (worst mode)
802.11b	1Mbps
802.11g	6Mbps
802.11n(HT20)/ (HT40)	HT-MCS0
802.11ax(HE20)/ (HE40)	HE-MCS0



Test Mode:

For RF test items:
1. The engineering test program was provided and enabled to make EUT continuous transmit. 2. IEEE 802.11ax mode only supports full RU, so only the full RU is evaluated and measured inside report
For AC power line conducted emissions:
The engineering test program was provided and enabled to make EUT continuous transmit.
For Radiated spurious emissions test item:
The engineering test program was provided and enabled to make EUT continuous transmit. The EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-057_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn



2.5. Measurement Instruments List

RF Test System - SRD					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated Until
1	MXA Signal Analyzer	Keysight	N9020A	MY46471737	Dec. 12, 2024
2	MXG Vector Signal Generator	Agilent	N5182A	MY47420864	Dec. 12, 2024
3	PSG Analog Signal Generator	Agilent	E8257D	MY46521908	Dec. 12, 2024
4	EXG Analog Signal Generator	Keysight	N5173B	MY59100842	Dec. 12, 2024
5	MXG Vector Signal Generator	Keysight	N5182B	MY59100212	Dec. 12, 2024
6	Wideband Radio Communication Tester	R&S	CMW500	102414	Dec. 12, 2024

RF Test System - SRD					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated Until
1	Spectrum Analyzer	R&S	FSV40-N	101331	Mar. 21, 2025
2	MXA Signal Analyzer	Keysight	N9020A	MY46471737	Dec. 12, 2025
3	MXG Vector Signal Generator	Agilent	N5182A	MY47420864	Dec. 12, 2025
4	PSG Analog Signal Generator	Agilent	E8257D	MY46521908	Dec. 12, 2025
5	EXG Analog Signal Generator	Keysight	N5173B	MY59100842	Dec. 12, 2025
6	MXG Vector Signal Generator	Keysight	N5182B	MY59100212	Dec. 12, 2025
7	USB Wideband Power Sensor	Keysight	U2021XA	MY55130004	Mar. 21, 2025
8	USB Wideband Power Sensor	Keysight	U2021XA	MY55130006	Mar. 21, 2025
9	Wideband Radio Communication Tester	R&S	CMW500	102414	Dec. 12, 2025
10	High and low temperature test chamber	ESPEC	MT3035	/	Mar. 21, 2025
11	RF Control Unit	Tonscend	JS0806-2	/	Aug. 21, 2025

Radiated Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated Until
3	Test Receiver	Keysight	N9038A	MY56400071	Dec. 12, 2024
4	Broadband Amplifier	SCHWARZBECK	BBV9743B	259	Dec. 12, 2024
5	Mirowave Broadband Amplifier	SCHWARZBECK	BBV9718C	111	Dec. 12, 2024

Radiated Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated Until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB 9163	01026	Dec. 24, 2025
2	Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-647	Sep. 25, 2025
3	Test Receiver	Keysight	N9038A	MY56400071	Dec. 12, 2025
4	Broadband Amplifier	SCHWARZBECK	BBV9743B	259	Dec. 12, 2025
5	Mirowave Broadband Amplifier	SCHWARZBECK	BBV9718C	111	Dec. 12, 2025
6	3m chamber 3	YIHENG	EE106	/	Aug. 28, 2026

CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-057_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn



7	Test Software	FARA	EZ-EMC	FA-03A2	/
---	---------------	------	--------	---------	---

Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated Until
1	LISN	R&S	ENV216	101112	Dec. 12, 2024
2	LISN	R&S	ENV216	101113	Dec. 12, 2024
3	EMI Test Receiver	R&S	ESCS30	100353	Dec. 12, 2024
4	ISN CAT6	Schwarzbeck	NTFM 8158	CAT6-8158-0046	Dec. 12, 2024
5	ISN CAT5	Schwarzbeck	NTFM 8158	CAT5-8158-0046	Dec. 12, 2024
6	Test Software	R&S	EMC32	6.10.10	/

Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated Until
1	LISN	R&S	ENV216	101112	Dec. 12, 2025
2	LISN	R&S	ENV216	101113	Dec. 12, 2025
3	EMI Test Receiver	R&S	ESCS30	100353	Dec. 12, 2025
4	ISN CAT6	Schwarzbeck	NTFM 8158	CAT6-8158-0046	Dec. 12, 2025
5	ISN CAT5	Schwarzbeck	NTFM 8158	CAT5-8158-0046	Dec. 12, 2025
6	Test Software	R&S	EMC32	6.10.10	/

Note: 1. The Cal. Interval was one year.

2. The Cal. Interval was three years of the antenna.

3. The cable loss has been calculated in test result which connection between each test instruments.



3. TEST ITEM AND RESULTS

3.1. Conducted Emission


Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.207 / RSS-Gen 8.8

Frequency (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46 *
0.5 - 5	56	46
5 - 30	60	50

* Decreases with the logarithm of the frequency.

Test Configuration

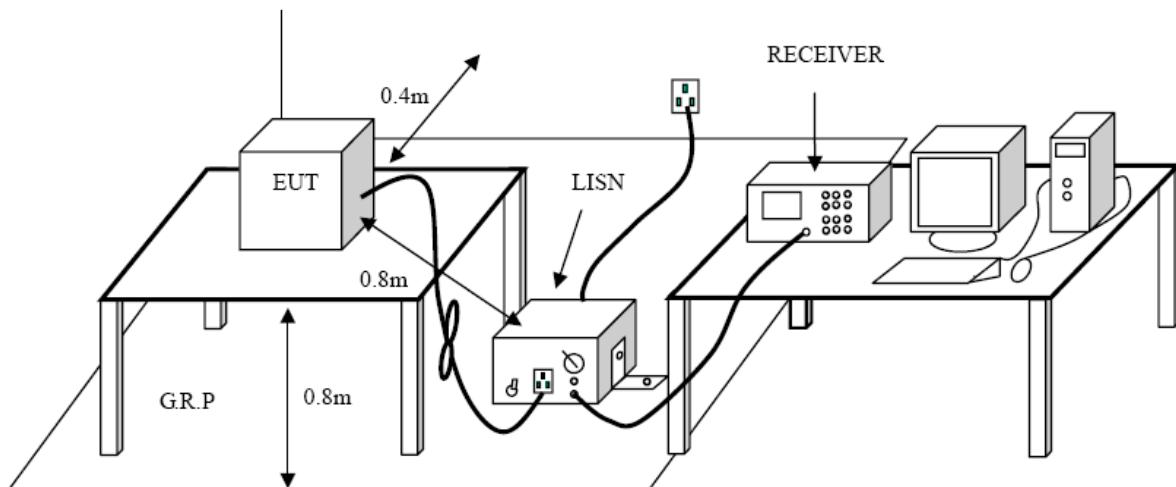

Test Procedure


1. The EUT was setup according to ANSI C63.10:2013 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm / 50 μ H coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.

Test Mode

Please refer to the clause 2.4.

Test Result

Test Voltage:	AC 120V/60Hz
Terminal:	Line
Remark:	Only worse case is reported.

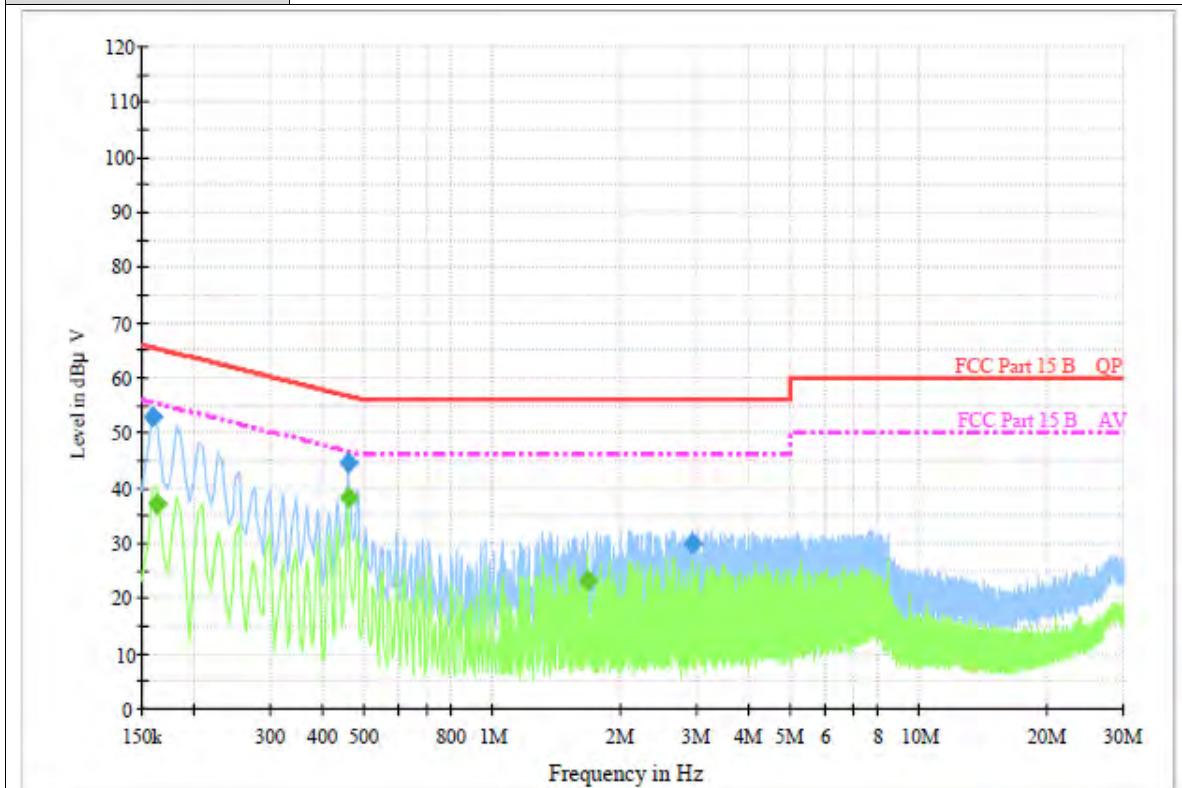


Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.159000	52.8	1000.00	9.000	On	L1	9.5	12.7	65.5	
0.456000	44.6	1000.00	9.000	On	L1	9.5	12.2	56.8	
2.944500	30.1	1000.00	9.000	On	L1	9.5	25.9	56.0	

Final Measurement Detector 2

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.163500	36.9	1000.00	9.000	On	L1	9.5	18.4	55.3	
0.456000	38.3	1000.00	9.000	On	L1	9.5	8.6	46.8	
1.666500	23.2	1000.00	9.000	On	L1	9.5	22.8	46.0	

Emission Level = Read Level + Correct Factor

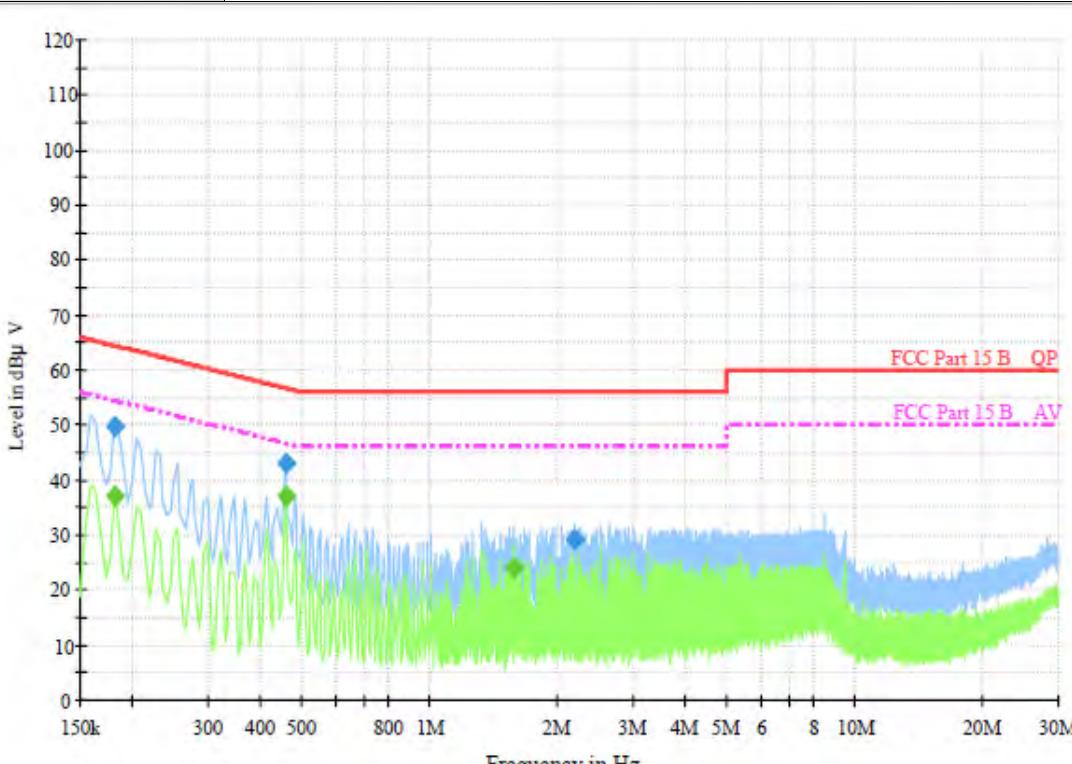Test Voltage:	AC 120V/60Hz																																								
Terminal:	Neutral																																								
Remark:	Only worse case is reported.																																								
																																									
<h3>Final Measurement Detector 1</h3> <table border="1"> <thead> <tr> <th>Frequency (MHz)</th> <th>QuasiPeak (dBμ V)</th> <th>Meas. Time (ms)</th> <th>Bandwidth (kHz)</th> <th>Filter</th> <th>Line</th> <th>Corr. (dB)</th> <th>Margin (dB)</th> <th>Limit (dBμ V)</th> <th>Comment</th> </tr> </thead> <tbody> <tr> <td>0.181500</td> <td>49.6</td> <td>1000.00</td> <td>9.000</td> <td>On</td> <td>N</td> <td>9.5</td> <td>14.8</td> <td>64.4</td> <td></td> </tr> <tr> <td>0.456000</td> <td>42.9</td> <td>1000.00</td> <td>9.000</td> <td>On</td> <td>N</td> <td>9.4</td> <td>13.9</td> <td>56.8</td> <td></td> </tr> <tr> <td>2.193000</td> <td>29.2</td> <td>1000.00</td> <td>9.000</td> <td>On</td> <td>N</td> <td>9.4</td> <td>26.8</td> <td>56.0</td> <td></td> </tr> </tbody> </table>		Frequency (MHz)	QuasiPeak (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment	0.181500	49.6	1000.00	9.000	On	N	9.5	14.8	64.4		0.456000	42.9	1000.00	9.000	On	N	9.4	13.9	56.8		2.193000	29.2	1000.00	9.000	On	N	9.4	26.8	56.0	
Frequency (MHz)	QuasiPeak (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment																																
0.181500	49.6	1000.00	9.000	On	N	9.5	14.8	64.4																																	
0.456000	42.9	1000.00	9.000	On	N	9.4	13.9	56.8																																	
2.193000	29.2	1000.00	9.000	On	N	9.4	26.8	56.0																																	
<h3>Final Measurement Detector 2</h3> <table border="1"> <thead> <tr> <th>Frequency (MHz)</th> <th>Average (dBμ V)</th> <th>Meas. Time (ms)</th> <th>Bandwidth (kHz)</th> <th>Filter</th> <th>Line</th> <th>Corr. (dB)</th> <th>Margin (dB)</th> <th>Limit (dBμ V)</th> <th>Comment</th> </tr> </thead> <tbody> <tr> <td>0.181500</td> <td>37.2</td> <td>1000.00</td> <td>9.000</td> <td>On</td> <td>N</td> <td>9.5</td> <td>17.2</td> <td>54.4</td> <td></td> </tr> <tr> <td>0.456000</td> <td>36.9</td> <td>1000.00</td> <td>9.000</td> <td>On</td> <td>N</td> <td>9.4</td> <td>9.9</td> <td>46.8</td> <td></td> </tr> <tr> <td>1.576500</td> <td>24.1</td> <td>1000.00</td> <td>9.000</td> <td>On</td> <td>N</td> <td>9.4</td> <td>21.9</td> <td>46.0</td> <td></td> </tr> </tbody> </table>		Frequency (MHz)	Average (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment	0.181500	37.2	1000.00	9.000	On	N	9.5	17.2	54.4		0.456000	36.9	1000.00	9.000	On	N	9.4	9.9	46.8		1.576500	24.1	1000.00	9.000	On	N	9.4	21.9	46.0	
Frequency (MHz)	Average (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment																																
0.181500	37.2	1000.00	9.000	On	N	9.5	17.2	54.4																																	
0.456000	36.9	1000.00	9.000	On	N	9.4	9.9	46.8																																	
1.576500	24.1	1000.00	9.000	On	N	9.4	21.9	46.0																																	
Emission Level = Read Level + Correct Factor																																									

3.2. Radiated Emission

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.209 / RSS-Gen 8.9


Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F (kHz)	300
0.490~1.705	24000/F (kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

Frequency Range (MHz)	dB μ V/m (at 3 meters)	
	Peak	Average
Above 1000	74	54



Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission Level (dB μ V/m)=20log Emission Level (μ V/m).

Test Configuration

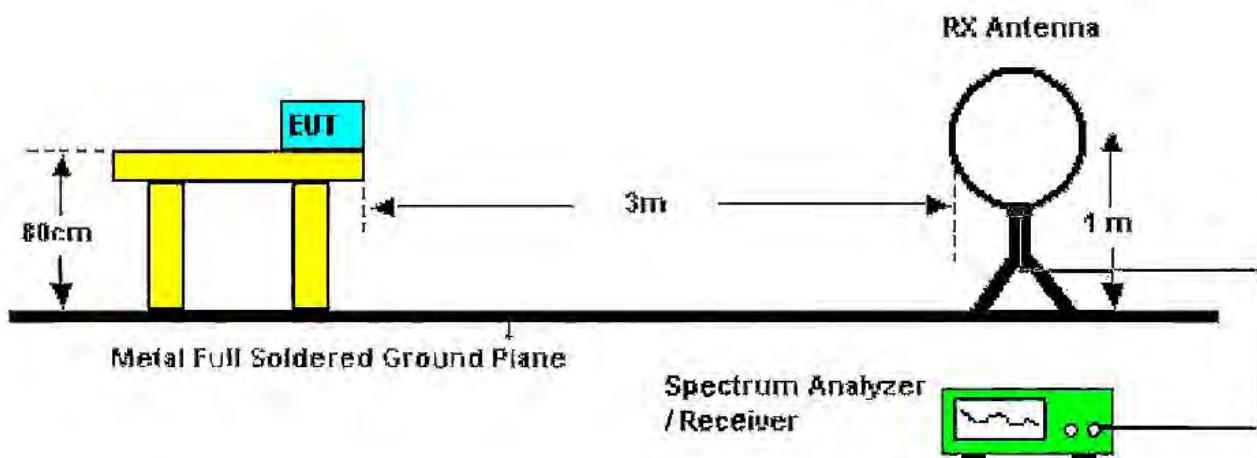

Below 30MHz Test Setup

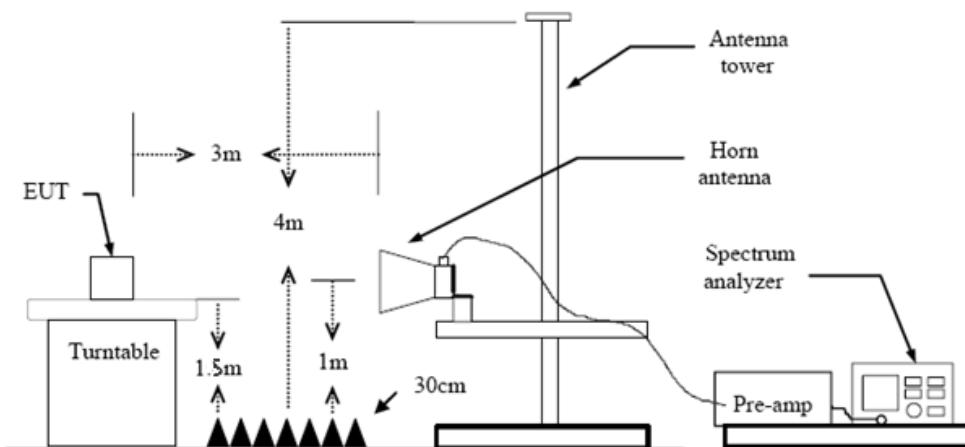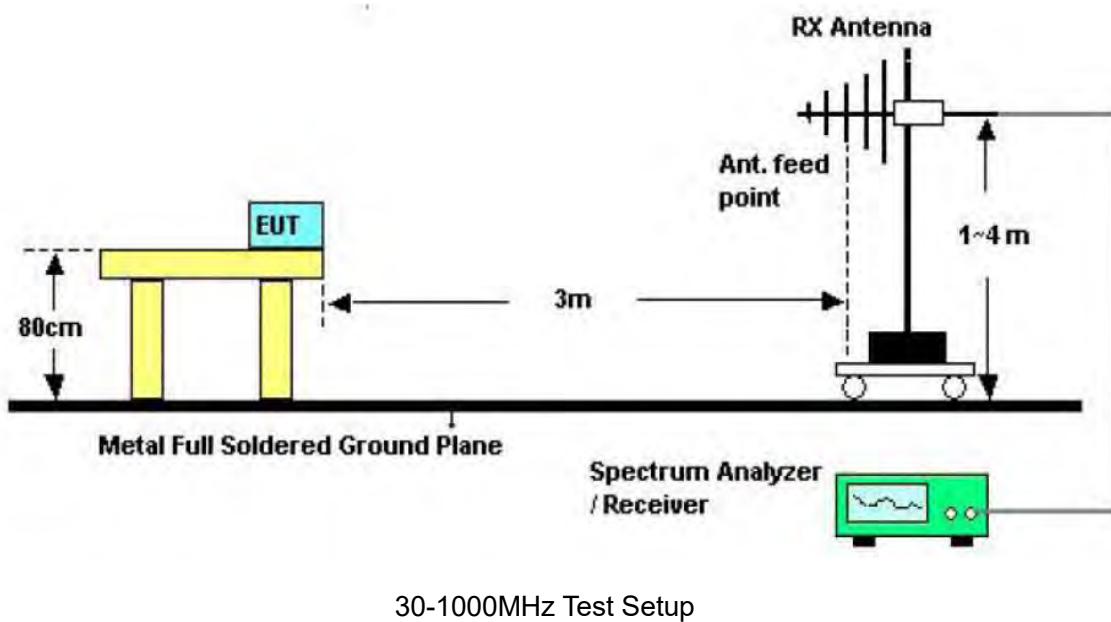

Test Procedure

1. The EUT was setup and tested according to ANSI C63.10:2013.
2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) 9k – 150kHz: RBW=300 Hz, VBW=1 kHz, Sweep=auto, Detector function=peak, Trace=max hold
 - (3) 0.15M – 30MHz: RBW=10 kHz, VBW=30 kHz, Sweep=auto, Detector function=peak, Trace=max hold
 - (4) 30M - 1 GHz: RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold



If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

(5) From 1 GHz to 10th harmonic:

RBW=1MHz, VBW=3MHz Peak detector for Peak value.

RBW=1MHz, VBW see note 1 with Peak Detector for Average Value.

Note 1: For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 3.8 Duty Cycle.

Test Mode

Please refer to the clause 2.4.

Test Result


9 kHz~30 MHz

From 9 kHz to 30 MHz: The conclusion is PASS.

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



30MHz-1GHz

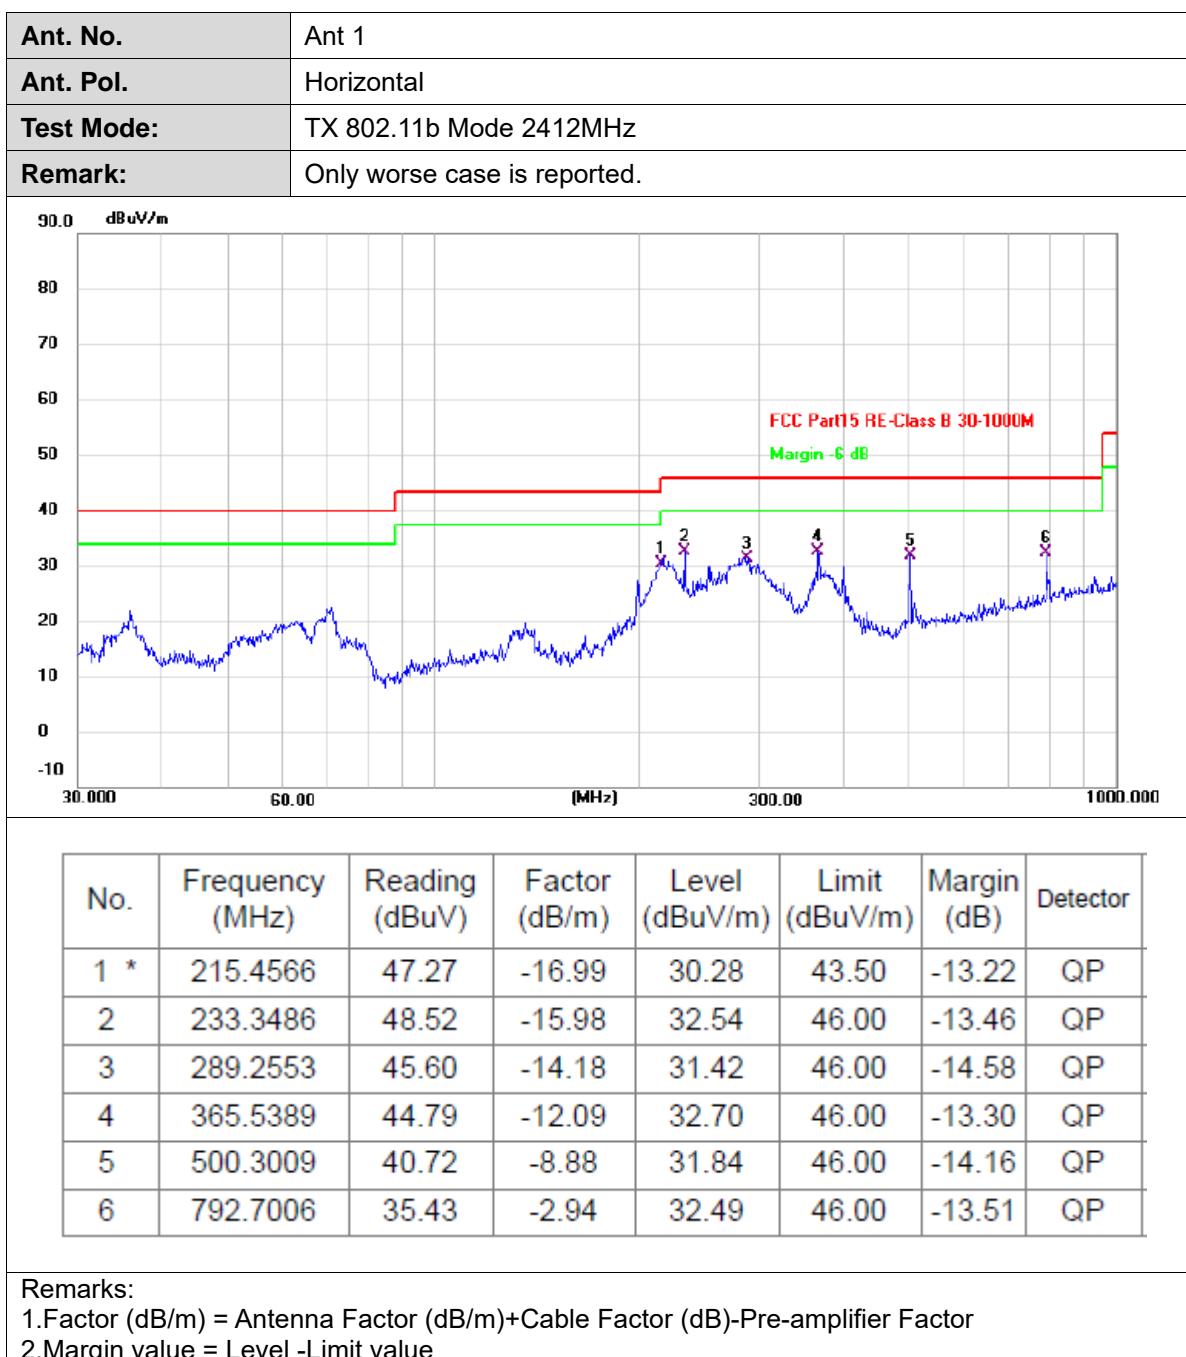

CTC Laboratories, Inc.


Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-057_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : www.cnca.gov.cn



Ant. No.	Ant 1
Ant. Pol.	Vertical
Test Mode:	TX 802.11b Mode 2412MHz
Remark:	Only worse case is reported.

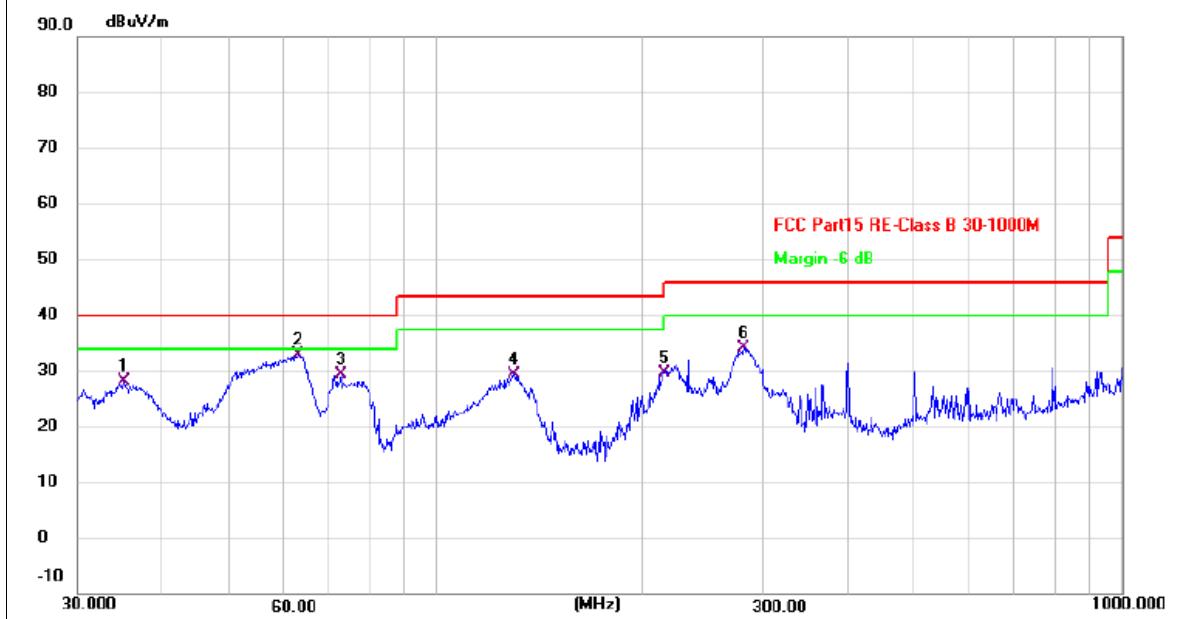

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	35.1584	42.07	-14.01	28.06	40.00	-11.94	QP
2 *	62.8706	48.75	-15.91	32.84	40.00	-7.16	QP
3	72.8465	46.86	-17.45	29.41	40.00	-10.59	QP
4	130.0363	44.93	-15.59	29.34	43.50	-14.16	QP
5	215.4566	46.56	-16.99	29.57	43.50	-13.93	QP
6	281.0074	48.53	-14.45	34.08	46.00	-11.92	QP

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value



Above 1GHz

Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11b Mode 2412MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit. Pre-scan Ant 1 and Ant 2, and found the Ant 1 mode which it is worse case, so only show the test data for worse case.						

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2966.167	44.18	-2.19	41.99	74.00	-32.01	peak
2	3851.333	43.29	-0.05	43.24	74.00	-30.76	peak
3	5766.583	42.32	4.79	47.11	74.00	-26.89	peak
4	7149.167	39.07	9.75	48.82	74.00	-25.18	peak
5	8919.500	40.36	11.57	51.93	74.00	-22.07	peak
6 *	12268.250	37.98	15.64	53.62	74.00	-20.38	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11b Mode 2412MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit. Pre-scan Ant 1 and Ant 2, and found the Ant 1 mode which it is worse case, so only show the test data for worse case.						

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2966.167	41.93	-2.19	39.74	74.00	-34.26	peak
2	4689.500	40.26	1.78	42.04	74.00	-31.96	peak
3	6455.917	38.90	7.21	46.11	74.00	-27.89	peak
4	7940.333	39.05	10.73	49.78	74.00	-24.22	peak
5	9651.917	39.40	12.69	52.09	74.00	-21.91	peak
6 *	12064.583	38.06	15.54	53.60	74.00	-20.40	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11b Mode 2437MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit. Pre-scan Ant 1 and Ant 2, and found the Ant 1 mode which it is worse case, so only show the test data for worse case.						

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2966.167	44.51	-2.19	42.32	74.00	-31.68	peak
2	3894.417	42.04	0.13	42.17	74.00	-31.83	peak
3	5743.083	40.23	4.70	44.93	74.00	-29.07	peak
4	8010.833	39.39	10.84	50.23	74.00	-23.77	peak
5 *	11101.083	38.73	14.72	53.45	74.00	-20.55	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11b Mode 2437MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit. Pre-scan Ant 1 and Ant 2, and found the Ant 1 mode which it is worse case, so only show the test data for worse case.						

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2966.167	42.98	-2.19	40.79	74.00	-33.21	peak
2	4352.667	41.57	1.03	42.60	74.00	-31.40	peak
3	6416.750	37.91	7.11	45.02	74.00	-28.98	peak
4	8030.417	38.55	10.79	49.34	74.00	-24.66	peak
5	10219.833	38.99	13.61	52.60	74.00	-21.40	peak
6 *	12464.083	37.79	15.68	53.47	74.00	-20.53	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value



Ant. No.	Ant 1																																																													
Ant. Pol.	Horizontal																																																													
Test Mode:	TX 802.11b Mode 2462MHz																																																													
Remark:	No report for the emission which more than 20 dB below the prescribed limit. Pre-scan Ant 1 and Ant 2, and found the Ant 1 mode which it is worse case, so only show the test data for worse case.																																																													
<table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1</td><td>2966.167</td><td>43.11</td><td>-2.19</td><td>40.92</td><td>74.00</td><td>-33.08</td><td>peak</td></tr><tr><td>2</td><td>3898.333</td><td>40.79</td><td>0.14</td><td>40.93</td><td>74.00</td><td>-33.07</td><td>peak</td></tr><tr><td>3</td><td>5214.333</td><td>39.90</td><td>2.91</td><td>42.81</td><td>74.00</td><td>-31.19</td><td>peak</td></tr><tr><td>4</td><td>7153.083</td><td>38.22</td><td>9.77</td><td>47.99</td><td>74.00</td><td>-26.01</td><td>peak</td></tr><tr><td>5</td><td>9256.333</td><td>40.39</td><td>12.42</td><td>52.81</td><td>74.00</td><td>-21.19</td><td>peak</td></tr><tr><td>6 *</td><td>12503.250</td><td>37.92</td><td>15.78</td><td>53.70</td><td>74.00</td><td>-20.30</td><td>peak</td></tr></tbody></table>							No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	2966.167	43.11	-2.19	40.92	74.00	-33.08	peak	2	3898.333	40.79	0.14	40.93	74.00	-33.07	peak	3	5214.333	39.90	2.91	42.81	74.00	-31.19	peak	4	7153.083	38.22	9.77	47.99	74.00	-26.01	peak	5	9256.333	40.39	12.42	52.81	74.00	-21.19	peak	6 *	12503.250	37.92	15.78	53.70	74.00	-20.30	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																																																							
1	2966.167	43.11	-2.19	40.92	74.00	-33.08	peak																																																							
2	3898.333	40.79	0.14	40.93	74.00	-33.07	peak																																																							
3	5214.333	39.90	2.91	42.81	74.00	-31.19	peak																																																							
4	7153.083	38.22	9.77	47.99	74.00	-26.01	peak																																																							
5	9256.333	40.39	12.42	52.81	74.00	-21.19	peak																																																							
6 *	12503.250	37.92	15.78	53.70	74.00	-20.30	peak																																																							
Remarks: 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2. Margin value = Level -Limit value																																																														

Ant. No.	Ant 1																																																														
Ant. Pol.	Vertical																																																														
Test Mode:	TX 802.11b Mode 2462MHz																																																														
Remark:	No report for the emission which more than 20 dB below the prescribed limit. Pre-scan Ant 1 and Ant 2, and found the Ant 1 mode which it is worse case, so only show the test data for worse case.																																																														
<table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1</td><td>2966.167</td><td>43.85</td><td>-2.19</td><td>41.66</td><td>74.00</td><td>-32.34</td><td>peak</td></tr><tr><td>2</td><td>4442.750</td><td>40.03</td><td>1.23</td><td>41.26</td><td>74.00</td><td>-32.74</td><td>peak</td></tr><tr><td>3</td><td>6029.000</td><td>39.46</td><td>5.74</td><td>45.20</td><td>74.00</td><td>-28.80</td><td>peak</td></tr><tr><td>4</td><td>7184.417</td><td>38.30</td><td>9.93</td><td>48.23</td><td>74.00</td><td>-25.77</td><td>peak</td></tr><tr><td>5</td><td>9107.500</td><td>38.30</td><td>12.05</td><td>50.35</td><td>74.00</td><td>-23.65</td><td>peak</td></tr><tr><td>6 *</td><td>11657.250</td><td>38.15</td><td>15.12</td><td>53.27</td><td>74.00</td><td>-20.73</td><td>peak</td></tr></tbody></table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	2966.167	43.85	-2.19	41.66	74.00	-32.34	peak	2	4442.750	40.03	1.23	41.26	74.00	-32.74	peak	3	6029.000	39.46	5.74	45.20	74.00	-28.80	peak	4	7184.417	38.30	9.93	48.23	74.00	-25.77	peak	5	9107.500	38.30	12.05	50.35	74.00	-23.65	peak	6 *	11657.250	38.15	15.12	53.27	74.00	-20.73	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																																																								
1	2966.167	43.85	-2.19	41.66	74.00	-32.34	peak																																																								
2	4442.750	40.03	1.23	41.26	74.00	-32.74	peak																																																								
3	6029.000	39.46	5.74	45.20	74.00	-28.80	peak																																																								
4	7184.417	38.30	9.93	48.23	74.00	-25.77	peak																																																								
5	9107.500	38.30	12.05	50.35	74.00	-23.65	peak																																																								
6 *	11657.250	38.15	15.12	53.27	74.00	-20.73	peak																																																								
Remarks: 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2. Margin value = Level -Limit value																																																															



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11g Mode 2412MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit. Pre-scan Ant 1 and Ant 2, and found the Ant 1 mode which it is worse case, so only show the test data for worse case.						

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2966.167	43.25	-2.19	41.06	74.00	-32.94	peak
2	4352.667	40.28	1.03	41.31	74.00	-32.69	peak
3	5523.750	40.10	3.84	43.94	74.00	-30.06	peak
4	7121.750	39.51	9.60	49.11	74.00	-24.89	peak
5	9460.000	39.62	12.56	52.18	74.00	-21.82	peak
6 *	11982.333	38.18	15.42	53.60	74.00	-20.40	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11g Mode 2412MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit. Pre-scan Ant 1 and Ant 2, and found the Ant 1 mode which it is worse case, so only show the test data for worse case.						

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2966.167	43.00	-2.19	40.81	74.00	-33.19	peak
2	4333.083	41.19	1.00	42.19	74.00	-31.81	peak
3	6479.417	38.63	7.27	45.90	74.00	-28.10	peak
4	7615.250	38.93	10.09	49.02	74.00	-24.98	peak
5	9573.583	39.17	12.59	51.76	74.00	-22.24	peak
6 *	11175.500	38.65	14.75	53.40	74.00	-20.60	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value



Ant. No.	Ant 1																																																														
Ant. Pol.	Horizontal																																																														
Test Mode:	TX 802.11g Mode 2437MHz																																																														
Remark:	No report for the emission which more than 20 dB below the prescribed limit. Pre-scan Ant 1 and Ant 2, and found the Ant 1 mode which it is worse case, so only show the test data for worse case.																																																														
<table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1</td><td>2966.167</td><td>44.44</td><td>-2.19</td><td>42.25</td><td>74.00</td><td>-31.75</td><td>peak</td></tr><tr><td>2</td><td>5120.333</td><td>40.04</td><td>2.63</td><td>42.67</td><td>74.00</td><td>-31.33</td><td>peak</td></tr><tr><td>3</td><td>6549.917</td><td>38.99</td><td>7.45</td><td>46.44</td><td>74.00</td><td>-27.56</td><td>peak</td></tr><tr><td>4</td><td>7901.167</td><td>39.18</td><td>10.64</td><td>49.82</td><td>74.00</td><td>-24.18</td><td>peak</td></tr><tr><td>5</td><td>9839.917</td><td>39.45</td><td>12.99</td><td>52.44</td><td>74.00</td><td>-21.56</td><td>peak</td></tr><tr><td>6 *</td><td>12393.583</td><td>38.01</td><td>15.50</td><td>53.51</td><td>74.00</td><td>-20.49</td><td>peak</td></tr></tbody></table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	2966.167	44.44	-2.19	42.25	74.00	-31.75	peak	2	5120.333	40.04	2.63	42.67	74.00	-31.33	peak	3	6549.917	38.99	7.45	46.44	74.00	-27.56	peak	4	7901.167	39.18	10.64	49.82	74.00	-24.18	peak	5	9839.917	39.45	12.99	52.44	74.00	-21.56	peak	6 *	12393.583	38.01	15.50	53.51	74.00	-20.49	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																																																								
1	2966.167	44.44	-2.19	42.25	74.00	-31.75	peak																																																								
2	5120.333	40.04	2.63	42.67	74.00	-31.33	peak																																																								
3	6549.917	38.99	7.45	46.44	74.00	-27.56	peak																																																								
4	7901.167	39.18	10.64	49.82	74.00	-24.18	peak																																																								
5	9839.917	39.45	12.99	52.44	74.00	-21.56	peak																																																								
6 *	12393.583	38.01	15.50	53.51	74.00	-20.49	peak																																																								
Remarks: 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2. Margin value = Level -Limit value																																																															

Ant. No.	Ant 1																																																														
Ant. Pol.	Vertical																																																														
Test Mode:	TX 802.11g Mode 2437MHz																																																														
Remark:	No report for the emission which more than 20 dB below the prescribed limit. Pre-scan Ant 1 and Ant 2, and found the Ant 1 mode which it is worse case, so only show the test data for worse case.																																																														
<table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1</td><td>2966.167</td><td>42.68</td><td>-2.19</td><td>40.49</td><td>74.00</td><td>-33.51</td><td>peak</td></tr><tr><td>2</td><td>4356.583</td><td>41.40</td><td>1.04</td><td>42.44</td><td>74.00</td><td>-31.56</td><td>peak</td></tr><tr><td>3</td><td>6471.583</td><td>40.41</td><td>7.24</td><td>47.65</td><td>74.00</td><td>-26.35</td><td>peak</td></tr><tr><td>4</td><td>8821.583</td><td>39.73</td><td>11.43</td><td>51.16</td><td>74.00</td><td>-22.84</td><td>peak</td></tr><tr><td>5</td><td>10012.250</td><td>39.26</td><td>13.20</td><td>52.46</td><td>74.00</td><td>-21.54</td><td>peak</td></tr><tr><td>6 *</td><td>11246.000</td><td>38.64</td><td>14.78</td><td>53.42</td><td>74.00</td><td>-20.58</td><td>peak</td></tr></tbody></table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	2966.167	42.68	-2.19	40.49	74.00	-33.51	peak	2	4356.583	41.40	1.04	42.44	74.00	-31.56	peak	3	6471.583	40.41	7.24	47.65	74.00	-26.35	peak	4	8821.583	39.73	11.43	51.16	74.00	-22.84	peak	5	10012.250	39.26	13.20	52.46	74.00	-21.54	peak	6 *	11246.000	38.64	14.78	53.42	74.00	-20.58	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																																																								
1	2966.167	42.68	-2.19	40.49	74.00	-33.51	peak																																																								
2	4356.583	41.40	1.04	42.44	74.00	-31.56	peak																																																								
3	6471.583	40.41	7.24	47.65	74.00	-26.35	peak																																																								
4	8821.583	39.73	11.43	51.16	74.00	-22.84	peak																																																								
5	10012.250	39.26	13.20	52.46	74.00	-21.54	peak																																																								
6 *	11246.000	38.64	14.78	53.42	74.00	-20.58	peak																																																								
Remarks: 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2. Margin value = Level -Limit value																																																															



Ant. No.	Ant 1																																																														
Ant. Pol.	Horizontal																																																														
Test Mode:	TX 802.11g Mode 2462MHz																																																														
Remark:	No report for the emission which more than 20 dB below the prescribed limit. Pre-scan Ant 1 and Ant 2, and found the Ant 1 mode which it is worse case, so only show the test data for worse case.																																																														
<table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1</td><td>2966.167</td><td>43.39</td><td>-2.19</td><td>41.20</td><td>74.00</td><td>-32.80</td><td>peak</td></tr><tr><td>2</td><td>3972.750</td><td>40.64</td><td>0.44</td><td>41.08</td><td>74.00</td><td>-32.92</td><td>peak</td></tr><tr><td>3</td><td>5660.833</td><td>39.57</td><td>4.36</td><td>43.93</td><td>74.00</td><td>-30.07</td><td>peak</td></tr><tr><td>4</td><td>8194.917</td><td>40.57</td><td>10.37</td><td>50.94</td><td>74.00</td><td>-23.06</td><td>peak</td></tr><tr><td>5</td><td>10031.833</td><td>37.89</td><td>13.24</td><td>51.13</td><td>74.00</td><td>-22.87</td><td>peak</td></tr><tr><td>6 *</td><td>12471.917</td><td>37.86</td><td>15.70</td><td>53.56</td><td>74.00</td><td>-20.44</td><td>peak</td></tr></tbody></table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	2966.167	43.39	-2.19	41.20	74.00	-32.80	peak	2	3972.750	40.64	0.44	41.08	74.00	-32.92	peak	3	5660.833	39.57	4.36	43.93	74.00	-30.07	peak	4	8194.917	40.57	10.37	50.94	74.00	-23.06	peak	5	10031.833	37.89	13.24	51.13	74.00	-22.87	peak	6 *	12471.917	37.86	15.70	53.56	74.00	-20.44	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																																																								
1	2966.167	43.39	-2.19	41.20	74.00	-32.80	peak																																																								
2	3972.750	40.64	0.44	41.08	74.00	-32.92	peak																																																								
3	5660.833	39.57	4.36	43.93	74.00	-30.07	peak																																																								
4	8194.917	40.57	10.37	50.94	74.00	-23.06	peak																																																								
5	10031.833	37.89	13.24	51.13	74.00	-22.87	peak																																																								
6 *	12471.917	37.86	15.70	53.56	74.00	-20.44	peak																																																								
Remarks: 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2. Margin value = Level -Limit value																																																															

Ant. No.	Ant 1																																																														
Ant. Pol.	Vertical																																																														
Test Mode:	TX 802.11g Mode 2462MHz																																																														
Remark:	No report for the emission which more than 20 dB below the prescribed limit. Pre-scan Ant 1 and Ant 2, and found the Ant 1 mode which it is worse case, so only show the test data for worse case.																																																														
<table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1</td><td>2966.167</td><td>43.09</td><td>-2.19</td><td>40.90</td><td>74.00</td><td>-33.10</td><td>peak</td></tr><tr><td>2</td><td>4736.500</td><td>40.40</td><td>1.86</td><td>42.26</td><td>74.00</td><td>-31.74</td><td>peak</td></tr><tr><td>3</td><td>6314.917</td><td>38.08</td><td>6.72</td><td>44.80</td><td>74.00</td><td>-29.20</td><td>peak</td></tr><tr><td>4</td><td>7936.417</td><td>38.07</td><td>10.72</td><td>48.79</td><td>74.00</td><td>-25.21</td><td>peak</td></tr><tr><td>5</td><td>9526.583</td><td>39.41</td><td>12.59</td><td>52.00</td><td>74.00</td><td>-22.00</td><td>peak</td></tr><tr><td>6 *</td><td>12033.250</td><td>37.67</td><td>15.49</td><td>53.16</td><td>74.00</td><td>-20.84</td><td>peak</td></tr></tbody></table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	2966.167	43.09	-2.19	40.90	74.00	-33.10	peak	2	4736.500	40.40	1.86	42.26	74.00	-31.74	peak	3	6314.917	38.08	6.72	44.80	74.00	-29.20	peak	4	7936.417	38.07	10.72	48.79	74.00	-25.21	peak	5	9526.583	39.41	12.59	52.00	74.00	-22.00	peak	6 *	12033.250	37.67	15.49	53.16	74.00	-20.84	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																																																								
1	2966.167	43.09	-2.19	40.90	74.00	-33.10	peak																																																								
2	4736.500	40.40	1.86	42.26	74.00	-31.74	peak																																																								
3	6314.917	38.08	6.72	44.80	74.00	-29.20	peak																																																								
4	7936.417	38.07	10.72	48.79	74.00	-25.21	peak																																																								
5	9526.583	39.41	12.59	52.00	74.00	-22.00	peak																																																								
6 *	12033.250	37.67	15.49	53.16	74.00	-20.84	peak																																																								
Remarks: 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2. Margin value = Level -Limit value																																																															



Ant. No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT20) Mode 2412MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2966.167	45.06	-2.19	42.87	74.00	-31.13	peak
2	4372.250	41.86	1.07	42.93	74.00	-31.07	peak
3	6518.583	39.55	7.37	46.92	74.00	-27.08	peak
4	8081.333	39.06	10.67	49.73	74.00	-24.27	peak
5	9937.833	39.56	13.11	52.67	74.00	-21.33	peak
6 *	12370.083	38.06	15.52	53.58	74.00	-20.42	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

Ant. No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT20) Mode 2412MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2966.167	43.31	-2.19	41.12	74.00	-32.88	peak
2	3847.417	40.97	-0.06	40.91	74.00	-33.09	peak
3	5519.833	39.67	3.82	43.49	74.00	-30.51	peak
4	7192.250	38.33	9.98	48.31	74.00	-25.69	peak
5	9550.083	39.66	12.58	52.24	74.00	-21.76	peak
6 *	11586.750	38.53	15.10	53.63	74.00	-20.37	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value



Ant. No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT20) Mode 2437MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2966.167	44.32	-2.19	42.13	74.00	-31.87	peak
2	4364.417	40.72	1.05	41.77	74.00	-32.23	peak
3	6577.333	38.53	7.52	46.05	74.00	-27.95	peak
4	8343.750	39.16	10.48	49.64	74.00	-24.36	peak
5	10020.083	38.39	13.22	51.61	74.00	-22.39	peak
6 *	11864.833	38.28	15.20	53.48	74.00	-20.52	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

Ant. No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT20) Mode 2437MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2966.167	42.33	-2.19	40.14	74.00	-33.86	peak
2	4646.417	40.36	1.69	42.05	74.00	-31.95	peak
3	6405.000	38.65	7.08	45.73	74.00	-28.27	peak
4	8312.417	40.09	10.45	50.54	74.00	-23.46	peak
5	10400.000	39.02	13.89	52.91	74.00	-21.09	peak
6 *	12730.417	36.91	16.39	53.30	74.00	-20.70	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value



Ant. No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT20) Mode 2462MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2966.167	44.17	-2.19	41.98	74.00	-32.02	peak
2	4368.333	40.01	1.06	41.07	74.00	-32.93	peak
3	5723.500	38.81	4.62	43.43	74.00	-30.57	peak
4	7282.333	38.00	10.05	48.05	74.00	-25.95	peak
5	9597.083	39.29	12.60	51.89	74.00	-22.11	peak
6 *	11747.333	38.59	15.10	53.69	74.00	-20.31	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

Ant. No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT20) Mode 2462MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2966.167	42.43	-2.19	40.24	74.00	-33.76	peak
2	5100.750	40.27	2.57	42.84	74.00	-31.16	peak
3	6373.667	38.85	6.96	45.81	74.00	-28.19	peak
4	7838.500	39.39	10.51	49.90	74.00	-24.10	peak
5	10497.917	38.85	13.94	52.79	74.00	-21.21	peak
6 *	12577.667	37.73	16.01	53.74	74.00	-20.26	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value



Ant. No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT40) Mode 2422MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2966.167	43.76	-2.19	41.57	74.00	-32.43	peak
2	4431.000	41.04	1.20	42.24	74.00	-31.76	peak
3	6385.417	38.88	7.01	45.89	74.00	-28.11	peak
4	8010.833	38.38	10.84	49.22	74.00	-24.78	peak
5	9225.000	38.49	12.39	50.88	74.00	-23.12	peak
6 *	11512.333	38.49	14.98	53.47	74.00	-20.53	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

Ant. No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT40) Mode 2422MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2966.167	43.43	-2.19	41.24	74.00	-32.76	peak
2	4356.583	40.80	1.04	41.84	74.00	-32.16	peak
3	5179.083	40.69	2.82	43.51	74.00	-30.49	peak
4	7164.833	38.91	9.83	48.74	74.00	-25.26	peak
5	8770.667	40.51	11.34	51.85	74.00	-22.15	peak
6 *	11234.250	38.52	14.78	53.30	74.00	-20.70	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value



Ant. No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT40) Mode 2437MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2966.167	43.71	-2.19	41.52	74.00	-32.48	peak
2	4344.833	40.40	1.02	41.42	74.00	-32.58	peak
3	5982.000	38.36	5.58	43.94	74.00	-30.06	peak
4	7172.667	38.70	9.87	48.57	74.00	-25.43	peak
5	9444.333	38.39	12.56	50.95	74.00	-23.05	peak
6 *	12483.667	37.72	15.74	53.46	74.00	-20.54	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

Ant. No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT40) Mode 2437MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2966.167	42.31	-2.19	40.12	74.00	-33.88	peak
2	4337.000	41.35	0.99	42.34	74.00	-31.66	peak
3	6651.750	38.83	7.67	46.50	74.00	-27.50	peak
4	7987.333	39.57	10.83	50.40	74.00	-23.60	peak
5	9816.417	38.31	12.96	51.27	74.00	-22.73	peak
6 *	11504.500	38.43	14.96	53.39	74.00	-20.61	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value



Ant. No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT40) Mode 2452MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2966.167	43.71	-2.19	41.52	74.00	-32.48	peak
2	5194.750	40.03	2.85	42.88	74.00	-31.12	peak
3	6495.083	37.96	7.31	45.27	74.00	-28.73	peak
4	7995.167	39.08	10.86	49.94	74.00	-24.06	peak
5	9812.500	39.09	12.96	52.05	74.00	-21.95	peak
6 *	12060.667	37.73	15.53	53.26	74.00	-20.74	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

Ant. No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT40) Mode 2452MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2966.167	42.52	-2.19	40.33	74.00	-33.67	peak
2	4380.083	40.78	1.08	41.86	74.00	-32.14	peak
3	5566.833	39.25	3.99	43.24	74.00	-30.76	peak
4	7137.417	39.49	9.68	49.17	74.00	-24.83	peak
5	9483.500	38.94	12.58	51.52	74.00	-22.48	peak
6 *	12084.167	37.57	15.57	53.14	74.00	-20.86	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value



Ant. No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ax(HE20) Mode 2412MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2966.167	43.45	-2.19	41.26	74.00	-32.74	peak
2	5167.333	40.66	2.78	43.44	74.00	-30.56	peak
3	6338.417	39.31	6.81	46.12	74.00	-27.88	peak
4	7920.750	39.80	10.69	50.49	74.00	-23.51	peak
5	9479.583	38.60	12.57	51.17	74.00	-22.83	peak
6 *	12354.417	38.02	15.54	53.56	74.00	-20.44	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

Ant. No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ax(HE20) Mode 2412MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2793.833	42.31	-2.60	39.71	74.00	-34.29	peak
2	3635.917	42.52	-0.73	41.79	74.00	-32.21	peak
3	5139.917	40.20	2.69	42.89	74.00	-31.11	peak
4	7211.833	38.46	10.03	48.49	74.00	-25.51	peak
5	9679.333	39.71	12.74	52.45	74.00	-21.55	peak
6 *	11253.833	38.46	14.79	53.25	74.00	-20.75	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value



Ant. No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ax(HE20) Mode 2437MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2966.167	43.80	-2.19	41.61	74.00	-32.39	peak
2	4094.167	41.19	0.62	41.81	74.00	-32.19	peak
3	6420.667	39.99	7.12	47.11	74.00	-26.89	peak
4	8253.667	39.57	10.40	49.97	74.00	-24.03	peak
5	9546.167	38.88	12.59	51.47	74.00	-22.53	peak
6 *	12436.667	37.80	15.59	53.39	74.00	-20.61	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

Ant. No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ax(HE20) Mode 2437MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2966.167	42.67	-2.19	40.48	74.00	-33.52	peak
2	4736.500	39.97	1.86	41.83	74.00	-32.17	peak
3	6448.083	38.17	7.19	45.36	74.00	-28.64	peak
4	7956.000	38.67	10.77	49.44	74.00	-24.56	peak
5	9287.667	39.87	12.44	52.31	74.00	-21.69	peak
6 *	11316.500	38.71	14.82	53.53	74.00	-20.47	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value



Ant. No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ax(HE20) Mode 2462MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2966.167	43.61	-2.19	41.42	74.00	-32.58	peak
2	4317.417	41.71	0.96	42.67	74.00	-31.33	peak
3	6495.083	39.16	7.31	46.47	74.00	-27.53	peak
4	7971.667	39.28	10.81	50.09	74.00	-23.91	peak
5	10078.833	38.41	13.35	51.76	74.00	-22.24	peak
6 *	12037.167	37.85	15.50	53.35	74.00	-20.65	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

Ant. No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ax(HE20) Mode 2462MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2966.167	42.46	-2.19	40.27	74.00	-33.73	peak
2	4008.000	41.10	0.55	41.65	74.00	-32.35	peak
3	6358.000	38.31	6.89	45.20	74.00	-28.80	peak
4	7967.750	39.18	10.80	49.98	74.00	-24.02	peak
5	9479.583	39.49	12.57	52.06	74.00	-21.94	peak
6 *	11994.083	37.85	15.44	53.29	74.00	-20.71	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value



Ant. No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ax(HE40) Mode 2422MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2966.167	44.13	-2.19	41.94	74.00	-32.06	peak
2	5163.417	39.34	2.76	42.10	74.00	-31.90	peak
3	6847.583	38.75	8.15	46.90	74.00	-27.10	peak
4	8320.250	39.51	10.46	49.97	74.00	-24.03	peak
5	9961.333	38.60	13.13	51.73	74.00	-22.27	peak
6 *	12374.000	37.80	15.52	53.32	74.00	-20.68	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

Ant. No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ax(HE40) Mode 2422MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2966.167	42.32	-2.19	40.13	74.00	-33.87	peak
2	5069.417	40.14	2.47	42.61	74.00	-31.39	peak
3	6463.750	38.80	7.23	46.03	74.00	-27.97	peak
4	7940.333	39.18	10.73	49.91	74.00	-24.09	peak
5	9503.083	39.00	12.58	51.58	74.00	-22.42	peak
6 *	12009.750	37.82	15.46	53.28	74.00	-20.72	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value



Ant. No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ax(HE40) Mode 2437MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2966.167	44.16	-2.19	41.97	74.00	-32.03	peak
2	4380.083	40.89	1.08	41.97	74.00	-32.03	peak
3	6056.417	37.93	5.82	43.75	74.00	-30.25	peak
4	7254.917	39.97	10.04	50.01	74.00	-23.99	peak
5	9201.500	39.04	12.37	51.41	74.00	-22.59	peak
6 *	11563.250	37.96	15.06	53.02	74.00	-20.98	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

Ant. No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ax(HE40) Mode 2437MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2966.167	42.85	-2.19	40.66	74.00	-33.34	peak
2	5586.417	40.30	4.06	44.36	74.00	-29.64	peak
3	6910.250	39.05	8.48	47.53	74.00	-26.47	peak
4	8433.833	39.21	10.61	49.82	74.00	-24.18	peak
5	10027.917	39.36	13.24	52.60	74.00	-21.40	peak
6 *	12025.417	37.83	15.48	53.31	74.00	-20.69	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value



Ant. No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ax(HE40) Mode 2452MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2966.167	44.08	-2.19	41.89	74.00	-32.11	peak
2	5104.667	39.23	2.58	41.81	74.00	-32.19	peak
3	6459.833	38.86	7.22	46.08	74.00	-27.92	peak
4	8332.000	39.94	10.48	50.42	74.00	-23.58	peak
5	9757.667	39.25	12.87	52.12	74.00	-21.88	peak
6 *	11551.500	38.45	15.05	53.50	74.00	-20.50	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

Ant. No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ax(HE40) Mode 2452MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2966.167	43.00	-2.19	40.81	74.00	-33.19	peak
2	4709.083	39.42	1.81	41.23	74.00	-32.77	peak
3	6334.500	40.13	6.80	46.93	74.00	-27.07	peak
4	7348.917	39.39	10.08	49.47	74.00	-24.53	peak
5	9636.250	38.23	12.67	50.90	74.00	-23.10	peak
6 *	11719.917	38.19	15.11	53.30	74.00	-20.70	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value


3.3. Band Edge Emissions (Radiated)

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d) / RSS-247 5.5

Restricted Frequency Band (MHz)	(dB μ V/m) (at 3m)	
	Peak	Average
2310 ~ 2390	74	54
2483.5 ~ 2500	74	54

Test Configuration

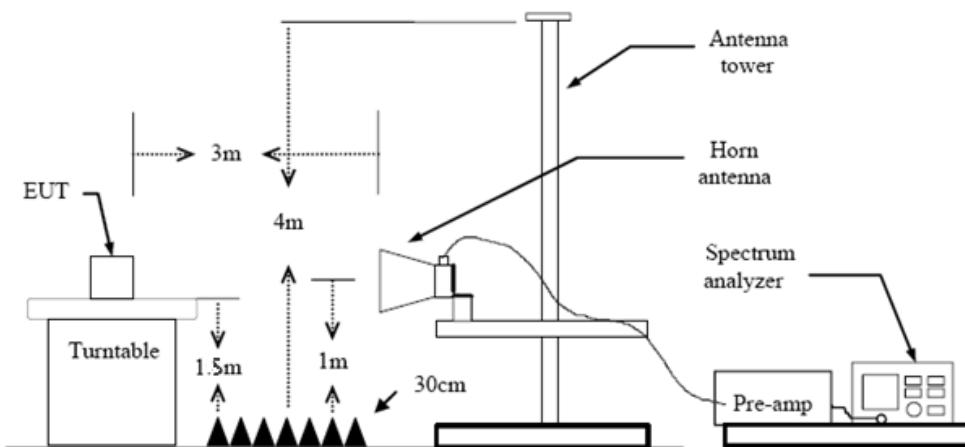

Test Procedure


1. The EUT was setup and tested according to ANSI C63.10:2013 requirements.
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
5. The receiver set as follow:
RBW=1MHz, VBW=3MHz Peak detector for Peak value.
RBW=1MHz, VBW see note 1 with Peak Detector for Average Value.

Note 1: For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 3.8 Duty Cycle.


Test Mode

Please refer to the clause 2.4.

**Test Result**

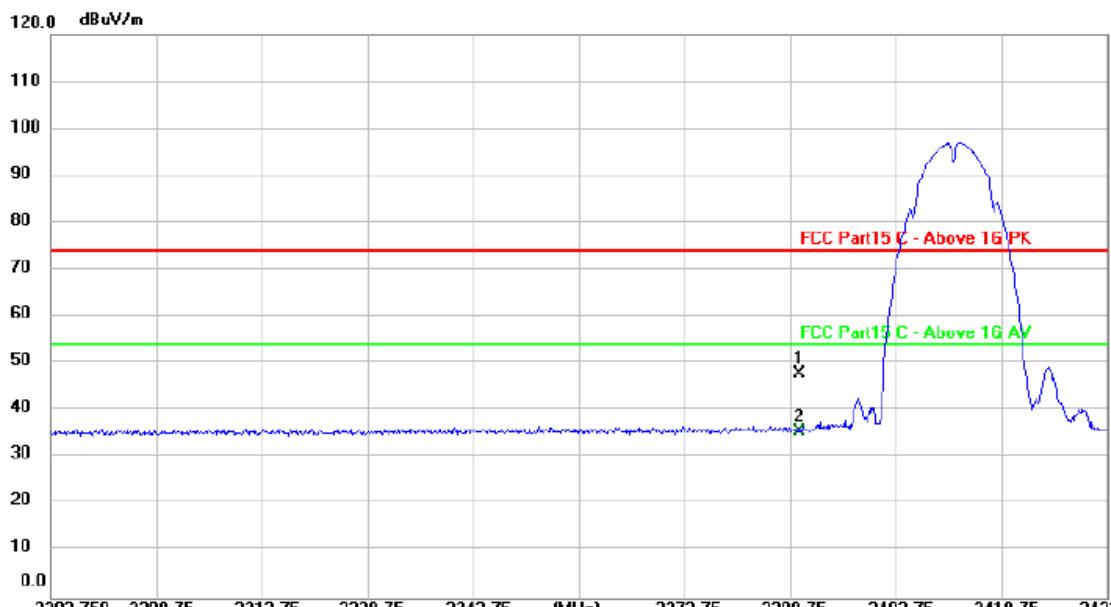
Ant. No.	Ant 1																														
Ant. Pol.	Horizontal																														
Test Mode:	TX 802.11b Mode 2412MHz																														
Remark:	Pre-scan Ant 1 and Ant 2, and found the Ant 1 mode which it is worse case, so only show the test data for worse case.																														
																															
<table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1</td><td>2390.000</td><td>16.59</td><td>31.31</td><td>47.90</td><td>74.00</td><td>-26.10</td><td>peak</td></tr><tr><td>2 *</td><td>2390.000</td><td>4.36</td><td>31.31</td><td>35.67</td><td>54.00</td><td>-18.33</td><td>AVG</td></tr></tbody></table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	2390.000	16.59	31.31	47.90	74.00	-26.10	peak	2 *	2390.000	4.36	31.31	35.67	54.00	-18.33	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	2390.000	16.59	31.31	47.90	74.00	-26.10	peak																								
2 *	2390.000	4.36	31.31	35.67	54.00	-18.33	AVG																								
<p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor</p> <p>2. Margin value = Level -Limit value</p>																															

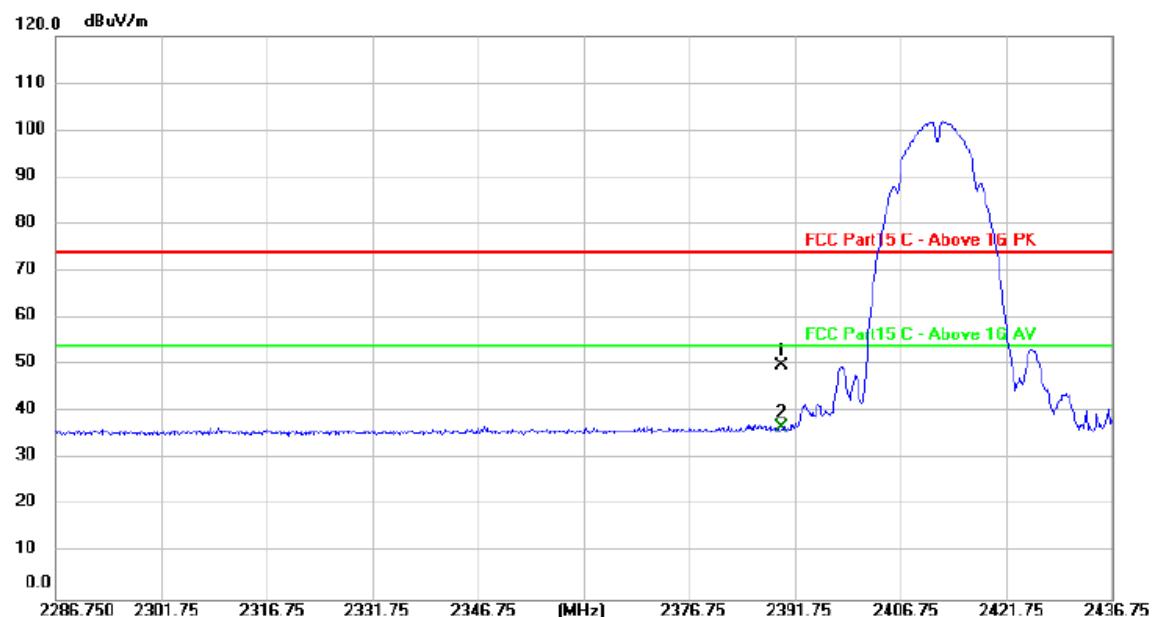

Ant. No.	Ant 1																															
Ant. Pol.	Vertical																															
Test Mode:	TX 802.11b Mode 2412MHz																															
Remark:	Pre-scan Ant 1 and Ant 2, and found the Ant 1 mode which it is worse case, so only show the test data for worse case.																															
																																
<table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1</td><td>2390.000</td><td>18.52</td><td>31.31</td><td>49.83</td><td>74.00</td><td>-24.17</td><td>peak</td></tr><tr><td>2 *</td><td>2390.000</td><td>5.56</td><td>31.31</td><td>36.87</td><td>54.00</td><td>-17.13</td><td>AVG</td></tr></tbody></table>									No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	2390.000	18.52	31.31	49.83	74.00	-24.17	peak	2 *	2390.000	5.56	31.31	36.87	54.00	-17.13	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																									
1	2390.000	18.52	31.31	49.83	74.00	-24.17	peak																									
2 *	2390.000	5.56	31.31	36.87	54.00	-17.13	AVG																									
<p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor</p> <p>2. Margin value = Level -Limit value</p>																																



Ant. No.	Ant 1
Ant. Pol.	Horizontal
Test Mode:	TX 802.11b Mode 2462MHz
Remark:	Pre-scan Ant 1 and Ant 2, and found the Ant 1 mode which it is worse case, so only show the test data for worse case.

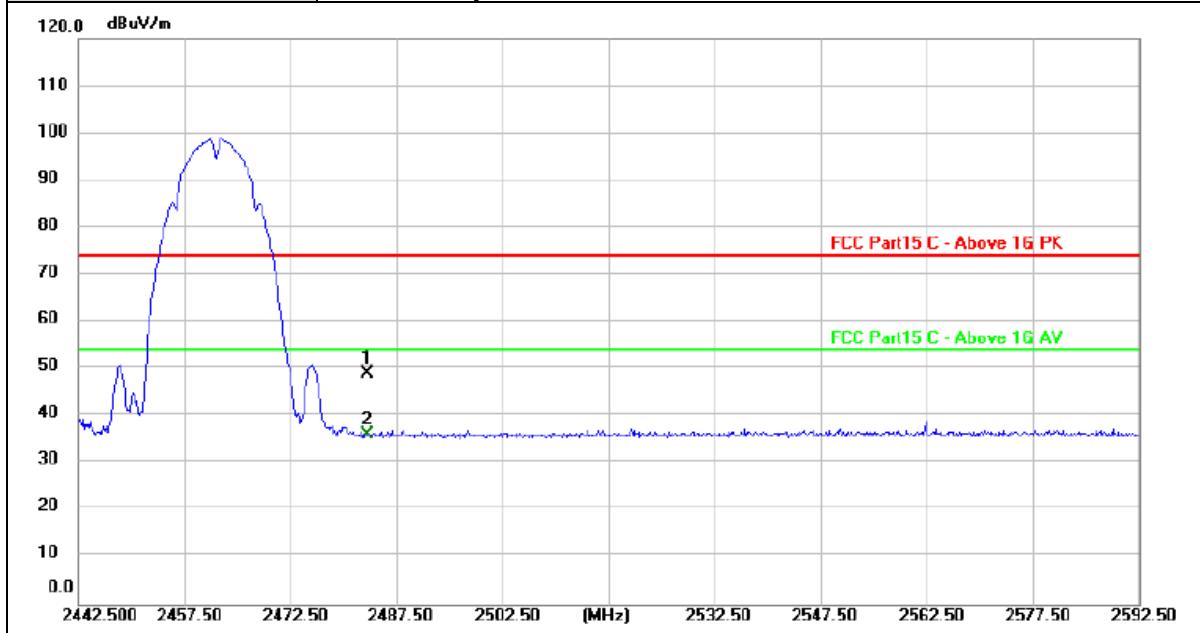

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	17.45	31.48	48.93	74.00	-25.07	peak
2 *	2483.500	4.69	31.48	36.17	54.00	-17.83	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value

Ant. No.	Ant 1																														
Ant. Pol.	Vertical																														
Test Mode:	TX 802.11b Mode 2462MHz																														
Remark:	Pre-scan Ant 1 and Ant 2, and found the Ant 1 mode which it is worse case, so only show the test data for worse case.																														
																															
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.500</td> <td>17.29</td> <td>31.48</td> <td>48.77</td> <td>74.00</td> <td>-25.23</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>2483.500</td> <td>5.16</td> <td>31.48</td> <td>36.64</td> <td>54.00</td> <td>-17.36</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	2483.500	17.29	31.48	48.77	74.00	-25.23	peak	2 *	2483.500	5.16	31.48	36.64	54.00	-17.36	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	2483.500	17.29	31.48	48.77	74.00	-25.23	peak																								
2 *	2483.500	5.16	31.48	36.64	54.00	-17.36	AVG																								
<p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor</p> <p>2. Margin value = Level -Limit value</p>																															




Ant. No.	Ant 1																															
Ant. Pol.	Horizontal																															
Test Mode:	TX 802.11g Mode 2412MHz																															
Remark:	Pre-scan Ant 1 and Ant 2, and found the Ant 1 mode which it is worse case, so only show the test data for worse case.																															
<table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1</td><td>2390.000</td><td>16.00</td><td>31.31</td><td>47.31</td><td>74.00</td><td>-26.69</td><td>peak</td></tr><tr><td>2 *</td><td>2390.000</td><td>5.56</td><td>31.31</td><td>36.87</td><td>54.00</td><td>-17.13</td><td>AVG</td></tr></tbody></table>									No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	2390.000	16.00	31.31	47.31	74.00	-26.69	peak	2 *	2390.000	5.56	31.31	36.87	54.00	-17.13	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																									
1	2390.000	16.00	31.31	47.31	74.00	-26.69	peak																									
2 *	2390.000	5.56	31.31	36.87	54.00	-17.13	AVG																									
<p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor</p> <p>2. Margin value = Level -Limit value</p>																																



Ant. No.	Ant 1																															
Ant. Pol.	Vertical																															
Test Mode:	TX 802.11g Mode 2412MHz																															
Remark:	Pre-scan Ant 1 and Ant 2, and found the Ant 1 mode which it is worse case, so only show the test data for worse case.																															
<table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1</td><td>2390.000</td><td>20.73</td><td>31.31</td><td>52.04</td><td>74.00</td><td>-21.96</td><td>peak</td></tr><tr><td>2 *</td><td>2390.000</td><td>7.71</td><td>31.31</td><td>39.02</td><td>54.00</td><td>-14.98</td><td>AVG</td></tr></tbody></table>									No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	2390.000	20.73	31.31	52.04	74.00	-21.96	peak	2 *	2390.000	7.71	31.31	39.02	54.00	-14.98	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																									
1	2390.000	20.73	31.31	52.04	74.00	-21.96	peak																									
2 *	2390.000	7.71	31.31	39.02	54.00	-14.98	AVG																									
<p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor</p> <p>2. Margin value = Level -Limit value</p>																																



Ant. No.	Ant 1
Ant. Pol.	Horizontal
Test Mode:	TX 802.11g Mode 2462MHz
Remark:	Pre-scan Ant 1 and Ant 2, and found the Ant 1 mode which it is worse case, so only show the test data for worse case.

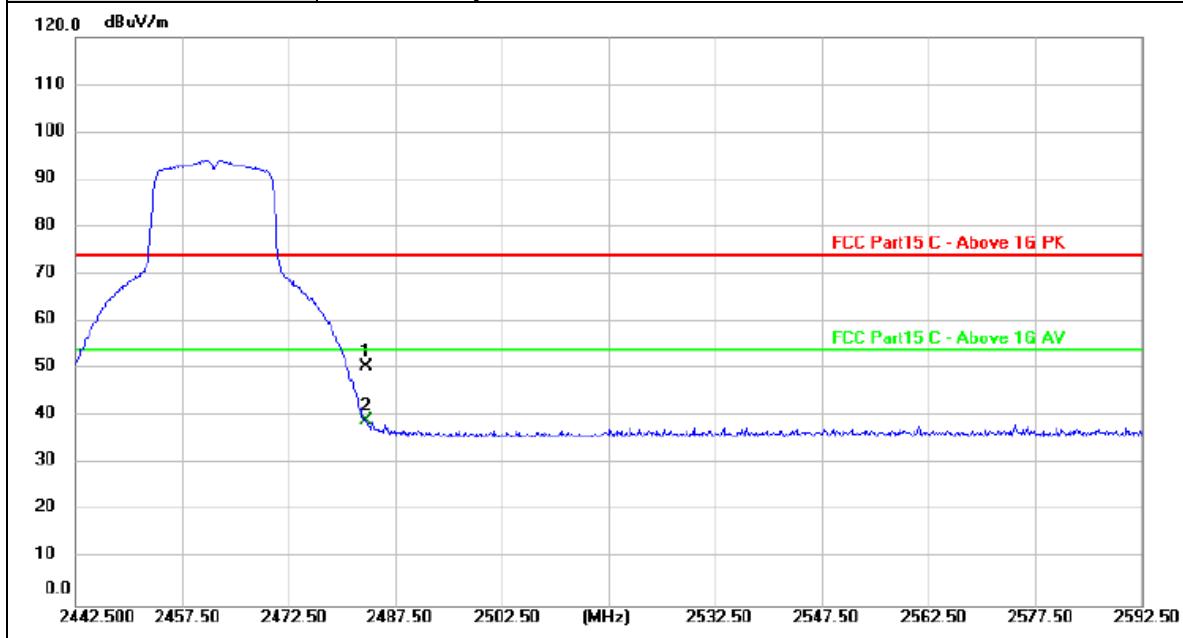

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	18.96	31.48	50.44	74.00	-23.56	peak
2 *	2483.500	7.58	31.48	39.06	54.00	-14.94	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor


2. Margin value = Level - Limit value

CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn


TRF No: CTC-TR-057_A1


For anti-fake verification, please visit the official website of China Inspection And Testing Society : www.cnca.gov.cn

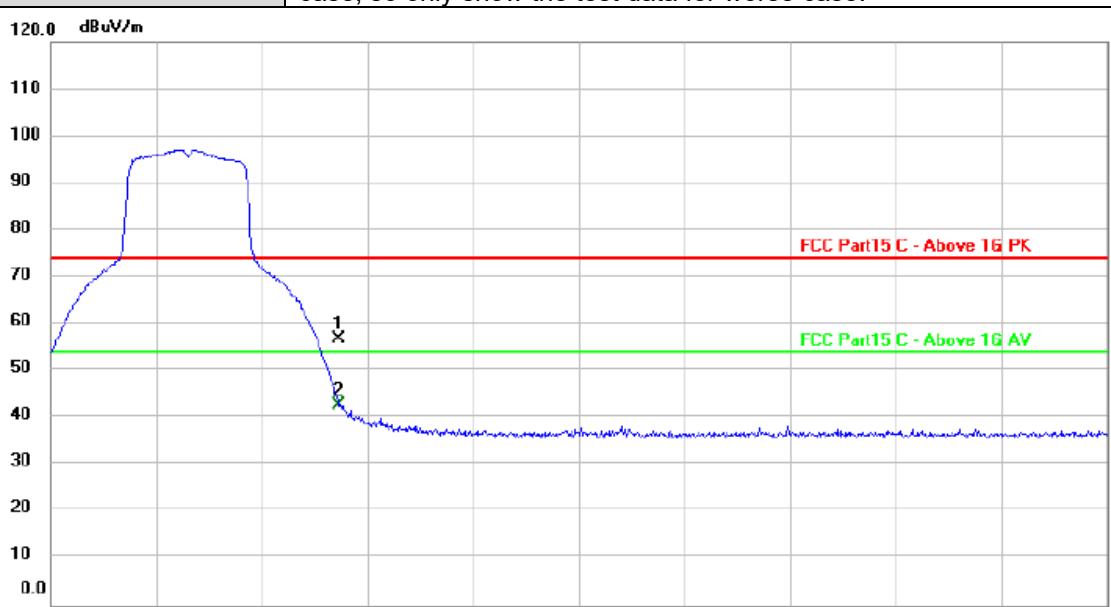
Ant. No.	Ant 1																														
Ant. Pol.	Vertical																														
Test Mode:	TX 802.11g Mode 2462MHz																														
Remark:	Pre-scan Ant 1 and Ant 2, and found the Ant 1 mode which it is worse case, so only show the test data for worse case.																														
																															
<table border="1"> <thead> <tr> <th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr> </thead> <tbody> <tr> <td>1</td><td>2483.500</td><td>25.46</td><td>31.48</td><td>56.94</td><td>74.00</td><td>-17.06</td><td>peak</td></tr> <tr> <td>2 *</td><td>2483.500</td><td>11.32</td><td>31.48</td><td>42.80</td><td>54.00</td><td>-11.20</td><td>AVG</td></tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	2483.500	25.46	31.48	56.94	74.00	-17.06	peak	2 *	2483.500	11.32	31.48	42.80	54.00	-11.20	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	2483.500	25.46	31.48	56.94	74.00	-17.06	peak																								
2 *	2483.500	11.32	31.48	42.80	54.00	-11.20	AVG																								
<p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor</p> <p>2. Margin value = Level - Limit value</p>																															




Ant. No.	MIMO																															
Ant. Pol.	Horizontal																															
Test Mode:	TX 802.11n(HT20) Mode 2412MHz																															
<table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1</td><td>2390.000</td><td>15.76</td><td>31.31</td><td>47.07</td><td>74.00</td><td>-26.93</td><td>peak</td></tr><tr><td>2 *</td><td>2390.000</td><td>5.12</td><td>31.31</td><td>36.43</td><td>54.00</td><td>-17.57</td><td>AVG</td></tr></tbody></table>									No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	2390.000	15.76	31.31	47.07	74.00	-26.93	peak	2 *	2390.000	5.12	31.31	36.43	54.00	-17.57	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																									
1	2390.000	15.76	31.31	47.07	74.00	-26.93	peak																									
2 *	2390.000	5.12	31.31	36.43	54.00	-17.57	AVG																									
<p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor</p> <p>2. Margin value = Level -Limit value</p>																																

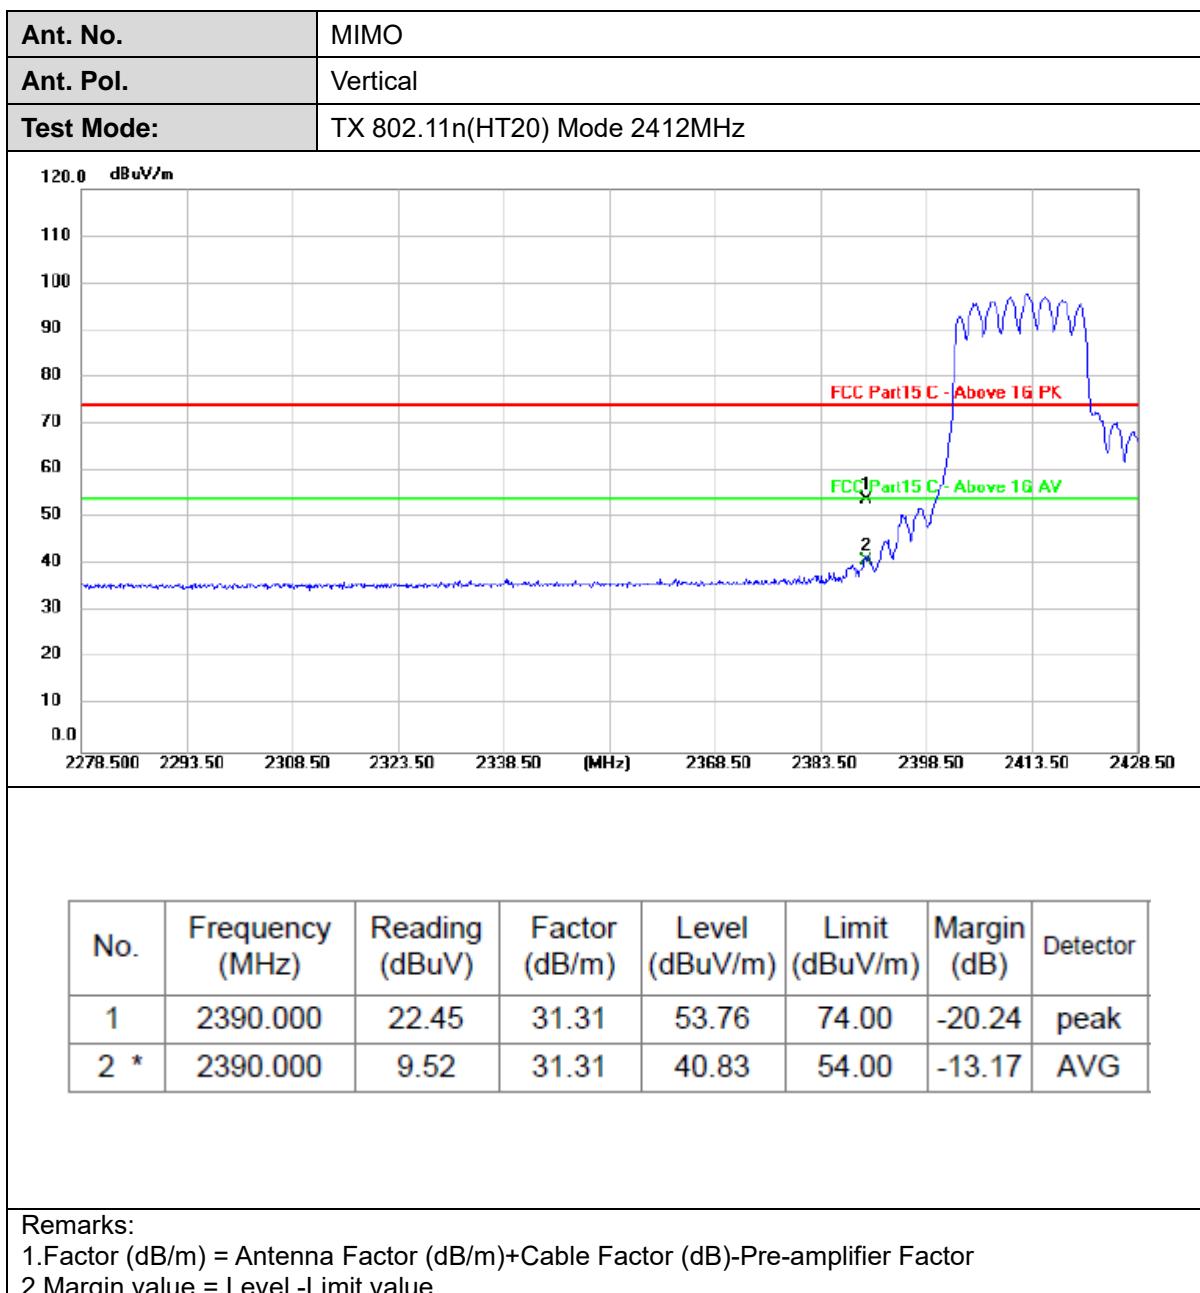

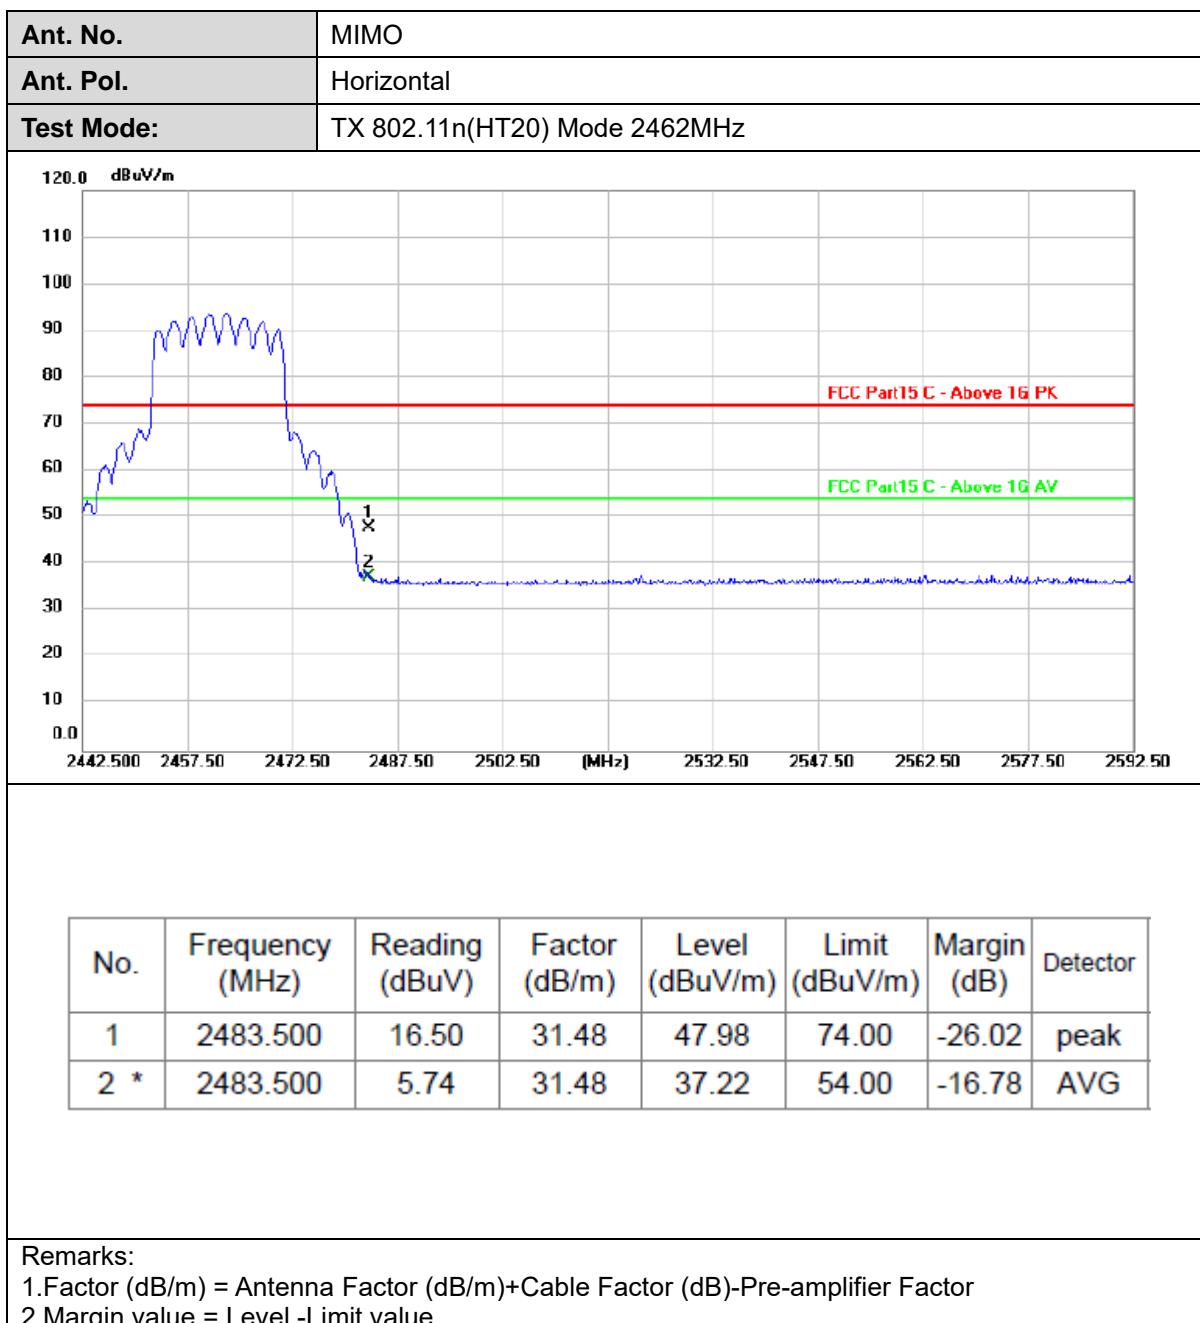


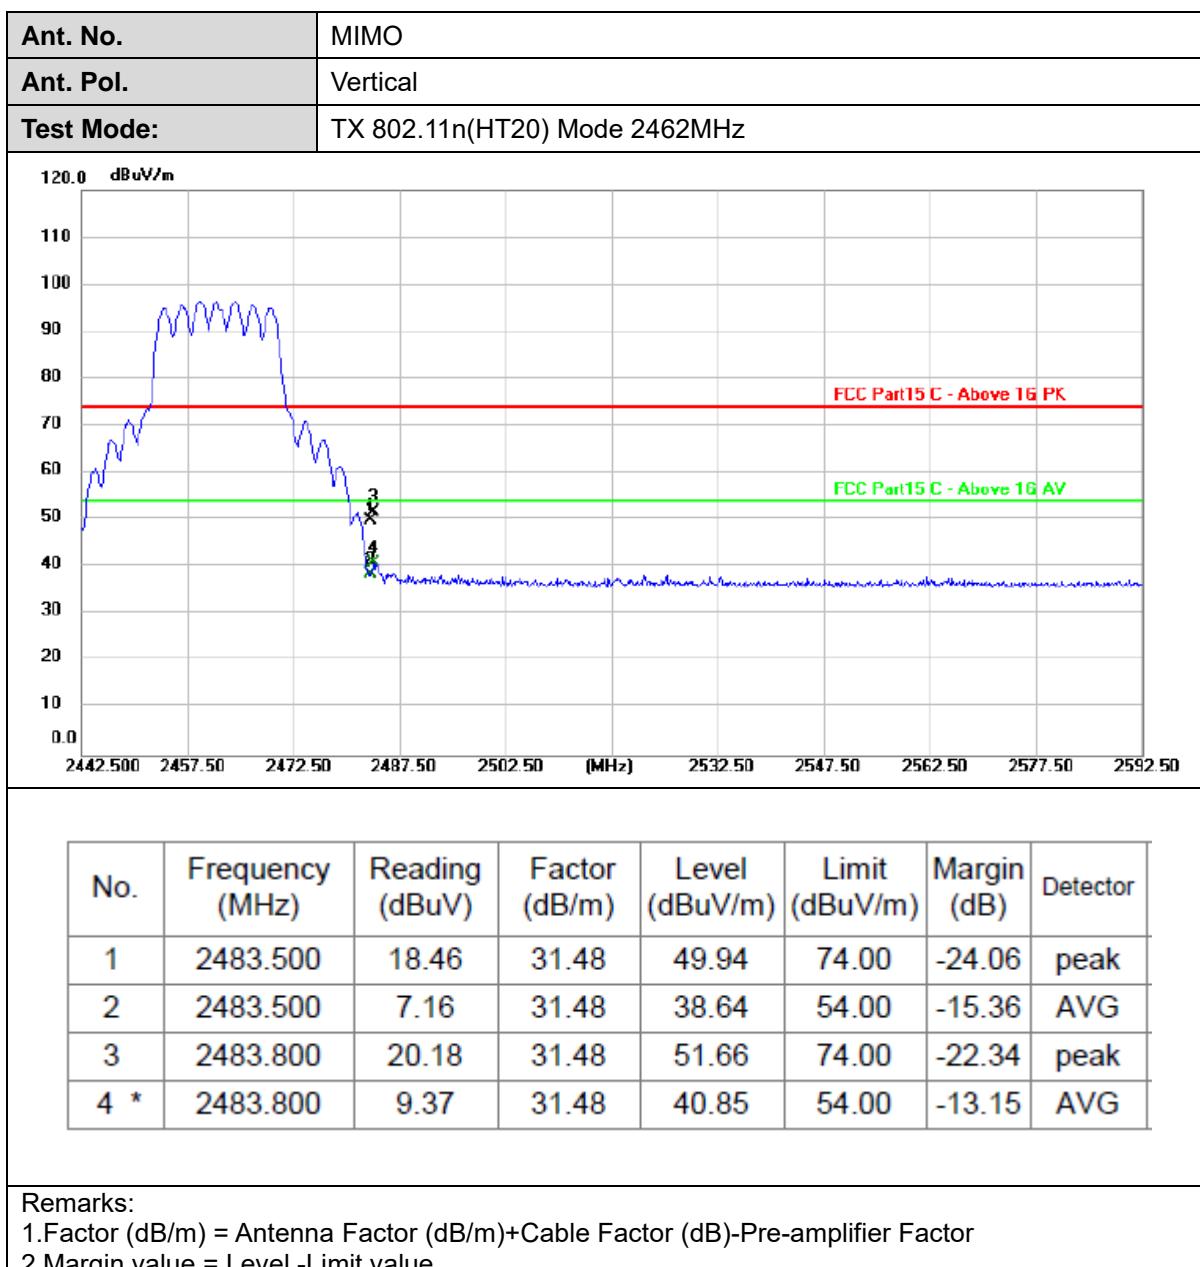


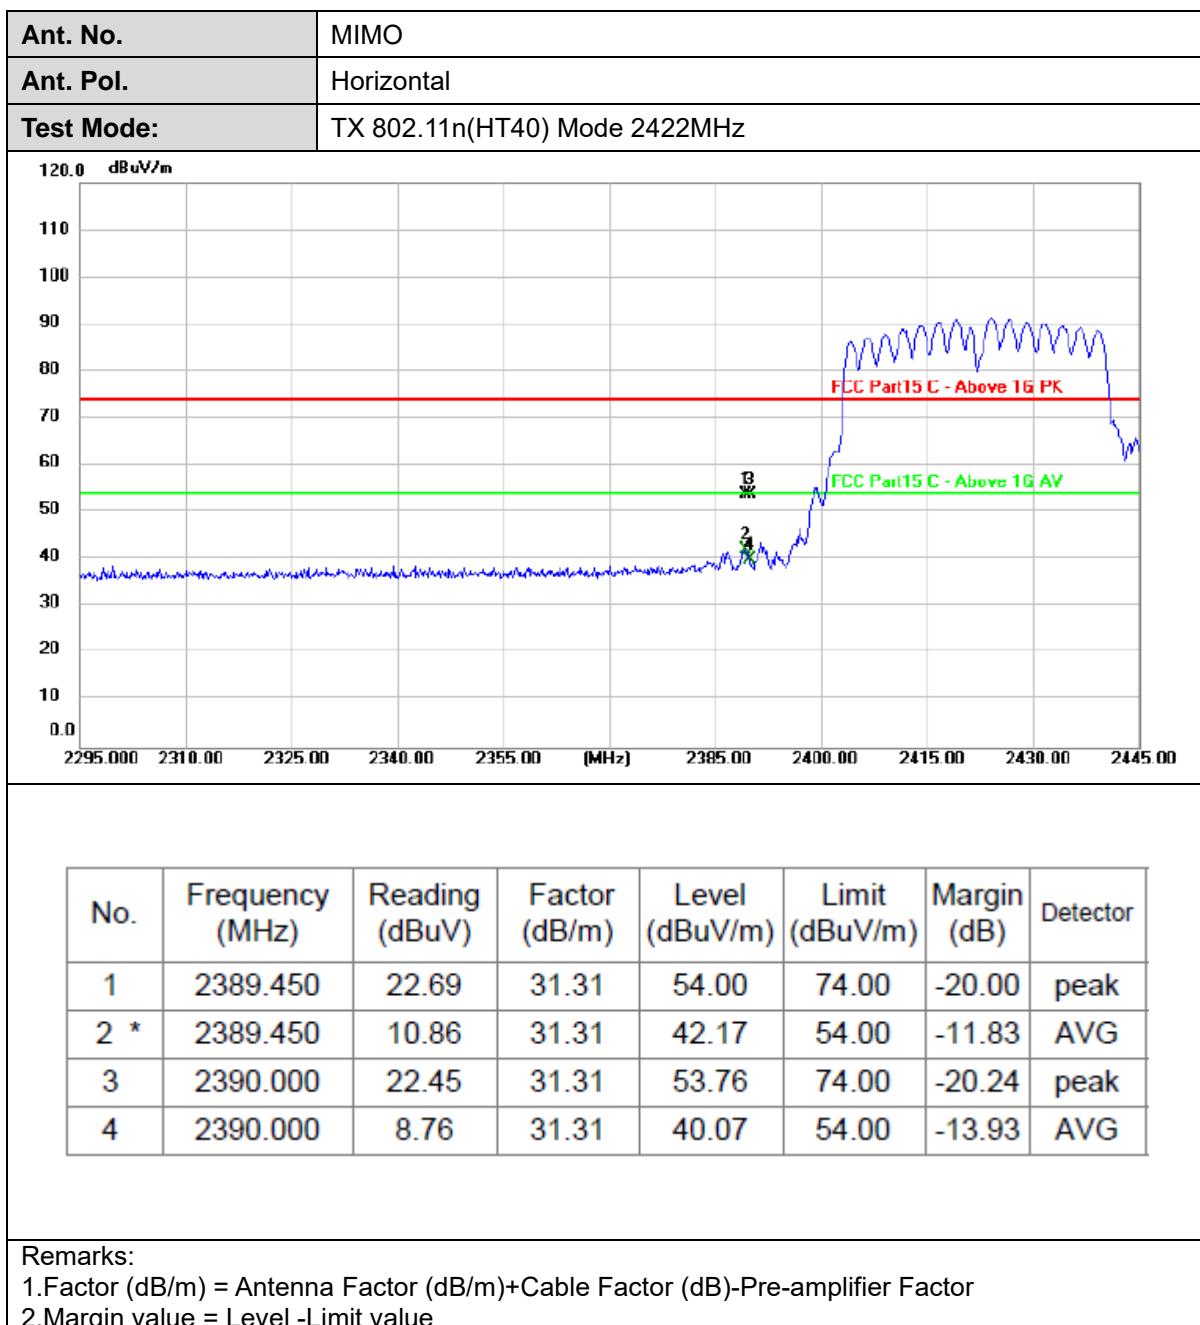





Ant. No.	MIMO																														
Ant. Pol.	Vertical																														
Test Mode:	TX 802.11n(HT40) Mode 2422MHz																														
<table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1</td><td>2390.000</td><td>24.52</td><td>31.31</td><td>55.83</td><td>74.00</td><td>-18.17</td><td>peak</td></tr><tr><td>2 *</td><td>2390.000</td><td>14.41</td><td>31.31</td><td>45.72</td><td>54.00</td><td>-8.28</td><td>AVG</td></tr></tbody></table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	2390.000	24.52	31.31	55.83	74.00	-18.17	peak	2 *	2390.000	14.41	31.31	45.72	54.00	-8.28	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	2390.000	24.52	31.31	55.83	74.00	-18.17	peak																								
2 *	2390.000	14.41	31.31	45.72	54.00	-8.28	AVG																								
<p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor</p> <p>2. Margin value = Level -Limit value</p>																															

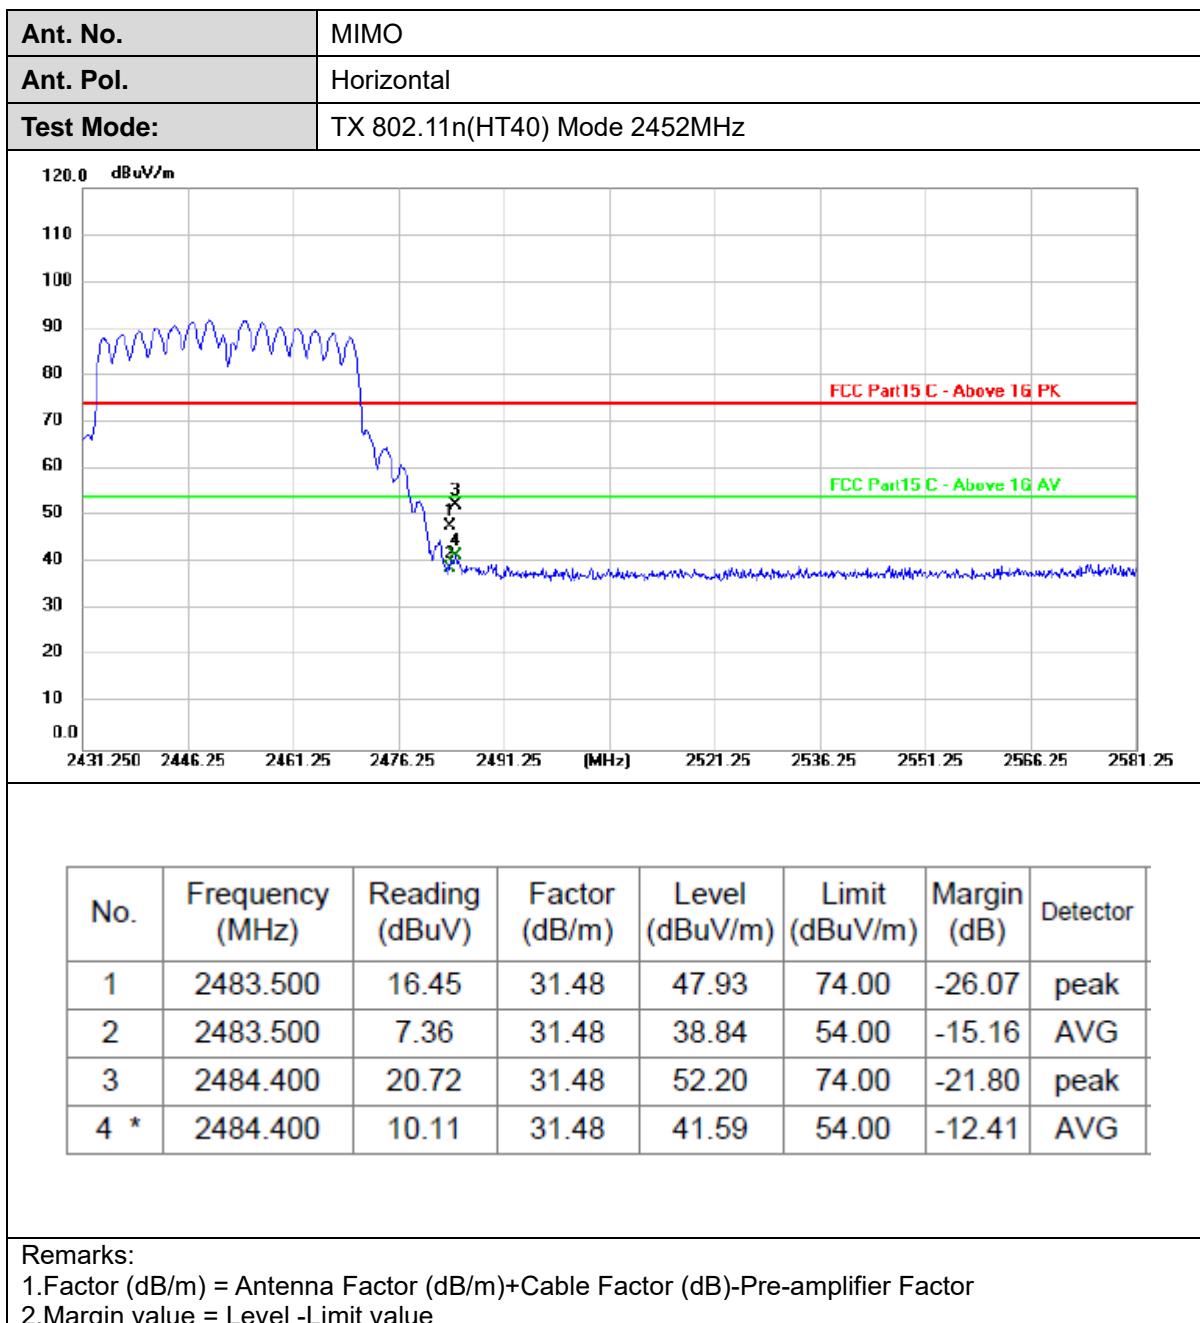

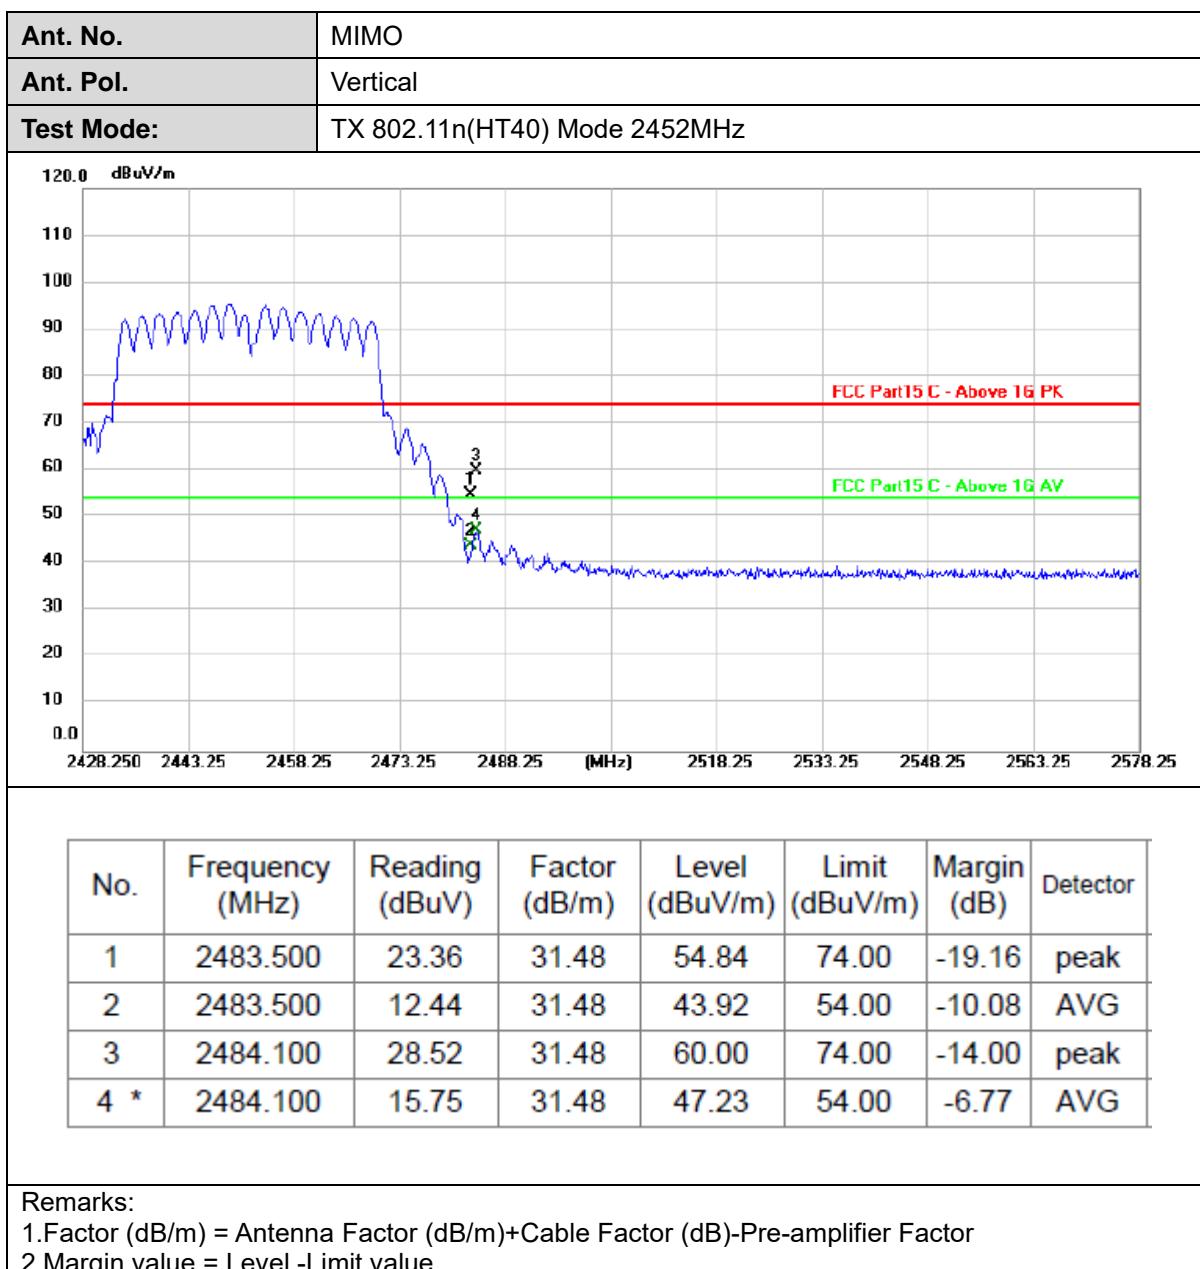

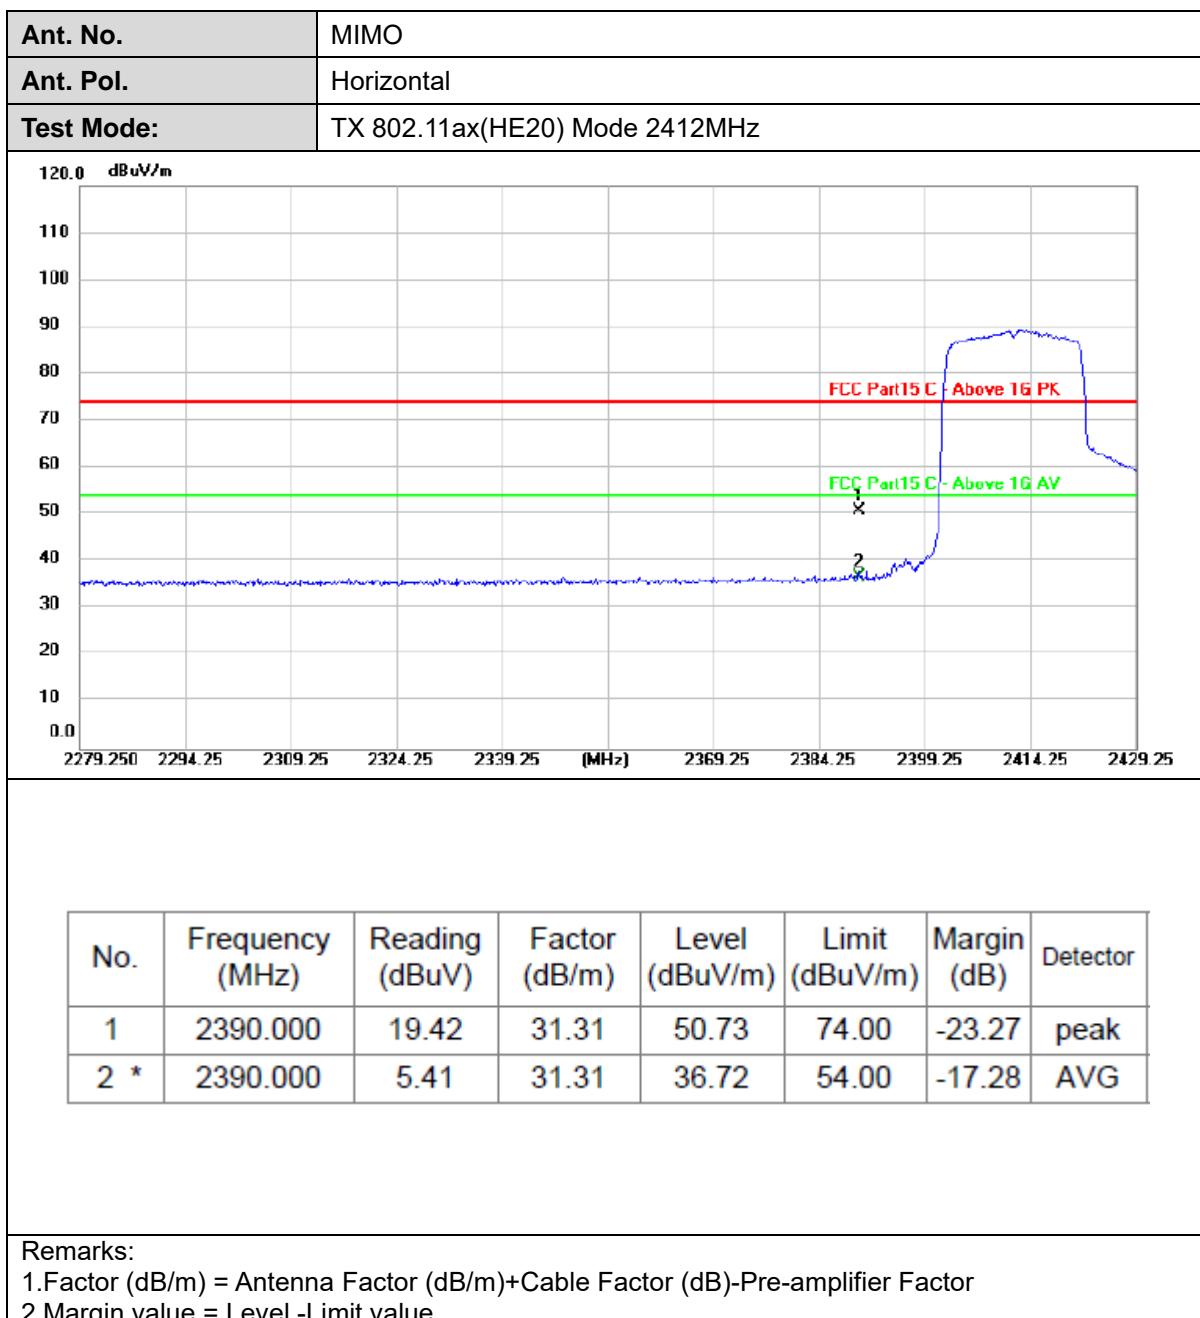

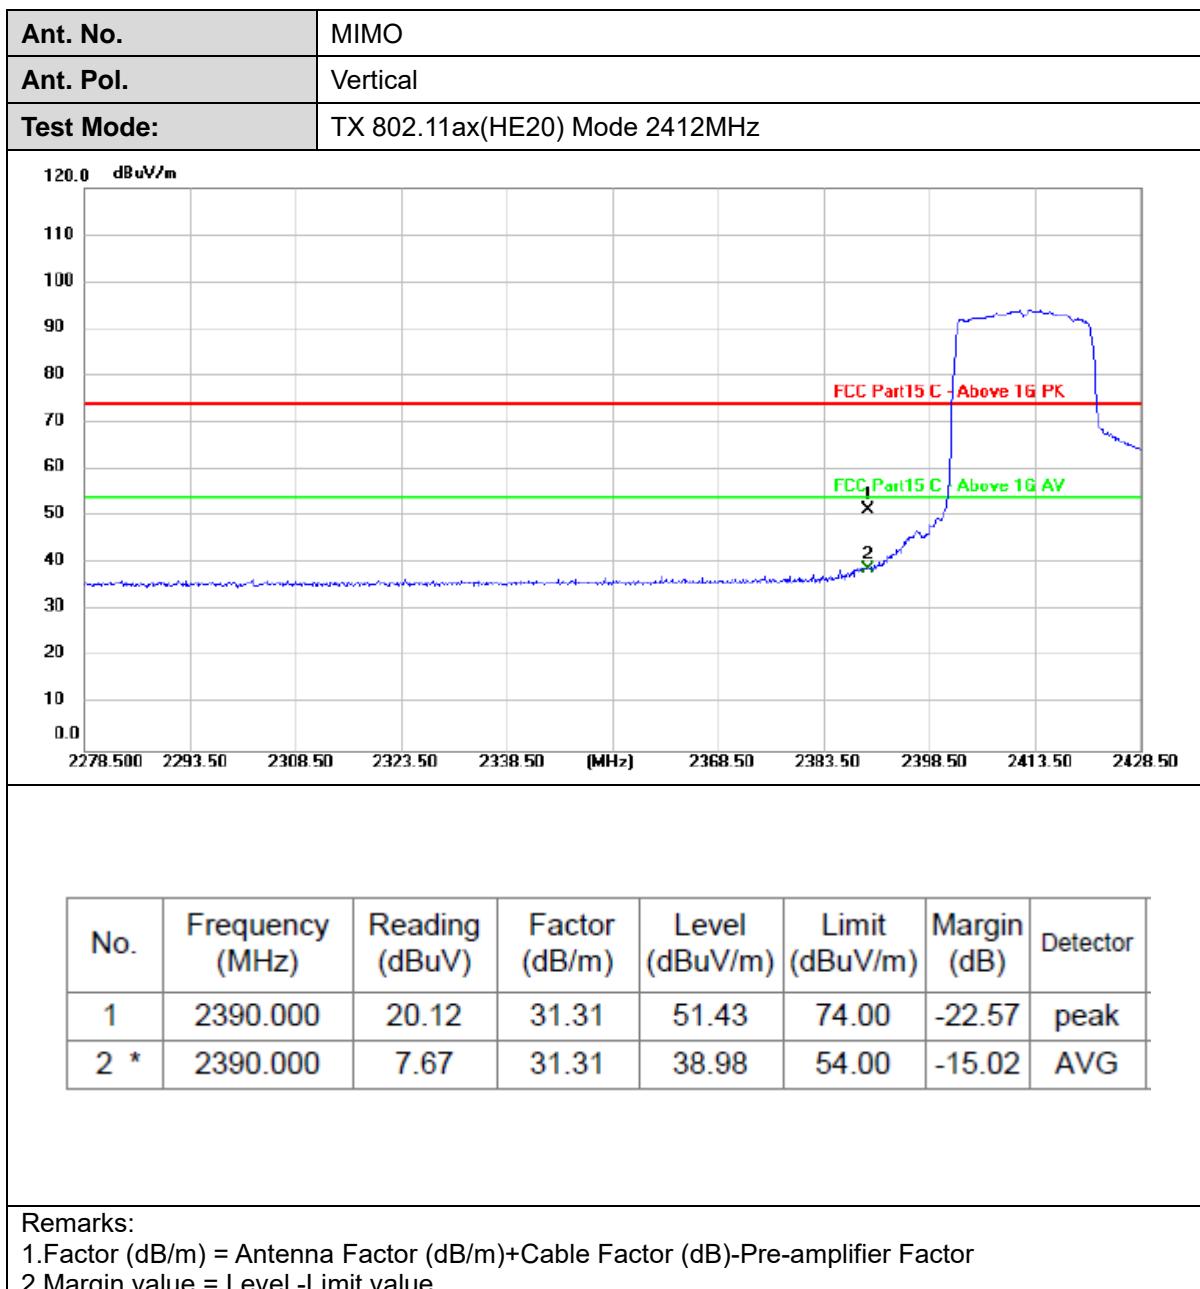



Ant. No.	MIMO																															
Ant. Pol.	Horizontal																															
Test Mode:	TX 802.11ax(HE20) Mode 2462MHz																															
<table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1</td><td>2483.500</td><td>15.92</td><td>31.48</td><td>47.40</td><td>74.00</td><td>-26.60</td><td>peak</td></tr><tr><td>2 *</td><td>2483.500</td><td>4.61</td><td>31.48</td><td>36.09</td><td>54.00</td><td>-17.91</td><td>AVG</td></tr></tbody></table>									No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	2483.500	15.92	31.48	47.40	74.00	-26.60	peak	2 *	2483.500	4.61	31.48	36.09	54.00	-17.91	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																									
1	2483.500	15.92	31.48	47.40	74.00	-26.60	peak																									
2 *	2483.500	4.61	31.48	36.09	54.00	-17.91	AVG																									
<p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor</p> <p>2. Margin value = Level - Limit value</p>																																

