

Test Report

Report No. : MTi241211001-02E2

Date of Issue : 2025-02-21

Applicant : Dongguan Youzhichong Electronics Co., Ltd

Product : YZ005


Model(s) : YZ005

FCC ID : 2BFSV-YZ005

Shenzhen Microtest Co., Ltd.

Table of contents

1	General Description	4
1.1	Description of the EUT	4
1.2	Description of test modes	5
1.3	Description of support units	6
2	Measurement uncertainty	6
3	Test facilities and accreditations.....	6
3.1	Test laboratory	6
4	List of test equipment	7
5	Test result	8
5.2	Test setup	9
5.3	Test Procedures	9
5.4	Information of test equipment.....	10
5.5	Test results.....	11
	Photographs of the Test Setup.....	19
	Photographs of the EUT	19

Test Result Certification		
Applicant	Dongguan Youzhichong Electronics Co., Ltd	
Applicant Address	Building 3, No.16 Yi'an West Road, Yantian Village, Fenggang Town, Dongguan City, China	
Manufacturer	Dongguan Youzhichong Electronics Co., Ltd	
Manufacturer Address	Room 601, No. 196, Fenggang Section, Dongshen Road, Fenggang Town, Dongguan City, Guangdong Province, China	
Factory	Dongguan Youzhichong Electronics Co., Ltd	
Factory Address	Room 601, No. 196, Fenggang Section, Dongshen Road, Fenggang Town, Dongguan City, Guangdong Province, China	
Product description		
Product name	YZ005	
Trademark	N/A	
Model name	YZ005	
Series Model(s)	N/A	
Standards	FCC CFR 47 PART 1, § 1.1310 Part 2.1093	
Test method	KDB 680106 D01 Wireless Power Transfer v04	
Testing Information		
Date of test	2024-12-18 to 2024-12-20	
Test Result	Pass	
Prepared by	Maleah Deng	
Reviewed by	David Lee	
Approved by	Leon Chen	

TEST REPORT

Report No.: MTi241211001-02E2

1 General Description

1.1 Description of the EUT

Product name:	YZ005
Model name:	YZ005
Series Model:	N/A
Model difference:	N/A
Electrical rating:	Input: AC 100V-240V 50/60Hz Input type-C1: 5V==3A 9V==3A 12V==2.5A, 30W Output Type-C1: 5V==3A 9V==3A 12V==2.5A, 30W Output Type-C2: 5V==3A Output Cable: 5V==3A 9V==3A 12V==2.5A, 30W Wireless: qi2 15W(Max) 5W, 7.5W, 10W, 15W Battery: DC 3.6V 9000mAh
Accessories:	N/A
Hardware version:	V02
Software version:	V01
Test sample(s) number:	MTi241211001-02S1001
RF specification:	
Operation frequency:	115-205kHz (5W, 7.5W, 10W); 360kHz (15W)
Modulation type:	ASK
Antenna type:	Coil Antenna

TEST REPORT

Report No.: MTi241211001-02E2

1.2 Description of test modes

All the test modes were carried out with the EUT in normal operation, the final test mode of the EUT was the worst test mode for emission test, which was shown in this report and defined as:

No.	Emission test modes
Mode1	Charging(AC IN)+Wireless Output(5W)
Mode2	Charging(AC IN)+Wireless Output(7.5W)
Mode3	Charging(AC IN)+Wireless Output(10W)
Mode4	Charging(Type-C1)+Wireless Output(5W)
Mode5	Charging(Type-C1)+Wireless Output(7.5W)
Mode6	Charging(Type-C1)+Wireless Output(10W)
Mode7	Wireless Output(5W)
Mode8	Wireless Output(7.5W)
Mode9	Wireless Output(10W)
Mode10	Wireless Output(15W)
Mode11	Stand by

TEST REPORT

Report No.: MTi241211001-02E2

1.3 Description of support units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Support equipment list			
Description	Model	Serial No.	Manufacturer
Mobile Phone	Find X3	/	oppo
Mobile Phone	IPhone 13	/	Apple
Adapter(65W)	PA65Y	2S36005203PLA9F01830	Lenovo
Support cable list			
Description	Length (m)	From	To
/	/	/	/

2 Measurement uncertainty

Parameter	Expanded Uncertainty
Magnetic field measurements(3kHz~10MHz)	$\pm 14.8\%$
Electric field measurements(3kHz~10MHz)	$\pm 17.5\%$

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3 Test facilities and accreditations

3.1 Test laboratory

Test laboratory:	Shenzhen Microtest Co., Ltd.
Test site location:	101, No. 7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Telephone:	(86-755)88850135
Fax:	(86-755)88850136
CNAS Registration No.:	CNAS L5868
FCC Registration No.:	448573

TEST REPORT

Report No.: MTI241211001-02E2

4 List of test equipment

No.	Equipment	Manufacturer	Model	Serial No.	Cal. date	Cal. Due
MTI-E143	Near-field Electric and Magnetic Field Sensor System	SPEAG	MAGPy-8H3 D+ED3	3101	2024/3/12	2027/3/11

No.	Equipment	Manufacturer	Model	Software version:	Cal. date	Cal. Due
MTI-E016S	MPE test software	SPEAG	MAGPY 2.6	2.6	/	/

TEST REPORT

Report No.: MTi241211001-02E2

5 Test result

5.1.1 Requirement

§1.1310: The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of FCC part 2.1093 of this chapter.

Table 1 to §1.1310(e)(1) - Limits for Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(i) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*(100)	≤6
3.0-30	1842/f	4.89/f	*(900/f ²)	<6
30-300	61.4	0.163	1.0	<6
300-1500			f/300	<6
1500-100000			5	<6
(ii) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	<30
1.34-30	824/f	2.19/f	*(180/f ²)	<30
30-300	27.5	0.073	0.2	<30
300-1500			f/1500	<30
1500-100000			1.0	<30

f = frequency in MHz

* = Plane-wave equivalent power density


Note 1: Occupational/controlled exposure limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure.

Note 2: General population/uncontrolled exposure limits apply in situations in which the general public may be exposed, or in which persons who are exposed as a consequence of their employment may not be fully aware of the potential for exposure or cannot exercise control over their exposure.

TEST REPORT

Report No.: MTI241211001-02E2

5.2 Test setup

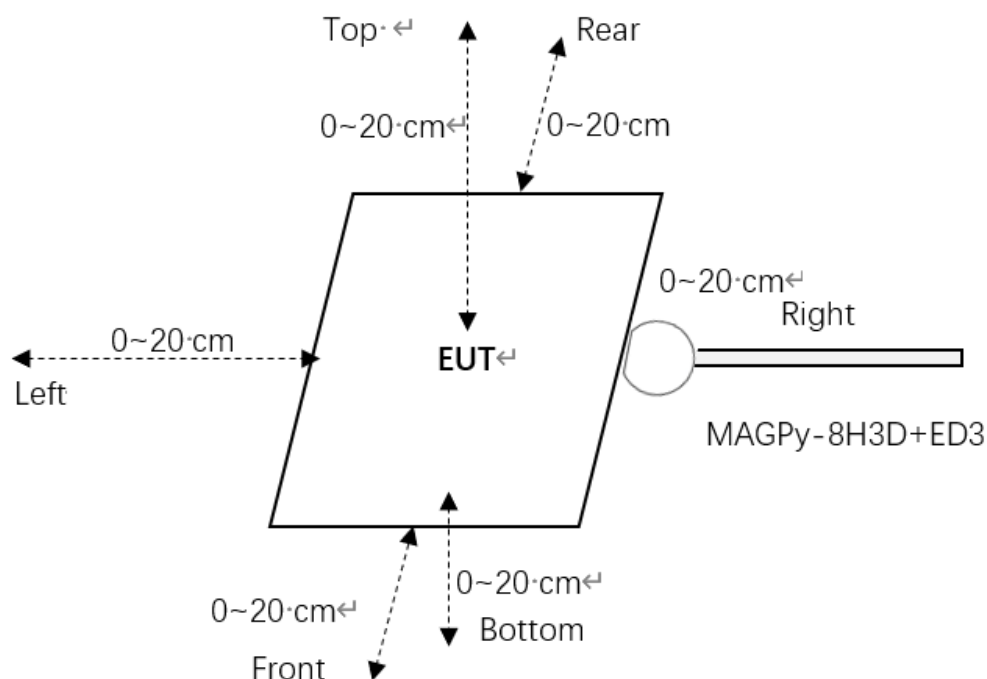

Note: tips mode of the test probe is used for 0cm measurement.


5.3 Test Procedures

a. H-field measurements should be taken 0 cm ~ 20 cm with 2 cm increments from the center of the probe.

The center of the probe to the tip surface of the probe is 18.5 mm, so the directly testing can be performed at the probe center from 2 cm to 20 cm.

To measure the 0 cm H-field, the probe tip mode is used. The total H-field at the tip-surface $H_{tip-surface}$ can be extrapolated using the total H-field measured at the top and bottom sensors, H_{top} and H_{bottom} , as well as the normalized H-field gradient G_n . The field extrapolation formula is a polynomial function of G_n ($\Delta d = 18.5$ mm)

$$H_{tip-surface} = \frac{H_{bottom} + H_{top}}{2} \sum_{i=0}^7 c_i (G_n \Delta d)^i$$

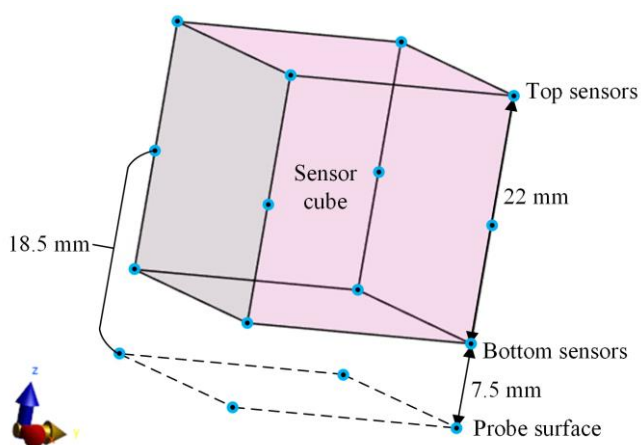

TEST REPORT

Report No.: MTi241211001-02E2

5.4 Information of test equipment

Test equipment: MAGPy-8H3D+ED3	
Diameter	60mm
8 isotropic H-field sensors	Concentric loops of 1cm ² arranged at the corner of a cube of 22mm side length
1 isotropic E-field sensor	Orthogonal dipole/monopole (arm length: 50mm)
Measurement center	18.5mm from the probe tip
Dimensions	110*635*35mm (MAGPy-8H3D+E3D V2 & MAGPy-DAS V2)
	
Test probe, without the casing	

Item	Specification
Test frequency range:	3kHz ~ 10MHz
Probe sensitivity	E-field: 0.08-2000 V/m H-field: 0.1-3200 A/m
Probe level response	E-field: ± 1 dB H-field: ± 1 dB
linearity error	E-field: ± 0.3 dB H-field: ± 0.3 dB
Isotropy	E-field: ± 0.8 dB H-field: ± 0.6 dB

TEST REPORT

Report No.: MTi241211001-02E2

5.5 Test results

All client power has been assessed (1%,50%, 99%), and the 1% battery status of client device was the worst.

Test condition 1: Mode9 operating mode with client device (1 % battery status of client device)

-estimated value: 0cm

Estimated value for H-Filed Strength at 0 cm from the edges surrounding the EUT (A/m)

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.28	1.63	63.90%
Left	0.03		
Right	0.19		
Front	0.18		
Rear	0.19		
Bottom	1.04		

Test condition 2: Mode9 operating mode with client device (1 % battery status of client device)

- Test distance: 2cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.15	1.63	54.94%
Left	0.01		
Right	0.14		
Front	0.12		
Rear	0.13		
Bottom	0.90		

TEST REPORT

Report No.: MTi241211001-02E2

Test condition 2: Mode9 operating mode with client device (1 % battery status of client device)

- Test distance: 4cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.06	1.63	39.56%
Left	0.01		
Right	0.08		
Front	0.05		
Rear	0.07		
Bottom	0.64		

Test condition 2: Mode9 operating mode with client device (1 % battery status of client device)

- Test distance: 6cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.05	1.63	23.08%
Left	0.00		
Right	0.04		
Front	0.04		
Rear	0.03		
Bottom	0.38		

Test condition 2: Mode9 operating mode with client device (1 % battery status of client device)

- Test distance: 8cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.02	1.63	11.69%
Left	0.00		
Right	0.02		
Front	0.01		
Rear	0.01		
Bottom	0.19		

TEST REPORT

Report No.: MTi241211001-02E2

Test condition 2: Mode9 operating mode with client device (1 % battery status of client device)

- Test distance: 10cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.007	1.63	6.13%
Left	0.005		
Right	0.008		
Front	0.006		
Rear	0.006		
Bottom	0.100		

Test condition 2: Mode9 operating mode with client device (1 % battery status of client device)

- Test distance: 12cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.0041	1.63	3.72%
Left	0.0036		
Right	0.0051		
Front	0.0043		
Rear	0.0041		
Bottom	0.0606		

Test condition 2: Mode9 operating mode with client device (1 % battery status of client device)

- Test distance: 14cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.0031	1.63	2.51%
Left	0.0025		
Right	0.0038		
Front	0.0026		
Rear	0.0025		
Bottom	0.0409		

TEST REPORT

Report No.: MTI241211001-02E2

Test condition 2: Mode9 operating mode with client device (1 % battery status of client device)

- Test distance: 16cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.0016	1.63	1.44%
Left	0.0014		
Right	0.0026		
Front	0.0018		
Rear	0.0019		
Bottom	0.0231		

Test condition 2: Mode9 operating mode with client device (1 % battery status of client device)

- Test distance: 18cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.0016	1.63	0.97%
Left	0.0011		
Right	0.0018		
Front	0.0016		
Rear	0.0014		
Bottom	0.0155		

Test condition 2: Mode9 operating mode with client device (1 % battery status of client device)

- Test distance: 20cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.00011	1.63	0.65%
Left	0.00021		
Right	0.00016		
Front	0.00011		
Rear	0.00013		
Bottom	0.0105		

TEST REPORT

Report No.: MTi241211001-02E2

All client power has been assessed (1%,50%, 99%), and the 1% battery status of client device was the worst.

Test condition 1: Mode10 operating mode with client device (1 % battery status of client device)

-estimated value: 0cm

Estimated value for H-Filed Strength at 0 cm from the edges surrounding the EUT (A/m)

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.70	1.63	63.98%
Left	0.21		
Right	0.43		
Front	0.17		
Rear	0.31		
Bottom	1.04		

Test condition 2: Mode10 operating mode with client device (1 % battery status of client device)

- Test distance: 2cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.51	1.63	54.60%
Left	0.18		
Right	0.33		
Front	0.22		
Rear	0.25		
Bottom	0.89		

TEST REPORT

Report No.: MTi241211001-02E2

Test condition 2: Mode10 operating mode with client device (1 % battery status of client device)

- Test distance: 4cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.33	1.63	32.52%
Left	0.12		
Right	0.31		
Front	0.15		
Rear	0.12		
Bottom	0.53		

Test condition 2: Mode10 operating mode with client device (1 % battery status of client device)

- Test distance: 6cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.11	1.63	19.02%
Left	0.06		
Right	0.15		
Front	0.02		
Rear	0.01		
Bottom	0.31		

Test condition 2: Mode10 operating mode with client device (1 % battery status of client device)

- Test distance: 8cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.15	1.63	10.43%
Left	0.05		
Right	0.08		
Front	0.09		
Rear	0.07		
Bottom	0.17		

TEST REPORT

Report No.: MTi241211001-02E2

Test condition 2: Mode10 operating mode with client device (1 % battery status of client device)

- Test distance: 10cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.01	1.63	5.52%
Left	0.04		
Right	0.03		
Front	0.07		
Rear	0.06		
Bottom	0.09		

Test condition 2: Mode10 operating mode with client device (1 % battery status of client device)

- Test distance: 12cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.053	1.63	5.23%
Left	0.038		
Right	0.028		
Front	0.066		
Rear	0.057		
Bottom	0.066		

Test condition 2: Mode10 operating mode with client device (1 % battery status of client device)

- Test distance: 14cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.0253	1.63	2.64%
Left	0.0025		
Right	0.0184		
Front	0.0043		
Rear	0.0037		
Bottom	0.0430		

TEST REPORT

Report No.: MTi241211001-02E2

Test condition 2: Mode10 operating mode with client device (1 % battery status of client device)

- Test distance: 16cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.0158	1.63	1.71%
Left	0.0016		
Right	0.0119		
Front	0.0028		
Rear	0.0024		
Bottom	0.0279		

Test condition 2: Mode10 operating mode with client device (1 % battery status of client device)

- Test distance: 18cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.0062	1.63	1.11%
Left	0.0013		
Right	0.0067		
Front	0.0028		
Rear	0.0026		
Bottom	0.0181		

Test condition 2: Mode10 operating mode with client device (1 % battery status of client device)

- Test distance: 20cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.0197	1.63	0.98%
Left	0.0008		
Right	0.0065		
Front	0.0015		
Rear	0.0014		
Bottom	0.0159		

TEST REPORT

Report No.: MTI241211001-02E2

Photographs of the Test Setup

See the Appendix - Test Setup Photos.

Photographs of the EUT

See the Appendix - EUT Photos.

TEST REPORT

Report No.: MTI241211001-02E2

Statement

1. This report is invalid without the seal and signature of the laboratory.
2. The test results of this report are only responsible for the samples submitted. Client shall be responsible for representativeness of the sample and authenticity of the material.
3. The report shall not be partially reproduced without the written consent of the Laboratory.
4. This report is invalid if transferred, altered or tampered with in any form without authorization.
5. The observations or tests with special mark fall outside the scope of accreditation, and are only used for purpose of commission, research, training, internal quality control etc.
6. Any objection to this report shall be submitted to the laboratory within 15 days from the date of receipt of the report.

***** END OF REPORT *****