



TEST REPORT

Product Name: Bluetooth Speaker
FCC ID: 2BFX2-QD03
Trademark: N/A
Model Number: QD03, QD05, QD06, QD07, QD09, QD11
Prepared For: Shenzhen Dian Wu Technology Co., LTD.
Address: 305, Building 3, No. 56, Nanting Road, Ya Bian Community, Shajing Street, Bao'an District, Shenzhen, China.
Manufacturer: Shenzhen Dian Wu Technology Co., LTD.
Address: 305, Building 3, No. 56, Nanting Road, Ya Bian Community, Shajing Street, Bao'an District, Shenzhen, China.
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: Apr. 01, 2024
Sample tested Date: Apr. 01, 2024 to Apr. 09, 2024
Issue Date: Apr. 09, 2024
Report No.: CTB240409029RFX
Test Standards: FCC Part15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is Bluetooth radio test report.

Compiled by:

Reviewed by:

Approved by:

Zhou kui

Arron Liu



Zhou Kui

Arron Liu

Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	4
2. TEST SUMMARY	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP	7
4.1 Product Information	7
4.2 Test Setup Configuration	7
4.3 Support Equipment	7
4.4 Channel List	8
4.5 Test Mode	8
4.6 Test Environment	8
5. TEST FACILITY AND TEST INSTRUMENT USED	9
5.1 Test Facility	9
5.2 Test Instrument Used	9
6. AC POWER LINE CONDUCTED EMISSION	11
6.1 Block Diagram Of Test Setup	11
6.2 Limit	11
6.3 Test procedure	11
6.4 Test Result	13
7. RADIATED SPURIOUS EMISSION	17
7.1 Block Diagram Of Test Setup	17
7.2 Limit	17
7.3 Test procedure	18
7.4 Test Result	19
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	37
8.1 Block Diagram Of Test Setup	37
8.2 Limit	37
8.3 Test procedure	37
8.4 Test Result	38
9. CONDUCTED PEAK OUTPUT POWER	52
9.1 Block Diagram Of Test Setup	52
9.2 Limit	52
9.3 Test procedure	52
9.4 Test Result	53
10. 20DB OCCUPIED BANDWIDTH	60
10.1 Block Diagram Of Test Setup	60
10.2 Limit	60
10.3 Test procedure	60
10.4 Test Result	61
11. CARRIER FREQUENCIES SEPARATION	68
11.1 Block Diagram Of Test Setup	68
11.2 Limit	68
11.3 Test procedure	68
11.4 Test Result	69
12. HOPPING CHANNEL NUMBER	76
12.1 Block Diagram Of Test Setup	76
12.2 Limit	76
12.3 Test procedure	76
12.4 Test Result	76

13.	DWELL TIME	79
13.1	Block Diagram Of Test Setup	79
13.2	Limit	79
13.3	Test procedure	79
13.4	Test Result	80
14.	PSEUDORANDOM FREQUENCY	87
14.1	Limit	87
14.2	Test procedure	87
14.3	Test Result	88
15.	ANTENNA REQUIREMENT	89
16.	EUT TEST SETUP PHOTOGRAPHS	90

(Note: N/A means not applicable)



1. VERSION

Report No.	Issue Date	Description	Approved
CTB240409029RFX	Apr. 09, 2024	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(1)	ANSI C63.10-2013	PASS
20dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Carrier Frequencies Separation	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Hopping Channel Number	47 CFR Part 15 Subpart C Section 15.247 (b)	ANSI C63.10-2013	PASS
Dwell Time	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15 Subpart C Section 15.247(a)&TCB Exclusion List (7 July 2002)	ANSI C63.10-2013	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1093	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	54.3kHz
Conducted output power Above 1G	0.9dB
Conducted output power below 1G	0.9dB
Power Spectral Density , Conduction	0.9dB
Conduction spurious emissions	2.0dB
Out of band emission	2.0dB
3m chamber Radiated spurious emission(9KHz-30MHz)	4.8dB
3m chamber Radiated spurious emission(30MHz-1GHz)	4.6dB
3m chamber Radiated spurious emission(1GHz-18GHz)	5.1dB
3m chamber Radiated spurious emission(18GHz-40GHz)	3.4dB
humidity uncertainty	5.5%
Temperature uncertainty	0.63°C
frequency	1×10 ⁻⁷
Conducted Emission (150KHz-30MHz)	3.2 dB
Radiated Emission(30MHz ~ 1000MHz)	4.8 dB
Radiated Emission(1GHz ~6GHz)	4.9 dB

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	QD03, QD05, QD06, QD07, QD09, QD11
Model Description:	All the model are the same circuit and RF module, only different for model name. Test sample model: QD03
Bluetooth Version:	Bluetooth 5.2
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	Bluetooth: 2402-2480MHz
Max. RF output power:	Module1:3.039dBm Module2:3.022dBm
Type of Modulation:	Bluetooth: GFSK, $\pi/4$ DQPSK, 8DPSK
Antenna installation:	Bluetooth: PCB antenna
Antenna Gain:	Bluetooth: -0.58dBi
Ratings:	Input: DC 5V $\pm$ 1A Battery: 3.7V, 1500mAh

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	Adapter	JIYIN	JY-05100C	/	/

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	79	/

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting (GFSK, $\pi/4$ DQPSK, 8DPSK)	2402MHz	2441MHz	2480MHz
Receiving (GFSK, $\pi/4$ DQPSK, 8DPSK)	2402MHz	2441MHz	2480MHz

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(AC):	120V
Normal Temperature($^{\circ}$ C)	23
Low Temperature($^{\circ}$ C)	0
High Temperature($^{\circ}$ C)	40

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinghe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

No.	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	A.14.16	2024.07.05
2	Power Sensor	Agilent	U2021XA	MY56120032	/	2024.07.05
3	Power Sensor	Agilent	U2021XA	MY56120034	/	2024.07.05
4	Communication test set	R&S	CMW500	108058	V3.5.80	2024.07.05
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2024.07.05
6	Signal Generator	Agilent	N5181A	MY50140365	A.01.60	2024.07.05
7	Vector signal generator	Agilent	N5182A	MY47420195	A.01.87	2024.07.05
8	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2024.07.06
9	2.4 GHz Filter	Shenxiang	MSF2400-24 83.5MS-1154	20181015001	/	2024.07.05
10	5 GHz Filter	Shenxiang	MSF5150-58 50MS-1155	20181015001	/	2024.07.06
11	Filter	Xingbo	XBLBQ-DZA 120	190821-1-1	/	2024.07.06
12	BT&WI-FI Automatic test software	Microwave	MTS8000	Ver. 2.0.0.0	/	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	/	2024.10.30
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	/	2024.07.05
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/	/
16	966 chamber	C.R.T.	966	/	/	2024.08.11
17	Receiver	R&S	ESPI	100362	RF_ATTEN_7 (104489/003)	2024.07.05
18	Amplifier	HP	8447E	2945A02747	/	2024.07.05
19	Amplifier	Agilent	8449B	3008A01838	/	2024.07.05
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2024.07.08

21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	/	2024.07.08
22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2024.07.08
24	loop antenna	ZHINAN	ZN30900A	GTS534	/	/
25	40G Horn antenna	A/H/System	SAS-574	588	/	2024.10.30
26	Amplifier	AEROFLEX	Aeroflex	097	/	2024.07.05

Continuous disturbance


No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware Version	Calibrated until
1	LISN	ROHDE&SCHWARZ	ESH3-Z5	100318	/	2024.07.05
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	/	2024.07.05
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	V4.42.SP3	2024.07.05
4	Coaxial cable	ZDECL	Z302S-NJ-SM AJ-12M	18091905	/	2024.07.05
5	ISN	Schwarzbeck	NTFM8158	183	/	2024.07.05
6	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2024.07.05
7	Communication test set	R&S	CMW500	108058	V3.5.80	2024.07.05
8	EZ-EMC	Frad	EMC-con3A1.1	/	/	/

Radiated emission

No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware Version	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	/	2024.07.08
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2024.07.08
3	Amplifier	Agilent	8449B	3008A01838	/	2024.07.05
4	Amplifier	HP	8447E	2945A02747	/	2024.07.05
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	V4.42.SP3	2024.07.05
6	Coaxial cable	ETS	RFC-SNS-100-N MS-80 NI	/	/	2024.07.05
7	Coaxial cable	ETS	RFC-SNS-100-N MS-20 NI	/	/	2024.07.05
8	Coaxial cable	ETS	RFC-SNS-100-S MS-20 NI	/	/	2024.07.05
9	Coaxial cable	ETS	RFC-NNS-100- NMS-300 NI	/	/	2024.07.05
10	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2024.07.05
11	Communication test set	R&S	CMW500	108058	V3.5.80	2024.07.05
12	EZ-EMC	Frad	EMC-con3A1.1	/	/	/

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

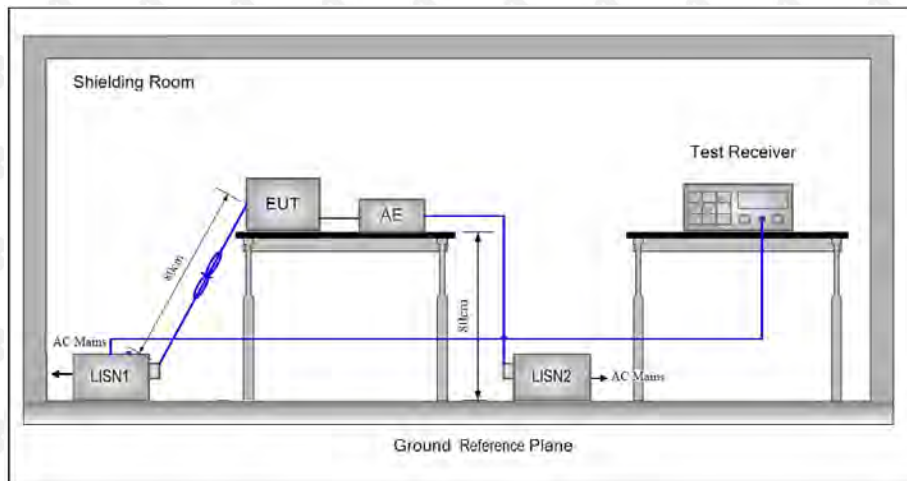

6.2 Limit

Table 4 – AC power-line conducted emissions limits

Frequency (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane.


This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.
- 6) All modes were tested at AC 120V and 240V, only the worst result of AC 120V 60Hz was reported.
- 7) If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.

6.4 Test Result

Module1:

L: Worst case-GFSK(low channel)

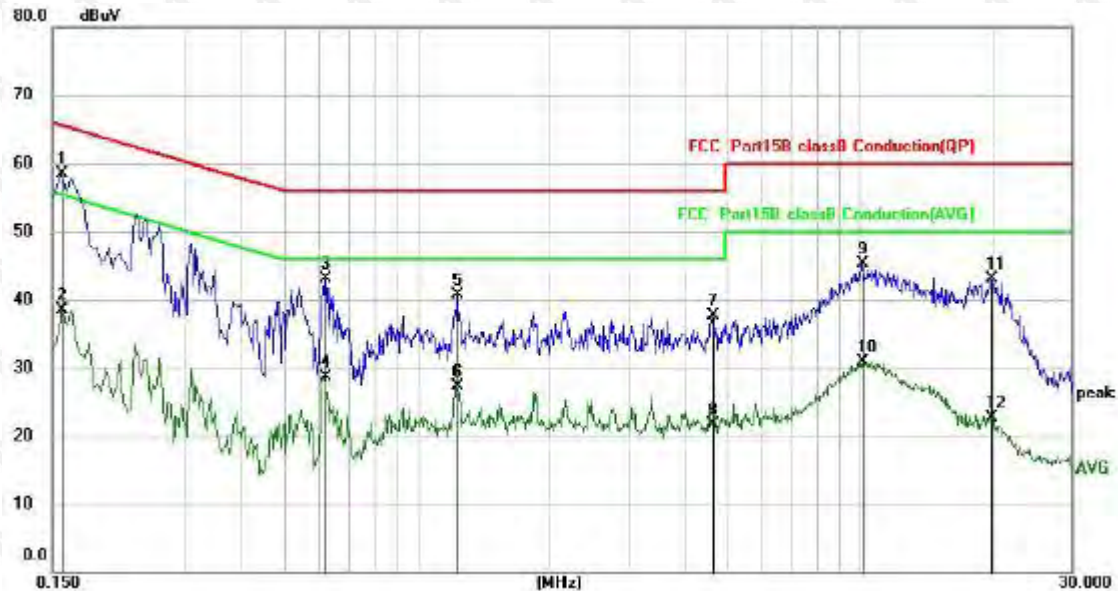


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1580	48.52	9.95	58.47	65.57	-7.10	QP
2		0.1580	28.60	9.95	38.55	55.57	-17.02	AVG
3		0.6180	33.16	10.01	43.17	56.00	-12.83	QP
4		0.6180	18.61	10.01	28.62	46.00	-17.38	AVG
5		1.2340	30.60	10.03	40.63	56.00	-15.37	QP
6		1.2340	17.23	10.03	27.26	46.00	-18.74	AVG
7		4.6460	27.36	10.35	37.71	56.00	-18.29	QP
8		4.6460	11.38	10.35	21.73	46.00	-24.27	AVG
9		10.1020	34.65	10.58	45.23	60.00	-14.77	QP
10		10.1020	20.26	10.58	30.84	50.00	-19.16	AVG
11		19.7620	32.28	10.82	43.10	60.00	-16.90	QP
12		19.7620	11.79	10.82	22.61	50.00	-27.39	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

N: Worst case-GFSK(low channel)

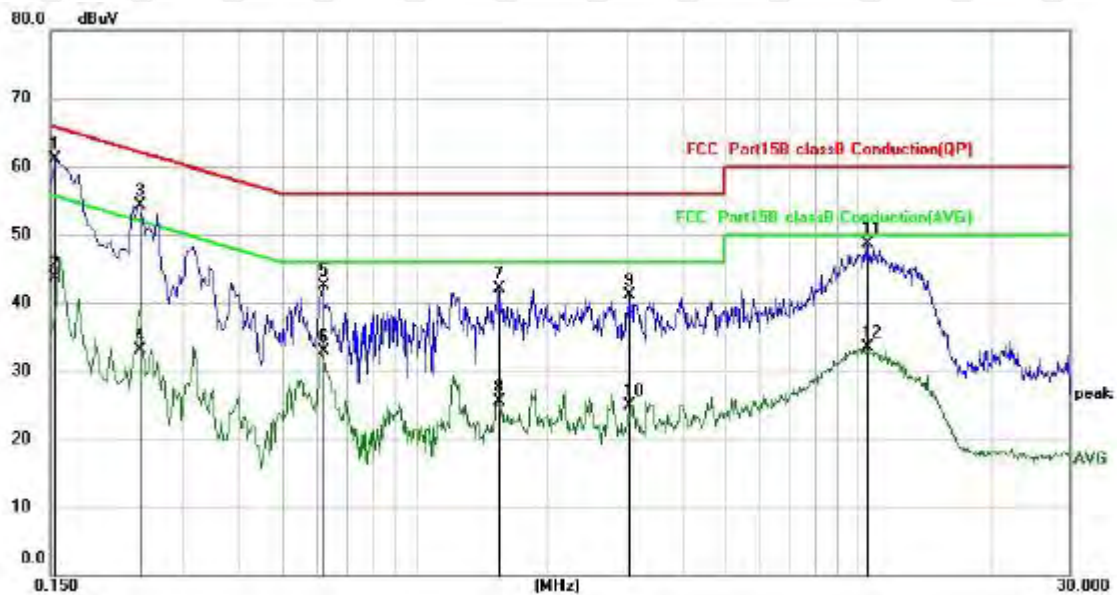


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1539	51.19	9.95	61.14	65.79	-4.65	QP
2		0.1539	33.72	9.95	43.67	55.79	-12.12	AVG
3		0.2380	44.45	9.95	54.40	62.17	-7.77	QP
4		0.2380	23.15	9.95	33.10	52.17	-19.07	AVG
5		0.6180	32.49	10.01	42.50	56.00	-13.50	QP
6		0.6180	22.91	10.01	32.92	46.00	-13.08	AVG
7		1.5420	32.06	10.05	42.11	56.00	-13.89	QP
8		1.5420	15.40	10.05	25.45	46.00	-20.55	AVG
9		3.0460	30.97	10.19	41.16	56.00	-14.84	QP
10		3.0460	14.64	10.19	24.83	46.00	-21.17	AVG
11		10.4660	38.05	10.59	48.64	60.00	-11.36	QP
12		10.4660	22.90	10.59	33.49	50.00	-16.51	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Module2:

L: Worst case-GFSK(low channel)

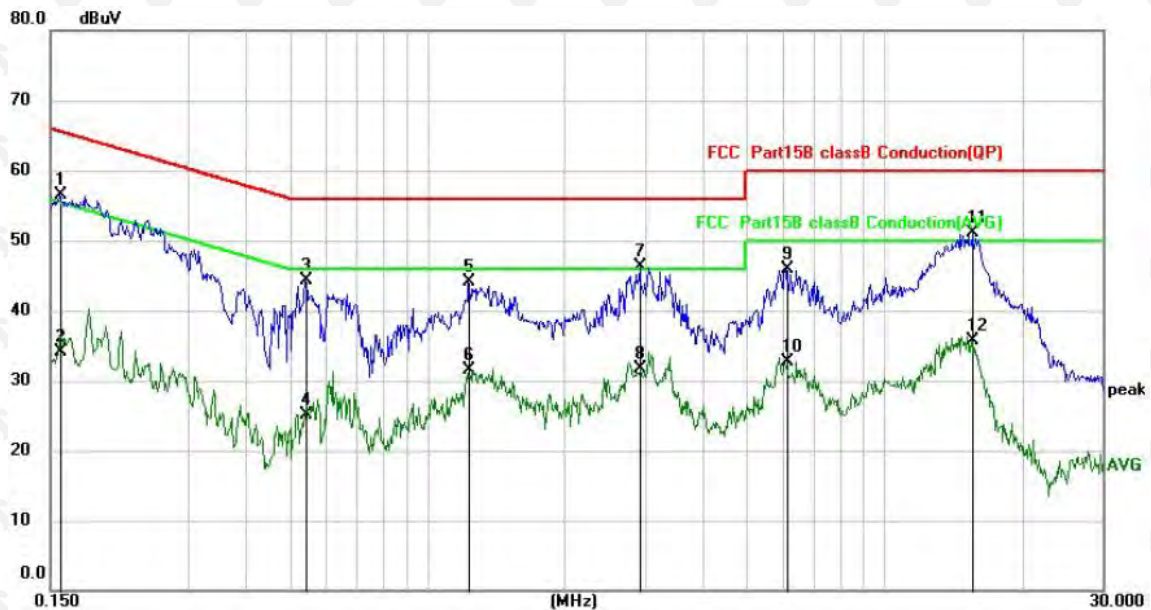


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	dBuV	Factor	ment	dBuV	dB	Detector
1		0.1580	46.52	9.95	56.47	65.57	-9.10	QP
2		0.1580	24.13	9.95	34.08	55.57	-21.49	AVG
3		0.5420	34.36	10.00	44.36	56.00	-11.64	QP
4		0.5420	15.06	10.00	25.06	46.00	-20.94	AVG
5		1.2338	34.10	10.03	44.13	56.00	-11.87	QP
6		1.2338	21.51	10.03	31.54	46.00	-14.46	AVG
7		2.9300	36.05	10.18	46.23	56.00	-9.77	QP
8		2.9300	21.45	10.18	31.63	46.00	-14.37	AVG
9		6.1139	35.39	10.46	45.85	60.00	-14.15	QP
10		6.1139	22.33	10.46	32.79	50.00	-17.21	AVG
11	*	15.5539	40.34	10.74	51.08	60.00	-8.92	QP
12		15.5539	24.99	10.74	35.73	50.00	-14.27	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

N: Worst case-GFSK(low channel)

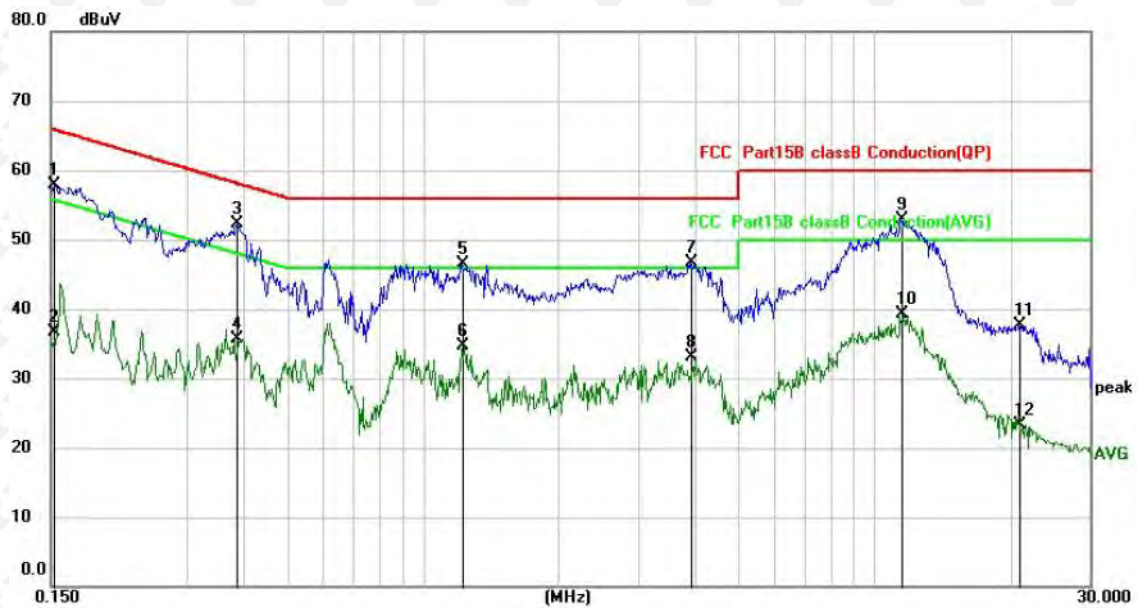

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1524	47.93	9.95	57.88	65.87	-7.99	QP
2		0.1524	26.70	9.95	36.65	55.87	-19.22	AVG
3	*	0.3870	42.25	9.97	52.22	58.13	-5.91	QP
4		0.3870	25.74	9.97	35.71	48.13	-12.42	AVG
5		1.2219	36.45	10.03	46.48	56.00	-9.52	QP
6		1.2219	24.60	10.03	34.63	46.00	-11.37	AVG
7		3.9140	36.34	10.27	46.61	56.00	-9.39	QP
8		3.9140	22.90	10.27	33.17	46.00	-12.83	AVG
9		11.4618	42.38	10.62	53.00	60.00	-7.00	QP
10		11.4618	28.74	10.62	39.36	50.00	-10.64	AVG
11		20.9059	26.92	10.85	37.77	60.00	-22.23	QP
12		20.9059	12.52	10.85	23.37	50.00	-26.63	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

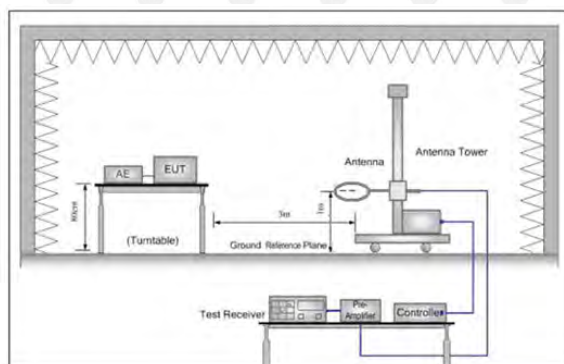


Figure 1. Below 30MHz

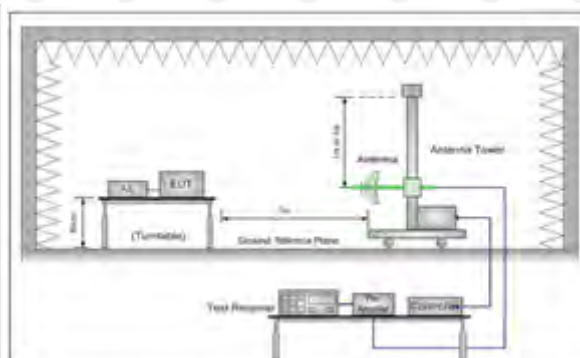


Figure 2. 30MHz to 1GHz

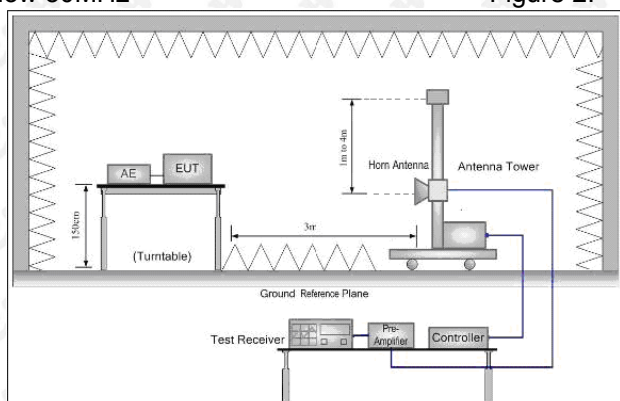


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F (kHz)	-	-	300
0.490MHz-1.705MHz	24000/F (kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- i. Repeat above procedures until all frequencies measured was complete.
- j. Full battery is used during test

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

7.4 Test Result

Module1:

Below 1GHz Test Results:

Antenna polarity: H

Worst case-GFSK(low channel)



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		119.8556	35.19	-5.29	29.90	43.50	-13.60	QP
2		180.9658	32.80	-5.67	27.13	43.50	-16.37	QP
3		241.6763	35.19	-6.99	28.20	46.00	-17.80	QP
4		287.9904	40.80	-5.26	35.54	46.00	-10.46	QP
5	*	337.2155	44.05	-3.78	40.27	46.00	-5.73	QP
6		483.0618	34.77	-0.33	34.44	46.00	-11.56	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Antenna polarity: V
Worst case-GFSK(low channel)



No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV/m	dB/m	dB	
1	*	42.9750	39.83	-5.33	34.50	40.00	-5.50	QP
2		53.0382	35.61	-6.67	28.94	40.00	-11.06	QP
3		128.5630	33.84	-4.88	28.96	43.50	-14.54	QP
4		248.1165	38.44	-6.92	31.52	46.00	-14.48	QP
5		337.2155	36.59	-3.78	32.81	46.00	-13.19	QP
6		438.6554	36.40	-1.30	35.10	46.00	-10.90	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Module2:

Below 1GHz Test Results:

Antenna polarity: H

Worst case-GFSK(low channel)



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		119.8556	34.19	-5.29	28.90	43.50	-14.60	QP
2		180.9658	33.30	-5.67	27.63	43.50	-15.87	QP
3		211.8976	35.34	-7.33	28.01	43.50	-15.49	QP
4	*	337.2155	43.55	-3.78	39.77	46.00	-6.23	QP
5		483.0617	34.77	-0.33	34.44	46.00	-11.56	QP
6		762.0384	28.68	5.71	34.39	46.00	-11.61	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Antenna polarity: V
Worst case-GFSK(low channel)



No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV/m	dB/m	dB	
1	*	42.9750	38.83	-5.33	33.50	40.00	-6.50	QP
2		58.9217	33.55	-6.72	26.83	40.00	-13.17	QP
3		128.5629	32.84	-4.88	27.96	43.50	-15.54	QP
4		248.1165	37.94	-6.92	31.02	46.00	-14.98	QP
5		337.2155	35.59	-3.78	31.81	46.00	-14.19	QP
6		470.5231	34.81	-0.61	34.20	46.00	-11.80	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Module1:

Above 1 GHz Test Results:

CH Low (2402MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4804	56.96	-3.65	53.31	74.00	-20.69	peak
4804	49.34	-3.65	45.69	54.00	-8.31	AVG
7206	59.60	-0.95	58.65	74.00	-15.35	peak
7206	41.34	-0.95	40.39	54.00	-13.61	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4804	57.79	-3.65	54.14	74.00	-19.86	peak
4804	50.75	-3.65	47.10	54.00	-6.90	AVG
7206	60.69	-0.95	59.74	74.00	-14.26	peak
7206	42.42	-0.95	41.47	54.00	-12.53	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

CH Middle (2441MHz)
Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4882.00	59.87	-3.54	56.33	74.00	-17.67	peak
4882.00	48.92	-3.54	45.38	54.00	-8.62	AVG
7323.00	58.03	-0.81	57.22	74.00	-16.78	peak
7323.00	42.64	-0.81	41.83	54.00	-12.17	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4882.00	58.71	-3.54	55.17	74.00	-18.83	peak
4882.00	48.57	-3.54	45.03	54.00	-8.97	AVG
7323.00	56.68	-0.81	55.87	74.00	-18.13	peak
7323.00	42.46	-0.81	41.65	54.00	-12.35	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

CH High (2480MHz)
Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	58.44	-3.43	55.01	74.00	-18.99	peak
4960	48.73	-3.44	45.29	54.00	-8.71	AVG
7440	60.32	-0.77	59.55	74.00	-14.45	peak
7440	40.73	-0.77	39.96	54.00	-14.04	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	58.75	-3.43	55.32	74.00	-18.68	peak
4960	48.91	-3.44	45.47	54.00	-8.53	AVG
7440	60.40	-0.77	59.63	74.00	-14.37	peak
7440	41.74	-0.77	40.97	54.00	-13.03	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report

Restricted bands around fundamental frequency (Radiated)

hopping

Operation Mode: TX CH Low (2402MHz)

Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	56.89	-5.81	51.08	74.00	-22.92	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.57	-5.84	49.73	74.00	-24.27	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	56.95	-5.81	51.14	74.00	-22.86	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.51	-5.84	49.67	74.00	-24.33	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	55.44	-5.81	49.63	74.00	-24.37	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	53.80	-6.06	47.74	74.00	-26.26	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	56.12	-5.81	50.31	74.00	-23.69	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.79	-6.06	48.73	74.00	-25.27	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

NO hopping

Operation Mode: TX CH Low (2402MHz)
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	56.96	-5.81	51.15	74.00	-22.85	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.97	-5.84	50.13	74.00	-23.87	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	56.16	-5.81	50.35	74.00	-23.65	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	54.47	-5.84	48.63	74.00	-25.37	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	55.36	-5.81	49.55	74.00	-24.45	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	56.26	-6.06	50.20	74.00	-23.80	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	55.17	-5.81	49.36	74.00	-24.64	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	55.25	-6.06	49.19	74.00	-24.81	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Module2:

Above 1 GHz Test Results:

CH Low (2402MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4804	57.64	-3.65	53.99	74.00	-20.01	peak
4804	50.83	-3.65	47.18	54.00	-6.82	AVG
7206	61.25	-0.95	60.30	74.00	-13.70	peak
7206	41.76	-0.95	40.81	54.00	-13.19	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4804	58.04	-3.65	54.39	74.00	-19.61	peak
4804	49.77	-3.65	46.12	54.00	-7.88	AVG
7206	60.51	-0.95	59.56	74.00	-14.44	peak
7206	40.68	-0.95	39.73	54.00	-14.27	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

CH Middle (2441MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4882.00	58.94	-3.54	55.40	74.00	-18.60	peak
4882.00	49.45	-3.54	45.91	54.00	-8.09	AVG
7323.00	56.27	-0.81	55.46	74.00	-18.54	peak
7323.00	42.81	-0.81	42.00	54.00	-12.00	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4882.00	56.76	-3.54	53.22	74.00	-20.78	peak
4882.00	48.06	-3.54	44.52	54.00	-9.48	AVG
7323.00	58.20	-0.81	57.39	74.00	-16.61	peak
7323.00	41.91	-0.81	41.10	54.00	-12.90	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

CH High (2480MHz)
Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	56.57	-3.43	53.14	74.00	-20.86	peak
4960	49.20	-3.44	45.76	54.00	-8.24	AVG
7440	60.77	-0.77	60.00	74.00	-14.00	peak
7440	41.10	-0.77	40.33	54.00	-13.67	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	58.70	-3.43	55.27	74.00	-18.73	peak
4960	48.00	-3.44	44.56	54.00	-9.44	AVG
7440	61.49	-0.77	60.72	74.00	-13.28	peak
7440	41.46	-0.77	40.69	54.00	-13.31	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report

Restricted bands around fundamental frequency (Radiated)

hopping

Operation Mode: TX CH Low (2402MHz)

Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	56.45	-5.81	50.64	74.00	-23.36	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.72	-5.84	49.88	74.00	-24.12	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	56.36	-5.81	50.55	74.00	-23.45	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	56.56	-5.84	50.72	74.00	-23.28	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	54.27	-5.81	48.46	74.00	-25.54	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.33	-6.06	48.27	74.00	-25.73	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	56.23	-5.81	50.42	74.00	-23.58	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.05	-6.06	47.99	74.00	-26.01	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

NO hopping

Operation Mode: TX CH Low (2402MHz)
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	55.07	-5.81	49.26	74.00	-24.74	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	53.69	-5.84	47.85	74.00	-26.15	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	56.02	-5.81	50.21	74.00	-23.79	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	54.97	-5.84	49.13	74.00	-24.87	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	56.66	-5.81	50.85	74.00	-23.15	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	56.22	-6.06	50.16	74.00	-23.84	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						


Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	56.32	-5.81	50.51	74.00	-23.49	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.04	-6.06	47.98	74.00	-26.02	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

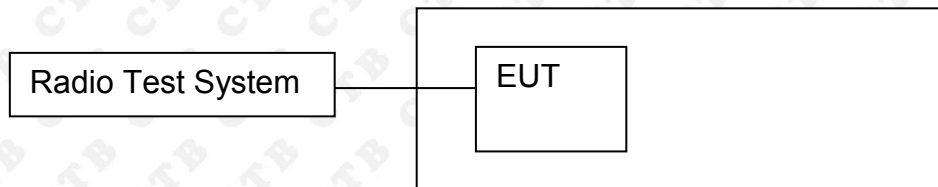

8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:

Below 30MHz:

RBW = 100kHz, VBW = 300kHz, Sweep = auto

Detector function = peak, Trace = max hold

Above 30MHz:

RBW = 100KHz, VBW = 300KHz, Sweep = auto


Detector function = peak, Trace = max hold

8.4 Test Result


Module1:




GFSK/HCH/
Hop

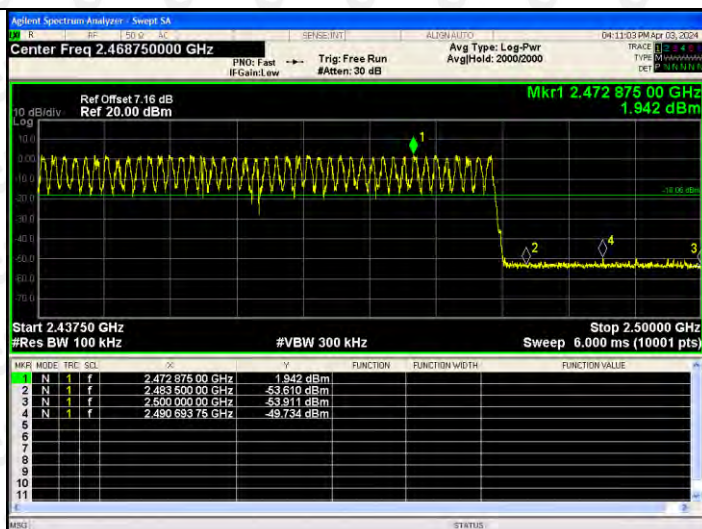

$\pi/4$ DQPSK/LCH/
No Hop

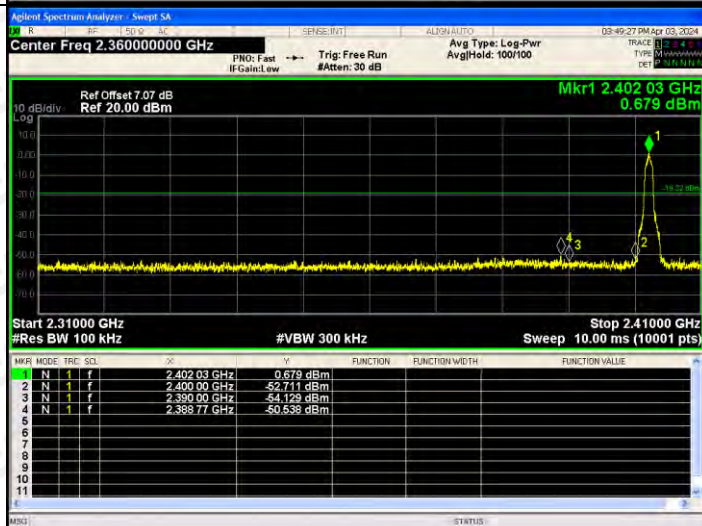


$\pi/4$ DQPSK/LCH/
Hop

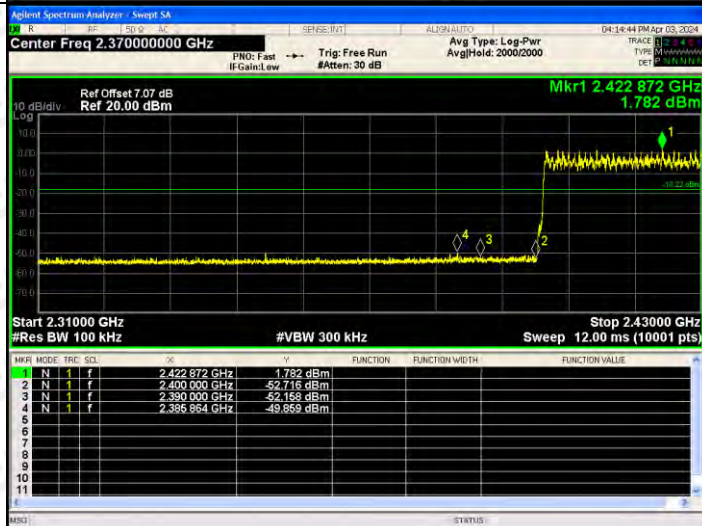


$\pi/4$ DQPSK/HCH/ No Hop	Agilent Spectrum Analyzer - Sweep SA Center Freq 2.489000000 GHz PNO: Fast IF Gain: Low Trig: Free Run #Atten: 30 dB Avg Type: Log-Pwr AvgHold: 100/100 Ref Offset 7.16 dB Ref 20.00 dBm Mkr1 2.480 026 2 GHz 1.618 dBm Start 2.47800 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.50000 GHz Sweep 2.667 ms (10001 pts) <table><tr><th>MWR</th><th>MODE</th><th>TRC</th><th>SQL</th><th>XX</th><th>V</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td></td><td>2.480 026 2 GHz</td><td></td><td></td><td>1.618 dBm</td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td></td><td>2.483 500 0 GHz</td><td></td><td></td><td>-54.679 dBm</td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td></td><td>2.500 000 0 GHz</td><td></td><td></td><td>-54.173 dBm</td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td></td><td>2.494 849 8 GHz</td><td></td><td></td><td>-51.546 dBm</td></tr></table>	MWR	MODE	TRC	SQL	XX	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f		2.480 026 2 GHz			1.618 dBm	2	N	1	f		2.483 500 0 GHz			-54.679 dBm	3	N	1	f		2.500 000 0 GHz			-54.173 dBm	4	N	1	f		2.494 849 8 GHz			-51.546 dBm
MWR	MODE	TRC	SQL	XX	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f		2.480 026 2 GHz			1.618 dBm																																						
2	N	1	f		2.483 500 0 GHz			-54.679 dBm																																						
3	N	1	f		2.500 000 0 GHz			-54.173 dBm																																						
4	N	1	f		2.494 849 8 GHz			-51.546 dBm																																						
$\pi/4$ DQPSK/HCH/ Hop	Agilent Spectrum Analyzer - Sweep SA Center Freq 2.468750000 GHz PNO: Fast IF Gain: Low Trig: Free Run #Atten: 30 dB Avg Type: Log-Pwr AvgHold: 2000/2000 Ref Offset 7.16 dB Ref 20.00 dBm Mkr1 2.437 875 00 GHz 1.783 dBm Start 2.43750 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.50000 GHz Sweep 6.000 ms (10001 pts) <table><tr><th>MWR</th><th>MODE</th><th>TRC</th><th>SQL</th><th>XX</th><th>V</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td></td><td>2.437 875 00 GHz</td><td></td><td></td><td>1.783 dBm</td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td></td><td>2.463 500 00 GHz</td><td></td><td></td><td>-54.058 dBm</td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td></td><td>2.500 000 00 GHz</td><td></td><td></td><td>-53.123 dBm</td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td></td><td>2.497 168 75 GHz</td><td></td><td></td><td>-49.675 dBm</td></tr></table>	MWR	MODE	TRC	SQL	XX	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f		2.437 875 00 GHz			1.783 dBm	2	N	1	f		2.463 500 00 GHz			-54.058 dBm	3	N	1	f		2.500 000 00 GHz			-53.123 dBm	4	N	1	f		2.497 168 75 GHz			-49.675 dBm
MWR	MODE	TRC	SQL	XX	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f		2.437 875 00 GHz			1.783 dBm																																						
2	N	1	f		2.463 500 00 GHz			-54.058 dBm																																						
3	N	1	f		2.500 000 00 GHz			-53.123 dBm																																						
4	N	1	f		2.497 168 75 GHz			-49.675 dBm																																						
8DPSK/LCH/No Hop	Agilent Spectrum Analyzer - Sweep SA Center Freq 2.360000000 GHz PNO: Fast IF Gain: Low Trig: Free Run #Atten: 30 dB Avg Type: Log-Pwr AvgHold: 100/100 Ref Offset 7.07 dB Ref 20.00 dBm Mkr1 2.402 05 GHz 0.455 dBm Start 2.31000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.41000 GHz Sweep 10.00 ms (10001 pts) <table><tr><th>MWR</th><th>MODE</th><th>TRC</th><th>SQL</th><th>XX</th><th>V</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td></td><td>2.402 05 GHz</td><td></td><td></td><td>0.455 dBm</td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td></td><td>2.400 00 GHz</td><td></td><td></td><td>-53.039 dBm</td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td></td><td>2.390 00 GHz</td><td></td><td></td><td>-55.136 dBm</td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td></td><td>2.397 51 GHz</td><td></td><td></td><td>-51.076 dBm</td></tr></table>	MWR	MODE	TRC	SQL	XX	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f		2.402 05 GHz			0.455 dBm	2	N	1	f		2.400 00 GHz			-53.039 dBm	3	N	1	f		2.390 00 GHz			-55.136 dBm	4	N	1	f		2.397 51 GHz			-51.076 dBm
MWR	MODE	TRC	SQL	XX	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f		2.402 05 GHz			0.455 dBm																																						
2	N	1	f		2.400 00 GHz			-53.039 dBm																																						
3	N	1	f		2.390 00 GHz			-55.136 dBm																																						
4	N	1	f		2.397 51 GHz			-51.076 dBm																																						


8DPSK
/LCH/Hop

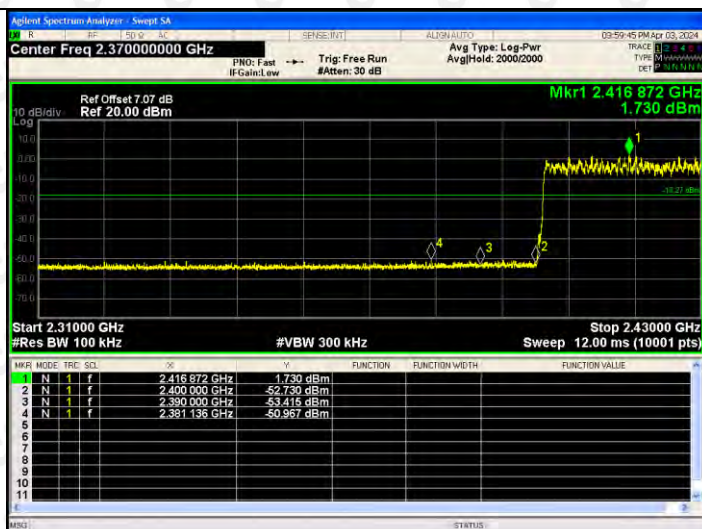

8DPSK /HCH/No
Hop

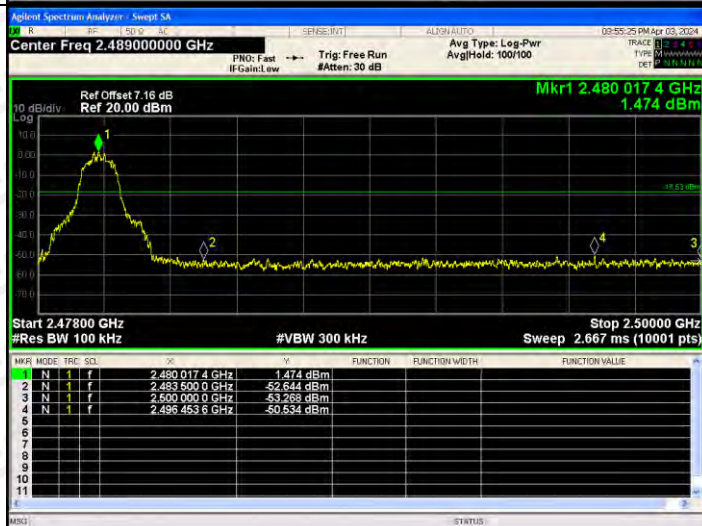


8DPSK
/HCH/Hop

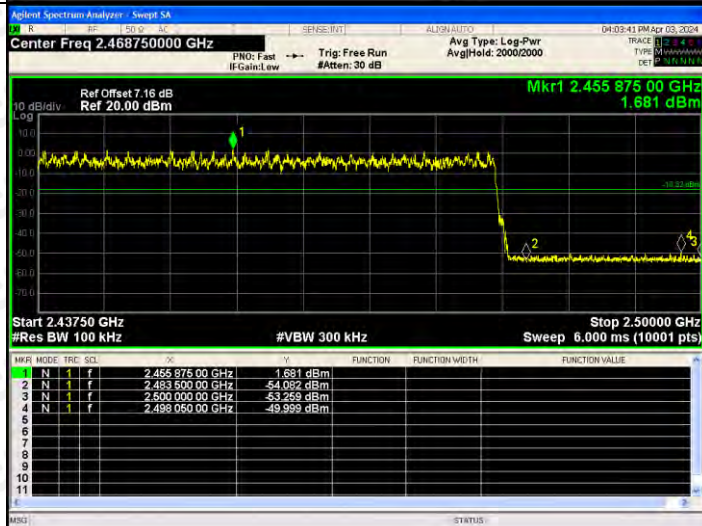


RF Conducted Spurious Emissions Graphs


GFSK/LCH

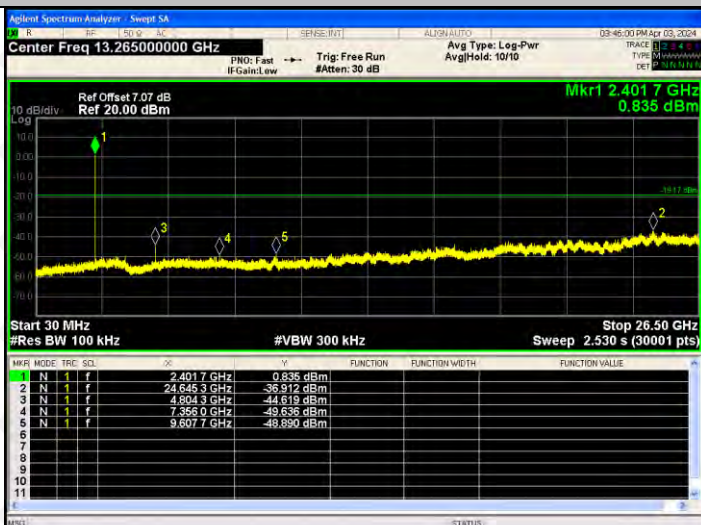

GFSK/MCH

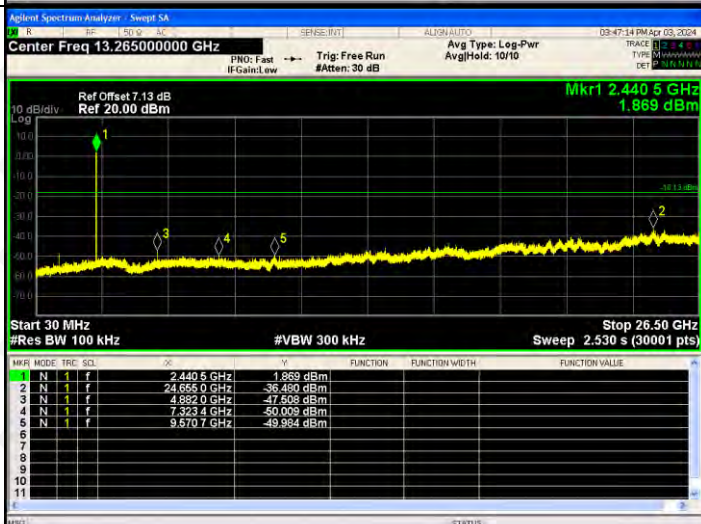


GFSK/HCH

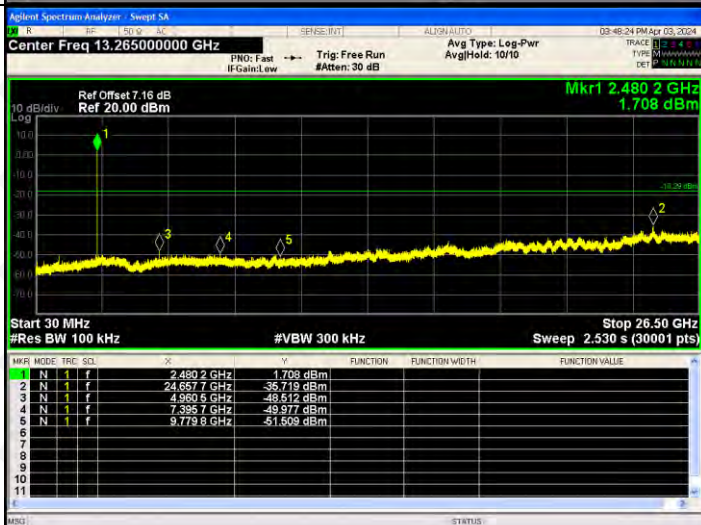


$\pi/4$ DQPSK /LCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 7.07 dB Ref 20.00 dBm Mkr1 2.4017 GHz 1.667 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><thead><tr><th>MN</th><th>MODE</th><th>TRF</th><th>SOL</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4017 GHz</td><td>1.667 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>25.0053 GHz</td><td>-37.037 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.8043 GHz</td><td>-44.536 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.3295 GHz</td><td>-50.144 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.6077 GHz</td><td>-46.663 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MN	MODE	TRF	SOL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4017 GHz	1.667 dBm				2	N	1	f	25.0053 GHz	-37.037 dBm				3	N	1	f	4.8043 GHz	-44.536 dBm				4	N	1	f	7.3295 GHz	-50.144 dBm				5	N	1	f	9.6077 GHz	-46.663 dBm			
MN	MODE	TRF	SOL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4017 GHz	1.667 dBm																																																		
2	N	1	f	25.0053 GHz	-37.037 dBm																																																		
3	N	1	f	4.8043 GHz	-44.536 dBm																																																		
4	N	1	f	7.3295 GHz	-50.144 dBm																																																		
5	N	1	f	9.6077 GHz	-46.663 dBm																																																		
$\pi/4$ DQPSK/MCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 7.13 dB Ref 20.00 dBm Mkr1 2.4414 GHz -2.361 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><thead><tr><th>MN</th><th>MODE</th><th>TRF</th><th>SOL</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4414 GHz</td><td>-2.361 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>25.0874 GHz</td><td>-37.326 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.8820 GHz</td><td>-44.553 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.1754 GHz</td><td>-49.844 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.7639 GHz</td><td>-46.652 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MN	MODE	TRF	SOL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4414 GHz	-2.361 dBm				2	N	1	f	25.0874 GHz	-37.326 dBm				3	N	1	f	4.8820 GHz	-44.553 dBm				4	N	1	f	7.1754 GHz	-49.844 dBm				5	N	1	f	9.7639 GHz	-46.652 dBm			
MN	MODE	TRF	SOL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4414 GHz	-2.361 dBm																																																		
2	N	1	f	25.0874 GHz	-37.326 dBm																																																		
3	N	1	f	4.8820 GHz	-44.553 dBm																																																		
4	N	1	f	7.1754 GHz	-49.844 dBm																																																		
5	N	1	f	9.7639 GHz	-46.652 dBm																																																		
$\pi/4$ DQPSK/HCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 7.16 dB Ref 20.00 dBm Mkr1 2.4802 GHz -3.839 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><thead><tr><th>MN</th><th>MODE</th><th>TRF</th><th>SOL</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4802 GHz</td><td>-3.839 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>25.0847 GHz</td><td>-36.851 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.9605 GHz</td><td>-48.031 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.4118 GHz</td><td>-50.219 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.9201 GHz</td><td>-48.732 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MN	MODE	TRF	SOL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4802 GHz	-3.839 dBm				2	N	1	f	25.0847 GHz	-36.851 dBm				3	N	1	f	4.9605 GHz	-48.031 dBm				4	N	1	f	7.4118 GHz	-50.219 dBm				5	N	1	f	9.9201 GHz	-48.732 dBm			
MN	MODE	TRF	SOL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4802 GHz	-3.839 dBm																																																		
2	N	1	f	25.0847 GHz	-36.851 dBm																																																		
3	N	1	f	4.9605 GHz	-48.031 dBm																																																		
4	N	1	f	7.4118 GHz	-50.219 dBm																																																		
5	N	1	f	9.9201 GHz	-48.732 dBm																																																		


8DPSK /LCH

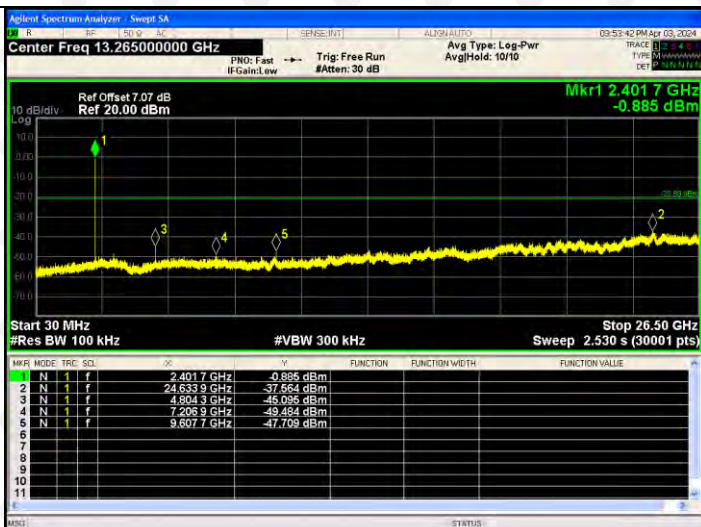

8DPSK /MCH



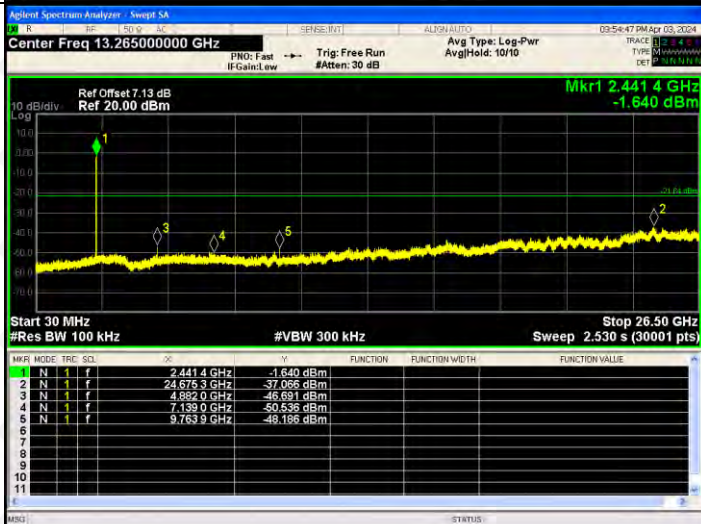


8DPSK /HCH

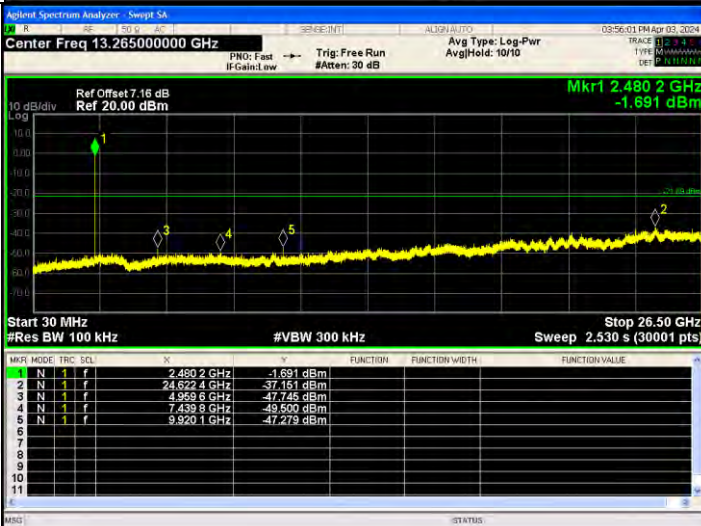


Module2:


BAND EDGE Graphs

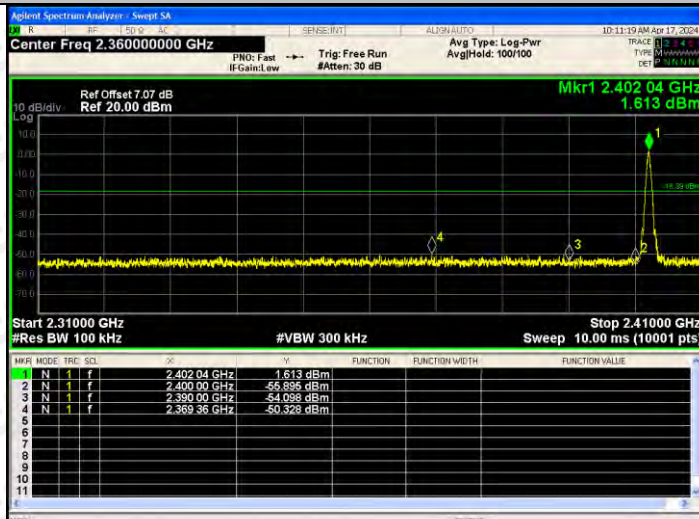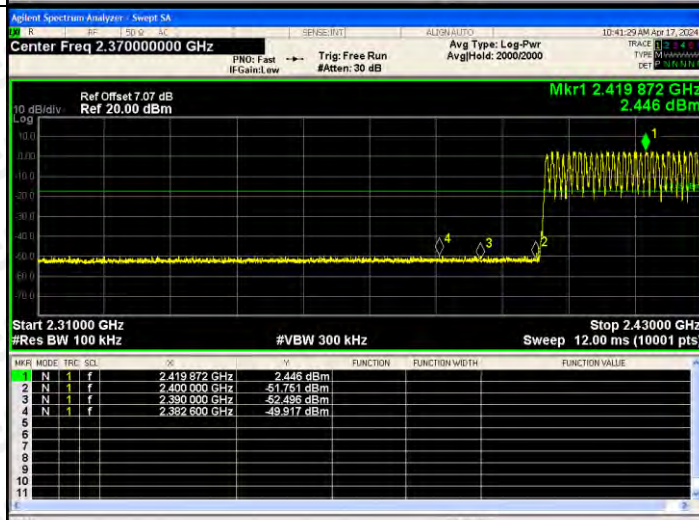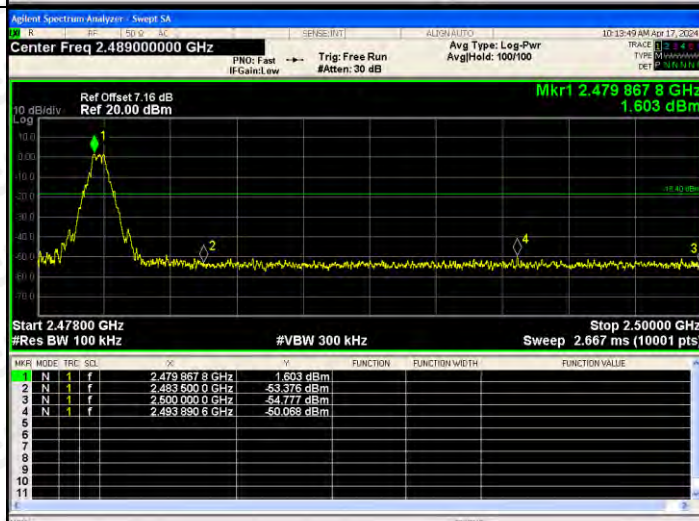GFSK/LCH/
No Hop

GFSK/LCH/
Hop

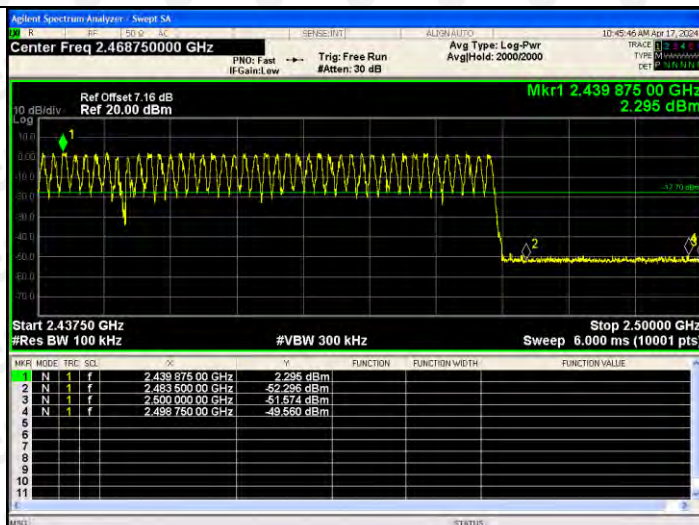GFSK/HCH/
No Hop


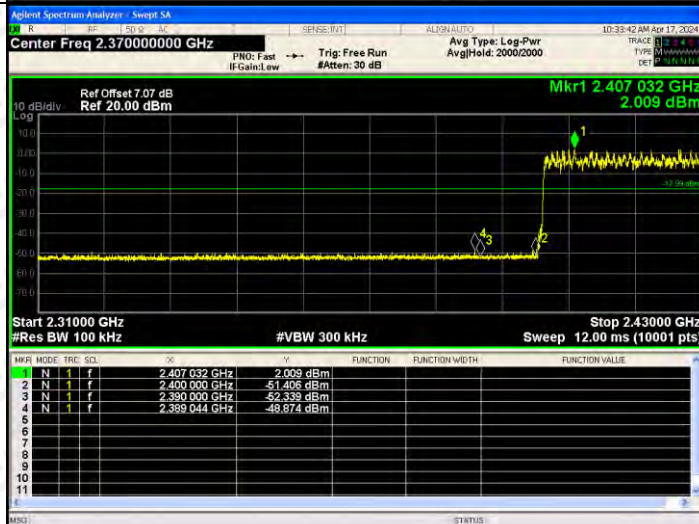
GFSK/HCH/
Hop



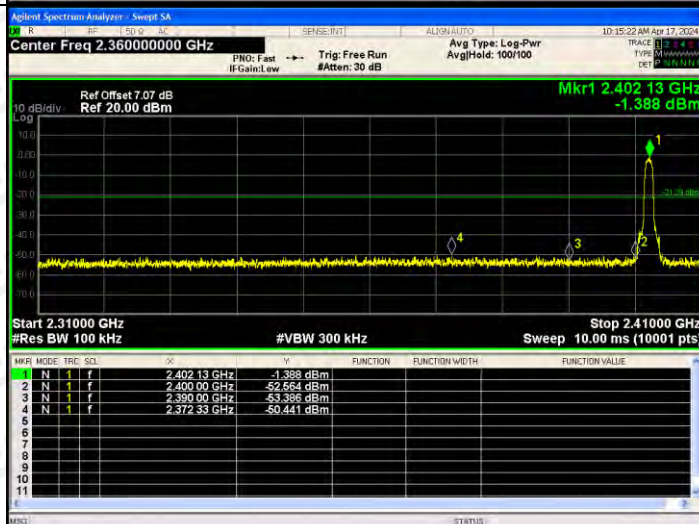


$\pi/4$ DQPSK/LCH/
No Hop




$\pi/4$ DQPSK/LCH/
Hop

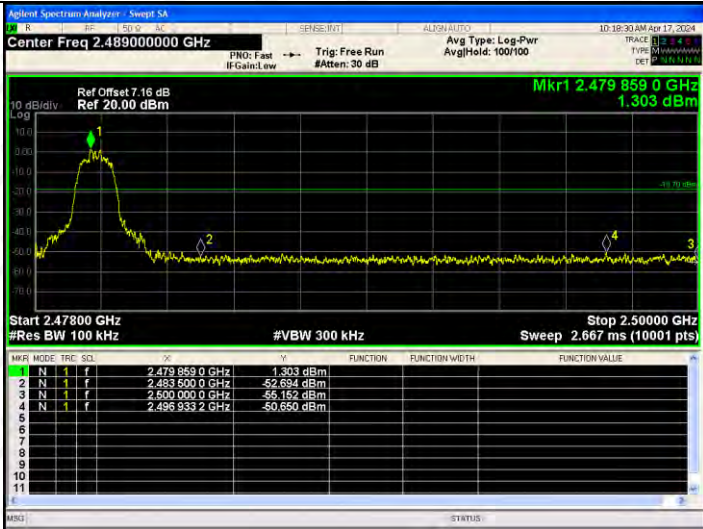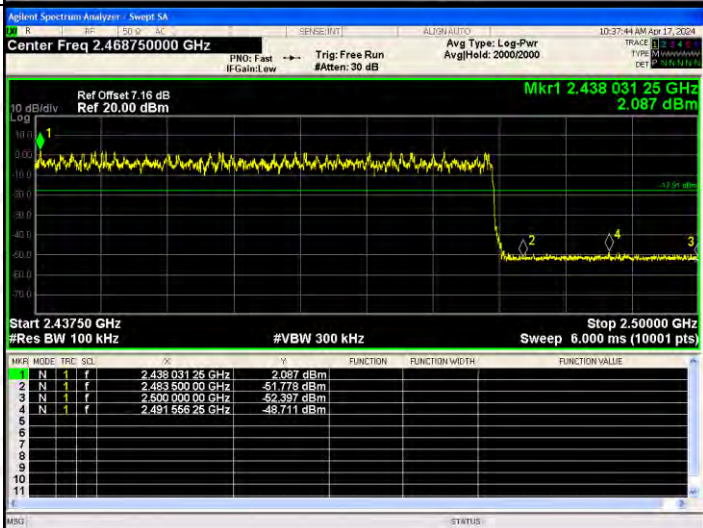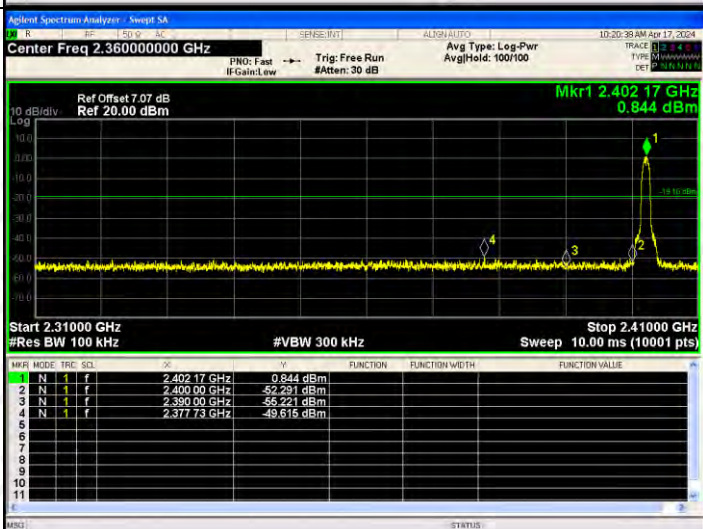


$\pi/4$ DQPSK/HCH/ No Hop	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.489000000 GHz Ref Offset 7.16 dB Ref 20.00 dBm Mkr1 2.479 859 0 GHz 1.303 dBm Start 2.47800 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.50000 GHz Sweep 2.667 ms (10001 pts) <table><thead><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SQL</th><th>SC</th><th>F</th><th>V</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td></td><td>2.479 859 0 GHz</td><td>1.303 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td></td><td>2.483 500 0 GHz</td><td>-52.694 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td></td><td>2.500 000 0 GHz</td><td>-55.152 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td></td><td>2.496 933 2 GHz</td><td>-50.650 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MNR	MODE	TRC	SQL	SC	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f		2.479 859 0 GHz	1.303 dBm				2	N	1	f		2.483 500 0 GHz	-52.694 dBm				3	N	1	f		2.500 000 0 GHz	-55.152 dBm				4	N	1	f		2.496 933 2 GHz	-50.650 dBm			
MNR	MODE	TRC	SQL	SC	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																										
1	N	1	f		2.479 859 0 GHz	1.303 dBm																																													
2	N	1	f		2.483 500 0 GHz	-52.694 dBm																																													
3	N	1	f		2.500 000 0 GHz	-55.152 dBm																																													
4	N	1	f		2.496 933 2 GHz	-50.650 dBm																																													
$\pi/4$ DQPSK/HCH/ Hop	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.468750000 GHz Ref Offset 7.16 dB Ref 20.00 dBm Mkr1 2.438 031 25 GHz 2.087 dBm Start 2.43750 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.50000 GHz Sweep 6.000 ms (10001 pts) <table><thead><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SQL</th><th>SC</th><th>F</th><th>V</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td></td><td>2.438 031 25 GHz</td><td>2.087 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td></td><td>2.463 500 00 GHz</td><td>-51.773 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td></td><td>2.500 000 00 GHz</td><td>-52.397 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td></td><td>2.491 556 25 GHz</td><td>-49.711 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MNR	MODE	TRC	SQL	SC	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f		2.438 031 25 GHz	2.087 dBm				2	N	1	f		2.463 500 00 GHz	-51.773 dBm				3	N	1	f		2.500 000 00 GHz	-52.397 dBm				4	N	1	f		2.491 556 25 GHz	-49.711 dBm			
MNR	MODE	TRC	SQL	SC	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																										
1	N	1	f		2.438 031 25 GHz	2.087 dBm																																													
2	N	1	f		2.463 500 00 GHz	-51.773 dBm																																													
3	N	1	f		2.500 000 00 GHz	-52.397 dBm																																													
4	N	1	f		2.491 556 25 GHz	-49.711 dBm																																													
8DPSK/LCH/No Hop	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.360000000 GHz Ref Offset 7.07 dB Ref 20.00 dBm Mkr1 2.402 17 GHz 0.844 dBm Start 2.31000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.41000 GHz Sweep 10.00 ms (10001 pts) <table><thead><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SQL</th><th>SC</th><th>F</th><th>V</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td></td><td>2.402 17 GHz</td><td>0.844 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td></td><td>2.400 00 GHz</td><td>-52.291 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td></td><td>2.390 00 GHz</td><td>-55.221 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td></td><td>2.377 73 GHz</td><td>-49.616 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MNR	MODE	TRC	SQL	SC	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f		2.402 17 GHz	0.844 dBm				2	N	1	f		2.400 00 GHz	-52.291 dBm				3	N	1	f		2.390 00 GHz	-55.221 dBm				4	N	1	f		2.377 73 GHz	-49.616 dBm			
MNR	MODE	TRC	SQL	SC	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																										
1	N	1	f		2.402 17 GHz	0.844 dBm																																													
2	N	1	f		2.400 00 GHz	-52.291 dBm																																													
3	N	1	f		2.390 00 GHz	-55.221 dBm																																													
4	N	1	f		2.377 73 GHz	-49.616 dBm																																													


8DPSK
/LCH/Hop

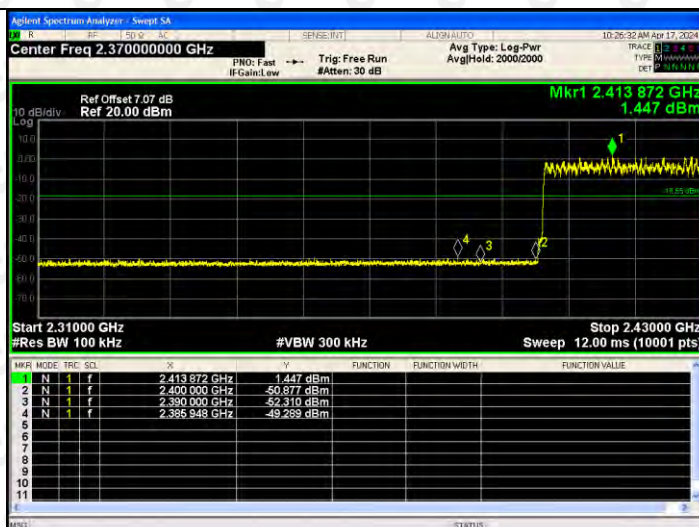

8DPSK /HCH/No
Hop

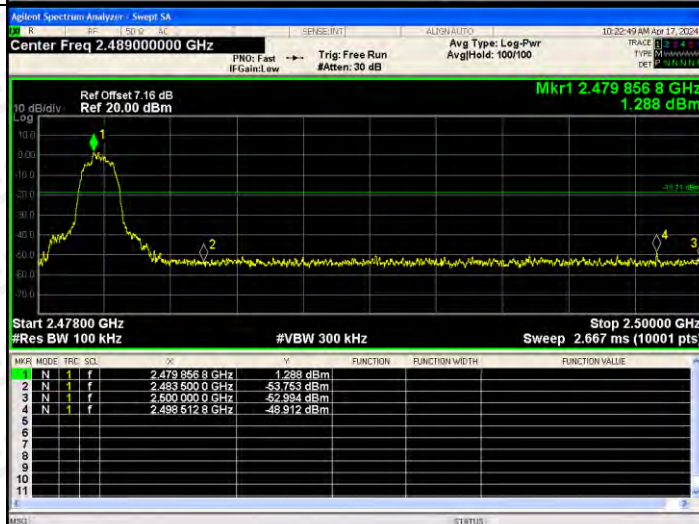


8DPSK
/HCH/Hop

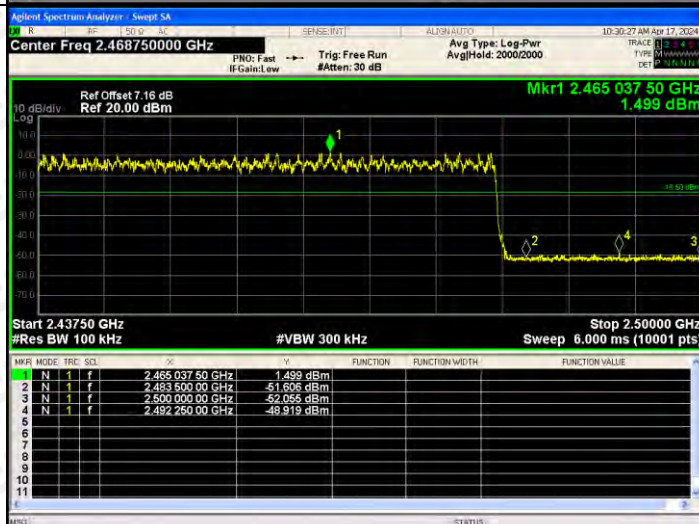


RF Conducted Spurious Emissions Graphs


GFSK/LCH



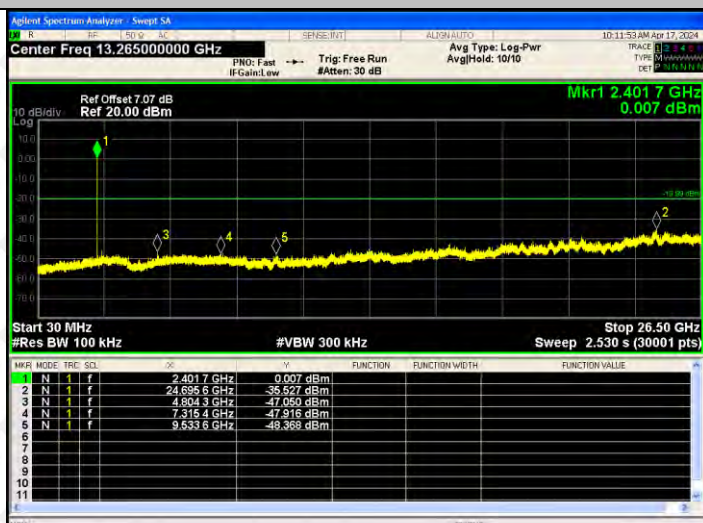


GFSK/MCH

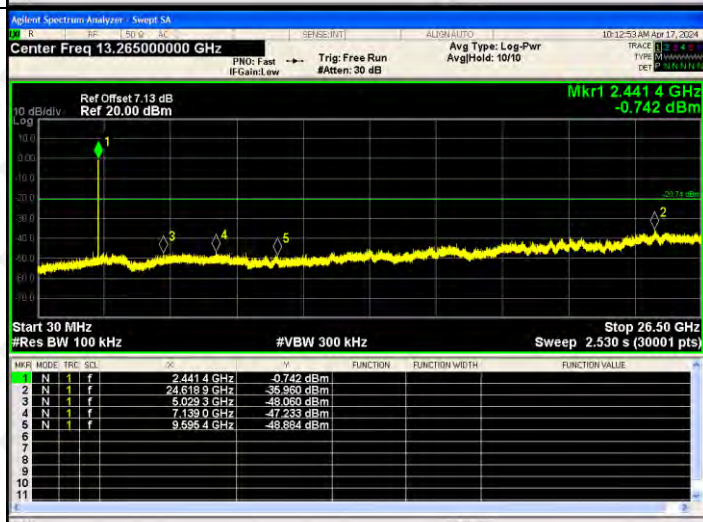


GFSK/HCH

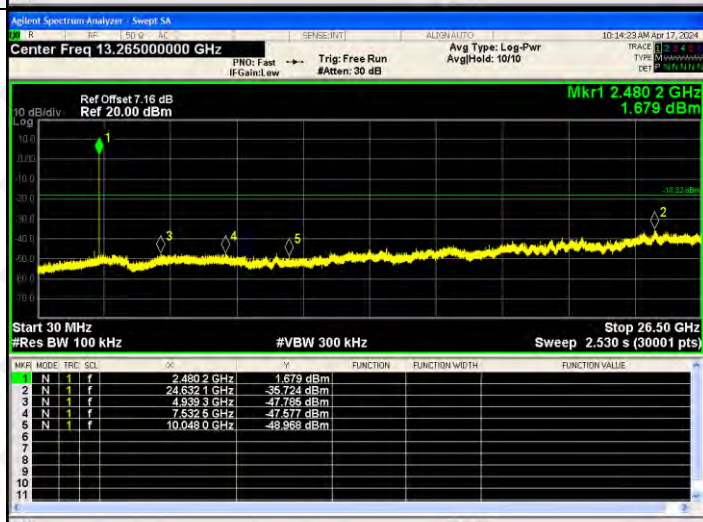


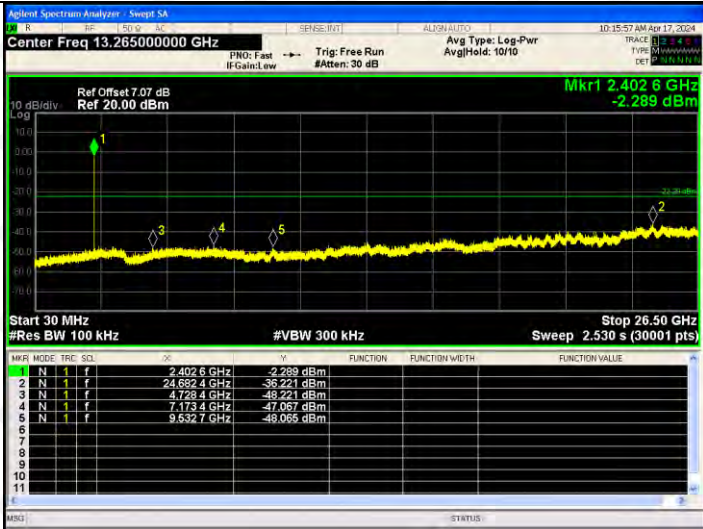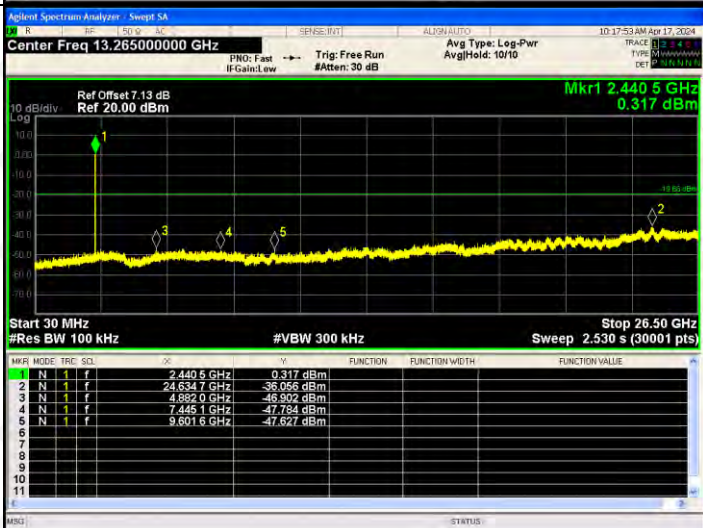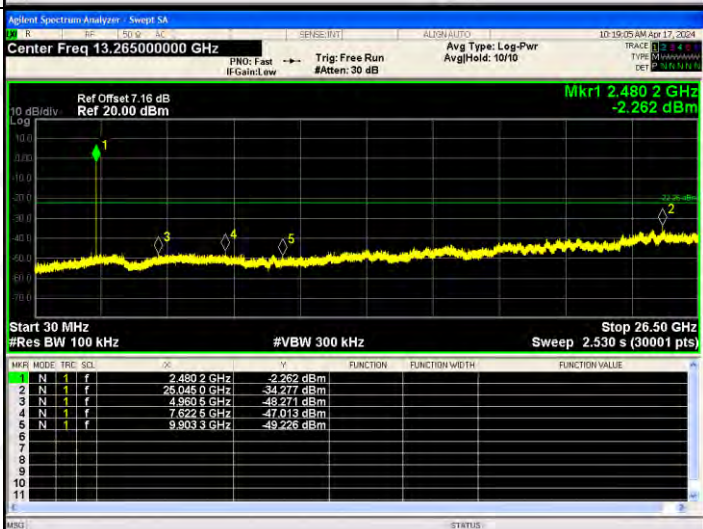$\pi/4$ DQPSK /LCH	 <table><tr><th>MN</th><th>MODE</th><th>TRIG</th><th>SOL</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4026 GHz</td><td>-2.289 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.6824 GHz</td><td>-36.221 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.7284 GHz</td><td>-43.221 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.1734 GHz</td><td>-47.067 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.6327 GHz</td><td>-48.065 dBm</td><td></td><td></td><td></td></tr></table>	MN	MODE	TRIG	SOL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4026 GHz	-2.289 dBm				2	N	1	f	24.6824 GHz	-36.221 dBm				3	N	1	f	4.7284 GHz	-43.221 dBm				4	N	1	f	7.1734 GHz	-47.067 dBm				5	N	1	f	9.6327 GHz	-48.065 dBm			
MN	MODE	TRIG	SOL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4026 GHz	-2.289 dBm																																																		
2	N	1	f	24.6824 GHz	-36.221 dBm																																																		
3	N	1	f	4.7284 GHz	-43.221 dBm																																																		
4	N	1	f	7.1734 GHz	-47.067 dBm																																																		
5	N	1	f	9.6327 GHz	-48.065 dBm																																																		
$\pi/4$ DQPSK/MCH	 <table><tr><th>MN</th><th>MODE</th><th>TRIG</th><th>SOL</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4405 GHz</td><td>0.317 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.6347 GHz</td><td>-36.056 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.8820 GHz</td><td>-43.902 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.4451 GHz</td><td>-47.734 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.6016 GHz</td><td>-47.627 dBm</td><td></td><td></td><td></td></tr></table>	MN	MODE	TRIG	SOL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4405 GHz	0.317 dBm				2	N	1	f	24.6347 GHz	-36.056 dBm				3	N	1	f	4.8820 GHz	-43.902 dBm				4	N	1	f	7.4451 GHz	-47.734 dBm				5	N	1	f	9.6016 GHz	-47.627 dBm			
MN	MODE	TRIG	SOL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4405 GHz	0.317 dBm																																																		
2	N	1	f	24.6347 GHz	-36.056 dBm																																																		
3	N	1	f	4.8820 GHz	-43.902 dBm																																																		
4	N	1	f	7.4451 GHz	-47.734 dBm																																																		
5	N	1	f	9.6016 GHz	-47.627 dBm																																																		
$\pi/4$ DQPSK/HCH	 <table><tr><th>MN</th><th>MODE</th><th>TRIG</th><th>SOL</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4802 GHz</td><td>-2.262 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>25.0450 GHz</td><td>-34.277 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.9605 GHz</td><td>-43.271 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.6226 GHz</td><td>-47.013 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.9033 GHz</td><td>-49.226 dBm</td><td></td><td></td><td></td></tr></table>	MN	MODE	TRIG	SOL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4802 GHz	-2.262 dBm				2	N	1	f	25.0450 GHz	-34.277 dBm				3	N	1	f	4.9605 GHz	-43.271 dBm				4	N	1	f	7.6226 GHz	-47.013 dBm				5	N	1	f	9.9033 GHz	-49.226 dBm			
MN	MODE	TRIG	SOL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4802 GHz	-2.262 dBm																																																		
2	N	1	f	25.0450 GHz	-34.277 dBm																																																		
3	N	1	f	4.9605 GHz	-43.271 dBm																																																		
4	N	1	f	7.6226 GHz	-47.013 dBm																																																		
5	N	1	f	9.9033 GHz	-49.226 dBm																																																		


8DPSK /LCH

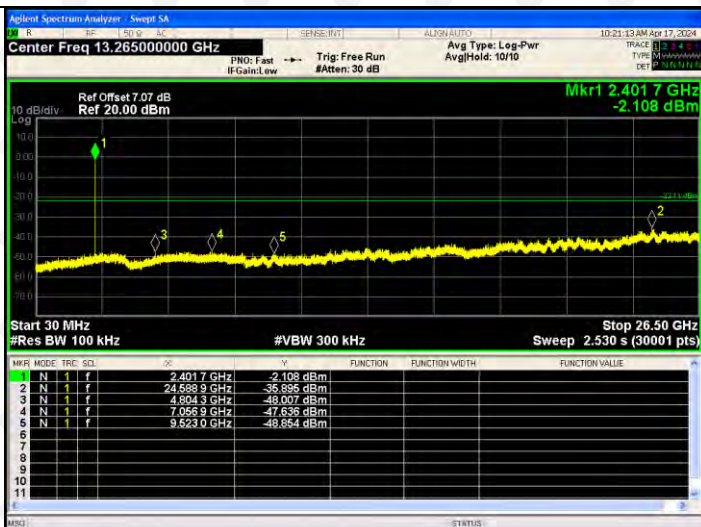

8DPSK /MCH

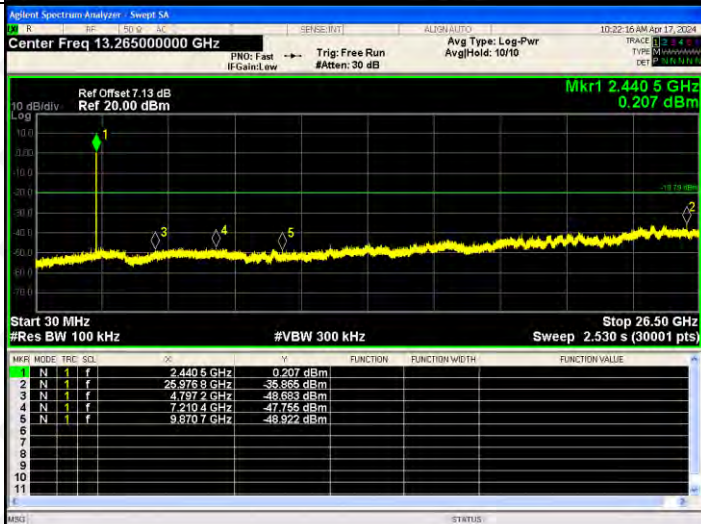


8DPSK /HCH

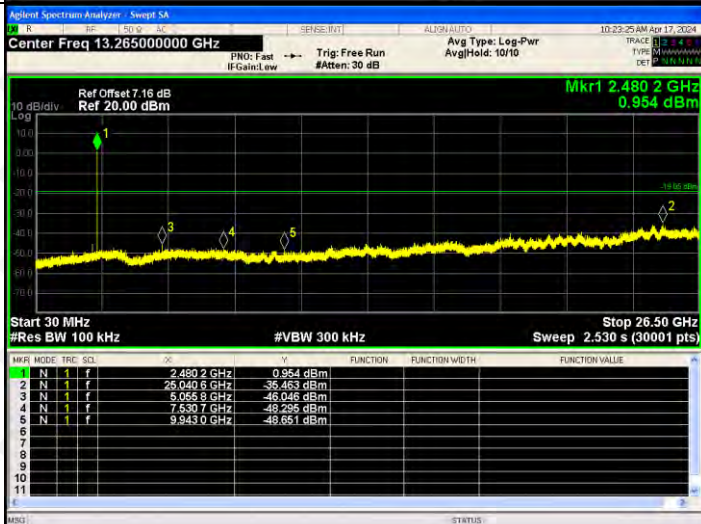

9. COUDUCTED PEAK OUTPUT POWER

9.1 Block Diagram Of Test Setup

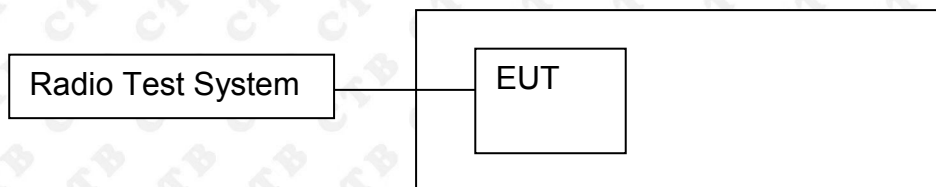

9.2 Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

9.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 2MHz. VBW = 6MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.

9.4 Test Result

Module1:


Mode	Channel.	Maximum Peak Output Power [dBm]	Limit [dBm]	Verdict
EDR mode (GFSK)	LCH	1.909	20.97	PASS
	MCH	2.061	20.97	PASS
	HCH	2.063	20.97	PASS
EDR mode ($\pi/4$ DQPSK)	LCH	2.584	20.97	PASS
	MCH	2.701	20.97	PASS
	HCH	2.669	20.97	PASS
EDR mode (8DPSK)	LCH	2.887	20.97	PASS
	MCH	3.039	20.97	PASS
	HCH	3.028	20.97	PASS


Module2:

Mode	Channel.	Maximum Peak Output Power [dBm]	Limit [dBm]	Verdict
EDR mode (GFSK)	LCH	2.388	20.97	PASS
	MCH	2.148	20.97	PASS
	HCH	1.777	20.97	PASS
EDR mode ($\pi/4$ DQPSK)	LCH	3.099	20.97	PASS
	MCH	2.86	20.97	PASS
	HCH	2.496	20.97	PASS
EDR mode (8DPSK)	LCH	3.356	20.97	PASS
	MCH	3.151	20.97	PASS
	HCH	2.704	20.97	PASS

Module1:

Test Graph:

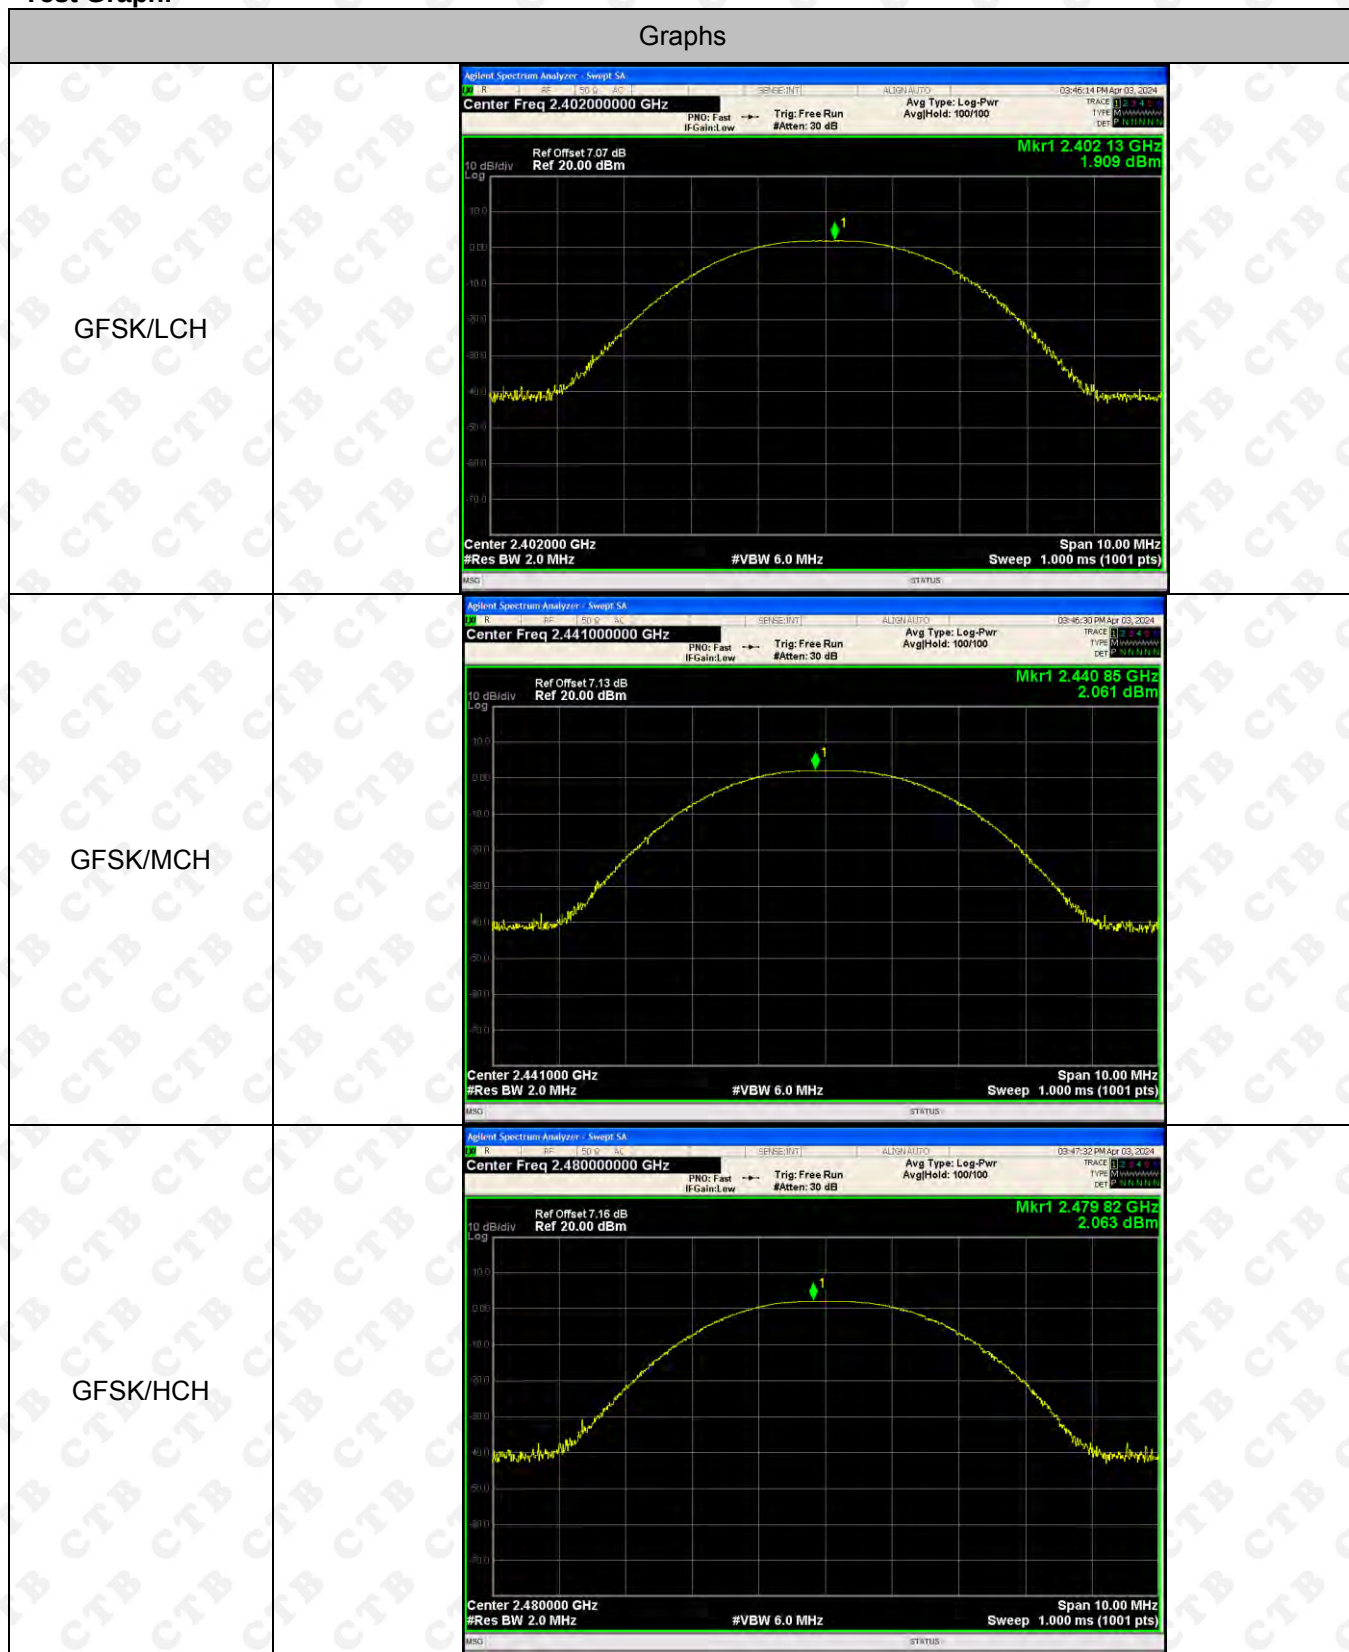


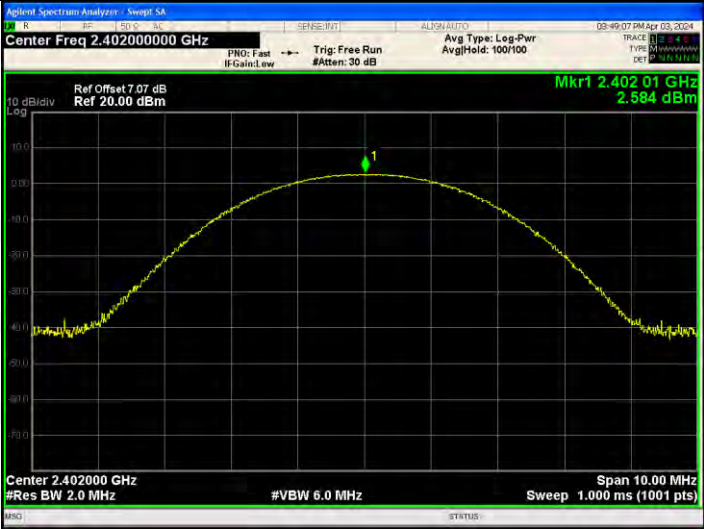
$\pi/4$DQPSK/LCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.40200000 GHz Ref Offset 7.07 dB Ref 20.00 dBm Mkr1 2.402 01 GHz 2.584 dBm Center 2.402000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)
$\pi/4$DQPSK/MCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.44100000 GHz Ref Offset 7.13 dB Ref 20.00 dBm Mkr1 2.441 03 GHz 2.701 dBm Center 2.441000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)
$\pi/4$DQPSK/HCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.48000000 GHz Ref Offset 7.16 dB Ref 20.00 dBm Mkr1 2.480 26 GHz 2.669 dBm Center 2.480000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)

8DPSK/LCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.40200000 GHz Ref Offset 7.07 dB Ref 20.00 dBm Mkr1 2.40187 GHz 2.887 dBm Center 2.402000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)
8DPSK /MCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.44100000 GHz Ref Offset 7.13 dB Ref 20.00 dBm Mkr1 2.44086 GHz 3.039 dBm Center 2.441000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)
8DPSK /HCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.48000000 GHz Ref Offset 7.16 dB Ref 20.00 dBm Mkr1 2.47997 GHz 3.028 dBm Center 2.480000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)

Module2:

Test Graph:

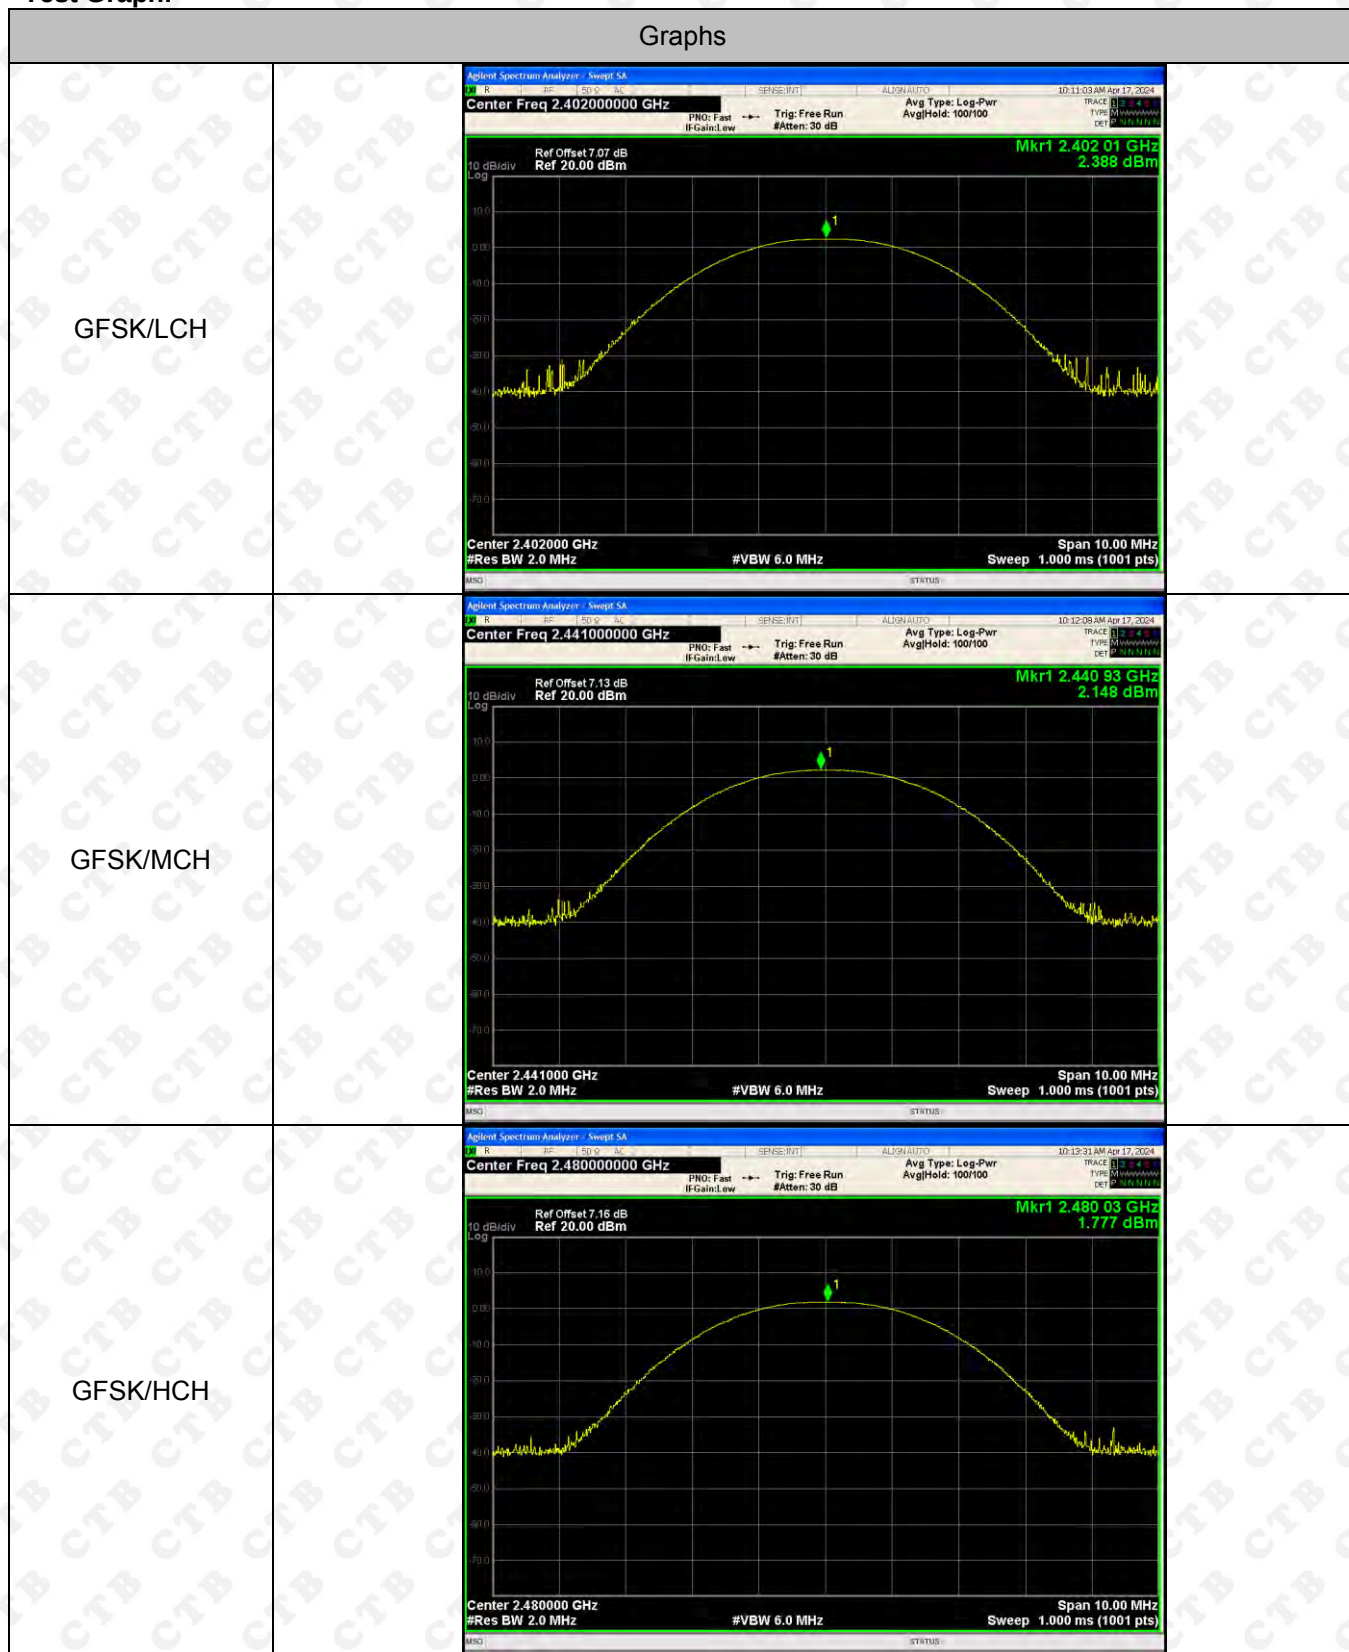


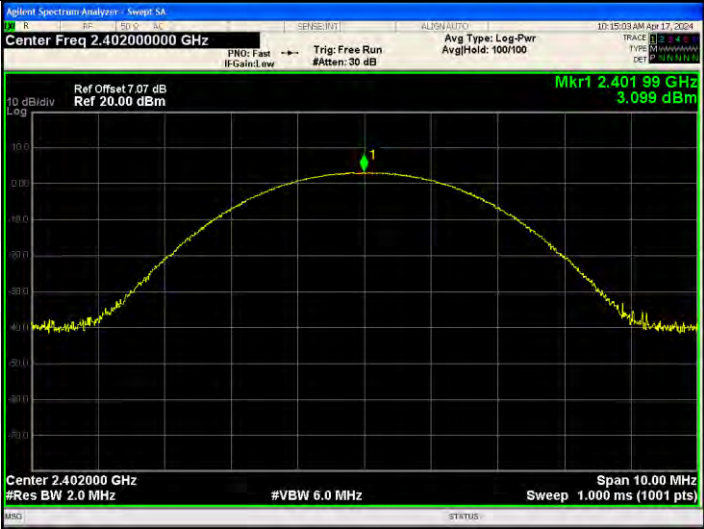$\pi/4$ DQPSK/LCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.40200000 GHz Ref Offset 7.07 dB Ref 20.00 dBm Mkr1 2.401 99 GHz 3.099 dBm Center 2.402000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)
$\pi/4$ DQPSK/MCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.44100000 GHz Ref Offset 7.13 dB Ref 20.00 dBm Mkr1 2.440 98 GHz 2.960 dBm Center 2.441000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)
$\pi/4$ DQPSK/HCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.48000000 GHz Ref Offset 7.16 dB Ref 20.00 dBm Mkr1 2.479 89 GHz 2.496 dBm Center 2.480000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)

8DPSK/LCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq: 2.40200000 GHz Ref Offset: 7.07 dB Ref: 20.00 dBm Mkr1 2.40197 GHz 3.356 dBm Center 2.402000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)
8DPSK /MCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq: 2.44100000 GHz Ref Offset: 7.13 dB Ref: 20.00 dBm Mkr1 2.44099 GHz 3.151 dBm Center 2.441000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)
8DPSK /HCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq: 2.48000000 GHz Ref Offset: 7.16 dB Ref: 20.00 dBm Mkr1 2.48004 GHz 2.704 dBm Center 2.480000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)

10. 20DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

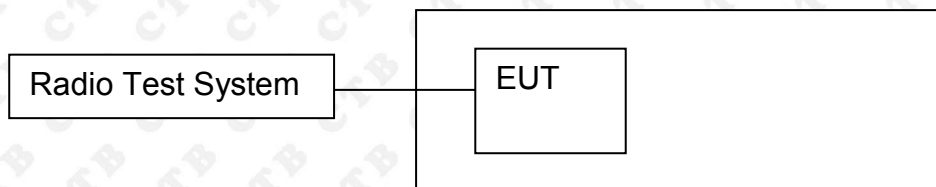

10.2 Limit

Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mw.

10.3 Test procedure

1. Rem1. Set RBW = 30 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result

Module1:

Test Mode	Frequency	20dB Bandwidth (MHz)	Result
GFSK	Low channel	0.942	PASS
	Mid channel	1.023	PASS
	High channel	1.036	PASS
$\pi/4$ DQPSK	Low channel	1.29	PASS
	Mid channel	1.344	PASS
	High channel	1.306	PASS
8DPSK	Low channel	1.308	PASS
	Mid channel	1.293	PASS
	High channel	1.339	PASS

Note: All modes of operation were Pre-scan and the worst-case emissions are reported.

Module2:

Test Mode	Frequency	20dB Bandwidth (MHz)	Result
GFSK	Low channel	0.878	PASS
	Mid channel	0.866	PASS
	High channel	0.915	PASS
$\pi/4$ DQPSK	Low channel	1.282	PASS
	Mid channel	1.289	PASS
	High channel	1.289	PASS
8DPSK	Low channel	1.276	PASS
	Mid channel	1.318	PASS
	High channel	1.298	PASS


Note: All modes of operation were Pre-scan and the worst-case emissions are reported.

Module1:

Test Graph:

GFSK Low channel	
GFSK Mid channel	
GFSK High channel	

$\pi/4$-DQPSK Low channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.402000000 GHz Ref Offset: 7.07 dB Ref: 27.07 dBm Occupied Bandwidth: 1.2104 MHz Total Power: 8.15 dBm Transmit Freq Error: 31.347 kHz x dB Bandwidth: 1.290 MHz OBW Power: 99.00 % x dB: -20.00 dB
$\pi/4$-DQPSK Mid channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.441000000 GHz Ref Offset: 7.13 dB Ref: 27.13 dBm Occupied Bandwidth: 1.2437 MHz Total Power: 7.79 dBm Transmit Freq Error: 34.207 kHz x dB Bandwidth: 1.344 MHz OBW Power: 99.00 % x dB: -20.00 dB
$\pi/4$-DQPSK High channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.480000000 GHz Ref Offset: 7.16 dB Ref: 27.16 dBm Occupied Bandwidth: 1.2382 MHz Total Power: 8.23 dBm Transmit Freq Error: 33.185 kHz x dB Bandwidth: 1.306 MHz OBW Power: 99.00 % x dB: -20.00 dB

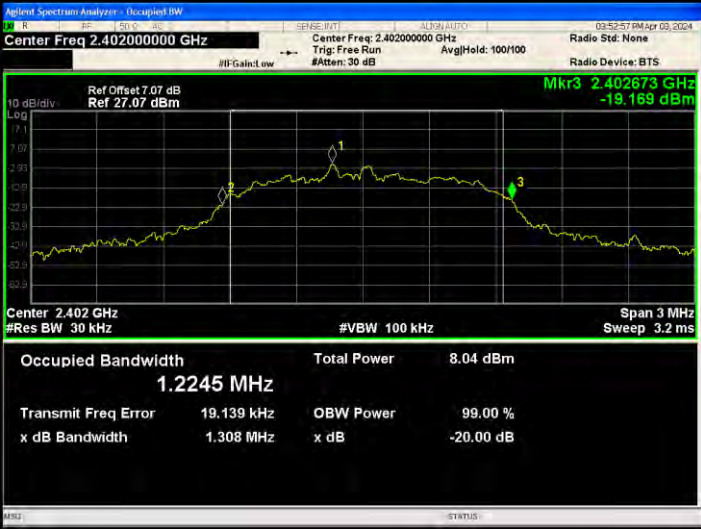
8DPSK Low channel	
8DPSK Mid channel	
8DPSK High channel	

Module2:

Test Graph:


GFSK Low channel	Agilent Spectrum Analyzer - Occupied BW Center Freq 2.40200000 GHz Ref Offset 7.07 dB Ref 27.07 dBm Center 2.402 GHz #Res BW 30 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 819.25 kHz Total Power 8.88 dBm Transmit Freq Error 16.244 kHz OBW Power 99.00 % x dB Bandwidth 877.7 kHz x dB -20.00 dB Mkr3 2.402455 GHz -20.617 dBm
GFSK Mid channel	Agilent Spectrum Analyzer - Occupied BW Center Freq 2.441000000 GHz Ref Offset 7.13 dB Ref 27.13 dBm Center 2.441 GHz #Res BW 30 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 838.38 kHz Total Power 8.46 dBm Transmit Freq Error 15.965 kHz OBW Power 99.00 % x dB Bandwidth 865.7 kHz x dB -20.00 dB Mkr3 2.441449 GHz -19.681 dBm
GFSK High channel	Agilent Spectrum Analyzer - Occupied BW Center Freq 2.480000000 GHz Ref Offset 7.16 dB Ref 27.16 dBm Center 2.48 GHz #Res BW 30 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 823.25 kHz Total Power 8.31 dBm Transmit Freq Error 26.813 kHz OBW Power 99.00 % x dB Bandwidth 915.0 kHz x dB -20.00 dB Mkr3 2.480484 GHz -20.003 dBm

$\pi/4$-DQPSK Low channel	Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.402000000 GHz Ref Offset: 7.07 dB Ref: 27.07 dBm Occupied Bandwidth: 1.1915 MHz Total Power: 8.19 dBm Transmit Freq Error: 22.844 kHz x dB Bandwidth: 1.282 MHz OBW Power: 99.00 % x dB: -20.00 dB
$\pi/4$-DQPSK Mid channel	Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.441000000 GHz Ref Offset: 7.13 dB Ref: 27.13 dBm Occupied Bandwidth: 1.1832 MHz Total Power: 8.35 dBm Transmit Freq Error: 20.960 kHz x dB Bandwidth: 1.289 MHz OBW Power: 99.00 % x dB: -20.00 dB
$\pi/4$-DQPSK High channel	Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.480000000 GHz Ref Offset: 7.16 dB Ref: 27.16 dBm Occupied Bandwidth: 1.1905 MHz Total Power: 8.01 dBm Transmit Freq Error: 20.129 kHz x dB Bandwidth: 1.289 MHz OBW Power: 99.00 % x dB: -20.00 dB

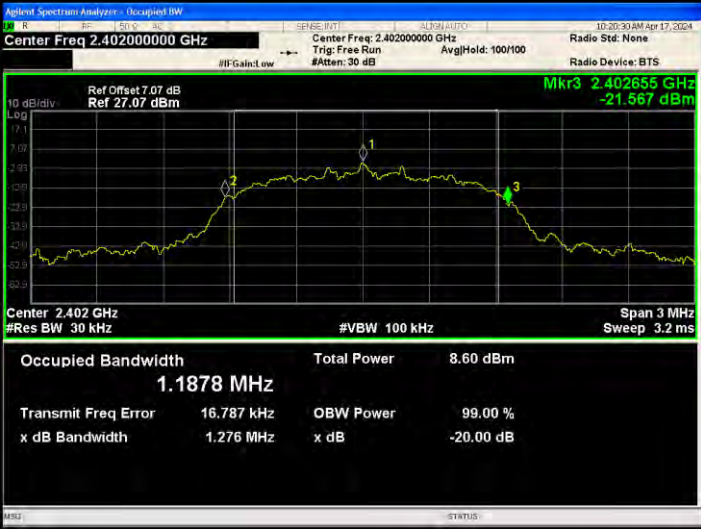8DPSK Low channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.402000000 GHz Ref Offset: 7.07 dB Ref: 27.07 dBm Occupied Bandwidth: 1.1878 MHz Total Power: 8.60 dBm Transmit Freq Error: 16.787 kHz x dB Bandwidth: 1.276 MHz OBW Power: 99.00 % x dB: -20.00 dB
8DPSK Mid channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.441000000 GHz Ref Offset: 7.13 dB Ref: 27.13 dBm Occupied Bandwidth: 1.1956 MHz Total Power: 8.27 dBm Transmit Freq Error: 19.029 kHz x dB Bandwidth: 1.318 MHz OBW Power: 99.00 % x dB: -20.00 dB
8DPSK High channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.480000000 GHz Ref Offset: 7.16 dB Ref: 27.16 dBm Occupied Bandwidth: 1.2060 MHz Total Power: 7.64 dBm Transmit Freq Error: 18.565 kHz x dB Bandwidth: 1.298 MHz OBW Power: 99.00 % x dB: -20.00 dB

11. CARRIER FREQUENCIES SEPARATION

11.1 Block Diagram Of Test Setup

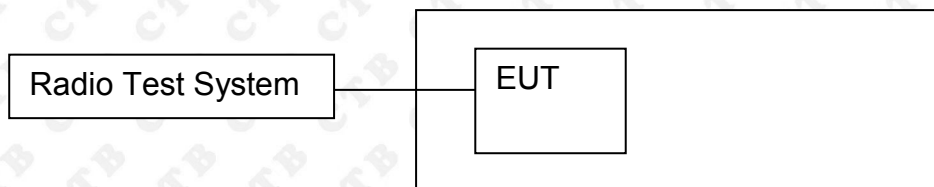

11.2 Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.

11.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz , Span = 2MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

11.4 Test Result

Module1:

Mode	Channel.	Carrier Frequency Separation [MHz]	Limit(2/3 of the 20dB bandwidth MHz)	Verdict
GFSK	LCH	1.004	0.628	PASS
GFSK	MCH	0.996	0.682	PASS
GFSK	HCH	0.996	0.691	PASS
$\pi/4$ DQPSK	LCH	1.004	0.860	PASS
$\pi/4$ DQPSK	MCH	0.996	0.896	PASS
$\pi/4$ DQPSK	HCH	1.004	0.871	PASS
8DPSK	LCH	1.006	0.872	PASS
8DPSK	MCH	0.998	0.862	PASS
8DPSK	HCH	1.006	0.893	PASS



Module2:

Mode	Channel.	Carrier Frequency Separation [MHz]	Limit(2/3 of the 20dB bandwidth MHz)	Verdict
GFSK	LCH	1.000	0.585	PASS
GFSK	MCH	1.000	0.577	PASS
GFSK	HCH	1.000	0.610	PASS
$\pi/4$ DQPSK	LCH	1.000	0.855	PASS
$\pi/4$ DQPSK	MCH	1.000	0.859	PASS
$\pi/4$ DQPSK	HCH	1.000	0.859	PASS
8DPSK	LCH	1.000	0.851	PASS
8DPSK	MCH	1.000	0.879	PASS
8DPSK	HCH	1.000	0.865	PASS


Module1:

Test Graph

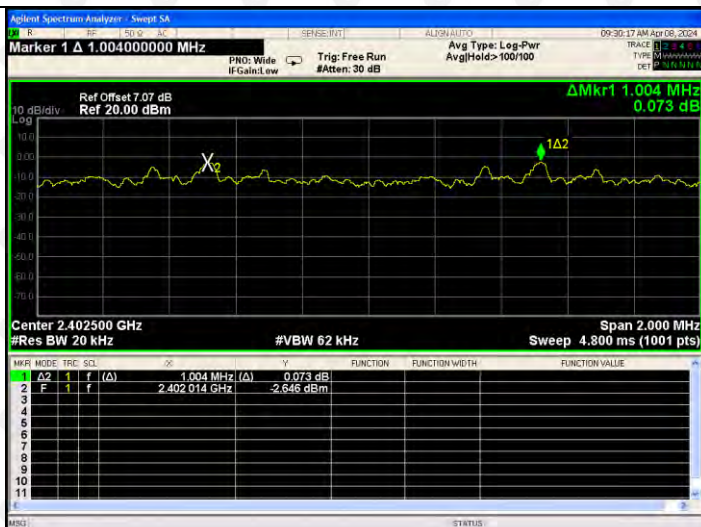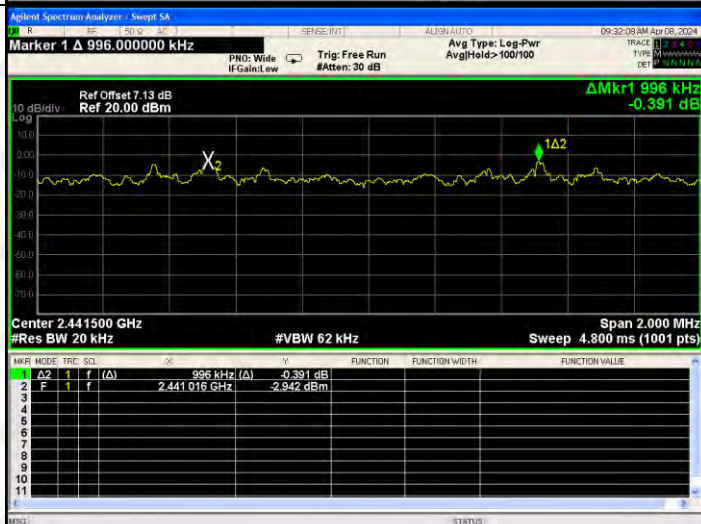


$\pi/4$ DQPSK/LCH

 $\pi/4$ DQPSK/MCH

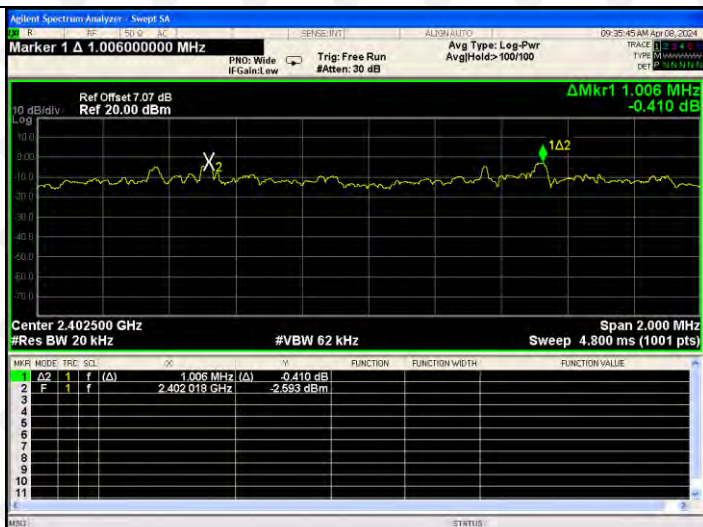 $\pi/4$ DQPSK/HCH



8DPSK/LCH

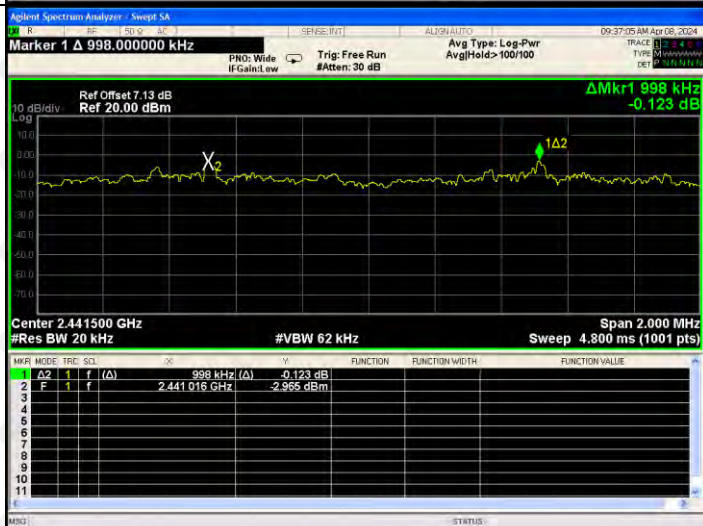

8DPSK /MCH






8DPSK /HCH

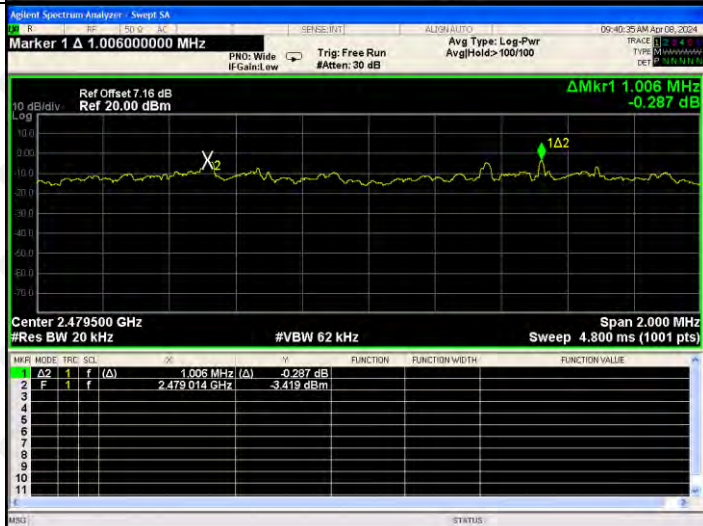


Module2:

Test Graph

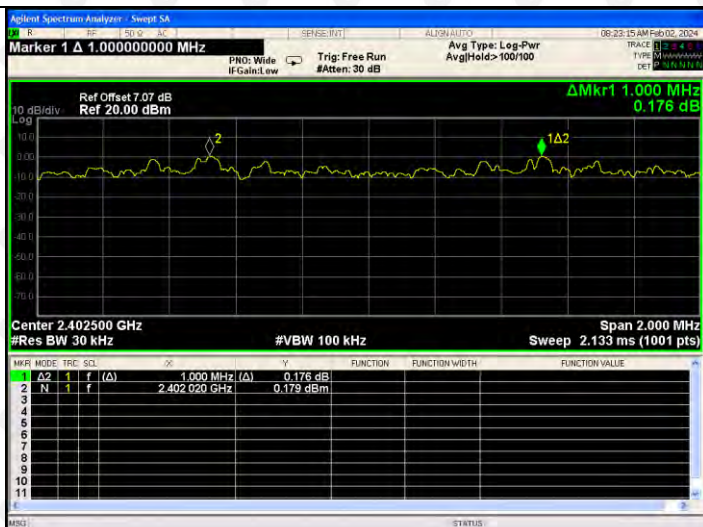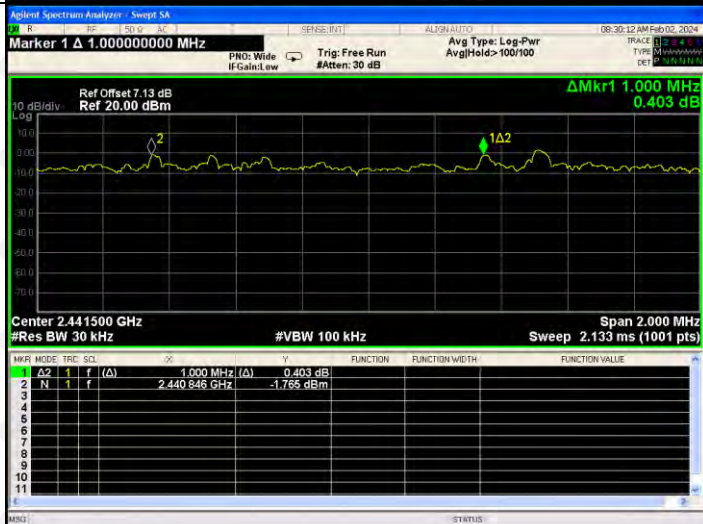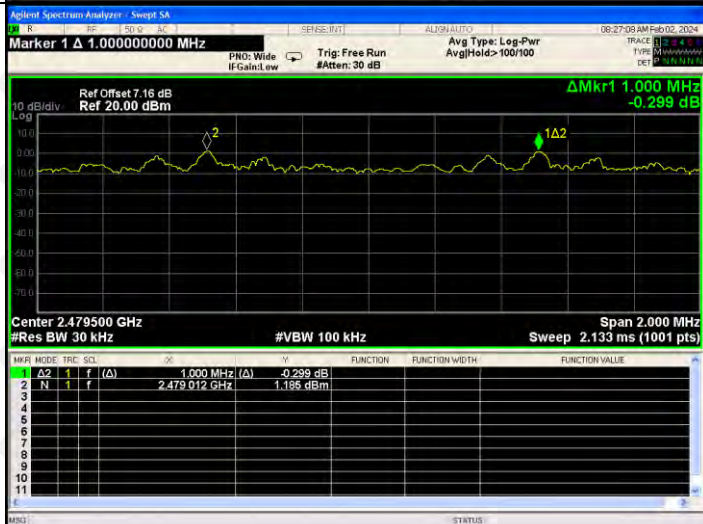


$\pi/4$ DQPSK/LCH

 $\pi/4$ DQPSK/MCH

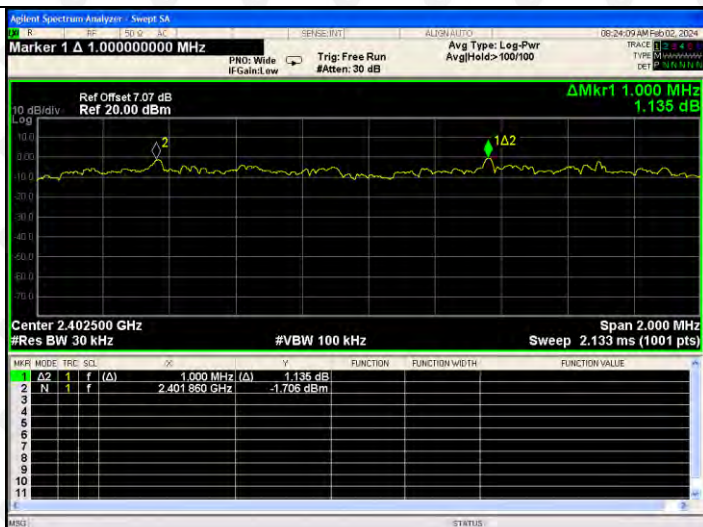 $\pi/4$ DQPSK/HCH


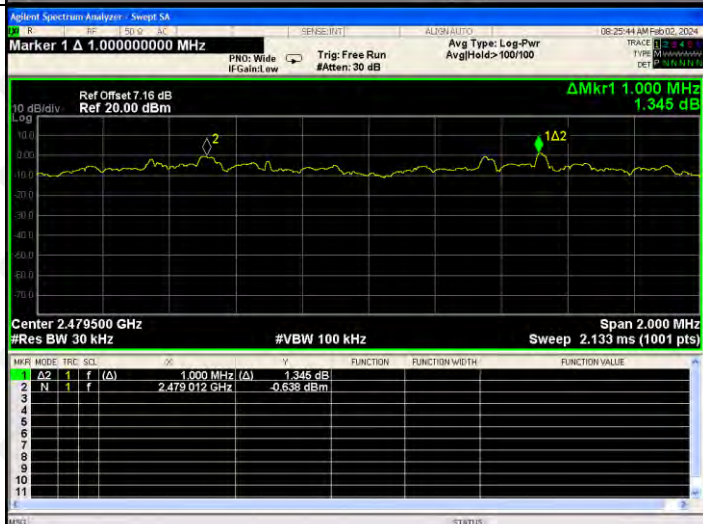
8DPSK/LCH

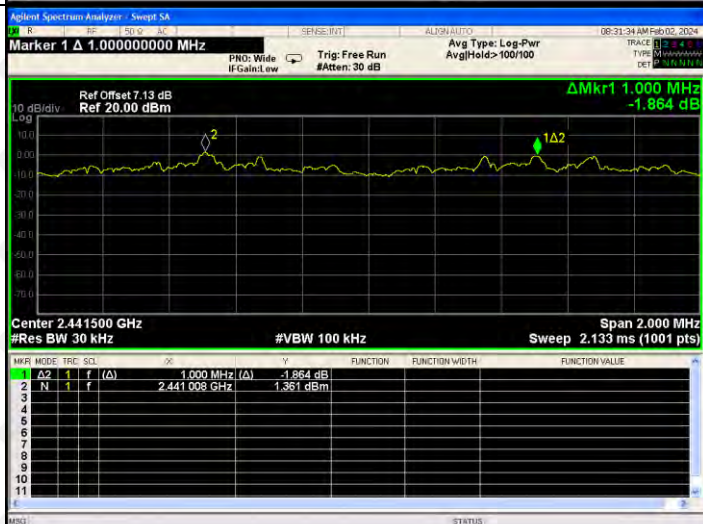

8DPSK /MCH




8DPSK /HCH



12. HOPPING CHANNEL NUMBER

12.1 Block Diagram Of Test Setup

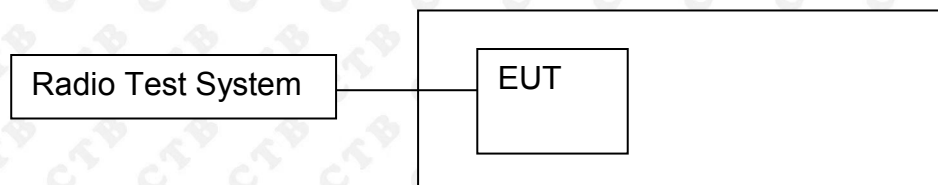

12.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

12.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;

12.4 Test Result

Module1:

Mode	Channel.	Number of Hopping Channel	Limit	Verdict
GFSK	Hop	79	≥ 15	PASS
$\pi/4$ DQPSK	Hop	79	≥ 15	PASS
8DPSK	Hop	79	≥ 15	PASS

Module2:

Mode	Channel.	Number of Hopping Channel	Limit	Verdict
GFSK	Hop	79	≥ 15	PASS
$\pi/4$ DQPSK	Hop	79	≥ 15	PASS
8DPSK	Hop	79	≥ 15	PASS

Module1:

Test Graph

Graphs																																																																																																													
GFSK/Hop	Agilent Spectrum Analyzer - Sweep SA Center Freq 2.441750000 GHz Ref Offset 7.07 dB Ref 20.00 dBm Mkr1 2.402 004 0 GHz 0.932 dBm Start 2.40000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.48350 GHz Sweep 8.000 ms (1001 pts) <table><thead><tr><th>Mkr</th><th>MODE</th><th>TRF</th><th>SQL</th><th>F</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.402 004 0 GHz</td><td>0.932 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.479 993 0 GHz</td><td>1.691 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>4</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></tbody></table>	Mkr	MODE	TRF	SQL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.402 004 0 GHz	0.932 dBm				2	N	1	f	2.479 993 0 GHz	1.691 dBm				3									4									5									6									7									8									9									10									11								
Mkr	MODE	TRF	SQL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	N	1	f	2.402 004 0 GHz	0.932 dBm																																																																																																								
2	N	1	f	2.479 993 0 GHz	1.691 dBm																																																																																																								
3																																																																																																													
4																																																																																																													
5																																																																																																													
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													
$\pi/4$ DQPSK/Hop	Agilent Spectrum Analyzer - Sweep SA Center Freq 2.441750000 GHz Ref Offset 7.07 dB Ref 20.00 dBm Mkr1 2.402 087 5 GHz 1.071 dBm Start 2.40000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.48350 GHz Sweep 8.000 ms (1001 pts) <table><thead><tr><th>Mkr</th><th>MODE</th><th>TRF</th><th>SQL</th><th>F</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.402 087 5 GHz</td><td>1.071 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.479 993 0 GHz</td><td>1.596 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>4</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></tbody></table>	Mkr	MODE	TRF	SQL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.402 087 5 GHz	1.071 dBm				2	N	1	f	2.479 993 0 GHz	1.596 dBm				3									4									5									6									7									8									9									10									11								
Mkr	MODE	TRF	SQL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	N	1	f	2.402 087 5 GHz	1.071 dBm																																																																																																								
2	N	1	f	2.479 993 0 GHz	1.596 dBm																																																																																																								
3																																																																																																													
4																																																																																																													
5																																																																																																													
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													
8DPSK/Hop	Agilent Spectrum Analyzer - Sweep SA Center Freq 2.441750000 GHz Ref Offset 7.07 dB Ref 20.00 dBm Mkr1 2.401 586 5 GHz -4.033 dBm Start 2.40000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.48350 GHz Sweep 8.000 ms (1001 pts) <table><thead><tr><th>Mkr</th><th>MODE</th><th>TRF</th><th>SQL</th><th>F</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.401 586 5 GHz</td><td>-4.033 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.480 410 5 GHz</td><td>-1.969 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>4</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></tbody></table>	Mkr	MODE	TRF	SQL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.401 586 5 GHz	-4.033 dBm				2	N	1	f	2.480 410 5 GHz	-1.969 dBm				3									4									5									6									7									8									9									10									11								
Mkr	MODE	TRF	SQL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	N	1	f	2.401 586 5 GHz	-4.033 dBm																																																																																																								
2	N	1	f	2.480 410 5 GHz	-1.969 dBm																																																																																																								
3																																																																																																													
4																																																																																																													
5																																																																																																													
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													


Module2:

Test Graph



13. DWELL TIME

13.1 Block Diagram Of Test Setup

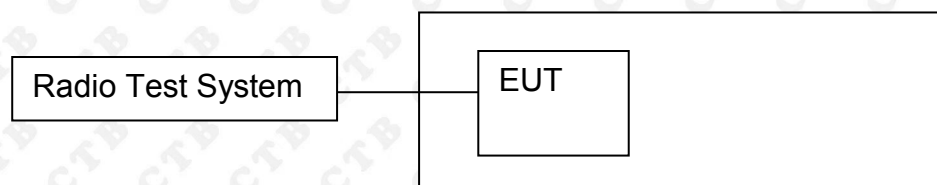

13.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

13.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

13.4 Test Result

Module1:

Worst case-GFSK:

Mode	Packet	Channel	Pulse Time (ms)	Total Dwell Time (ms)	Limit (ms)	Verdict
GFSK	DH1	LCH	0.376	120.32	400	PASS
	DH1	MCH	0.376	120.32	400	PASS
	DH1	HCH	0.376	120.32	400	PASS
	DH3	LCH	1.638	262.08	400	PASS
	DH3	MCH	1.638	262.08	400	PASS
	DH3	HCH	1.638	262.08	400	PASS
	DH5	LCH	2.888	308.053	400	PASS
	DH5	MCH	2.888	308.053	400	PASS
	DH5	HCH	2.889	308.16	400	PASS

Module2:

Worst case-GFSK:

Mode	Packet	Channel	Pulse Time (ms)	Total Dwell Time (ms)	Limit (ms)	Verdict
GFSK	DH1	LCH	0.383	122.56	400	PASS
	DH1	MCH	0.383	122.56	400	PASS
	DH1	HCH	0.382	122.24	400	PASS
	DH3	LCH	1.644	263.04	400	PASS
	DH3	MCH	1.644	263.04	400	PASS
	DH3	HCH	1.644	263.04	400	PASS
	DH5	LCH	2.894	308.693	400	PASS
	DH5	MCH	2.894	308.693	400	PASS
	DH5	HCH	2.894	308.693	400	PASS

Remark: DH5 Packet permit maximum 1600 / 79 / 6 hops per second in each channel (5 time slots RX, 1 time slot TX).

DH3 Packet permit maximum 1600 / 79 / 4 hops per second in each channel (3 time slots RX, 1 time slot TX).

DH1 Packet permit maximum 1600 / 79 / 2 hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:

DH5: $1600/79/6 \times 0.4 \times 79 \times (\text{MkrDelta})/1000$


DH3: $1600/79/4 \times 0.4 \times 79 \times (\text{MkrDelta})/1000$

DH1: $1600/79/2 \times 0.4 \times 79 \times (\text{MkrDelta})/1000$


Remark: Mkr Delta is once pulse time.

Module1:


Test Graph

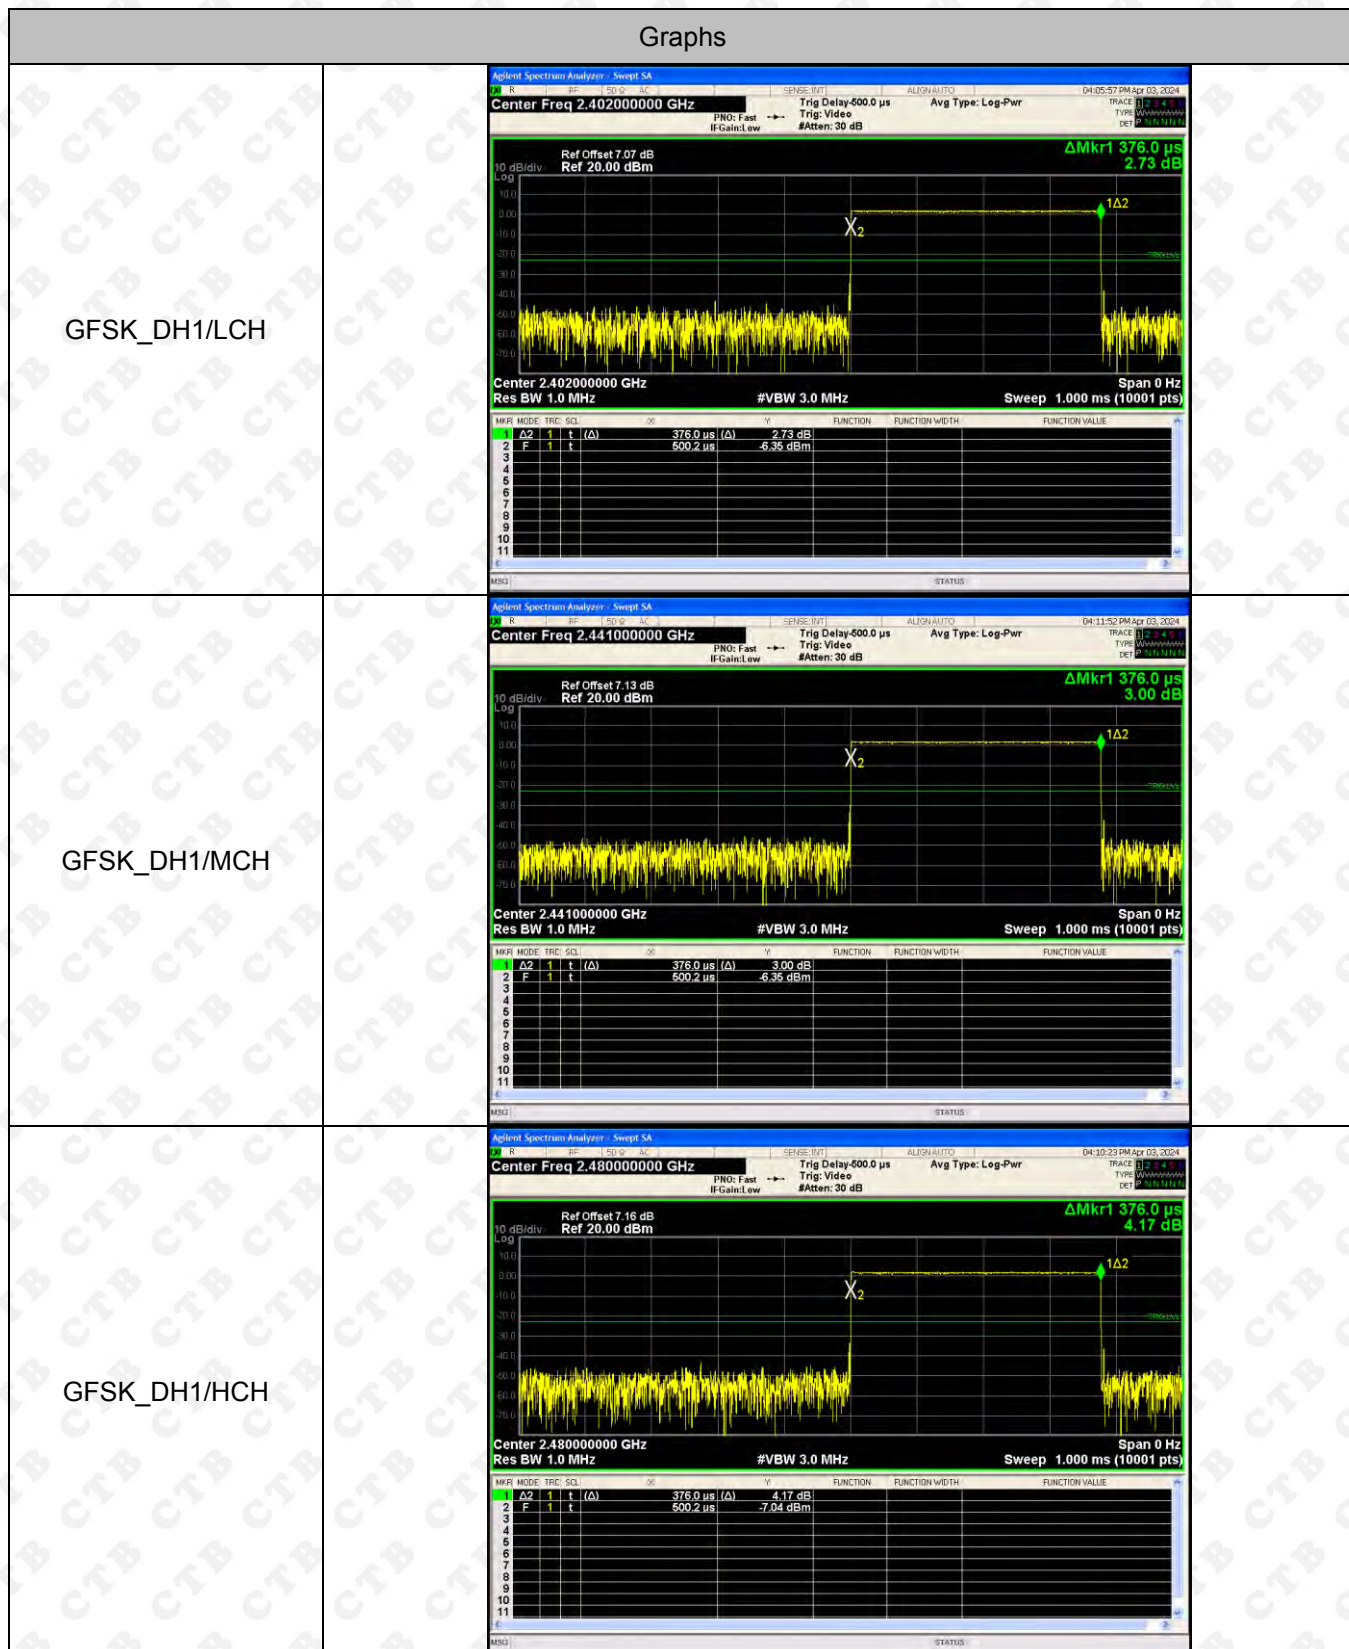


GFSK_DH3/LCH

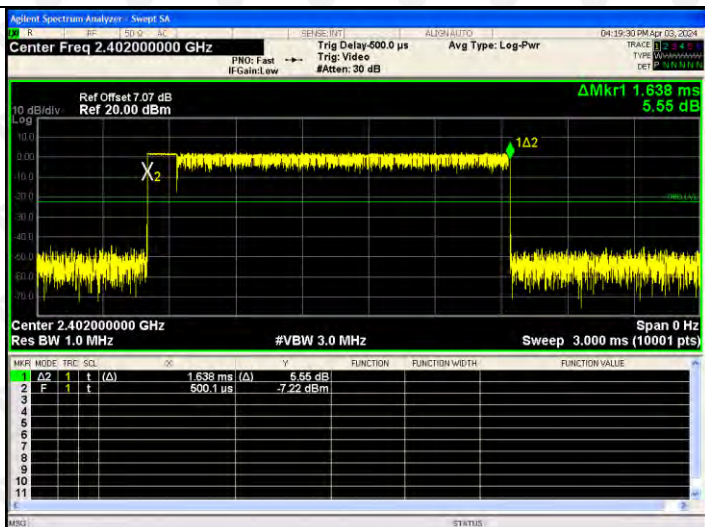


GFSK_DH3/MCH

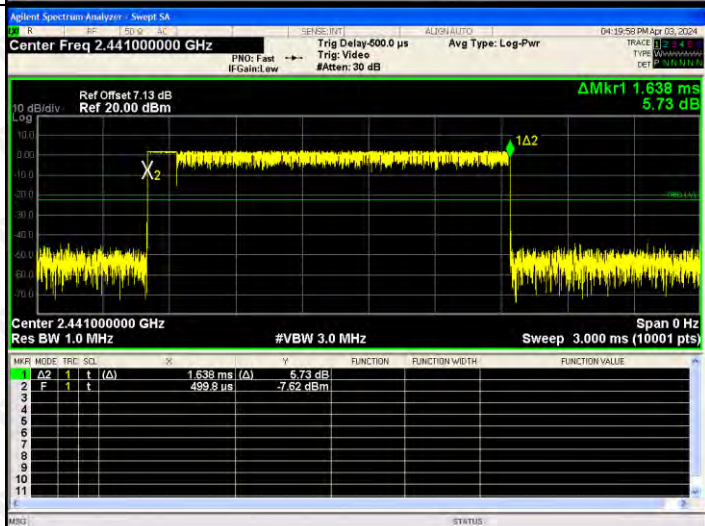


GFSK_DH3/HCH

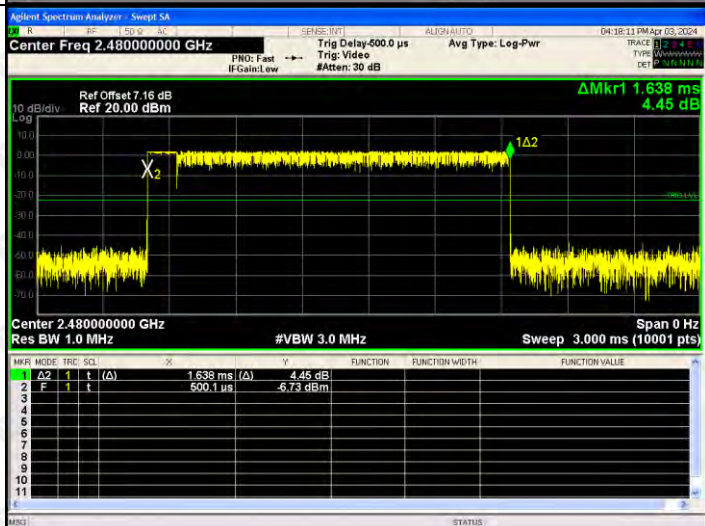


GFSK_DH5/LCH

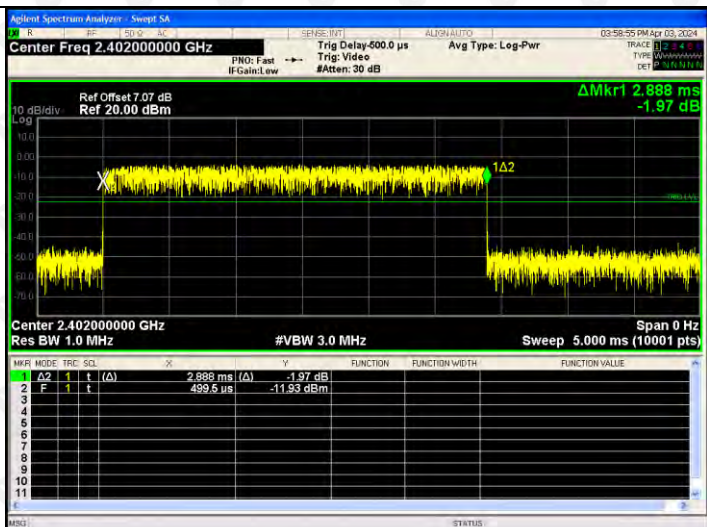

GFSK_DH5/MCH

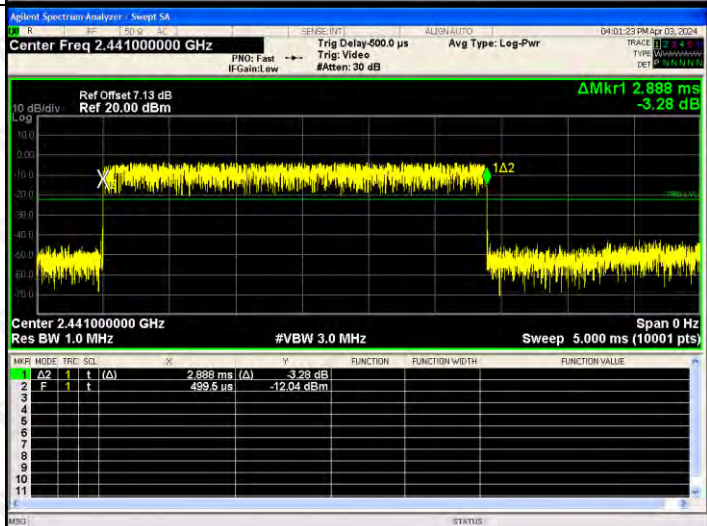


GFSK_DH5/HCH

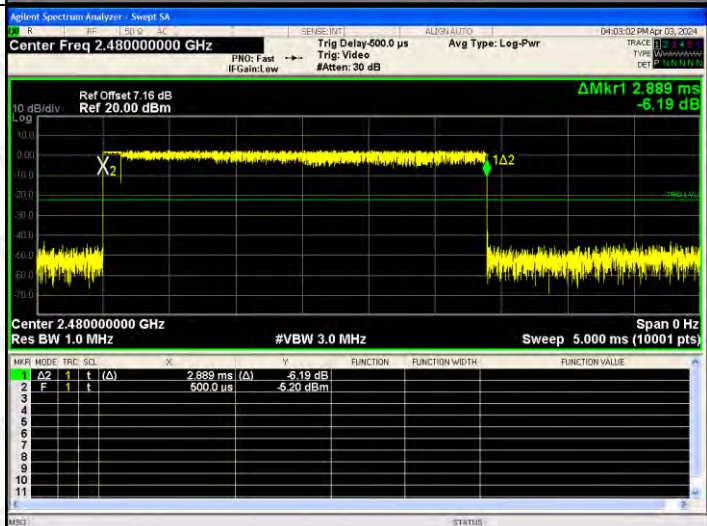


Module2:


Test Graph

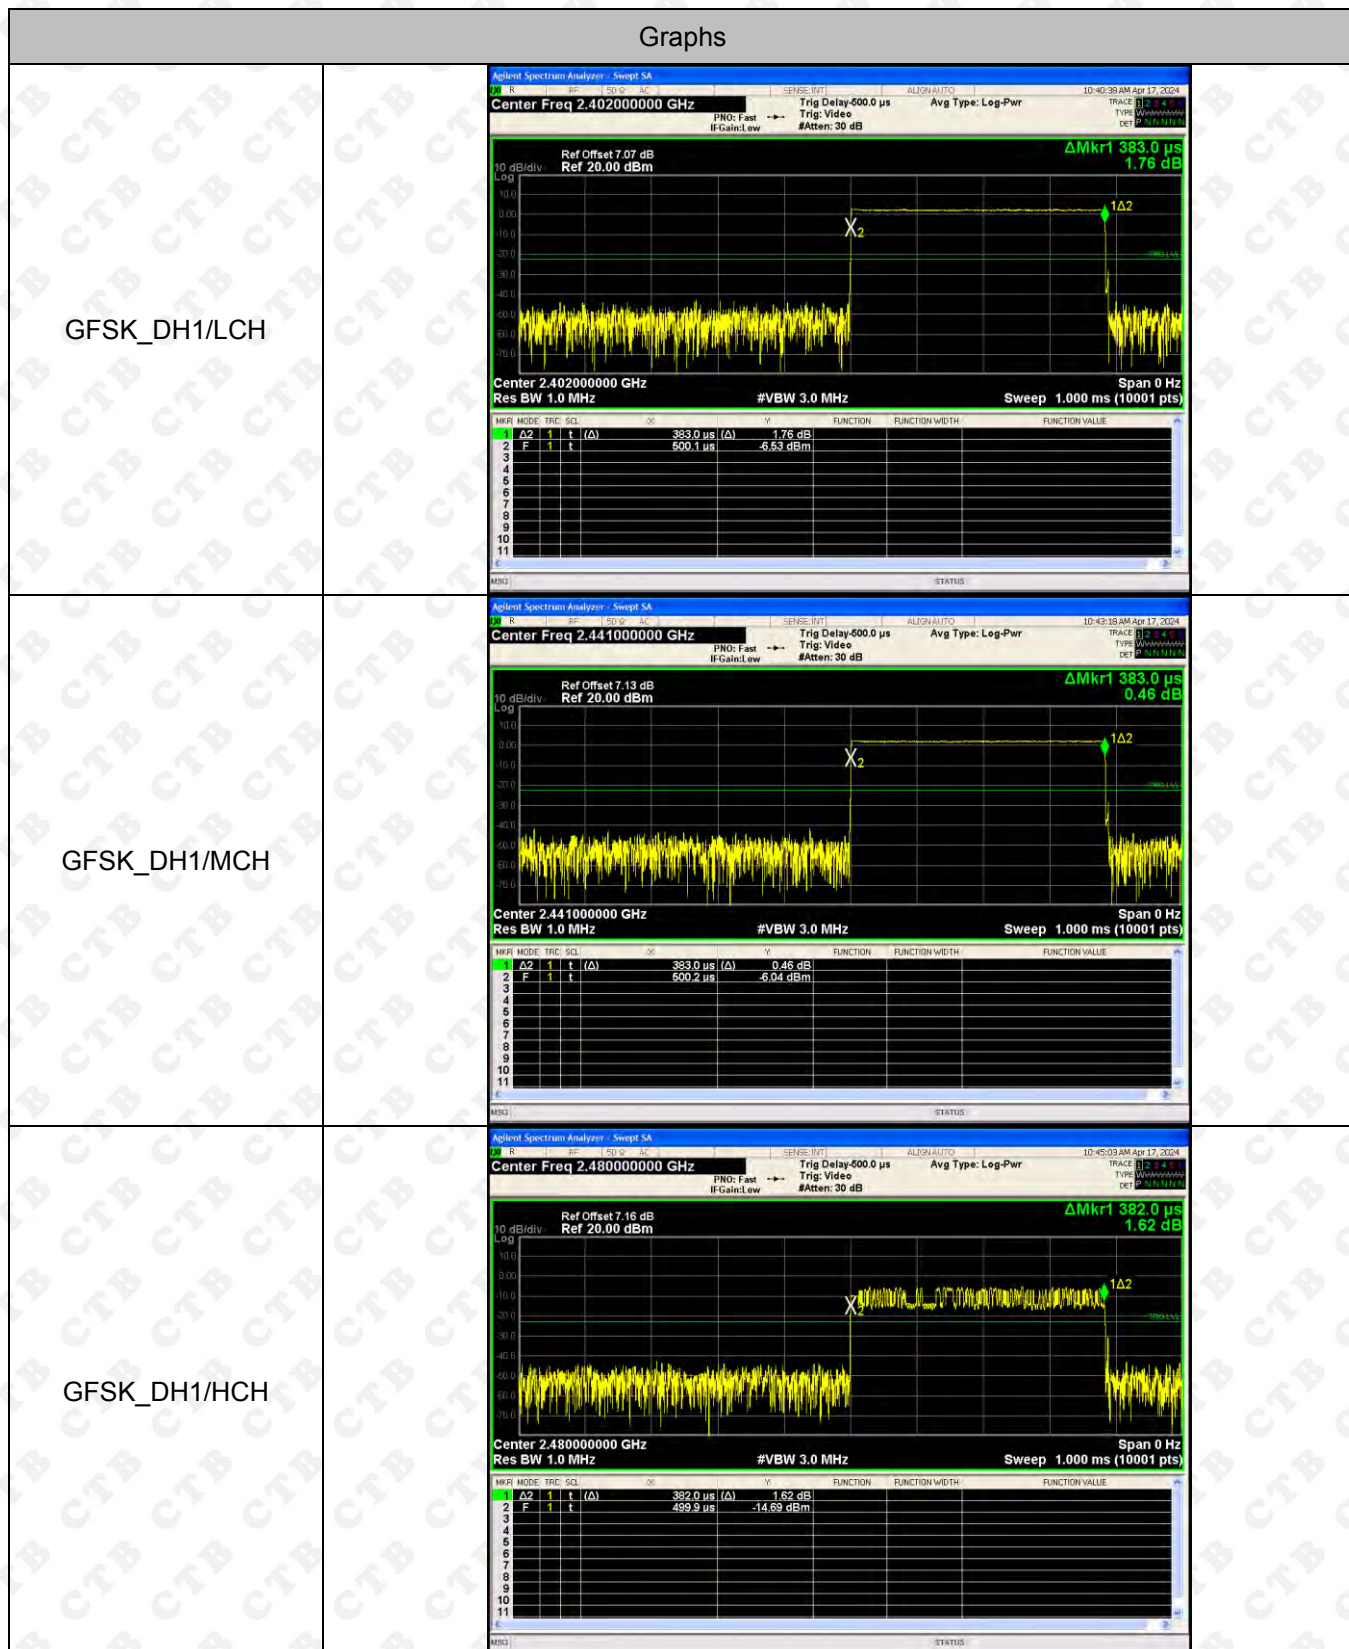


GFSK_DH3/LCH

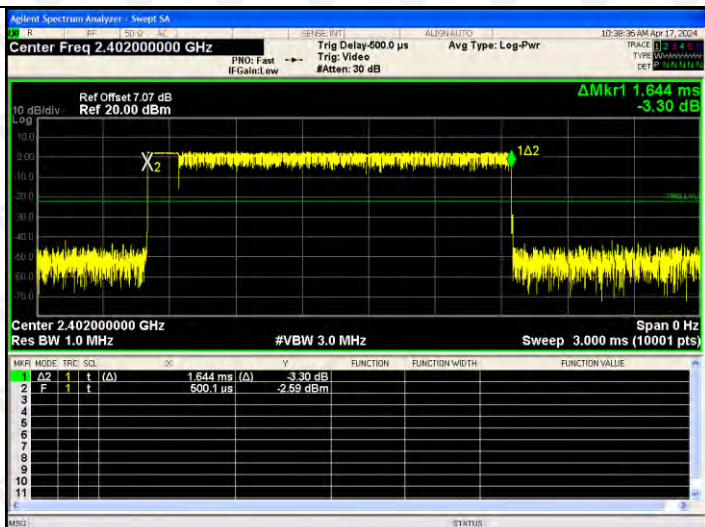


GFSK_DH3/MCH

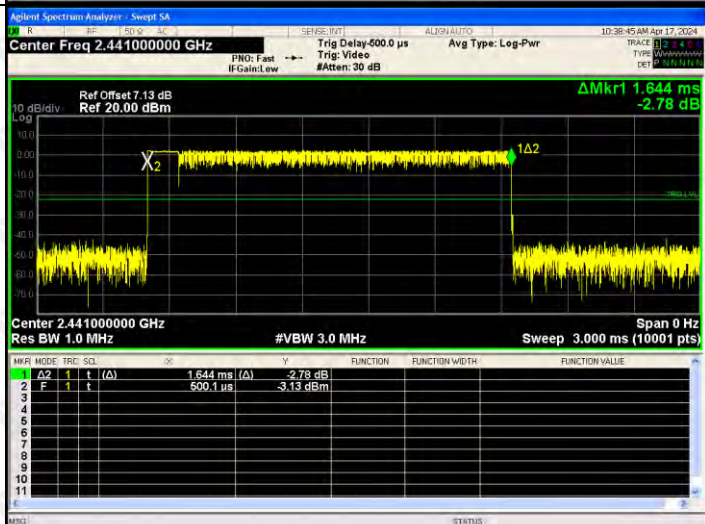


GFSK_DH3/HCH

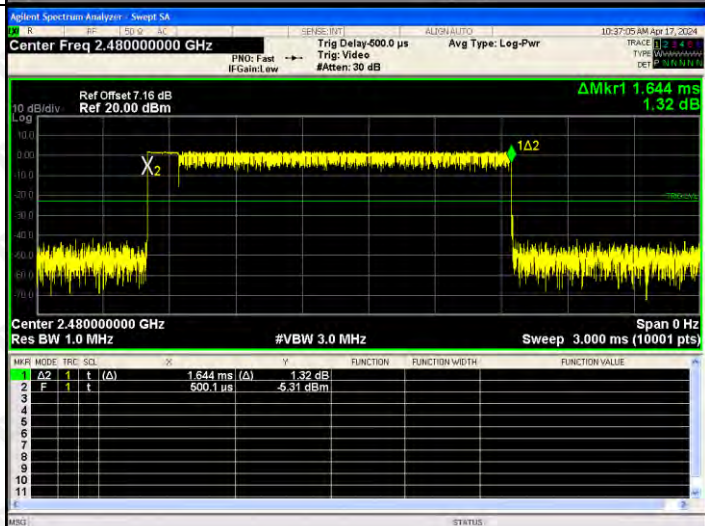


GFSK_DH5/LCH

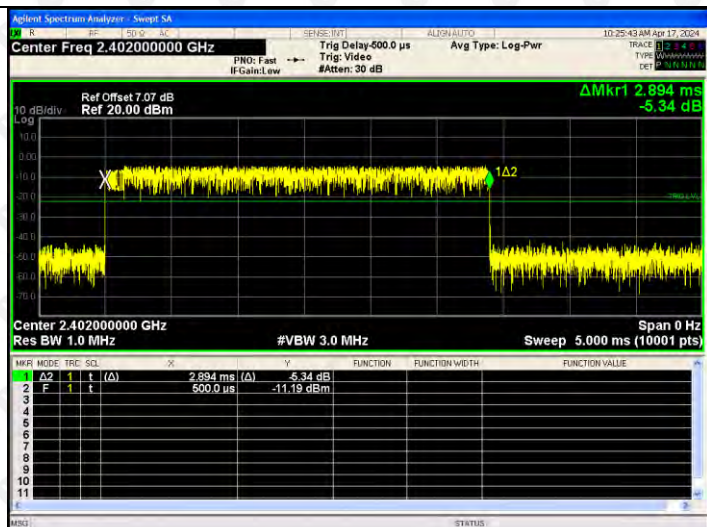

GFSK_DH5/MCH

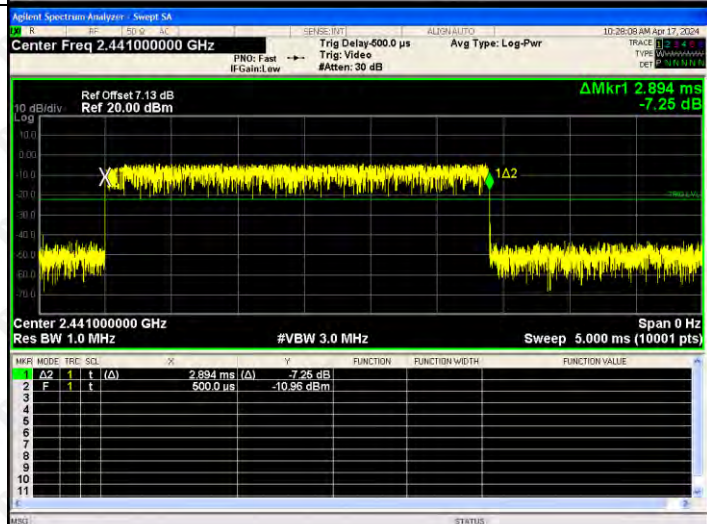

GFSK_DH5/HCH

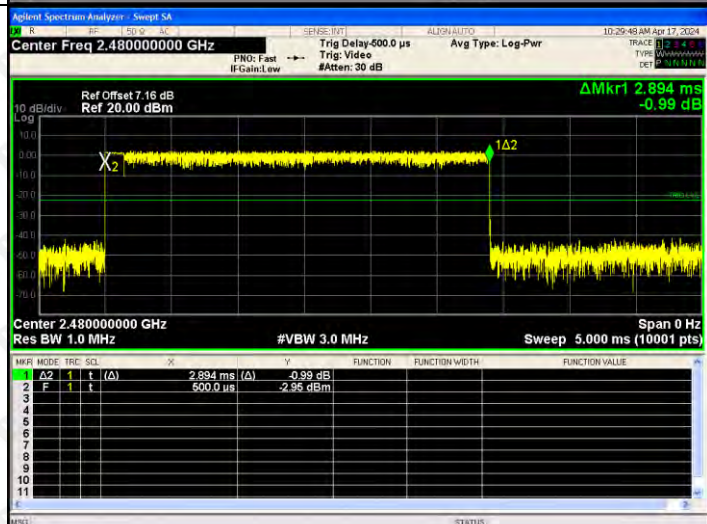

14. PSEUDORANDOM FREQUENCY

14.1 Limit


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.


14.2 Test procedure

The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)

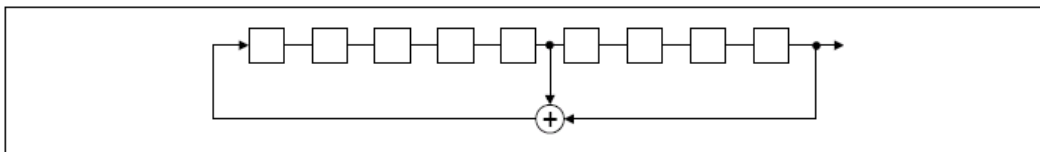

An example of Pseudorandom Frequency Hopping Sequence as follow:

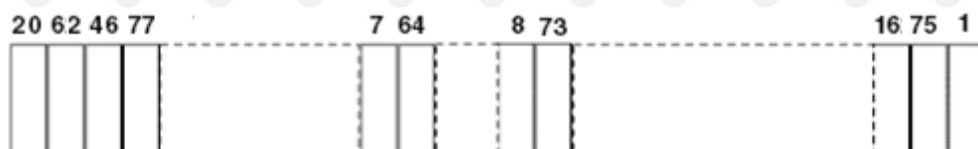

Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

14.3 Test Result

The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

15. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is PCB antenna. The best case gain of the antenna is -0.58dBi.

16. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission

Below 1G



Above 1G



Conducted emissions



***** END OF REPORT *****