

## **EVALUATION REPORT**

### *for Certification*

**Applicant: COZMOS**

**RM210, business incubation center**

**Yeungnam\_ Univ., Gyeongsan,  
South Korea 38541**

**Attn: Changhwa Lee / CEO**

**Date of Issue: Feb. 14, 2022**

**Order Number: GETEC-C1-21-628**

**Test Report Number: GETEC-E3-21-104**

**Test Site: GUMI UNIVERSITY EMC CENTER**

**CAB Designation Number: KR0033**

**RESPONSIBLE PARTY : GSI SYSTEMS INC.**

**ADDRESS : 860 E. La Habra Blvd. #220A La Habra, CA, 90631, USA**

**CONTACT PERSON : Jaemin Lee**

**Rule Part(s)**

**: FCC Part 18**

**Test Method**

**: FCC/OET MP-5**

**Equipment Class**

**: Part 18 Consumer Device(8CC)**

**EUT Type**

**: FACIAL CLEANSING BRUSH**

**Type of Authority**

**: Certification**


**Model Name**

**: CM02**

**This equipment has been shown to be in compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in FCC/OET MP-5 (1986)**


**I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.**

**Tested by,**

  
**Jong-Wook Park / Senior Engineer**  
**GUMI UNIVERSITY EMC CENTER**

**GETEC-QP-16-008 (Rev.01)**

**Reviewed by,**

  
**Hyun Kim / Technical Manager**  
**GUMI UNIVERSITY EMC CENTER**

**EMC CENTER**

**This test report only contains the result of a specific sample supplied by applicant for the testing.  
It is not allowed to copy this report even partly without the approval of EMC center**

**verify No.482399051780**



# Version

Test Report No.	Date	Description
GETEC-E3-21-104	Feb. 14, 2022	- First Approval Report





## CONTENTS

<b>1. GENERAL INFORMATION .....</b>	<b>4</b>
<b>2. INTRODUCTION .....</b>	<b>5</b>
<b>3. PRODUCT INFORMATION .....</b>	<b>6</b>
<b>3.1 DESCRIPTION OF EUT.....</b>	<b>6</b>
<b>3.2 DEFINITION OF MODELS.....</b>	<b>6</b>
<b>3.3 SUPPORT EQUIPMENT / CABLES USED.....</b>	<b>7</b>
<b>3.4 MODIFICATION ITEM(S).....</b>	<b>7</b>
<b>4. DESCRIPTION OF TESTS.....</b>	<b>8</b>
<b>4.1 TEST CONDITION.....</b>	<b>8</b>
<b>4.2 GENERAL TEST PROCEDURES.....</b>	<b>8</b>
<b>5. SUMMARY OF TEST RESULTS .....</b>	<b>9</b>
<b>6. AC POWER LINE CONDUCTED EMISSION .....</b>	<b>10</b>
<b>6.1 OPERATING ENVIRONMENT .....</b>	<b>11</b>
<b>6.2 TEST SET-UP .....</b>	<b>11</b>
<b>6.3 MEASUREMENT UNCERTAINTY.....</b>	<b>11</b>
<b>6.4 LIMIT .....</b>	<b>12</b>
<b>6.5 TEST EQUIPMENT USED.....</b>	<b>12</b>
<b>6.6 TEST DATA FOR CONDUCTED EMISSION .....</b>	<b>12</b>
<b>7. RADIATED EMISSION .....</b>	<b>14</b>
<b>7.1 OPERATING ENVIRONMENT .....</b>	<b>14</b>
<b>7.2 TEST SET-UP .....</b>	<b>14</b>
<b>7.3 MEASUREMENT UNCERTAINTY.....</b>	<b>15</b>
<b>7.4 LIMIT .....</b>	<b>16</b>
<b>7.5 TEST EQUIPMENT USED.....</b>	<b>16</b>
<b>7.6 TEST DATA FOR RADIATED EMISSION.....</b>	<b>17</b>
<b>8. SAMPLE CALCULATIONS.....</b>	<b>18</b>
<b>8.1 EXAMPLE 1 : .....</b>	<b>18</b>
<b>8.2 EXAMPLE 2 : .....</b>	<b>18</b>
<b>9. RECOMMENDATION &amp; CONCLUSION.....</b>	<b>19</b>

### APPENDIX A – ATTESTATION STATEMENT

### APPENDIX B – LABELLING

### APPENDIX C – BLOCK DIAGRAM

### APPENDIX D – SCHEMATIC DIAGRAM

### APPENDIX E – TEST SETUP PHOTOGRAPH

### APPENDIX F – EXTERNAL PHOTOGRAPH

### APPENDIX G – INTERNAL PHOTOGRAPH

### APPENDIX H – USER'S MANUAL

### APPENDIX I – OPERATIONAL DESCRIPTION

### APPENDIX J – ANTENNA SPECIFICATION

### APPENDIX K – PART LIST





**Scope:** Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and / or unintentional radiators for compliance with technical rules and regulations of the Federal Communications Commission.

## 1. General Information

**Applicant:** COZMOS

**Applicant Address:** RM210, business incubation center Yeungnam\_ Univ.,  
Gyeongsan, South Korea 38541

**Applicant:** COZMOS

**Applicant Address:** RM210, business incubation center Yeungnam\_ Univ.,  
Gyeongsan, South Korea 38541

**Contact Person:** Changhwa Lee, CEO

**Tel. Number:** +82-10-2571-7531

● <b>FCC ID.</b>	2A4H4CM02
● <b>Equipment Class</b>	Part 18 Consumer Device(8CC)
● <b>EUT Type</b>	FACIAL CLEANSING BRUSH
● <b>Model Name</b>	CM02
● <b>Rule Part(s)</b>	FCC Part 18
● <b>Test Method</b>	FCC/OET MP-5
● <b>Type of Authority</b>	Certification
● <b>Test Procedure(s)</b>	FCC/OET MP-5
● <b>Dates of Test</b>	Feb. 11, 2022 ~ Feb. 14, 2022
● <b>Place of Test</b>	<b>GUMI UNIVERSITY EMC CENTER</b> (FCC Test firm Registration No.: 269701) 37 Yaeun-ro, Gumi-si, Gyeongsangbuk-do, 730-711, Republic of Korea
● <b>Test Report Number</b>	GETEC-E3-21-104
● <b>Dates of Issue</b>	Feb. 14, 2022





## 2. Introduction

The measurement procedure described in American National Standard for Methods of Measurement of Radio-Nose Emissions From Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (ANSI C63.4-2009) was used in determining radiated and conducted emissions emanating from **COZMOS. FACIAL CLEANSING BRUSH (Model Name: CM02)**.

These measurement tests were conducted at **GUMI UNIVERSITY EMC CENTER**.

The site address is 37 Yaeun-ro, Gumi-si, Gyeongsangbuk-do, 730-711, Republic of Korea

This test site is one of the highest point of GUMI UNIVERSITY at about 200 kilometers away from Seoul city and 40 kilometers away from Daejeon city. It is located in the valley surrounded by mountains in all directions where ambient radio signal conditions are quiet and a favorable area to measure the radio frequency interference on open field test site for the computing and ISM devices manufacturers. The detailed description of the measurement facility was found to be in compliance with the requirements of §2.948 according to ANSI C63.10 (2013)

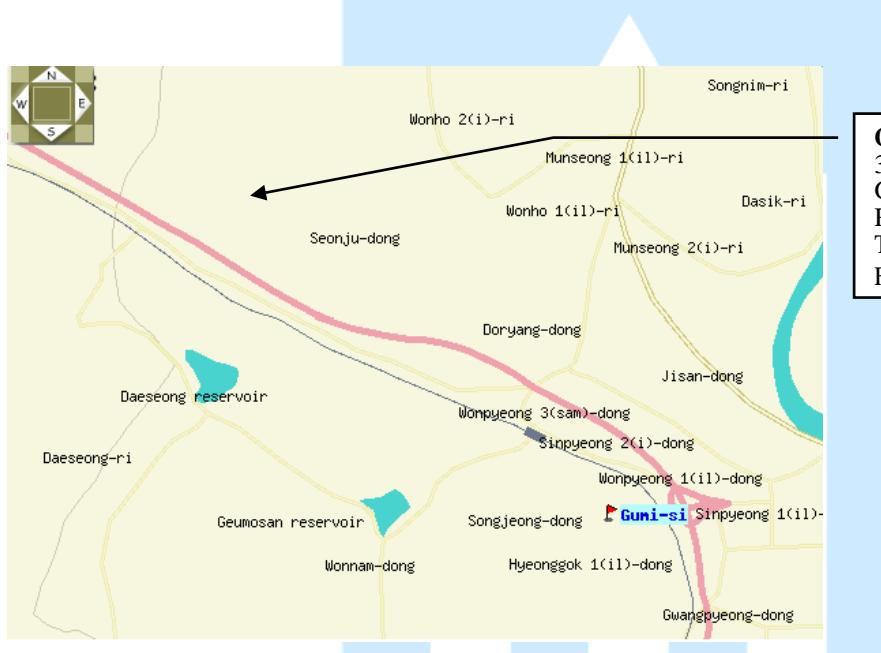


Fig 1. The map above shows the Gumi University in vicinity area.



### 3. Product Information

#### 3.1 Description of EUT

The Equipment under Test (EUT) is the **COZMOS. FACIAL CLEANSING BRUSH (Model Name: CM02) FCC ID.: 2A4H4CM02**

Type of Equipment	FACIAL CLEANSING BRUSH
Model Name	CM02
Serial Number	Prototype
RF Frequency	145 kHz
External connector	DC input 1 EA
Rated Voltage	Input : DC 5 V
Output Electricity Power	Max 1.5 W
Antenna type	WPT Coil
weight	80 g(Cleanser) + 100 g(Charger)

#### 3.2 Definition of models

- None.





### 3.3 Support Equipment / Cables used

#### 3.3.1 Used Support Equipment

Description	Manufacturer	Model Name	S/N & FCC ID.
AC-DC Adapter	Apple, Inc.	A1487	S/N: None. FCC ID.: None.

#### 3.3.2 System configuration

Description	Manufacturer	Model Name	S/N & FCC ID.
-	-	-	-

#### 3.3.3 Used Cable(s)

Cable Name	Condition	Description
Power cable	Connected to the EUT and DC power supply	0.50 m Unshielded.

### 3.4 Modification Item(s)

- None





## 4. Description of tests

### 4.1 Test Condition

The EUT was installed, arranged and operated in a manner that is most representative of equipment as typically used. The measurements were carried out while varying operating modes and cable positions within typically arrangement to determine maximum emission level.

The representative and worst test mode(s) were noted in the test report.

- Test Voltage / Frequency: 5 V / DC

- Operating condition during the test(s) :

This device has been tested in the configurations of charging mode

Charging Current	Support Equipment	Comment
300 mA	Cleanser	

### 4.2 General Test Procedures

#### Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 (2014) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

#### Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which Fixed at 2 m above the ground plane to find out the highest emission.


And also, each emission was to be maximized by the table was turned from 0 degrees to 360 degrees. In order to find out the max emission, the relative positions of this hand-held transmitter (EUT) were rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4 (2014).





## 5. SUMMARY OF TEST RESULTS

FCC Part Section(s)	Test Description	Test Result
§18.305	Radiated Spurious Emissions	Pass
§18.307	AC Power line Conducted Emissions	Pass

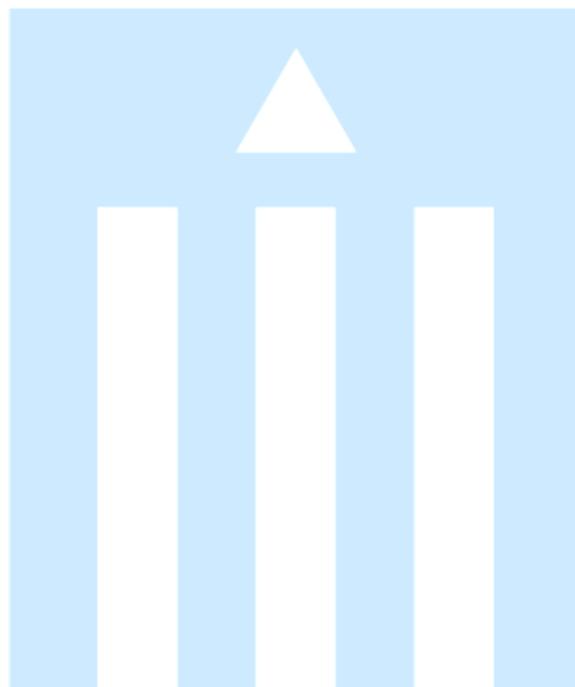



## 6. AC Power line Conducted emission

### -Test Description

The Line conducted emission test facility is inside a 4 m  $\times$  8 m  $\times$  2.5 m shielded enclosure. (Test firm Registration Number: 269701)

The EUT was placed on a non-conducting 1.0 m by 1.5 m table, which is 0.8 m in height and 0.4 m away from the vertical wall of the shielded enclosure.

The EUT is powered from the Rohde & Schwarz LISN (ENV216) and the support equipment is powered from the Rohde & Schwarz LISN (ENV216). Powers to the LISN are filtered by high-current high insertion loss power line filter.

Sufficient time for EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

The RF output of the LISN was connected to the EMI test receiver (Rohde & Schwarz, ESCI).

Exploratory measurements were conducted to identify the highest emission by operating the EUT in a range of typical modes of operation, cable positions, system configuration and arrangement.

Based on exploratory measurements, the final measurements were conducted at the worst test conditions.

Exploratory measurements were scanned using Peak mode of EMI Test receiver from 150 kHz to 30 MHz with 20 ms sweep time. The final measurements were measured with Quasi-Peak and Average mode.

The bandwidth of EMI Test Receiver was set to 9 kHz. Interface cables were connected to the available interface ports of the test unit. Excess cable lengths were bundled at center with 30 cm  $\sim$  40 cm.

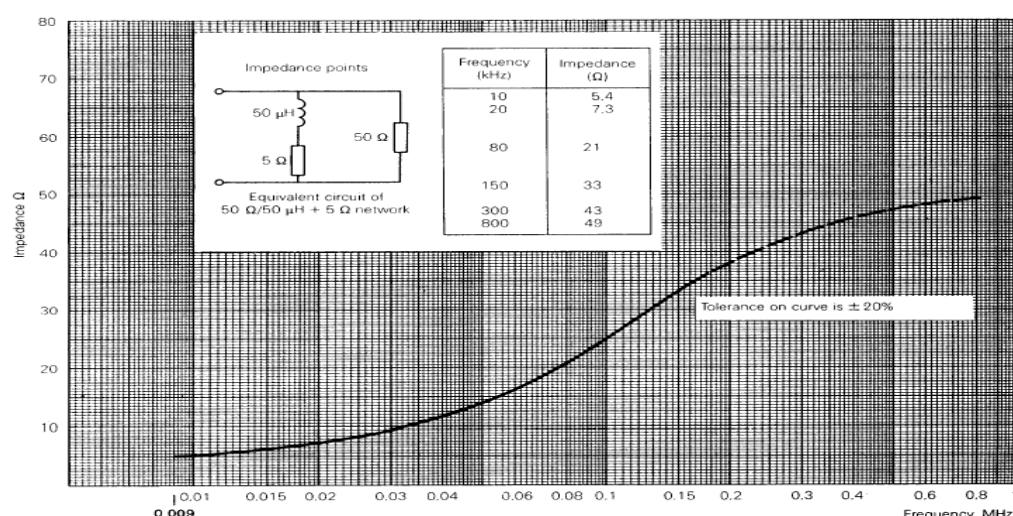


Fig 2. Impedance of LISN



## 6.1 Operating Environment

Temperature : 24.9 °C  
Relative Humidity : 16.8 % R.H.

## 6.2 Test Set-up

The conducted emission measurements were performed in the shielded room.

The EUT was placed on wooden table, 0.8 m heights above the floor, 0.4 m from the reference ground plane (GRP) wall and 0.8 m from AMN & ISN.

AMN is bonded on horizontal reference ground plane.

The ground plane, which was electrically bonded to the shield room, ground system and all power lines entering the shield room, were filtered.

## 6.3 Measurement Uncertainty

The measurement uncertainty was calculated in accordance with ISO "Guide to the expression of uncertainty in measurement."

The measurement uncertainty was given with a confidence of 95 %.

Test Items	Uncertainty	Remark
Conducted emission (9 kHz ~ 150 kHz)	3.78 dB	Confidence level of approximately 95 % ( $k = 2$ )
Conducted emission (150 kHz ~ 30 MHz)	3.31 dB	Confidence level of approximately 95 % ( $k = 2$ )

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

The listed uncertainties are the worst case uncertainty for the entire range of measurement. please note that the uncertainty values are provided for informational purposes only are not used in determining the PASS/FAIL results





#### 6.4 Limit

RFI Conducted	FCC Limit(dB $\mu$ V/m) Class B	
Freq. Range	Quasi-Peak	Average
150 kHz ~ 0.5 MHz	66 ~ 56*	56 ~ 46*
0.5 MHz ~ 5 MHz	56	46
5 MHz ~ 30 MHz	60	50

\*Limits decreases linearly with the logarithm of frequency.

#### 6.5 Test Equipment used


Model Name	Manufacturer	Description	Serial Number	Due to Calibration
■- ESCI	Rohde & Schwarz	EMI test receiver	100237	Apr. 08, 2022
□- ENV216	Rohde & Schwarz	LISN	100172	Apr. 07, 2022
■- ENV216	Rohde & Schwarz	LISN	100173	Apr. 07, 2022
□- EMC 32	Rohde & Schwarz	Testing Software	VER8.53	N/A

#### 6.6 Test data for Conducted Emission

- Test Date : Feb. 14, 2021
- Reference Standard : FCC Part 18
- Test Procedure(s) : FCC/OET MP-5
- Operating Condition : Charge mode
- Power Source : AC 120 V / 60 Hz
- Frequency range : 0.15 MHz to 30 MHz
- Line : AC power line (L, N)
- Comment : -



### AC power line Conducted Emission

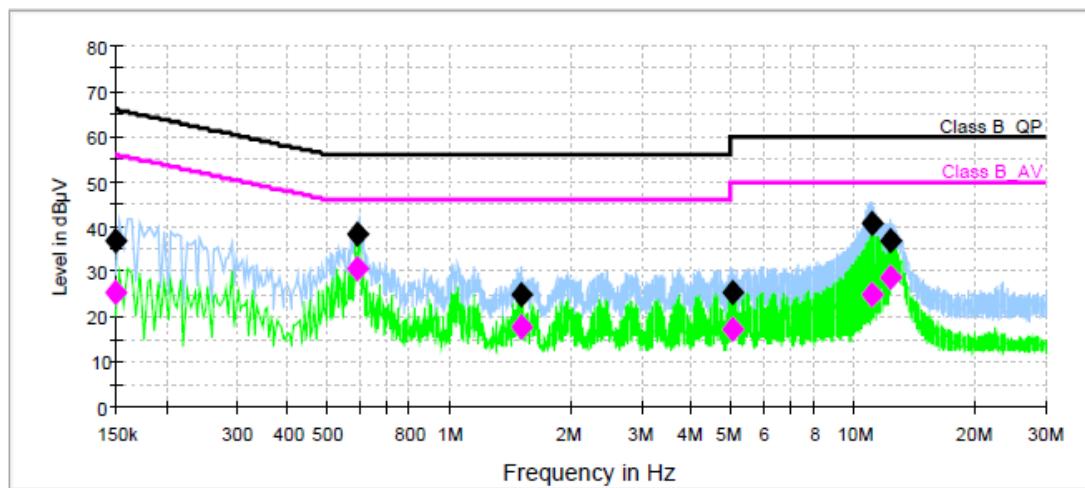

— Class B\_QP  
— Preview Result 2-AVG      ♦ Class B\_AV  
Preview Result 1-PK+      Final Result 1-QPK      ♦ Final Result 2-CAV

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)	Comment
0.150000	37.0	1000.0	9.000	Off	L1	9.6	29.0	66.0	
0.597981	38.4	1000.0	9.000	Off	L1	9.6	17.6	56.0	
1.504944	24.9	1000.0	9.000	Off	L1	9.7	31.1	56.0	
5.009931	25.2	1000.0	9.000	Off	L1	9.8	34.8	60.0	
11.068944	40.7	1000.0	9.000	Off	N	9.9	19.3	60.0	
12.364494	36.8	1000.0	9.000	Off	L1	9.9	23.2	60.0	

Frequency (MHz)	CAverage (dB $\mu$ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)	Comment
0.150000	25.3	1000.0	9.000	Off	L1	9.6	30.7	56.0	
0.597981	30.7	1000.0	9.000	Off	L1	9.6	15.3	46.0	
1.504944	17.8	1000.0	9.000	Off	L1	9.7	28.2	46.0	
5.009931	17.4	1000.0	9.000	Off	L1	9.8	32.6	50.0	
11.068944	24.9	1000.0	9.000	Off	N	9.9	25.1	50.0	
12.364494	28.6	1000.0	9.000	Off	L1	9.9	21.4	50.0	





## 7. Radiated Emission

### 7.1 Operating Environment

Temperature : 16.1 °C  
Relative Humidity : 44.5 % R.H.

### 7.2 Test Set-up

The Radiated emission measurements were conducted at the worst test conditions.

The measurements of below 1 GHz were made at 3 m Semi Anechoic Chamber or 10 m Semi Anechoic Chamber (FCC Test Firm Registration No.: 269701) that complies with CISPR 16/ANSI C63.4.

The frequency range of 9 kHz to 30 MHz. The EUT was placed on a non-conductive turntable approximately 0.8 m above the ground plane. The turntable with EUT was rotated 360° and the receive antenna was fixed 2.0 m on the ground plane.

The frequency range of 30 MHz to 1 000 MHz, The EUT was placed on a non-conductive turntable approximately 0.8 m above the ground plane. The turntable with EUT was rotated 360° and adjusting the receive antenna height from 1.0 m to 4.0 m. All frequencies were investigated in both horizontal and vertical antenna polarity.

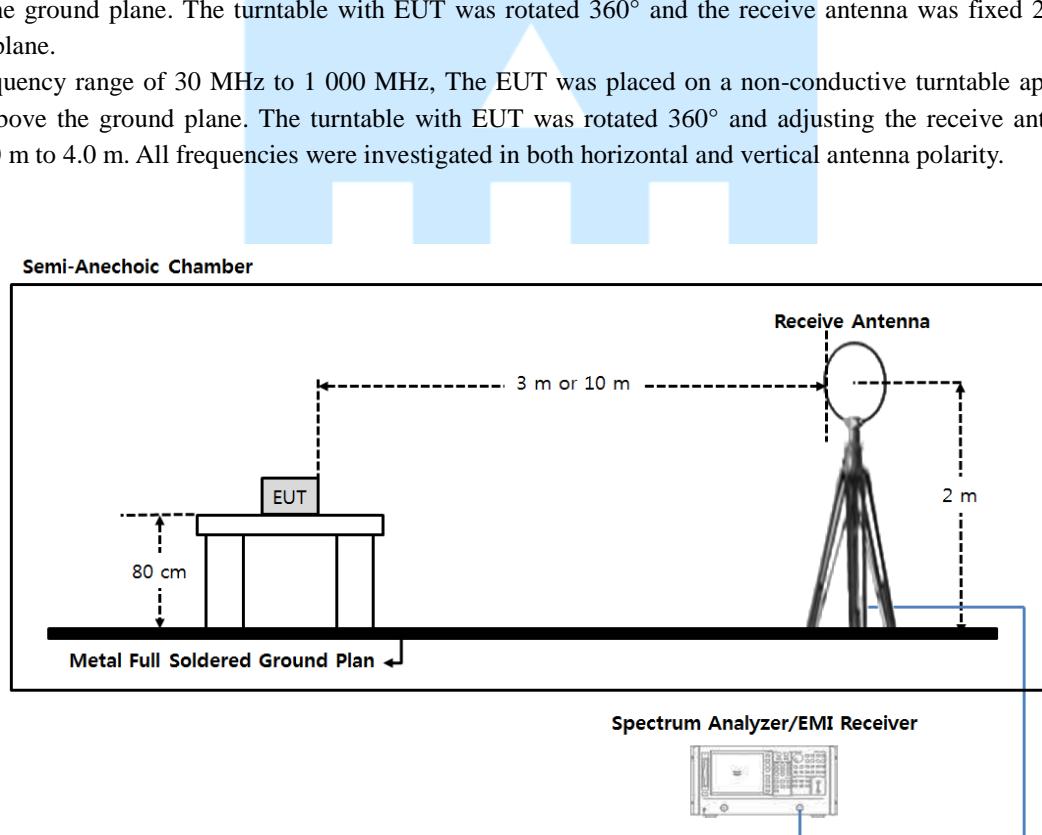


Fig 3. Configurations of Radiated emission test (9 kHz to 30 MHz)

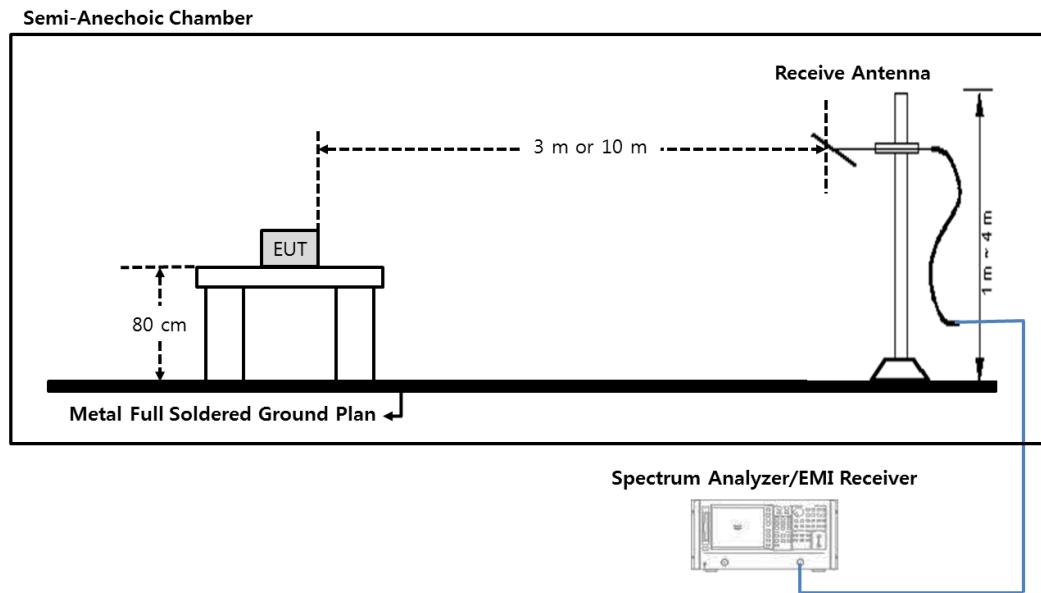


Fig 4. Configurations of Radiated emission test (30 MHz to 1 000 MHz)

### 7.3 Measurement Uncertainty

The measurement uncertainty was calculated in accordance with ISO “Guide to the expression of uncertainty in measurement”.

The measurement uncertainty was given with a confidence of 95 %.

Test Items(Anechoic Chamber)	Uncertainty	Remark
Radiated emission (30 MHz ~ 300 MHz, 3 m, Vertical)	5.14 dB	Confidence level of approximately 95 % ( $k = 2$ )
Radiated emission (30 MHz ~ 300 MHz, 3 m, Horizontal)	5.10 dB	Confidence level of approximately 95 % ( $k = 2$ )
Radiated emission (300 MHz ~ 1 000 MHz, 3 m, Vertical)	6.05 dB	Confidence level of approximately 95 % ( $k = 2$ )
Radiated emission (300 MHz ~ 1 000 MHz, 3 m, Horizontal)	5.19 dB	Confidence level of approximately 95 % ( $k = 2$ )
Radiated emission (1 000 MHz ~ 6 000 MHz, 3 m)	5.20 dB	Confidence level of approximately 95 % ( $k = 2$ )
Radiated emission (6 000 MHz ~ 18 000 MHz, 3 m)	5.20 dB	Confidence level of approximately 95 % ( $k = 2$ )

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

The listed uncertainties are the worst case uncertainty for the entire range of measurement. please note that the uncertainty values are provided for informational purposes only are not used in determining the PASS/FAIL results





#### 7.4 Limit

Equipment	Operating frequency	RF Power generated by equipment (watts)	Field strength limit ( $\mu$ V/m)	Distance (meters)
Any type unless otherwise specified (miscellaneous)	Any ISM frequency	Below 500 500 or more	25 $25 \times \text{SQRT}(\text{power}/500)$	300 <sup>1</sup> 300
	<u>Any non-ISM frequency</u>	<u>Below 500</u> 500 or more	<u>15</u> $15 \times \text{SQRT}(\text{power}/500)$	<u>300</u> <sup>1</sup> 300
Industrial heaters and RF stabilized arc welders	On or below 5,725 MHz Above 5,725 MHz	Any Any	10 <sup>(2)</sup>	1,600 <sup>(2)</sup>
Medical diathermy	Any ISM frequency Any non-ISM frequency	Any Any	25 15	300 300
Ultrasonic	Below 490 kHz	Below 500 500 or more	$2,400/F(\text{kHz})$ $2,400/F(\text{kHz}) \times \text{SQRT}(\text{power}/500)$	300 <sup>3</sup> 300
	490 to 1,600 kHz Above 1,600 kHz	Any Any	$24,000/F(\text{kHz})$ 15	30 30
Induction cooking ranges	Below 90 kHz On or above 90 kHz	Any Any	1,500 300	<sup>4</sup> 30 <sup>4</sup> 30

Note.

- 1) Field strength may not exceed 10  $\mu$ V/m at 1600 meters. Consumer equipment operating below 1000 MHz is not permitted the increase in field strength otherwise permitted here for power over 500 watts.
- 2) Reduced to the greatest extent possible.
- 3) Field strength may not exceed 10  $\mu$ V/m at 1600 meters. Consumer equipment is not permitted the increase in field strength otherwise permitted here for over 500 watts.
- 4) Induction cooking ranges manufactured prior to February 1, 1980, shall be subject to the field strength limits for miscellaneous ISM equipment.

#### 7.5 Test Equipment used

Model Name	Manufacturer	Description	Serial Number	Due to Calibration
■ - ESU 40	Rohde & Schwarz	EMI Test Receiver	100266	Apr. 08, 2022
■ - HFH2-Z2	Rohde & Schwarz	Loop ANT	100041	Apr. 28, 2022
□ - VULB9160	Schwarzbeck	Broad Band Test Antenna	3313	Apr. 08, 2022
□ - BBHA9120D	Schwarzbeck	Horn ANT	207	Sep. 15, 2022
■ - MCU066	maturo GmbH	Position Controller	1390306	N/A
■ - TT2.5SI	maturo GmbH	Turntable	1390307	N/A
□ - AM 4.0	maturo GmbH	Antenna Mast	1390308	N/A

All test equipment used is calibrated on a regular basis.





## 7.6 Test data for Radiated Emission

- Test Date : Feb. 14, 2022
- Measurement Distance : 3 m
- Note : frequency range to be scanned up to 30 MHz, because the frequency band in which the EUT operates less than 1.705 MHz

### - Measurement setting

Frequency range	9 kHz ~ 150 kHz	0.15 MHz ~ 30 MHz
Detector mode	Average	Average
Resolution bandwidth	200 Hz	9 kHz

### - Measurement Data: Wireless charging mode (5 W)

Division	Frequency [MHz]	Detector mode	ANT Pol.	Reading [dBuV]	T.F [dB/m]	Field Strength [dBuV/m]		Limits [dBuV/m]		Margin [dB]
						3 m	300 m	3 m	300 m	
F	0.145	AV	V1	52.73	19.4	72.13	-7.87	103.52	23.52	31.39
S	0.035	AV	V1	38.27	19.5	57.77	-22.23	103.52	23.52	45.75
S	0.291	AV	V1	35.64	19.3	54.94	-25.06	103.52	23.52	48.58

Note.1 The worst case data were reported

And no other spurious and harmonic emissions were reported greater than listed emission above table

Note.2 "F"=Fundamental / "S"=Spurious / "\*" = Noise Floor

Note.3 All measurements were recorded using a spectrum analyzer employing a peak detector for below 30 MHz

Note.4 Distance Correction Factor

For 300 m:  $40 \log(300/3) = 80$  dB

Note.5 Sample calculation

$$T.F = AF + CL - AG$$

$$\text{Field Strength} = \text{Reading} + T.F$$

$$\text{Margin} = \text{Limit} - \text{Field Strength}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain

Note.6 "V1"= Vertical and perpendicular to the centerline / "V2"=vertical and parallel to the centerline

"H" = horizontal (parallel to the ground)

Note.7 << The margin is More than 20 dB





## 8. Sample Calculations

$$\begin{aligned} \text{dB}\mu\text{V} &= 20 \log_{10}(\mu\text{V}/\text{m}) \\ \text{dB}\mu\text{V} &= \text{dBm} + 107 \\ \mu\text{V} &= 10^{(\text{dB}\mu\text{V}/20)} \end{aligned}$$

### 8.1 Example 1 :

#### ■ 20.3 MHz

Class B Limit = 250  $\mu\text{V}$  = 48 dB $\mu\text{V}$

Reading = 39.2 dB $\mu\text{V}$

$10^{(39.2\text{dB}\mu\text{V}/20)}$  = 91.2  $\mu\text{V}$

Margin = 48 dB $\mu\text{V}$  - 39.2 dB $\mu\text{V}$

= 8.8 dB

### 8.2 Example 2 :

#### ■ 66.7 MHz

Class B Limit = 100  $\mu\text{V}/\text{m}$  = 40.0 dB $\mu\text{V}/\text{m}$

Reading = 31.0 dB $\mu\text{V}$

Antenna Factor + Cable Loss = 5.8 dB

Total = 36.8 dB $\mu\text{V}/\text{m}$

Margin = 40.0 dB $\mu\text{V}/\text{m}$  - 36.8 dB $\mu\text{V}/\text{m}$

= 3.2 dB





## 9. Recommendation & Conclusion

The data collected shows that the **COZMOS. FACIAL CLEANSING BRUSH (Model Name: CM02)** was complies with §18.305 & §18.307 of the FCC Rules.

- The end -

