

## Specification

Model No.	T30-G
4G GSM Features	LTE-FDD B2/B4/B5/B12/B13/B25/B26 UMTS/WCDMA B2/B4/B5
RF Frequency	ISM 433MHz
Radio Range	Radius 300 meters (or 1,000 ft.), tested in open space
Backup Battery of Console	Polymer Lithium Battery
Power Adapter	5V DC, 1A
Operating temperature range	0°C to 45°C (Storage -10°C to 50°C)

## Kindly And Important Warnings

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

### RF Exposure Information

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.


## Quick Start Guide

### T30-G (Console)

#### Interface Description of Console


##### Top View:

1. HELP/Panic Button
2. Cancel Button
3. Away Button
4. Speaker
5. LOGO LED Lamp
6. Microphone

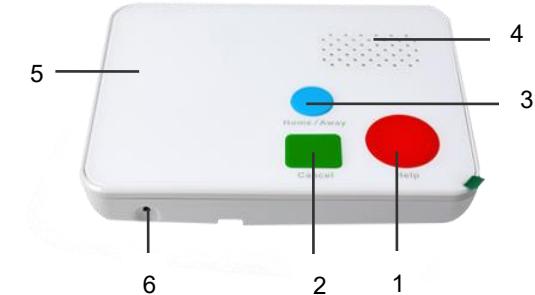

##### Back View:

7. SIM Card
8. DC Power Supply Port
9. Power ON/OFF Button
10. Speaker Volume Rotate Button
11. Quick Power Off
12. Wireless Pair
13. PC Program Port
14. Backup Battery

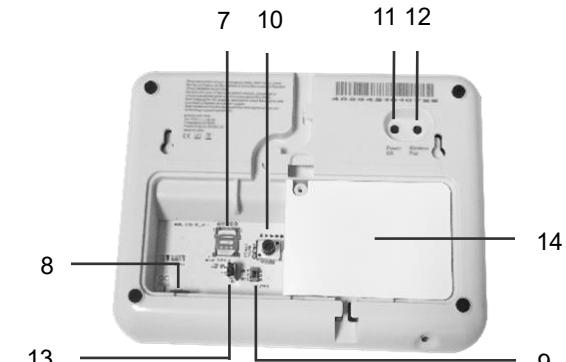

#### LOGO LED Lamp Indication of Console

- **Green:** Normal standby / Everything fine.
- **Green flash very slow:** Low battery standby.
- **Green flash:** Calling.
- **Green and red flash alternately:** Detect Hardware Error, such as not plug adapter.
- **Red flash quickly:** No SIM card.
- **Green and yellow flash shortly:** Intrusion mode have enabled.

- **Green flash quickly:** Inactivity detect mode have enabled.
- **White:** Wireless pare mode.
- **Blue:** Away mode is enable, and under normal standby.
- **Blue flash very slow:** Away mode is enable, and low battery standby.
- **Blue and red flash alternately:** Away mode is enable, and detect Hardware Error, such as not plug adapter.

## Initial Operation and Installation


### Step 1

Open the Rear Cover via screw driver.



### Step 2


Plug SIM card (**YYYYYYYYYY** is its phone number) to the SIM card socket (please take care of the direction of card).

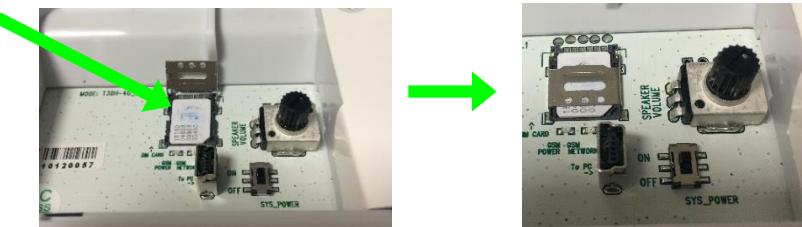

*Note: The T30-G console support LTE 4G SIM card , please make sure weather the SIM is right.*

### Step 3

Plug the DC adapter to the power supply port.



Toggle the power button to ON.

### Step 4

Put the Rear Cover on, and fix it via screw.



### Step 5

Set the panic call dial phone numbers. Here, for initial test, we can send following SMS to the SIM card phone number(**YYYYYYYYYY**): **0301=xxxxxxxxxx**

### Step 6

It feedback a confirm SMS to your cell phone. Now, Press the Help button, It will dial emergency call to your cell phone.

**Congregation, it works well and enjoy it.**