



RF Test Report

For BTEK250724140A01-T01

Project No.:	BTEK250724140A01E01
Product Description:	24.6℃, 58%, 100.8kPa
Test Engineer:	Zora
Test Date:	2025-08-7



Test Summary

Item	Result
Duty Cycle	Pass
Bandwidth	Pass
Maximum Conducted Output Power	Pass
Maximum Power Spectral Density	Pass
Unwanted Emissions In Non-restricted Frequency Bands	Pass
Unwanted Emissions In Restricted Frequency Bands	Pass



1. Duty Cycle

1.1 Test Result


1.1.1 Ant1

Ant1							
Mode	TX Type	Frequency (MHz)	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
1M	SISO	2402	0.400	0.625	64.00	1.94	0.00
		2440	0.391	0.625	62.56	2.04	0.00
		2480	0.391	0.625	62.56	2.04	0.00




1.2 Test Graph

1.2.1 Ant1

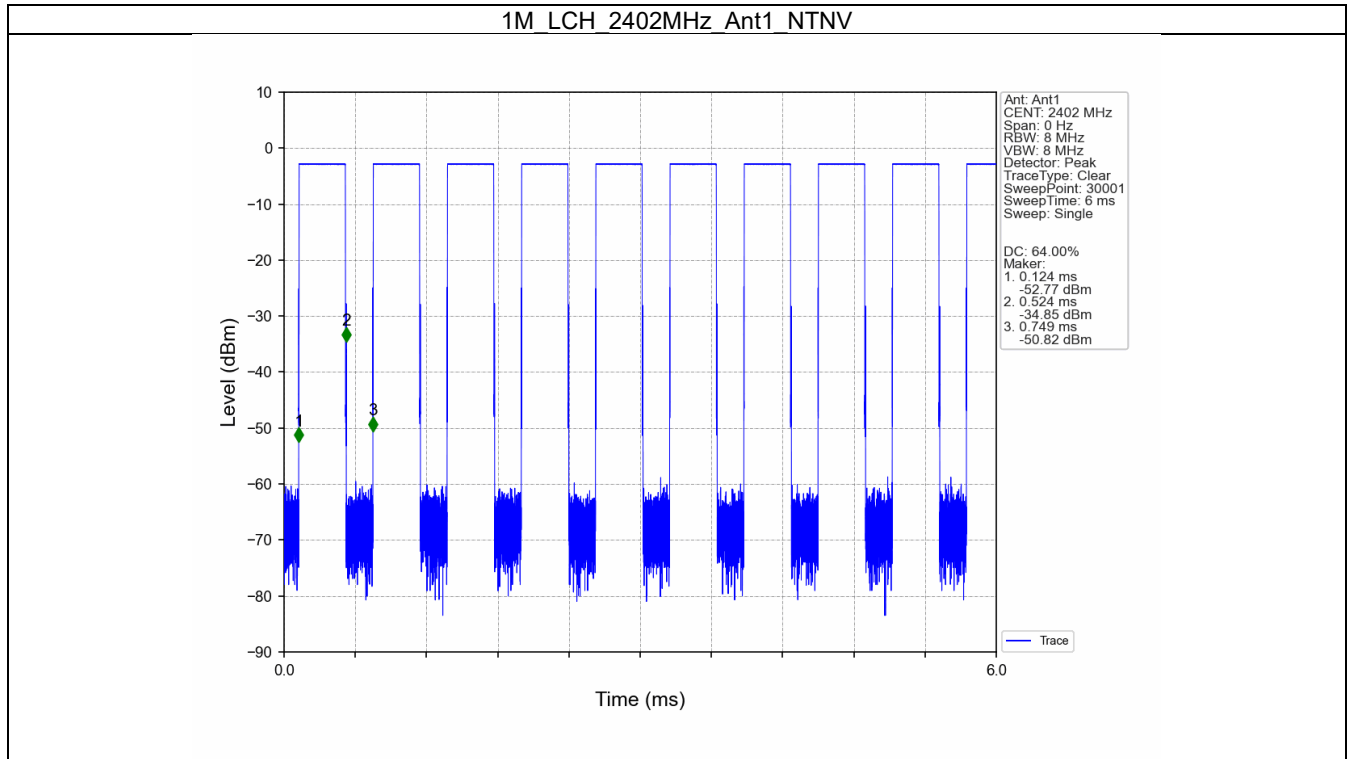




1M_MCH_2440MHz_Ant1_NTNV

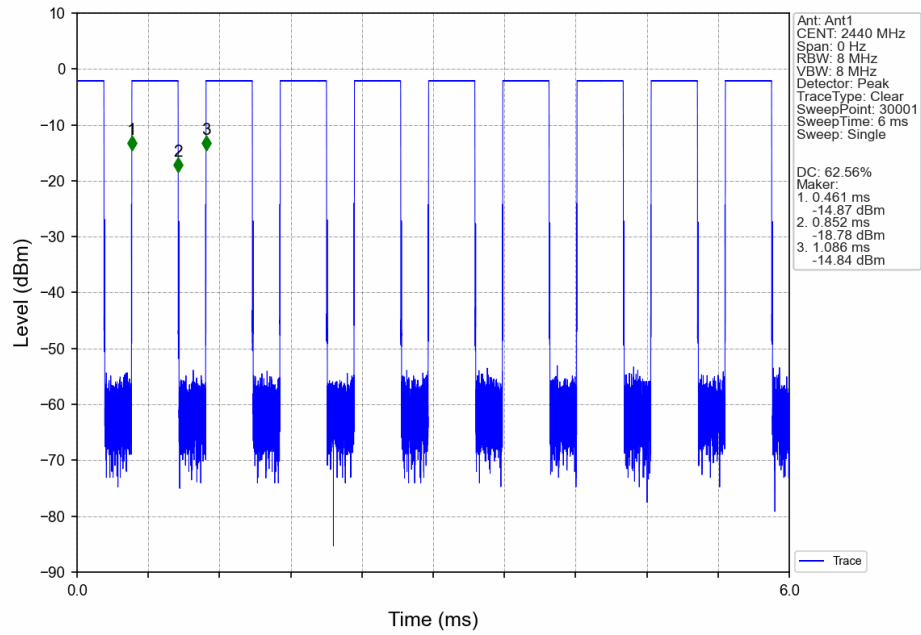

1M_HCH_2480MHz_Ant1_NTNV

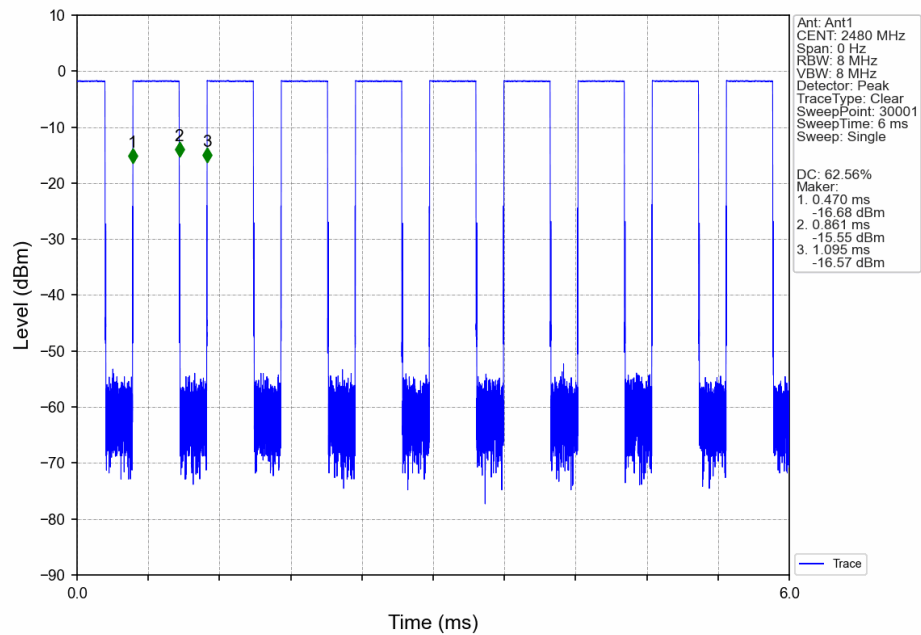



2. Bandwidth

2.1 Test Result

2.1.1 OBW

Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	1.033	/	Pass
		2440	1	1.033	/	Pass
		2480	1	1.032	/	Pass


2.1.2 6dB BW

Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	0.667	≥ 0.5	Pass
		2440	1	0.662	≥ 0.5	Pass
		2480	1	0.666	≥ 0.5	Pass




2.2 Test Graph

2.2.1 OBW

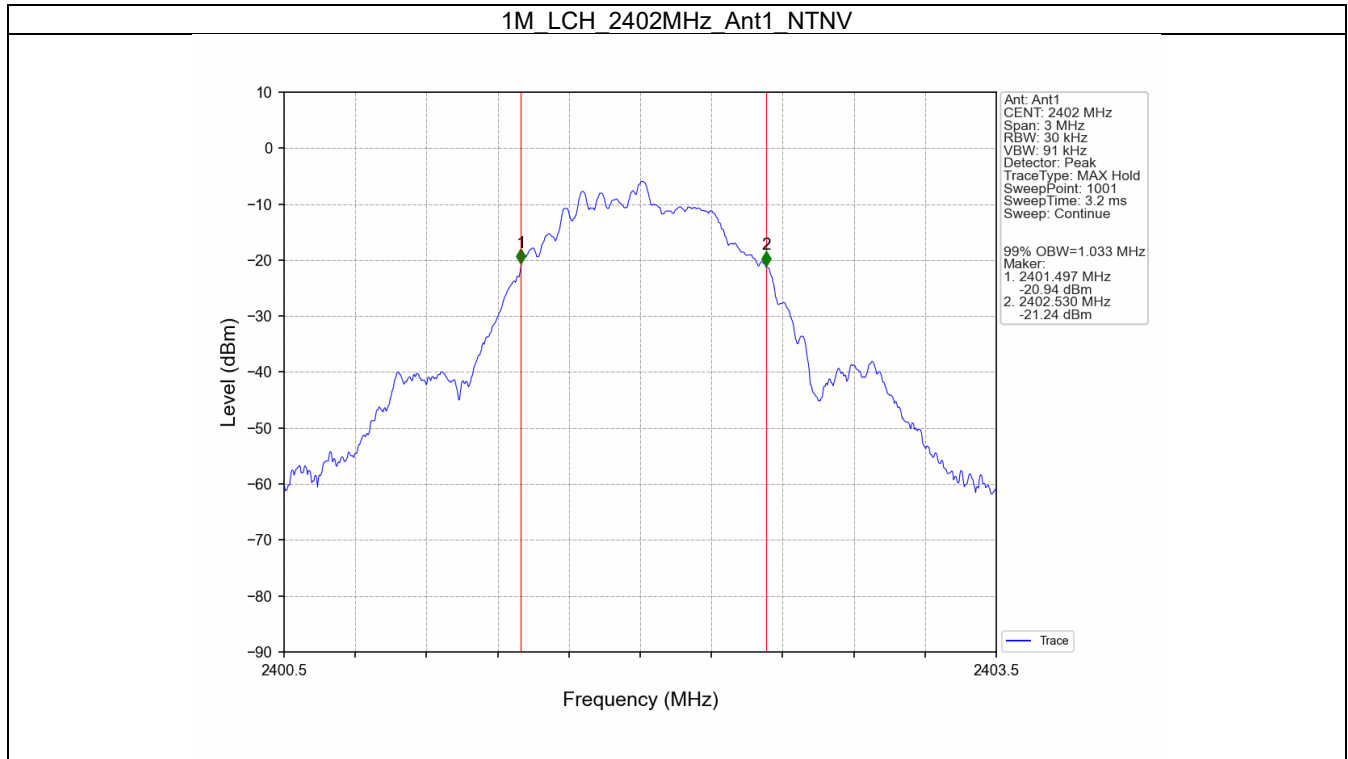




1M_MCH_2440MHz_Ant1_NTNV

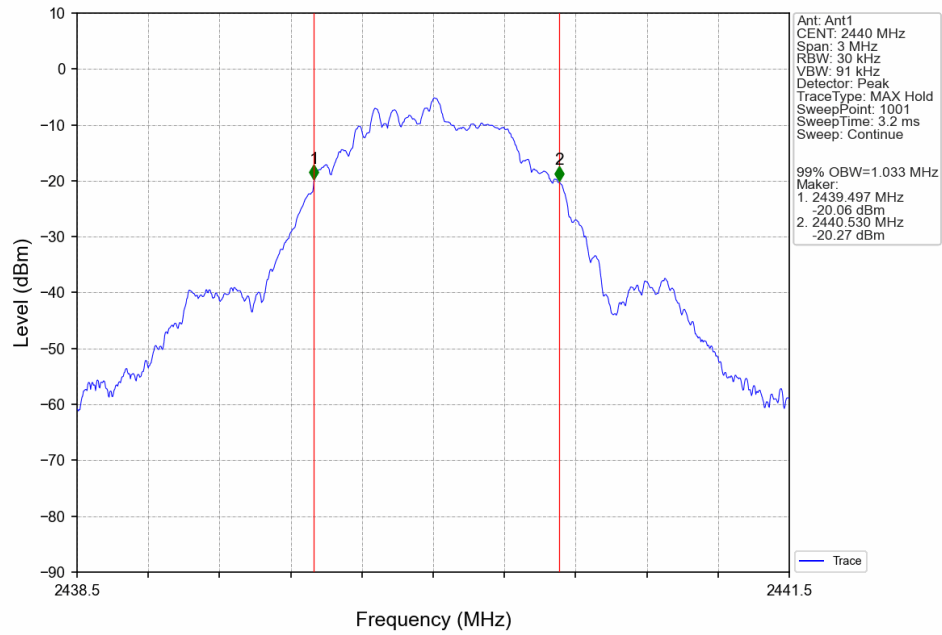


1M_HCH_2480MHz_Ant1_NTNV

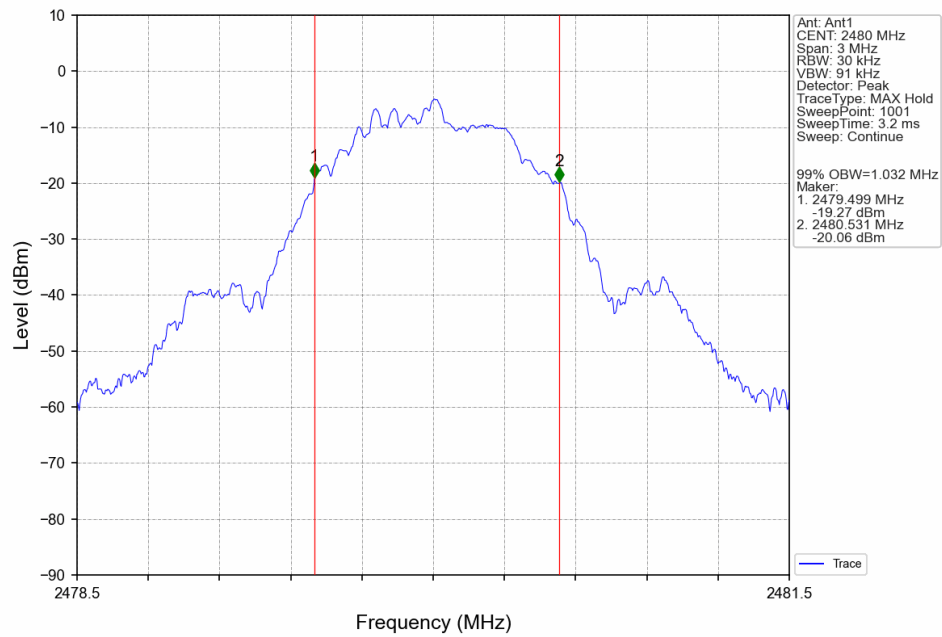




2.2.2 6dB BW

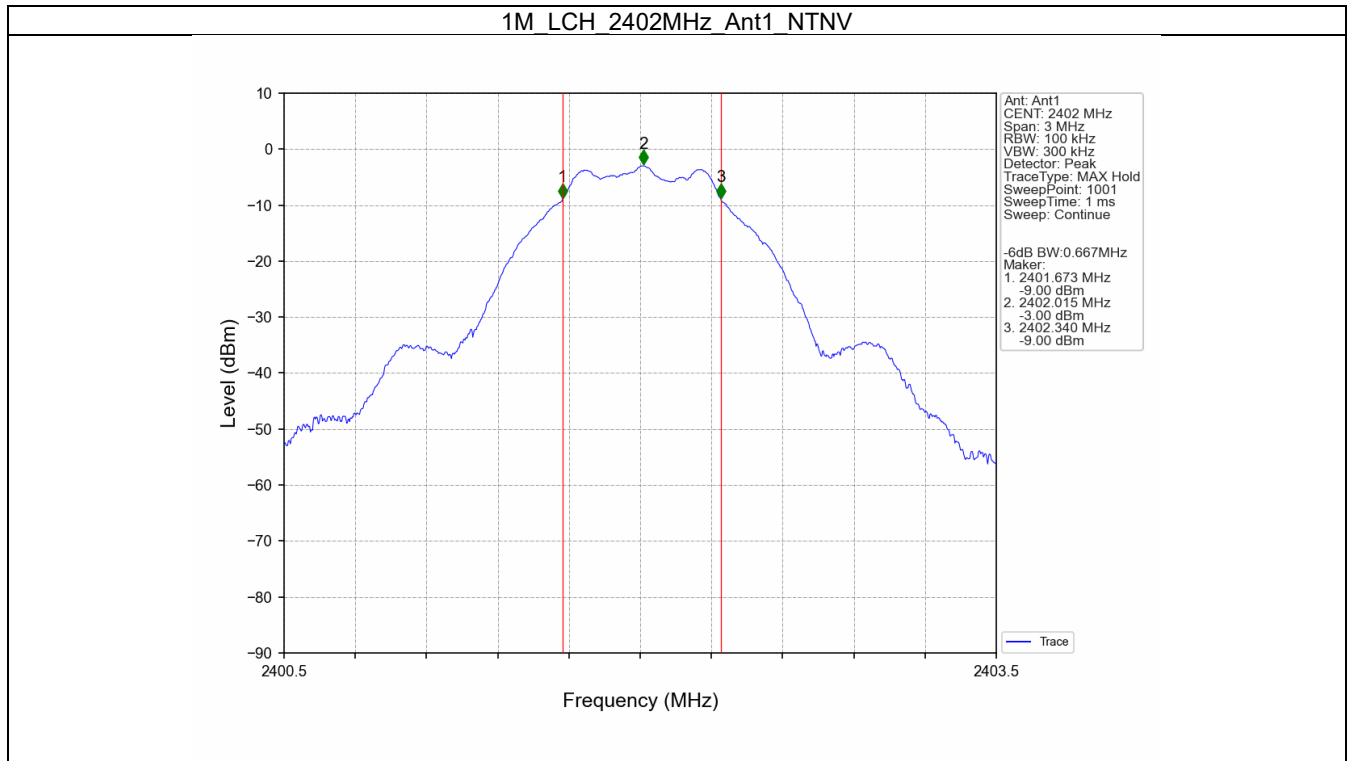




1M_MCH_2440MHz_Ant1_NTNV

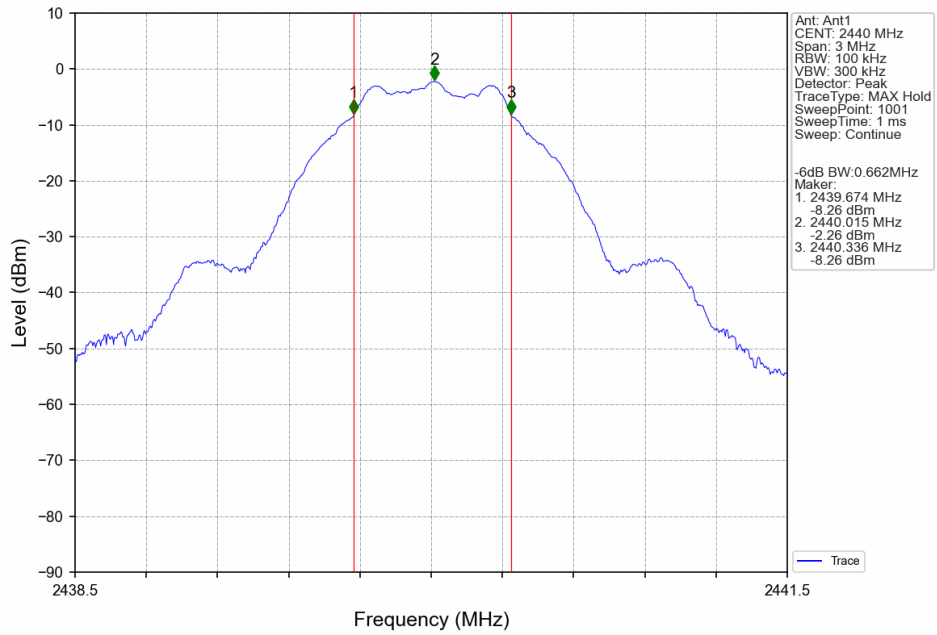

1M_HCH_2480MHz_Ant1_NTNV

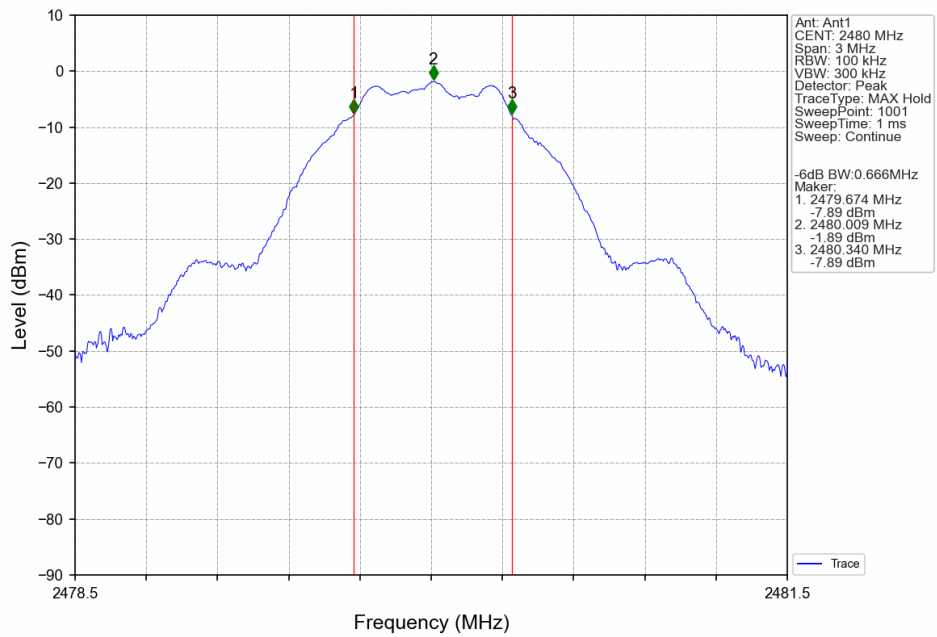



3. Maximum Conducted Output Power

3.1 Test Result


3.1.1 Power

Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
1M	SISO	2402	-2.77	<=30	Pass
		2440	-2.07	<=30	Pass
		2480	-1.71	<=30	Pass
Note1: Antenna Gain: Ant1: 0.00dBi;					




3.2 Test Graph

3.2.1 Power

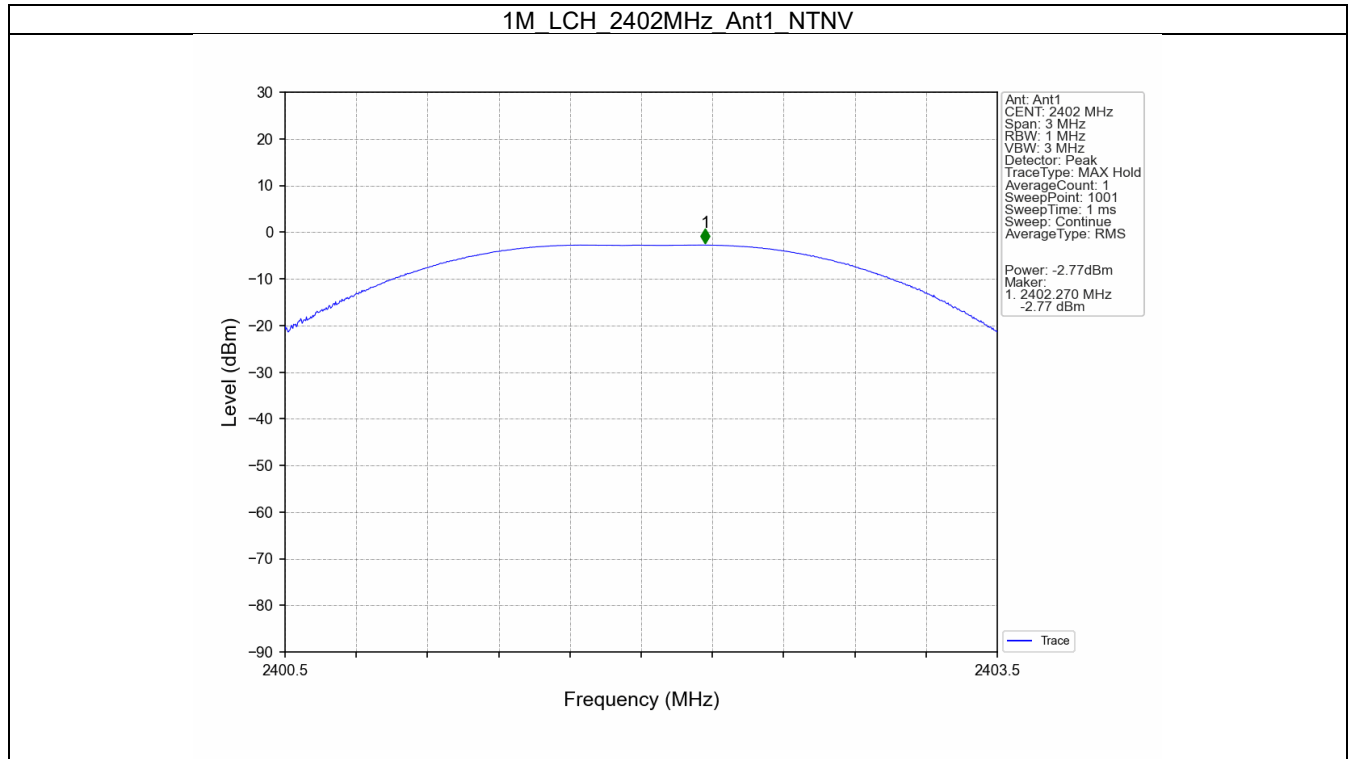




1M_MCH_2440MHz_Ant1_NTNV

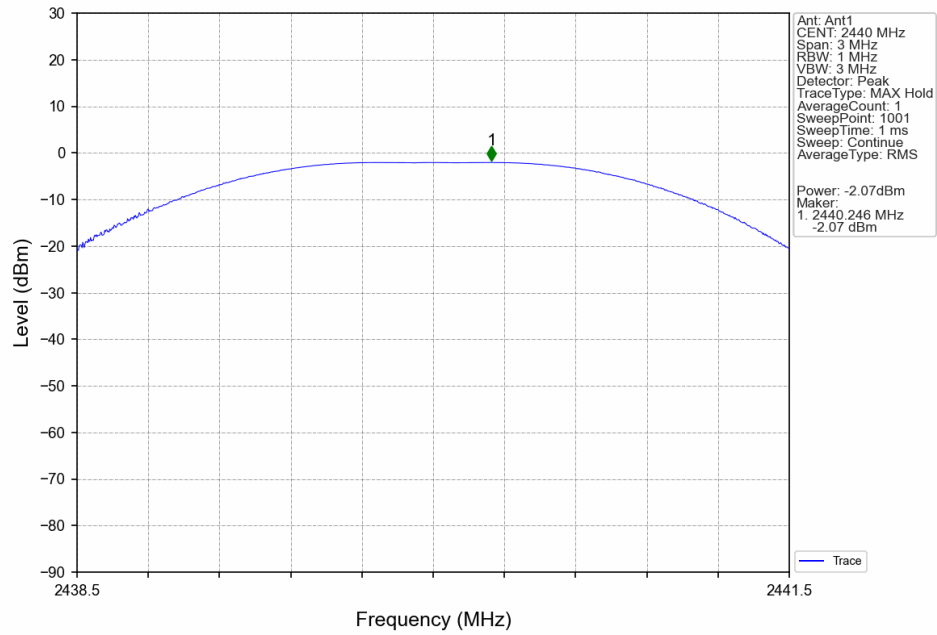

1M_HCH_2480MHz_Ant1_NTNV

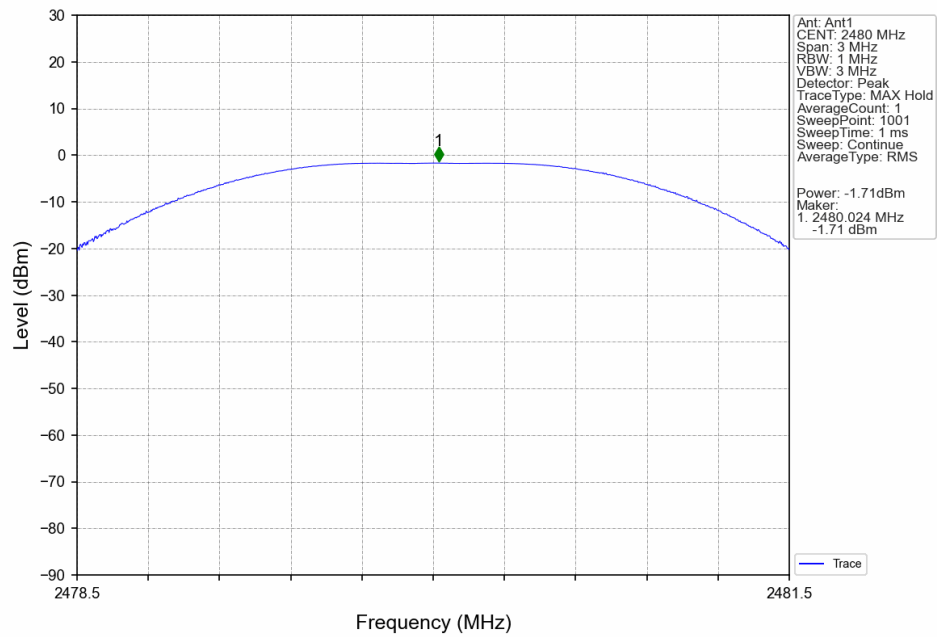



4. Maximum Power Spectral Density

4.1 Test Result

4.1.1 PSD


Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm/3kHz)		Verdict
			ANT1	Limit	
1M	SISO	2402	-17.35	<=8	Pass
		2440	-16.64	<=8	Pass
		2480	-16.49	<=8	Pass


Note1: Antenna Gain: Ant1: 0.00dBi;



4.2 Test Graph

4.2.1 PSD

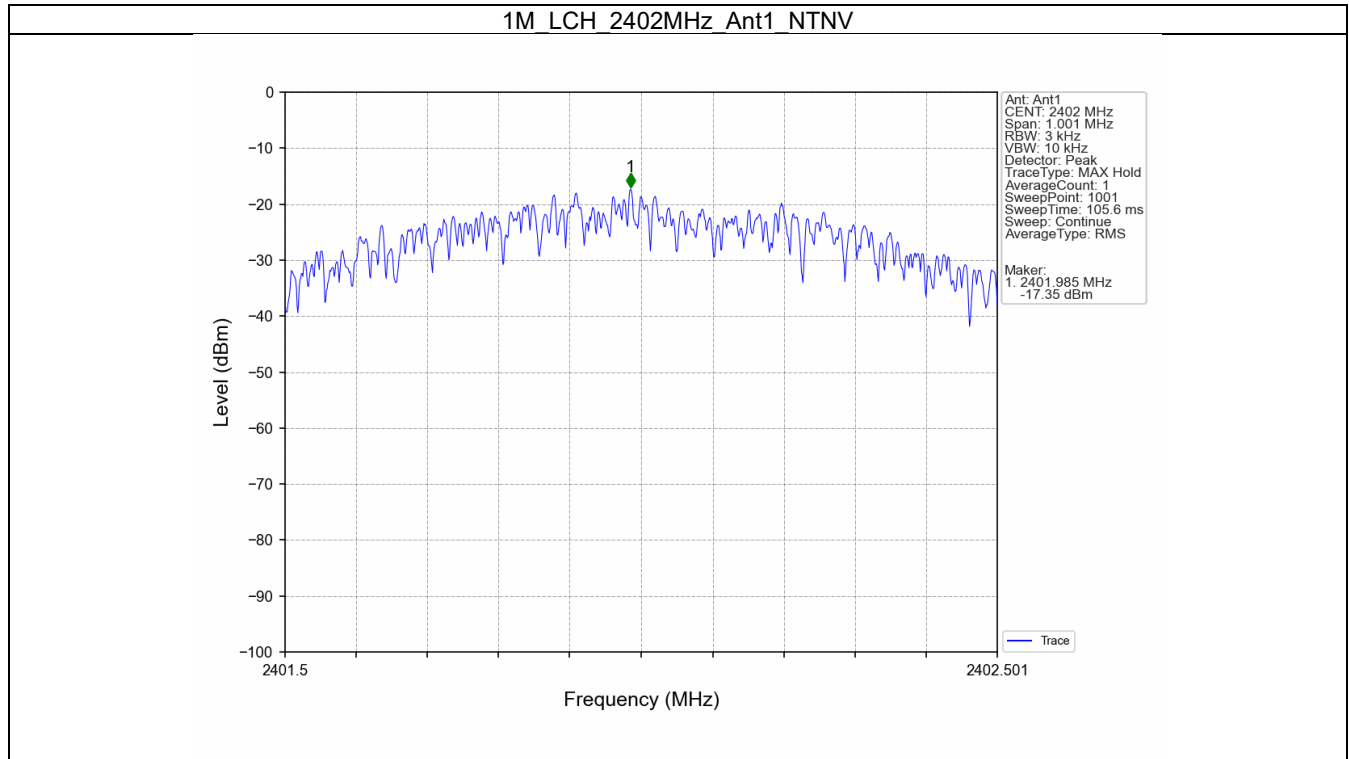

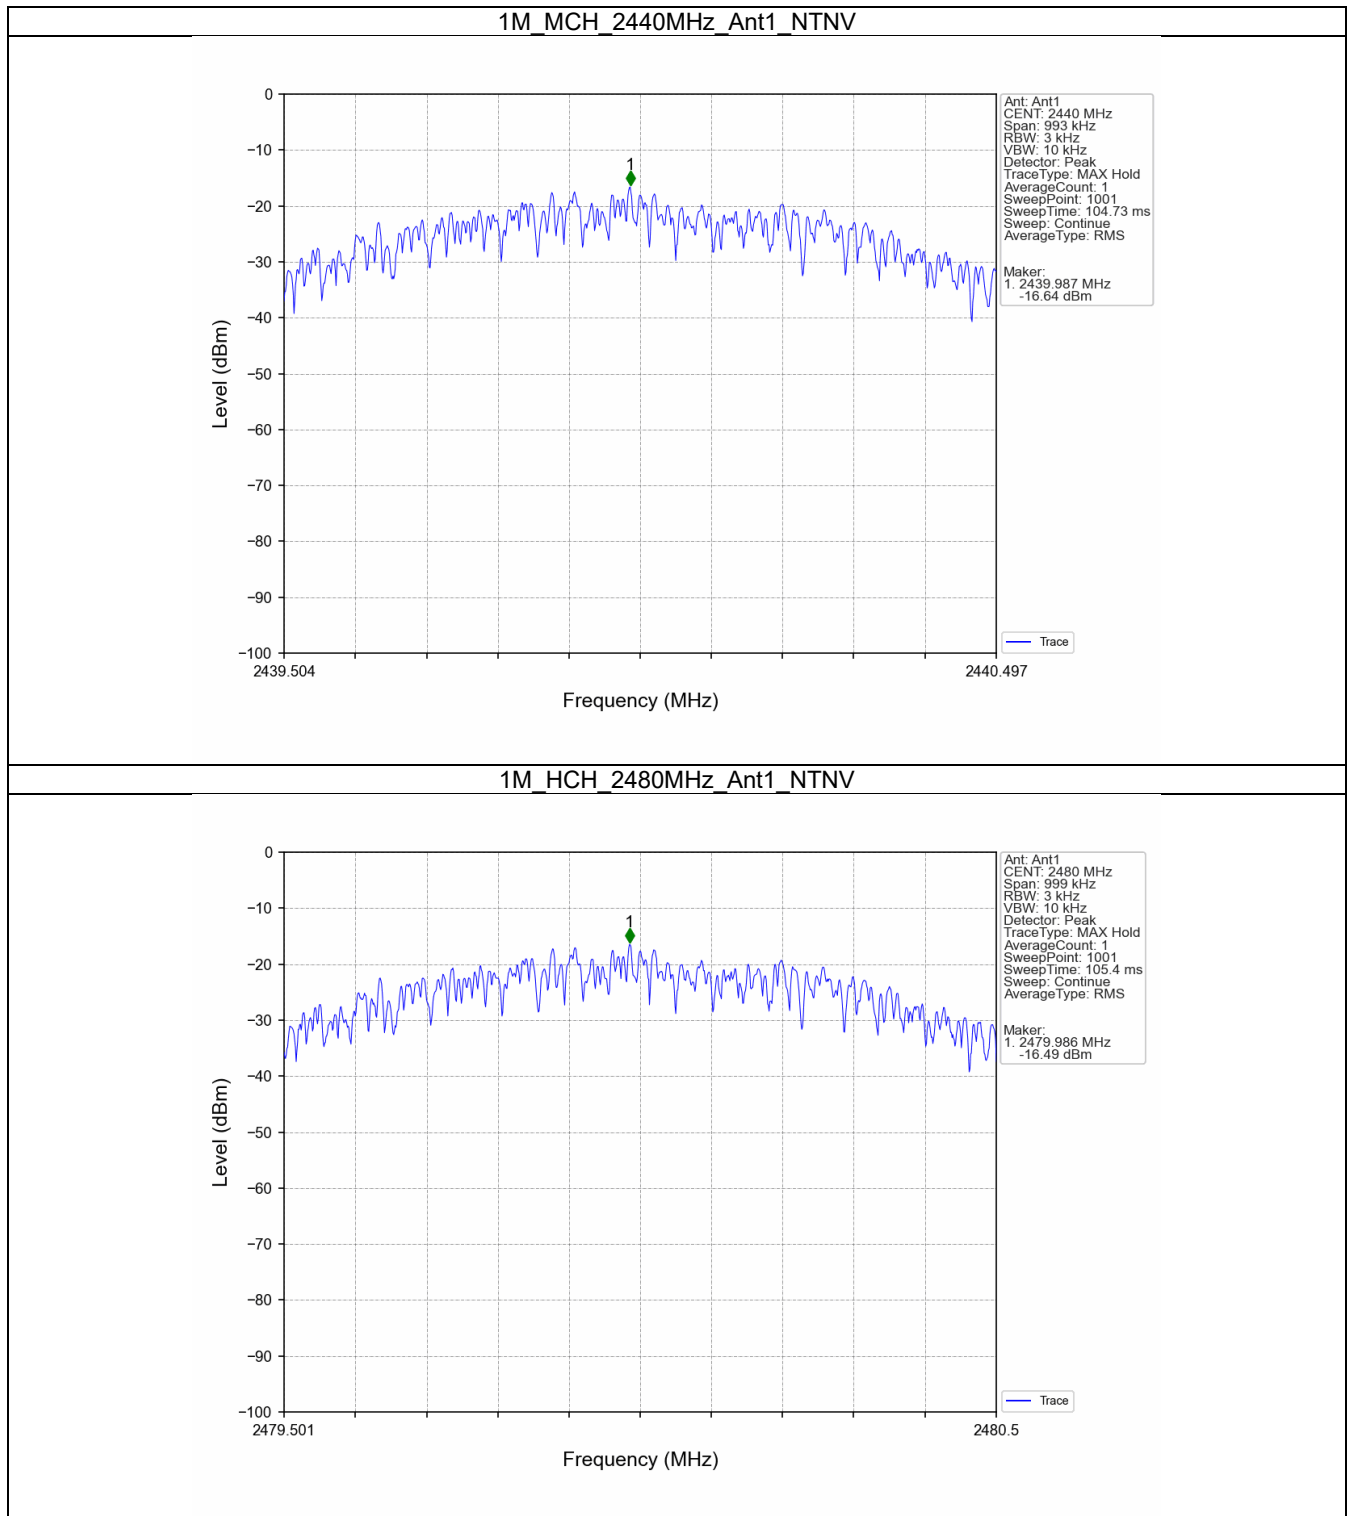



5. Unwanted Emissions In Non-restricted Frequency Bands

5.1 Test Result

5.1.1 Ref

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)
1M	SISO	2402	1	-3.03
		2440	1	-2.31
		2480	1	-1.96
Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.				


5.1.2 CSE


Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
1M	SISO	2402	1	-1.96	-21.96	Pass
		2440	1	-1.96	-21.96	Pass
		2480	1	-1.96	-21.96	Pass
Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.						



5.2 Test Graph


5.2.1 Ref

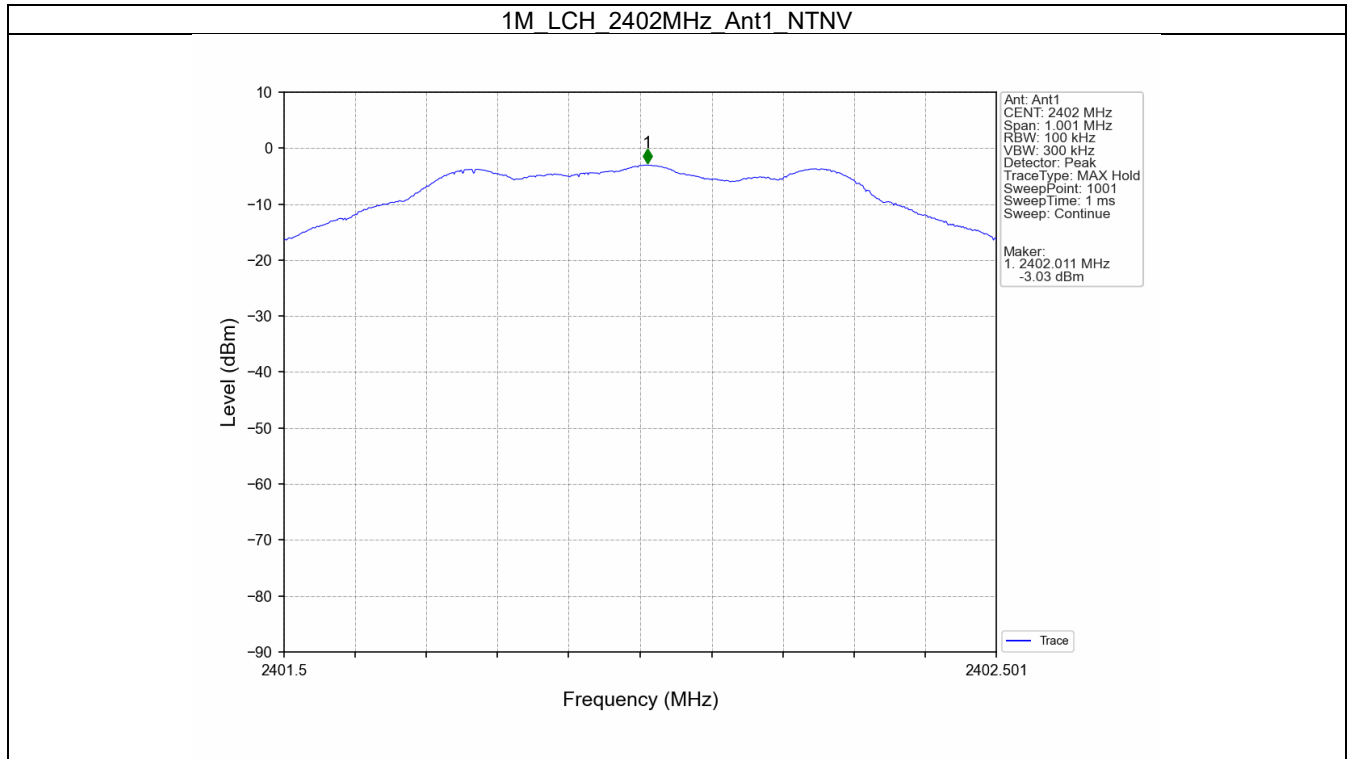

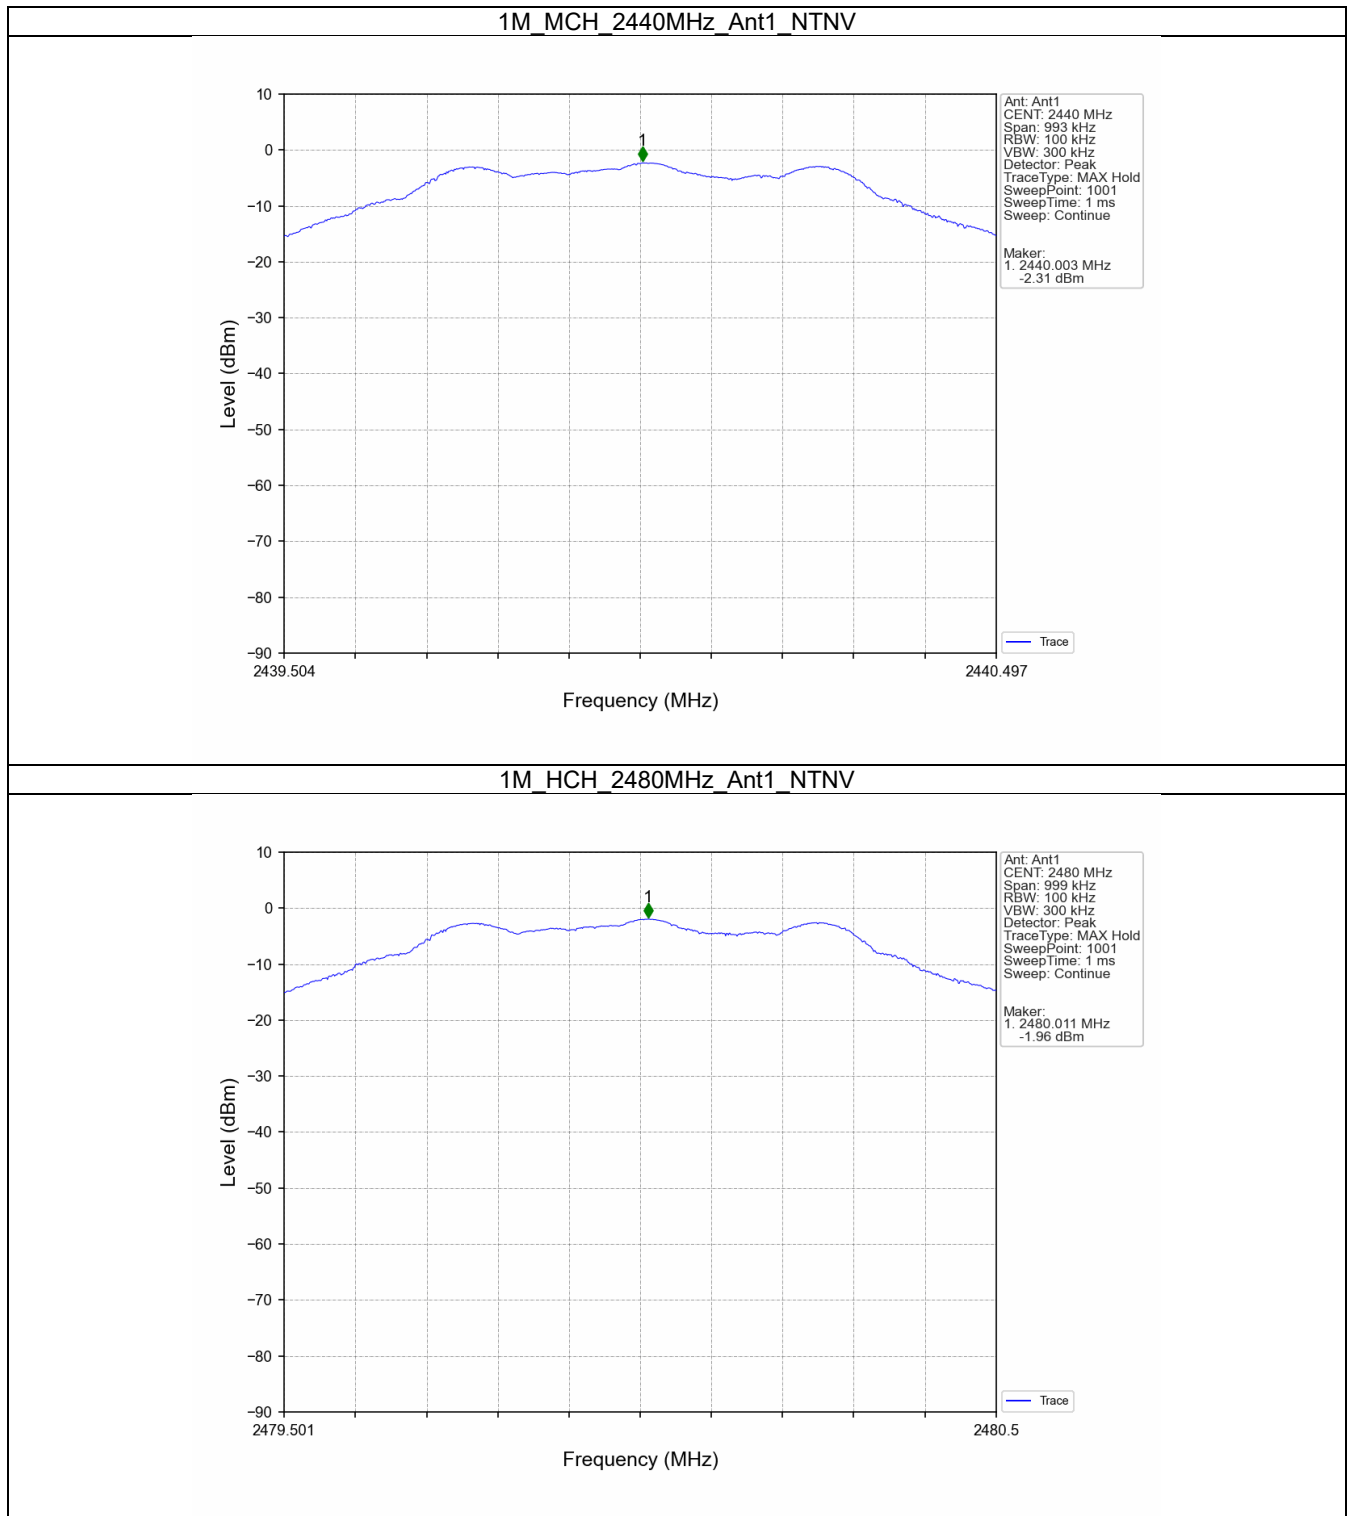




5.2.2 CSE

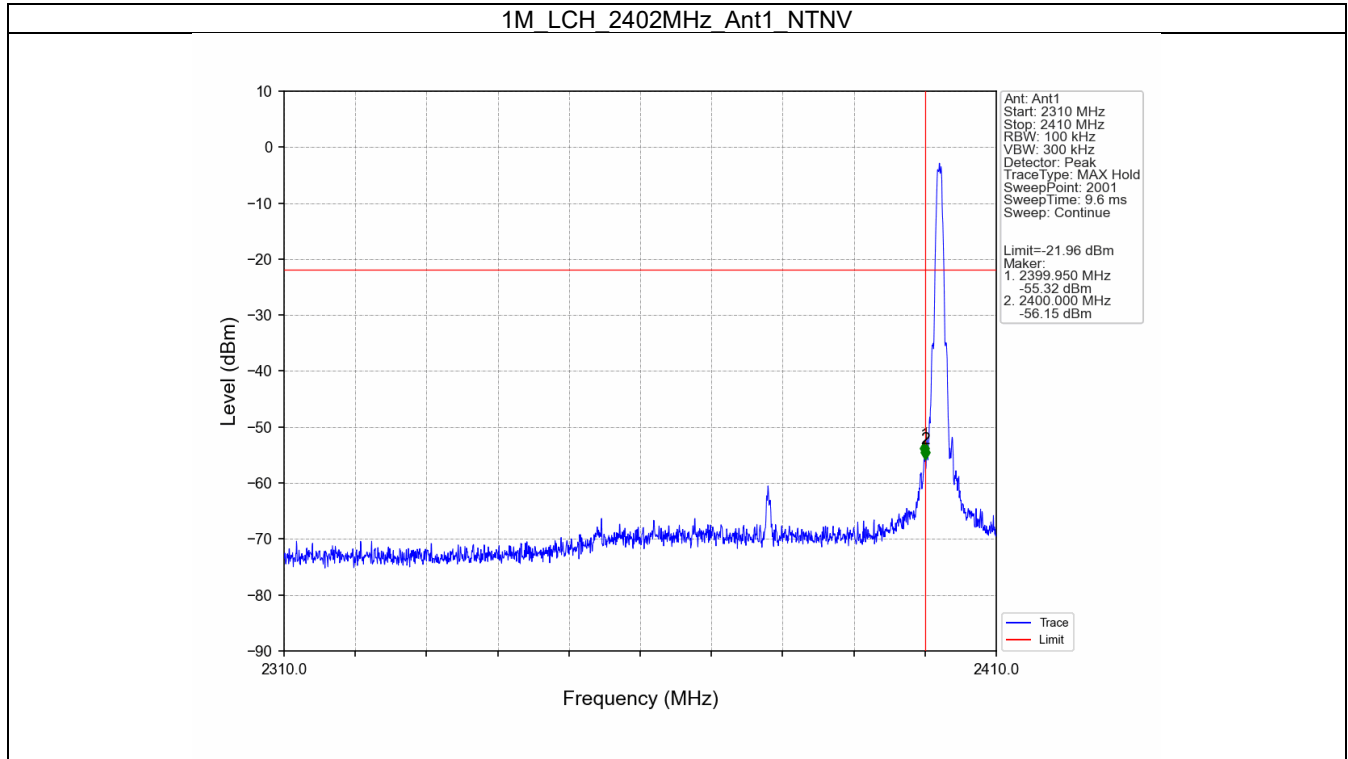




1M_LCH_2402MHz_Ant1_NTNV

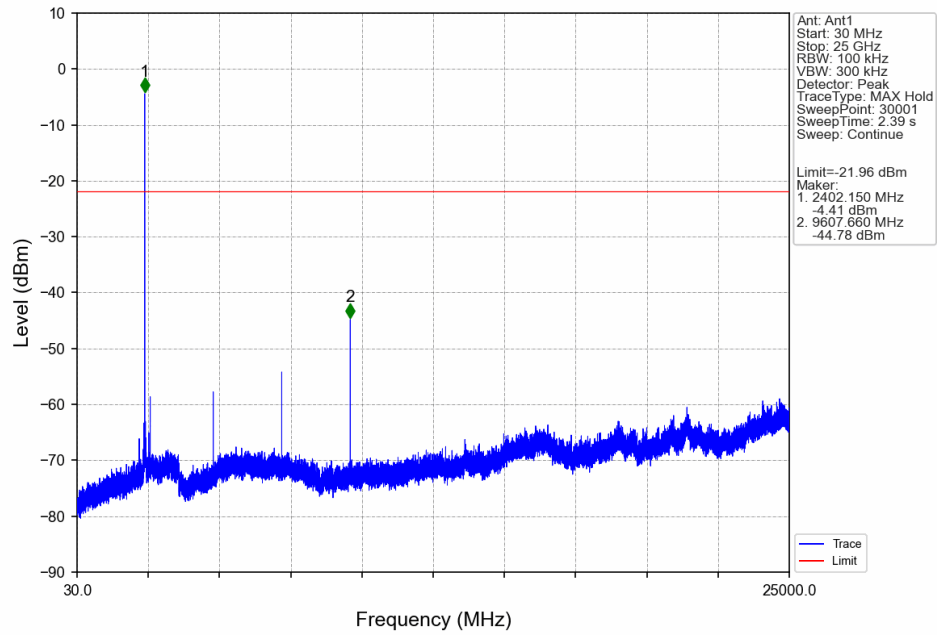


1M_MCH_2440MHz_Ant1_NTNV

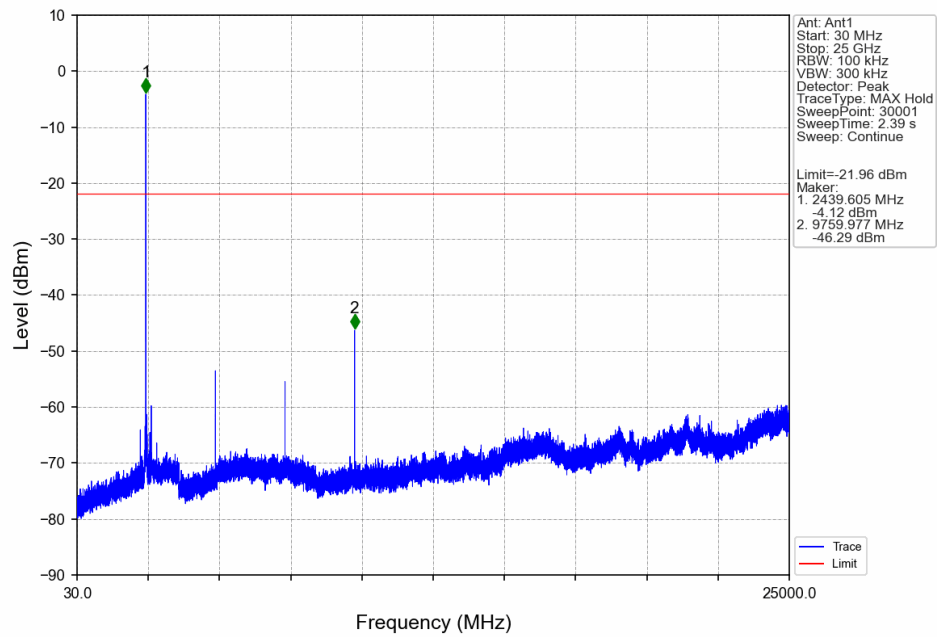




1M_HCH_2480MHz_Ant1_NTNV

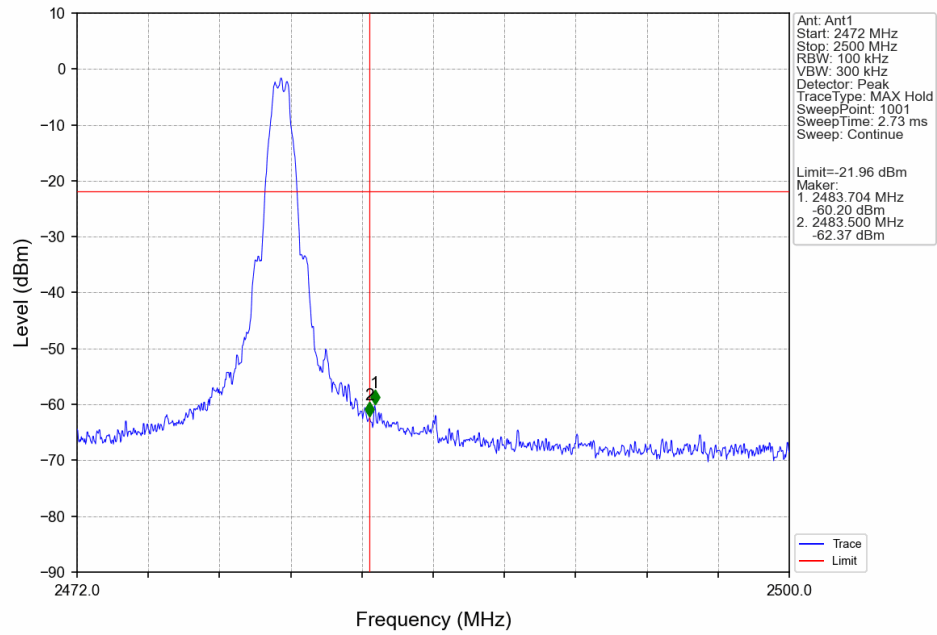

1M_HCH_2480MHz_Ant1_NTNV

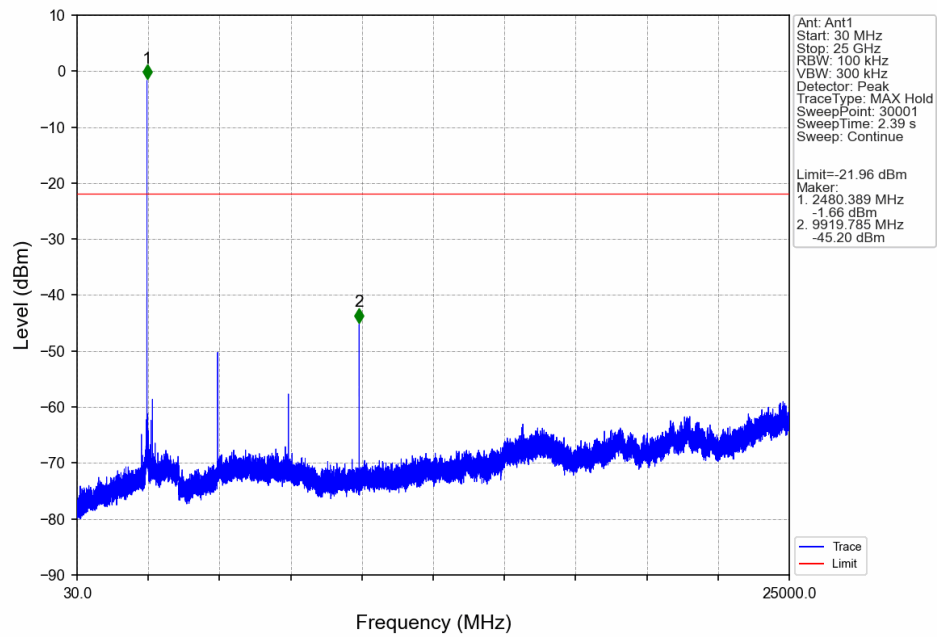



6. Unwanted Emissions In Restricted Frequency Bands

6.1 Test Result


6.1.1 RSE

Mode	TX Type	Frequency (MHz)	ANT	Level of Unwanted Emissions (dBm)		Verdict
				Result	Limit	
1M	SISO	2402	1	Refer To Test Graph		Pass
		2440	1	Refer To Test Graph		Pass
		2480	1	Refer To Test Graph		Pass




6.2 Test Graph

6.2.1 RSE

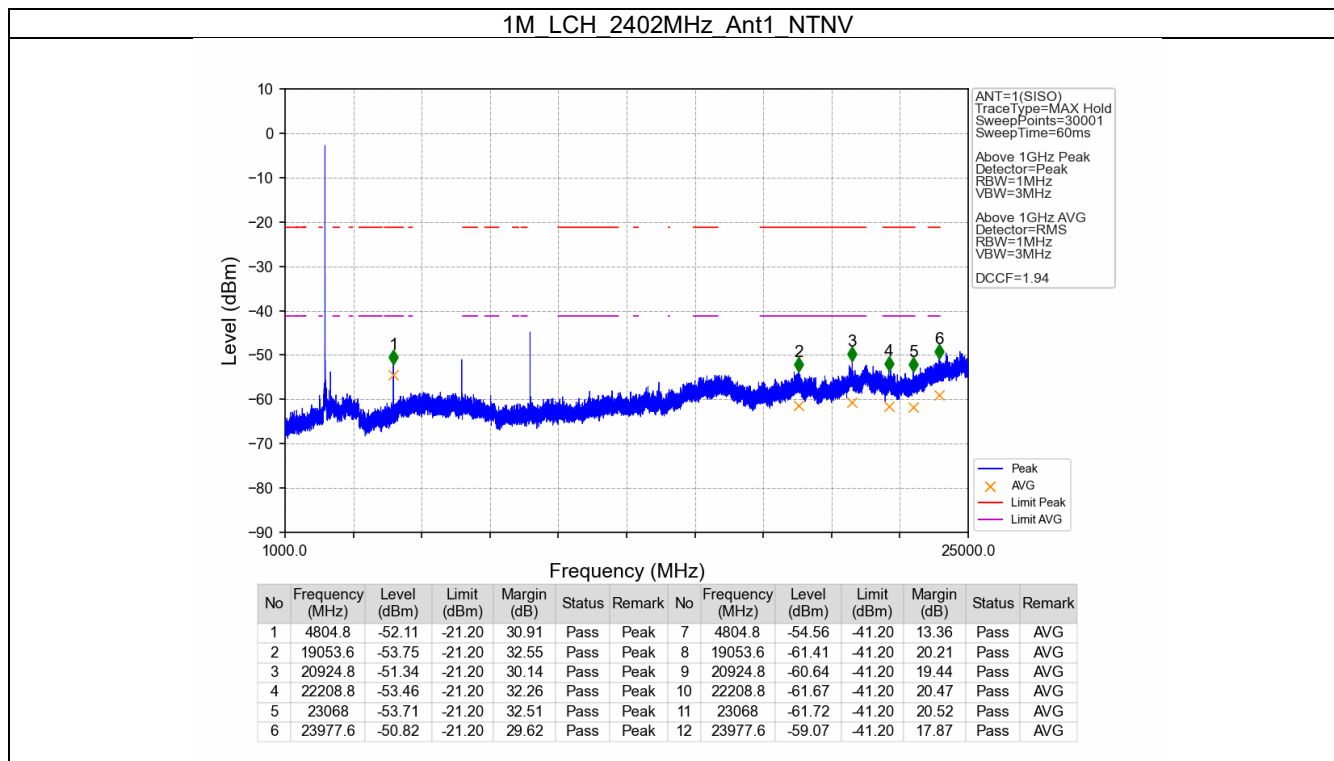




1M_LCH_2402MHz_Ant1_NTNV

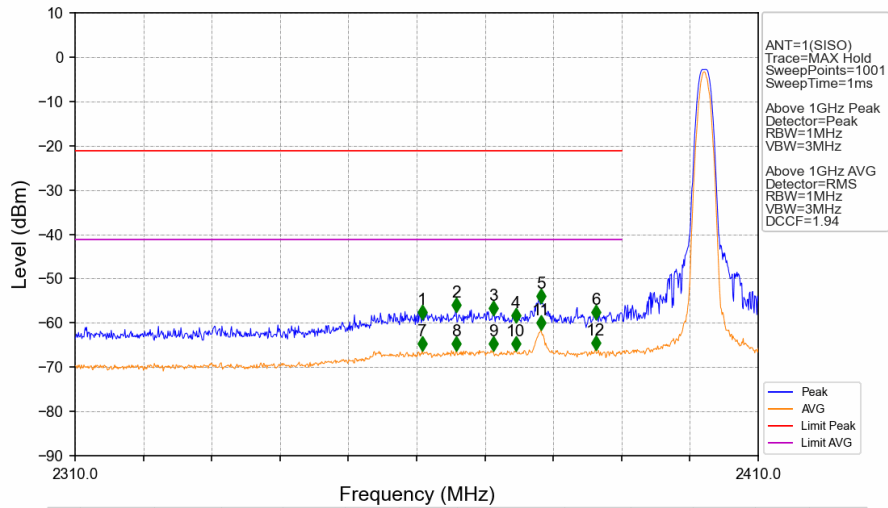

No	Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Status	Remark	No	Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Status	Remark
1	2360.800	-59.23	-21.20	38.03	Pass	Peak	7	2360.800	-66.33	-41.20	25.13	Pass	AVG
2	2365.800	-57.58	-21.20	36.38	Pass	Peak	8	2365.800	-66.26	-41.20	25.06	Pass	AVG
3	2371.200	-58.23	-21.20	37.03	Pass	Peak	9	2371.200	-66.21	-41.20	25.01	Pass	AVG
4	2374.500	-59.81	-21.20	38.61	Pass	Peak	10	2374.500	-66.33	-41.20	25.13	Pass	AVG
5	2378.200	-55.57	-21.20	34.37	Pass	Peak	11	2378.200	-61.45	-41.20	20.25	Pass	AVG
6	2386.200	-59.08	-21.20	37.88	Pass	Peak	12	2386.200	-66.04	-41.20	24.84	Pass	AVG


1M_MCH_2440MHz_Ant1_NTNV

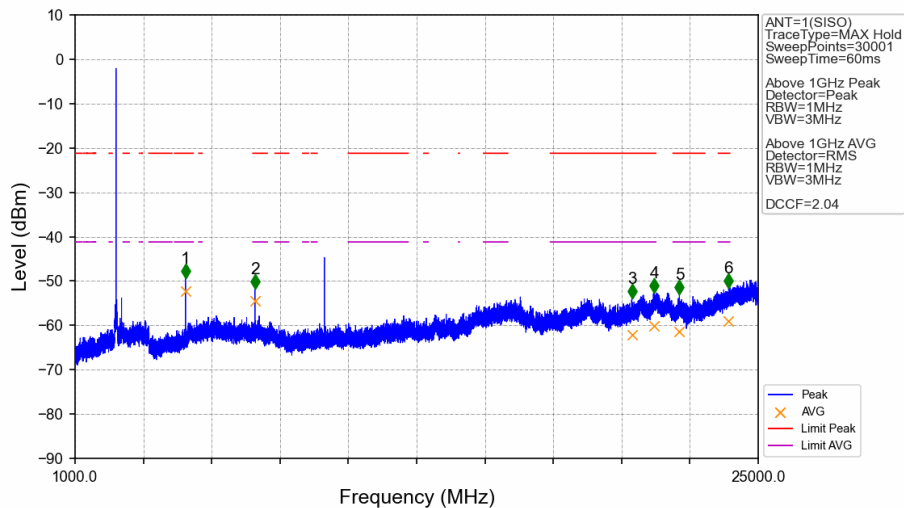

No	Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Status	Remark	No	Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Status	Remark
1	4880	-49.31	-21.20	28.11	Pass	Peak	7	4880	-52.29	-41.20	11.09	Pass	AVG
2	7320	-51.76	-21.20	30.56	Pass	Peak	8	7320	-54.49	-41.20	13.29	Pass	AVG
3	20562.4	-53.86	-21.20	32.66	Pass	Peak	9	20562.4	-62.14	-41.20	20.94	Pass	AVG
4	21343.2	-52.64	-21.20	31.44	Pass	Peak	10	21343.2	-60.08	-41.20	18.88	Pass	AVG
5	22231.2	-53.04	-21.20	31.84	Pass	Peak	11	22231.2	-61.33	-41.20	20.13	Pass	AVG
6	23960.8	-51.49	-21.20	30.29	Pass	Peak	12	23960.8	-59.08	-41.20	17.88	Pass	AVG




1M_HCH_2480MHz_Ant1_NTNV

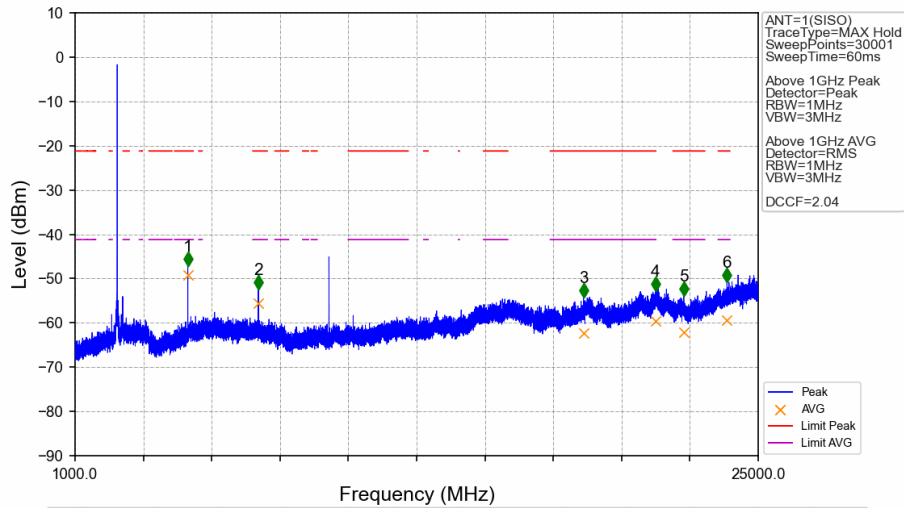

No	Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Status	Remark	No	Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Status	Remark
1	4960	-47.14	-21.20	25.94	Pass	Peak	7	4960	-49.18	-41.20	7.98	Pass	AVG
2	7440.8	-52.37	-21.20	31.17	Pass	Peak	8	7440.8	-55.63	-41.20	14.43	Pass	AVG
3	18860.8	-54.19	-21.20	32.99	Pass	Peak	9	18860.8	-62.36	-41.20	21.16	Pass	AVG
4	21391.2	-52.73	-21.20	31.53	Pass	Peak	10	21391.2	-59.67	-41.20	18.47	Pass	AVG
5	22385.6	-53.84	-21.20	32.64	Pass	Peak	11	22385.6	-62.20	-41.20	21.00	Pass	AVG
6	23904	-50.83	-21.20	29.63	Pass	Peak	12	23904	-59.45	-41.20	18.25	Pass	AVG

1M_HCH_2480MHz_Ant1_NTNV

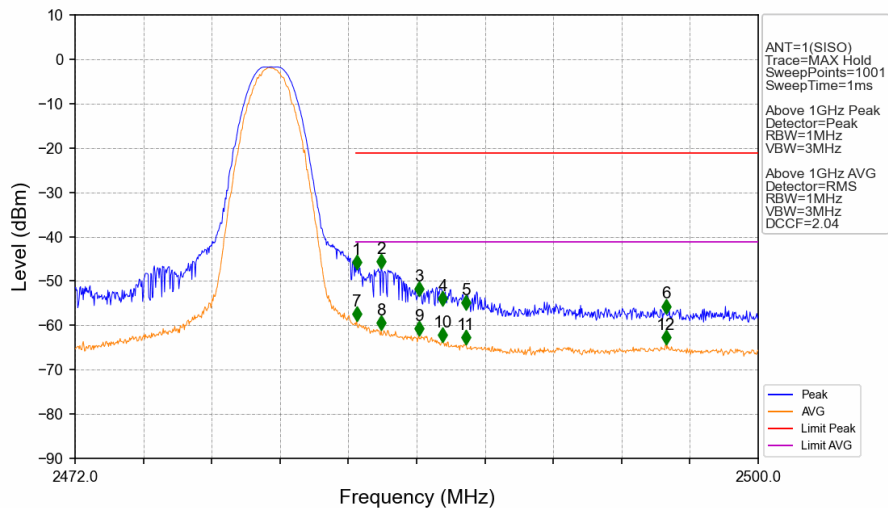

No	Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Status	Remark	No	Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Status	Remark
1	2483.536	-47.27	-21.20	26.07	Pass	Peak	7	2483.536	-58.90	-41.20	17.70	Pass	AVG
2	2484.544	-47.19	-21.20	25.99	Pass	Peak	8	2484.544	-61.06	-41.20	19.86	Pass	AVG
3	2486.084	-53.39	-21.20	32.19	Pass	Peak	9	2486.084	-62.21	-41.20	21.01	Pass	AVG
4	2487.064	-55.45	-21.20	34.25	Pass	Peak	10	2487.064	-63.71	-41.20	22.51	Pass	AVG
5	2488.016	-56.45	-21.20	35.25	Pass	Peak	11	2488.016	-64.20	-41.20	23.00	Pass	AVG
6	2496.220	-57.25	-21.20	36.05	Pass	Peak	12	2496.220	-64.31	-41.20	23.11	Pass	AVG