

The BTR2 is an easy to operate Bluetooth Receiver;


- Designed to hide way set up.
- Complete Wireless Connection- Bluetooth 5.0
- Can connect to any after market amplifier

MOUNTING INSTRUCTIONS:

The BTR2 has no controls that need to be adjusted after installation, So it may be mounted in a hidden or inaccessorible location. The light weight makes it easy to install with double stick tape or with screw using the side holes. It may be helpful to install in a place where viewing the LED indicator light is possible.

WIRING INSTRUCTIONS:

RED WIRE	Connect to +12V for Power
BLUE WIRE	Connect to Amplifier Remote Wire To turn on amp
BLACK WIRE	Connect to -12V for Ground
MAIN OUTPUT	Connect to input of an amplifier

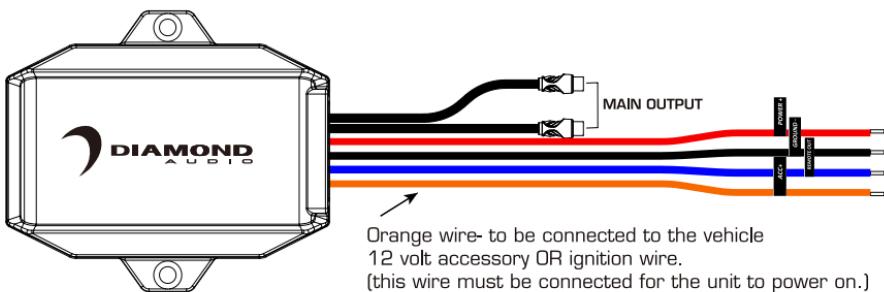

BLUETOOTH PAIRING INSTRUCTIONS:

STEP 1: Connect the BTR2 as explained in this manual, The blue light will light when power is applied.

STEP 2: If not already paired with another learned device, the BTR2 will automatically enter pairing mode, which is indicated by the backlight flashing BLUE.

STEP 3: From your phone's Bluetooth pairing menu find the "Diamond Audio" and connect to it.

STEP 4: When the blue light is lit constantly, The BTR2 is paired to the BT device. The BTR2 will automatically default to this device if in range whenever the BTR2 is powered on.

STEP 5: If using the BTR2 to power-up on an amplifier, when the BT device is paired & playing music, the RED light will light to indicate that the BTR2 is supplying +12V to the remote out wire. If music on the BT device is in PAUSE mode for more than 10-15 seconds, the remote out wire loses +12V, causing the amplifier to shut off. The RED light will also go out. Pressing PLAY again will re-supply +12V to the remote out wire, allowing the amplifier to power on again. The RED light will light up.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC warning:

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.