



# Shenzhen Ruifeng Electronic Technology Co., Ltd

## SPECIFICATION FOR APPROVAL

<b>Customer Name</b>	WHD		
<b>Customer Project Name</b>	T632PRO-STA X16	<b>Project Name</b>	T632PRO-STA X16
<b>Customer P/N</b>		P/N	WF5265B-1131L-175 (X16)
<b>Band</b>	2.4G/5.8G		
<b>Version</b>	A0		
<b>Designer Information</b>			
<b>RF Engineer</b>		<b>R&amp;D Director</b>	
<b>ME Engineer</b>			

Manufacturer: Shenzhen Ruifeng Electronic Technology Co., Ltd

Company Address: 4th Floor, Building B5, Xinfu Industrial Park, Chongqing Road, Fuyong Town, Bao'an District, Shenzhen

Phone: 0755-27211658

FAX: 0755-29485750



# Shenzhen Ruifeng Electronic Technology Co., Ltd

## Catalogue


No.	Item	Page No.
1	Drawing or Product Image	3/5
2	Dimensions Test Report	4/6
3	RF Performance Test Report	7-10



# Shenzhen Ruifeng Electronic Technology Co., Ltd

---

Drawing or Product Image

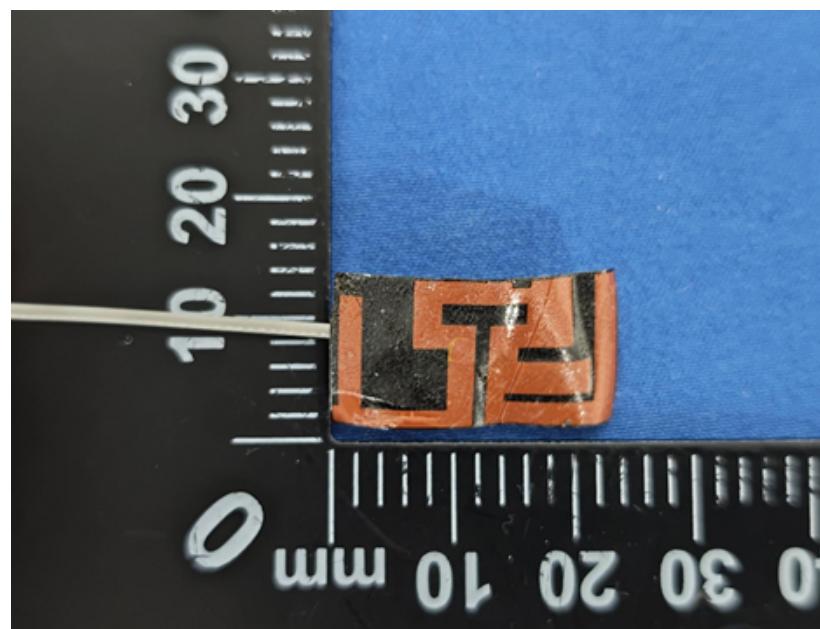



# Shenzhen Ruifeng Electronic Technology Co., Ltd

## Sample Dimensions Test Report

Test Date	2024. 2. 23	Sample Qty.	3	Inspector	
Dimension No.	Standard	Sample 1	Sample 2	Sample 3	Pass/NG
①Long	41. 76±0. 2mm	41. 8	41. 9	41. 8	Pass
②Width	21. 95±0. 2mm	21. 95	21. 95	22. 05	Pass
③High	0. 1±0. 03mm	0. 1	0. 1	0. 1	Pass
④Line length	175±2mm	175	175	176	Pass
Conclusion					PASS
Inspector & Date		Approval & Date			

## RF Performance Test Report

### Antenna Test Equipment Introduction

Test of antenna input characteristics using **Agilent E5071C** and **Agilent 5062A** vector network analyzer; The radiation pattern of the antenna are tested using the guangping 3D near field Anechoic Chamber, and the instrument is used to agilent8960 E5515 and Agilent E4438C. The test coordinates of the darkroom are as follows:


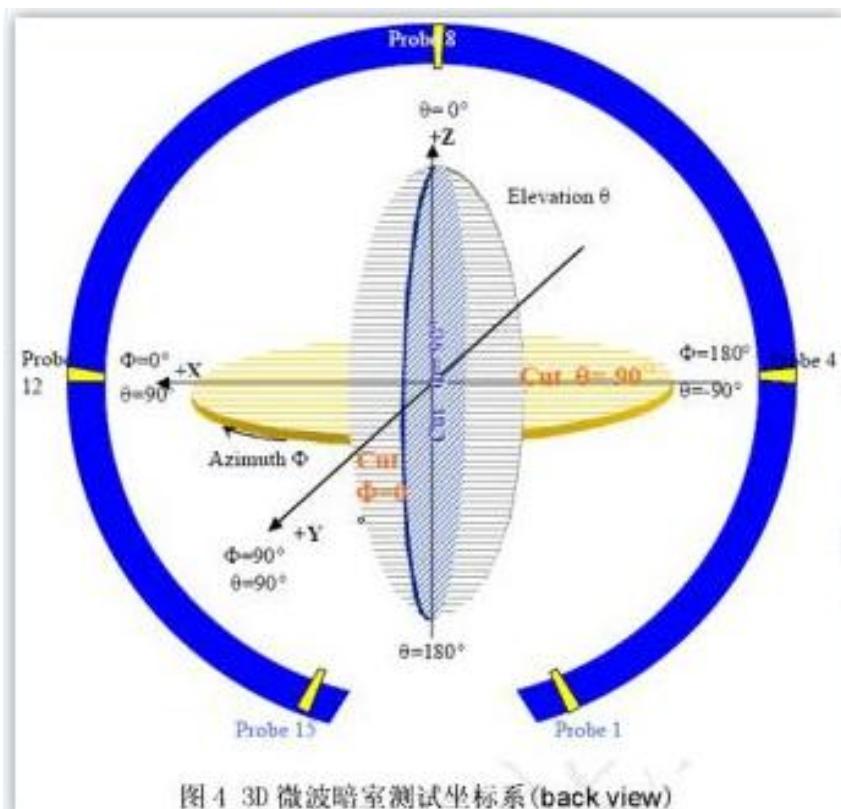


图 4 3D 微波暗室测试坐标系 (back view)

### 1. S11 Parameter-VSWR

Measuring Method is a  $50\Omega$  coaxial cable is connected to the antenna. Then this cable is connected to a network analyzer to measure the S11 parameter, Keeping this fixture away from metal at least 20cm.

## S11 Parameter-VSWR

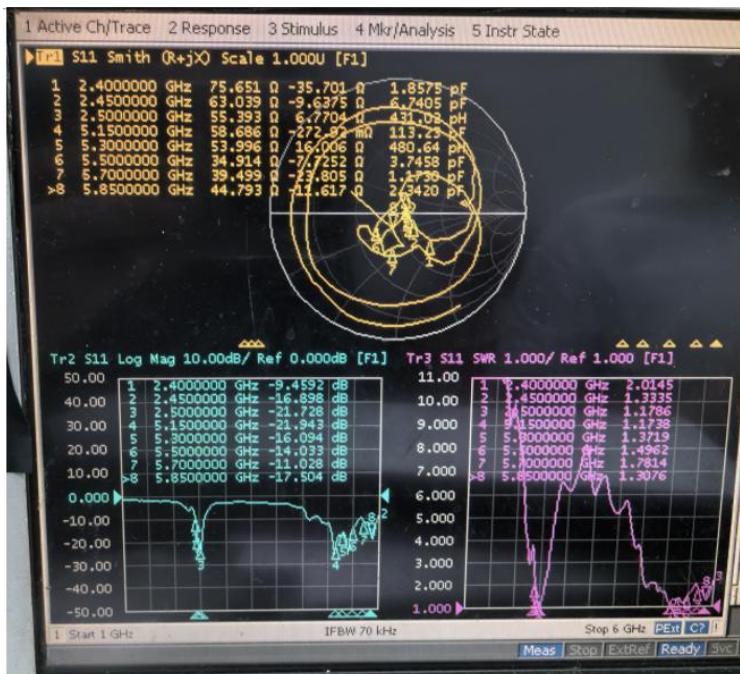


频率 (MHz)	2400	2450	2500	5150	5300	5500	5700	5850
驻波比	2.01	1.33	1.17	1.17	1.37	1.49	1.78	1.3

频率 (MHz)	2400	2450	2500	5150	5300	5500	5700	5850
阻抗	75.6Ω	63Ω	55.3Ω	58.6Ω	53.9Ω	34.9Ω	39.4Ω	44.7Ω

频率 (MHz)	2400	2450	2500	5150	5300	5500	5700	5850
回损	-9.4	-16.8	-21.7	-21.9	-16	-14	-11	-17.5


## 2. Antenna Matching Network

### Antenna

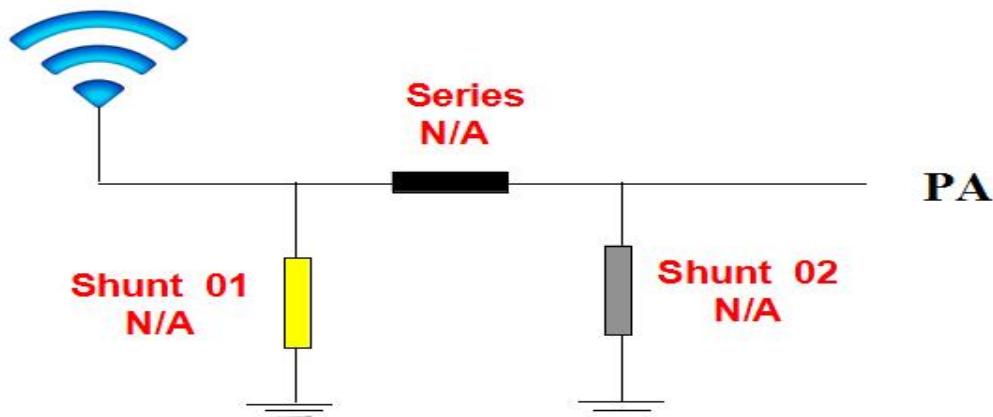

## 3. Gain & Efficiency

# Shenzhen Ruifeng Electronic Technology Co., Ltd

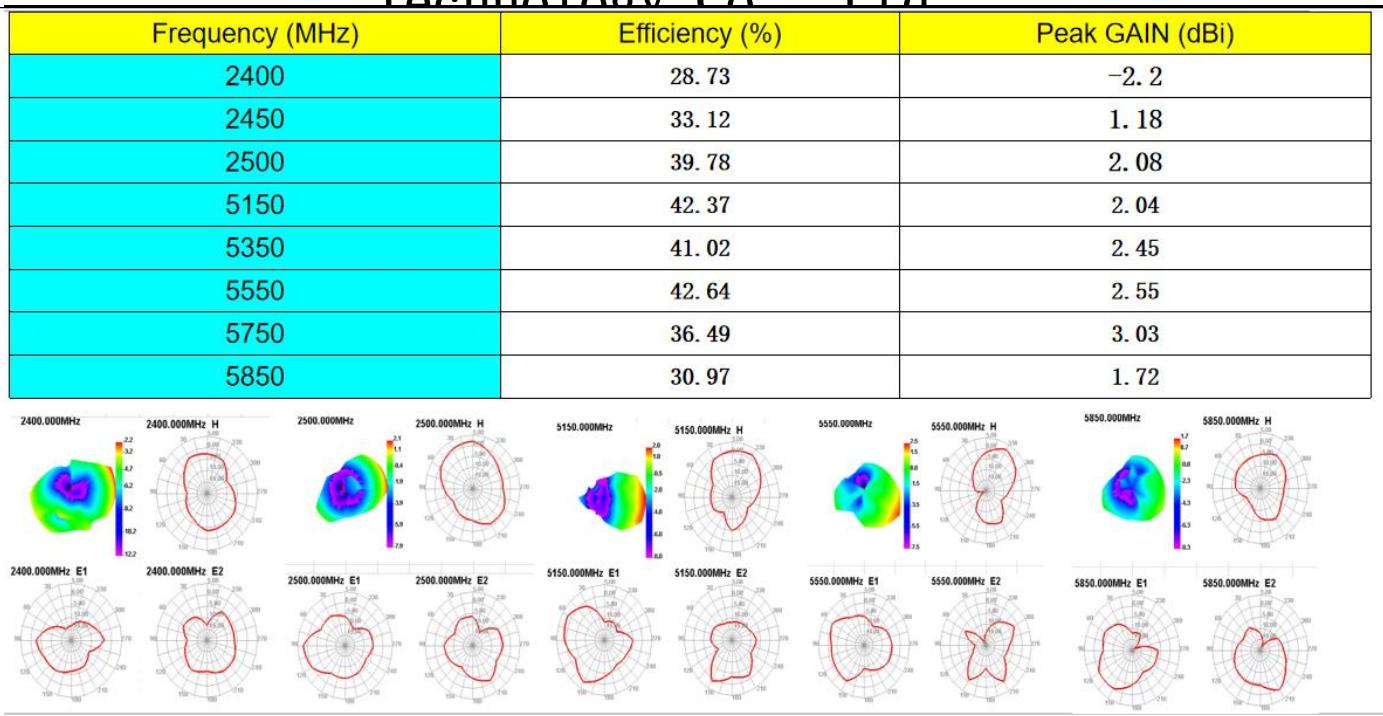

## 4. Isolation degree

**STA-(X15-X16)隔离度**



频率 (MHz)	2400	2450	2500	5150	5350	5550	5750	5850
隔离度	-24.7	-25.3	-20.4	-26.3	-34.2	-40.7	-26.9	-26.4