
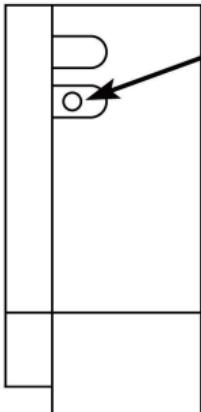


WIRING DIAGRAM

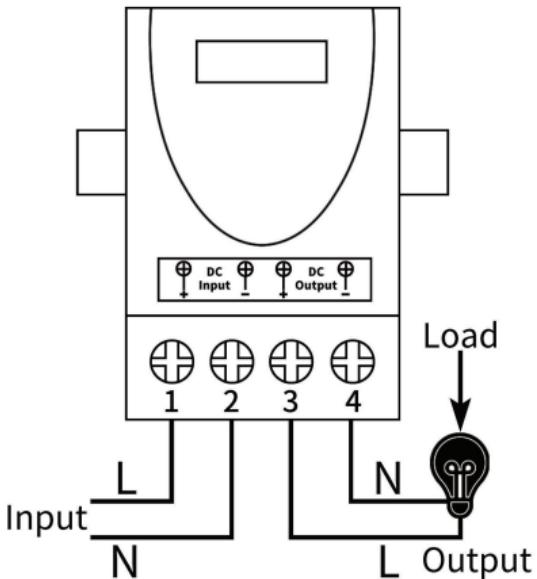

Learning Button
(Don't press it when it's not necessary)

About Working way:

Momentary: Press and hold -> On; Release -> Off.

Toggle: Press -> On; Press same button again -> Off.

Latched: Press -> On; Press other button -> Off.

Delay time: Press remote control button, the corresponding relay actuates and keeps working until the time out.

Reset: Press learning button 8s on the receiver when you want to change the working mode or clear memory.

Pairing Steps:

Momentary mode: Press the learning button 1 time. The indicator flashes 1 time, then press ON button once on the remote to finish the pairing.

Toggle mode: Press the learning button 2 times. The indicator flashes 2 times, then press ON button once on the remote to finish the pairing.

Latched mode: Firstly press the learning button 3 times. The indicator will flash 3 times, then press the ON button on the remote, finally press the OFF button on the remote to finish the pairing.

Delay time (5S): Press the Learning Button 4 times. The Led indicator flash 4 times, then press ON button once, the Led indicator flash for 3 times to finish the pairing.

Delay time (10S): Press the Learning Button 5 times. The Led indicator flash 5 times, then press ON button once, the Led indicator flash for 3 times to finish the pairing.

Delay time (15S): Press the Learning Button 6 times. The Led indicator flash 6 times, then press ON button once, the Led indicator flash for 3 times to finish the pairing.

FCC Warning

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.