


802.11ax (HT20) Modulation



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

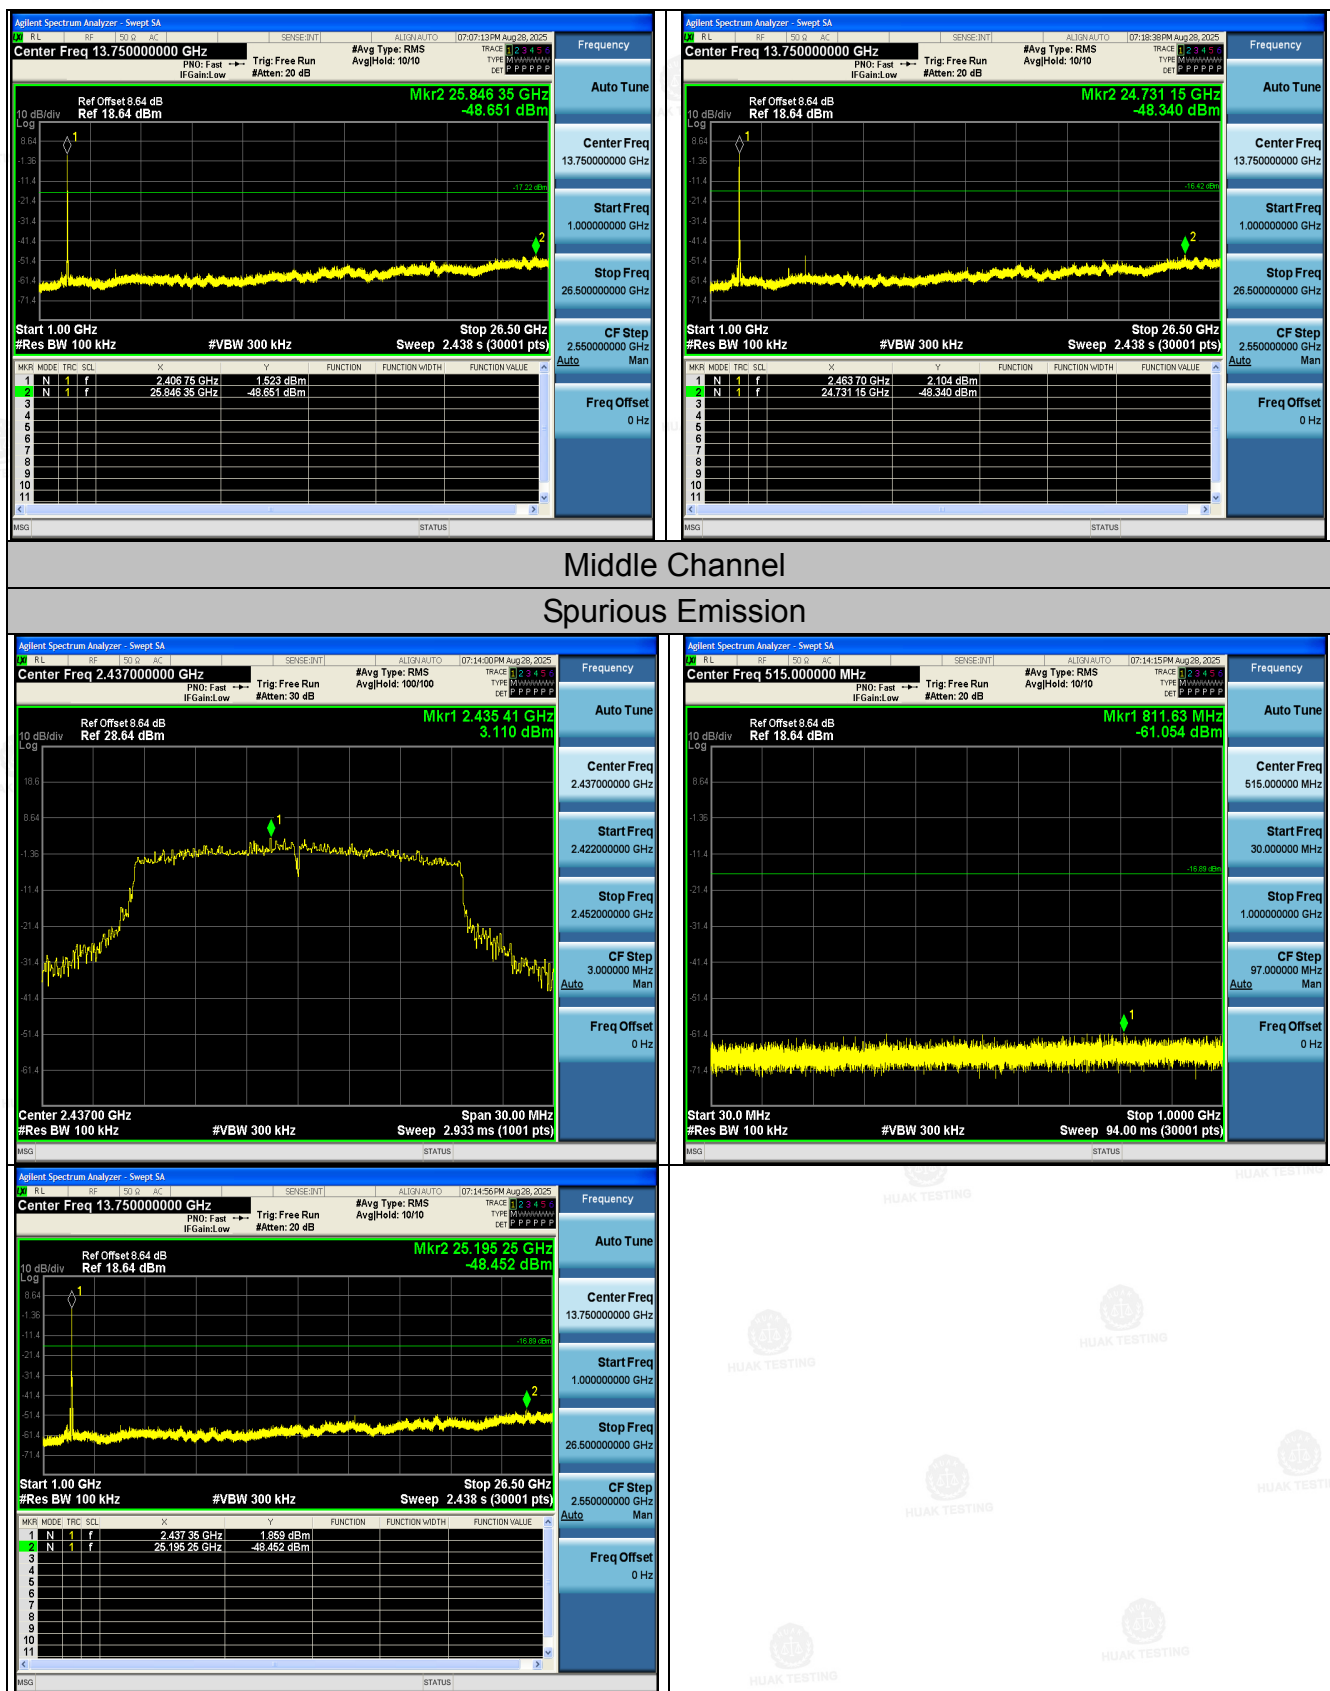


Middle Channel Spurious Emission


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAKE Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com
Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



802.11ax (HT40) Modulation

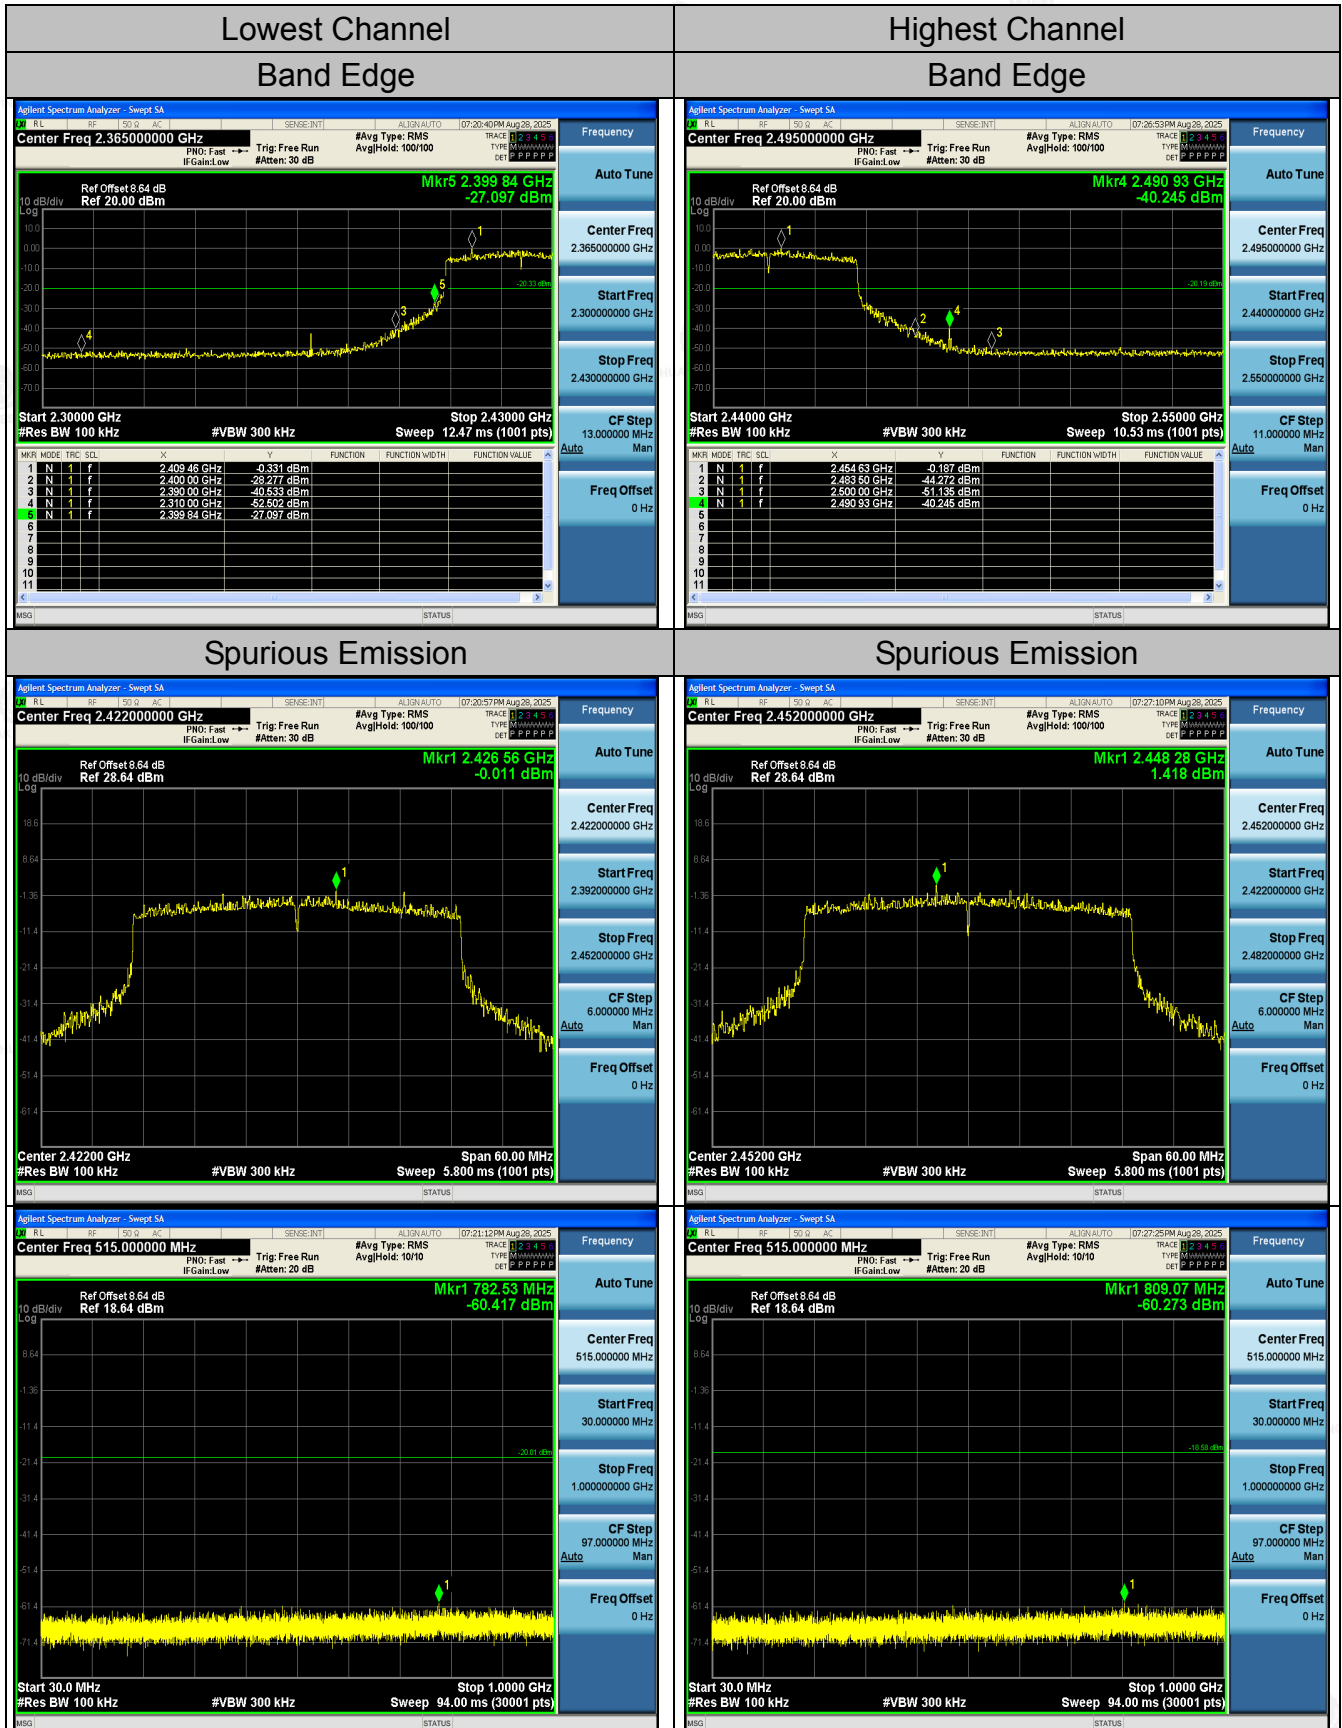

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

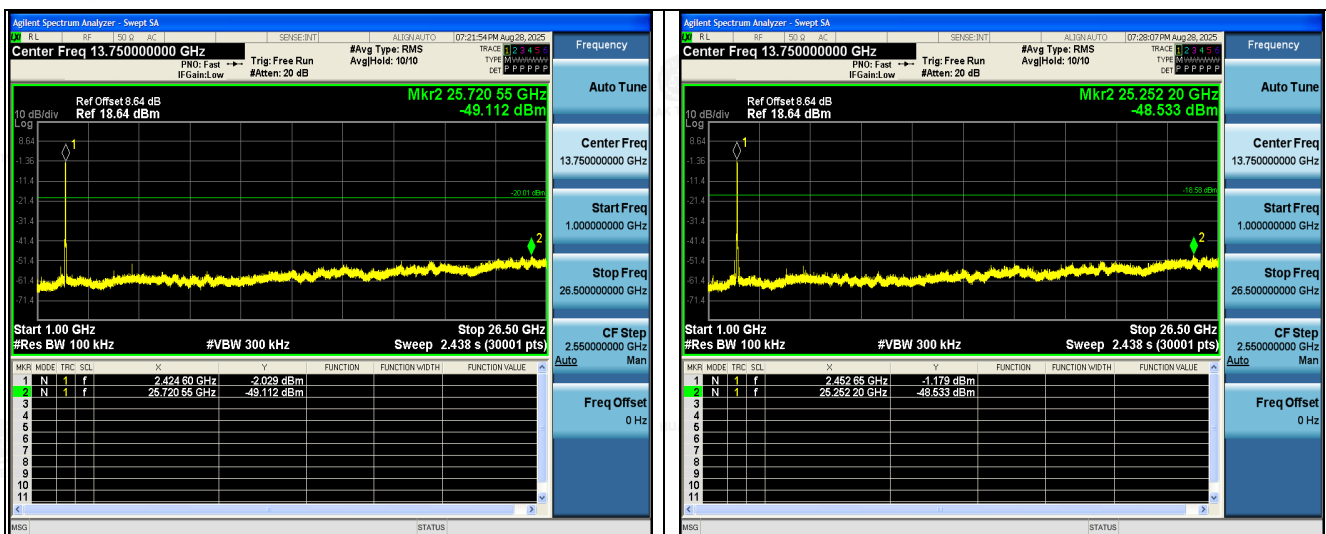

Middle Channel Spurious Emission

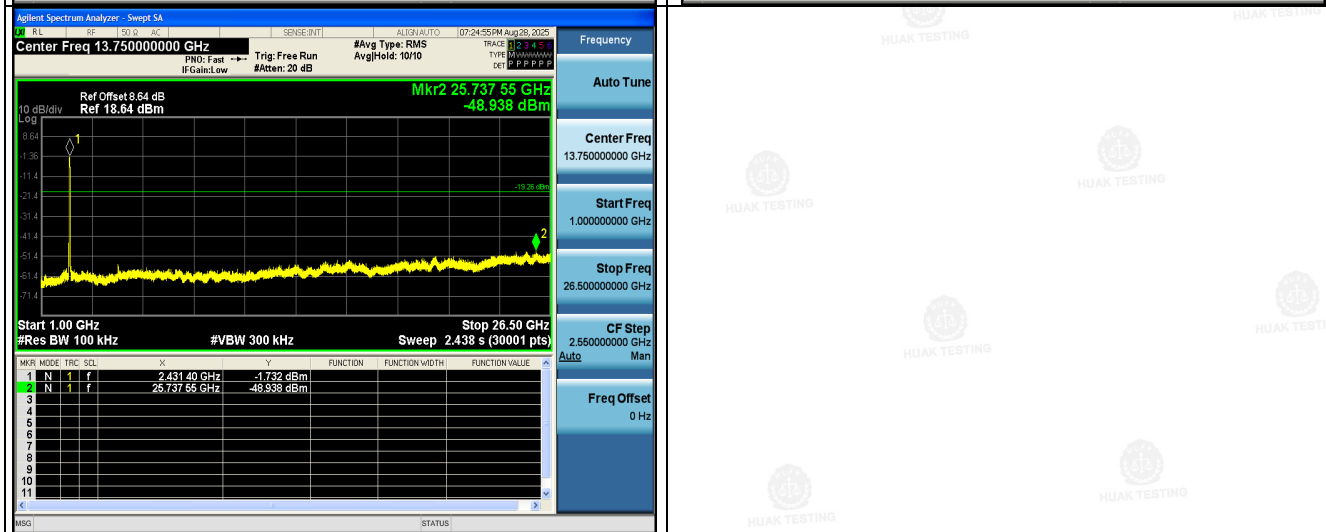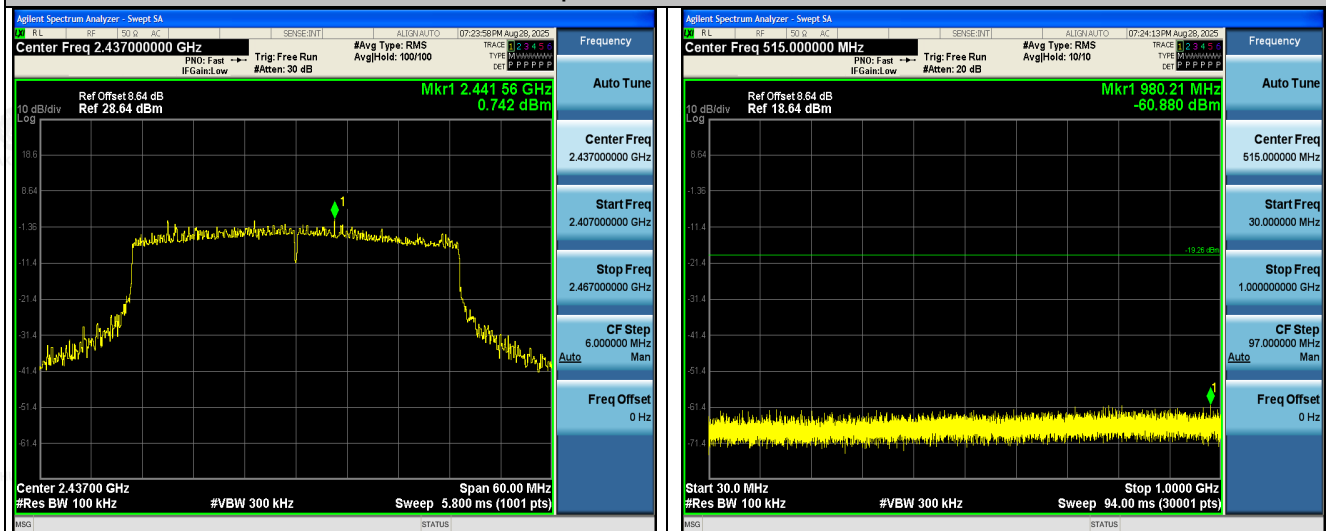


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAKE Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com
Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



4.7 Radiated Spurious Emission Measurement

Test Specification

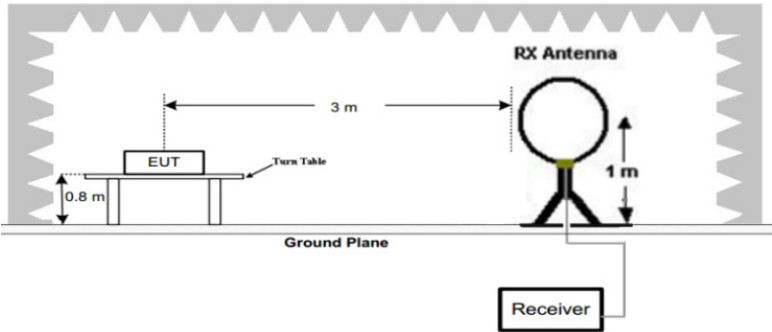Test Requirement:	FCC Part15 C Section 15.209					
Test Method:	ANSI C63.10: 2020					
Frequency Range:	9 kHz to 25 GHz					
Measurement Distance:	3 m					
Antenna Polarization:	Horizontal & Vertical					
Operation Mode:	Transmitting mode with modulation					
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark	
	9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value	
	150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value	
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value	
	Above 1GHz	Peak	1MHz	3MHz	Peak Value	
		Peak	1MHz	10Hz	Average Value	
Limit:	Frequency		Field Strength (microvolts/meter)		Measurement Distance (meters)	
	0.009-0.490		2400/F(KHz)		300	
	0.490-1.705		24000/F(KHz)		30	
	1.705-30		30		30	
	30-88		100		3	
	88-216		150		3	
	216-960		200		3	
	Above 960		500		3	
	Frequency		Field Strength (microvolts/meter)	Measurement Distance (meters)	Detector	
	Above 1GHz		500	3	Average	
			5000	3	Peak	
	Test Setup:	For radiated emissions below 30MHz				
						

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAKE Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com
Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

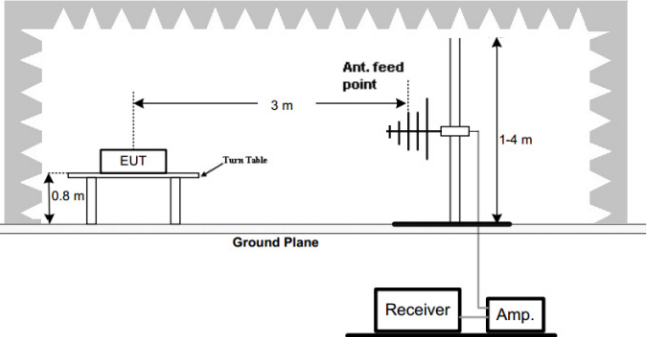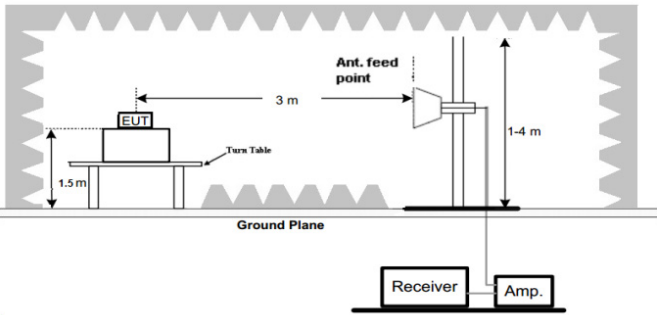	30MHz to 1GHz  Above 1GHz 
Test Procedure:	1. For the radiated emission test below 1GHz: The EUT was placed on a turntable with 0.8 meter above ground. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high PASS filter are used for the test in order to get better signal level. 2. For the radiated emission test above 1GHz: Place the measurement antenna on a turntable with 1.5 meter above ground, which is away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal.

	The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. 3. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level 4. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported. 5. Use the following spectrum analyzer settings: (1) Span shall wide enough to fully capture the emission being measured; (2) Set RBW=120 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold; (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement. 6. For average measurement: VBW = 10 Hz, when duty cycle is no less than 98 percent. VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
Test Results:	PASS

Test Instruments

Radiated Emission Test Site (966)					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Spectrum analyzer	Agilent	N9020A	HKE-025	Feb. 19, 2025	Feb. 18, 2026
Spectrum analyzer	Agilent	N9020A	HKE-117	Feb. 19, 2025	Feb. 18, 2026
Spectrum analyzer	R&S	FSV3044	HKE-126	Feb. 19, 2025	Feb. 18, 2026
Preamplifier	EMCI	EMC051845S	HKE-006	Feb. 19, 2025	Feb. 18, 2026
Preamplifier	Schwarzbeck	BBV 9743	HKE-016	Feb. 19, 2025	Feb. 18, 2026
Preamplifier	A.H. Systems	SAS-574	HKE-182	Feb. 19, 2025	Feb. 18, 2026
6dB Attenuator	Pasternack	6db	HKE-184	Feb. 19, 2025	Feb. 18, 2026
EMI Test Receiver	Rohde & Schwarz	ESR-7	HKE-010	Feb. 19, 2025	Feb. 18, 2026
Broadband Antenna	Schwarzbeck	VULB9168	HKE-167	Feb. 21, 2024	Feb. 20, 2026
Loop Antenna	COM-POWER	AL-130R	HKE-014	Feb. 21, 2024	Feb. 20, 2026
Horn Antenna	Schwarzbeck	9120D	HKE-013	Feb. 21, 2024	Feb. 20, 2026
EMI Test Software	Tonscend	JS32-RE 5.0.0	HKE-082	/	/
RSE Test Software	Tonscend	JS36-RSE 5.0.0	HKE-184	/	/


Test Data

Car charger:

All the test modes completed for test. Only the worst result was reported as below:

Below 1GHz


Horizontal:

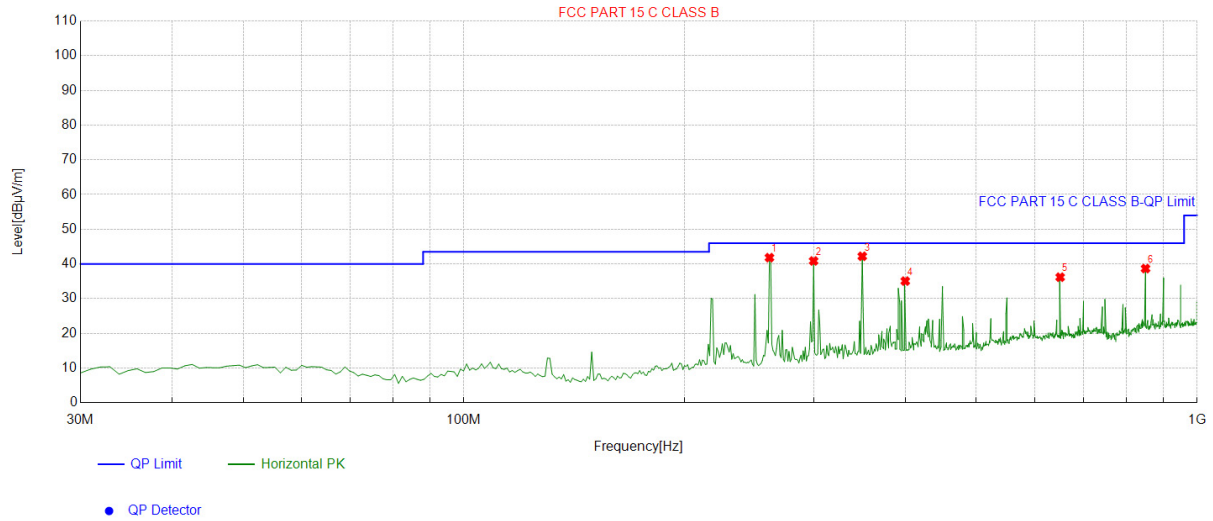

Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	261.0911	-13.28	55.10	41.82	46.00	4.18	100	155	Horizontal
2	299.9299	-11.71	52.58	40.87	46.00	5.13	100	97	Horizontal
3	349.4494	-10.04	52.25	42.21	46.00	3.79	100	64	Horizontal
4	399.9399	-9.84	44.91	35.07	46.00	10.93	100	159	Horizontal
5	650.4505	-5.14	41.33	36.19	46.00	9.81	100	141	Horizontal
6	850.4705	-1.46	40.13	38.67	46.00	7.33	100	16	Horizontal

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit – Level;

Vertical:

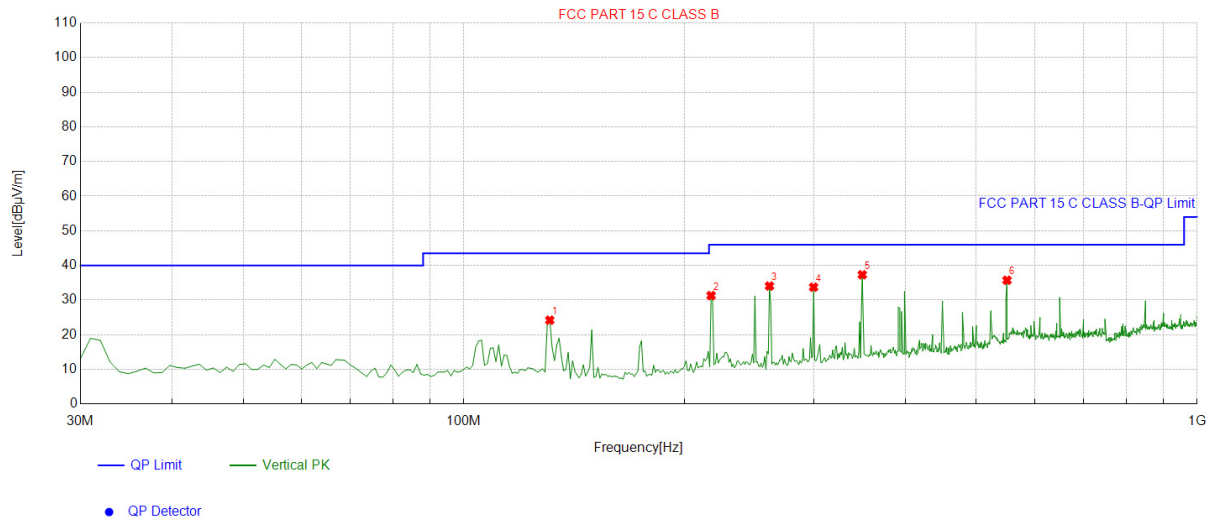

Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	130.9810	-17.44	41.65	24.21	43.50	19.29	100	344	Vertical
2	217.3974	-14.66	45.96	31.30	46.00	14.70	100	16	Vertical
3	261.0911	-13.28	47.34	34.06	46.00	11.94	100	143	Vertical
4	299.9299	-11.71	45.44	33.73	46.00	12.27	100	77	Vertical
5	349.4494	-10.04	47.36	37.32	46.00	8.68	100	183	Vertical
6	550.4404	-7.13	42.86	35.73	46.00	10.27	100	12	Vertical

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit – Level;

Harmonics and Spurious Emissions

Frequency Range (9kHz-30MHz)

Frequency (MHz)	Level@3m (dBμV/m)	Limit@3m (dBμV/m)
--	--	--
--	--	--
--	--	--
--	--	--

Note:1. Emission Level=Reading+ Cable loss-Antenna factor-Amp factor.


2. The emission levels are 20 dB below the limit value, which are not reported. It is deemed to comply with the requirement.

Hardwire Kit:

All the test modes completed for test. Only the worst result was reported as below:

Below 1GHz


Horizontal:

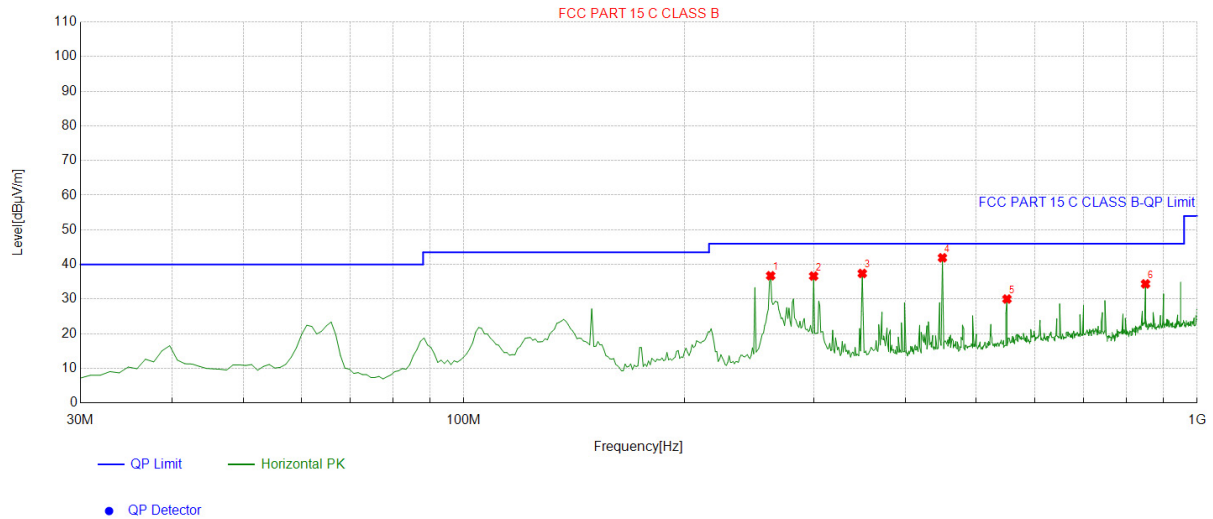

Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	262.0621	-13.24	49.99	36.75	46.00	9.25	100	225	Horizontal
2	299.9299	-11.71	48.36	36.65	46.00	9.35	100	10	Horizontal
3	349.4494	-10.04	47.44	37.40	46.00	8.60	100	16	Horizontal
4	449.4595	-8.78	50.70	41.92	46.00	4.08	100	79	Horizontal
5	550.4404	-7.13	37.15	30.02	46.00	15.98	100	163	Horizontal
6	850.4705	-1.46	35.85	34.39	46.00	11.61	100	309	Horizontal

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit – Level;

Vertical:

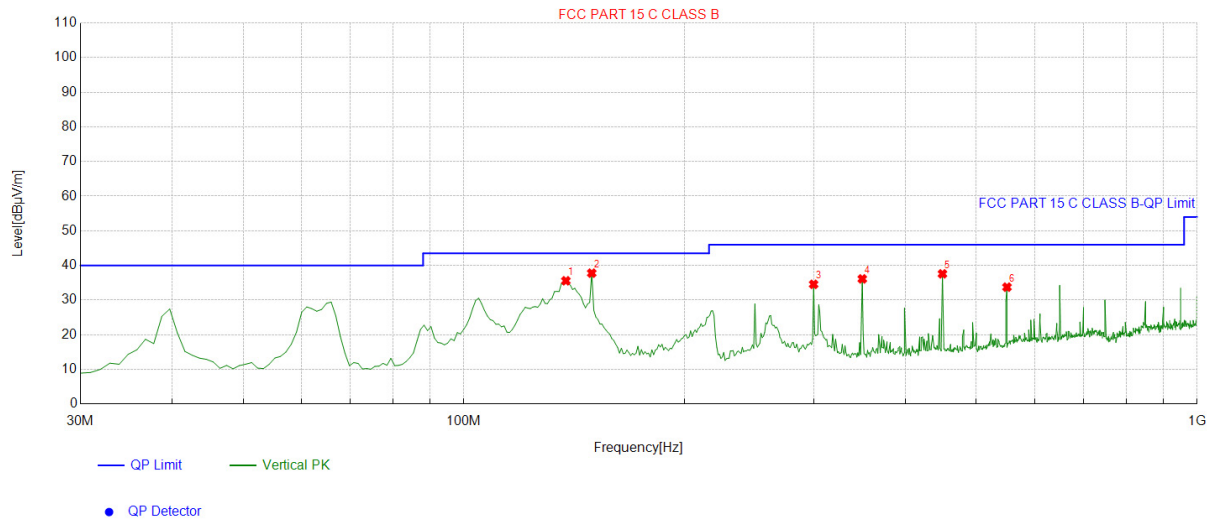

Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	137.7778	-17.87	53.44	35.57	43.50	7.93	100	289	Vertical
2	149.4294	-18.08	55.86	37.78	43.50	5.72	100	285	Vertical
3	299.9299	-11.71	46.27	34.56	46.00	11.44	100	41	Vertical
4	349.4494	-10.04	46.16	36.12	46.00	9.88	100	147	Vertical
5	449.4595	-8.78	46.36	37.58	46.00	8.42	100	307	Vertical
6	550.4404	-7.13	40.87	33.74	46.00	12.26	100	311	Vertical

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit – Level;

Harmonics and Spurious Emissions

Frequency Range (9kHz-30MHz)

Frequency (MHz)	Level@3m (dBμV/m)	Limit@3m (dBμV/m)
--	--	--
--	--	--
--	--	--
--	--	--

Note:1. Emission Level=Reading+ Cable loss-Antenna factor-Amp factor.

2. The emission levels are 20 dB below the limit value, which are not reported. It is deemed to comply with the requirement.

Above 1GHz

Radiated Emission Test

LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	56.19	-3.64	52.55	74	21.45	peak
4824	43.72	-3.64	40.08	54	13.92	AVG
7236	55.82	-0.95	54.87	74	19.13	peak
7236	44.78	-0.95	43.83	54	10.17	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator - Preamplifier; Level = Reading + Factor; Margin = Limit - Level.

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	54.52	-3.64	50.88	74	23.12	peak
4824	43.3	-3.64	39.66	54	14.34	AVG
7236	56.39	-0.95	55.44	74	18.56	peak
7236	44.14	-0.95	43.19	54	10.81	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator - Preamplifier; Level = Reading + Factor; Margin = Limit - Level.

MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	56.95	-3.51	53.44	74	20.56	peak
4874	42.89	-3.51	39.38	54	14.62	AVG
7311	55.18	-0.82	54.36	74	19.64	peak
7311	43.21	-0.82	42.39	54	11.61	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator - Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	54.63	-3.51	51.12	74	22.88	peak
4874	43.13	-3.51	39.62	54	14.38	AVG
7311	57.24	-0.82	56.42	74	17.58	peak
7311	44.05	-0.82	43.23	54	10.77	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator - Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	56.22	-3.43	52.79	74	21.21	peak
4924	42.13	-3.43	38.7	54	15.3	AVG
7386	54.75	-0.75	54	74	20	peak
7386	42.71	-0.75	41.96	54	12.04	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator - Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	55.08	-3.43	51.65	74	22.35	peak
4924	43.62	-3.43	40.19	54	13.81	AVG
7386	56.31	-0.75	55.56	74	18.44	peak
7386	43.53	-0.75	42.78	54	11.22	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator - Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency; "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) The emissions are attenuated more than 20dB below the permissible limits are not recorded in the report.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) < 93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) < 54dBuV/m(AV Limit), the Average Detected not need to completed.

LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	55.58	-3.64	51.94	74	22.06	peak
4824	42.73	-3.64	39.09	54	14.91	AVG
7236	55.63	-0.95	54.68	74	19.32	peak
7236	44.19	-0.95	43.24	54	10.76	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator - Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	55.34	-3.64	51.7	74	22.3	peak
4824	44.68	-3.64	41.04	54	12.96	AVG
7236	56.14	-0.95	55.19	74	18.81	peak
7236	44.36	-0.95	43.41	54	10.59	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator - Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	55.1	-3.51	51.59	74	22.41	peak
4874	41.98	-3.51	38.47	54	15.53	AVG
7311	54.75	-0.82	53.93	74	20.07	peak
7311	43.76	-0.82	42.94	54	11.06	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator - Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	54.52	-3.51	51.01	74	22.99	peak
4874	43.63	-3.51	40.12	54	13.88	AVG
7311	56.92	-0.82	56.1	74	17.9	peak
7311	43.45	-0.82	42.63	54	11.37	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator - Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	57.02	-3.43	53.59	74	20.41	peak
4924	44.48	-3.43	41.05	54	12.95	AVG
7386	54.17	-0.75	53.42	74	20.58	peak
7386	42.67	-0.75	41.92	54	12.08	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator - Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	54.99	-3.43	51.56	74	22.44	peak
4924	44.3	-3.43	40.87	54	13.13	AVG
7386	56.72	-0.75	55.97	74	18.03	peak
7386	42.85	-0.75	42.1	54	11.9	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator - Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency; "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) The emissions are attenuated more than 20dB below the permissible limits are not recorded in the report.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) < 93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) < 54dBuV/m(AV Limit), the Average Detected not need to completed.

LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	54.57	-3.64	50.93	74	23.07	peak
4824	43.81	-3.64	40.17	54	13.83	AVG
7236	54.31	-0.95	53.36	74	20.64	peak
7236	42.79	-0.95	41.84	54	12.16	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator - Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	54.98	-3.64	51.34	74	22.66	peak
4824	43.11	-3.64	39.47	54	14.53	AVG
7236	57.18	-0.95	56.23	74	17.77	peak
7236	42.67	-0.95	41.72	54	12.28	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator - Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

MID CH6 (802.11n/H20 Mode)/2437

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	55.51	-3.51	52.00	74	22.00	peak
4874	42.43	-3.51	38.92	54	15.08	AVG
7311	55.62	-0.82	54.80	74	19.20	peak
7311	43.08	-0.82	42.26	54	11.74	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator - Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	56.53	-3.51	53.02	74	20.98	peak
4874	44.56	-3.51	41.05	54	12.95	AVG
7311	57.11	-0.82	56.29	74	17.71	peak
7311	42.46	-0.82	41.64	54	12.36	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator - Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

HIGH CH11 (802.11n/H20 Mode)/2462

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	56.98	-3.43	53.55	74	20.45	peak
4924	42.9	-3.43	39.47	54	14.53	AVG
7386	55.37	-0.75	54.62	74	19.38	peak
7386	43.33	-0.75	42.58	54	11.42	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator - Preamplifier; Level = Reading + Factor; Margin = Limit - Level.

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	54.31	-3.43	50.88	74	23.12	peak
4924	44.7	-3.43	41.27	54	12.73	AVG
7386	54.66	-0.75	53.91	74	20.09	peak
7386	42.39	-0.75	41.64	54	12.36	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator - Preamplifier; Level = Reading + Factor; Margin = Limit - Level.

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency; "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) The emissions are attenuated more than 20dB below the permissible limits are not recorded in the report.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) < 93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) < 54dBuV/m(AV Limit), the Average Detected not need to completed.

LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	56.06	-3.63	52.43	74	21.57	peak
4844	43.25	-3.63	39.62	54	14.38	AVG
7266	56.37	-0.94	55.43	74	18.57	peak
7266	44.39	-0.94	43.45	54	10.55	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator - Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	56.05	-3.63	52.42	74	21.58	peak
4844	45.3	-3.63	41.67	54	12.33	AVG
7266	56.37	-0.94	55.43	74	18.57	peak
7266	44.82	-0.94	43.88	54	10.12	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator - Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	56.08	-3.51	52.57	74	21.43	peak
4874	44.51	-3.51	41	54	13	AVG
7311	55.62	-0.82	54.8	74	19.2	peak
7311	42.84	-0.82	42.02	54	11.98	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator - Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	56.89	-3.51	53.38	74	20.62	peak
4874	44.16	-3.51	40.65	54	13.35	AVG
7311	55.89	-0.82	55.07	74	18.93	peak
7311	42.96	-0.82	42.14	54	11.86	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator - Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	56.57	-3.43	53.14	74	20.86	peak
4904	42.87	-3.43	39.44	54	14.56	AVG
7356	56.81	-0.75	56.06	74	17.94	peak
7356	43.17	-0.75	42.42	54	11.58	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator - Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	56.57	-3.43	53.14	74	20.86	peak
4904	42.87	-3.43	39.44	54	14.56	AVG
7356	56.81	-0.75	56.06	74	17.94	peak
7356	43.17	-0.75	42.42	54	11.58	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator - Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency; "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) The emissions are attenuated more than 20dB below the permissible limits are not recorded in the report.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

Test Result of Radiated Spurious at Band edges

All modes have been tested. Only the worst result was reported as below:

Operation Mode:

802.11b Mode TX CH Low (2412MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	55.54	-5.81	49.73	74	24.27	peak
2310.00	43.04	-5.81	37.23	54	16.77	AVG
2390.00	55.83	-5.84	49.99	74	24.01	peak
2390.00	42.75	-5.84	36.91	54	17.09	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator - Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	54.95	-5.81	49.14	74	24.86	peak
2310.00	43.84	-5.81	38.03	54	15.97	AVG
2390.00	56.89	-5.84	51.05	74	22.95	peak
2390.00	44.69	-5.84	38.85	54	15.15	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator - Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Operation Mode: TX CH High (2462MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	54.4	-5.81	48.59	74	25.41	peak
2483.50	42.31	-5.81	36.5	54	17.5	AVG
2500.00	54.84	-6.06	48.78	74	25.22	peak
2500.00	42.53	-6.06	36.47	54	17.53	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator - Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	56.87	-5.81	51.06	74	22.94	peak
2483.50	43.9	-5.81	38.09	54	15.91	AVG
2500.00	56.13	-6.06	50.07	74	23.93	peak
2500.00	44.61	-6.06	38.55	54	15.45	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator - Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode: 802.11g Mode TX CH Low (2412MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	56.1	-5.81	50.29	74	23.71	peak
2310.00	43	-5.81	37.19	54	16.81	AVG
2390.00	56.64	-5.84	50.8	74	23.2	peak
2390.00	44.12	-5.84	38.28	54	15.72	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator - Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	55.72	-5.81	49.91	74	24.09	peak
2310.00	43.19	-5.81	37.38	54	16.62	AVG
2390.00	55.91	-5.84	50.07	74	23.93	peak
2390.00	44.54	-5.84	38.7	54	15.3	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator - Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Operation Mode: TX CH High (2462MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	56.55	-5.65	50.9	74	23.1	peak
2483.50	43.02	-5.65	37.37	54	16.63	AVG
2500.00	54.47	-5.65	48.82	74	25.18	peak
2500.00	43.68	-5.65	38.03	54	15.97	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator - Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	56.72	-5.65	51.07	74	22.93	peak
2483.50	44.38	-5.65	38.73	54	15.27	AVG
2500.00	55.99	-5.65	50.34	74	23.66	peak
2500.00	45	-5.65	39.35	54	14.65	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator - Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode: 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	55.86	-5.81	50.05	74	23.95	peak
2310.00	43.21	-5.81	37.4	54	16.6	AVG
2390.00	56.5	-5.84	50.66	74	23.34	peak
2390.00	44.45	-5.84	38.61	54	15.39	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator - Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	54.64	-5.81	48.83	74	25.17	peak
2310.00	45.11	-5.81	39.3	54	14.7	AVG
2390.00	56.82	-5.84	50.98	74	23.02	peak
2390.00	44.49	-5.84	38.65	54	15.35	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator - Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Operation Mode: TX CH High (2462MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	54.29	-5.65	48.64	74	25.36	peak
2483.50	44.79	-5.65	39.14	54	14.86	AVG
2500.00	55.09	-5.65	49.44	74	24.56	peak
2500.00	42.77	-5.65	37.12	54	16.88	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator - Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	54.34	-5.65	48.69	74	25.31	peak
2483.50	45.51	-5.65	39.86	54	14.14	AVG
2500.00	56.69	-5.65	51.04	74	22.96	peak
2500.00	45.13	-5.65	39.48	54	14.52	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator - Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode: 802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	54.89	-5.81	49.08	74	24.92	peak
2310.00	/	-5.81	/	54	/	AVG
2390.00	55.09	-5.84	49.25	74	24.75	peak
2390.00	/	-5.84	/	54	/	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator - Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	56.44	-5.81	50.63	74	23.37	peak
2310.00	/	-5.81	/	54	/	AVG
2390.00	57.15	-5.84	51.31	74	22.69	peak
2390.00	/	-5.84	/	54	/	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator - Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Operation Mode: TX CH High (2452MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	55.4	-5.65	49.75	74	24.25	peak
2483.50	/	-5.65	/	54	/	AVG
2500.00	55.65	-5.65	50	74	24	peak
2500.00	/	-5.65	/	54	/	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator - Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	56.26	-5.65	50.61	74	23.39	peak
2483.50	/	-5.65	/	54	/	AVG
2500.00	55.01	-5.65	49.36	74	24.64	peak
2500.00	/	-5.65	/	54	/	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator - Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode: 802.11ax/H20 Mode TX CH Low (2412MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	55.83	-5.81	50.02	74	23.98	peak
2310.00	42.98	-5.81	37.17	54	16.83	AVG
2390.00	54.9	-5.84	49.06	74	24.94	peak
2390.00	42.37	-5.84	36.53	54	17.47	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator - Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	54.94	-5.81	49.13	74	24.87	peak
2310.00	43.88	-5.81	38.07	54	15.93	AVG
2390.00	54.45	-5.84	48.61	74	25.39	peak
2390.00	42.74	-5.84	36.9	54	17.1	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator - Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Operation Mode: TX CH High (2462MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	56.38	-5.65	50.73	74	23.27	peak
2483.50	42.36	-5.65	36.71	54	17.29	AVG
2500.00	56.52	-5.65	50.87	74	23.13	peak
2500.00	43.42	-5.65	37.77	54	16.23	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator - Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	54.33	-5.65	48.68	74	25.32	peak
2483.50	43.48	-5.65	37.83	54	16.17	AVG
2500.00	55.77	-5.65	50.12	74	23.88	peak
2500.00	43.88	-5.65	38.23	54	15.77	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator - Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode: 802.11ax/H40 Mode TX CH Low (2422MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	56.23	-5.81	50.42	74	23.58	peak
2310.00	/	-5.81	/	54	/	AVG
2390.00	56.52	-5.84	50.68	74	23.32	peak
2390.00	/	-5.84	/	54	/	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator - Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	54.33	-5.81	48.52	74	25.48	peak
2310.00	/	-5.81	/	54	/	AVG
2390.00	55.77	-5.84	49.93	74	24.07	peak
2390.00	/	-5.84	/	54	/	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator - Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Operation Mode: TX CH High (2452MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	55.76	-5.65	50.11	74	23.89	peak
2483.50	/	-5.65	/	54	/	AVG
2500.00	54.06	-5.65	48.41	74	25.59	peak
2500.00	/	-5.65	/	54	/	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator - Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	57.09	-5.65	51.44	74	22.56	peak
2483.50	/	-5.65	/	54	/	AVG
2500.00	55.29	-5.65	49.64	74	24.36	peak
2500.00	/	-5.65	/	54	/	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator - Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Remark:

1. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.
2. In restricted bands of operation, the spurious emissions below the permissible value more than 20dB.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

4.8 Antenna Requirement

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247, if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


Refer to statement below for compliance.

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

Antenna Connected Construction


The antenna used in this product is a Ceramic Antenna, need professional installation, not easy to remove. It conforms to the standard requirements. The directional gains of antenna used for transmitting is 4.97dBi.

WIFI ANTENNA

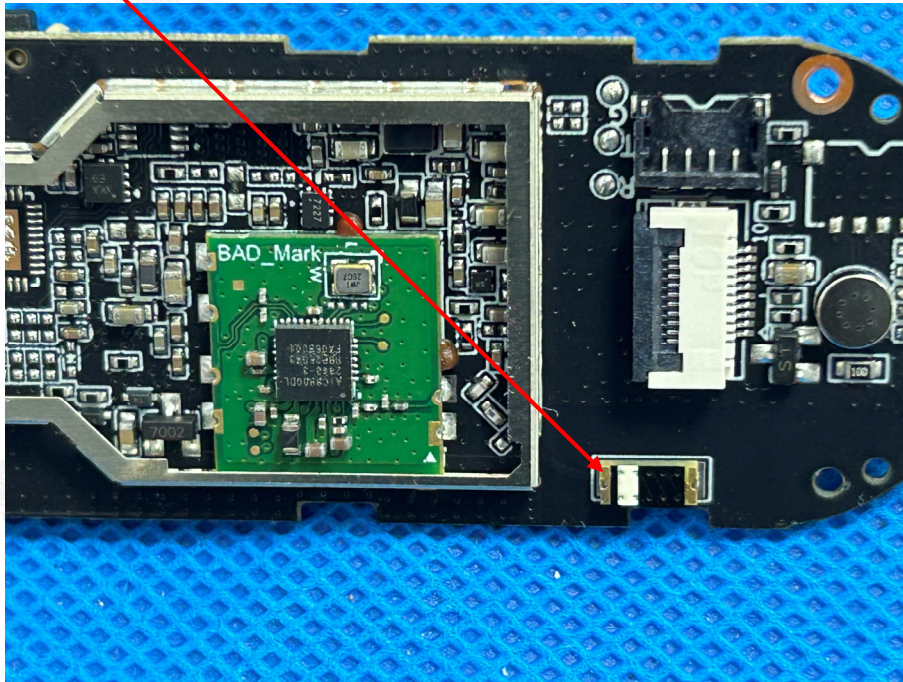



5. Photographs of Test

Radiated Emission
Car charger:

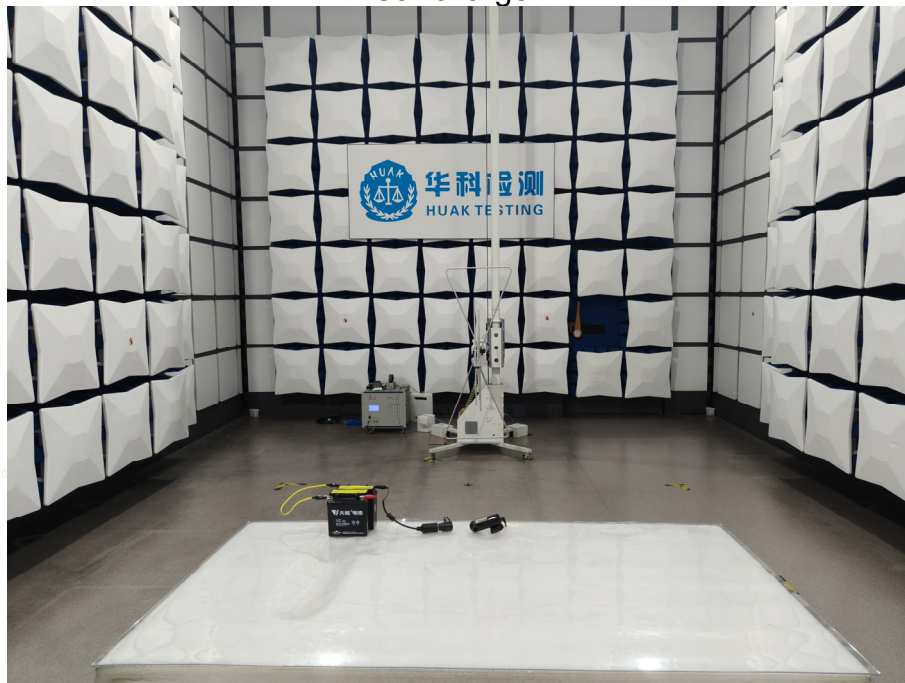


Hardwire Kit:

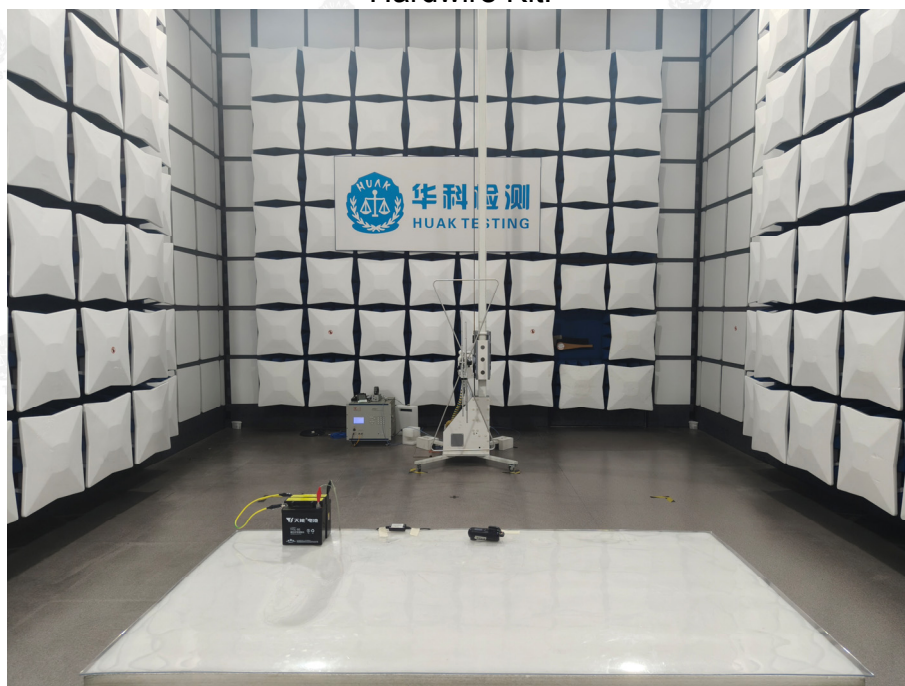

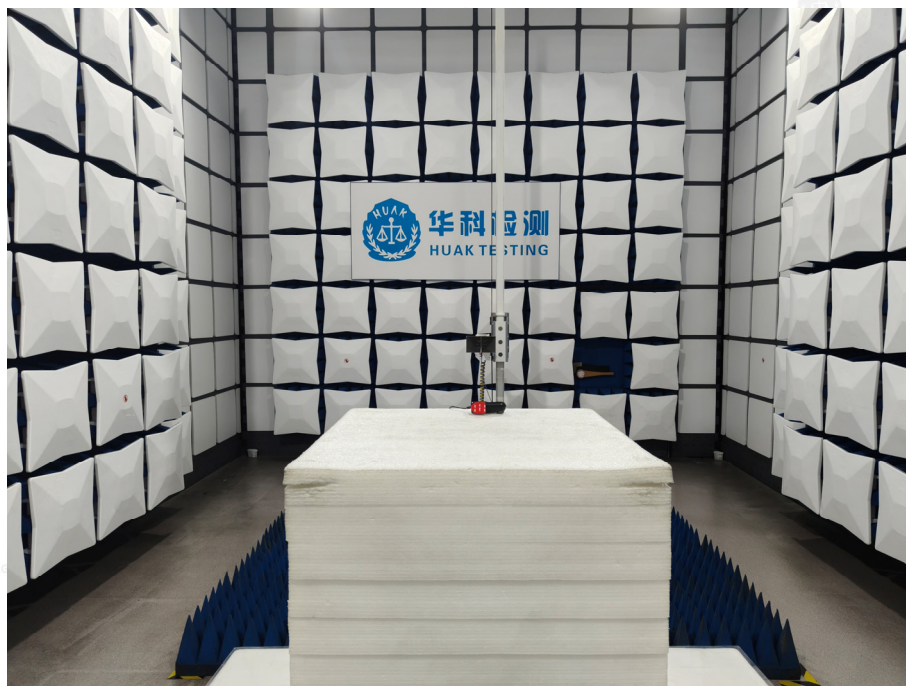

RF Conducted Emission

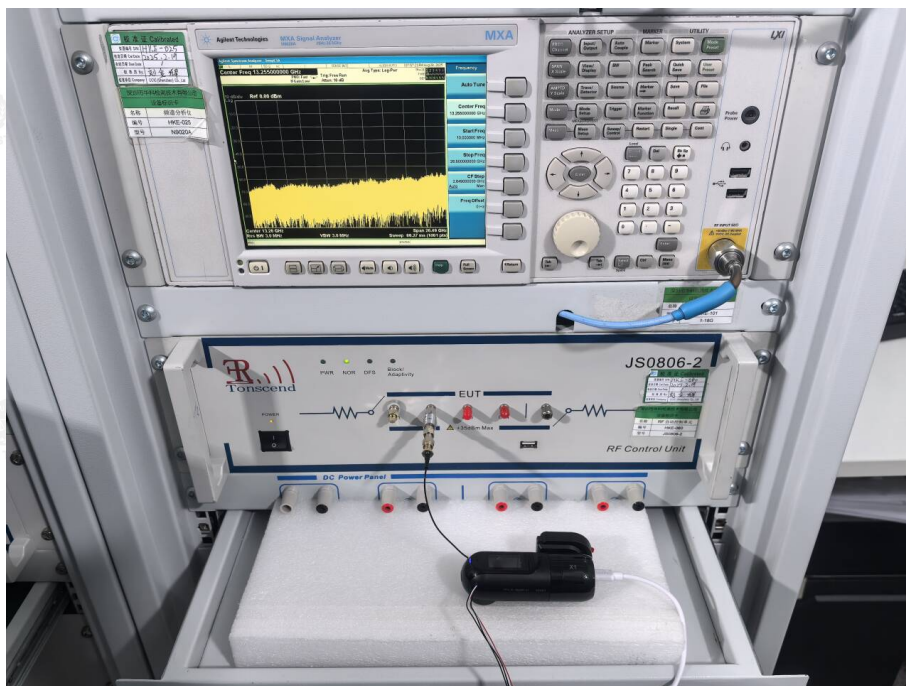

6. Photos of the EUT

Reference to the report: ANNEX A of external photos and ANNEX B of internal photos.

-----End of test report-----

